



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant:** Hoymiles Power Electronics Inc.

Address: No.18 Kangjing Road, HangZhou, Zhejiang Province, P.R. China

**FCC ID:** 2ARNB-DTUPLUSSC

**Product Name:** Data Transfer Unit

**Standard(s):** 47 CFR Part 15, Subpart C(15.247)

ANSI C63.10-2013

KDB 558074 D01 15.247 Meas Guidance v05r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR230847711-00B

**Date Of Issue:** 2023/9/30

**Reviewed By:** Calvin Chen

Title: RF Engineer

**Approved By:** Sun Zhong

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

**Test Facility**

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

**Declarations**

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>5</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>7</b>
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details .....	7
1.2.3 Support Cable List and Details .....	7
1.2.4 Block Diagram of Test Setup.....	8
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>11</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>11</b>
3.1.1 Applicable Standard.....	11
3.1.2 EUT Setup.....	12
3.1.3 EMI Test Receiver Setup .....	12
3.1.4 Test Procedure .....	13
3.1.5 Corrected Amplitude & Margin Calculation.....	13
<b>3.2 RADIATED SPURIOUS EMISSIONS.....</b>	<b>14</b>
3.2.1 Applicable Standard.....	14
3.2.2 EUT Setup.....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	15
3.2.4 Test Procedure .....	15
3.2.5 Corrected Amplitude & Margin Calculation.....	15
<b>3.3 20 dB EMISSION BANDWIDTH .....</b>	<b>16</b>
3.3.1 Applicable Standard.....	16
3.3.2 EUT Setup.....	16
3.3.3 Test Procedure .....	16
<b>3.4 CHANNEL SEPARATION .....</b>	<b>17</b>
3.4.1 Applicable Standard.....	17
3.4.2 EUT Setup.....	17
3.4.3 Test Procedure .....	17
<b>3.5 NUMBER OF HOPPING FREQUENCY .....</b>	<b>18</b>
3.5.1 Applicable Standard.....	18
3.5.2 EUT Setup.....	18
3.5.3 Test Procedure .....	18
<b>3.6 TIME OF OCCUPANCY(DWELL TIME).....</b>	<b>19</b>
3.6.1 Applicable Standard.....	19
3.6.2 EUT Setup.....	19
3.6.3 Test Procedure .....	19
<b>3.7 MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>20</b>
3.7.1 Applicable Standard.....	20
3.7.2 EUT Setup.....	20

3.7.3 Test Procedure .....	20
<b>3.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>21</b>
3.8.1 Applicable Standard.....	21
3.8.2 EUT Setup.....	21
3.8.3 Test Procedure .....	21
<b>3.9 ANTENNA REQUIREMENT.....</b>	<b>22</b>
3.9.1 Applicable Standard.....	22
3.9.2 Judgment.....	22
<b>4. TEST DATA AND RESULTS .....</b>	<b>23</b>
<b>4.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>23</b>
<b>4.2 RADIATED SPURIOUS EMISSIONS.....</b>	<b>26</b>
<b>4.3 20 dB EMISSION BANDWIDTH .....</b>	<b>38</b>
<b>4.4 CHANNEL SEPARATION .....</b>	<b>40</b>
<b>4.5 NUMBER OF HOPPING FREQUENCY .....</b>	<b>42</b>
<b>4.6 TIME OF OCCUPANCY (DWELL TIME) .....</b>	<b>44</b>
<b>4.7 MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>46</b>
<b>4.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>47</b>
<b>5. EUT PHOTOGRAPHS .....</b>	<b>50</b>
<b>6. TEST SETUP PHOTOGRAPHS .....</b>	<b>51</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230847711-00B	Original Report	2023/9/30

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Data Transfer Unit
<b>EUT Model:</b>	DTU-Plus-S-C
<b>Operation Frequency:</b>	915.25-927.5 MHz
<b>Maximum Peak Output Power (Conducted):</b>	15.5 dBm
<b>Modulation Type:</b>	GFSK
<b>Rated Input Voltage:</b>	DC 12V
<b>Serial Number:</b>	2A1K-1
<b>EUT Received Date:</b>	2023/8/17
<b>EUT Received Status:</b>	Good

### Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	915.25	26	921
1	915.5	27	921.25
...	...	...	...
...	...	...	...
...	...	49	927.5
25	921.5	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	915.25
Middle	921.5
Highest	927.5

### Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Dipole	50	915.25~927.5MHz	5.42 dBi

The Method of §15.203 Compliance:

☐ Antenna was permanently attached to the unit.  
☒ Antenna use a unique type of connector to attach to the EUT.  
☐ Unit was be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
<b>Equipment Modifications:</b>	No		
<b>EUT Exercise Software:</b>	UartAssist.exe		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
FHSS	default	default	default

### 1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TOTO LINK	Router	X5000R	X5000RK9T0560
Unknown	Load	Unknown	Unknown
Unknown	Power Supply	HDR-15-12	SC340K8603

### 1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Cable	NO	NO	0.5	Power Supply	EUT
Power Cable	NO	NO	1.2	LISN	Power Supply
Power Cable	NO	NO	1.2	AC Mians	Power Supply
RJ45 Cable	NO	NO	2	EUT	Router
Cable	NO	NO	2	EUT	Load

### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

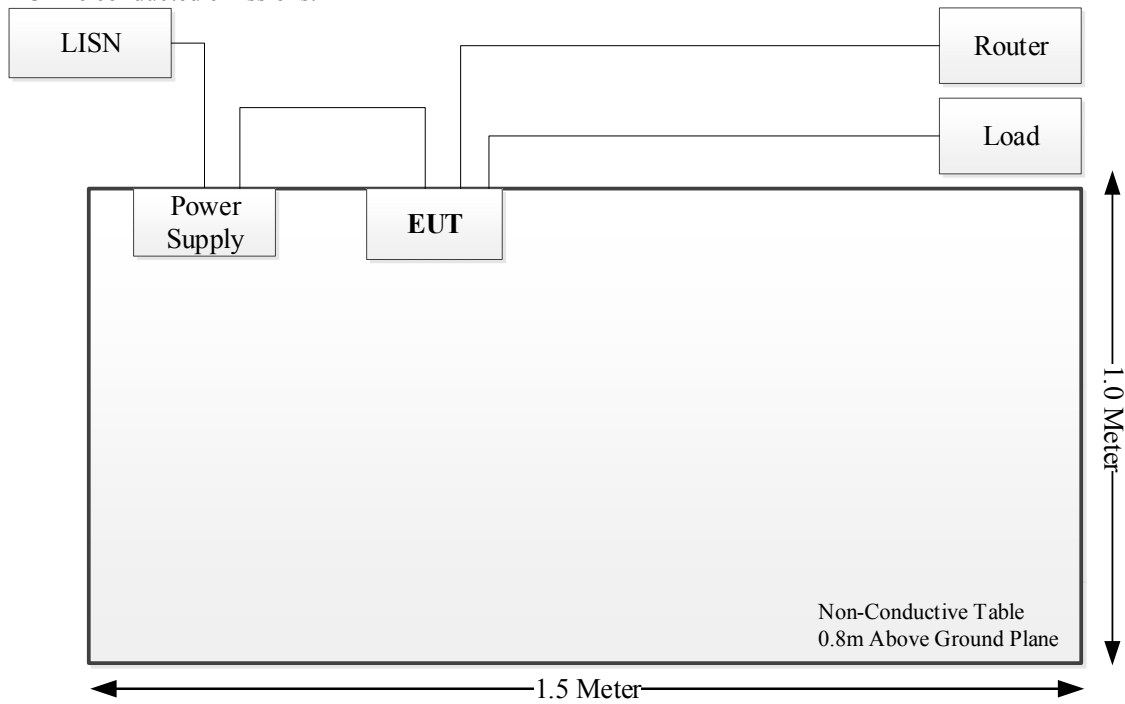

Spurious Emissions:

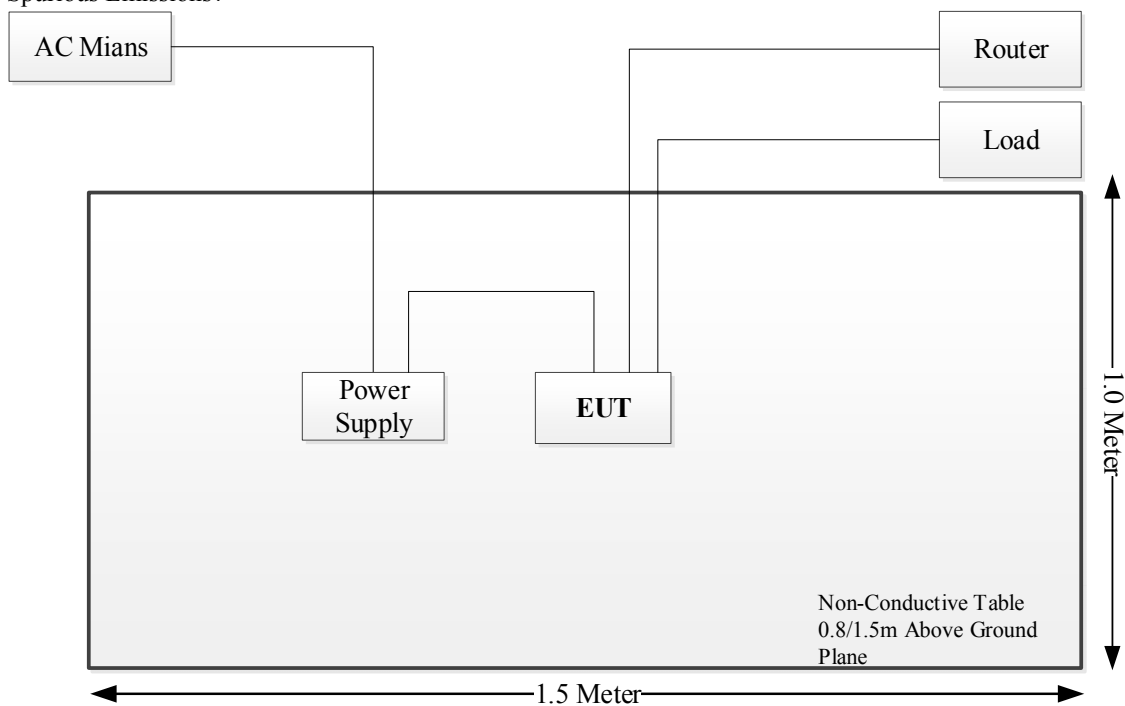



### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1)	20 dB Emission Bandwidth	Compliant
FCC §15.247(a)(1)	Channel Separation	Compliant
FCC §15.247(a)(1)(i)	Number Of Hopping Frequency	Compliant
FCC §15.247(a)(1)(i)	Time Of Occupancy (dwell time)	Compliant
FCC §15.247(b)(2)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth Of Frequency Band Edge	Compliant
FCC §15.203	Antenna Requirement	Compliant

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiated Spurious Emissions

### 3.2.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 3.2.2 EUT Setup

**Below 1GHz:**



**Above 1GHz:**



The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


### 3.3 20 dB Emission Bandwidth

#### 3.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### 3.3.2 EUT Setup

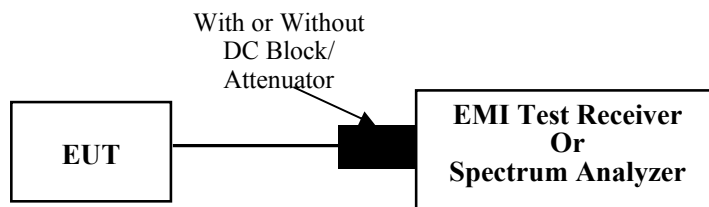

#### 3.3.3 Test Procedure

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level.

Record the frequency difference as the emission bandwidth.

Repeat above procedures until all frequencies measured were complete.




### 3.4 Channel Separation

#### 3.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### 3.4.2 EUT Setup

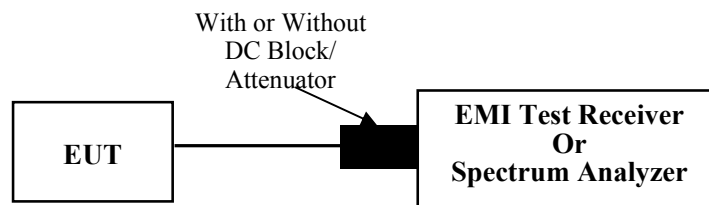

#### 3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


### 3.5 Number Of Hopping Frequency

#### 3.5.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### 3.5.2 EUT Setup

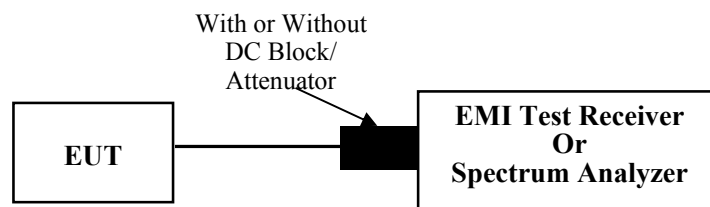

#### 3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.


### 3.6 Time Of Occupancy(Dwell Time)

#### 3.6.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### 3.6.2 EUT Setup

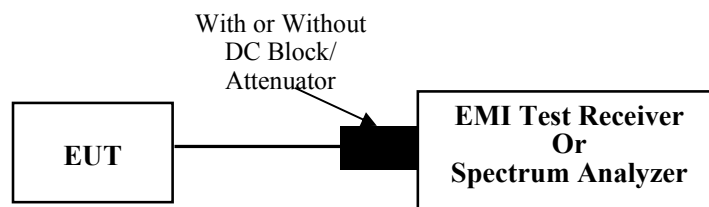

#### 3.6.3 Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.


### 3.7 Maximum Conducted Output Power

#### 3.7.1 Applicable Standard

FCC §15.247 (b)(2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

#### 3.7.2 EUT Setup

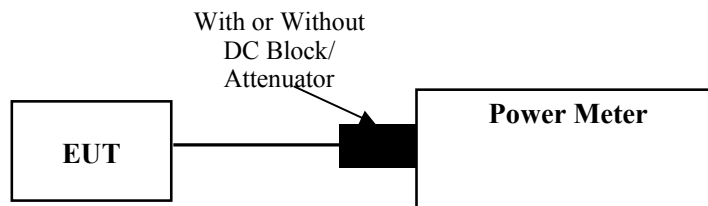

#### 3.7.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
2. Add a correction factor to the display.


### 3.8 100 kHz Bandwidth Of Frequency Band Edge

#### 3.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 3.8.2 EUT Setup

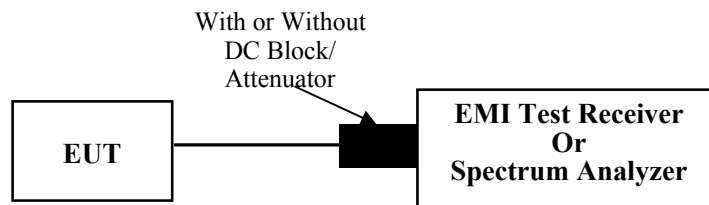

#### 3.8.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.6

For band-edge measurements, use the band-edge procedure in 6.10. Band-edge measurements shall be tested both on single channels, and with the EUT hopping.

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

### **3.9 Antenna Requirement**

#### **3.9.1 Applicable Standard**

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### **3.9.2 Judgment**

**Compliant.** Please refer to the Antenna Information detail in Section 1.

## 4. TEST DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

Serial Number:	2A1K-1	Test Date:	2023/9/4
Test Site:	CE	Test Mode:	Transmitting(low channel was the worst )
Tester:	David Huang	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	59	ATM Pressure: (kPa)	99.7
----------------------	------	------------------------------	----	------------------------	------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: CR230847711-RF


Tester: David Huang

Test Mode: Transmitting

Port: Line

Note:

Date: 2023-09-04

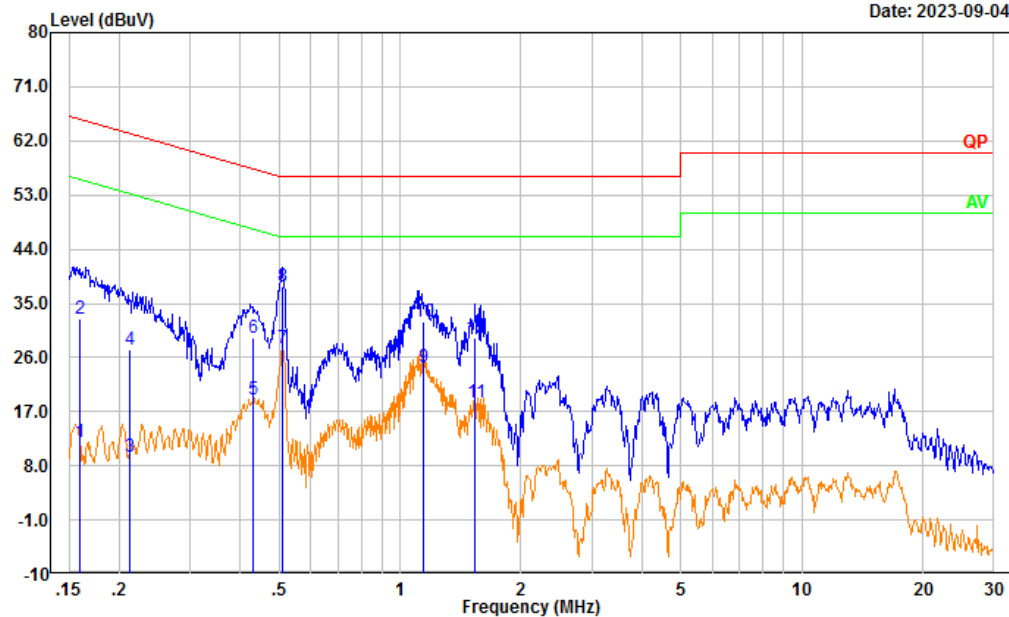


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
<hr/>							
1	0.160	2.31	9.61	11.92	55.48	43.56	Average
2	0.160	22.89	9.61	32.50	65.48	32.98	QP
3	0.212	-0.08	9.61	9.53	53.12	43.59	Average
4	0.212	17.60	9.61	27.21	63.12	35.91	QP
5	0.430	9.48	9.61	19.09	47.24	28.15	Average
6	0.430	19.59	9.61	29.20	57.24	28.04	QP
7	0.510	18.05	9.61	27.66	46.00	18.34	Average
8	0.510	28.25	9.61	37.86	56.00	18.14	QP
9	1.146	14.83	9.62	24.45	46.00	21.55	Average
10	1.146	22.35	9.62	31.97	56.00	24.03	QP
11	1.539	8.85	9.63	18.48	46.00	27.52	Average
12	1.539	19.66	9.63	29.29	56.00	26.71	QP



Project No.: CR230847711-RF  
 Tester: David Huang  
 Test Mode: Transmitting  
 Port: neutral  
 Note:

Date: 2023-09-04

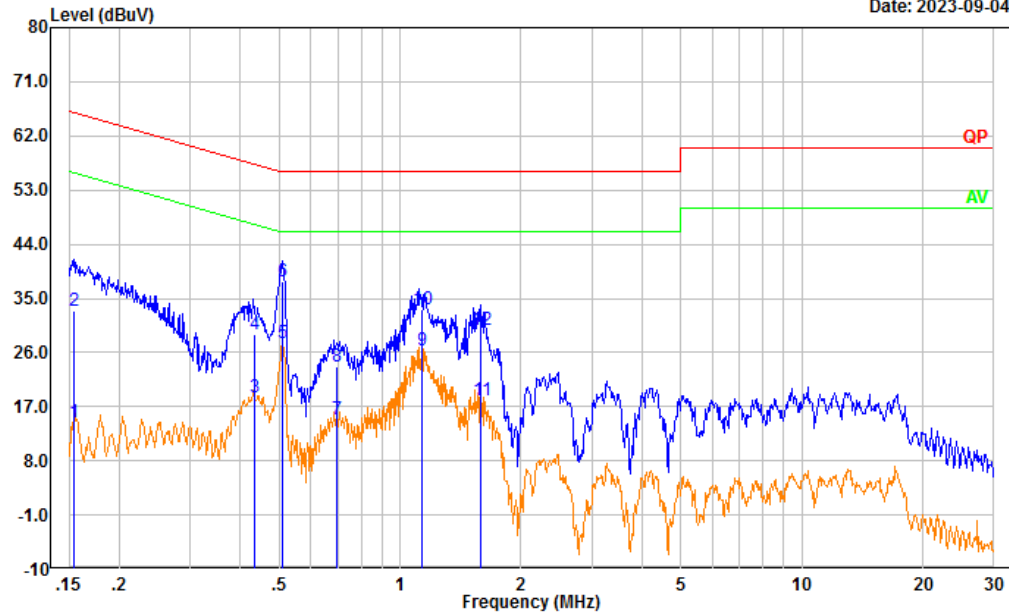

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
<hr/>							
1	0.154	4.70	9.61	14.31	55.76	41.45	Average
2	0.154	23.21	9.61	32.82	65.76	32.94	QP
3	0.435	9.05	9.61	18.66	47.15	28.49	Average
4	0.435	19.54	9.61	29.15	57.15	28.00	QP
5	0.509	17.89	9.61	27.50	46.00	18.50	Average
6	0.509	28.21	9.61	37.82	56.00	18.18	QP
7	0.698	5.28	9.62	14.90	46.00	31.10	Average
8	0.698	14.11	9.62	23.73	56.00	32.27	QP
9	1.131	16.84	9.62	26.46	46.00	19.54	Average
10	1.131	23.57	9.62	33.19	56.00	22.81	QP
11	1.589	8.52	9.63	18.15	46.00	27.85	Average
12	1.589	20.21	9.63	29.84	56.00	26.16	QP

## 4.2 Radiated Spurious Emissions

Serial Number:	2A1K-1	Test Date:	2023/9/4
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Vic Du, Mack Huang	Test Result:	Pass

### Environmental Conditions:

Temperature: (°C)	26.3~26.5	Relative Humidity: (%)	59~64	ATM Pressure: (kPa)	99.6
----------------------	-----------	---------------------------	-------	---------------------------	------

### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/7/15	2024/7/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/7	2024/8/6
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/7	2024/8/6
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8


\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


**1) 30MHz-1GHz (Low channel):**

Project No.: CR230847711-RF  
Tester: Vic Du  
Polarization: horizontal  
Note:

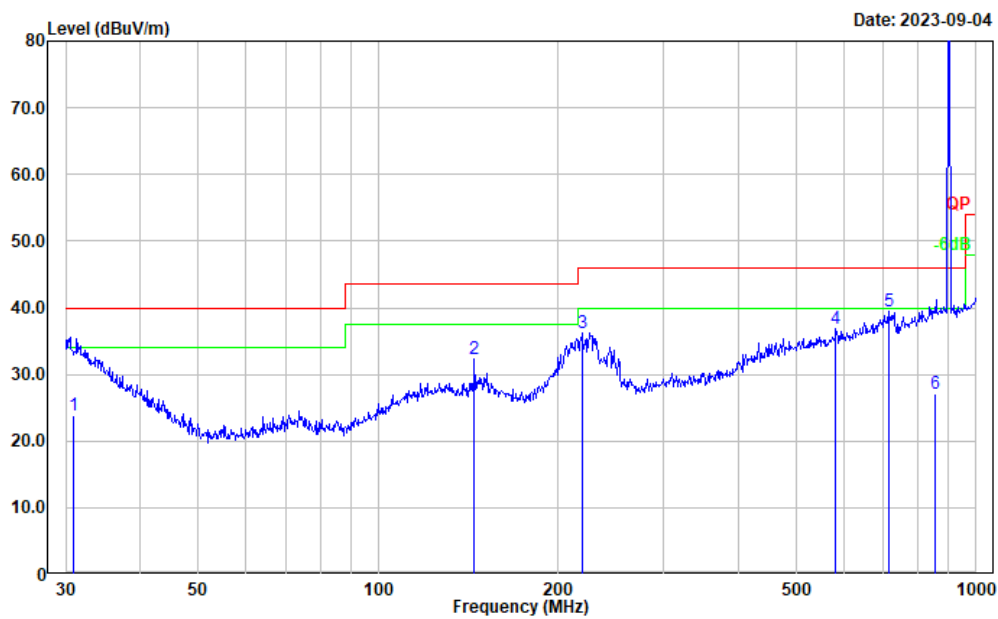

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.956	-3.21	27.13	23.92	40.00	16.08	QP
2	144.842	12.79	19.53	32.32	43.50	11.18	Peak
3	219.075	17.59	18.66	36.25	46.00	9.75	Peak
4	582.743	10.85	25.92	36.77	46.00	9.23	Peak
5	714.173	11.51	27.99	39.50	46.00	6.50	Peak
6	853.840	-2.28	29.48	27.20	46.00	18.80	QP


Project No.: CR230847711-RF  
Tester: Vic Du  
Polarization: vertical  
Note:

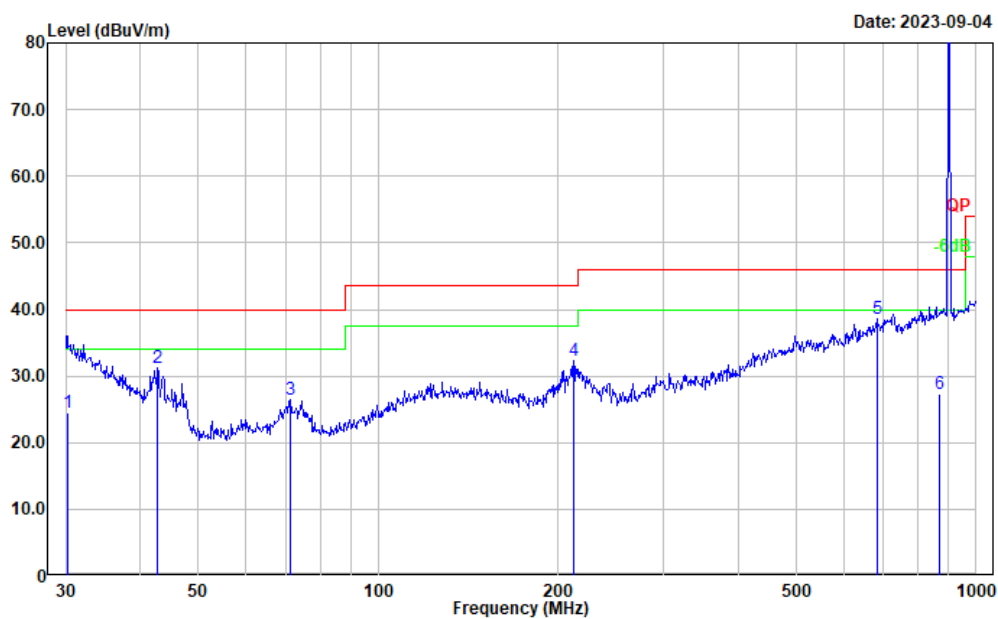

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.316	-3.06	27.63	24.57	40.00	15.43	QP
2	42.750	12.69	18.59	31.28	40.00	8.72	Peak
3	71.330	11.61	14.85	26.46	40.00	13.54	Peak
4	212.270	13.37	18.83	32.20	43.50	11.30	Peak
5	682.348	11.02	27.53	38.55	46.00	7.45	Peak
6	869.867	-2.21	29.55	27.34	46.00	18.66	QP


## 2) 30MHz-1GHz (Middle channel):

Project No.: CR230847711-RF  
Tester: Vic Du  
Polarization: horizontal  
Note:

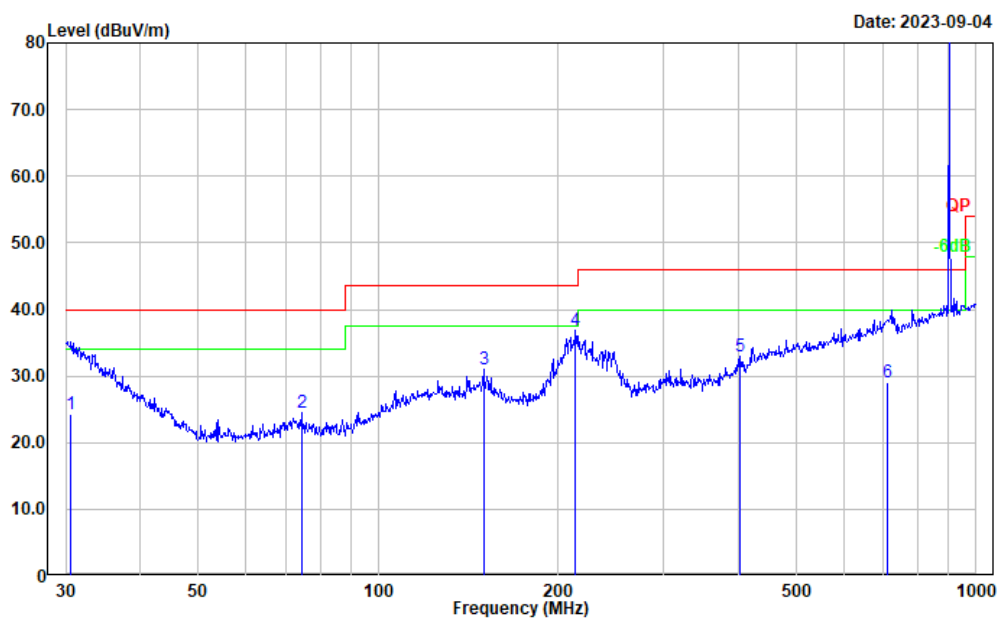

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.616	-3.20	27.40	24.20	40.00	15.80	QP
2	74.396	10.01	14.55	24.56	40.00	15.44	Peak
3	150.011	11.49	19.43	30.92	43.50	12.58	Peak
4	213.763	18.12	18.80	36.92	43.50	6.58	Peak
5	403.250	10.35	22.66	33.01	46.00	12.99	Peak
6	709.375	1.22	27.91	29.13	46.00	16.87	QP


Project No.: CR230847711-RF  
Tester: Vic Du  
Polarization: vertical  
Note:

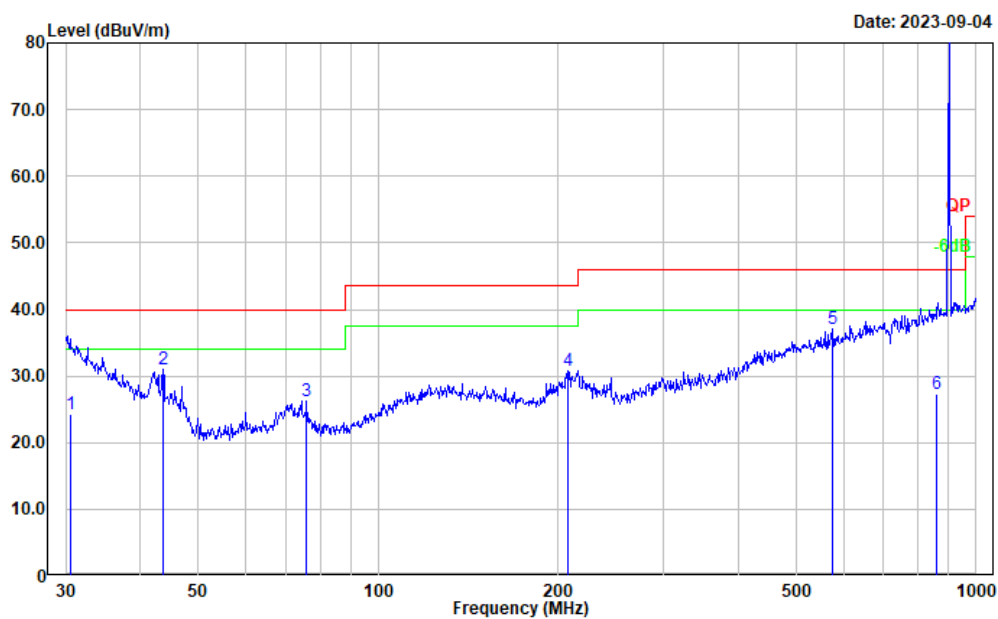

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.619	-3.15	27.40	24.25	40.00	15.75	QP
2	43.659	12.93	18.04	30.97	40.00	9.03	Peak
3	75.977	11.82	14.43	26.25	40.00	13.75	Peak
4	207.850	11.84	18.93	30.77	43.50	12.73	Peak
5	574.626	11.30	25.84	37.14	46.00	8.86	Peak
6	857.504	-2.29	29.55	27.26	46.00	18.74	QP


## 3) 30MHz-1GHz (High channel):

Project No.: CR230847711-RF  
Tester: Vic Du  
Polarization: horizontal  
Note:

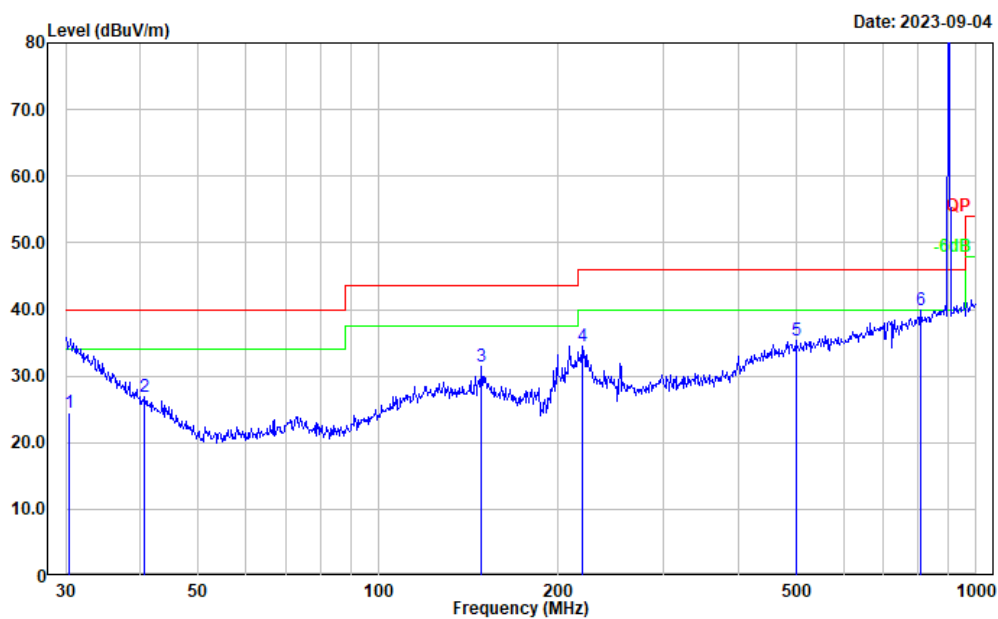

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.423	-3.11	27.55	24.44	40.00	15.56	QP
2	40.702	7.07	19.77	26.84	40.00	13.16	Peak
3	148.963	11.90	19.45	31.35	43.50	12.15	Peak
4	219.075	15.78	18.66	34.44	46.00	11.56	Peak
5	499.425	10.09	25.29	35.38	46.00	10.62	Peak
6	807.429	10.81	29.02	39.83	46.00	6.17	Peak

Project No.: CR230847711-RF  
Tester: Vic Du  
Polarization: vertical  
Note:

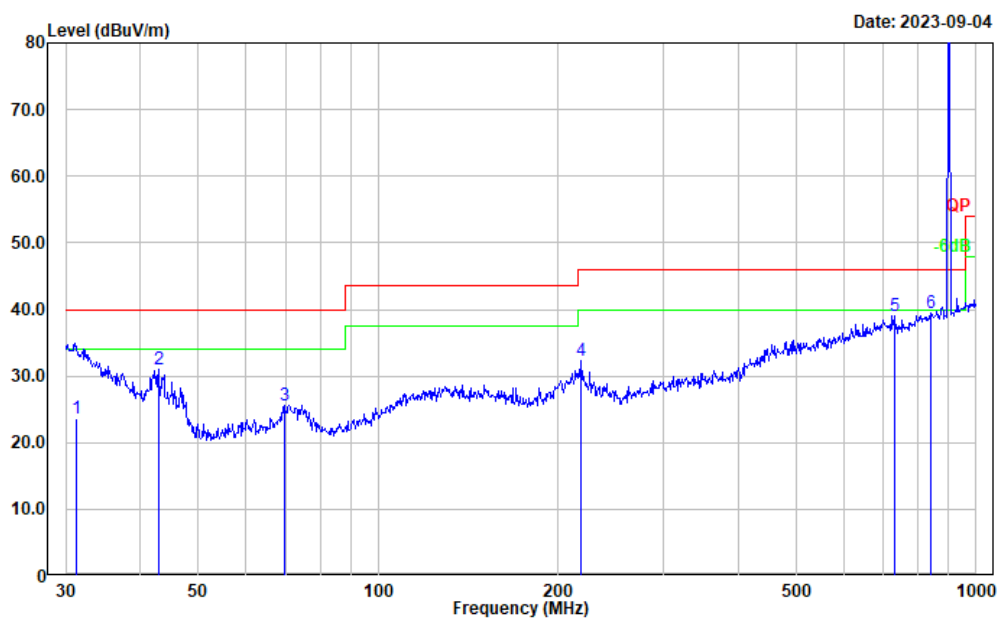

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.237	-3.28	26.93	23.65	40.00	16.35	QP
2	42.900	12.51	18.49	31.00	40.00	9.00	Peak
3	69.600	10.71	14.94	25.65	40.00	14.35	Peak
4	218.309	13.72	18.68	32.40	46.00	13.60	Peak
5	729.358	10.90	28.14	39.04	46.00	6.96	Peak
6	839.182	10.13	29.33	39.46	46.00	6.54	Peak



**2) 1GHz~10 GHz & Fundamental & Bandedge:**


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 915.25 MHz							
915.25	74.82	QP	H	29.62	104.44	N/A	N/A
915.25	66.86	QP	V	29.62	96.48	N/A	N/A
902.00	-2.28	QP	H	29.46	24.04	84.44	60.40
1830.500	36.22	PK	H	1.44	37.66	74.00	36.34
1830.500	24.11	AV	H	1.44	25.55	54.00	28.45
1830.500	35.42	PK	V	1.44	36.86	74.00	37.14
1830.500	23.21	AV	V	1.44	24.65	54.00	29.35
2745.750	35.28	PK	H	4.91	40.19	74.00	33.81
2745.750	23.14	AV	H	4.91	28.05	54.00	25.95
2745.750	34.18	PK	V	4.91	39.09	74.00	34.91
2745.750	22.09	AV	V	4.91	27.00	54.00	27.00
3661.000	39.07	PK	H	8.13	47.20	74.00	26.80
3661.000	27.04	AV	H	8.13	35.17	54.00	18.83
3661.000	40.70	PK	V	8.13	48.83	74.00	25.17
3661.000	28.35	AV	V	8.13	36.48	54.00	17.52
Middle Channel: 921.5 MHz							
921.50	72.78	QP	H	29.59	102.37	N/A	N/A
921.50	65.12	QP	V	29.59	94.71	N/A	N/A
1843.000	35.46	PK	H	1.50	36.96	74.00	37.04
1843.000	23.23	AV	H	1.50	24.73	54.00	29.27
1843.000	34.44	PK	V	1.50	35.94	74.00	38.06
1843.000	22.22	AV	V	1.50	23.72	54.00	30.28
2764.500	36.22	PK	H	4.98	41.20	74.00	32.80
2764.500	24.11	AV	H	4.98	29.09	54.00	24.91
2764.500	34.56	PK	V	4.98	39.54	74.00	34.46
2764.500	22.28	AV	V	4.98	27.26	54.00	26.74
3686.000	39.60	PK	H	8.28	47.88	74.00	26.12
3686.000	27.30	AV	H	8.28	35.58	54.00	18.42
3686.000	42.94	PK	V	8.28	51.22	74.00	22.78
3686.000	30.47	AV	V	8.28	38.75	54.00	15.25
High Channel: 927.5 MHz							
927.50	70.34	QP	H	29.70	100.04	N/A	N/A
927.50	63.54	QP	V	29.70	93.24	N/A	N/A
928.00	-2.47	QP	H	29.70	24.87	80.04	55.17
1855.171	34.63	PK	H	1.57	36.20	74.00	37.80
1855.171	22.23	AV	H	1.57	23.80	54.00	30.20
1855.171	36.34	PK	V	1.57	37.91	74.00	36.09
1855.171	24.13	AV	V	1.57	25.70	54.00	28.30
2782.356	35.45	PK	H	5.04	40.49	74.00	33.51
2782.356	23.41	AV	H	5.04	28.45	54.00	25.55
2782.500	35.63	PK	V	5.04	40.67	74.00	33.33
2782.500	23.39	AV	V	5.04	28.43	54.00	25.57
3710.142	43.08	PK	H	8.38	51.46	74.00	22.54
3710.142	30.29	AV	H	8.38	38.67	54.00	15.33
3710.142	45.67	PK	V	8.38	54.05	74.00	19.95
3710.142	33.46	AV	V	8.38	41.84	54.00	12.16

**Worst Test plots** (High channel was the worst)

1-4GHz Horizontal:

Project No.: CR230847711-RF  
Tester: Mack Huang  
Polarization: horizontal  
Note:

Date: 2023-09-04

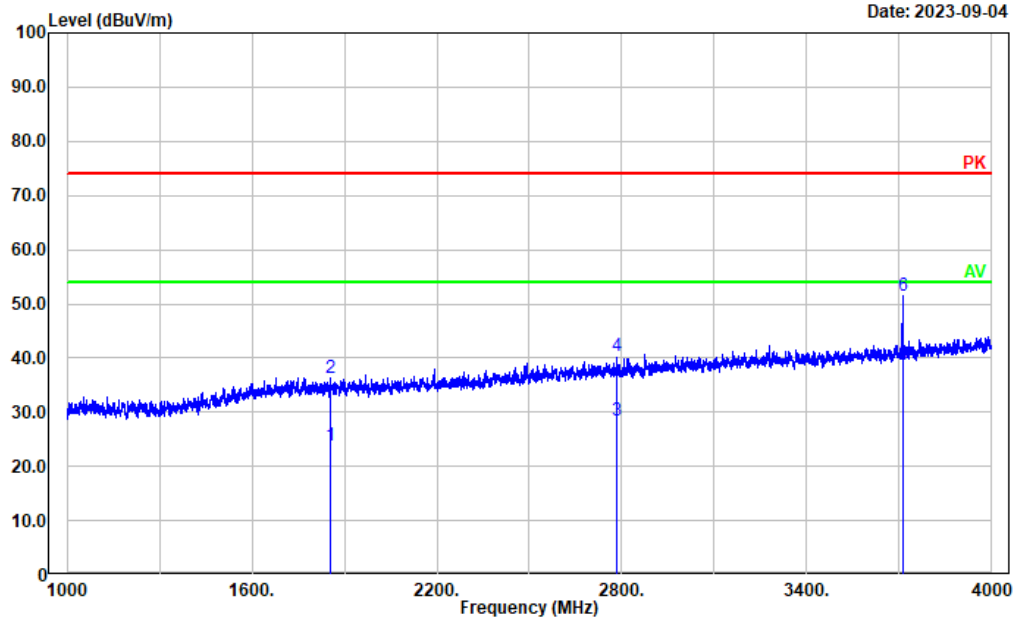


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1855.171	22.23	1.57	23.80	54.00	30.20	Average
2	1855.171	34.63	1.57	36.20	74.00	37.80	Peak
3	2782.356	23.41	5.04	28.45	54.00	25.55	Average
4	2782.356	35.45	5.04	40.49	74.00	33.51	Peak
5	3710.142	30.29	8.38	38.67	54.00	15.33	Average
6	3710.142	43.08	8.38	51.46	74.00	22.54	Peak

Vertical:

Project No.: CR230847711-RF  
Tester: Mack Huang  
Polarization: vertical  
Note:

Date: 2023-09-04

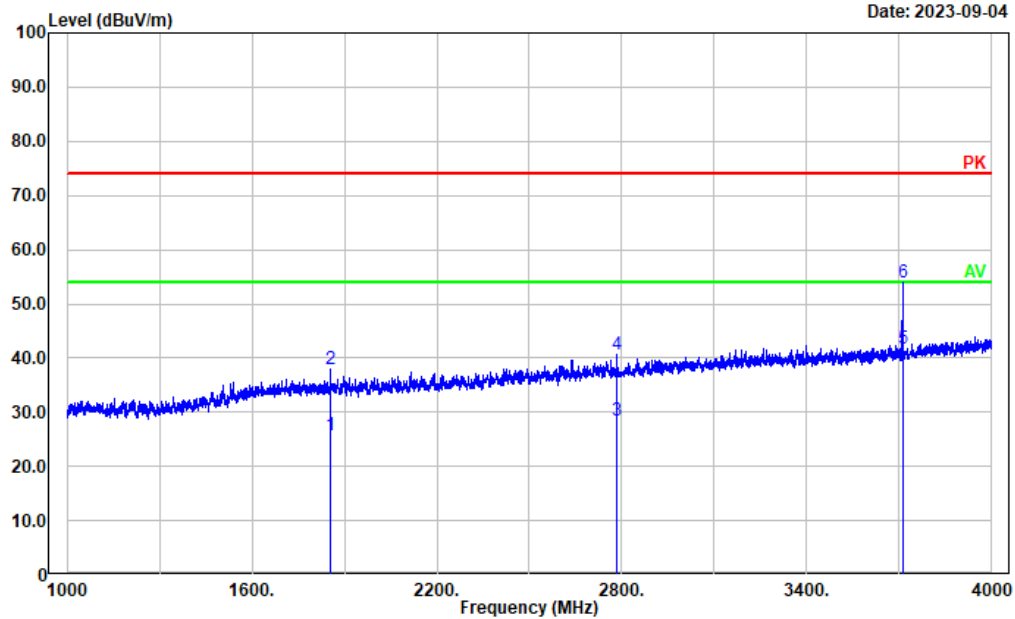


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1855.171	24.13	1.57	25.70	54.00	28.30	Average
2	1855.171	36.34	1.57	37.91	74.00	36.09	Peak
3	2782.500	23.39	5.04	28.43	54.00	25.57	Average
4	2782.500	35.63	5.04	40.67	74.00	33.33	Peak
5	3710.142	33.46	8.38	41.84	54.00	12.16	Average
6	3710.142	45.67	8.38	54.05	74.00	19.95	Peak

## 4-10 GHz Horizontal:

Project No.: CR230847711-RF  
Tester: Mack Huang  
Polarization: horizontal  
Note:

Date: 2023-09-04

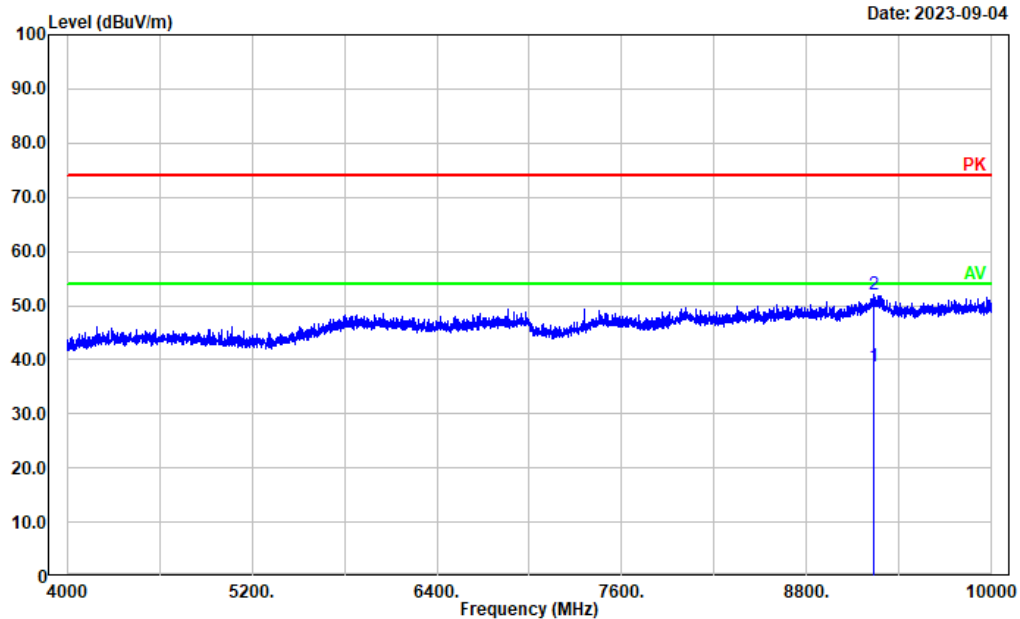


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	9231.847	20.63	18.18	38.81	54.00	15.19	Average
2	9231.847	33.91	18.18	52.09	74.00	21.91	Peak

Vertical:

Project No.: CR230847711-RF  
Tester: Mack Huang  
Polarization: vertical  
Note:

Date: 2023-09-04

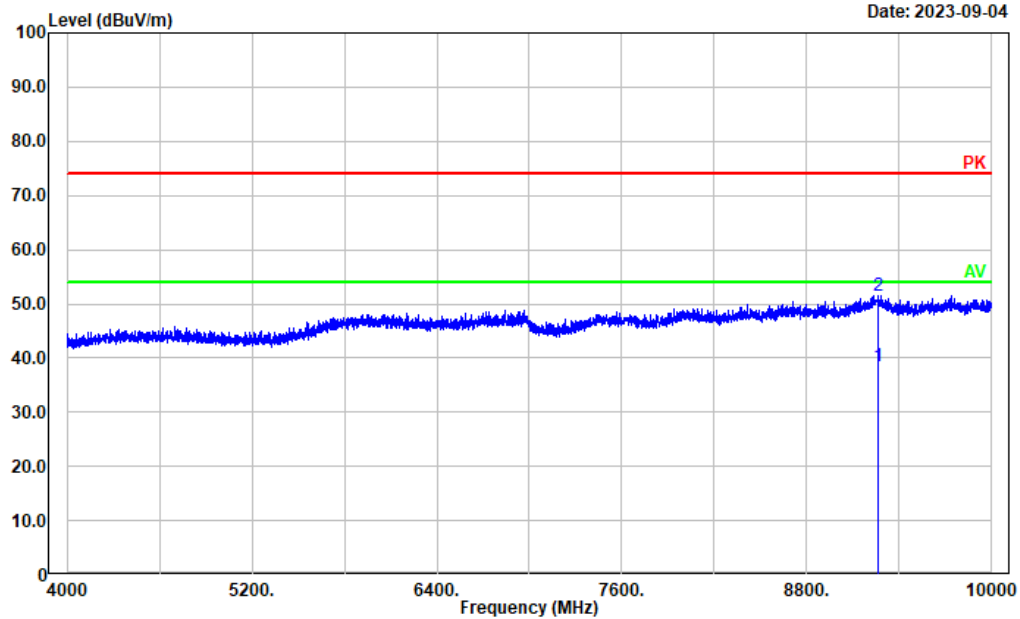

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	9263.053	20.25	18.26	38.51	54.00	15.49	Average
2	9263.053	33.23	18.26	51.49	74.00	22.51	Peak

**4.3 20 dB Emission Bandwidth**

Serial Number:	2A1K-1	Test Date:	2023/9/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.4	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)
Lowest	915.25	0.061	<0.5
Middle	921.5	0.061	<0.5
Highest	927.5	0.061	<0.5

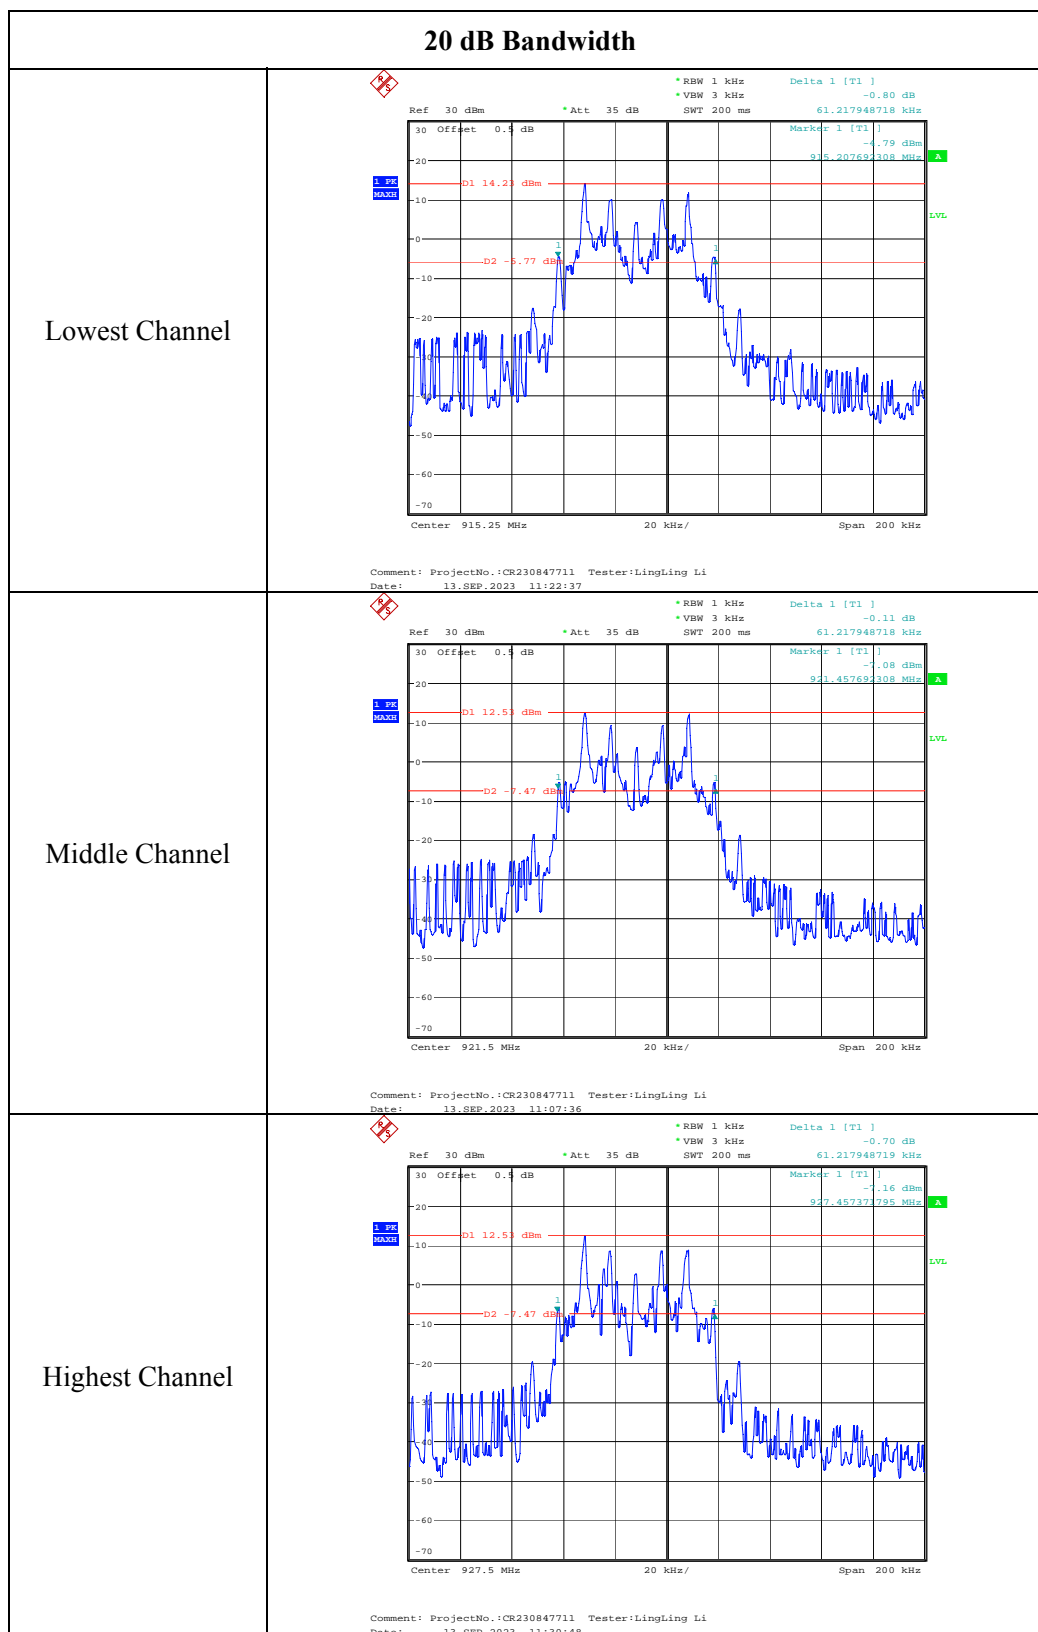

#### 4.4 Channel Separation

Serial Number:	2A1K-1	Test Date:	2023/9/13~2023/9/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	26.2~26.4	Relative Humidity: (%)	59~60	ATM Pressure: (kPa)	100.4~100.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


#### Test Data:

Test Channel	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
Lowest	915.25	0.249	0.061
Middle	921.5	0.254	0.061
Highest	927.5	0.253	0.061




## Channel Separation


Lowest Channel

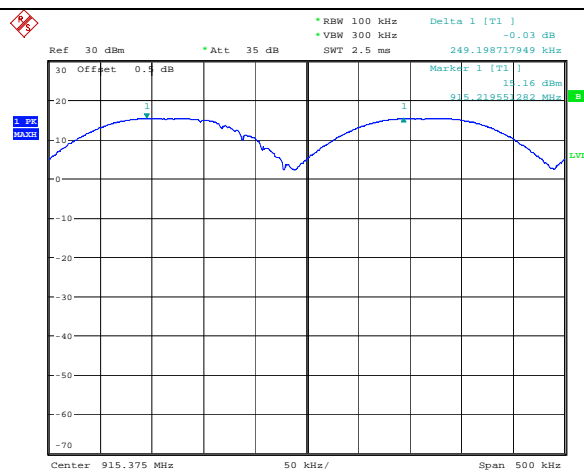

Middle Channel

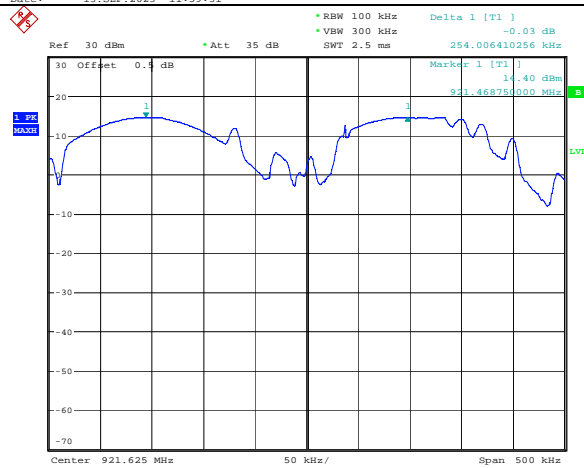

Highest Channel

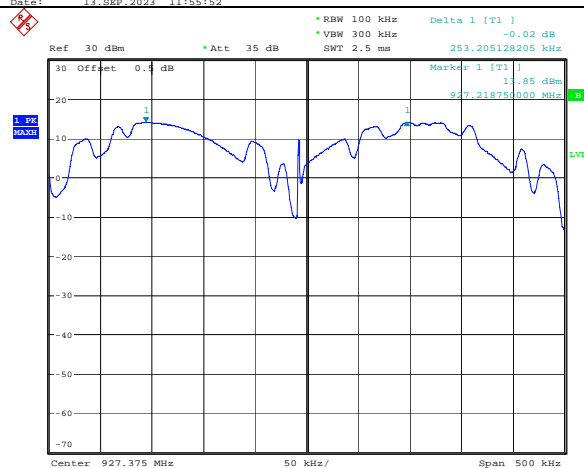

**4.5 Number Of Hopping Frequency**

Serial Number:	2A1K-1	Test Date:	2023/9/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.5	Relative Humidity: (%)	63	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

Frequency Range (MHz)	Number of Hopping Channel	Limits
902-928	50	$\geq 50$

Ref 30 dBm \*Att 35 dB SWT 10 ms 12.291666667 MHz

30 Offset 0.5 dB

Marker 1 [T1] 15.22 dBm 935.250000000 MHz

1.98 MHz

Start 902 MHz 2.6 MHz/ Stop 928 MHz

Comment: ProjectNo.:CR230847711 Tester:LingLing Li  
Date: 14.SEP.2023 10:43:32

**4.6 Time Of Occupancy (Dwell Time)**

Serial Number:	2A1K-1	Test Date:	2023/9/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.2	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.5
----------------------	------	------------------------------	----	------------------------	-------


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

Test Frequency (MHz)	Pulse width (ms)	Observation time (s)	Hopping Numbers in Observation time	Dwell Time (s)	Limit (s)
921.5	4.824	20	3	0.014	0.400
Note: Observation time= 20s					

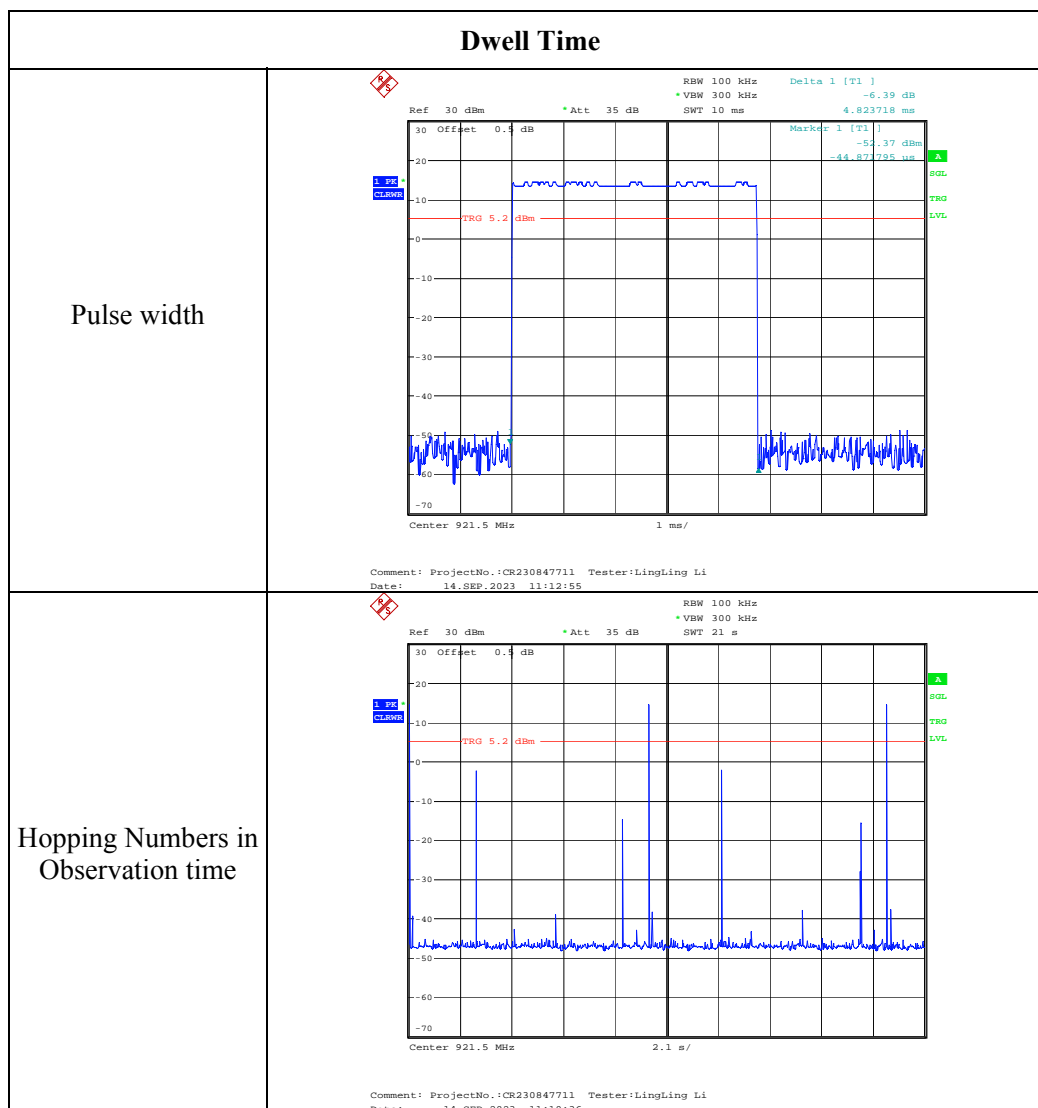

**4.7 Maximum Conducted Output Power**

Serial Number:	2A1K-1	Test Date:	2023/9/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ling Ling Li	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.4	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

Test Channel	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
Lowest	915.25	15.5	30
Middle	921.5	14.5	30
Highest	927.5	14.04	30

**4.8 100 kHz Bandwidth of Frequency Band Edge**

Serial Number:	2A1K-1	Test Date:	2023/9/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

**Environmental Conditions:**


Temperature: (°C)	26.2	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.5
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

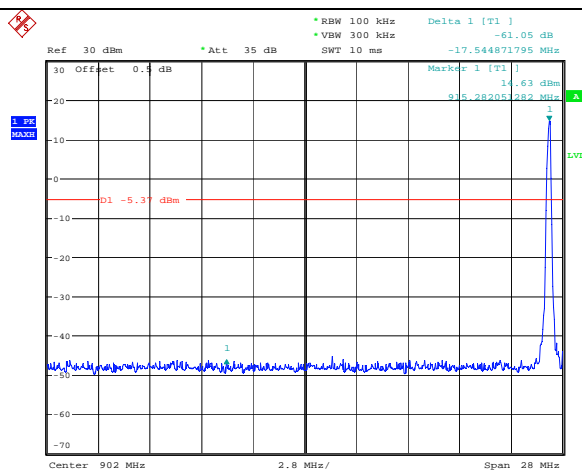
**100 kHz Bandwidth of Frequency Band Edge-Single Mode****Band Edge,  
Left Side**

Comment: ProjectNo.:CR230847711 Tester:LingLing Li  
Date: 14.SEP.2023 11:52:49

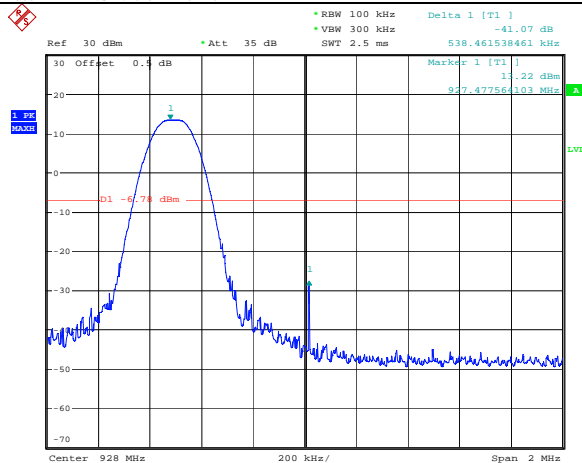
**Band Edge,  
Right Side**

Comment: ProjectNo.:CR230847711 Tester:LingLing Li  
Date: 14.SEP.2023 11:54:22

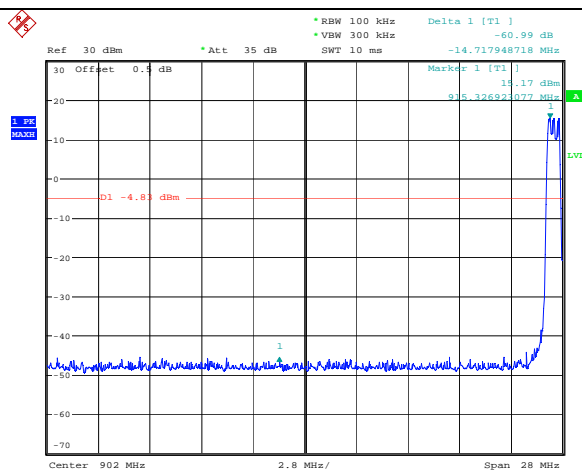

**100 kHz Bandwidth of Frequency Band Edge-Single Mode****Band Edge,  
Left Side**

Comment: ProjectNo.:CR230847711 Tester:LingLing Li  
Date: 14.SEP.2023 11:47:35

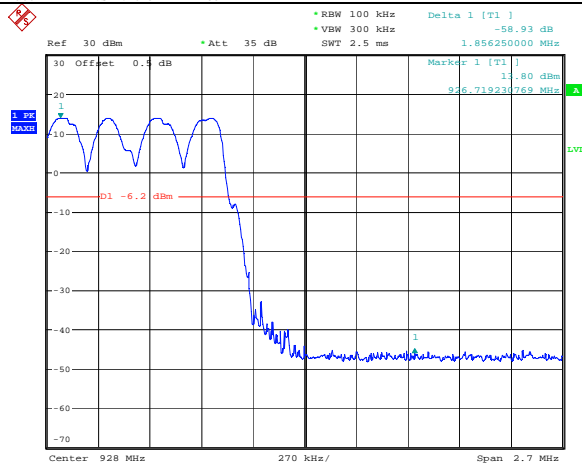**Band Edge,  
Right Side**

Comment: ProjectNo.:CR230847711 Tester:LingLing Li  
Date: 14.SEP.2023 11:44:10

## **5. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR230847711-EXP EUT EXTERNAL PHOTOGRAPHS and CR230847711-INP EUT INTERNAL PHOTOGRAPHS

## **6. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment CR230847711-00B-TSP TEST SETUP PHOTOGRAPHS.

**===== END OF REPORT =====**