

# FCC Test Report

## Report No.: AGC02931240301FR03

FCC ID	:	2BLTR-AND1
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	4G LTE IP Radio
BRAND NAME	:	ТҮТЕСН
MODEL NAME	:	IP-66
APPLICANT	:	Quanzhou RadioBoss Technology Co., Ltd
DATE OF ISSUE	:	Jan. 16, 2025
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
<b>REPORT VERSION</b>	:	V1.0







## **Report Revise Record**

<b>Report Version</b>	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 16, 2025	Valid	Initial Release



## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	
2.4 Related Submittal(S) / Grant (S)	9
2.5 Test Methodology	9
2.6 Special Accessories	9
2.7 Equipment Modifications	9
2.8 Antenna Requirement	9
2.9 Description of Test Software	
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	17
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	20
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	21
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Result	
9. Power Spectral Density Measurement	



9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Conducted Band Edge and Out-of-Band Emissions	
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Result	
11. Radiated Spurious Emission	
11.1 Measurement Limits	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission	
12.1 Measurement Limits	
12.2 Block Diagram of Line Conducted Emission Test	
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Test Result of Line Conducted Emission Test	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	




## **1. General Information**

Applicant	Quanzhou RadioBoss Technology Co., Ltd
Address	No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian
Manufacturer	Quanzhou RadioBoss Technology Co., Ltd
Address	No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian
Factory	Quanzhou RadioBoss Technology Co., Ltd
Address	No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian
Product Designation	4G LTE IP Radio
Brand Name	ТҮТЕСН
Test Model	IP-66
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Mar. 04, 2024
Date of Test	Mar. 04, 2024~Jan. 16, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-2.4GWLAN-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Bibo zhang Prepared By Bibo Zhang Jan. 16, 2025 (Project Engineer) Calvin Lin Reviewed By Calvin Liu Jan. 16, 2025 (Reviewer) Angole Li Approved By Angela Li Jan. 16, 2025 (Authorized Officer)





## 2. Product Information

## 2.1 Product Technical Description

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Power (Average)	IEEE 802.11b:15.18dBm; IEEE 802.11g:13.32dBm; IEEE 802.11n(HT20):13.33dBm; IEEE 802.11n(HT40):12.87dBm
Output Power (Peak)	IEEE 802.11b:18.15dBm; IEEE 802.11g:21.41dBm; IEEE 802.11n(HT20): 21.39dBm; IEEE 802.11n(HT40): 21.08dBm
Modulation	802.11b:(DQPSK, DBPSK, CCK) DSSS 802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM 802.11ax:(1024-QAM,256-QAM,64-QAM,16QAM,QPSK,BPSK)OFDMA
Data Rate	802.11b:1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps
Number of channels	11
Hardware Version	V2.0
Software Version	PU562WAE3C_KT5508_starlight_istar two_V01_20180813
Antenna Designation	PIFA Antenna
Antenna Gain	-0.9dBi
Power Supply	DC 3.7V 6000mAh by battery or DC 5V from adapter



## 2.2 Table of Carrier Frequency

## For 2412-2462MHz:

## 11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		

#### 7 channels are provided for 802.11n(HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01		02		03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10		11			



#### 2.3 IEEE 802.11n Modulation Scheme

					N <sub>CBPS</sub>		N <sub>CBPS</sub> N <sub>DBPS</sub>		Data Ra	te(Mbps)
MCS Index	Nss	Modulation	R	N <sub>BPSC</sub>					800nsGI	
Index					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	NCBPS Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI	Guard interval	



## 2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BLTR-AND1**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

## 2.5 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

## 2.6 Special Accessories

Refer to section 4.4.

## 2.7 Equipment Modifications

Not available for this EUT intended for grant.

## 2.8 Antenna Requirement

## **Standard Requirement**

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -0.9dBi.



## 2.9 Description of Test Software

#### For IEEE 802.11 mode:

The test utility software used during testing was "MT6625".

## Software Setting Diagram

WIFI Tool for MT6625		-6×
NVBAM Save As Fale         Burn NVBAM From Fale         Read All           Set 20Hz TX Power Profile         Set 5GHz TX Power Profile         Opstal Tain         RSSI COMP		-
Load Value in File Download in to Flash. Save Flash to in File		
Pandvid) © 20MHz © 40MHz © U20MHz © L20MHz © Advance Setting		
Set		
T/RX Channel 1 [2412445]  USER DEFINE [2412		
TxFord(din) [10 Film [1024		
Pit or         p           Rate         TM         Gg ()         Stop		
Cuad Interval     C 400ns     C 800ns     Set     Mode Select		
Green Feld     C Muned Mode     C 11AC(VHT)     Set     R(Mut     R5((den)     R55((den)	-	· ·
PCS an Involution for the PCR Involution for		
		· · · · · · · · · · · · · · · · · · ·
	.em (57 #	* = 😧 🐔 📣 🗐 😰 🌒 14:50

Test Mode	Channel	Power Index
802.11b	L/M/H	18
802.11g	L/M/H	17
802.11n-HT20	L/M/H	20
802.11n-HT40	L/M/H	16.5



## 3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



## **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

## 3.4 Measurement Uncertainty

The reported uncertainty of measurement  $y\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		



## 3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
$\boxtimes$	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
$\boxtimes$	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
$\boxtimes$	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
$\square$	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	



• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02	
$\boxtimes$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	

Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A	
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6	
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



## **4.System Test Configuration**


## 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

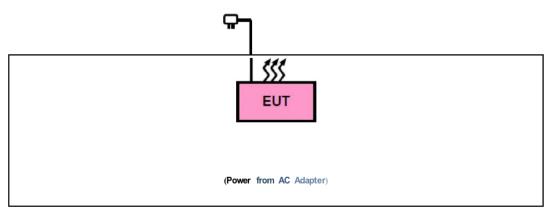

## 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Phone	Xiaomi	MI 10	N/A	
2	Adapter	Huawei	HW-200440C00	Input(AC):100V-240V 50/60Hz 2.4A Output(DC):USB-C(5V/3A)	

☑ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Battery	Quanzhou RadioBoss Technology Co.,Ltd	BATT-78	DC 3.7V 6000mAh	
2	Charger			Input: DC 5V Output: DC 4.2A 0.1A	



## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



## 5. Description of Test Modes

	Summary table of Test Cases					
Test Item	Data Rate / Modulation					
rest item	2.4G WLAN – 802.11b/g/n (DSSS/OFDM)					
	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps					
	Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps					
	Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps					
	Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps					
	Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps					
Radiated & Conducted	Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps					
Test Cases	Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps					
	Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps					
	Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps					
	Mode 10: 802.11n-HT40_TX CH03_2422 MHz_MCS0 Mbps					
	Mode 11: 802.11n-HT40_TX CH06_2437 MHz_ MCS0 Mbps					
	Mode 12: 802.11n-HT40_TX CH09_2452 MHz_ MCS0 Mbps					
AC Conducted Emission	Mode 1: 2.4G WLAN Link + Battery + USB Cable (Charging from AC Adapter)					
Note:						
	1. The battery is full-charged during the test.					
	n, 3axis were chosen for testing for each applicable mode.					
3. For Conducted Test n	nethod, a temporary antenna connector is provided by the manufacture.					



## 6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)
IEEE 802.11b	1	100	-
IEEE 802.11g	6	98	0.09
IEEE 802.11n-HT20	MCS0	97	0.13
IEEE 802.11n-HT40	MCS0	95	0.22


Remark:

1. Duty Cycle factor = 10 \* log (1/ Duty cycle)

2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.



#### • The test plots as follows:

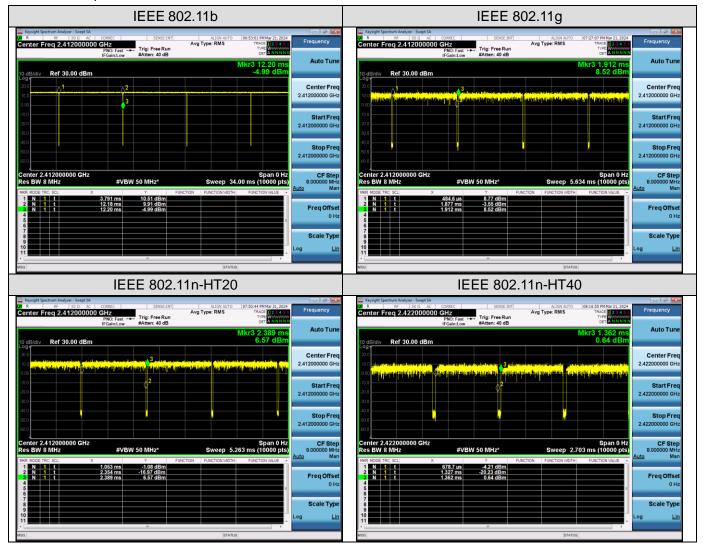



## 7. RF Output Power Measurement

## 7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

## 7.2 Measurement Procedure


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Method PM is Measurement using an RF AV power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

## 7.3 Measurement Setup (Block Diagram of Configuration)

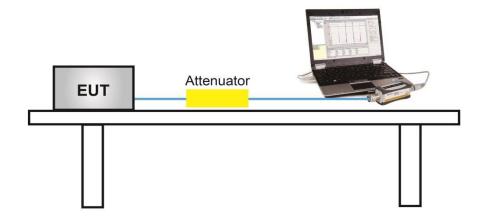



## 7.4 Measurement Result

Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
802.11b	2412	14.34	17.32	≤30	Pass		
	2437	14.75	17.73	≤30	Pass		
	2462	15.18	18.15	≤30	Pass		
802.11g	2412	12.85	20.90	≤30	Pass		
	2437	13.05	21.15	≤30	Pass		
	2462	13.32	21.41	≤30	Pass		
802.11n20	2412	12.78	20.87	≤30	Pass		
	2437	13.20	21.27	≤30	Pass		
	2462	13.33	21.39	≤30	Pass		
802.11n40	2422	12.48	20.65	≤30	Pass		
	2437	12.87	21.08	≤30	Pass		
	2452	12.82	21.02	≤30	Pass		



## 8. 6dB Bandwidth Measurement


## 8.1 Provisions Applicable

The minimum 6dB bandwidth shall be 500 kHz.

## 8.2 Measurement Procedure

- The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- 4. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

## 8.3 Measurement Setup (Block Diagram of Configuration)

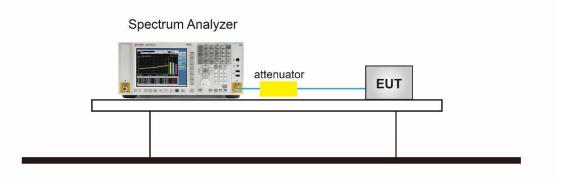





### 8.4 Measurement Result

Test Data of Occupied Bandwidth and DTS Bandwidth								
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Result			
802.11b	2412	12.236	9.521	≥0.5	Pass			
	2437	12.292	9.559	≥0.5	Pass			
	2462	12.511	9.563	≥0.5	Pass			
802.11g	2412	16.421	15.112	≥0.5	Pass			
	2437	16.467	15.123	≥0.5	Pass			
	2462	16.580	15.485	≥0.5	Pass			
802.11n20	2412	17.484	15.102	≥0.5	Pass			
	2437	17.520	15.116	≥0.5	Pass			
	2462	17.623	16.024	≥0.5	Pass			
802.11n40	2422	35.794	35.448	≥0.5	Pass			
	2437	35.769	35.129	≥0.5	Pass			
	2452	36.014	35.195	≥0.5	Pass			




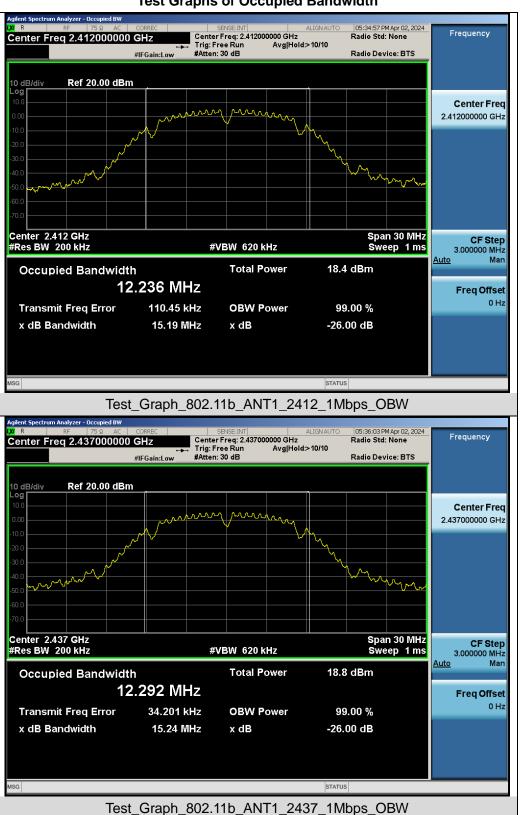


## Test Graphs of Occupied Bandwidth






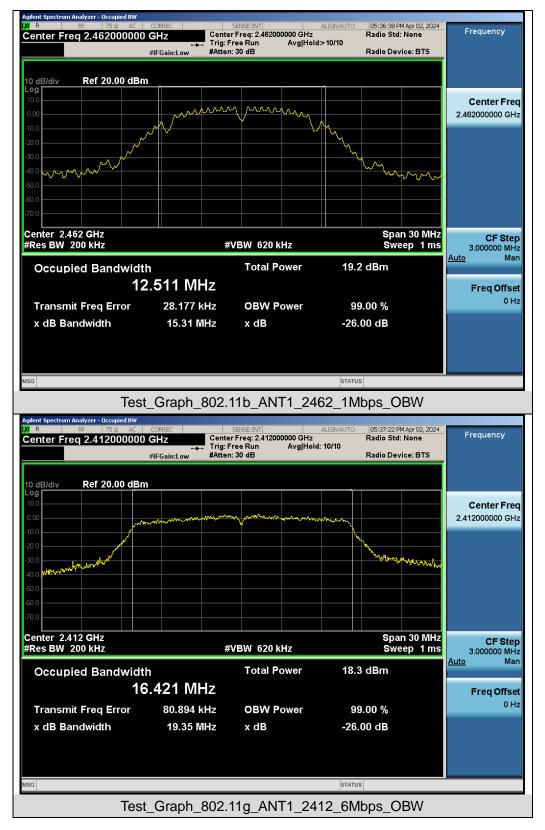






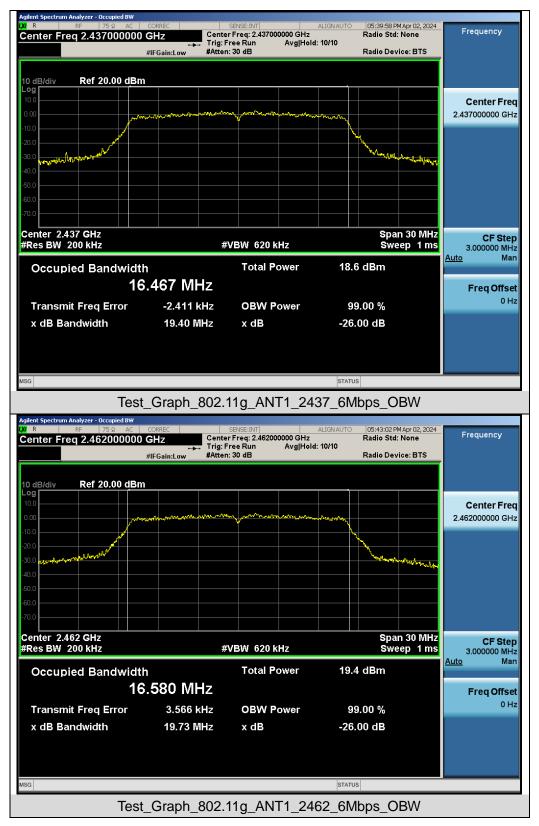


#### Report No.: AGC02931240301FR03 Page 27 of 88



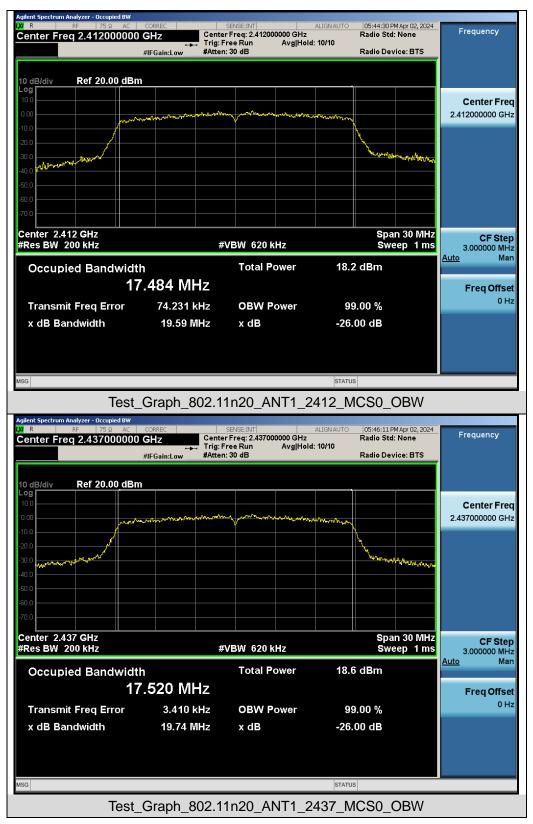


#### Report No.: AGC02931240301FR03 Page 28 of 88



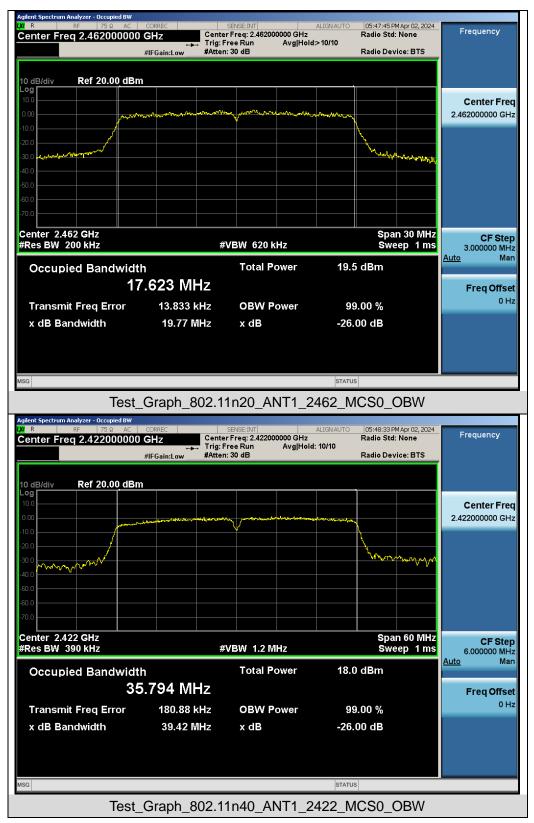


### Report No.: AGC02931240301FR03 Page 29 of 88



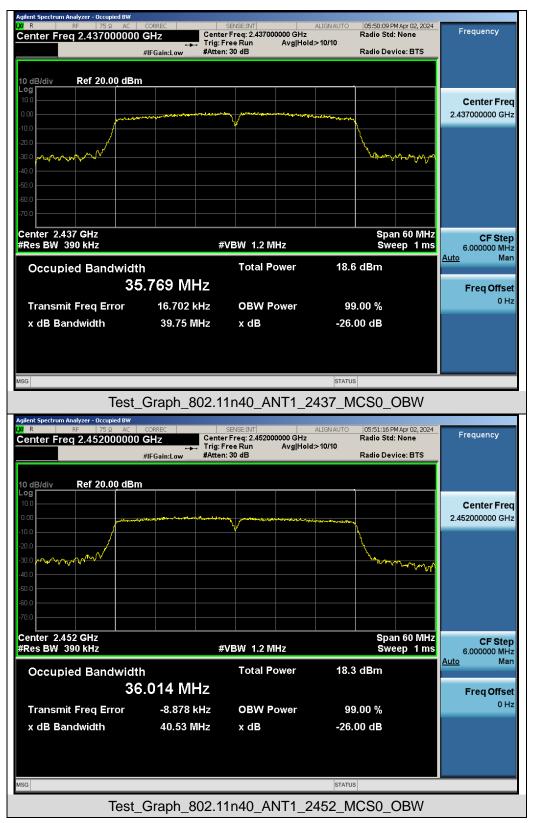




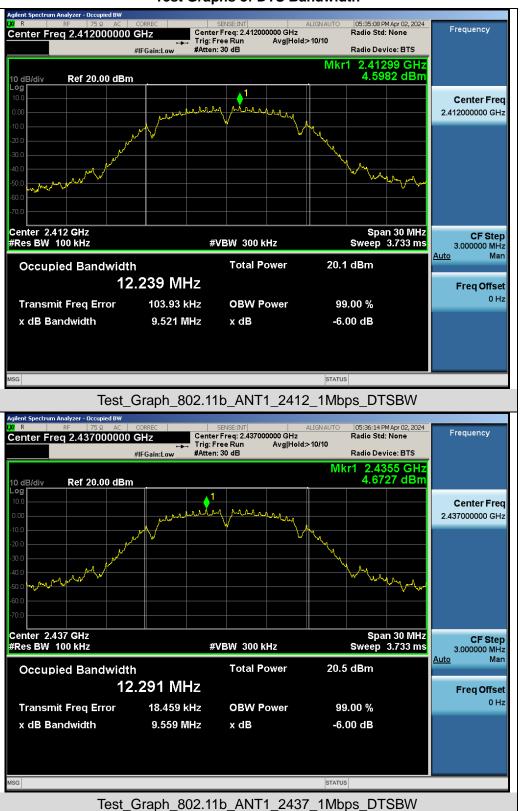


## Test Graphs of DTS Bandwidth




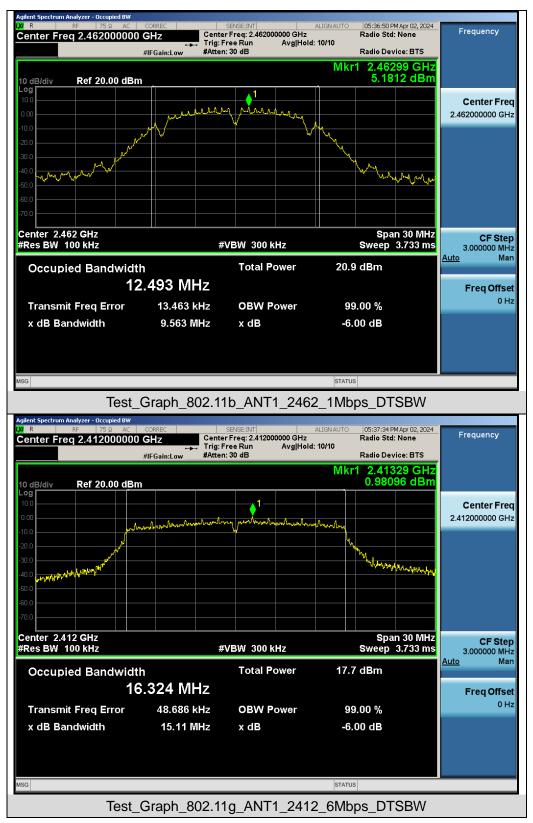




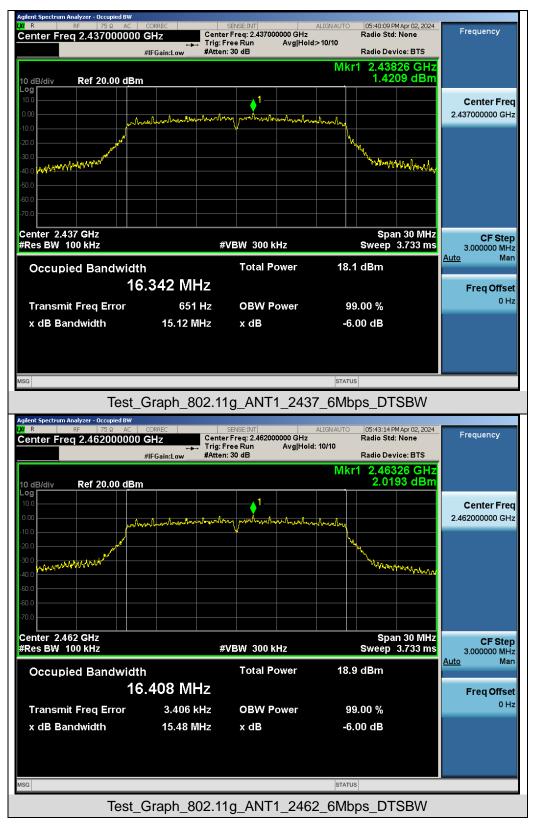




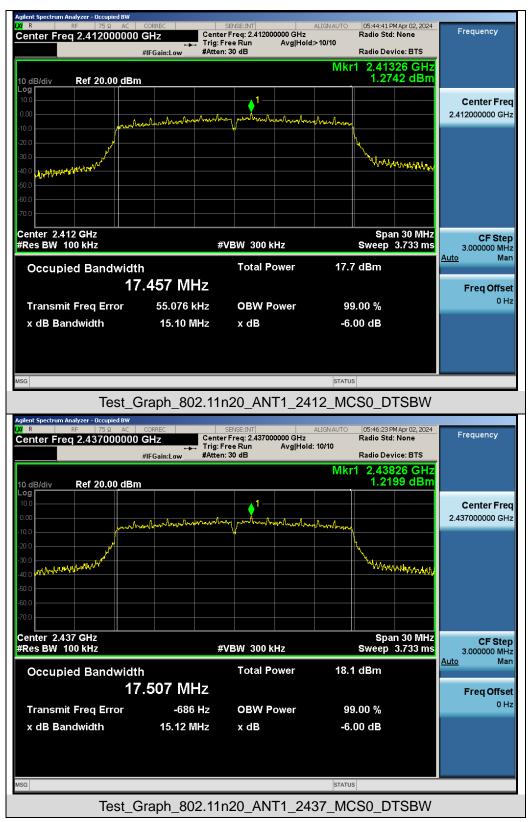



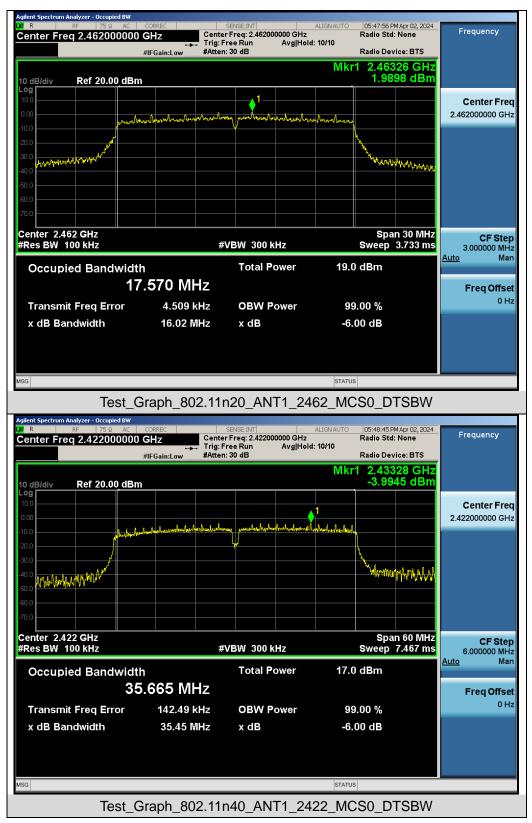



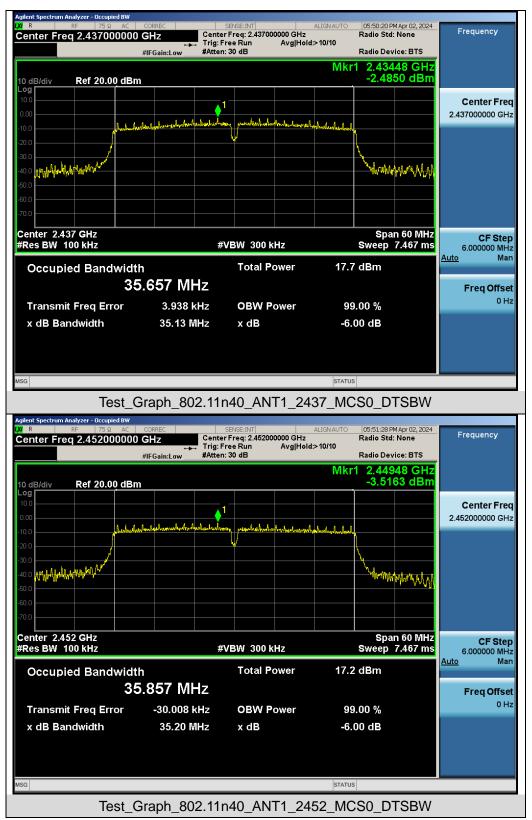



## 9. Power Spectral Density Measurement

## 9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

## 9.2 Measurement Procedure

 $\boxtimes$ For Peak power spectral density test:


- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW  $\geq$  [3 × RBW].
- 5. Set the Span  $\geq$  [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- 9. When the measurement bandwidth of the maximum PSD is 3 kHz, a constant factor of 10\*log(3kHz/20kHz)
   = -8.23 dB is added to the measurement result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz  $\leq$  RBW  $\leq$  100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of the maximum PSD is 3 kHz, a constant factor of 10\*log(3kHz/20kHz)
   = -8.23 dB is added to the measurement result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.



# 9.3 Measurement Setup (Block Diagram of Configuration)

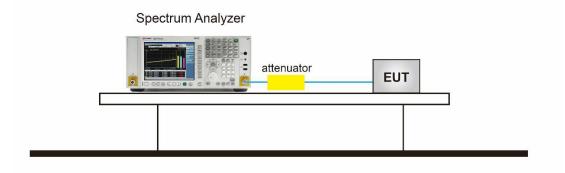

#### 9.4 Measurement Result


Test Data of Conducted Output Power Spectral Density								
Test Mode	TestPower SpectralFrequencydensity(MHz)(dBm/20kHz)		Power Spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Result			
	2412	1.572	-6.667	≪8	Pass			
802.11b	2437	-0.154	-8.393	≪8	Pass			
	2462	5.495	-2.744	≪8	Pass			
	2412	-2.778	-11.017	≪8	Pass			
802.11g	2437	-2.961	-11.2	≪8	Pass			
	2462	-3.317	-11.556	≪8	Pass			
	2412	-3.048	-11.287	≪8	Pass			
802.11n20	2437	-2.665	-10.904	≪8	Pass			
	2462	-3.149	-11.388	≪8	Pass			
	2422	-6.763	-15.002	≪8	Pass			
802.11n40	2437	-6.525	-14.764	≪8	Pass			
	2452	-6.159	-14.398	≪8	Pass			






## Test Graphs of Conducted Output Power Spectral Density




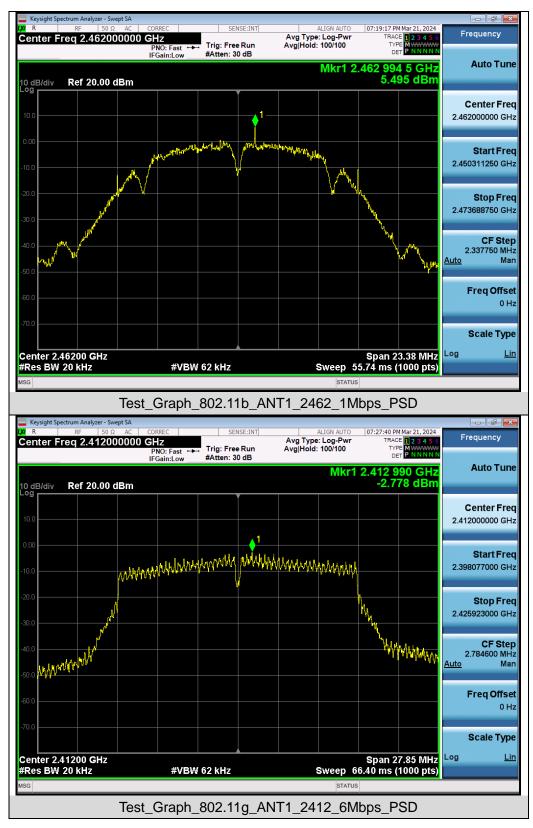




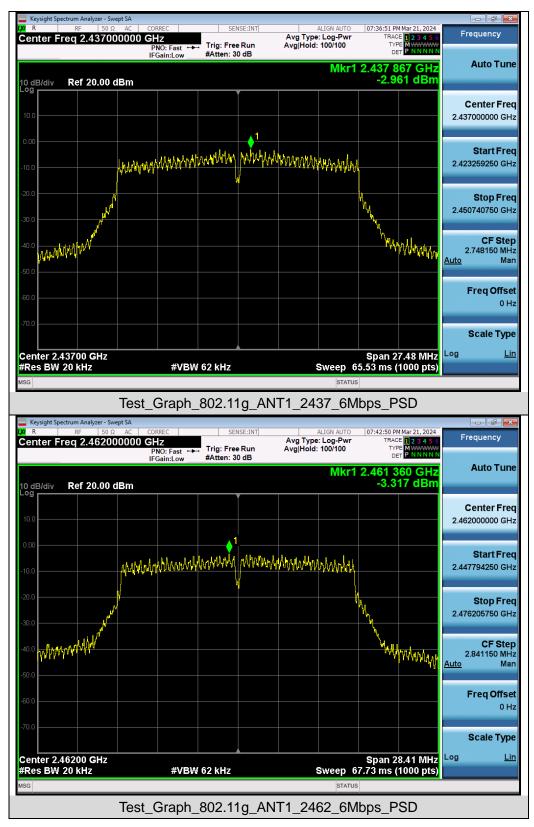




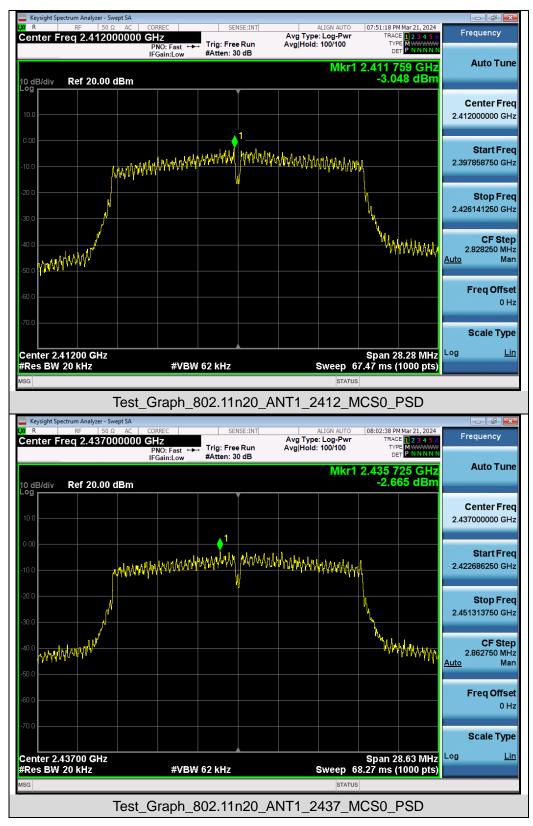




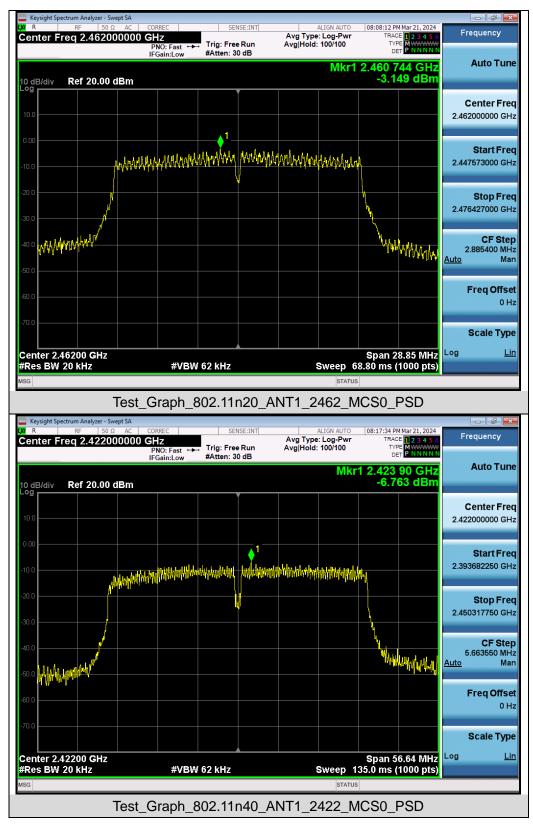



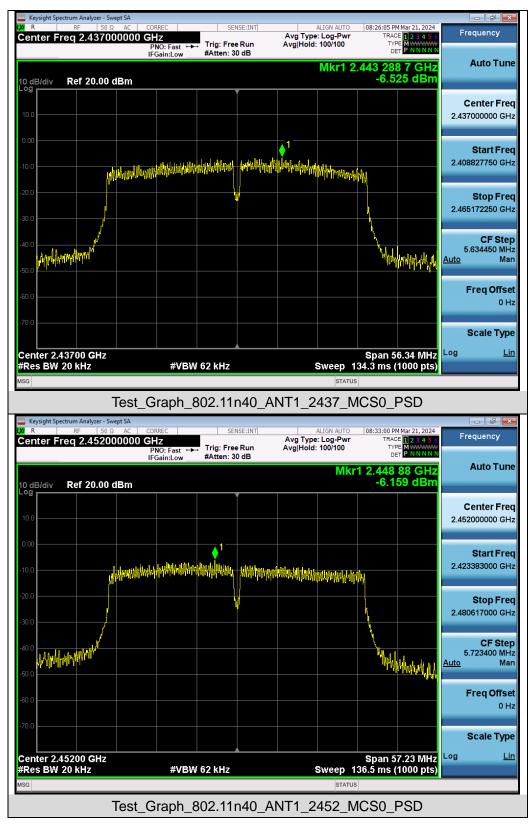





# 10. Conducted Band Edge and Out-of-Band Emissions

#### **10.1 Provisions Applicable**

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

#### **10.2 Measurement Procedure**


Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
- 1. Set instrument center frequency to DTS channel center frequency.
- 2. Set the span to  $\geq$  1.5 times the DTS bandwidth.
- 3. Set the  $\overrightarrow{RBW} = 100 \text{ kHz}$ .
- 4. Set the VBW  $\geq$  3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum PSD level.
- 10. Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
- 11. For reference level values, please refer to DTS bandwidth test.
- Step 2: Measurement Procedure Out of Band Emission
- 1. Set RBW = 100 kHz.
- 2. Set VBW  $\geq$  300 kHz.
- 3. Detector = peak.
- 4. Sweep = auto couple.
- 5. Trace Mode = max hold.
- 6. Allow trace to fully stabilize.
- 7. Use the peak marker function to determine the maximum amplitude level.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

#### 10.3 Measurement Setup (Block Diagram of Configuration)

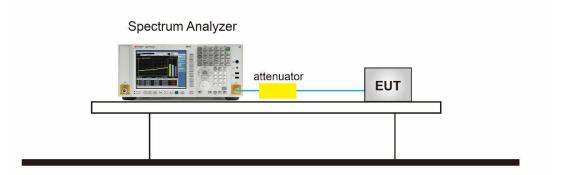




#### **10.4 Measurement Result**

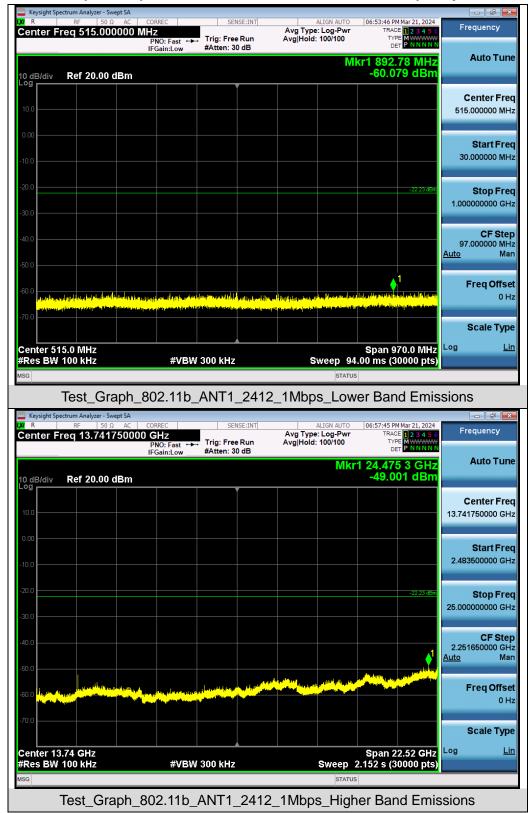


#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




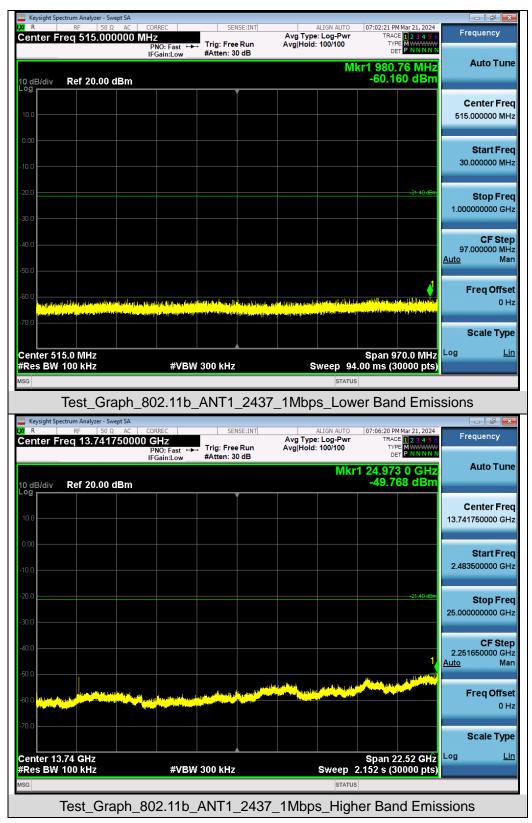




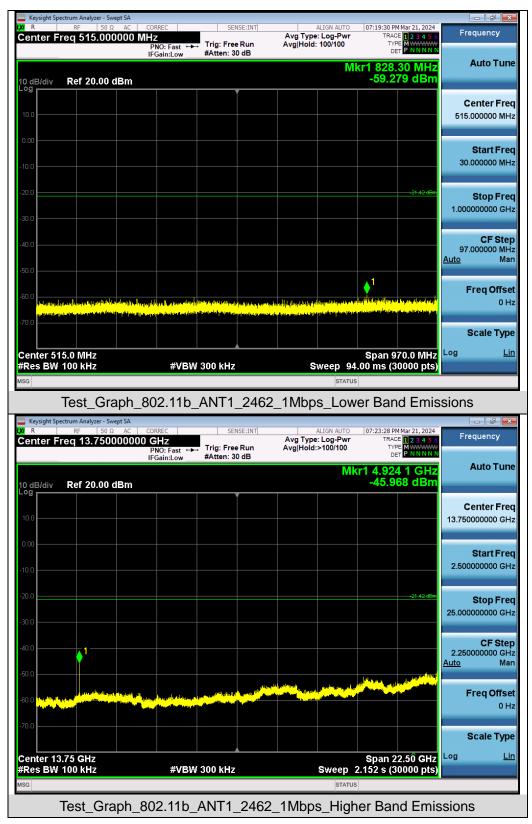




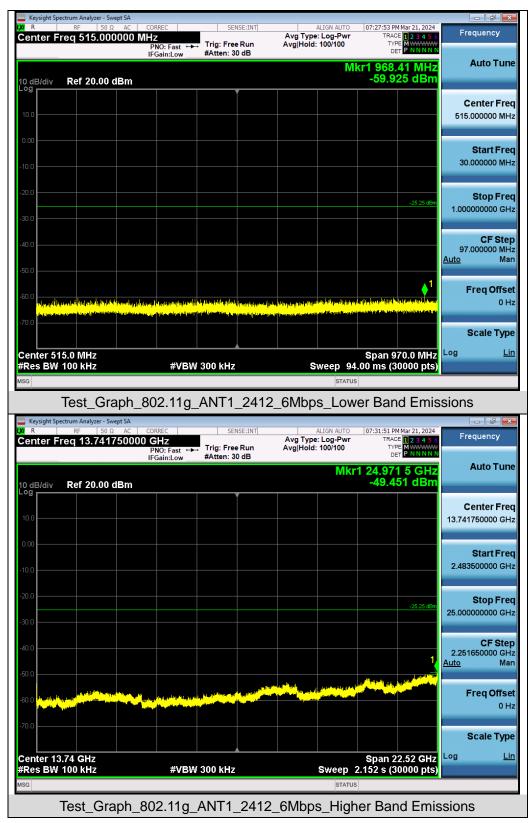




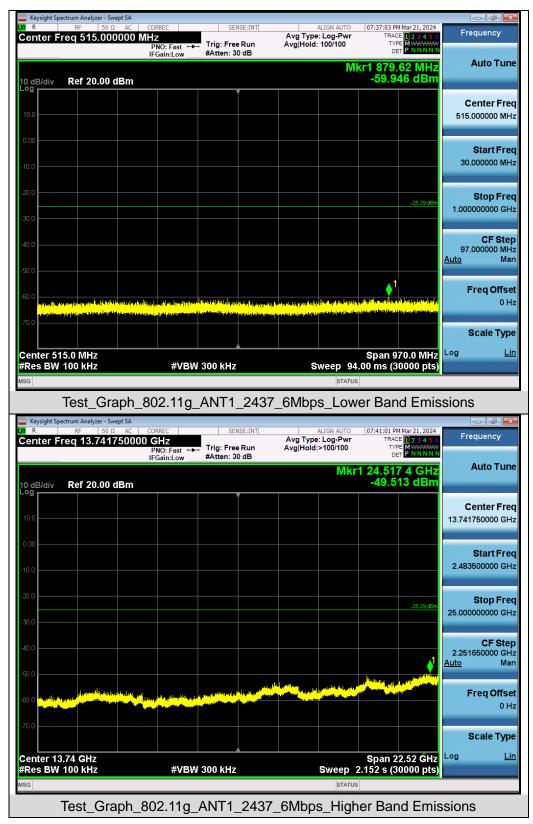




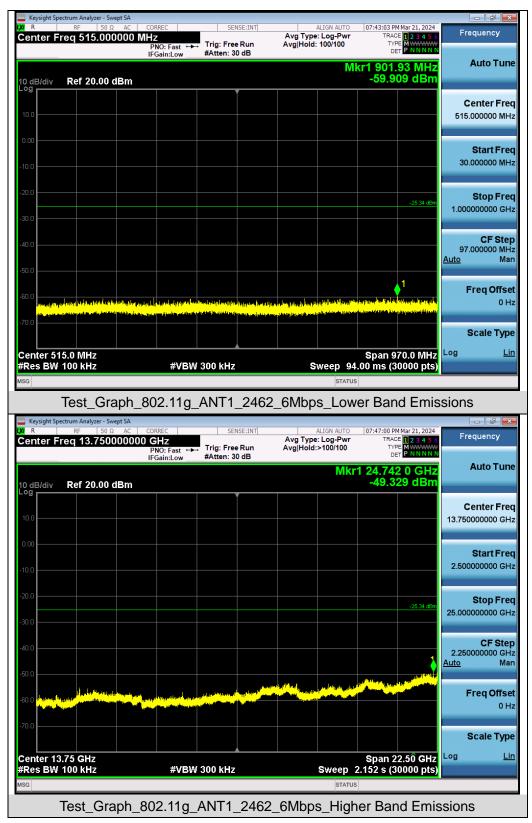




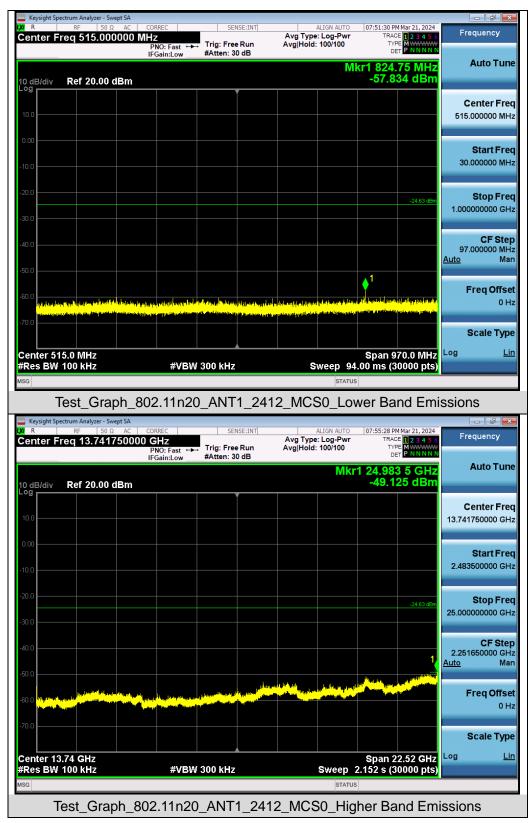




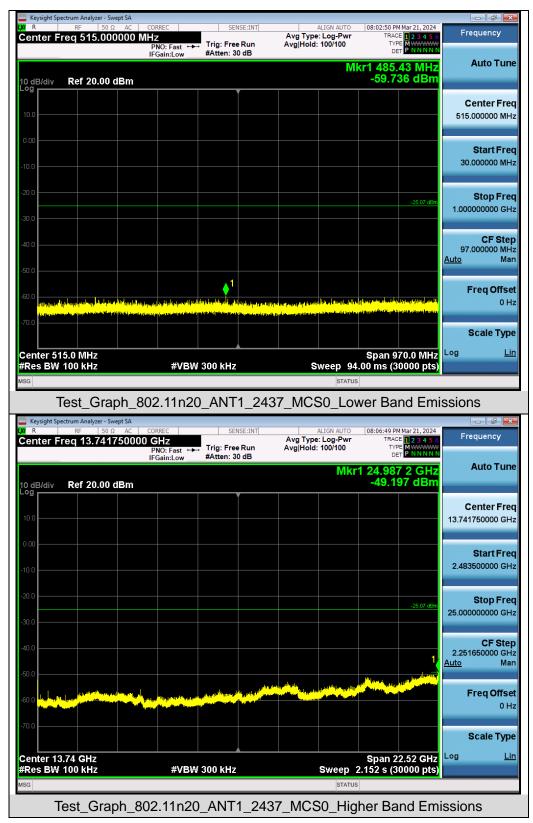




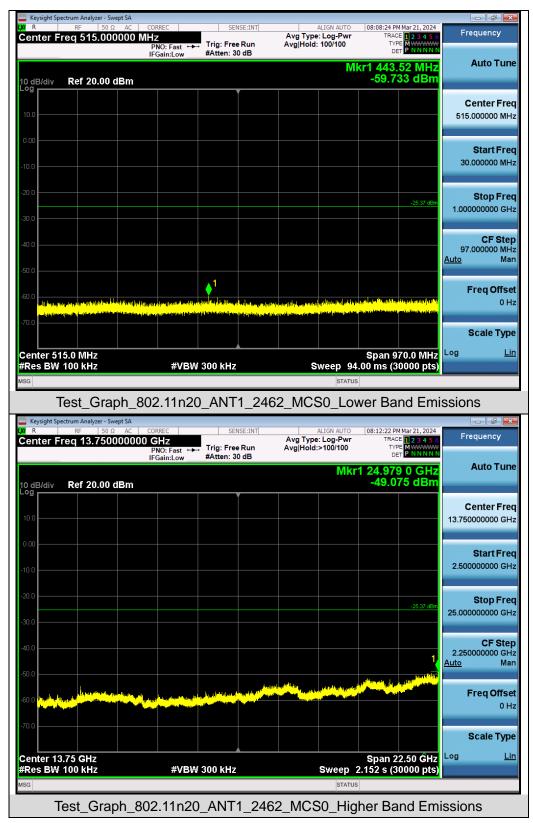




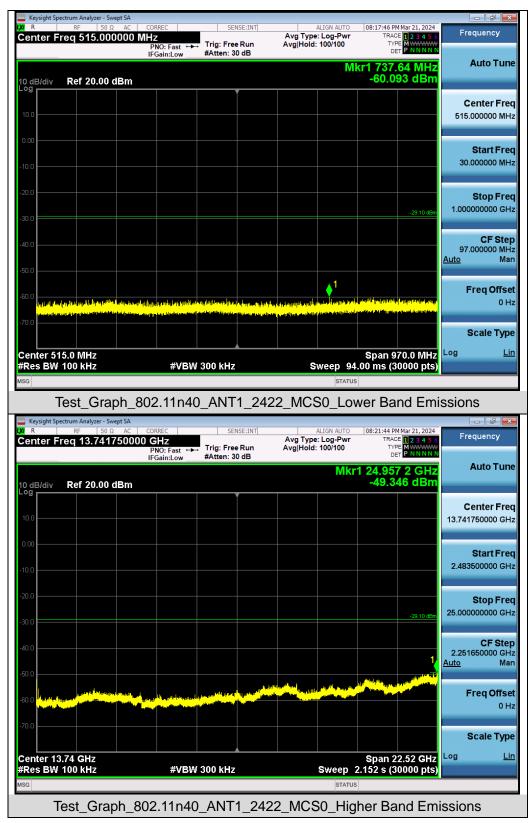



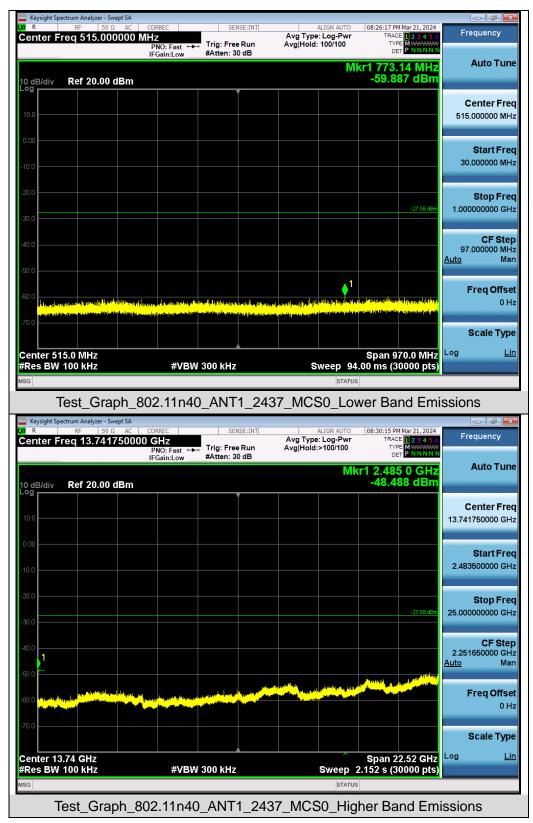



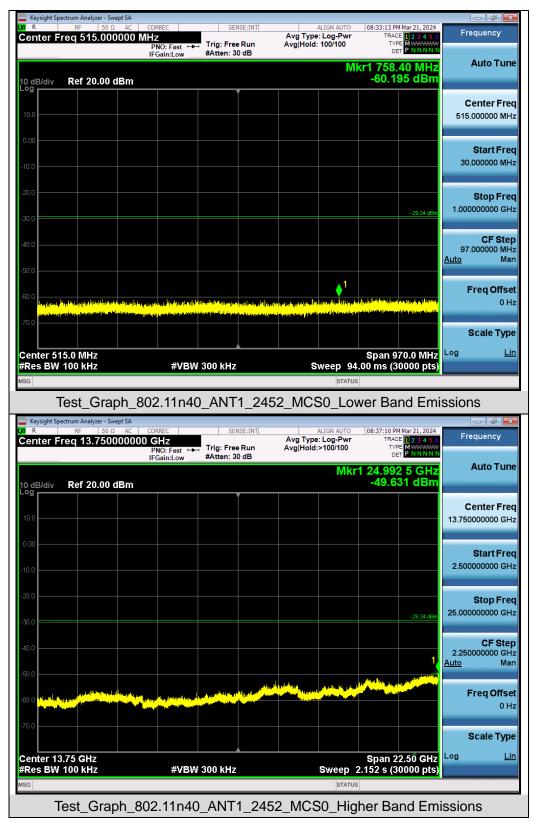






## Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



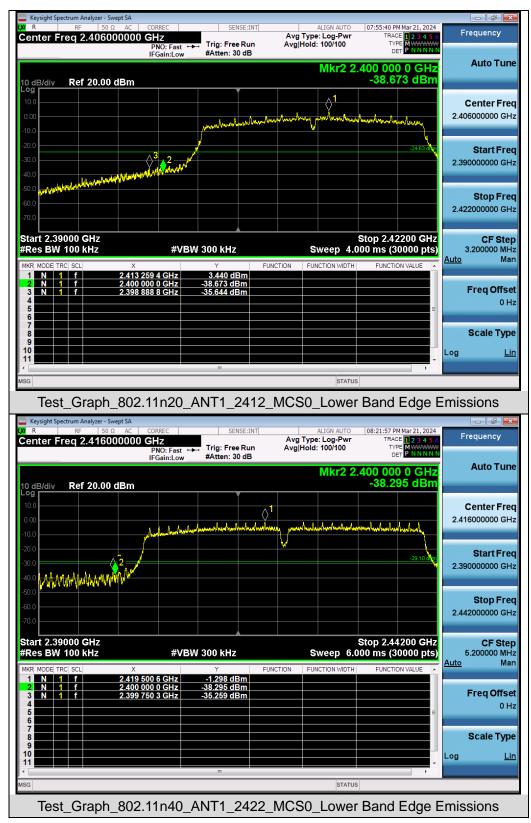



# **11. Radiated Spurious Emission**

## **11.1 Measurement Limits**

• 15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## **11.2 Measurement Procedure**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz		
Start ~Stop Trequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



## Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

## Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


## • Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW  $\geq$  [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




# 11.3 Measurement Setup (Block Diagram of Configuration)




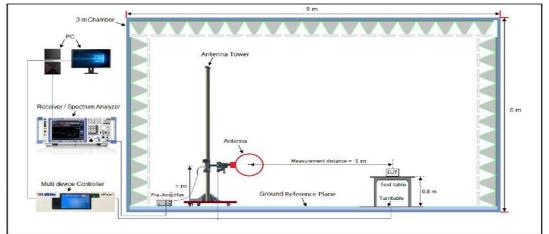

Radiated Emission Test Setup 30MHz-1000MHz

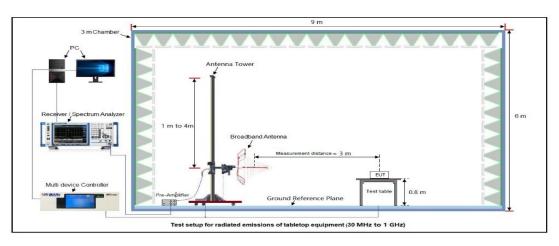

## Radiated Emission Test Setup Above 1000MHz

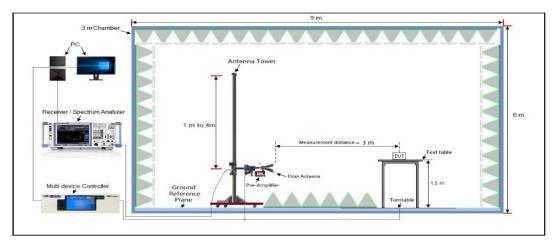



## **11.4 Measurement Result**

## Radiated Emission at 9kHz-30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

	Radiated Emission Test Results at 30MHz-1GHz										
EUT N	ame		4G LTE IP Radio			Model Nam	ne	IP-66			
Tempe	rature		22.9°	Ċ			Relative Hu	Relative Humidity 56.9%			
Pressu	ire		960h	Ра			Test Voltag	le	DC 3.7V by battery		
Test M	ode		Mode	e 3			Antenna Po	larity			
	130 120 110 90 80 (wy/rtgp]ava 50 40 30 20 10 0 0 10 0 0 10 0 10		)P Limit P Detector	- Horizontal PK	100M	FCC Part 150				16	
Final F	Peak D	ata L	.ist								
NO.		req. /Hz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	3	5.82		22.05	13.91	40.00	17.95	100	130	Horizontal	
2	12	23.12	2	23.02	14.24	43.50	20.48	100	350	Horizontal	
3	18	85.2		24.74	14.47	43.50	18.76	100	50	Horizontal	
4	29	97.72	2	22.06	16.41	46.00	23.94	100	160	Horizontal	
5	45	57.77		25.68	20.97	46.00	20.32	100	210	Horizontal	
6	90	0.09		36.09	28.83	46.00	9.91	100	290	Horizontal	



			Radiate	ed Emissie	on Test Resu	Its at 30MHz-	1GHz			
EUT Na	ame	4G LTE IP Radio			Model Nam	odel Name IP-66				
Tempe	rature	<b>22.9</b> ℃	C Relative Humidity			umidity	56.9%			
Pressu	re	960hP	a			Test Voltag	e	DC 3.7V by battery		
Test Mo	ode	Mode	3			Antenna Po	larity	Vertical		
						-				
	130				FCC Part 15C					
	110									
	100 90									
	80									
	[W]//TBp] 60 50									
	p]eag 50									
	40 30	*						hunger		
	20			mm	Manna	man man and the house ment	Warden Server and the prove April	he south and a star and a star and a star		
	10									
	-10									
	30M			100M	Frequency[Hz]				1G	
	C # Q	QP Limit IP Detector	Vertical PK							
Final P	eak Data I	List								
NO.	Freq. [MHz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	44.55		32.94	14.78	40.00	7.06	100	180	Vertical	
2	76.56		21.40	11.61	40.00	18.60	100	320	Vertical	
3	130.88	3	24.10	14.61	43.50	19.40	100	270	Vertical	
4	286.08	3	22.60	16.13	46.00	23.40	100	120	Vertical	
5	482.02	2	26.66	21.55	46.00	19.34	100	0	Vertical	
6	993.21		36.42	30.25	54.00	17.58	100	250	Vertical	

# **RESULT: Pass**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.



# Radiated Emissions Test Results above 1 GHz

EUT Name	4G LTE IF	<sup>o</sup> Radio	Mo	odel Name	IP-66	IP-66	
Temperature	<b>22.9</b> ℃		Re	elative Humidity	56.9%	56.9%	
Pressure	960hPa		Те	st Voltage	DC 3.7V	DC 3.7V by battery	
Test Mode	Mode 1		Ar	tenna Polarity	Horizonta	I	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
4824.000	50.16	0.08	50.24	74.00	-23.76	peak	
4824.000	40.01	0.08	40.09	54.00	-13.91	AVG	
7236.000	48.99	2.21	51.2	74.00	-22.80	peak	
7236.000	41.36	2.21	43.57	54.00	-10.43	AVG	
Remark:						-	
Factor = Anten	na Factor + Cab	le Loss – Pre-a	mplifier.				
EUT Name	4G LTE IF	P Radio	Ма	odel Name	IP-66		
EUT Name Temperature	4G LTE IF 22.9℃	<sup>D</sup> Radio		odel Name elative Humidity	IP-66 56.9%		
		P Radio	Re		56.9%	by battery	
Temperature	22.9°C	P Radio	Re Te	elative Humidity	56.9%	by battery	
Temperature Pressure	22.9℃ 960hPa	P Radio	Re Te	elative Humidity st Voltage	56.9%	by battery	
Temperature Pressure	22.9℃ 960hPa	P Radio Factor	Re Te	elative Humidity st Voltage	56.9%		
Temperature Pressure Test Mode	22.9℃ 960hPa Mode 1 Meter		Re Te Ar Emission	elative Humidity st Voltage tenna Polarity	56.9% DC 3.7V Vertical	by battery Value Type	
Temperature Pressure Test Mode Frequency	22.9°C 960hPa Mode 1 Meter Rea ing	Factor	Re Te Ar Emission Level	elative Humidity st Voltage tenna Polarity Limits	56.9% DC 3.7V Vertical Margin		
Temperature Pressure Test Mode Frequency (MHz)	22.9℃ 960hPa Mode 1 Meter Rea ing (dBµV)	Factor (dB)	Emission Level (dBµV/m)	elative Humidity st Voltage tenna Polarity Limits (dBµV/m)	56.9% DC 3.7V Vertical Margin (dB)	Value Type	
Temperature Pressure Test Mode Frequency (MHz) 4824.000	22.9℃ 960hPa Mode 1 Meter Rea ing (dBµV) 49.85	Factor (dB) 0.08	Emission Level (dBµV/m) 49.93	elative Humidity st Voltage tenna Polarity Limits (dBµV/m) 74.00	56.9% DC 3.7V Vertical Margin (dB) -24.07	Value Type	
Temperature Pressure Test Mode Frequency (MHz) 4824.000 4824.000	22.9℃ 960hPa Mode 1 Meter Rea ing (dBμV) 49.85 41.34	Factor (dB) 0.08 0.08	Emission           Level           (dBμV/m)           49.93           41.42	elative Humidity st Voltage tenna Polarity Limits (dBµV/m) 74.00 54.00	56.9% DC 3.7V Vertical Margin (dB) -24.07 -12.58	Value Type peak AVG	

## **RESULT: Pass**



# **Radiated Emissions Test Results above 1GHz**

Temperature	22 O°C			Model Name			IP-66	
Dressure	22.90	<b>22.9</b> ℃			ve Humidity	56.9%	56.9%	
Pressure	960hPa			Test Voltage		DC 3.7V k	DC 3.7V by battery	
Test Mode	Mode 2			Anten	na Polarity	Horizonta		
Frequency	Meter Reading	Factor	Emissio Level	'n	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/n	n)	(dBµV/m)	(dB)		
4874.00	49.85	0.14	49.99		74.00	-24.01	peak	
4874.00	40.27	0.14	40.41		54.00	-13.59	AVG	
7311.00	48.96	2.36	51.32		74.00	-22.68	peak	
7311.00	40.17	2.36	42.53		54.00	-11.47	AVG	
Remark:								
Factor = Antenna	a Factor + Cabl	e Loss – Pre-a	mplifier.					
EUT Name	4G LTE IF	Radio		Mode	I Name	IP-66	IP-66	
Temperature	<b>22.9</b> ℃			Relative Humidity		56.9%		
Pressure	960hPa			Test Voltage		DC 3.7V b	DC 3.7V by battery	
Test Mode	Mode 2			Antenna Polarity		Vertical	Vertical	
	·					·		
Frequency	Meter Reading	Factor	Emissio Level	n	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/n	n)	(dBµV/m)	(dB)		
4874.00	48.79	0.14	48.93		74.00	-25.07	peak	
4874.00	41.34	0.14	41.48		54.00	-12.52	AVG	
7311.00	49.36	2.36	51.72		74.00	-22.28	peak	
7311.00	41.36	2.36	43.72		54.00	-10.28	AVG	
Remark:			•					
Factor = Antenna	Factor + Cabl	e Loss – Pre-a	mplifier.					

## **RESULT: Pass**



# Radiated Emissions Test Results above 1GHz

EUT Name	4G LTE IF	P Radio		Mode	el Name	IP-66		
Temperature	<b>22.9</b> ℃			Relat	ive Humidity	56.9%		
Pressure	960hPa			Test Voltage		DC 3.7V by	DC 3.7V by battery	
Test Mode	Mode 3	Mode 3 Antenna Polarity		Horizontal				
Frequency	Meter Reading	Factor	Emiss Leve		Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV	′/m)	(dBµV/m)	(dB)		
4924.000	49.85	0.22	50.0	)7	74.00	-23.93	peak	
4924.000	40.18	0.22	40.4	-0	54.00	-13.60	AVG	
7386.000	49.34	2.64	51.9	8	74.00	-22.02	peak	
7386.000	39.11	2.64	41.7	'5	54.00	-12.25	AVG	
Remark:	•							
Factor = Anten	na Factor + Cab	le Loss – Pre-a	mplifier.					
EUT Name	4G LTE IF	P Radio		Mode	el Name	IP-66	IP-66	
Temperature	<b>22.9</b> ℃			Relat	ive Humidity	56.9%		
Pressure	960hPa			Test	Voltage	DC 3.7V by battery		
Test Mode	Mode 3			Antei	nna Polarity	Vertical	Vertical	
Frequency	Meter Reading	Factor	Emiss Leve		Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV	′/m)	(dBµV/m)	(dB)		
4924.000	49.52	0.22	49.7	'4	74.00	-24.26	peak	
4924.000	41.37	0.22	41.5	9	54.00	-12.41	AVG	
7386.000	48.63	2.64	51.2	27	74.00	-22.73	peak	
7386.000	40.15	2.64	42.7	'9	54.00	-11.21	AVG	
Remark:		•			-	-	•	
Factor = Anten	na Factor + Cab	le Loss – Pre-a	mplifier.					
L								

## **RESULT: Pass**

Note:


- 1. The amplitude of other spurious emissions from 1G to 40 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




# Band Edge Emission Test Results for Restricted Bands

EUT Name	4G LTE IP Radio	Model Name	IP-66
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

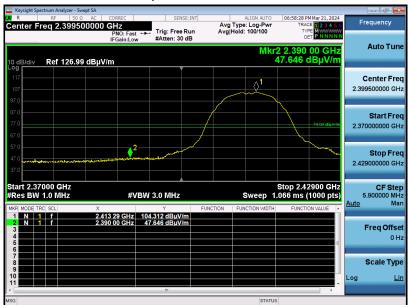

Test Graph for Average Measurement

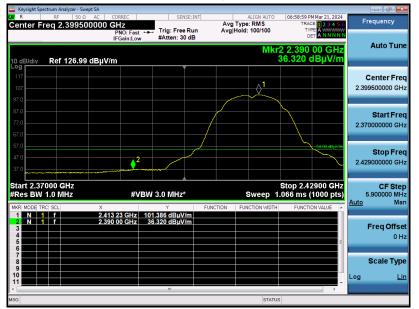

#### **RESULT: Pass**