

# FCC Measurement/Technical Report on

C400 ECU MID NA 4.5G  
Type 1589.1

FCC ID: 2AJW515891  
IC: 21979-15891

**Test Report Reference:** MDE\_CONTI\_2134\_FCC\_01

**Test Laboratory:**

7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



Deutsche  
Akkreditierungsstelle  
D-PL-12140-01-00

**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**

Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

Geschäftsführer/  
Managing Directors:  
Sebastian Doose  
Bernhard Retka

Registergericht/registered:  
Düsseldorf HRB 75554  
USt-Id.-Nr./VAT-No. DE203159652  
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas  
Group Company  
[www.7layers.com](http://www.7layers.com)

## Table of Contents

<b>1</b>	<b>Applied Standards and Test Summary</b>	<b>3</b>
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary	5
<b>2</b>	<b>Revision History / Signatures</b>	<b>9</b>
<b>3</b>	<b>Administrative Data</b>	<b>10</b>
3.1	Testing Laboratory	10
3.2	Project Data	10
3.3	Applicant Data	10
3.4	Manufacturer Data	10
<b>4</b>	<b>Test object Data</b>	<b>11</b>
4.1	General EUT Description	11
4.2	EUT Main components	11
4.3	Ancillary Equipment	12
4.4	Auxiliary Equipment	12
4.5	EUT Setups	12
4.6	Operating Modes / Test Channels	13
4.7	Product labelling	14
<b>5</b>	<b>Test Results</b>	<b>15</b>
5.1	Occupied Bandwidth (20 dB)	15
5.2	Occupied Bandwidth (99%)	19
5.3	Peak Power Output	22
5.4	Spurious RF Conducted Emissions	26
5.5	Transmitter Spurious Radiated Emissions	30
5.6	Band Edge Compliance Conducted	40
5.7	Band Edge Compliance Radiated	47
5.8	Channel Separation	56
5.9	Dwell Time	58
5.10	Number of Hopping Frequencies	61
<b>6</b>	<b>Test Equipment</b>	<b>63</b>
6.1	Test Equipment Hardware	63
6.2	Test Equipment Software	66
<b>7</b>	<b>Antenna Factors, Cable Loss and Sample Calculations</b>	<b>67</b>
7.1	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	67
7.2	Antenna R&S HL562 (30 MHz – 1 GHz)	68
7.3	Antenna R&S HF907 (1 GHz – 18 GHz)	69
7.4	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	70
<b>8</b>	<b>Measurement Uncertainties</b>	<b>71</b>
<b>9</b>	<b>Photo Report</b>	<b>72</b>

## 1 APPLIED STANDARDS AND TEST SUMMARY

### 1.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Intentional Radiator.

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-23 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

#### **Note:**

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05r02, 2019-04-02".  
ANSI C63.10-2013 is applied.

## 1.2 FCC-IC CORRELATION TABLE

### Correlation of measurement requirements for FHSS (e.g. Bluetooth®) equipment from FCC and IC

#### FHSS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5 & AMD 1 & AMD 2: 8.8
Occupied bandwidth	§ 15.247 (a) (1)	RSS-247 Issue 3: 5.1 (b)
Peak conducted output power	§ 15.247 (b) (1), (4)	RSS-247 Issue 3: 5.4 (b)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 5 & AMD 1 & AMD 2: 6.13/8.9/8.10; RSS-247 Issue 3: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 5 & AMD 1 & AMD 2: 6.13 / 8.9/8.10; RSS-247 Issue 3: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 3: 5.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-247 Issue 3: 5.1 (d)
Channel separation	§ 15.247 (a) (1)	RSS-247 Issue 3: 5.1 (b)
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-247 Issue 3: 5.1 (d)
Hybrid systems (only)	§ 15.247 (f); § 15.247 (e)	RSS-247 Issue 3: 5.3
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5 & AMD 1 & AMD 2: 8.3
Receiver spurious emissions	-	-

### 1.3 MEASUREMENT SUMMARY

#### **47 CFR CHAPTER I FCC PART 15** **Subpart C §15.247**

#### **§ 15.247 (a) (1)**

Occupied Bandwidth (20 dB)

The measurement was performed according to ANSI C63.10, chapter 6.9.2

#### **Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>Date</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency				
Bluetooth BDR, high	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, low	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, mid	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 2, high	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 2, low	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 2, mid	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, high	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, low	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, mid	S01_AC02	2023-10-05	Passed	Passed

#### **47 CFR CHAPTER I FCC PART 15** **Subpart C §15.247**

#### **IC RSS-Gen; Ch. 6.7 & Ch. 8**

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10, chapter 6.9.3

#### **Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>Date</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency				
Bluetooth BDR, high	S01_AD03	2024-05-14	N/A	Performed
Bluetooth BDR, low	S01_AD03	2024-05-14	N/A	Performed
Bluetooth BDR, mid	S01_AD03	2024-05-14	N/A	Performed
Bluetooth EDR 2, high	S01_AC02	2023-10-06	N/A	Performed
Bluetooth EDR 2, low	S01_AC02	2023-10-06	N/A	Performed
Bluetooth EDR 2, mid	S01_AC02	2023-10-06	N/A	Performed
Bluetooth EDR 3, high	S01_AC02	2023-10-06	N/A	Performed
Bluetooth EDR 3, low	S01_AC02	2023-10-06	N/A	Performed
Bluetooth EDR 3, mid	S01_AC02	2023-10-06	N/A	Performed

**47 CFR CHAPTER I FCC PART 15**
**§ 15.247 (b) (1) (2)**
**Subpart C §15.247**

Peak Power Output

The measurement was performed according to ANSI C63.10, chapter 11.9.1.3

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Measurement method

**Setup**
**Date**
**FCC**
**IC**

Bluetooth BDR, high, conducted	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, low, conducted	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, mid, conducted	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 2, high, conducted	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 2, low, conducted	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 2, mid, conducted	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, high, conducted	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, low, conducted	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, mid, conducted	S01_AC02	2023-10-05	Passed	Passed

**47 CFR CHAPTER I FCC PART 15**
**§ 15.247 (d)**
**Subpart C §15.247**

Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10, chapter 11.11

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency

**Setup**
**Date**
**FCC**
**IC**

Bluetooth BDR, high	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, low	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, mid	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 2, high	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 2, low	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 2, mid	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, high	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, low	S01_AC02	2023-10-05	Passed	Passed
Bluetooth EDR 3, mid	S01_AC02	2023-10-05	Passed	Passed

**47 CFR CHAPTER I FCC PART 15**
**§ 15.247 (d)**
**Subpart C §15.247**

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10, chapter 6.4, 6.5, 6.6.5

**Final Result**
**OP-Mode**

 Radio Technology, Operating Frequency,  
Measurement range, Antenna

**Setup**
**Date**
**FCC**
**IC**

Bluetooth BDR, high, 1 - 26 GHz, internal	S02_AD03	2024-05-18	Passed	Passed
Bluetooth BDR, high, 1 - 26 GHz, external	S02_AC02	2023-11-14	Passed	Passed
Bluetooth BDR, high, 30 M - 1 GHz, external	S02_AC02	2023-11-14	Passed	Passed
Bluetooth BDR, low, 1 - 26 GHz, external	S02_AC02	2023-11-14	Passed	Passed
Bluetooth BDR, low, 30 M - 1 GHz, external	S02_AC02	2023-09-27	Passed	Passed
Bluetooth BDR, mid, 1 - 26 GHz, external	S02_AC02	2023-11-22	Passed	Passed
Bluetooth BDR, mid, 30 M - 1 GHz, external	S02_AC02	2023-09-27	Passed	Passed
Bluetooth BDR, mid, 9 k - 30 MHz, external	S02_AD03	2024-04-25	Passed	Passed
Bluetooth EDR 2, high, 1 - 8 GHz, external	S02_AC02	2023-11-14	Passed	Passed
Bluetooth EDR 2, low, 1 - 8 GHz, external	S02_AC02	2023-11-14	Passed	Passed
Bluetooth EDR 2, mid, 1 - 8 GHz, external	S02_AC02	2023-11-14	Passed	Passed

**47 CFR CHAPTER I FCC PART 15**
**§ 15.247 (d)**
**Subpart C §15.247**

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10, chapter 11.11

**Final Result**
**OP-Mode**

 Radio Technology, Operating Frequency, Band  
Edge

**Setup**
**Date**
**FCC**
**IC**

Bluetooth BDR, high, high	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, hopping, high	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, hopping, low	S01_AD03	2024-05-14	Passed	Passed
Bluetooth BDR, low, low	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 2, high, high	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 2, hopping, high	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 2, hopping, low	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 2, low, low	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 3, high, high	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 3, hopping, high	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 3, hopping, low	S01_AD03	2024-05-14	Passed	Passed
Bluetooth EDR 3, low, low	S01_AD03	2024-05-14	Passed	Passed

**47 CFR CHAPTER I FCC PART 15**  
**Subpart C §15.247**

**§ 15.247 (d)**

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10, chapter 6.6.5

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>Date</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Band Edge, Antenna				
Bluetooth BDR, high, high, external	S01_AC02	2023-11-14	Passed	Passed
Bluetooth BDR, high, high, internal	S01_AC02	2023-11-14	Passed	Passed
Bluetooth EDR 2, high, high, external	S01_AC02	2023-11-14	Passed	Passed
Bluetooth EDR 2, high, high, internal	S01_AC02	2023-11-14	Passed	Passed
Bluetooth EDR 3, high, high, external	S01_AC02	2023-11-14	Passed	Passed
Bluetooth EDR 3, high, high, internal	S01_AC02	2023-11-14	Passed	Passed

**47 CFR CHAPTER I FCC PART 15**  
**Subpart C §15.247**

**§ 15.247 (a) (1)**

Channel Separation

The measurement was performed according to ANSI C63.10, chapter 7.8.2

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>Date</b>	<b>FCC</b>	<b>IC</b>
Radio Technology				
Bluetooth BDR	S01_AD03	2024-05-14	Passed	Passed

**47 CFR CHAPTER I FCC PART 15**  
**Subpart C §15.247**

**§ 15.247 (a) (1) (i) (ii) (iii)**

Dwell Time

The measurement was performed according to ANSI C63.10, chapter 7.8.4

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>Date</b>	<b>FCC</b>	<b>IC</b>
Radio Technology				
Bluetooth BDR	S01_AD03	2024-05-14	Passed	Passed

**47 CFR CHAPTER I FCC PART 15**  
**Subpart C §15.247**

**§ 15.247 (a) (1) (i) (ii) (iii)**

Number of Hopping Frequencies

The measurement was performed according to ANSI C63.10, chapter 7.8.3

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>Date</b>	<b>FCC</b>	<b>IC</b>
Radio Technology				
Bluetooth BDR	S01_AD03	2024-05-14	Passed	Passed

N/A: Not applicable

N/P: Not performed



## 2 REVISION HISTORY / SIGNATURES

Report version control			
Version	Release date	Change Description	Version validity
initial	2024-09-12	--	valid
--	--	--	--

COMMENT: -



(responsible for accreditation scope)  
Dipl.-Ing. Daniel Gall



(responsible for testing and report)  
BSc. Mhd Mouaz Saad



7 layers GmbH, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

### 3 ADMINISTRATIVE DATA

#### 3.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAkkS D-PL-12140-01-00  
FCC Designation Number: DE0015  
FCC Test Firm Registration: 929146  
ISED CAB Identifier: DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Daniel Gall  
Report Template Version: 2023-09-29

#### 3.2 PROJECT DATA

Responsible for testing and report: BSc. Mhd Mouaz Saad  
Employees who performed the tests: documented internally at 7Layers  
Date of Report: 2024-09-12  
Testing Period: 2023-09-27 to 2024-05-18

#### 3.3 APPLICANT DATA

Company Name: Continental Automotive Technologies GmbH  
Address: Heinrich-Hertz-Str. 45  
78052, Villingen- Schwenningen  
Germany  
Contact Person: Patrick Seng

#### 3.4 MANUFACTURER DATA

Company Name: please see Applicant Data  
Address:  
Contact Person:

## 4 TEST OBJECT DATA

### 4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	The CM4 is a communication module with several wired interfaces to the vehicle. Additional functions as GNSS, mobile communication, WiFi and Bluetooth are provided.
Product name	C400 ECU MID EU/ROW 4.5G
Type	Type 1589.1
<b>Declared EUT data by the supplier</b>	
Voltage Type	DC
Voltage Level	24 V
Antenna / Gain	@ 2.4 GHz: Internal / 2.8 dBi external / 4.4 dBi
Tested Modulation Type and Data Rates	GFSK Modulation, 1-DHx packets, 1 Mbit n/4 DQPSK Modulation, 2-DHx packets, 2 Mbit 8-DPSK Modulation, 3-DHx packets, 3 Mbit
EUT ports (connected cables during testing):	- DC cable Harness (unshielded, 2m) - GNSS/Cellular/WiFi/Bluetooth antenna ports (shielded, 1.6 m) - USB connector (for testing purposes only)
Special software used for testing	ADB Shell

### 4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT_AC02	DE1480003ac02	Conducted/ Radiated Sample
Sample Parameter	Value	
Serial No.	000066	
HW Version	CM4	
SW Version	TRATON_CM4_26.12.1.12	
Comment	-	

Sample Name	Sample Code	Description
EUT_AD03	DE1480003ad03	Conducted/ Radiated Sample
Sample Parameter	Value	
Serial No.	23325-0004	
HW Version	CM4	
SW Version	TRATON_CM4_26.12.1.16	
Comment	-	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

### 4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details(Manufacturer, Type Model, OUT Code)	Description
ANC1	DESAY SV, 4829.01 roof top antenna, DE1480003AUX1	GNSS, Cellular Antenna
ANC2	DESAY SV, 4828.01 roof top antenna, DE1480003AUX2	WIFI/BT, Cellular Antenna

### 4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AUX A	continental, -, -, -, -	Cable Harness

### 4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AD03	EUT_AD03, AUX A	Conducted Setup
S02_AD03	EUT_AD03, ANC1, ANC2, AUX A	Radiated Setup
S01_AC02	EUT_AC02, AUX A	Conducted Setup
S02_AC02	EUT_AC02, ANC1, ANC2, AUX A	Radiated Setup


## 4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

**BT Test Channels:**  
**Channel:**  
**Frequency [MHz]**

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
0	39	78
2402	2441	2480

### Duty Cycle:

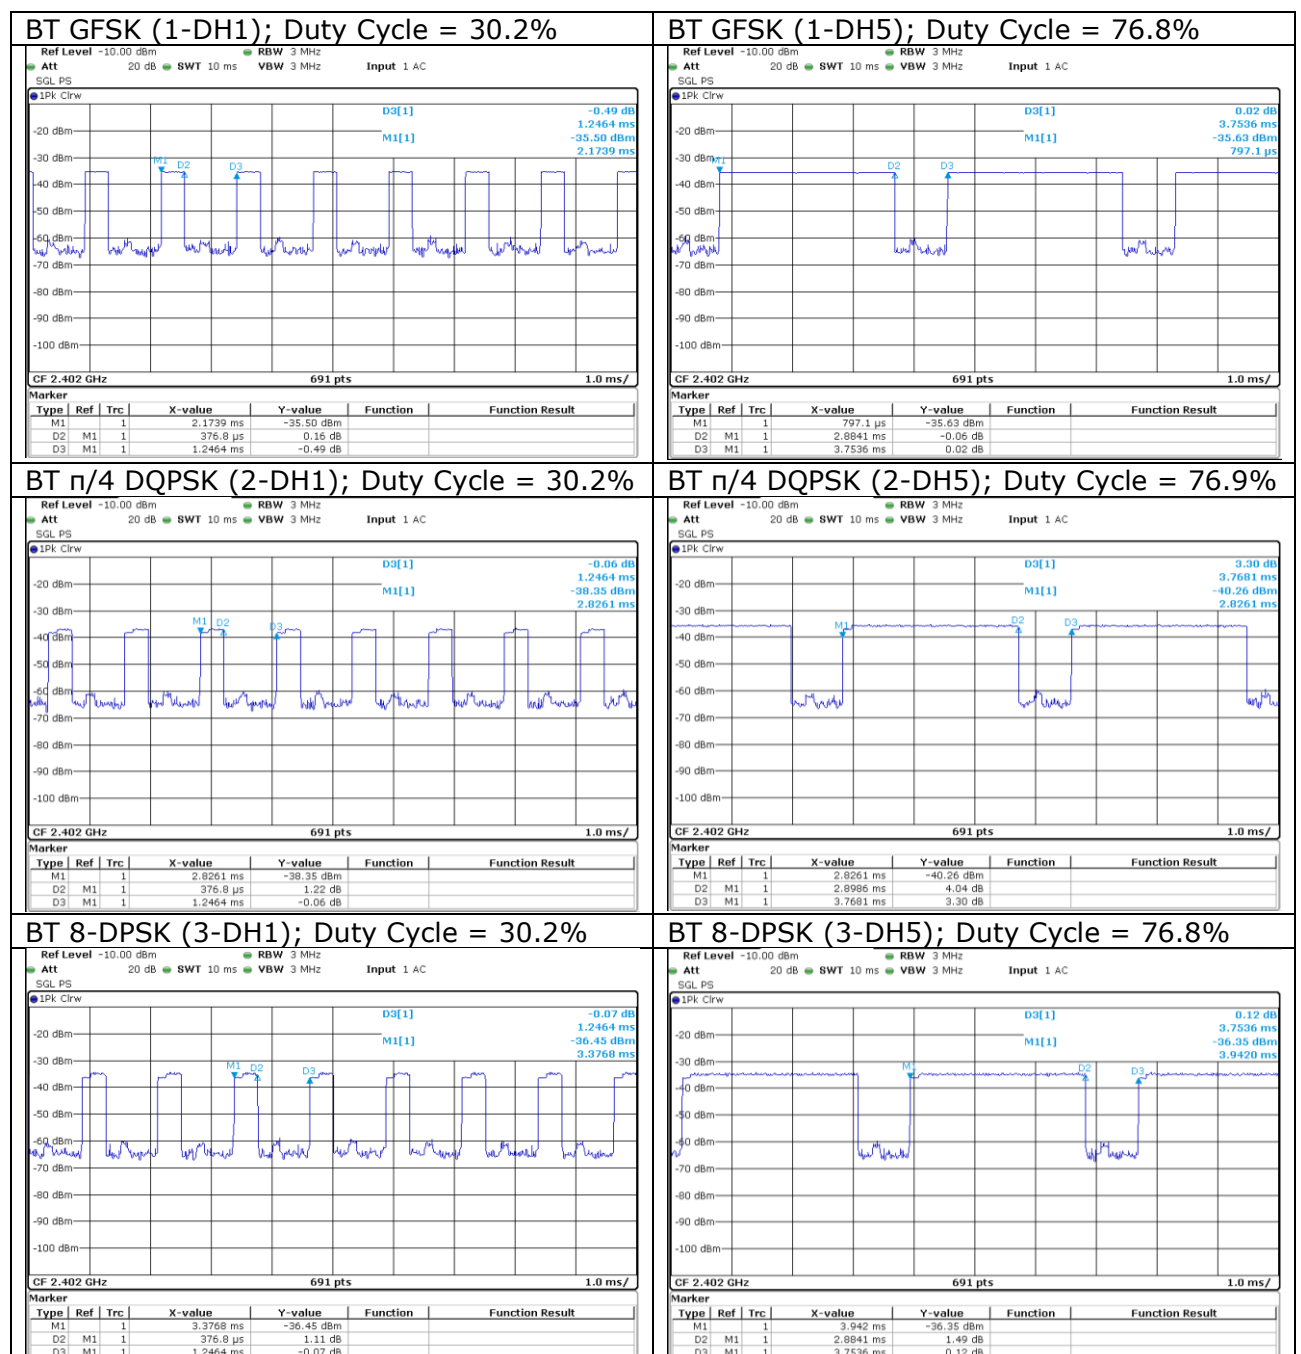

## 4.7 PRODUCT LABELLING

### 4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

### 4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

## 5 TEST RESULTS

### 5.1 OCCUPIED BANDWIDTH (20 DB)

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 6.9.2

#### 5.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.


The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 1% to 5 % of the OBW
- Video Bandwidth (VBW):  $\geq 3 \times \text{RBW}$
- Span: 2 to 5 times the OBW
- Trace: Maxhold
- Sweeps: Till stable (min. 1000, max. 30000)
- Sweep time: Auto
- Detector: Peak

The technology depending measurement parameters can be found in the measurement plot.

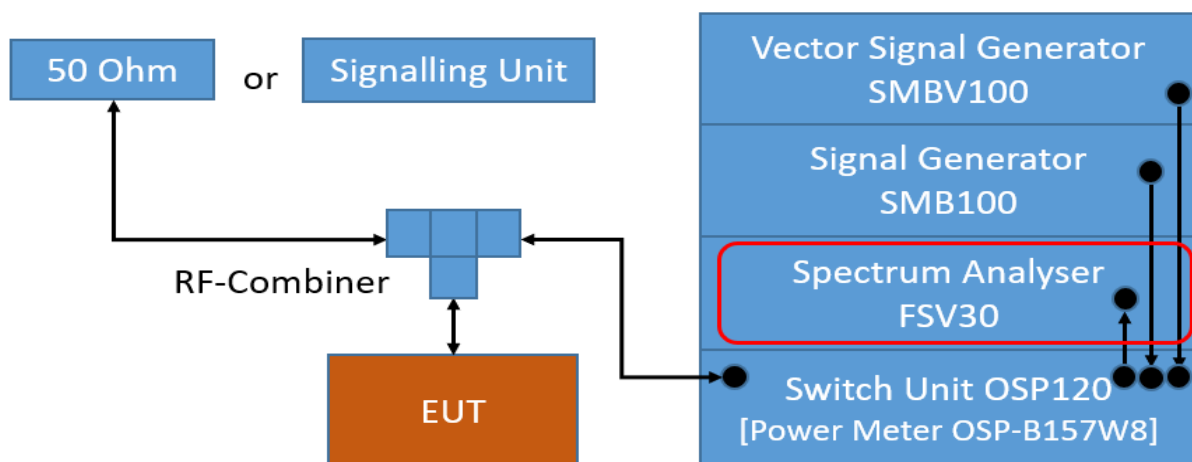

TS8997; Channel Bandwidth

### 5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

For the frequency band 2400 – 2483.5 MHz:  
FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm):

Implicit Limit: Max. 20 dB BW =  $1.0 \text{ MHz} / 2/3 = 1.5 \text{ MHz}$

2. If the system output power exceeds 125 mW (21.0 dBm):

Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) =  $10 \log (\text{Output power (W)} / 1\text{mW})$

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report.

Therefore the limit is determined as 1.5 MHz.



### 5.1.3 TEST PROTOCOL

Ambient temperature: 22 °C  
 Air Pressure: 998 hPa  
 Humidity: 39 %  
 BT GFSK (1-DH1)

Band	Channel No.	Frequency [MHz]	20 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	0.920	1.470	0.550
	39	2441	0.920	1.470	0.550
	78	2480	0.920	1.470	0.550

BT n/4 DQPSK (2-DH1)

Band	Channel No.	Frequency [MHz]	20 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	1.220	1.470	0.250
	39	2441	1.190	1.470	0.280
	78	2480	1.275	1.470	0.195


BT 8-DPSK (3-DH1)

Band	Channel No.	Frequency [MHz]	20 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	1.315	1.470	0.155
	39	2441	1.245	1.470	0.225
	78	2480	1.285	1.470	0.185

Remark: Please see next sub-clause for the measurement plot.

### 5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth BDR, Operating Channel = 0  
 (S01\_AD03)

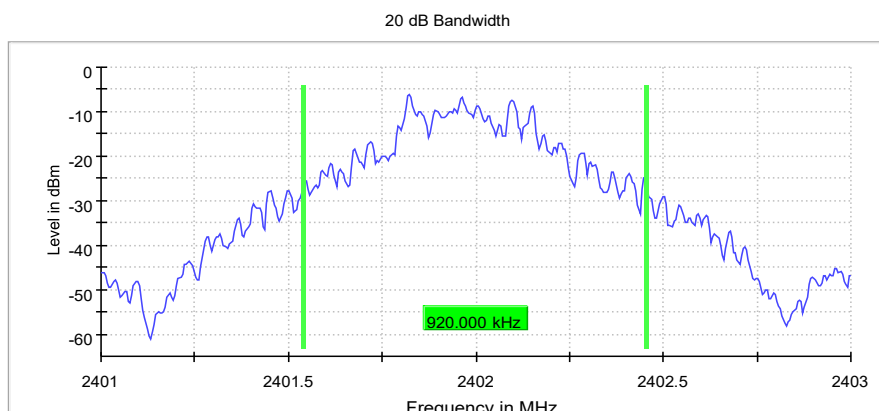

#### Measurement

Setting	Instrument Value
Start Frequency	2.40100 GHz
Stop Frequency	2.40300 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
SweepTime	189.648 μs
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	8 / max. 150
Stable	5 / 5
Max Stable Difference	0.07 dB


Modulation= Bluetooth EDR 2, Operating Channel = 78  
(S01\_AC02)

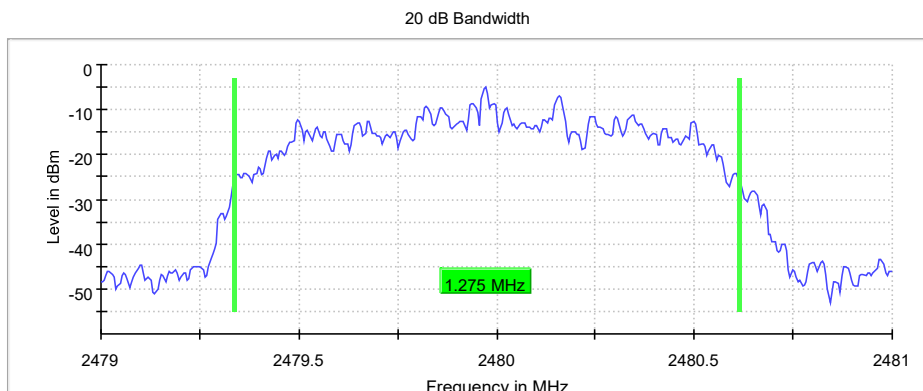

#### Measurement

Setting	Instrument Value
Start Frequency	2.47900 GHz
Stop Frequency	2.48100 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
Sweeptime	419.000 $\mu$ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	7 / max. 150
Stable	5 / 5
Max Stable Difference	0.04 dB

Modulation= Bluetooth EDR 3, Operating Channel = 0  
(S01\_AC02)

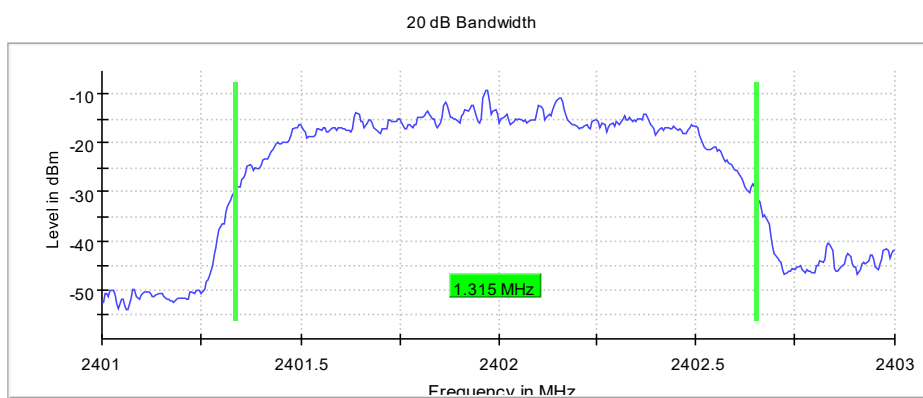

#### Measurement

Setting	Instrument Value
Start Frequency	2.40100 GHz
Stop Frequency	2.40300 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
Sweeptime	419.000 $\mu$ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	45 / max. 150
Stable	5 / 5
Max Stable Difference	0.16 dB

### 5.1.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.2 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 6.9.3

### 5.2.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 1 to 5 % of the OBW
- Video Bandwidth (VBW):  $\geq 3$  times the RBW
- Span: 1.5 to 5 times the OBW
- Trace: Maxhold
- Sweeps: Till stable (min. 500, max. 75000)
- Sweep time: Auto
- Detector: Peak

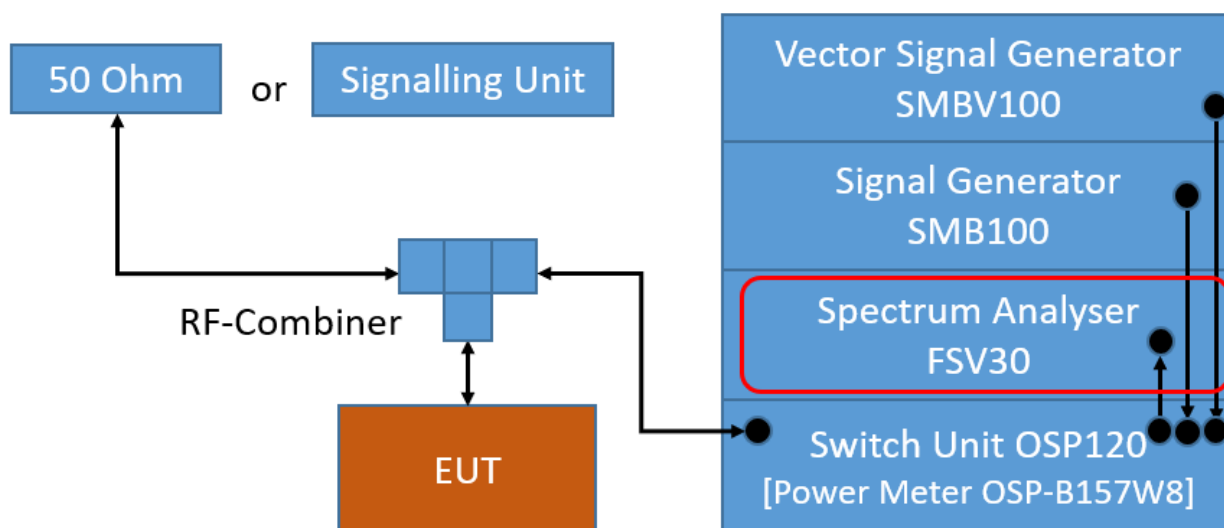

TS8997; Channel Bandwidth

### 5.2.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

### 5.2.3 TEST PROTOCOL

Ambient temperature: 22 °C  
 Air Pressure: 998 hPa  
 Humidity: 39 %  
 BT GFSK (1-DH1)

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	0.860
	39	2441	0.855
	78	2480	0.855

BT  $\pi/4$  DQPSK (2-DH1)

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	1.155
	39	2441	1.155
	78	2480	1.165


BT 8-DPSK (3-DH1)

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	1.190
	39	2441	1.170
	78	2480	1.190

Remark: Please see next sub-clause for the measurement plot.

### 5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth BDR, Operating Channel = 0  
 (S01\_AD03)

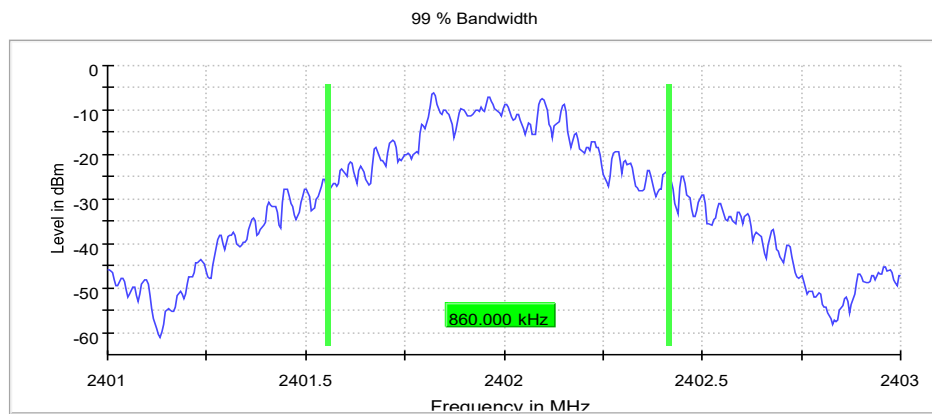

#### Measurement

Setting	Instrument Value
Start Frequency	2.40100 GHz
Stop Frequency	2.40300 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
SweepTime	189.648 $\mu$ s
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	500
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.05 dB


Modulation= Bluetooth EDR 2, Operating Channel = 78  
(S01\_AC02)

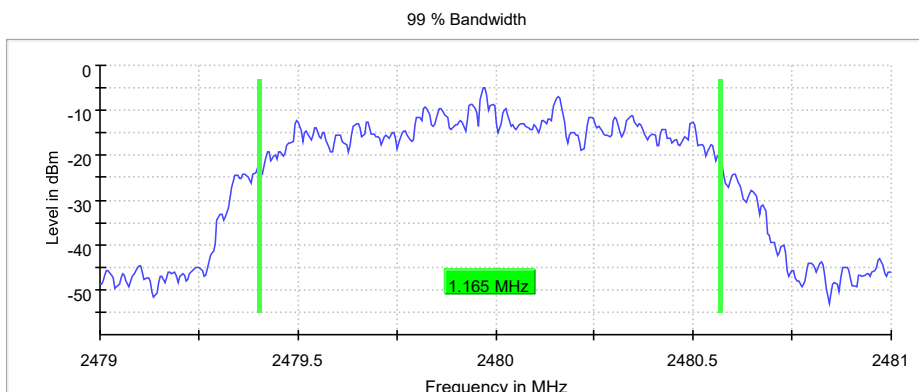

#### Measurement

Setting	Instrument Value
Start Frequency	2.47900 GHz
Stop Frequency	2.48100 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
SweepTime	419.000 $\mu$ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	500
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.08 dB

Modulation= Bluetooth EDR 3, Operating Channel = 0  
(S01\_AC02)

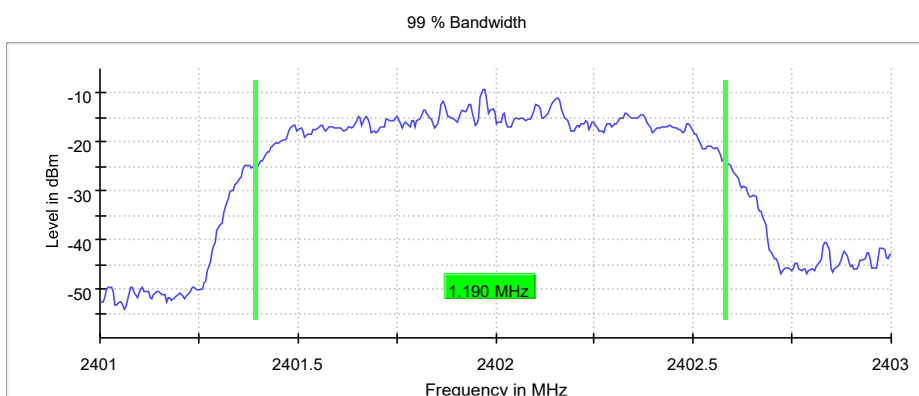

#### Measurement

Setting	Instrument Value
Start Frequency	2.40100 GHz
Stop Frequency	2.40300 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
SweepTime	419.000 $\mu$ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	500
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	48 / max. 150
Stable	3 / 3
Max Stable Difference	0.27 dB

## 5.2.5 TEST EQUIPMENT USED

- R&S TS8997

### 5.3 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 11.9.1.3

#### 5.3.1 TEST DESCRIPTION


FHSS EQUIPMENT:

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyser was set higher than the output power of the EUT.


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW):  $\geq 20$  dB BW
- Video Bandwidth (VBW):  $\geq 3$  times RBW
- Trace: Maxhold
- Sweeps: Till stable (min. 300, max. 15000)
- Sweep time: Auto
- Detector: Peak

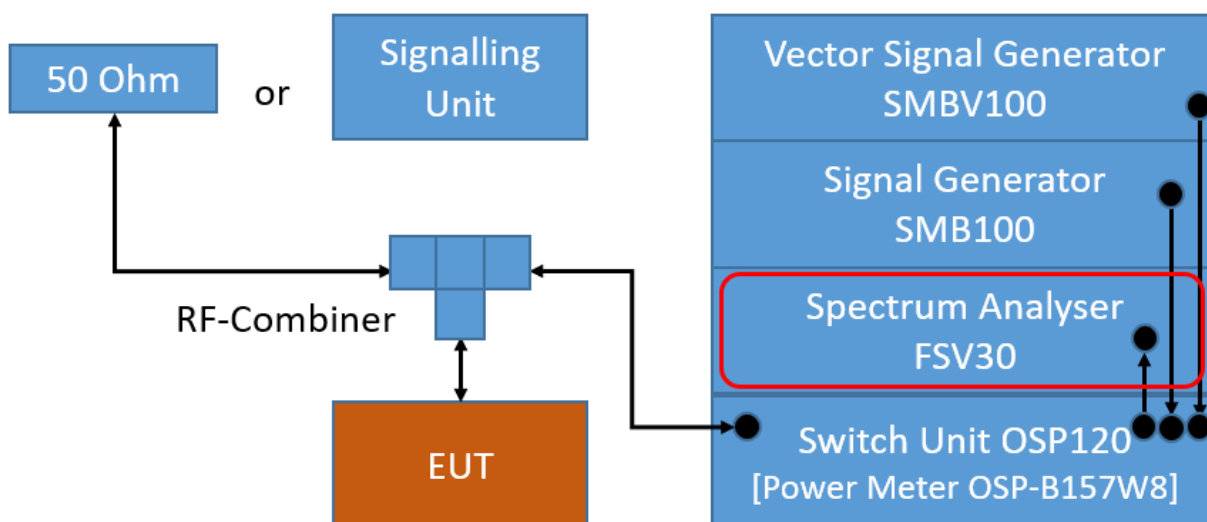

TS8997; Output Power

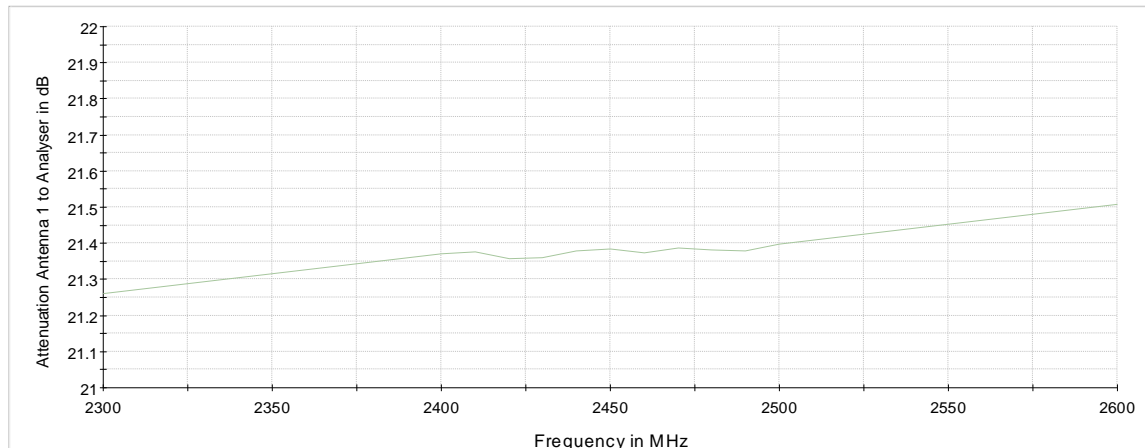

Attenuation Output power

### 5.3.2 TEST REQUIREMENTS / LIMITS

#### **DTS devices:**

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

#### **Frequency Hopping Systems:**

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

### 5.3.3 TEST PROTOCOL

Ambient temperature: 22 °C  
 Air Pressure: 998 hPa  
 Humidity: 39 %  
 BT GFSK (1-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	-0.2	21.0	21.2	4.2
	39	2441	0.7	21.0	20.3	5.1
	78	2480	3	21.0	18.0	7.4

BT π/4 QPSK (2-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	-0.7	21.0	21.7	3.7
	39	2441	0.6	21.0	20.4	5.0
	78	2480	3.2	21.0	17.8	7.6


BT 8-DPSK (3-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	-0.4	21.0	21.4	4.0
	39	2441	1.3	21.0	19.7	5.7
	78	2480	3.5	21.0	17.5	7.9

Remark: Please see next sub-clause for the measurement plot.

### 5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Modulation= Bluetooth BDR, Operating Channel = 78  
 (S01\_AD03)

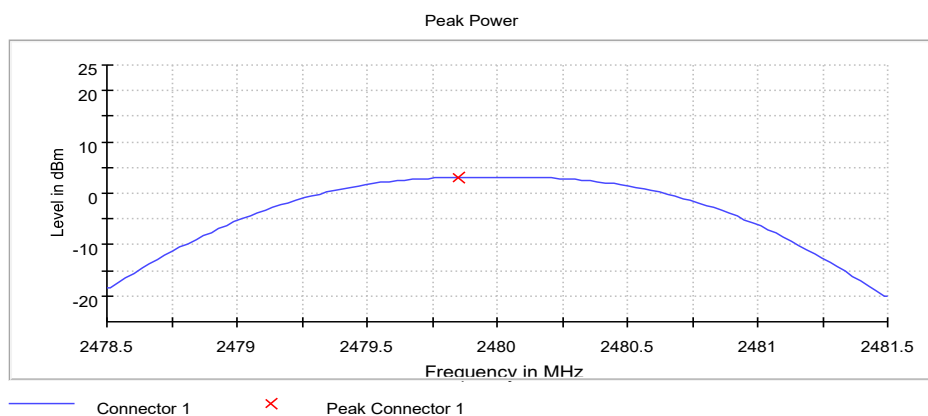


#### Measurement

Setting	Instrument Value
Start Frequency	2.47850 GHz
Stop Frequency	2.48150 GHz
Span	3.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
SweepPoints	101
SweepTime	1.907 μs
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.01 dB




Modulation= Bluetooth EDR 2, Operating Channel = 78  
(S01\_AC02)

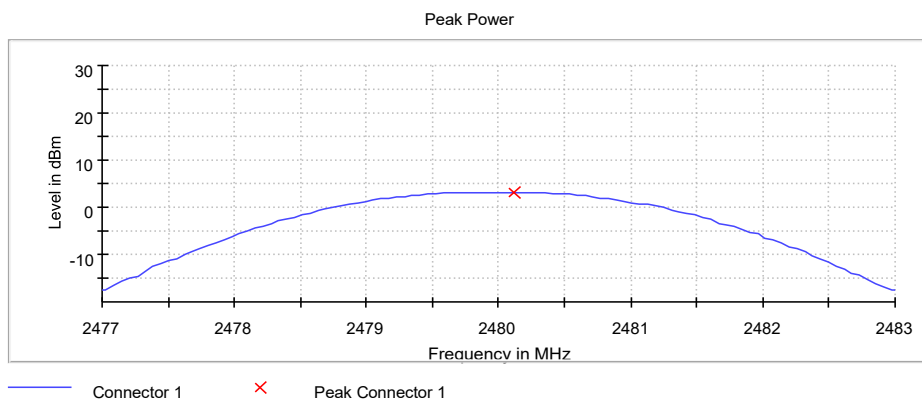

#### Measurement

Setting	Instrument Value
Start Frequency	2.47700 GHz
Stop Frequency	2.48300 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	1.000 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.20 dB

Modulation= Bluetooth EDR 3, Operating Channel = 78  
(S01\_AC02)

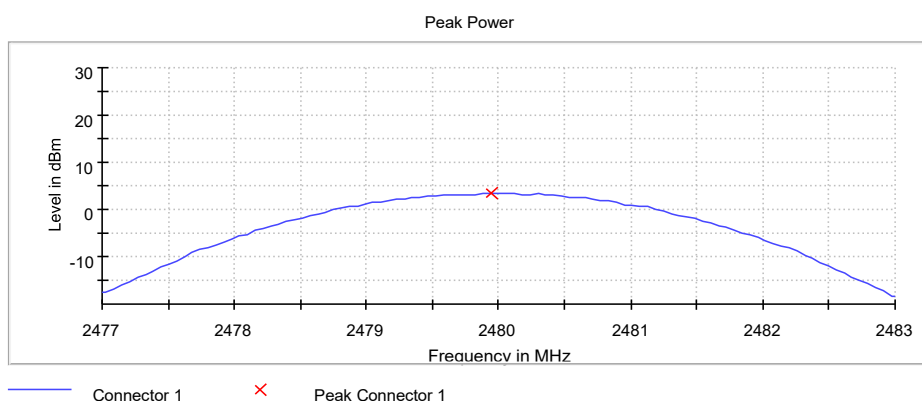

#### Measurement

Setting	Instrument Value
Start Frequency	2.47700 GHz
Stop Frequency	2.48300 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	1.000 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.21 dB

### 5.3.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.4 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 11.11

### 5.4.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Analyser settings:

- Frequency range: 30 – 26000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: Till Stable (max. 120)
- Sweep Time: Auto
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance conducted”. This value is used to calculate the 20 dBc or 30 dBc limit.

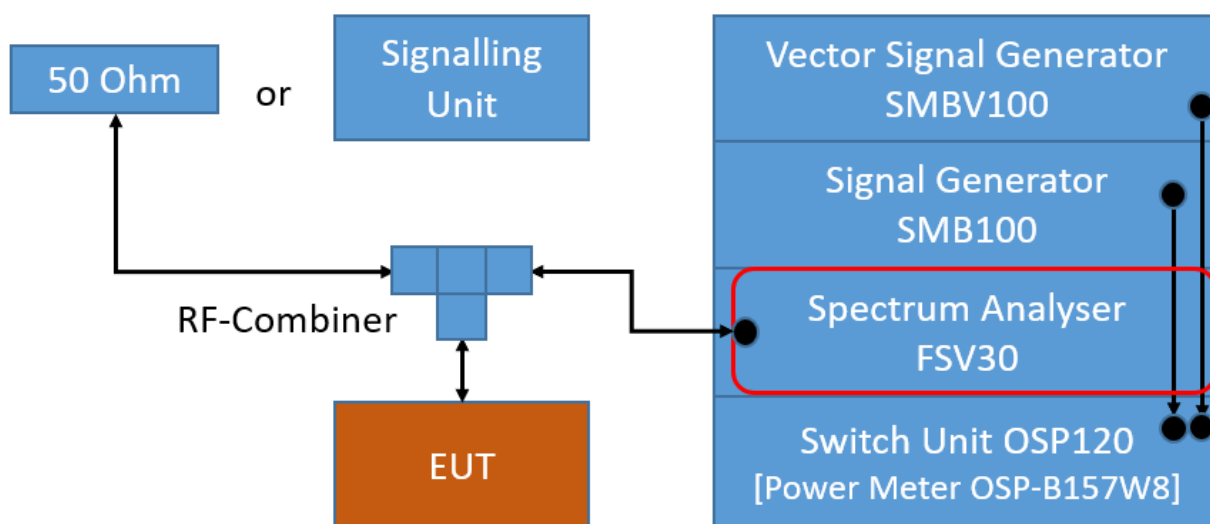

TS8997; Spurious RF Conducted Emissions

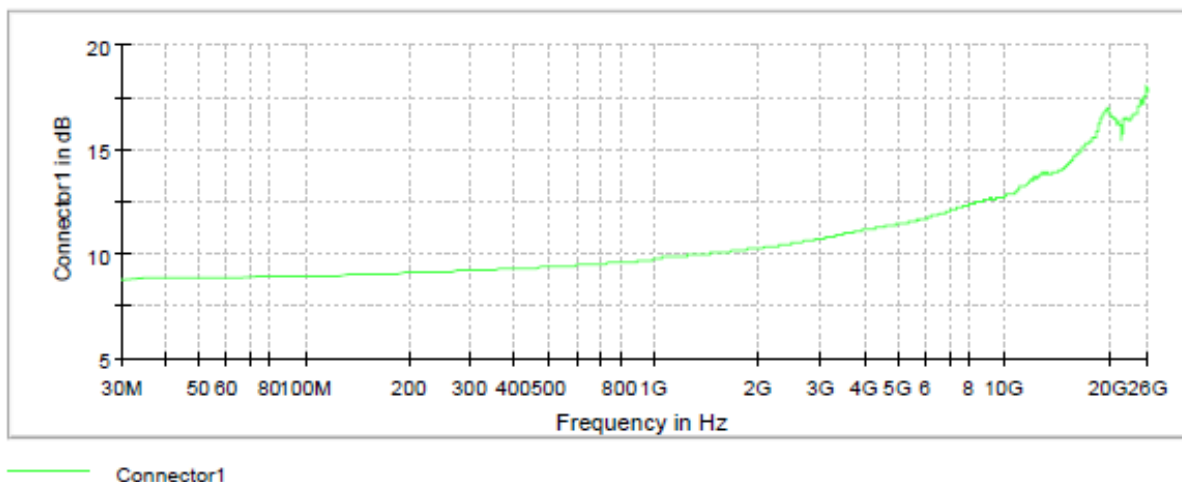

Attenuation of the measurement part

#### 5.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.4.3 TEST PROTOCOL

Ambient temperature: 22 °C  
Air Pressure: 998 hPa  
Humidity: 39 %  
BT GFSK (1-DH1)

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2395.0	-54.3	PEAK	100	0.0	-20.0	34.3
39	2441	4877.1	-63.8	PEAK	100	-0.2	-20.2	43.6
78	2480	2488.5	-62.4	PEAK	100	3.5	-16.5	45.9

BT n/4 DQPSK (2-DH1)

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2395.0	-61.4	PEAK	100	-2.4	-22.4	39.0
39	2441	4887.1	-68.5	PEAK	100	-6.9	-26.9	41.6
78	2480	831.6	-61.7	PEAK	100	-0.5	-20.5	41.2

BT 8-DPSK (3-DH1)

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	-64.6	PEAK	100	-3.9	-23.9	40.7	-64.6
39	2441	-66.6	PEAK	100	-0.8	-20.8	45.8	-66.6
78	2480	-58.9	PEAK	100	-2.7	-22.7	36.2	-58.9


Remark: Please see next sub-clause for the measurement plot.

The used limits in the following plots are not correct, the correct limits are defined in the previous tables.

### 5.4.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth BDR, Operating Channel = 0  
(S01\_AD03)

Spurious

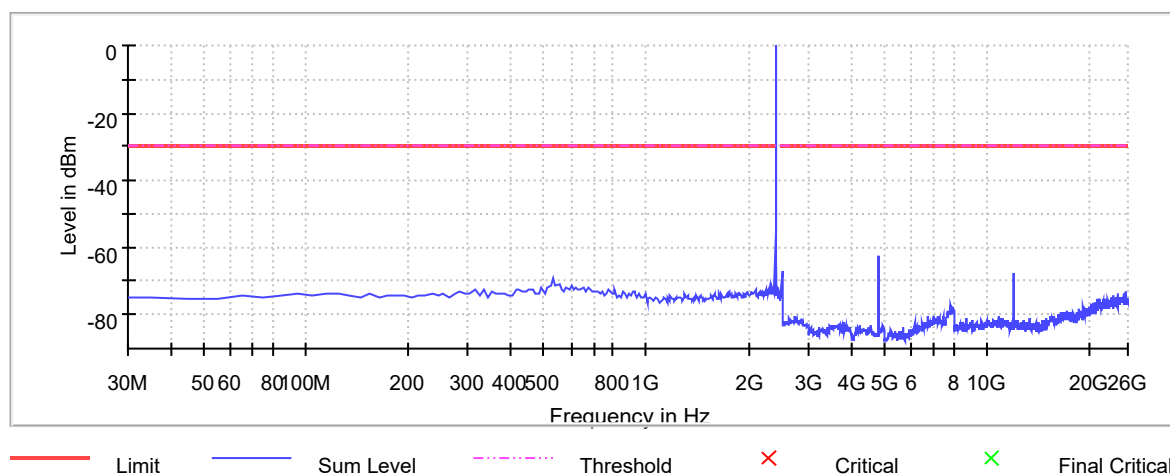

Modulation= Bluetooth EDR 2, Operating Channel = 0  
(S01\_AC02)


Spurious

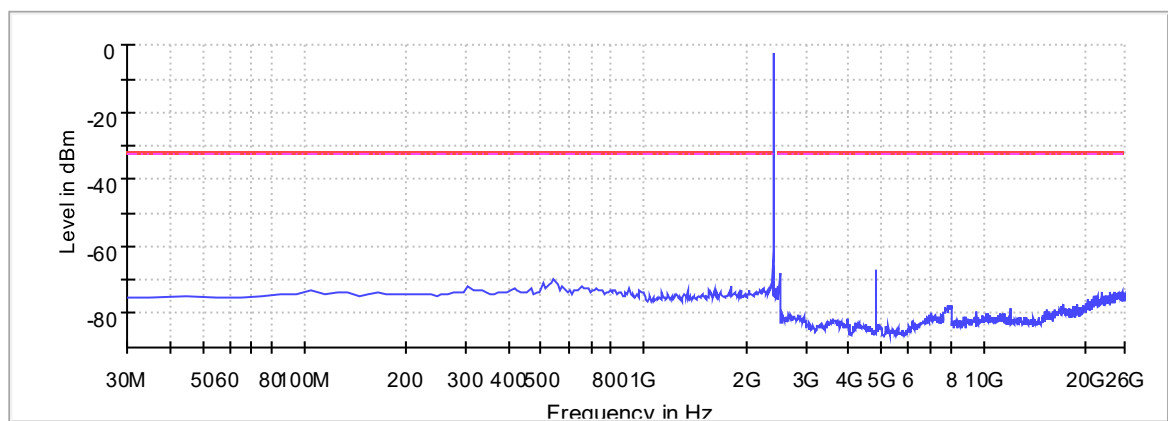

— Limit — Sum Level - - - Threshold × Critical × Final Critical

Modulation= Bluetooth EDR 3, Operating Channel = 78  
(S01\_AC02)

Spurious

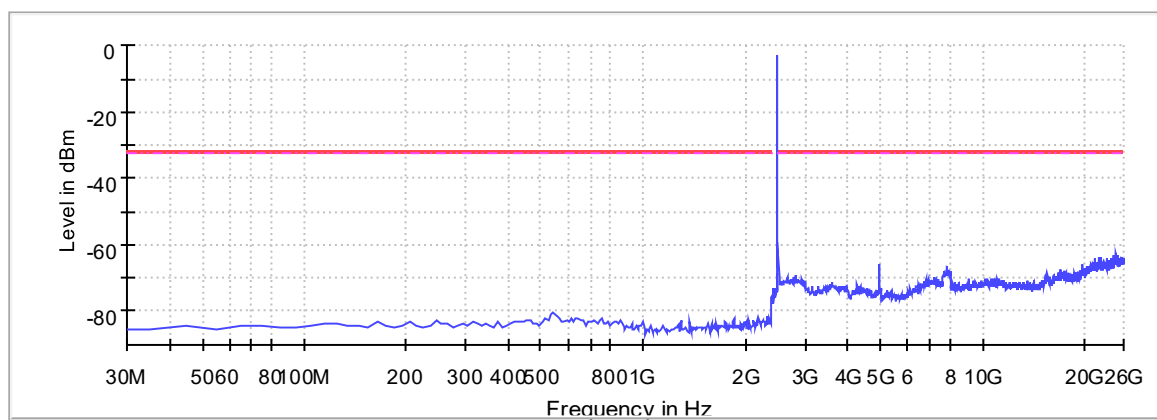

— Limit — Sum Level - - - Threshold × Critical × Final Critical

#### 5.4.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.5 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 6.4, 6.5, 6.6.5

### 5.5.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapters of ANSI C63.10:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

#### **Below 1 GHz:**

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

#### **1. Measurement up to 30 MHz**

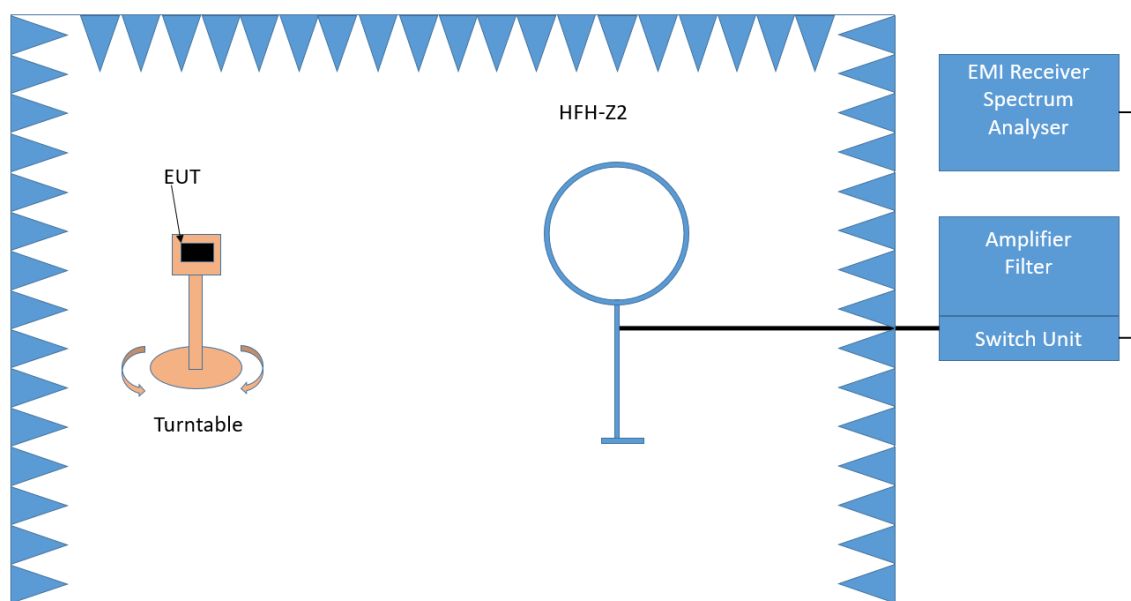

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

### Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Antenna height: 1 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Detector: Quasi-Peak (9 kHz - 150 kHz, Peak / Average 150 kHz- 30 MHz)
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

## 2. Measurement above 30 MHz and up to 1 GHz

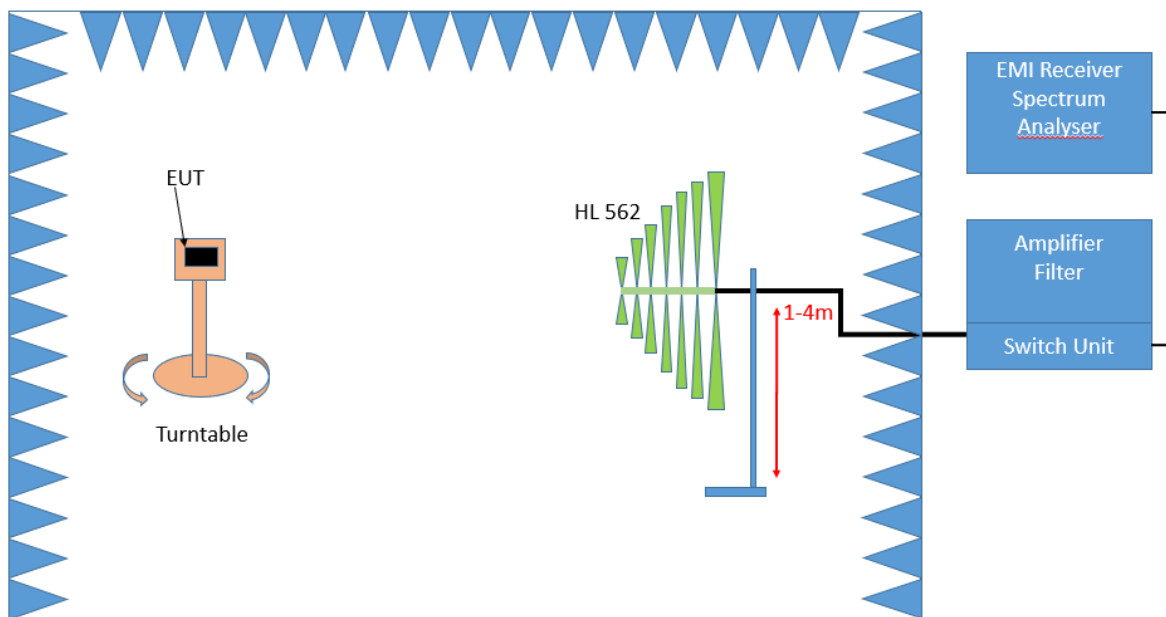

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

**Step 1: Preliminary scan**

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range:  $-180^{\circ}$  to  $90^{\circ}$
- Turntable step size:  $90^{\circ}$
- Height variation range: 1 – 4 m
- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

**Step 2: Adjustment measurement**

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $360^{\circ}$ . During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary between 1 – 4 meter. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $360^{\circ}$
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

**Step 3: Final measurement with QP detector**

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.




### Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

### 3. Measurement above 1 GHz

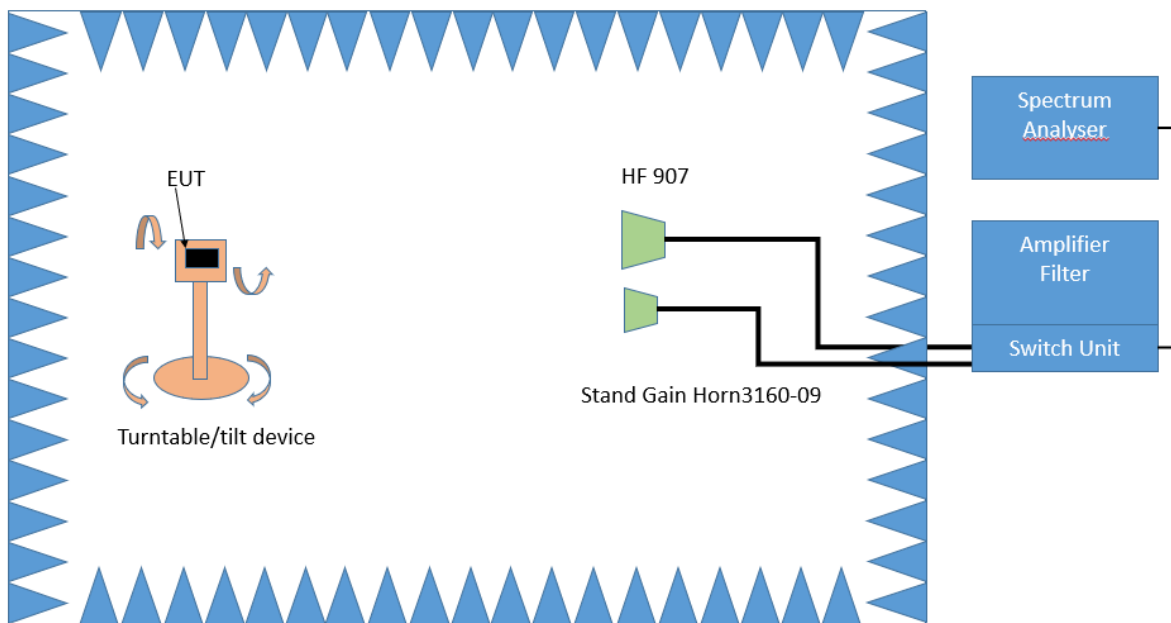

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

#### Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

#### Step 2:

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

#### Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

## 5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

## 5.5.3 TEST PROTOCOL

Ambient temperature: 21 °C  
 Air Pressure: 1003 hPa  
 Humidity: 39 %  
 BT GFSK (1-DH1)  
 Applied duty cycle correction (AV): 0 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]	Limit Type
external	0	2402	2719.0	38.8	AV	1000	54.0	15.2	RB
external	0	2402	2719.0	51.6	PEAK	1000	74.0	22.4	RB
external	0	2402	15607.0	43.1	AV	1000	54.0	10.9	RB
external	0	2402	15607.0	56.7	PEAK	1000	74.0	17.3	RB
external	39	2441	2718.6	38.7	AV	1000	54.0	15.3	RB
external	39	2441	2718.6	51.1	PEAK	1000	74.0	22.9	RB
external	39	2441	15606.1	43.1	AV	1000	54.0	10.9	RB
external	39	2441	15606.1	56.1	PEAK	1000	74.0	17.9	RB
external	78	2480	- - -	- - -	- - -	- - -	- - -	- - -	RB
internal	0	2402	- - -	- - -	- - -	- - -	- - -	- - -	RB

BT  $\pi/4$  DQPSK (2-DH1)

Applied duty cycle correction (AV): 0 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB $\mu$ V/m]	Detector	RBW [kHz]	Limit [dB $\mu$ V/m]	Margin to Limit [dB]	Limit Type
external	0	2402	2481.2	38.9	AV	1000	54.0	15.1	RB
external	0	2402	2481.2	51.8	PEAK	1000	74.0	22.2	RB
external	39	2441	- - -	- - -	- - -	- - -	- - -	- - -	RB
external	78	2480	- - -	- - -	- - -	- - -	- - -	- - -	RB

Remark: Please see next sub-clause for the measurement plot.

#### Comment:


- These measurements were Performed with external Antenna because the external Antenna has higher Antenna Gain and represent the worst-case scenario. Only spot check was performed on the internal Antenna.

#### 5.5.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Modulation= Bluetooth BDR, Operating Channel = 39

Measurements range = 9 kHz – 30 MHz


(S02\_AD03, external Antenna)

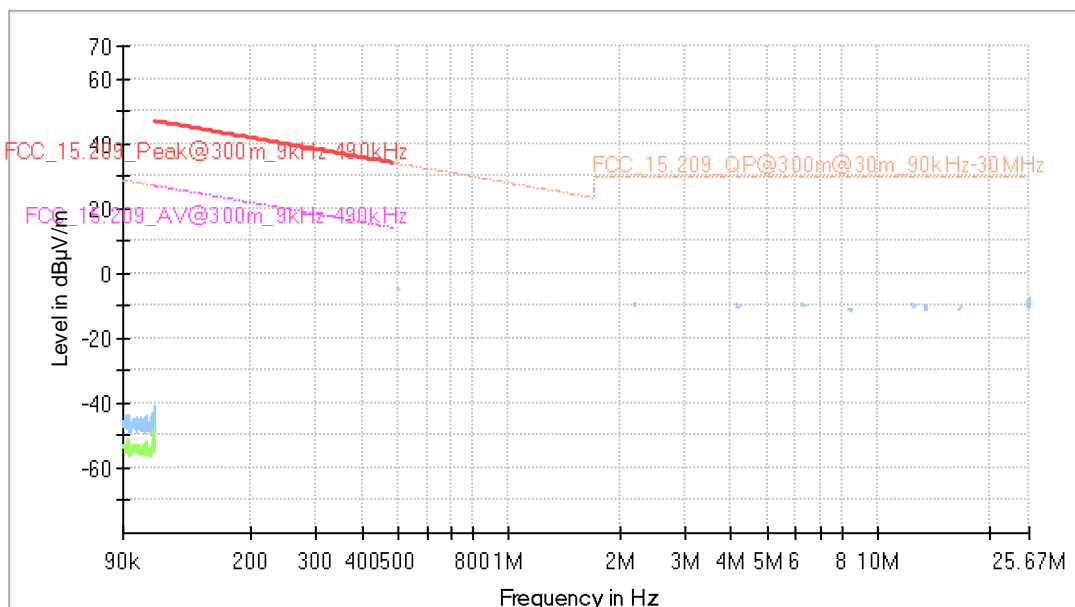

#### Final Result

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Modulation= Bluetooth BDR, Operating Channel = 78  
Measurements range = 30 MHz – 1 GHz  
(S02\_AC02, external Antenna)

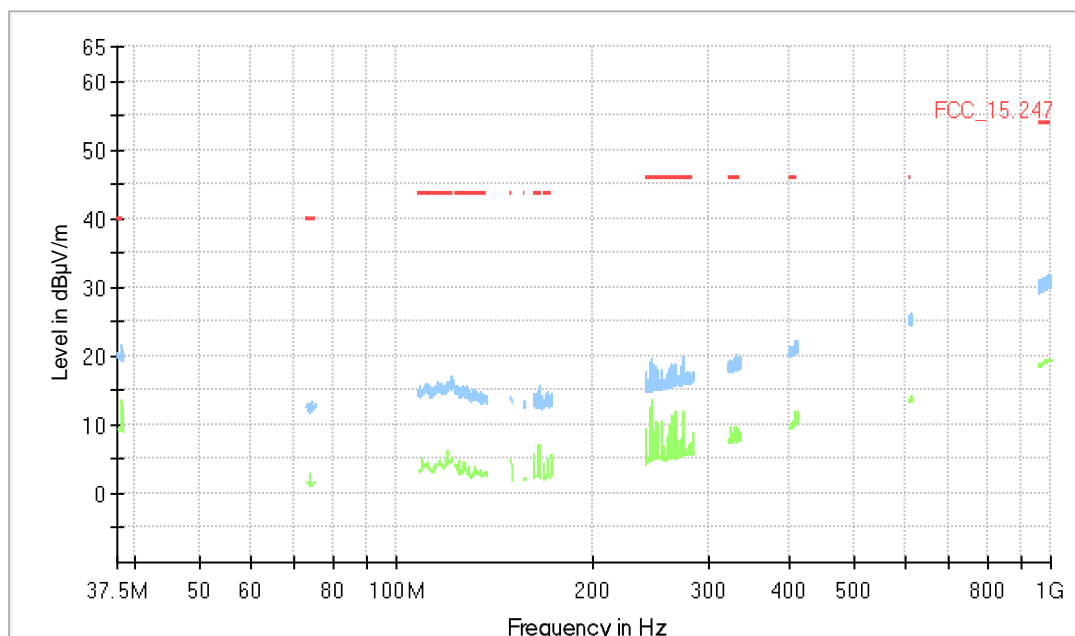

## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Modulation= Bluetooth BDR, Operating Channel = 0  
Measurements range = 1 GHz – 26 GHz  
(S02\_AC02, external Antenna)

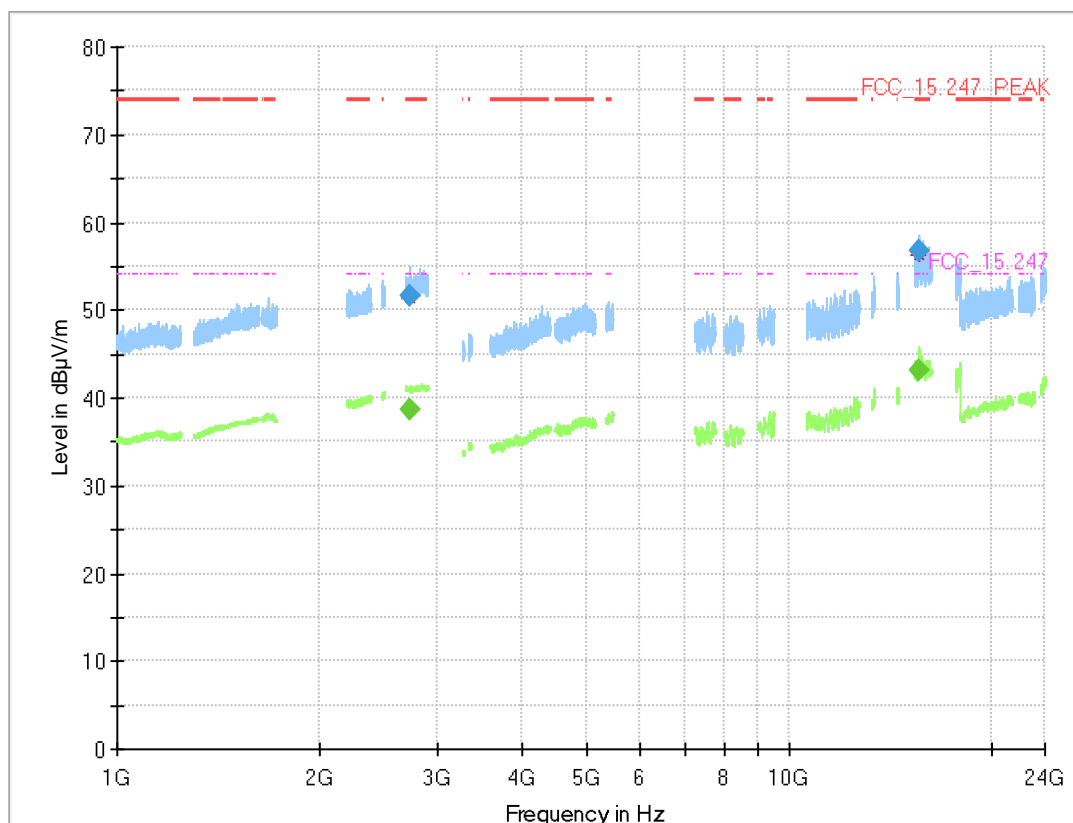

## Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2718.980	---	38.8	54.00	15.25	1000.0	1000.000	150.0	H	-52.0	78.0	9.0
2718.980	51.6	---	74.00	22.38	1000.0	1000.000	150.0	H	-52.0	78.0	9.0
15606.983	---	43.1	54.00	10.88	1000.0	1000.000	150.0	H	-148.0	15.0	0.4
15606.983	56.7	---	74.00	17.27	1000.0	1000.000	150.0	H	-148.0	15.0	0.4


Modulation= Bluetooth EDR 2, Operating Channel = 78  
Measurements range = 1 GHz – 8 GHz  
(S02\_AC02, external Antenna)

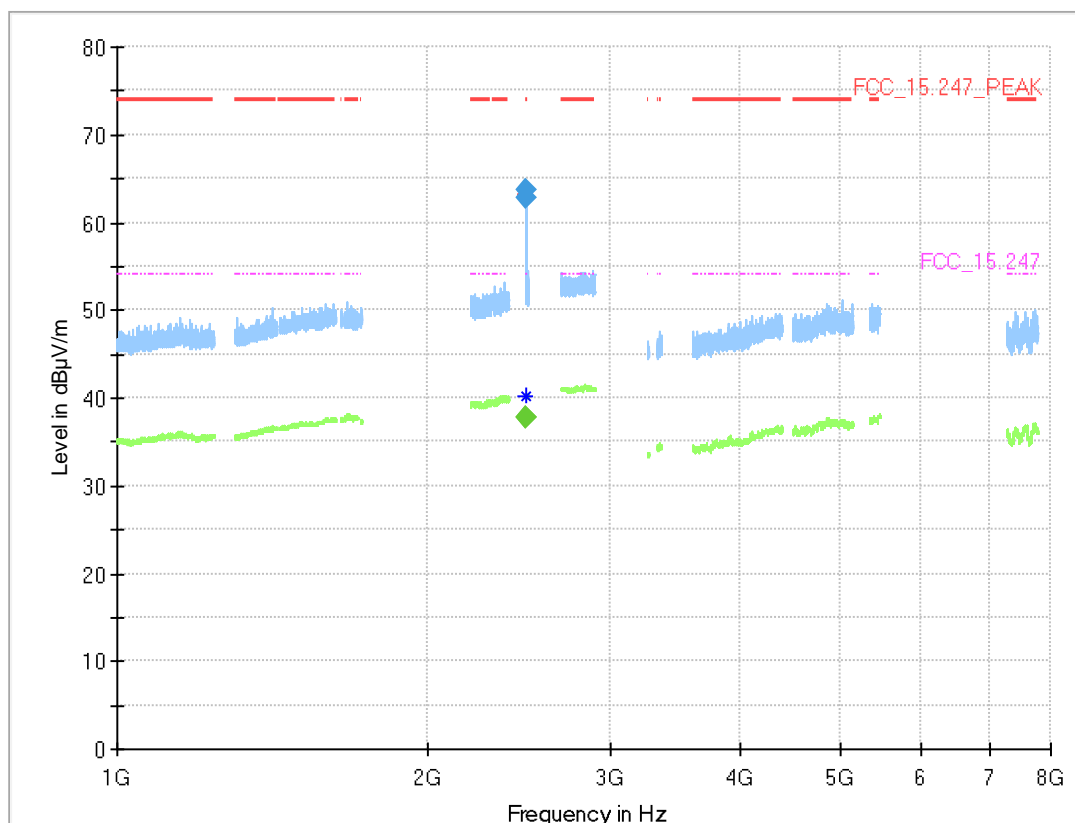

## Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.583	---	37.7	54.00	16.29	1000.0	1000.000	150.0	H	-62.0	80.0	7.8
2483.583	63.7	---	74.00	10.26	1000.0	1000.000	150.0	H	-62.0	80.0	7.8
2483.995	---	37.7	54.00	16.29	1000.0	1000.000	150.0	H	-65.0	87.0	7.8
2483.995	62.7	---	74.00	11.32	1000.0	1000.000	150.0	H	-65.0	87.0	7.8

Modulation= Bluetooth BDR, Operating Channel = 0  
 Measurements range = 1 GHz – 26 GHz  
 (S02\_AD03, internal Antenna)

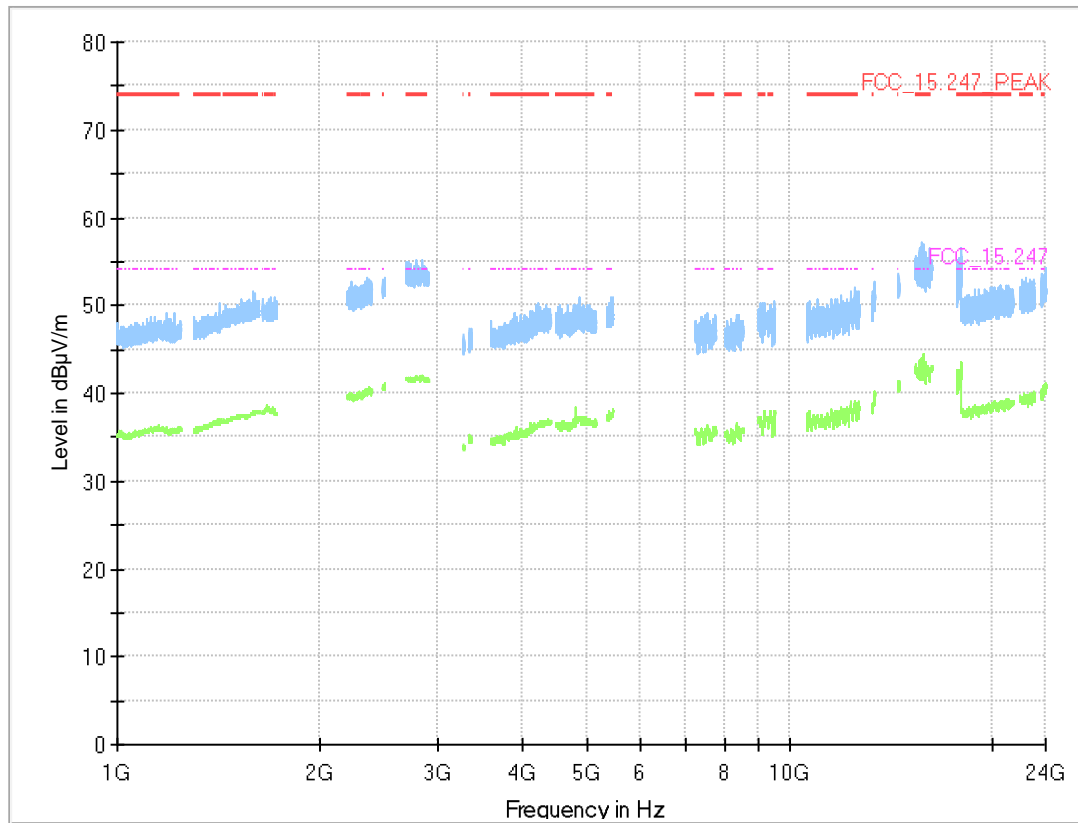

#### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---	---	---

#### 5.5.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 2.4 GHz FCC
- Radiated Emissions SAC H-Field
- Radiated Emissions SAC up to 1 GHz

## 5.6 BAND EDGE COMPLIANCE CONDUCTED

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 11.11


### 5.6.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions".

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Analyser settings:

- Lower Band Edge:  
Measured range: 2310.0 MHz to 2483.5 MHz
- Upper Band Edge  
Measured range: 2400.0 MHz to 2500 MHz
- Detector: Peak
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweptime: Auto
- Sweeps: Till stable (min. 300, max. 15000)
- Trace: Maxhold

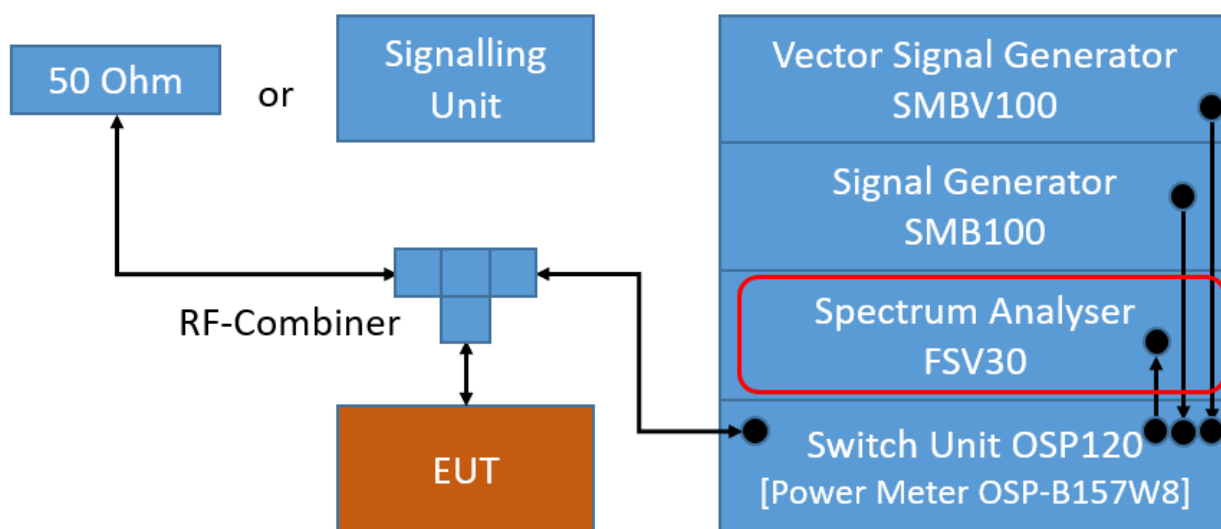

TS8997; Band Edge Conducted



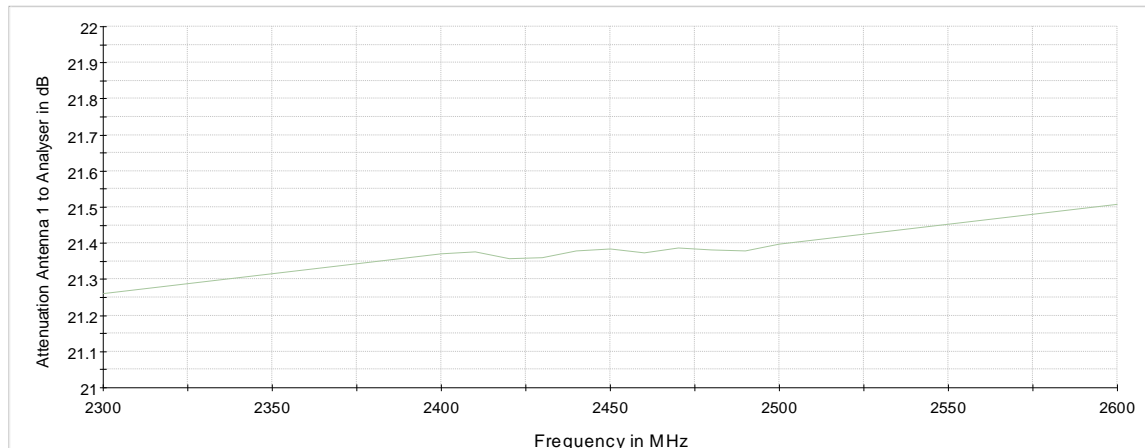

Attenuation of the measurement path

## 5.6.2 TEST REQUIREMENTS / LIMITS

### FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

### 5.6.3 TEST PROTOCOL

Ambient temperature: 22 °C  
 Air Pressure: 998 hPa  
 Humidity: 39 %  
 BT GFSK (1-DH1)

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2400.0	-52.3	PEAK	100	-0.3	-20.3	32.0
78	2480	2483.5	-53.7	PEAK	100	2.9	-17.1	36.6
hopping	hopping	2400.0	-54.7	PEAK	100	3.1	-16.9	37.8
hopping	hopping	2483.5	-55.3	PEAK	100	3.1	-16.9	38.4

BT n/4 DQPSK (2-DH1)

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2400.0	-54.1	PEAK	100	-2.9	-22.9	31.2
78	2480	2483.5	-53.6	PEAK	100	0.5	-19.5	34.1
hopping	hopping	2400.0	-54.8	PEAK	100	0.6	-19.4	35.4
hopping	hopping	2483.5	-53.2	PEAK	100	0.6	-19.4	33.8


BT 8-DPSK (3-DH1)

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2400.0	-54.7	PEAK	100	-2.9	-22.9	31.8
78	2480	2483.5	-54.6	PEAK	100	0.5	-19.5	35.1
hopping	hopping	2400.0	-53.9	PEAK	100	0.5	-19.5	34.4
hopping	hopping	2483.5	-54.7	PEAK	100	0.5	-19.5	35.2


Remark: Please see next sub-clause for the measurement plot.

### 5.6.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth BDR, Operating Channel = 0, Band Edge = low  
 (S01\_AD03)  
 Band Edge

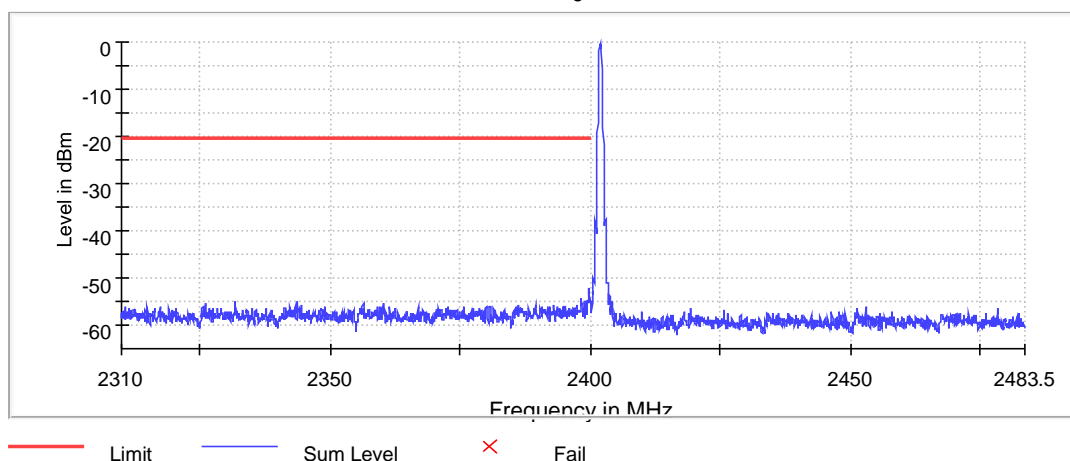


Modulation= Bluetooth BDR, Operating Channel = 78, Band Edge = high  
(S01\_AD03)  
Band Edge

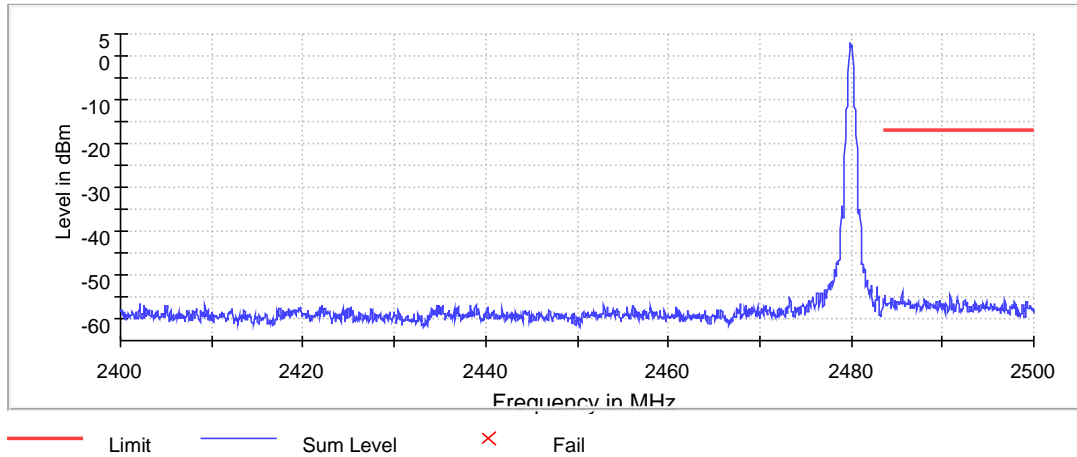


Modulation= Bluetooth BDR, Operating Channel = hopping, Band Edge = low  
(S01\_AD03)  
Band Edge

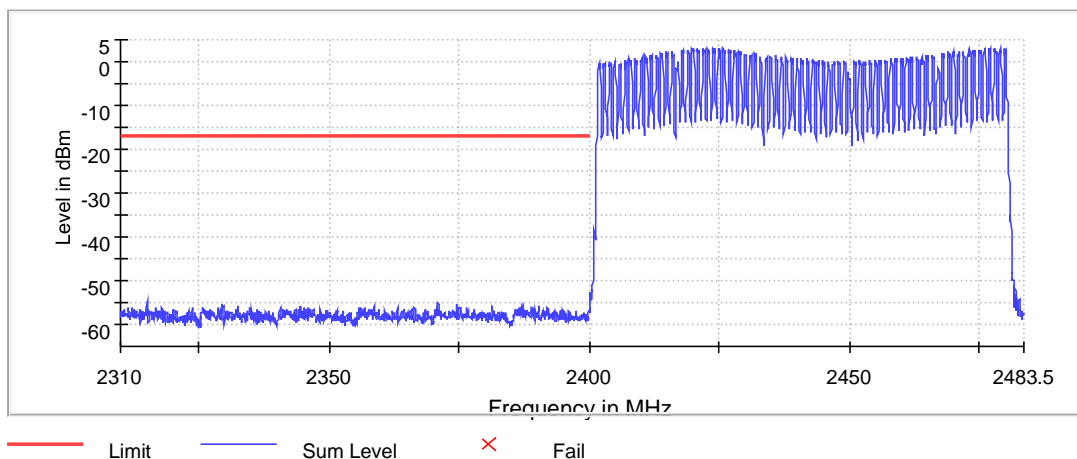


Modulation= Bluetooth BDR, Operating Channel = hopping, Band Edge = high  
(S01\_AD03)  
Band Edge

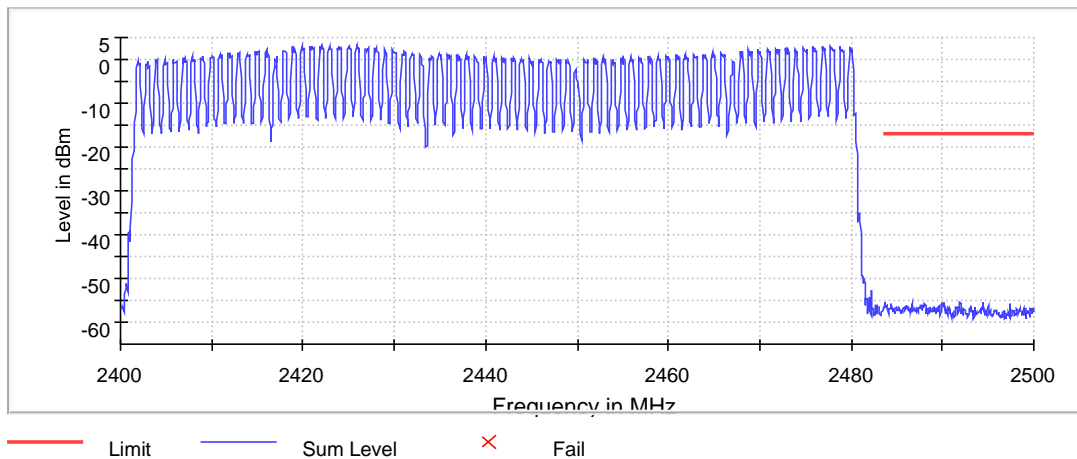


Modulation= Bluetooth EDR 2, Operating Channel = 0, Band Edge = low  
(S01\_AD03)  
Band Edge

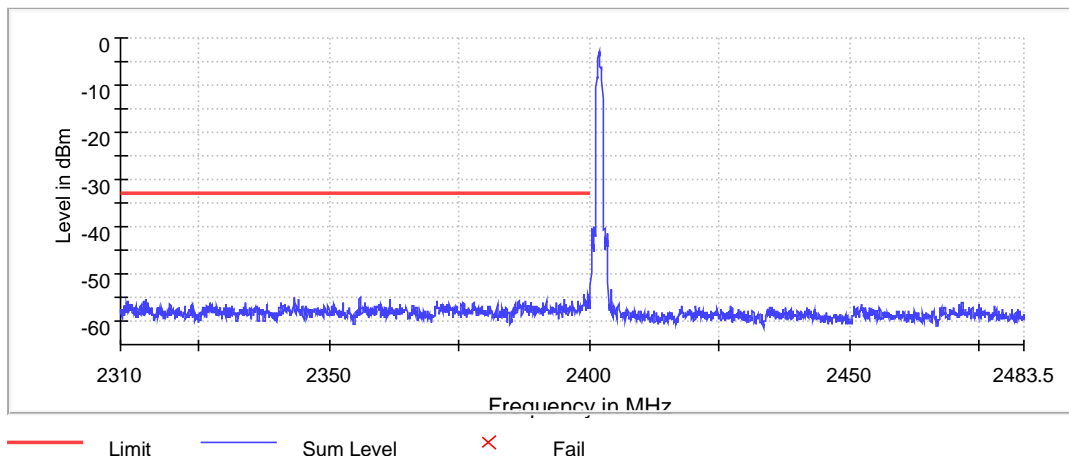


Modulation= Bluetooth EDR 2, Operating Channel = 78, Band Edge = high  
(S01\_AD03)  
Band Edge

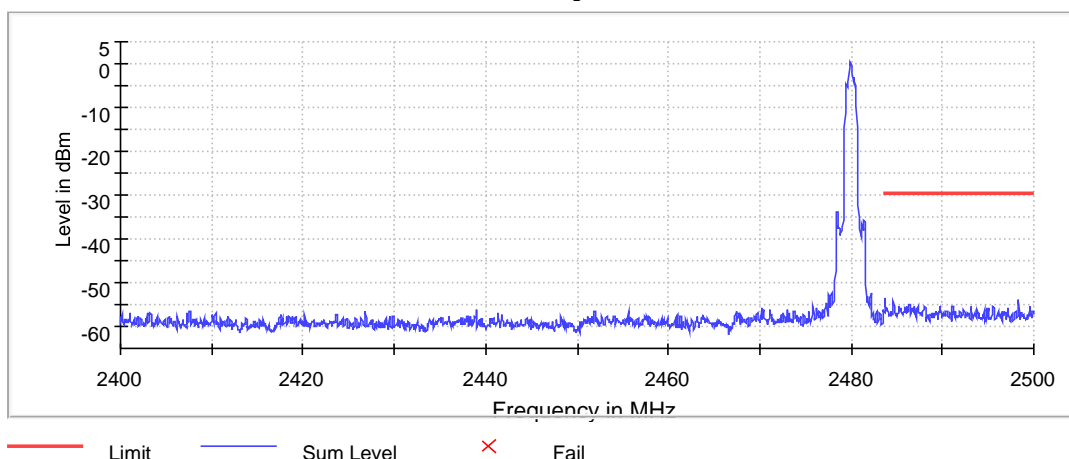


Modulation= Bluetooth EDR 2, Operating Channel = hopping, Band Edge = low  
(S01\_AD03)  
Band Edge

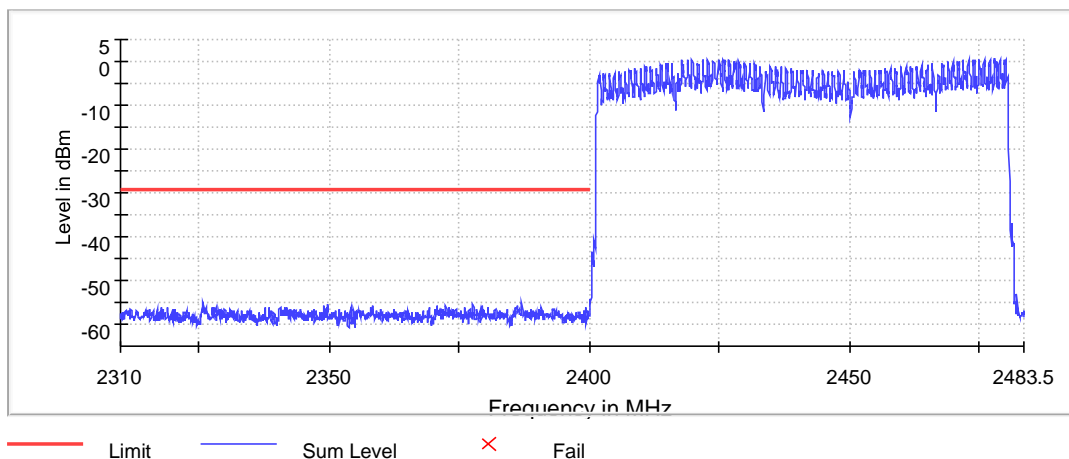


Modulation= Bluetooth EDR 2, Operating Channel = hopping, Band Edge = high  
(S01\_AD03)  
Band Edge

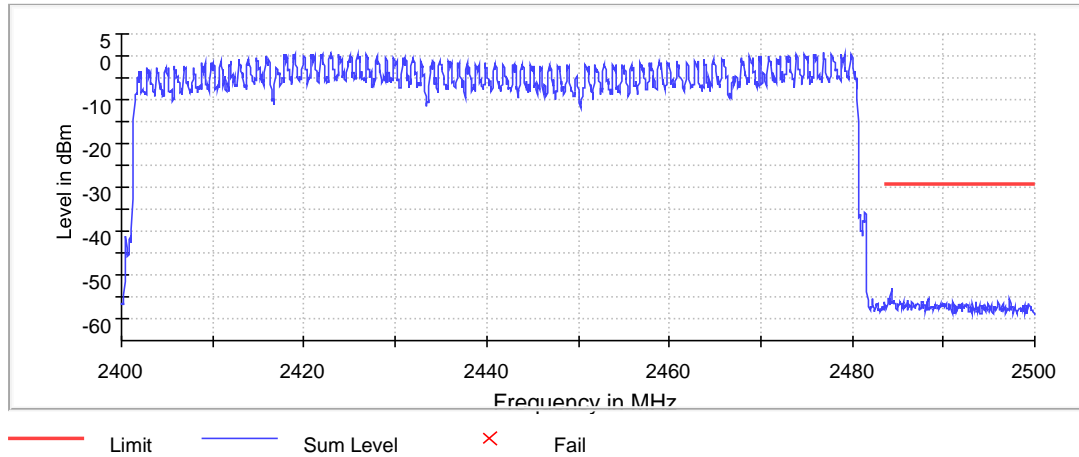


Modulation= Bluetooth EDR 3, Operating Channel = 0, Band Edge = low  
(S01\_AD03)  
Band Edge

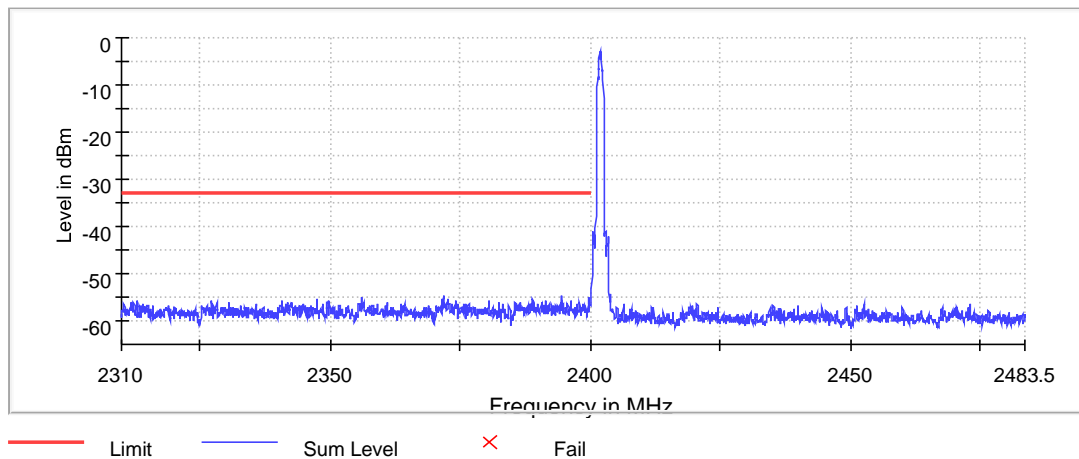


Modulation= Bluetooth EDR 3, Operating Channel = 78, Band Edge = high  
(S01\_AD03)  
Band Edge

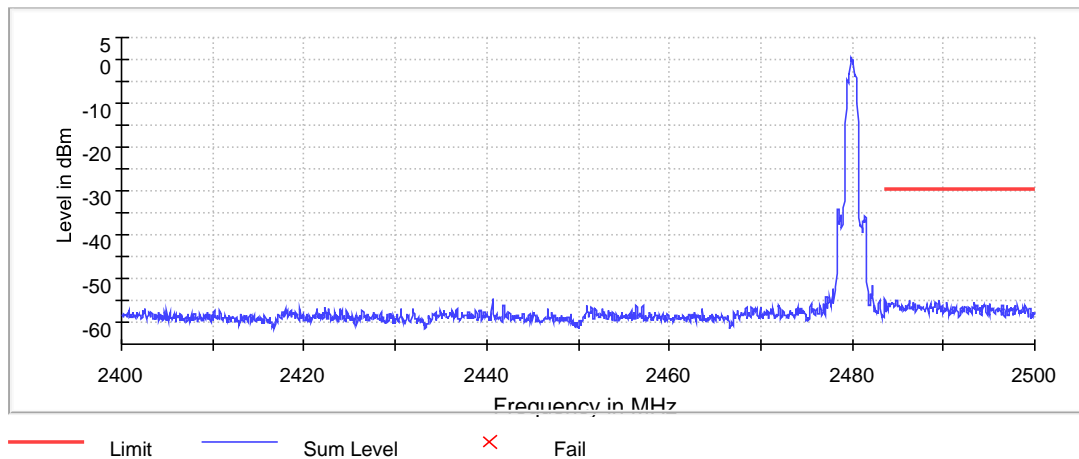

Modulation= Bluetooth EDR 3, Operating Channel = hopping, Band Edge = low  
(S01\_AD03)  
Band Edge

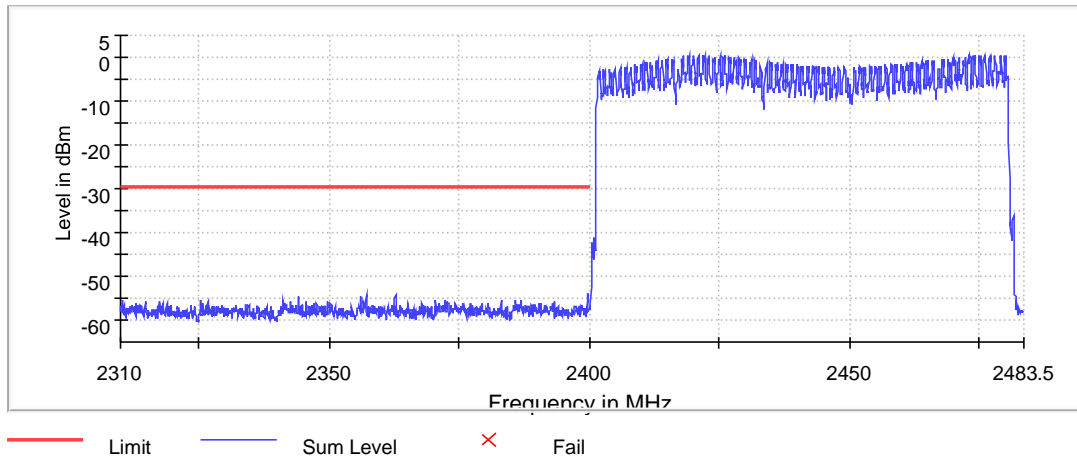

Modulation= Bluetooth EDR 3, Operating Channel = hopping, Band Edge = high  
(S01\_AD03)  
Band Edge

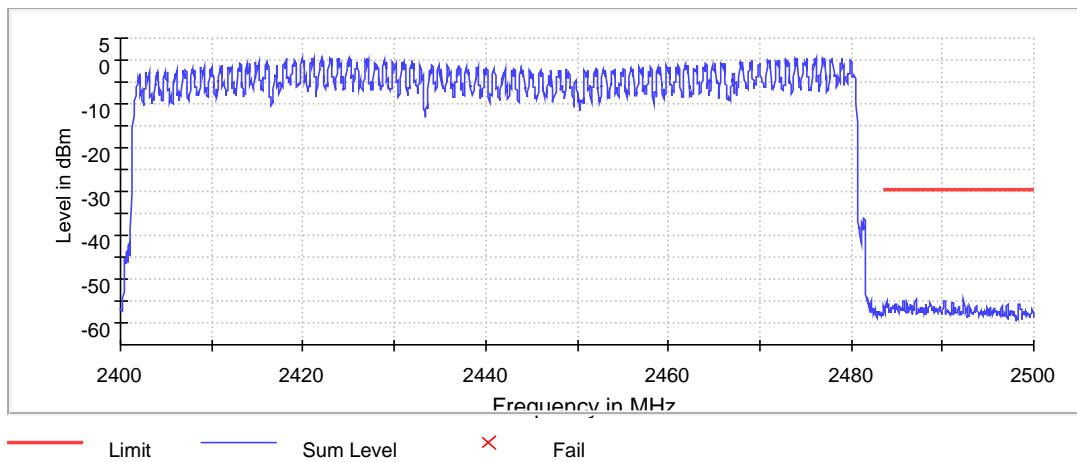

### 5.6.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.7 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 6.6.5

### 5.7.1 TEST DESCRIPTION


The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapter of ANSI C63.10:

- Chapter 6.10.5

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only (procedure according ANSI C63.10, chapter 6.6.5).

### 3. Measurement above 1 GHz

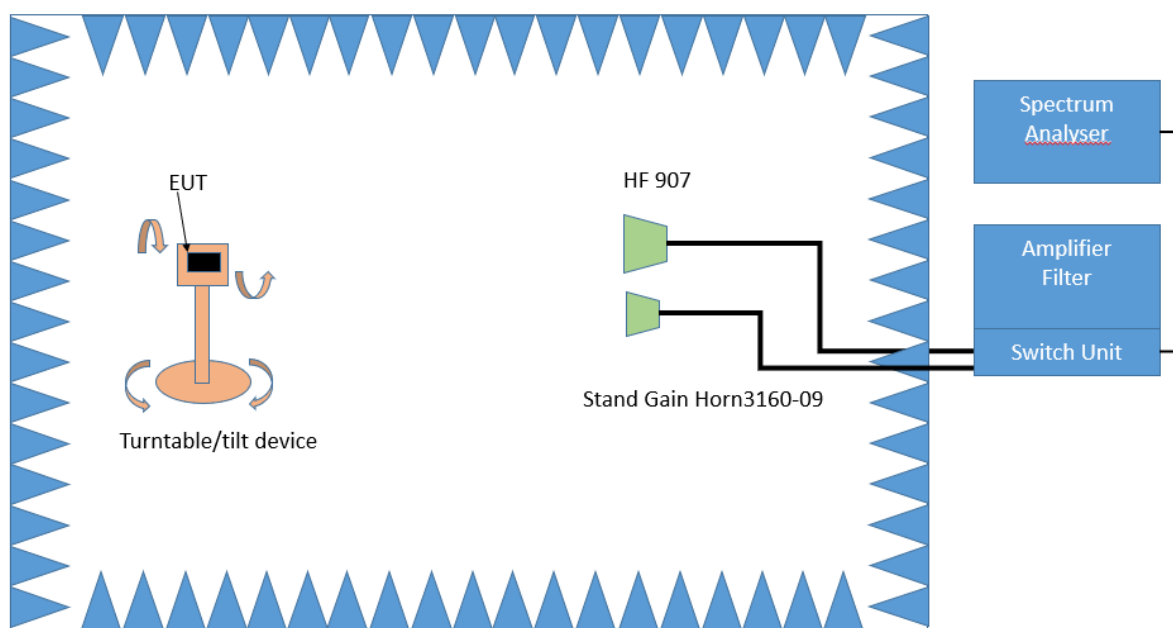

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

#### Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

### Step 2:

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

### Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

## 5.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ( $\mu\text{V/m}$ )	Measurement distance (m)	Limits ( $\text{dB}\mu\text{V/m}$ )
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit ( $\mu\text{V/m}$ )	Measurement distance (m)	Limits ( $\text{dB}\mu\text{V/m}$ )
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit (}\mu\text{V/m)}/1\mu\text{V/m})$



### 5.7.3 TEST PROTOCOL

Ambient temperature: 21 °C  
 Air Pressure: 1003 hPa  
 Humidity: 39 %  
 BT GFSK (1-DH1)  
 Applied duty cycle correction (AV): 0 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
external	78	2480	2483.5	63.8	PEAK	1000	74.0	10.2
external	78	2480	2483.5	37.8	AV	1000	54.0	16.2
internal	78	2480	2483.5	55.3	PEAK	1000	74.0	18.7
internal	78	2480	2483.5	36.2	AV	1000	54.0	17.8

BT π/4 DQPSK (2-DH1)  
 Applied duty cycle correction (AV): 0 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
external	78	2480	2483.5	63.7	PEAK	1000	74.0	10.3
external	78	2480	2483.5	37.7	AV	1000	54.0	16.3
internal	78	2480	2483.5	55.0	PEAK	1000	74.0	19.0
internal	78	2480	2483.5	38.0	AV	1000	54.0	16.0


BT 8-DPSK (3-DH1)  
 Applied duty cycle correction (AV): 0 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
external	78	2480	2483.5	52.0	PEAK	1000	74.0	22.0
external	78	2480	2483.5	37.1	AV	1000	54.0	16.9
internal	78	2480	2483.5	56.3	PEAK	1000	74.0	17.7
internal	78	2480	2483.5	38.0	AV	1000	54.0	16.0

Remark: Please see next sub-clause for the measurement plot.

#### 5.7.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth BDR, Operating Channel = 78, Band Edge = high  
(S02\_AC02, external Antenna)

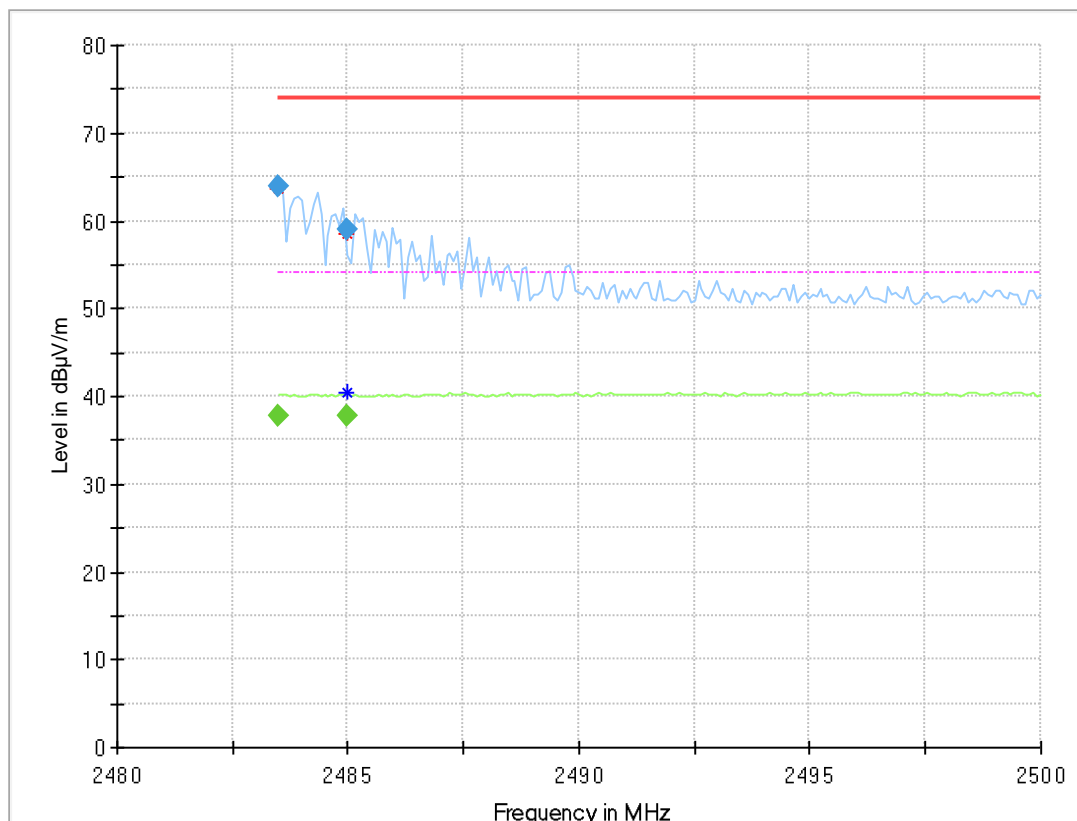

#### Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	63.8	---	74.00	10.18	1000.0	1000.000	150.0	H	-62.0	84.0	7.8
2483.500	---	37.8	54.00	16.15	1000.0	1000.000	150.0	H	-62.0	84.0	7.8
2484.985	59.0	---	74.00	15.04	1000.0	1000.000	150.0	H	-79.0	15.0	7.9
2484.985	---	37.7	54.00	16.26	1000.0	1000.000	150.0	H	-79.0	15.0	7.9


Modulation= Bluetooth BDR, Operating Channel = 78, Band Edge = high  
(S02\_AC02, internal Antenna)

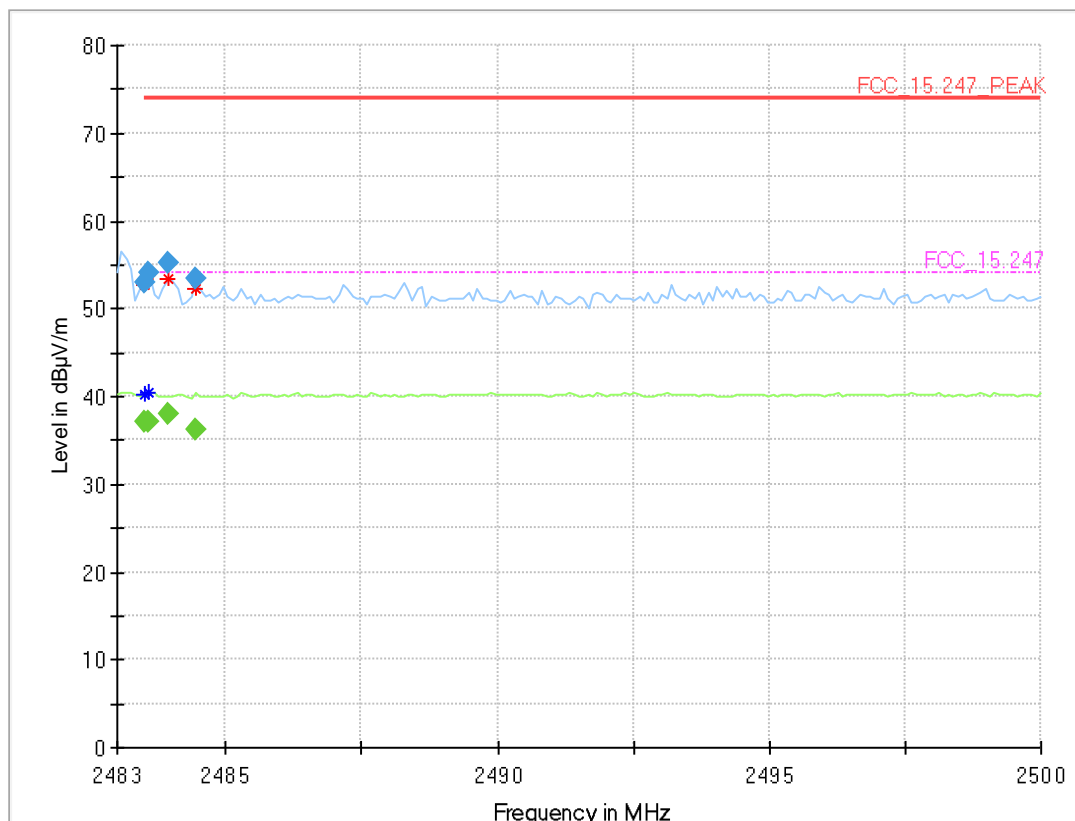

## Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	37.0	54.00	16.96	1000.0	1000.000	150.0	V	35.0	79.0	7.8
2483.510	53.0	---	74.00	20.99	1000.0	1000.000	150.0	V	35.0	79.0	7.8
2483.595	---	37.2	54.00	16.82	1000.0	1000.000	150.0	H	-22.0	80.0	7.8
2483.595	54.1	---	74.00	19.93	1000.0	1000.000	150.0	H	-22.0	80.0	7.8
2483.935	---	38.0	54.00	16.00	1000.0	1000.000	150.0	H	-29.0	75.0	7.8
2483.935	55.3	---	74.00	18.73	1000.0	1000.000	150.0	H	-29.0	75.0	7.8
2484.445	---	36.2	54.00	17.76	1000.0	1000.000	150.0	H	-56.0	84.0	7.8
2484.445	53.4	---	74.00	20.64	1000.0	1000.000	150.0	H	-56.0	84.0	7.8


Modulation= Bluetooth EDR 2, Operating Channel = 78, Band Edge = high  
(S02\_AC02, external Antenna)

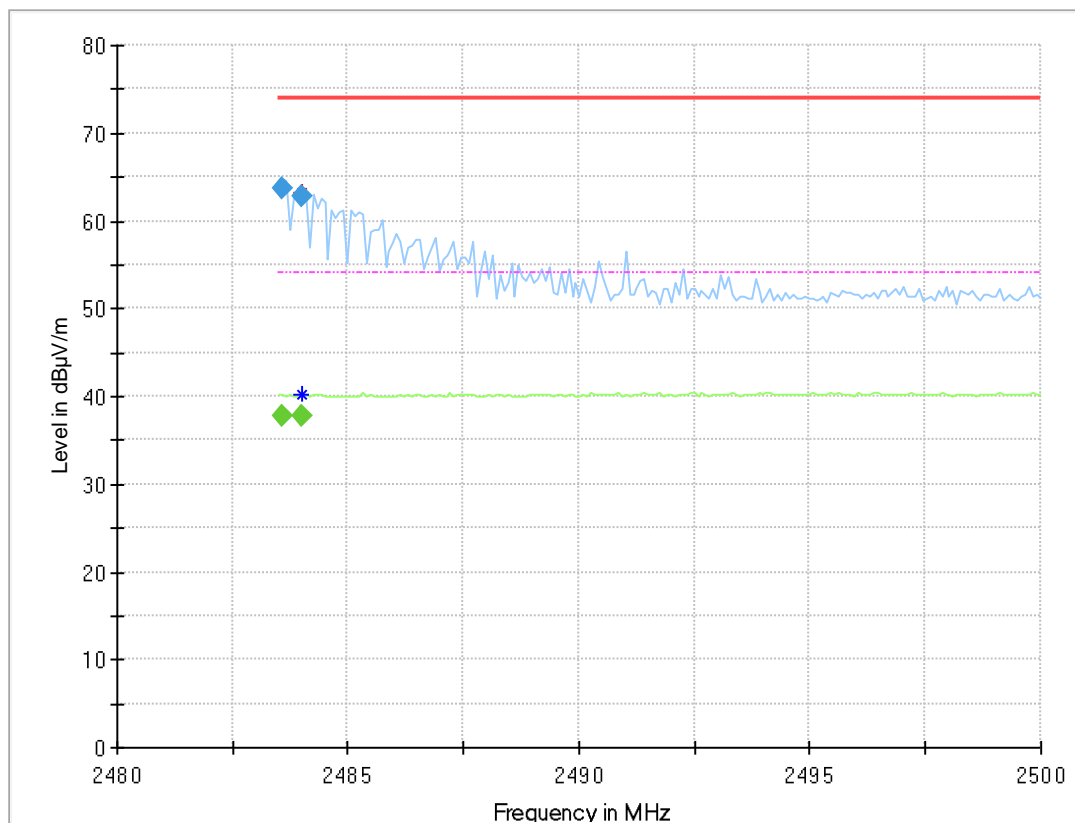

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.583	63.7	---	74.00	10.26	1000.0	1000.000	150.0	H	-62.0	80.0	7.8
2483.583	---	37.7	54.00	16.29	1000.0	1000.000	150.0	H	-62.0	80.0	7.8
2483.995	62.7	---	74.00	11.32	1000.0	1000.000	150.0	H	-65.0	87.0	7.8
2483.995	---	37.7	54.00	16.29	1000.0	1000.000	150.0	H	-65.0	87.0	7.8


Modulation= Bluetooth EDR 2, Operating Channel = 78, Band Edge = high  
(S02\_AC02, internal Antenna)

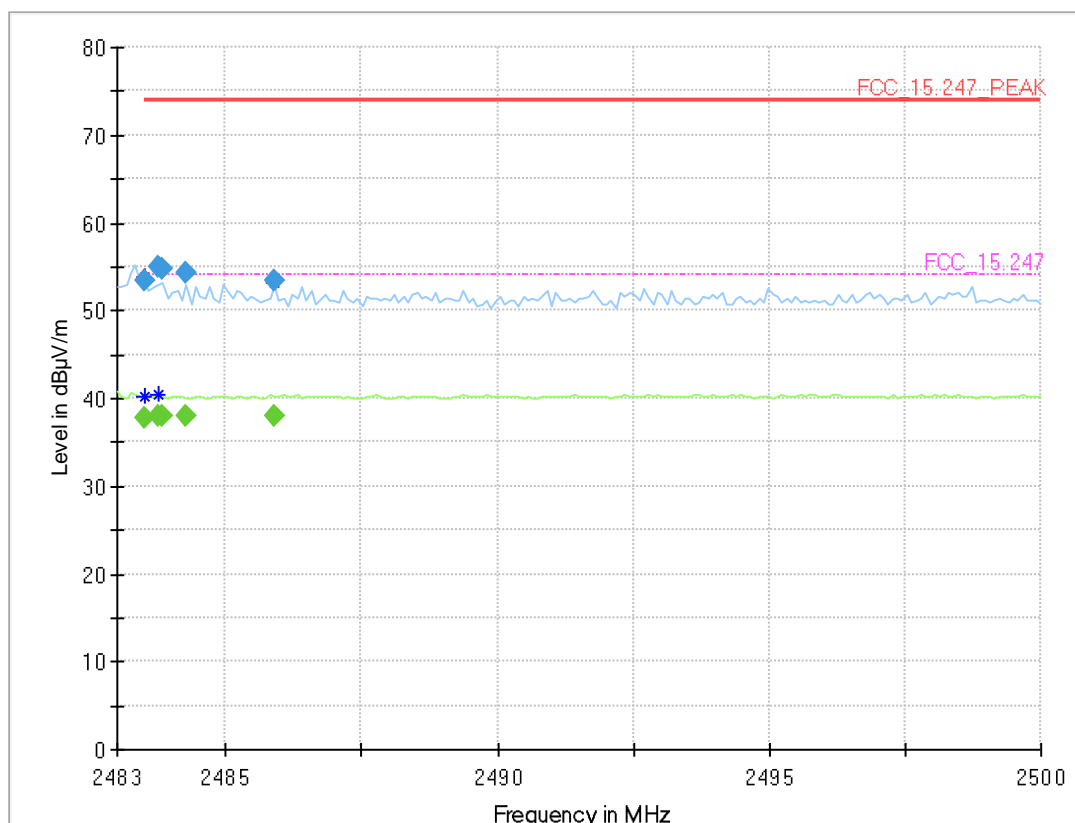

## Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	37.8	54.00	16.18	1000.0	1000.000	150.0	H	-94.0	-1.0	7.8
2483.510	53.4	---	74.00	20.63	1000.0	1000.000	150.0	H	-94.0	-1.0	7.8
2483.765	---	38.0	54.00	15.97	1000.0	1000.000	150.0	H	-23.0	91.0	7.8
2483.765	55.0	---	74.00	18.99	1000.0	1000.000	150.0	H	-23.0	91.0	7.8
2483.850	---	38.0	54.00	16.01	1000.0	1000.000	150.0	H	-19.0	75.0	7.8
2483.850	54.7	---	74.00	19.31	1000.0	1000.000	150.0	H	-19.0	75.0	7.8
2484.275	---	38.0	54.00	16.01	1000.0	1000.000	150.0	H	-23.0	91.0	7.8
2484.275	54.3	---	74.00	19.72	1000.0	1000.000	150.0	H	-23.0	91.0	7.8
2485.890	---	37.9	54.00	16.10	1000.0	1000.000	150.0	H	-19.0	90.0	7.9
2485.890	53.3	---	74.00	20.70	1000.0	1000.000	150.0	H	-19.0	90.0	7.9


Modulation= Bluetooth EDR 3, Operating Channel = 78, Band Edge = high  
(S02\_AC02, external Antenna)

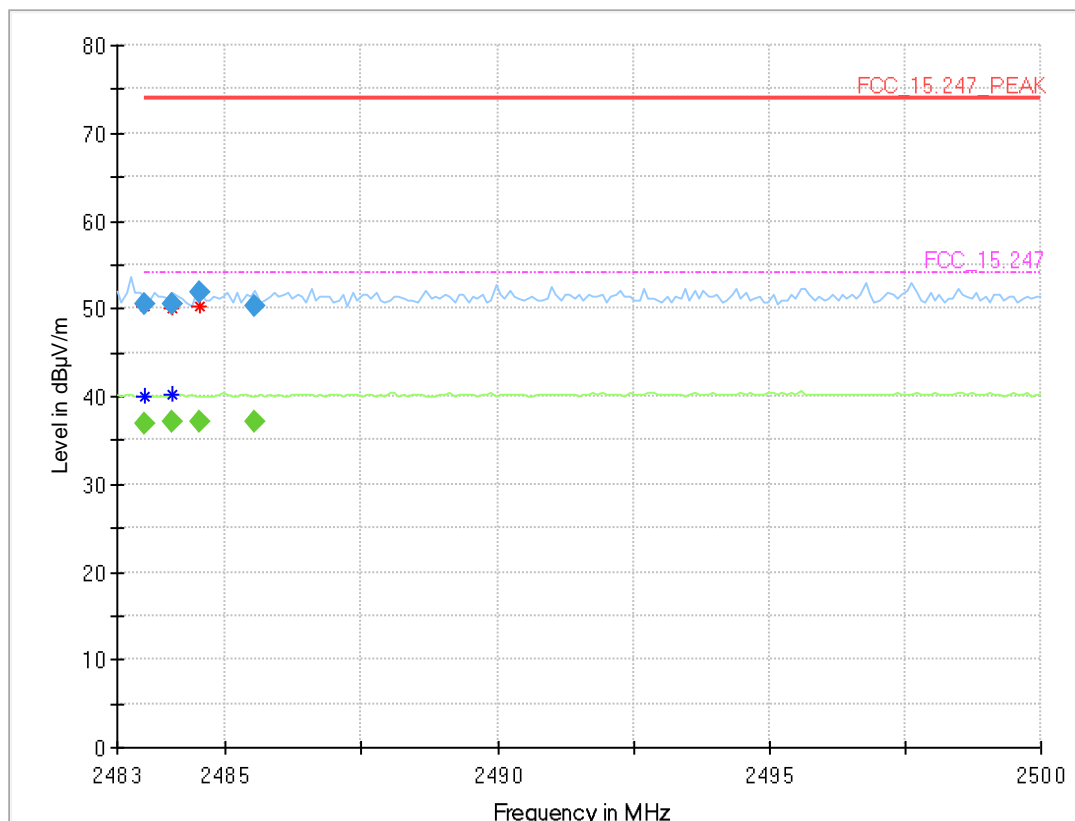

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	36.9	54.00	17.06	1000.0	1000.000	150.0	V	-176.0	15.0	7.8
2483.510	50.6	---	74.00	23.43	1000.0	1000.000	150.0	V	-176.0	15.0	7.8
2484.020	---	37.0	54.00	16.98	1000.0	1000.000	150.0	V	-3.0	84.0	7.8
2484.020	50.5	---	74.00	23.52	1000.0	1000.000	150.0	V	-3.0	84.0	7.8
2484.530	---	37.1	54.00	16.87	1000.0	1000.000	150.0	V	2.0	-4.0	7.8
2484.530	52.0	---	74.00	22.05	1000.0	1000.000	150.0	V	2.0	-4.0	7.8
2485.550	---	37.1	54.00	16.89	1000.0	1000.000	150.0	V	-19.0	15.0	7.9
2485.550	50.3	---	74.00	23.68	1000.0	1000.000	150.0	V	-19.0	15.0	7.9

Modulation= Bluetooth EDR 3, Operating Channel = 78, Band Edge = high  
 (S02\_AC02, internal Antenna)

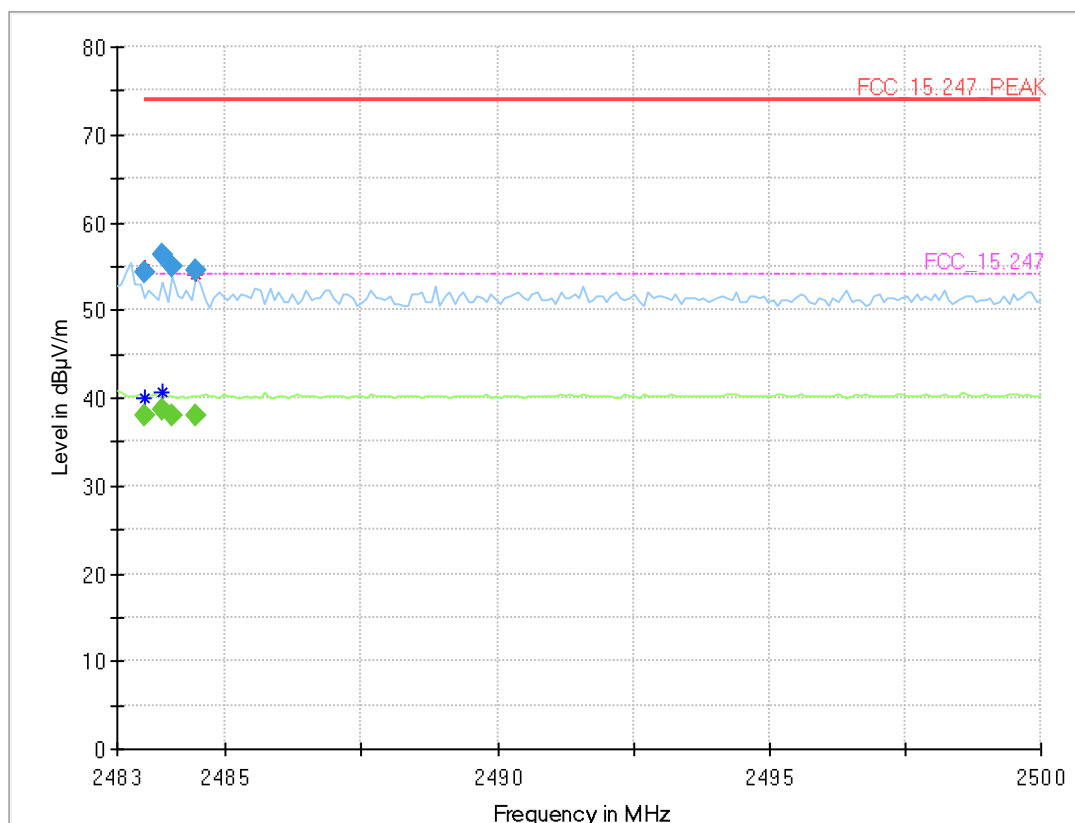

## Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	37.9	54.00	16.08	1000.0	1000.000	150.0	H	-82.0	105.0	7.8
2483.510	54.3	---	74.00	19.70	1000.0	1000.000	150.0	H	-82.0	105.0	7.8
2483.850	---	38.6	54.00	15.42	1000.0	1000.000	150.0	H	-35.0	75.0	7.8
2483.850	56.3	---	74.00	17.73	1000.0	1000.000	150.0	H	-35.0	75.0	7.8
2484.020	---	38.0	54.00	16.01	1000.0	1000.000	150.0	H	-49.0	80.0	7.8
2484.020	55.1	---	74.00	18.95	1000.0	1000.000	150.0	H	-49.0	80.0	7.8
2484.445	---	38.0	54.00	16.04	1000.0	1000.000	150.0	H	-49.0	78.0	7.8
2484.445	54.5	---	74.00	19.53	1000.0	1000.000	150.0	H	-49.0	78.0	7.8

## 5.7.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 2.4 GHz FCC

## 5.8 CHANNEL SEPARATION

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 7.8.2

### 5.8.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the channel separation measurement. The channel separation is independent of the modulation pattern.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Detector: Peak
- Trace: Maxhold
- Span: appr. 3 x OBW
- Centre Frequency: approximate mid of two channels
- Resolution Bandwidth (RBW): appr. 30 % of channel spacing
- Video Bandwidth (VBW):  $\geq$  RBW
- Sweep Time: Auto
- Sweeps: Till stable (min. 2000, max. 30000)

The technology depending measurement parameters can be found in the measurement plot.

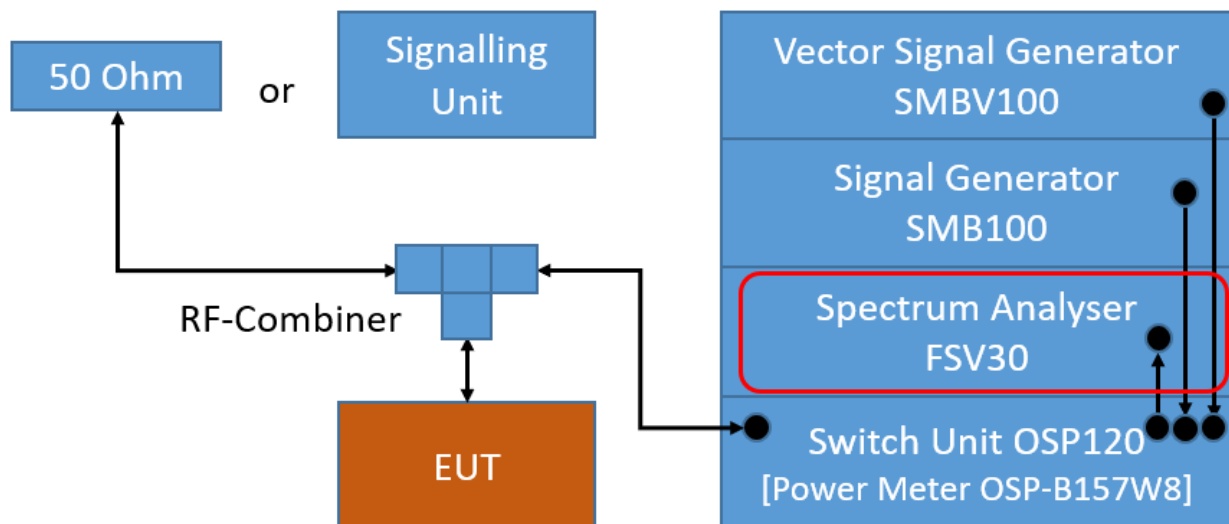

TS8997; Channel Separation



## 5.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

## 5.8.3 TEST PROTOCOL

Ambient temperature: 22 °C  
 Air Pressure: 998 hPa  
 Humidity: 39 %


Radio Technology	Channel Separation [MHz]	Limit [MHz]	Margin to Limit [MHz]
BT GFSK (1-DH1)	1.010	0.920	0.090

Remark: Please see next sub-clause for the measurement plot.

## 5.8.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Modulation= Bluetooth BDR  
 (S01\_AD03)

CFS

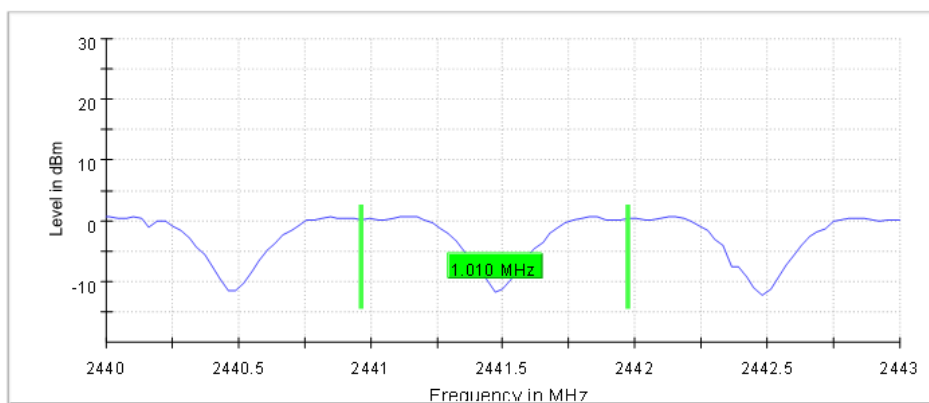

### Measurement

Setting	Instrument Value
Start Frequency	2.44000 GHz
Stop Frequency	2.44300 GHz
Span	3.000 MHz
RBW	300.000 kHz
VBW	300.000 kHz
SweepPoints	101
SweepTime	1.000 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	16 / max. 150
Stable	10 / 10
Max Stable Difference	0.00 dB

## 5.8.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.9 DWELL TIME

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 7.8.4

### 5.9.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the dwell time measurement. The dwell time is independent of the modulation pattern. The EUT is set to its maximum dwell time.

The dwell time is measured by spectrum analyser and power meter in parallel. The spectrum analyser video output is connected to the power meter allowing the power meter to measure transmission time only when the EUT is actively transmitting on the measured channel. The power meter is using a time resolution of 1  $\mu$ s resulting in a more accurate measurement than possible using the spectrum analyser. In addition, measurement of burst length on more than one transmission is performed this way.

In addition to the calculated dwell time from single burst length, measured dwell time summing up all measured bursts lengths as measured by the power meter is given in the result table.

Calculation for Bluetooth Classic:

Maximum Duty Cycle is given for DH5 packets, resulting in 5 time slots transmission, 1 time slots reception. Each time slot lasts 625  $\mu$ s.

Dwell time is calculated as: measured length of a single 5 time slot transmission multiplied by the number of bursts measured by the power meter.


Analyser Settings single 5 slot burst:

- Centre Frequency: mid channel frequency
- Span: Zero span
- Detector: Peak
- Resolution Bandwidth (RBW):  $\leq$  Channel separation
- Trigger: Video
- Sweep Time: 3 ms
- Sweep Points: 30001
- Single Sweep

Analyser setting full sweep:

- Centre Frequency: mid channel frequency
- Span: Zero span
- Detector: Peak
- Resolution Bandwidth (RBW):  $\leq$  Channel separation
- Trigger: External
- Sweep Time: 31.6 s
- Sweep Points: 30001
- Single Sweep

Time resolution of power meter: 1  $\mu$ s

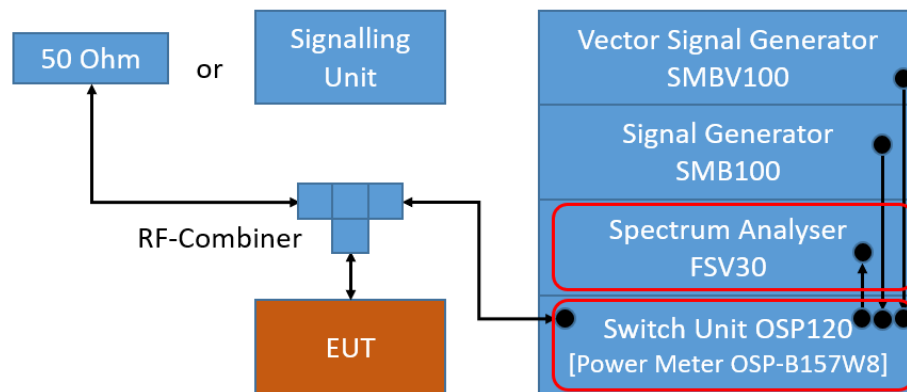

TS8997; Dwell Time

## 5.9.2 TEST REQUIREMENTS / LIMITS

For the band: 902 – 928 MHz

FCC Part 15, Subpart C, §15.247 (a) (1) (i)

If the 20 dB bandwidth of the hopping channel is less than 250 kHz the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.  
 If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

For the band: 5725 – 5850 MHz

FCC Part 15, Subpart C, §15.247 (a) (1) (ii)

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

For the frequency band 2400 – 2483.5 MHz:

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

...The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

FCC Part 15, Subpart C, §15.247 (f)

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

...

### 5.9.3 TEST PROTOCOL



Ambient temperature: 22 °C  
 Air Pressure: 998 hPa  
 Humidity: 39 %

Radio Technology	Measured Slot Length [ms]	Measured Number of Slots	Calculated Dwell Time [ms]	Limit [ms]	Margin to Limit [ms]
BT GFSK (1-DH5)	2.891	108	312.228	400.0	87.772

Remark: Please see next sub-clause for the measurement plot.

### 5.9.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Modulation= Bluetooth BDR  
 (S01\_AD03)

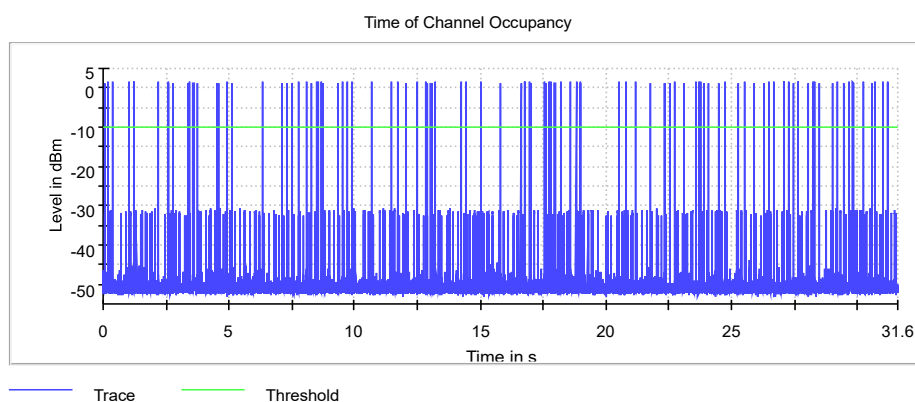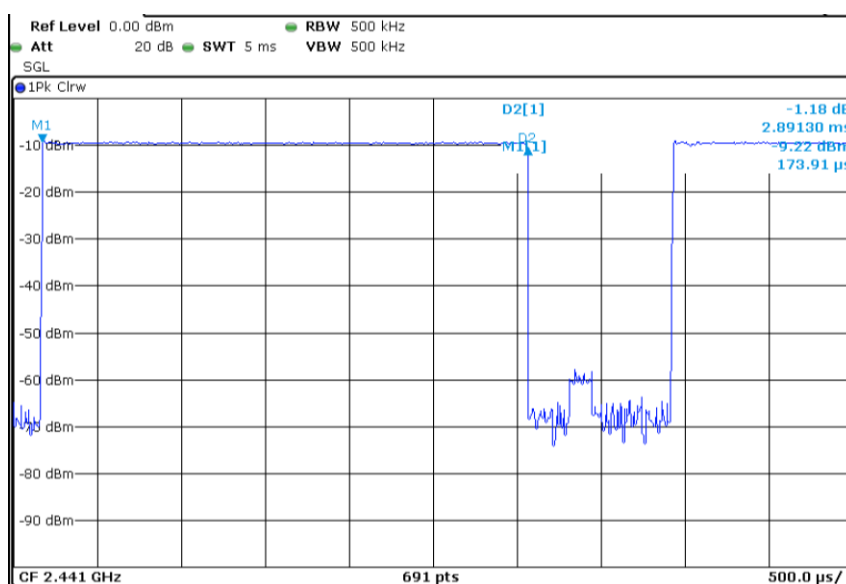

#### Measurement

Setting	Instrument Value
Center Frequency	2.44100 GHz
Span	ZeroSpan
RBW	500.000 kHz
VBW	1.000 MHz
SweepPoints	30001
SweepTime	31.600 s
Reference Level	-20.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
SweepCount	1
Filter	Channel
Trace Mode	Clear Write
SweepType	Sweep
Preamp	off
Trigger	External
Trigger Offset	0.000 s

### 5.9.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.10 NUMBER OF HOPPING FREQUENCIES

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**

ANSI C63.10, chapter 7.8.3

### 5.10.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement. The number of hopping frequencies is independent of the modulation pattern.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Detector: Peak
- Trace: Maxhold
- Frequency span: Frequency band of operation
- Resolution Bandwidth (RBW): < 30 % of channel spacing or 20 dB bandwidth (whichever is smaller)
- Video Bandwidth (VBW): 3 x RBW
- Sweep Time: Auto
- Sweeps: Till stable (min. 300, max. 15000)

The technology depending measurement parameters can be found in the measurement plot.

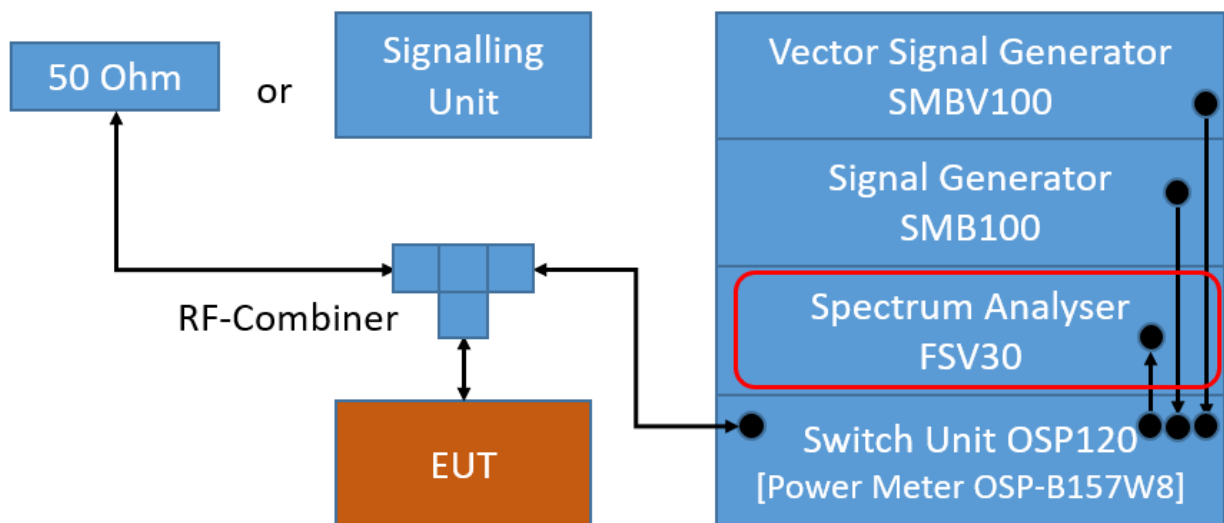

TS8997; Number of Hopping Frequencies

### 5.10.2 TEST REQUIREMENTS / LIMITS

For the band: 902 – 928 MHz  
FCC Part 15, Subpart C, §15.247 (a) (1) (i)

If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.  
If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies

For the band: 2400 – 2483.5 MHz  
FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 5.10.3 TEST PROTOCOL


Ambient temperature: 22 °C  
Air Pressure: 998 hPa  
Humidity: 39 %

Radio Technology	Number of Hopping Frequencies	Limit	Margin to Limit
BT GFSK (1-DH1)	78	15	63

Remark: Please see next sub-clause for the measurement plot.

### 5.10.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Modulation= Bluetooth BDR  
(S01\_AD03)

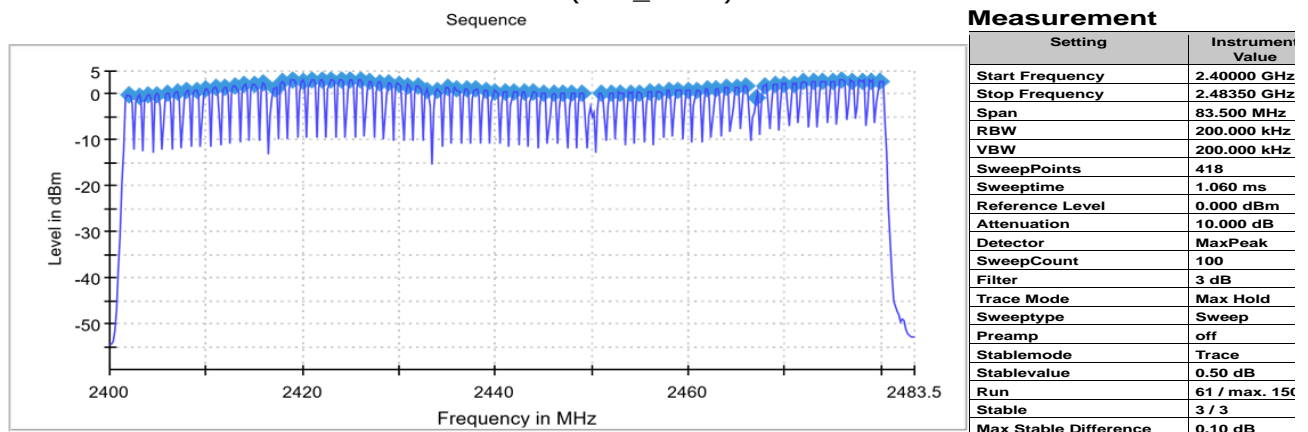

### 5.10.5 TEST EQUIPMENT USED

- R&S TS8997

## 6 TEST EQUIPMENT

### 6.1 TEST EQUIPMENT HARDWARE

- 1 R&S TS8997  
2.4 and 5 GHz Bands Conducted Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
1.2	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2021-06	2024-06
1.3	EX520	Digital Multimeter 12	Extech Instruments Corp	05157876	2022-06	2024-06
1.4	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2023-08	2025-08
1.5	Temperature Chamber VT 4002	Temperature Chamber Vötsch 03	Vötsch	58566002150010	2022-05	2024-05
1.6	FSW43	Signal Analyser	Rohde & Schwarz GmbH & Co. KG	102013	2023-07	2025-07
1.7	Opus10 THI (8152.00)	T/H Logger 14	Lufft Mess- und Regeltechnik GmbH	13993	2021-08	2023-12
1.8	HMP2020	Programmable Power Supply	Rohde & Schwarz GmbH & Co. KG	101992	N/A	N/A
1.9	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2023-01	2026-01
1.10	OSP120	Contains Power Meter and Switching Unit OSP-B157W8 PLUS	Rohde & Schwarz	101158	2021-08	2024-08
1.11	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

- 2 Radiated Emissions FAR 2.4 GHz FCC  
Radiated emission tests for 2.4 GHz ISM devices in a fully anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
2.2	Innco Systems CO3000	Controller for bore sight mast FAC	innco systems GmbH	CO3000/1460/54740522/P	N/A	N/A
2.3	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq		N/A	N/A
2.4	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	N/A	N/A

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
2.6	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785	N/A	N/A
2.7	FSW43	Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	103779	2023-04	2025-04
2.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
2.9	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069	N/A	N/A
2.10	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09	N/A	N/A
2.11	MA3000/0800-XP-ET-compact	Bore Sight Antenna Mast	innco systems GmbH	9210522	N/A	N/A
2.12	TT 1.5 WI	Turn Table	Maturo GmbH	-	N/A	N/A
2.13	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008	N/A	N/A
2.14	Opus 20 THI (8120.00)	ThermoHygro Datalogger	Lufft Mess- und Regeltechnik GmbH	115.0318.0802.033	2023-08	2025-08
2.15	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/3790709	N/A	N/A
2.16	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324	N/A	N/A
2.17	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2021-09	2024-09

### 3 Radiated Emissions SAC H-Field

Radiated emission tests in the H-Field in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
3.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
3.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
3.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
3.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
3.6	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12



Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.7	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
3.8	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
3.9	HFH2-Z2	Loop Antenna + 3 Axis Tripod	Rohde & Schwarz GmbH & Co. KG	829324/006	2024-04	2027-04
3.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

4 Radiated Emissions SAC up to 1 GHz  
Radiated emission tests up to 1 GHz in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
4.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
4.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
4.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
4.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
4.5	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2021-09	2024-09
4.6	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
4.7	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
4.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
4.9	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
4.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10
4.11	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/1192 0513	N/A	N/A

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

## 6.2 TEST EQUIPMENT SOFTWARE

<b>Semi-Anechoic Chamber:</b>	
Software	Version
EMC32 Measurement Software	10.60.10
INNCO Mast Controller	1.02.62
INNCO Mast Height	34.10
INNCO Mast Elevation	36.11
MATURO Controller	1.24
MATURO Mast	12.19
MATURO Turn-Table	30.10
<b>Fully-Anechoic Chamber:</b>	
Software	Version
EMC32 Measurement Software	10.60.10
MATURO Controller	1.30
MATURO Turn-Unit	11.10
MATURO Mast	12.10
MATURO Turntable	12.11
INNCO Controller	1.03.02
INNCO Mast Height	34.10
INNCO Mast Elevation	36.11
<b>TS 8997</b>	
WMS32 Measurement Software	11.60.00 (till 2024-03-19), 11.70.00 + Hotfix 01
<b>Conducted AC Emissions:</b>	
Software	Version
EMC32 Measurement Software	10.60.20

## 7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

### 7.1 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency MHz	AF HFH-Z2) dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-40 dB/ decade) dB	d <sub>Limit</sub> (meas. distance (limit) m	d <sub>used</sub> (meas. distance (used) m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

## 7.2 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

( $d_{\text{Limit}} = 3 \text{ m}$ )

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	$d_{\text{Limit}}$ (meas. distance (limit))	$d_{\text{used}}$ (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

( $d_{\text{Limit}} = 10 \text{ m}$ )

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

### 7.3 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

#### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

#### 7.4 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

#### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	$\pm 3.4$ dB
Field Strength of spurious radiation	Power	$\pm 5.5$ dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	$\pm 2.9$ dB $\pm 11.2$ kHz
Conducted Output Power	Power	$\pm 2.2$ dB
Band Edge Compliance	Power Frequency	$\pm 2.2$ dB $\pm 11.2$ kHz
Frequency Stability	Frequency	$\pm 25$ Hz
Power Spectral Density	Power	$\pm 2.2$ dB

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor)  $k = 1.96$ . This means, that the true value is in the corresponding interval with a probability of 95 %.

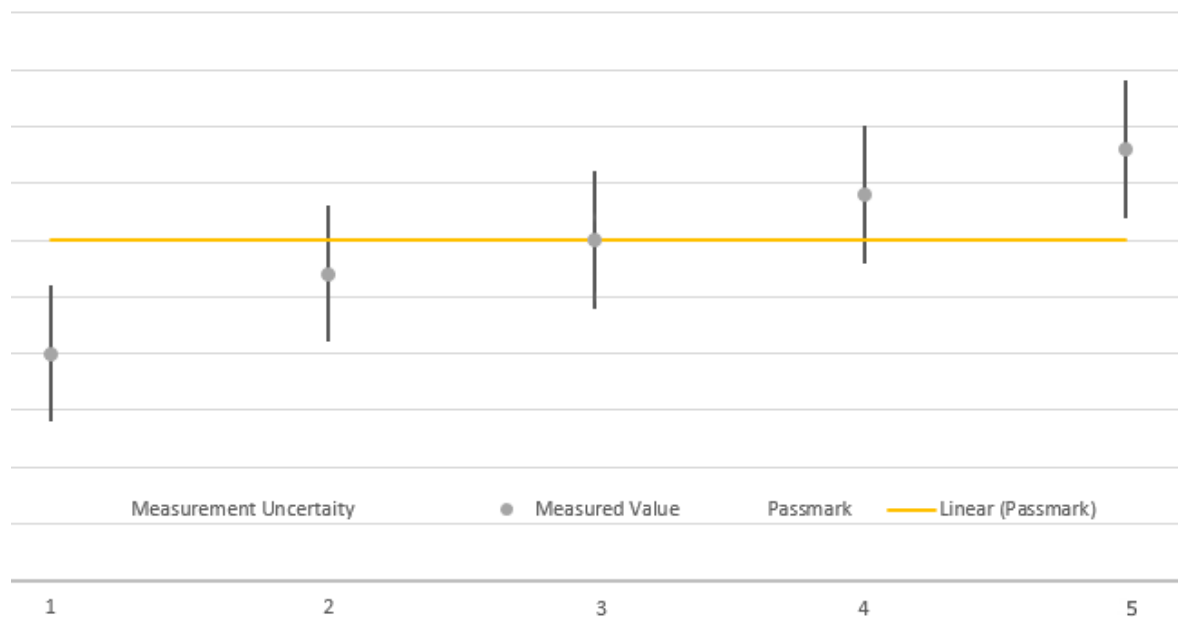

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	on pass mark	within pass mark	Passed
4	above pass mark	within pass mark	Failed
5	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

## 9 PHOTO REPORT

Please see separate photo report.

\*\*\*\*\*END OF TEST REPORT\*\*\*\*\*