


Test_Graph_802.11n40_ANT1_2437_MCS0_Lower Band Emissions





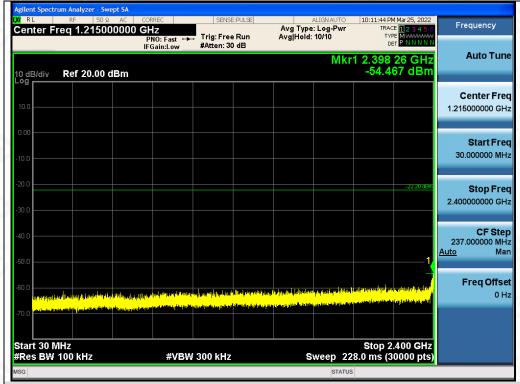

Test_Graph_802.11n40_ANT1_2452_MCS0_Lower Band Emissions





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Test_Graph_802.11b_ANT1_2412_1Mbps_Lower Band Edge Emissions



Test_Graph_802.11g_ANT1_2412_6Mbps_Lower Band Edge Emissions





Start Freq 2.390000000 GHz

Start 2.39000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 6.000 ms (30000 pts)

MKR MODE TRC SCL

N 1 f 2.418 245 6 GHz 9.914 dBm

2 N 1 f 2.400 000 0 GHz 42.135 dBm

3 N 1 f 2.396 1241 GHz 36.776 dBm

Freq Offset

0 Hz

Test_Graph_802.11n40_ANT1_2422_MCS0_Lower Band Edge Emissions

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Report No.: AGC13858220202FE05

Page 44 of 79

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

	Test Data	of Conducted Outpu	ıt Power Spectral Der	sity	
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2412	0.760	-7.479		Pass
802.11b	2437	0.532	-7.707	- \$8	Pass
	2462	0.330	-7.909	- ₹8	Pass
9	2412	-3.286	-11.525		Pass
802.11g	2437	-2.680	-10.919		Pass
	2462	-5.311	-13.55	- \$8	Pass
6.0	2412	-3.591	-11.83	- 8	Pass
802.11n20	2437	-3.390	-11.629		Pass
	2462	-2.584	-10.823	- 8	Pass
<i>a.</i> C	2422	-7.337	-15.576		Pass
802.11n40	2437	-8.466	-16.705	- 8	Pass
	2452	-7.369	-15.608		Pass

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) – 10*log(20/3).



Test Graphs of Conducted Output Power Spectral Density



Test_Graph_802.11b_ANT1_2412_1Mbps_PSD



Test_Graph_802.11b_ANT1_2437_1Mbps_PSD

Complian Pesting/Inspection Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Any report having not been signed by authorized approver, or having peen altered without authorization, or having not been signed by authorized approver, or having peen altered without authorization, or having not been signed by authorization of AGC. The test results start a signed by authorization of AGC and the test report is not permitted without the written authorization of AGC. The test results are the tested cample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/








Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



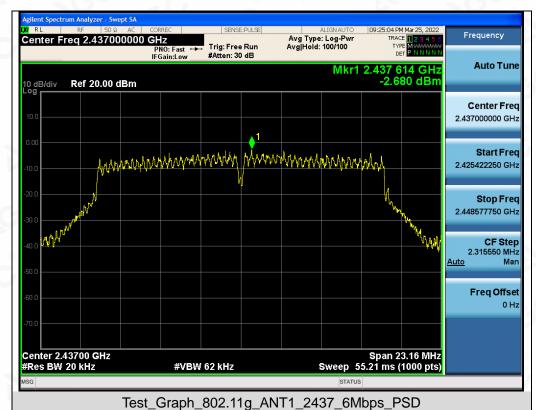




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Test_Graph_802.11n20_ANT1_2412_MCS0_PSD

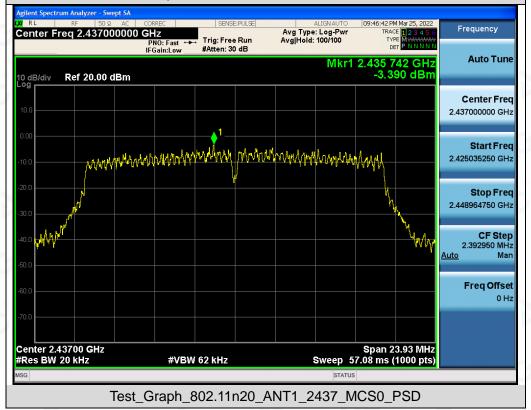






Test_Graph_802.11n20_ANT1_2462_MCS0_PSD




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written pathorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.








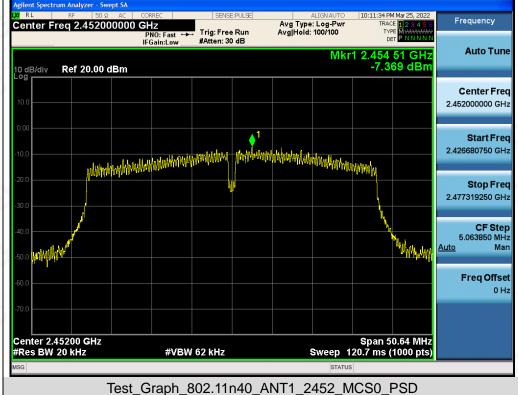

Dedicated Posting/Inspection Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Any report having not been signed by authorized approver, or having peen altered without authorization, or having not been signed by authorized approver, or having peen altered without authorization, or having not been signed by authorization of AGC. The test results start a signed by authorization of AGC and the test report is not permitted without the written authorization of AGC. The test results are the tested cample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

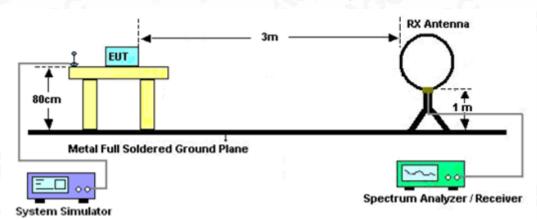

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

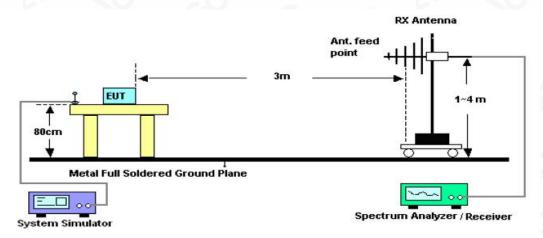

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

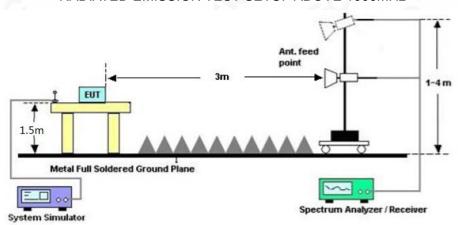

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC13858220202FE05

Page 53 of 79

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Horizontal

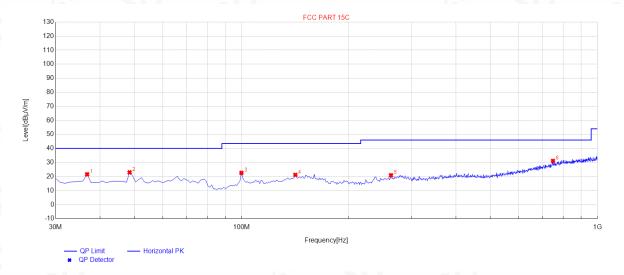


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.79	21.62	10.73	40.00	18.38	100	30	Horizontal
2	48.43	23.00	11.53	40.00	17.00	100	90	Horizontal
3	99.84	22.65	11.30	43.50	20.85	100	80	Horizontal
4	141.55	21.21	14.88	43.50	22.29	100	30	Horizontal
5	262.8	20.95	14.80	46.00	25.05	100	140	Horizontal
6	749.74	31.16	24.77	46.00	14.84	100	330	Horizontal

RESULT: PASS



EUT	HUMIDIFIER	Model Name	YH-936S			
Temperature	25°C	Relative Humidity	55%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Vertical			

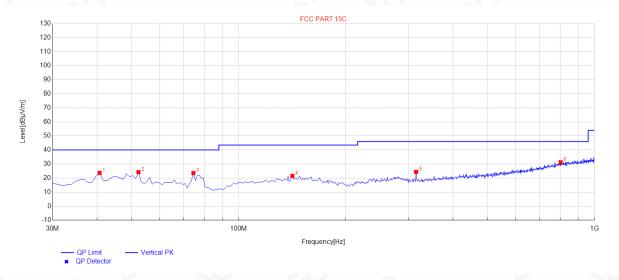


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.67	23.65	10.79	40.00	16.35	100	190	Vertical
2	52.31	24.23	11.49	40.00	15.77	100	310	Vertical
3	74.62	23.59	8.27	40.00	16.41	100	90	Vertical
4	141.55	21.61	14.88	43.50	21.89	100	0	Vertical
5	315.18	24.49	15.09	46.00	21.51	100	90	Vertical
6	803.09	31.26	26.50	46.00	14.74	100	80	Vertical

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Psychological Psycholo





Radiated emission above 1GHz

EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	54.63	0.08	54.71	74	-19.29	peak
4824.000	45.18	0.08	45.26	54	-8.74	AVG
7236.000	49.32	2.21	51.53	74	-22.47	peak
7236.000	40.26	2.21	42.47	54	-11.53	AVG
	6		<u> </u>			-6
emark:			20			
ctor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			®


EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
55.31	0.08	55.39	74	-18.61	peak
45.36	0.08	45.44	54	-8.56	AVG
51.07	2.21	53.28	74	-20.72	peak
40.84	2.21	43.05	54	-10.95	AVG
-69	8				<u> </u>
					1.00
	(dBµV) 55.31 45.36 51.07	(dBµV) (dB) 55.31 0.08 45.36 0.08 51.07 2.21	(dBμV) (dB) (dBμV/m) 55.31 0.08 55.39 45.36 0.08 45.44 51.07 2.21 53.28	(dBμV) (dB) (dBμV/m) (dBμV/m) 55.31 0.08 55.39 74 45.36 0.08 45.44 54 51.07 2.21 53.28 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 55.31 0.08 55.39 74 -18.61 45.36 0.08 45.44 54 -8.56 51.07 2.21 53.28 74 -20.72

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. g/Inspection he test results he test report.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



g/Inspection
The test results
the test report.




EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.38	0.14	56.52	74	-17.48	peak
4874.000	45.95	0.14	46.09	54	-7.91	AVG
7311.000	51.02	2.36	53.38	74	-20.62	peak
7311.000	40.27	2.36	42.63	54	-11.37	AVG
- 6	®			- 6	8	
						(8)

EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.33	0.14	55.47	74	-18.53	peak
4874.000	46.18	0.14	46.32	54	-7.68	AVG
7311.000	50.22	2.36	52.58	74	-21.42	peak
7311.000	40.37	2.36	42.73	54	-11.27	AVG
	(0)			C	0	
						(8)
emark:			(6)			
actor = Anten	na Factor + Cabl	e Loss – Pre-	amplifier.	8		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festive Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter bedicated Festive Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter bedicated Festive Stamp" and the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day Safter the issuance of the report should be addressed to AGC by agc@agc-cert.com.





EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	54.37	0.22	54.59	74	-19.41	peak
4924.000	43.24	0.22	43.46	54	-10.54	AVG
7386.000	49.29	2.64	51.93	74	-22.07	peak
7386.000	40.05	2.64	42.69	54	-11.31	AVG
<u> </u>				(8)		
	(6)				(8)	
temark:	a.C					
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin 💮	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	56.14	0.22	56.36	74	-17.64	peak
4924.000	45.11	0.22	45.33	54	-8.67	AVG
7386.000	51.09	2.64	53.73	74	-20.27	peak
7386.000	42.38	2.64	45.02	54	-8.98	AVG
	367	20	@			
emark:			- C	(3)		

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11g mode is the worst case and recorded in the report.



Test result for band edge emission at restricted bands

EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: PASS



EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

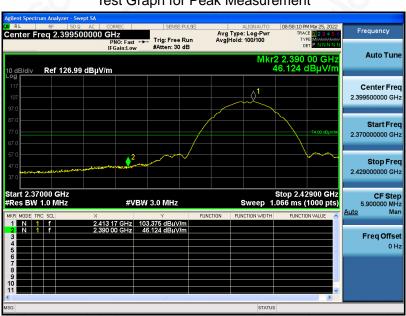

Test Graph for Average Measurement





EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement




Test Graph for Average Measurement





EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement

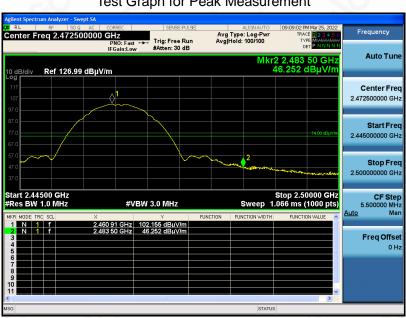

Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC stamp and the tested comple. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance at g/Inspection The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d4 after the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

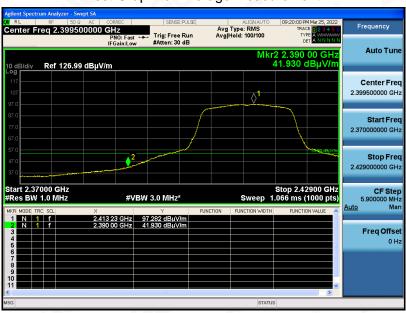




EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

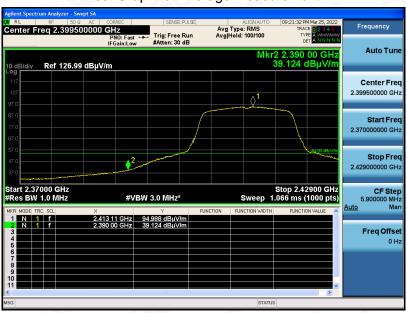



EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement




Test Graph for Average Measurement





EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

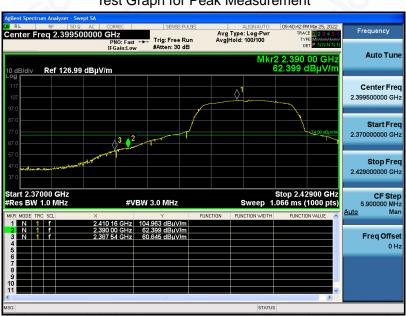

Test Graph for Average Measurement





EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	HUMIDIFIER	Model Name	YH-936S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

