

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics U.S.A, Inc. 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 United States Date of Testing: 12/31/2018 - 01/24/2019 Test Site/Location: PCTEST Lab, Columbia, MD, USA Test Report Serial No.: 1M1812060222-12-R4.ZNF

FCC ID:

ZNFQ850QM

APPLICANT:

LG ELECTRONICS U.S.A, INC.

Scope of Test: Application Type: FCC Rule Part(s): HAC Standard:	Audio Band Magnetic Testing (T-Coil) Certification CFR §20.19(b) ANSI C63.19-2011 285076 D01 HAC Guidance v05
DUT Type: Model: Additional Model(s): Test Device Serial No.:	285076 D02 T-Coil testing for CMRS IP v03 Portable Handset LM-Q850QM LMQ850QM, Q850QM, LM-Q850QM5, LMQ850QM5, Q850QM5, LM-Q850QM6, LMQ850QM6, Q850QM6 <i>Pre-Production Sample</i> [S/N: 00307]

C63.19-2011 HAC Category:

T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M1812060222-12-R4.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez President



FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 1 of 86	
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 10100	
© 2019 PCTEST Engineering I	© 2019 PCTEST Engineering Laboratory, Inc.				

1.		3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	18
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	22
7.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	25
8.	FCC 3G MEASUREMENTS	
9.	T-COIL TEST SUMMARY	30
10.	MEASUREMENT UNCERTAINTY	41
11.	EQUIPMENT LIST	42
12.	TEST DATA	43
13.	CALIBRATION CERTIFICATES	74
14.	CONCLUSION	81
15.	REFERENCES	82
16.	TEST SETUP PHOTOGRAPHS	

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 2 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 2 01 00
© 2019 PCTEST Engineering	REV 3.2.M			
				04/17/2018

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 3 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 5 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				

2. DUT DESCRIPTION



ZNFQ850QM		
LG Electronics U.S.A, Inc.		
1000 Sylvan Avenue		
Englewood Cliffs, NJ 07632		
United States		
LM-Q850QM		
LMQ850QM, Q850QM, LM-Q850QM5, LMQ850QM5, Q850QM5, LM-Q850QM6, LMQ850QM6, Q850QM6		
00307		
Rev.1.0		
Q850QM09a		
Internal Antenna		
Portable Handset		

I. LTE Band Selection

This device supports the following pair of LTE bands with similar frequencies: LTE B2 & B25, B4 & B66, B5 & B26, and B12 & B17. These pairs of LTE bands have the same target power and share the same transmission path. Since the supported frequency span for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B66, B25, B26 and B12) were evaluated for hearing-aid compliance.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 4 of 86
© 2019 PCTEST Engineering		REV 3.2.M 04/17/2018		

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated
	835	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EVRC
CDMA	1900	¥0	res	Tes. WIFI OF BI	CIVIKS VOICE	EVRC
	EvDO	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	850	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EFR
GSM	1900		105			
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	850	-				
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice ¹	NB AMR
0	1900					
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	700 (B12)	-		Yes Yes: WIFI or BT VoLTE ¹ , Go		
	700 (B17)				VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, Google Duo: OPUS
	780 (B13)	VD				
	850 (B5)					
LTE (FDD)	850 (B26)		Yes			
	1700 (B4)					
	1700 (B66)					
	1900 (B2)					
	1900 (B25)					
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, Google Duo: OPUS
	2450					
	5200 (U-NII 1)				VoWIFI ² , Google Duo ²	
WIFI	5300 (U-NII 2A)	VD	Yes	Yes: CDMA, GSM, UMTS, or LTE		VoWIFI: NB AMR, WB AMR, Google Duo: OPUS
	5500 (U-NII 2C)					Google Duo. OF03
F	5800 (U-NII 3)					
BT	2450	DT	No	Yes: CDMA, GSM, UMTS, or LTE	N/A	N/A
DT = Digital Da	Type Transport Notes: VO = Voice Only 1. Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and July 2012 C63 VoLTE Interpretation. DT = Digital Data - Not intended for CMRS Service 2. Reference level is -20dBm0 in accordance with FCC KDB 285076 D02 VD = CMRS and IP Voice over Data Transport 2. Reference level is -20dBm0 in accordance with FCC KDB 285076 D02					

Table 2-1 ZNFQ850QM HAC Air Interfaces

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 5 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		1 age 5 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M

© 2019 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz - 3000 Hz per §8.3.2.

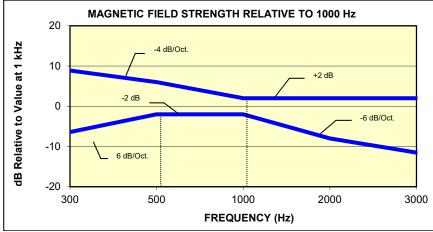



Figure 3-1



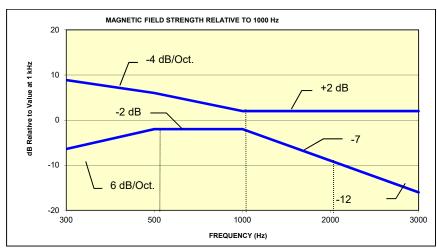


Figure 3-2

Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 6 of 86	
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 0 01 00	
© 2019 PCTEST Engineering	© 2019 PCTEST Engineering Laboratory, Inc.				

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters			
	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]			
T1	0 to 10 dB			
T2	10 to 20 dB			
Т3	20 to 30 dB			
T4	> 30 dB			
Table 3-1 Magnetic Coupling Parameters				

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 7 of 86	
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage / 0100	
© 2019 PCTEST Engineering Laboratory, Inc.					
				04/17/2018	

METHOD OF MEASUREMENT 4.

Test Setup I.

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:


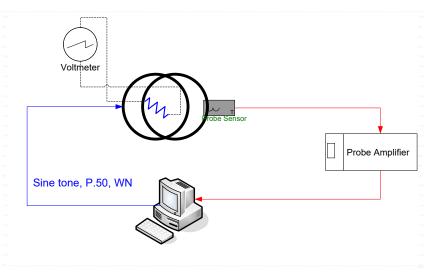


Figure 4-1 Validation Setup with Helmholtz Coil

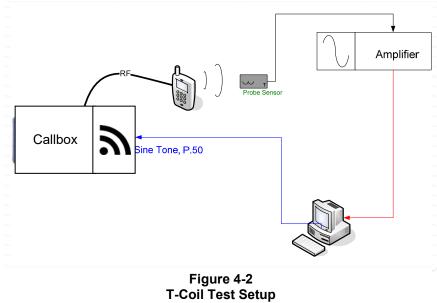

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 8 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 0 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M 04/17/2018

II. Scanning Mechanism

Manufacturer:	TEM
Accuracy:	± 0.83 cm/meter
Minimum Step Size:	0.1 mm
Maximum speed	6.1 cm/sec
Line Voltage:	115 VAC
Line Frequency:	60 Hz
Material Composite:	Delrin (Acetal)
Data Control:	Parallel Port
Dynamic Range (X-Y-Z):	45 x 31.75 x 47 cm
Dimensions:	36" x 25" x 38"
Operating Area:	36" x 49" x 55"
Reflections:	< -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. ITU-T P.50 Artificial Voice

Manufacturer:	ITU-T
Active Frequency Range:	100 Hz – 8 kHz
Stimulus Type:	Male and Female, no spaces
Single Sample Duration: Activity Level:	20.96 seconds 100%




Figure 4-4 Spectral Characteristic of full P.50





Figure 4-5 Temporal Characteristic of full P.50

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 9 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 9 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				

ABM1 Measurement Block Diagram:

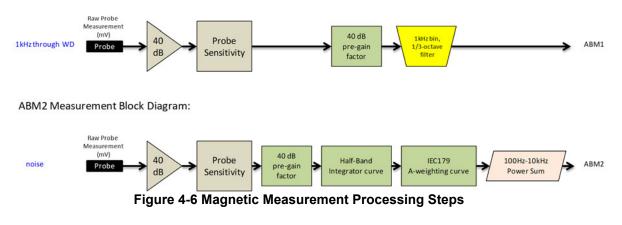

IV. Test Procedure

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - b. "A-weighting" and Half-Band Integration was applied to the measurements.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is: -18 - 30 - 10= -58 dBA/m
- 2. Measurement System Validation(See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - b. ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_{c} = \frac{NI}{r\sqrt{1.25^{3}}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^{3}}}$$


Where H_c = magnetic field strength in amperes per meter

For the Helmholtz Coil, N=20; r=0.13m; R=10.193Ω and using V=29mV:

$$H_{c} = \frac{20 \cdot (\frac{0.029}{10.193})}{0.13 \cdot \sqrt{1.25^{3}}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 29mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within \pm 0.5 dB of the -10dB(A/m) value (see Page 39).

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 10 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 10 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				
				04/17/2018



d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

ABM2 Frequency Response Validation				
	HBI, A -	HBI, A -		
f (Hz)	Measured	Theoretical	dB Var.	
	(dB re 1kHz)	(dB re 1kHz)		
100	-16.180	-16.170	-0.010	
125	-13.257	-13.250	-0.007	
160	-10.347	-10.340	-0.007	
200	-8.017	-8.010	-0.007	
250	-5.925	-5.920	-0.005	
315	-4.045	-4.040	-0.005	
400	-2.405	-2.400	-0.005	
500	-1.212	-1.210	-0.002	
630	-0.349	-0.350	0.001	
800	0.071	0.070	0.001	
1000	0.000	0.000	0.000	
1250	-0.503	-0.500	-0.003	
1600	-1.513	-1.510	-0.003	
2000	-2.778	-2.780	0.002	
2500	-4.316	-4.320	0.004	
3150	-6.166	-6.170	0.004	
4000	-8.322	-8.330	0.008	
5000	-10.573	-10.590	0.017	
6300	-13.178	-13.200	0.022	
8000	-16.241	-16.270	0.029	
10000	-19.495	-19.520	0.025	


Table 4-1

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 11 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 110100
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M

© 2019 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


04/17/2018

ABM2 Frequency Response Validation (LISTEN)

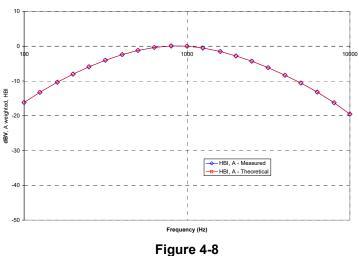

ABM2 Frequency Response Validation


The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and Aweighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:




The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2 ABM2 Power Sum Validation					
WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)		
-60	-60.36	-60.2	0.16		
-50	-50.19	-50.13	0.06		
-40	-40.14	-40.03	0.11		
-30	-30.13	-30.01	0.12		
-20	-20.12	-20	0.12		
-10	-10.14	-10	0.14		

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 12 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 12 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M



- 3. Measurement Test Setup
 - a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

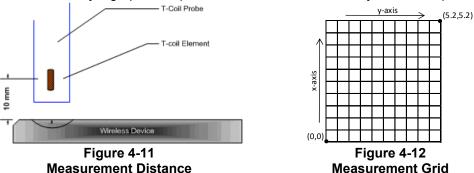

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-14 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:


Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN TM	TDMA (22 and 11 Hz)	-18

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 13 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 13 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
- iii. See Section 7 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 8 for more information regarding worst-case configurations for CDMA and UMTS. LTE configuration information can be found in Section 5. WIFI configuration information can be found in Section 6 and 7.)
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, nominal volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 14 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 14 01 00
2019 PCTEST Engineering Laboratory, Inc.				
				04/17/2018

V. Test Setup



Audio Magnetic Field Test Setup

VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager			
Filename:	Test Dates:	DUT Type:		Page 15 of 86			
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		_			
© 2019 PCTEST Engineering Laboratory, Inc.							
				04/17/2018			

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes since circuit-switched voice modes were worst-case.

Center Channels and Frequencies									
Test frequencies & associated channels									
Channel Frequency (MHz)									
Secondary Cellular 8	20								
564 (CDMA)	820.10								
Cellular 850	Cellular 850								
384 (CDMA)	836.52								
190 (GSM)	836.60								
4183 (UMTS)	836.60								
AWS 1750									
1412 (UMTS)	1730.40								
PCS 1900									
600 (CDMA)	1880								
661 (GSM)	1880								
9400 (UMTS)	1880								

Table 4-3

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for LTE TDD. The middle channel and supported bandwidths from the worst-case band according to Table 7-6, and 7-7 was additionally evaluated with OTT VoIP for each probe orientation. See Tables 9-5 to 9-11 and Tables 9-19 and 9-20 for LTE bandwidths and channels.

3. WIFI

The middle channel for each 802.11 standard was tested for each probe orientation. The 2.4GHz 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. The 5GHz 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested on higher U-NII bands as well as applicable low and high channels. See Tables 9-12 to 9-15 and Table 9-21 to 9-24 for WIFI standards and channels.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager		
Filename:	Test Dates:	DUT Type:		Page 16 of 86		
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 10 01 00		
© 2019 PCTEST Engineering Laboratory, Inc.						
				04/17/2018		

IX. Test Flow

The flow diagram below was followed (From C63.19):

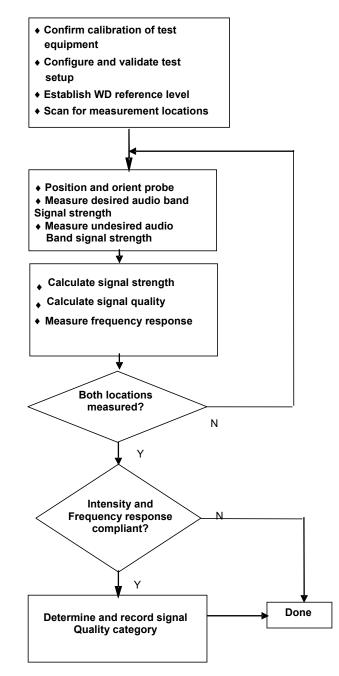


Figure 4-14 C63.19 T-Coil Signal Test Process

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager		
Filename:	Test Dates:	DUT Type:		Page 17 of 86		
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 1/ 01 00		
© 2019 PCTEST Engineering Laboratory, Inc.						

5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

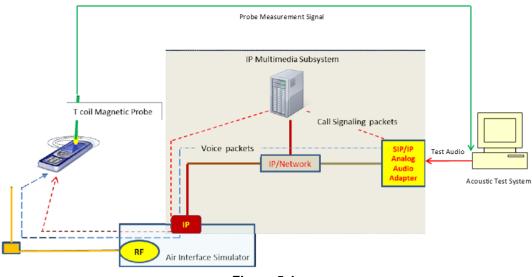


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level^{*}. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager		
Filename:	Test Dates:	DUT Type:		Page 18 of 86		
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 10 01 00		
© 2019 PCTEST Engineering Laboratory, Inc.						
	-			04/17/2018		

II. DUT Configuration for VoLTE over IMS T-coil Testing

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. 16QAM, 1RB, 0RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

VoLTE over IMS SNNR by Radio Configuration												
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]				
1745.0	132322	20	QPSK	1	0	-9.05	-51.14	42.09				
1745.0	132322	20	QPSK	1	50	-9.12	-50.68	41.56				
1745.0	132322	20	QPSK	1	99	-8.85	-50.75	41.90				
1745.0	132322	20	QPSK	50	0	-9.04	-50.81	41.77				
1745.0	132322	20	QPSK	50	25	-9.16	-51.12	41.96				
1745.0	132322	20	QPSK	50	50	-9.17	-50.90	41.73				
1745.0	132322	20	QPSK	100	0	-8.91	-51.14	42.23				
1745.0	132322	20	16QAM	1	0	-9.11	-46.41	37.30				
1745.0	132322	20	16QAM	1	50	-9.07	-47.93	38.86				
1745.0	132322	20	16QAM	1	99	-9.30	-47.44	38.14				
1745.0	132322	20	16QAM	50	0	-9.16	-50.11	40.95				
1745.0	132322	20	16QAM	50	25	-9.11	-50.61	41.50				
1745.0	132322	20	16QAM	50	50	-9.17	-50.40	41.23				
1745.0	132322	20	16QAM	100	0	-8.96	-49.98	41.02				
1745.0	132322	20	64QAM	1	0	-9.21	-48.47	39.26				
1745.0	132322	20	64QAM	1	50	-9.12	-49.08	39.96				
1745.0	132322	20	64QAM	1	99	-8.96	-48.79	39.83				
1745.0	132322	20	64QAM	50	0	-8.74	-48.73	39.99				
1745.0	132322	20	64QAM	50	25	-9.19	-51.36	42.17				
1745.0	132322	20	64QAM	50	50	-9.32	-51.25	41.93				
1745.0	132322	20	64QAM	100	0	-9.19	-50.82	41.63				

Table 5-1 VoLTE over IMS SNNR by Radio Configuration


2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

AMR Codec Investigation – VoLTE over IMS													
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel						
ABM1 (dBA/m)	-8.96	-9.32	-7.53	-7.44									
ABM2 (dBA/m)	-47.45	-47.08	-47.85	-47.76	Axial	I B66 20MHz BW	132322						
Frequency Response	Pass	Pass	Pass	Pass	Axia								
S+N/N (dB)	38.49	37.76	40.32	40.32									

Table 5-2

- Mute on; Backlight off; Nominal Volume; Max Contrast
- TPC = "Max Power"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager			
Filename:	Test Dates:	DUT Type:		Dago 10 of 96			
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Page 19 of 86			
© 2019 PCTEST Engineering Laboratory, Inc.							

3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length $T_f = 307200 \cdot T_s = 10 \text{ ms}$, where T_s is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length $30720 \cdot T_s = 1 \text{ ms}$, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 \cdot Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity		Subframe number						Calculated Transmission			
configuration	Switch-point periodicity	0	1	2	ß	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

Table 5-3Uplink-Downlink Configurations for Type 2 Frame Structures

a. Power Class 3 Uplink-Downlink Configuration Investigation

Power class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

	Fower class 5 volte over two states by our de configuration													
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]					
2593.0	40620	20	16QAM	1	0	0	-8.75	-38.05	29.30					
2593.0	40620	20	16QAM	1	0	1	-8.44	-37.64	29.20					
2593.0	40620	20	16QAM	1	0	2	-8.76	-38.15	29.39					
2593.0	40620	20	16QAM	1	0	3	-8.83	-40.86	32.03					
2593.0	40620	20	16QAM	1	0	4	-8.69	-40.66	31.97					
2593.0	40620	20	16QAM	1	0	5	-8.44	-40.77	32.33					
2593.0	40620	20	16QAM	1	0	6	-8.61	-37.82	29.21					

Table 5-4
Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager			
Filename:	Test Dates:	DUT Type:		Page 20 of 86			
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset	Portable Handset				
© 2019 PCTEST Engineering Laboratory, Inc.							

b. Power Class 2 Uplink-Downlink Configuration Investigation

Power Class 2 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 2, configurations 1-5 are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 2 was used as the worst-case configuration for Power Class 2 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	0	1	-8.44	-33.61	25.17
2593.0	40620	20	16QAM	1	0	2	-8.85	-33.89	25.04
2593.0	40620	20	16QAM	1	0	3	-8.51	-38.93	30.42
2593.0	40620	20	16QAM	1	0	4	-8.70	-38.53	29.83
2593.0	40620	20	16QAM	1	0	5	-8.56	-38.94	30.38
2593.0	40620	20	16QAM	1	0	5	-8.56	-38.94	30.3

Table 5-5
Power Class 2 VoLTE over IMS SNNR by UL-DL Configuration

Note: LTE TDD B41 Power Class 2 only supports UL-DL configurations 1-5, not 0 or 6.

c. Conclusion

Per the investigations above, UL-DL Configuration 1 was used to evaluate Power Class 3 VoLTE over IMS and UL-DL Configuration 2 was used to evaluate Power Class 2 VoLTE over IMS.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager			
Filename:	Test Dates:	DUT Type:		Page 21 of 86			
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		1 age 21 01 00			
© 2019 PCTEST Engineering I	© 2019 PCTEST Engineering Laboratory, Inc.						
				04/17/2018			

6. VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoWIFI over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

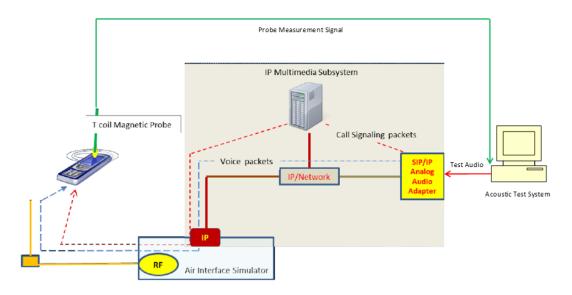


Figure 6-1 Test Setup for VoWIFI over IMS T-Coil Measurements

2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level². The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

² FCC Office of Engineering and Technology KDB, "285076 D02 T	C-Coil Testing for CMRS IP v03," September 13, 2017
--------------------------------------------------------------------------	-----------------------------------------------------

FCC ID: ZNFQ850QM	PCTEST	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager			
Filename:	Test Dates:	DUT Type:		Page 22 of 86			
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 22 01 00			
© 2019 PCTEST Engineering I	© 2019 PCTEST Engineering Laboratory, Inc.						
				04/17/2018			

II. DUT Configuration for VoWIFI over IMS T-coil Testing

1. Radio Configuration

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each 802.11 standard:

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
802.11b	6	DSSS	1	-6.35	-50.82	44.47
802.11b	6	DSSS	2	-6.55	-50.96	44.41
802.11b	6	CCK	5.5	-6.13	-50.01	43.88
802.11b	6	CCK	11	-6.42	-50.04	43.62

Table 6-2

Table 6-1 802.11b SNNR by Radio Configuratio

802.11g/a SNNR by Radio Configuration Data Rate ABM1 ABM2 SNNR Channel Mode Modulation [Mbps] [dB(A/m)] [dB(A/m)] [dB] BPSK 802.11g 6 6 -6.49 -50.36 43.87 BPSK 802.11g 6 9 -6.39 -51.22 44.83 802.11g 6 QPSK 12 -6.57 -51.14 44.57 6 -6.50 802.11g QPSK 18 -51.92 45.42 802.11g 6 16-QAM 24 -6.91 -51.10 44.19 802.11g 6 16-QAM 36 -6.43 -51.65 45.22 6 802.11g 64-QAM 48 -6.50 -50.98 44.48 802.11g 6 64-QAM 54 -6.50 -51.91 45.41

 Table 6-3

 802.11n/ac 20MHz BW SNNR by Radio Configuration

	Soz. Thirde Zowinz BW Shark by Radio Configuration									
Mode	Bandwidth [MHz]	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]			
802.11n	20	40	BPSK	6.5	-6.11	-48.35	42.24			
802.11n	20	40	QPSK	13	-6.06	-49.63	43.57			
802.11n	20	40	QPSK	19.5	-6.58	-50.67	44.09			
802.11n	20	40	16-QAM	26	-6.56	-50.58	44.02			
802.11n	20	40	16-QAM	39	-6.56	-50.51	43.95			
802.11n	20	40	64-QAM	52	-6.52	-49.93	43.41			
802.11n	20	40	64-QAM	58.5	-6.87	-49.91	43.04			
802.11n	20	40	64-QAM	65	-6.82	-49.82	43.00			
802.11ac	20	40	256-QAM	78	-6.70	-50.52	43.82			

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager			
Filename:	Test Dates:	DUT Type:		Page 23 of 86			
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 23 01 00			
© 2019 PCTEST Engineering	© 2019 PCTEST Engineering Laboratory, Inc.						

Mode	Bandwidth [MHz]	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]		
802.11n	40	38	BPSK	13.5	-6.60	-48.79	42.19		
802.11n	40	38	QPSK	27	-6.61	-49.53	42.92		
802.11n	40	38	QPSK	40.5	-6.64	-50.31	43.67		
802.11n	40	38	16-QAM	54	-6.65	-49.72	43.07		
802.11n	40	38	16-QAM	81	-6.60	-50.77	44.17		
802.11n	40	38	64-QAM	108	-6.42	-50.52	44.10		
802.11n	40	38	64-QAM	121.5	-6.56	-50.31	43.75		
802.11n	40	38	64-QAM	135	-6.61	-50.04	43.43		
802.11ac	40	38	256-QAM	162	-6.66	-50.93	44.27		
802.11ac	40	38	256-QAM	180	-6.67	-51.06	44.39		

 Table 6-4

 802.11n/ac 40MHz BW SNNR by Radio Configuration

2. Codec Configuration


•

An investigation was performed to determine the audio codec configuration to be used for testing. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

	AMR Codec Investigation – VoWIFI over IMS									
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel		
ABM1 (dBA/m)	-5.46	-6.61	-5.30	-5.45		l 2.4GHz	IEEE 802.11b			
ABM2 (dBA/m)	-50.44	-49.93	-50.43	-50.48	Axial			6		
Frequency Response	Pass	Pass	Pass	Pass	Axia			0		
S+N/N (dB)	44.98	43.32	45.13	45.03						

Table 6-5 MR Codec Investigation – VoWIFI over IMS

Mute on; Backlight off; Nominal Volume; Max Contrast



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 24 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 24 01 00
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M 04/17/2018

7. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 64kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation³. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

II. DUT Configuration for OTT VoIP T-Coil Testing

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The 64kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Codec Investigation – OTT VoIP (EvDO)								
Codec Setting:	64kbps	6kbps	Orientation	Channel				
ABM1 (dBA/m)	8.67	8.48		600				
ABM2 (dBA/m)	-55.31	-55.72	Axial					
Frequency Response	Pass	Pass						
S+N/N (dB)	63.98	64.20						

Table 7 4

³ FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 25 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 25 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M

^{04/17/2018}

Codec Investigation – OTT VoIP (EDGE)								
Codec Setting:	64kbps	6kbps	Orientation	Channel				
ABM1 (dBA/m)	7.99	8.55						
ABM2 (dBA/m)	-34.74	-34.65	Axial	190				
Frequency Response	Pass	Pass		190				
S+N/N (dB)	42.73	43.20						

 Table 7-2

 Codec Investigation – OTT VolP (EDGE)

Table 7-3Codec Investigation – OTT VoIP (HSPA)

Codec Setting:	64kbps	6kbps	Orientation	Channel
ABM1 (dBA/m)	8.03	8.14		
ABM2 (dBA/m)	-55.50	-55.41	Axial	9400
Frequency Response	Pass	Pass		
S+N/N (dB)	63.53	63.55		


Table 7-4 Codec Investigation – OTT VoIP (LTE)

Codec Setting:	64kbps	6kbps	Orientation	Band / BW	Channel				
ABM1 (dBA/m)	8.34	8.19			26365				
ABM2 (dBA/m)	-53.34	-53.75	Axial	Band 25 / 20MHz					
Frequency Response	Pass	Pass	Axiai						
S+N/N (dB)	61.68	61.94							

Table 7-5 Codec Investigation – OTT VoIP (WIFI)

Codec Setting:	64kbps	6kbps	Orientation	Band	Standard	Channel			
ABM1 (dBA/m)	8.53	8.74			4GHz IEEE 802.11b				
ABM2 (dBA/m)	-47.13	-47.70	Axial	0.401		6			
Frequency Response	Pass	Pass	Axiai	2.40112					
S+N/N (dB)	55.66	56.44							

- Mute on; Backlight off; Nominal Volume; Max Contrast
- Radio Configurations can be found in Section 9.II.H



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 26 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 20 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M

2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 13 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE FDD bands:

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]	
66	1745.0	132322	20	16QAM	1	0	8.37	-49.05	57.42	
25	1882.5	26365	20	16QAM	1	0	8.39	-46.03	54.42	
26	831.5	26865	15	16QAM	1	0	8.29	-48.57	56.86	
12	707.5	23095	10	16QAM	1	0	8.37	-46.81	55.18	
13	782.0	23230	10	16QAM	1	0	8.27	-43.83	52.10	

Table 7-6 OTT VoIP (LTE) SNNR by LTE Band

An investigation was performed to determine the worst-case LTE TDD band to be used for OTT VoIP testing. LTE TDD Band 41 (PC2) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE TDD bands:

 Table 7-7

 OTT VoIP (LTE) SNNR by LTE Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
41(PC3)	2593.0	40620	20	16QAM	1	0	8.48	-37.87	46.35
41(PC2)	2593.0	40620	20	16QAM	1	0	8.49	-31.38	39.87

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 27 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 27 01 00
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M
				04/17/2018

8. FCC 3G MEASUREMENTS

I. CDMA Test Configurations

Radio Configuration 1, Service Option 3 (thick, green data curve) was used for the testing as the worstcase configuration for the handset due to vocoder gating from the EVRC logic. See below plot for ABM noise comparison between operational field service options and radio configurations for a CDMA2000 handset:

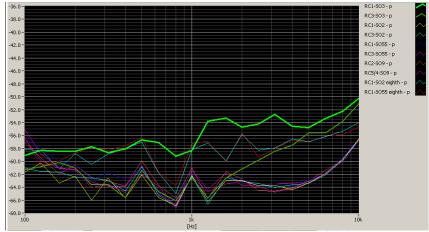



Figure 8-1 CDMA Audio Band Magnetic Noise

Table 8-1
FCC 3G ABM Measurements for ZNFQ850QM (CDMA)

Configuration:	RC1/SO3	RC3/SO3	RC4/SO3	Orientation	Channel			
ABM1 (dBA/m)	-8.25	-7.64	-7.75		384			
ABM2 (dBA/m)	-49.32	-54.24	-53.49	Axial				
Frequency Response	Pass	Pass	Pass	Axia				
S+N/N (dB)	41.07	46.60	45.74					

Mute on; Backlight off; Nominal Volume; Max Contrast

• Power Control Bits = "All Up"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 28 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 20 01 00
© 2019 PCTEST Engineering I	_aboratory, Inc.	<u>.</u>		REV 3.2.M

II. UMTS Test Configurations

AMR at 12.2kbps, 13.6kbps SRB was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:




Figure 8-3 UMTS Audio Band Magnetic Noise

Table 8-2 Codec Investigation - UMTS

Codec Setting:	AMR 12.2kbps AMR 7.95kbps		AMR 4.75kbps	Orientation	Channel	
ABM1 (dBA/m)	-7.42	-7.45	-7.54			
ABM2 (dBA/m)	-56.14	-56.35	-56.56	Axial	9400	
Frequency Response	Pass	Pass	Pass		3400	
S+N/N (dB)	48.72	48.90	49.02			

· Mute on; Backlight off; Nominal Volume; Max Contrast

TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 29 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 29 01 00
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M

T-COIL TEST SUMMARY 9.

FCC SNNR Freq. Response Magnetic Margin Intensity Verdict Margin from Verdict C63.19-2011 FCC Limit Rating 8.3.2 8.3.1 8.3.4 (dB) C63.19 Section Axial Radial Axial Radial Axial Radial Secondary Cellula PASS PASS NA PASS PASS PASS Cellular NA CDMA -11.23 **T4** PASS PASS PASS PASS PASS PCS PASS NA PASS PASS PASS PASS Secondary Cellula PASS NA PASS PASS PASS EvDO Cellular PASS NA PASS PASS PASS PASS -34.83 **T4** (OTT VoIP) PCS PASS NA PASS PASS PASS PASS Cellular NA PASS PASS PASS PASS PASS GSM -2.19 Т3 PCS PASS NA PASS PASS PASS PASS PASS Cellular NA PASS PASS PASS PASS EDGE -13.93 **T4** (OTT VoIP) PCS PASS NA PASS PASS PASS PASS Cellular PASS NA PASS PASS PASS PASS UMTS PASS NA PASS AWS PASS PASS PASS -27.31 **T4** PCS PASS NA PASS PASS PASS PASS Cellular PASS NA PASS PASS PASS PASS HSPA AWS PASS NA PASS PASS PASS PASS -33.83 **T4** (OTT VoIP) PCS PASS NA PASS PASS PASS PASS B12 NA PASS PASS PASS PASS PASS B13 PASS NA PASS PASS PASS PASS B26 NA PASS PASS I TE EDD -11.71 **T4** B66 PASS NA PASS PASS PASS PASS NA B25 PASS PASS PASS PASS PASS LTE FDD B13 PASS NA PASS PASS PASS PASS -26.97 Τ4 (OTT VoIP) B41 (PC3) PASS PASS NA PASS PASS PASS LTE TDD -5.45 Т3 B41 (PC2) NA PASS PASS PASS PASS PASS LTE TDD B41 (PC2) PASS NA PASS PASS PASS PASS -15.98 Τ4 (OTT VoIP) PASS PASS 802 11b NA PASS PASS 802.11g PASS PASS PASS PASS PASS NA WLAN -7.20 Т3 802.11n PASS NA PASS PASS PASS PASS 802.11ac PASS NA PASS PASS PASS PASS 802.11b PASS NA PASS PASS PASS PASS 802.11g NA WLAN -18.17 **T4** (OTT VoIP) 802.11n PASS NA PASS PASS PASS PASS NA 802.11ac PASS PASS PASS PASS PASS 802.11a PASS NA PASS PASS PASS PASS PASS 802.11n NA PASS PASS PASS -9.27 U-NII Т3 PASS PASS PASS 802.11ac NA PASS PASS 802.11a PASS NA PASS PASS PASS PASS U-NII 802.11n NA -20.26

Tab	le 9-1	
Consolidated	Tabled	Results

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 30 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 50 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M

PASS

PASS

NA

PASS

PASS

PASS

PASS

PASS

PASS

PASS

PASS

802.11ac

(OTT VoIP)

© 2019 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018

T4

I. Raw Handset Data

Naw Data Results for CDMA																
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates					
		476	-7.40	-49.44		2.00	42.04	20.00	-22.04	T4						
	Axial	564	-7.73	-49.67	-63.19	2.00	41.94	20.00	-21.94	T4	2.4, 3.0					
Secondary		684	-7.73	-50.07		2.00	42.34	20.00	-22.34	T4						
Cellular		476	-14.56	-47.55			32.99	20.00	-12.99	T4						
	Radial	564	-14.70	-47.82	-62.60	N/A	33.12	20.00	-13.12	T4	2.4, 2.2					
		684	-14.53	-47.97			33.44	20.00	-13.44	T4						
		1013	-7.30	-49.69	-63.19	2.00	42.39	20.00	-22.39	T4						
	Axial	384	-7.35	-48.88		2.00	41.53	20.00	-21.53	T4	2.4, 3.0					
Cellular		777	-7.15	-48.37		2.00	41.22	20.00	-21.22	T4						
Cenular		1013	-14.62	-47.34			32.72	20.00	-12.72	T4						
	Radial	384	-14.17	-47.64	-62.60	-62.60	-62.60	-62.60	-62.60	-62.60	N/A	33.47	20.00	-13.47	T4	2.4, 2.2
		777	-14.26	-45.49			31.23	20.00	-11.23	T4						
		25	-7.45	-49.20		2.00	41.75	20.00	-21.75	T4						
	Axial	600	-7.81	-50.58	-63.19	2.00	42.77	20.00	-22.77	T4	2.4, 3.0					
PCS		1175	-7.56	-50.17		2.00	42.61	20.00	-22.61	T4						
		25	-14.82	-47.09			32.27	20.00	-12.27	T4						
	Radial	600	-14.62	-48.13	-62.60		33.51	20.00	-13.51	T4	2.4, 2.2					
	read	1175	-14.81	-48.40			33.59	20.00	-13.59	T4	_					

Table 9-2 Raw Data Results for CDMA

Table 9-3 Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		128	-6.07	-31.76		1.29	25.69	20.00	-5.69	T3		
	Axial	190	-6.14	-30.50	-63.55	1.30	24.36	20.00	-4.36	Т3	2.4, 3.0	
GSM850		251	-6.01	-28.20		1.21	22.19	20.00	-2.19	T3		
GSINIOSU		128	-6.46	-32.27			25.81	20.00	-5.81	Т3		
	Radial	190	-6.38	-30.66	-62.60	-62.60 N/A	24.28	20.00	-4.28	T3	2.4, 2.2	
		251	-6.29	-28.69			22.40	20.00	-2.40	Т3		
		512	-5.98	-35.71		1.41	29.73	20.00	-9.73	T3		
	Axial	661	-6.07	-33.84	-63.55	1.30	27.77	20.00	-7.77	T3	2.4, 3.0	
GSM1900		810	-6.03	-31.72		1.32	25.69	20.00	-5.69	T3		
G3W1900		512	-6.27	-40.23			33.96	20.00	-13.96	T4		
	Radial	661	-6.25	-39.97	-62.60	-62.60	-62.60 N/A	33.72	20.00	-13.72	T4	2.4, 2.2
		810	-6.17	-39.65			33.48	20.00	-13.48	T4		

Table 9-4 Raw Data Results for UMTS

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		4132	-7.50	-56.30		2.00	48.80	20.00	-28.80	T4	
	Axial	4183	-7.47	-57.24	-63.55	2.00	49.77	20.00	-29.77	T4	2.4, 3.0
UMTS V		4233	-7.45	-56.59		2.00	49.14	20.00	-29.14	T4	
UNITS V		4132	-7.60	-55.20			47.60	20.00	-27.60	T4	
	Radial	4183	-7.59	-55.07	-62.60	N/A	47.48	20.00	-27.48	T4	2.4, 2.2
		4233	-7.59	-55.09			47.50	20.00	-27.50	T4	
		1312	-7.49	-57.12	-63.55	2.00	49.63	20.00	-29.63	T4	
	Axial	1412	-7.53	-56.96		2.00	49.43	20.00	-29.43	T4	2.4, 3.0
UMTS IV		1513	-7.49	-56.81		2.00	49.32	20.00	-29.32	T4	
UNITSIV		1312	-7.63	-55.08		50 N/A	47.45	20.00	-27.45	T4	
	Radial	1412	-7.63	-55.02	-62.60		47.39	20.00	-27.39	T4	2.4, 2.2
		1513	-7.62	-55.03			47.41	20.00	-27.41	T4	
		9262	-7.57	-56.79		2.00	49.22	20.00	-29.22	T4	
	Axial	9400	-7.49	-56.78	-63.55	2.00	49.29	20.00	-29.29	T4	2.4, 3.0
UMTSII		9538	-7.46	-56.80	-	2.00	49.34	20.00	-29.34	T4	
UMISI		9262	-7.65	-55.27			47.62	20.00	-27.62	T4	
	Radial	9400	-7.67	-54.98	-62.60	2.60 N/A	47.31	20.00	-27.31	T4	2.4, 2.2
		9538	-7.66	-55.18			47.52	20.00	-27.52	T4	

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 31 of 86
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M 04/17/2018

	Raw Data Results for LTE B12																	
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates						
		10MHz	23095	-9.09	-43.08		2.00	33.99	20.00	-13.99	T4							
Axial	5MHz	23095	-9.05	-44.72	-63.55	2.00	35.67	20.00	-15.67	T4	2.4. 3.0							
	3MHz	23095	-9.01	-46.28		1.99	37.27	20.00	-17.27	T4	2.4, 3.0							
LTE Band	LTE Band	1.4MHz	23095	-8.94	-47.48		2.00	38.54	20.00	-18.54	T4							
12		10MHz	23095	-9.03	-47.78			38.75	20.00	-18.75	T4							
Radial	5MHz	23095	-9.11	-47.68	-62.60	-62.60	-62.60	-62.60	-62.60		-47.68		N/A	38.57	20.00	-18.57	T4	2.4.2.2
	3MHz	23095	-9.12	-49.04						IN/A	39.92	20.00	-19.92	T4	2.4, 2.2			
	1.4MHz	23095	-9.19	-50.16			40.97	20.00	-20.97	T4								

Table 9-5 Raw Data Results for LTE B12

Table 9-6Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates	
	Axial	10MHz	23230	-8.81	-40.52	-63.55	2.00	31.71	20.00	-11.71	T4	2.4. 3.0	
LTE Band	Anai	5MHz	23230	-9.14	-43.02	-03.55	2.00	33.88	20.00	-13.88	T4	2.4, 3.0	
13	Radial	10MHz	23230	-9.09	-46.03	-62.60	N/A	36.94	20.00	-16.94	T4	2.4.2.2	
	Natial	5MHz	23230	-9.13	-47.39	-02.00	IWA	38.26	20.00	-18.26	T4	2.4, 2.2	

Table 9-7

Raw Data Results for LTE B26

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates	
		15MHz	26865	-9.00	-45.42		2.00	36.42	20.00	-16.42	T4		
		10MHz	26865	-9.24	-46.06		2.00	36.82	20.00	-16.82	T4		
Axial	5MHz	26865	-8.93	-45.21	-63.55	2.00	36.28	20.00	-16.28	T4	2.4, 3.0		
		3MHz	26865	-8.89	-45.45		2.00	36.56	20.00	-16.56	T4		
LTE Band		1.4MHz	26865	-9.18	-43.65		2.00	34.47	20.00	-14.47	T4		
26		15MHz	26865	-9.05	-48.59			39.54	20.00	-19.54	T4		
		10MHz	26865	-9.07	-49.47	-62.60	1		40.40	20.00	-20.40	T4	
	Radial	5MHz	26865	-9.15	-47.76		N/A	38.61	20.00	-18.61	T4	2.4, 2.2	
		3MHz	26865	-9.03	-48.59				39.56	20.00	-19.56	T4	
		1.4MHz	26865	-8.92	-46.77			37.85	20.00	-17.85	T4		

Table 9-8Raw Data Results for LTE B66

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	132322	-9.07	-46.09		2.00	37.02	20.00	-17.02	T4	
		15MHz	132322	-8.99	-47.76		2.00	38.77	20.00	-18.77	T4	
	Axial	10MHz	132322	-9.05	-48.12	-63.55	1.98	39.07	20.00	-19.07	T4	2.4, 3.0
Axiai	5MHz	132322	-8.99	-48.19	-03.55	2.00	39.20	20.00	-19.20	T4	2.4, 3.0	
		3MHz	132322	-9.12	-48.05		2.00	38.93	20.00	-18.93	T4	
LTE Band		1.4MHz	132322	-8.86	-48.92		2.00	40.06	20.00	-20.06	T4	
66		20MHz	132322	-9.09	-50.64			41.55	20.00	-21.55	T4	
		15MHz	132322	-9.24	-48.96			39.72	20.00	-19.72	T4	
	Padial	10MHz	132322	-9.25	-51.12	-62.60	-62.60 N/A	41.87	20.00	-21.87	T4	2.4.2.2
Radial	Naulai	5MHz	132322	-9.50	-51.34		INA	41.84	20.00	-21.84	T4	2.4, 2.2
		3MHz	132322	-9.04	-51.25		15	42.21	20.00	-22.21	T4	
	1.4MHz	132322	-9.37	-50.46			41.09	20.00	-21.09	T4		

Table 9-9Raw Data Results for LTE B25

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	26365	-9.09	-42.96		2.00	33.87	20.00	-13.87	T4	
		15MHz	26365	-8.77	-42.95		2.00	34.18	20.00	-14.18	T4	
	Axial	10MHz	26365	-9.07	-44.53	-63.55	2.00	35.46	20.00	-15.46	T4	2.4. 3.0
	Axiai	5MHz	26365	-9.20	-44.38	-03.55	2.00	35.18	20.00	-15.18	T4	2.4, 3.0
		3MHz	26365	-8.77	-44.75		2.00	35.98	20.00	-15.98	T4	
LTE Band		1.4MHz	26365	-9.18	-45.10		2.00	35.92	20.00	-15.92	T4	
25		20MHz	26365	-9.53	-49.24	4 7 0 3 -62.60		39.71	20.00	-19.71	T4	
		15MHz	26365	-9.12	-49.47			40.35	20.00	-20.35	T4	
	Radial	10MHz	26365	-9.24	-48.60		N/A	39.36	20.00	-19.36	T4	2.4.2.2
	rvadiai	5MHz	26365	-9.15	-49.03		IV/A	39.88	20.00	-19.88	T4	2.4, 2.2
		3MHz	26365	-9.33	-49.10			39.77	20.00	-19.77	T4	
		1.4MHz	26365	-9.16	-49.90			40.74	20.00	-20.74	T4	

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 32 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 52 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M

	Raw Data Results for LTE B41 Power Class 3														
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates			
		20MHz	40620	-8.22	-38.14		2.00	29.92	20.00	-9.92	Т3				
	Axial	15MHz	40620	-8.25	-38.53	-63.19	2.00	30.28	20.00	-10.28	T4	2.4. 3.0			
		10MHz	40620	-8.41	-38.55		2.00	30.14	20.00	-10.14	T4	2.4, 3.0			
LTE Band		5MHz	40620	-8.51	-38.77		2.00	30.26	20.00	-10.26	T4				
41		20MHz	40620	-8.96	-42.03	3 7 -62 60		33.07	20.00	-13.07	T4				
	Radial	15MHz	40620	-9.19	-43.17		7		33.98	20.00	-13.98	T4	2.4.2.2		
	Radiai	10MHz	40620	-9.42	-43.32		-62.60 N/A	33.90	20.00	-13.90	T4	2.4, 2.2			
		5MHz	40620	-9.11	-43.48			34.37	20.00	-14.37	T4				

Table 9-10 Raw Data Results for LTE B41 Power Class 3

Table 9-11Raw Data Results for LTE B41 Power Class 2

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	41490	-8.45	-35.58		2.00	27.13	20.00	-7.13	Т3	
		20MHz	41055	-8.44	-37.26		1.90	28.82	20.00	-8.82	Т3	
		20MHz	40620	-8.73	-34.18		2.00	25.45	20.00	-5.45	Т3	
	Axial	20MHz	40185	-8.39	-37.04	-63.19	2.00	28.65	20.00	-8.65	Т3	2.4, 3.0
	Avidi	20MHz	39750	-8.47	-35.46	-03.19	2.00	26.99	20.00	-6.99	Т3	2.4, 3.0
	-	15MHz	40620	-8.63	-36.97		2.00	28.34	20.00	-8.34	Т3	
		10MHz	40620	-8.72	-34.98		1.93	26.26	20.00	-6.26	Т3	
LTE Band		5MHz	40620	-8.60	-35.12		2.00	26.52	20.00	-6.52	Т3	
41		20MHz	40620	-8.98	-36.84			27.86	20.00	-7.86	T3	
		15MHz	40620	-9.19	-37.24			28.05	20.00	-8.05	Т3	
		10MHz	41490	-9.25	-40.49			31.24	20.00	-11.24	T4	
	Radial	10MHz	41055	-9.27	-42.86	62.60	NI/A	33.59	20.00	-13.59	T4	2.4, 2.2
	NaGIAI	10MHz	40620	-9.27	-37.09	-62.60 7	-62.60 N/A	27.82	20.00	-7.82	Т3	2.4, 2.2
		10MHz	40185	-8.94	-41.37			32.43	20.00	-12.43	T4	
		10MHz	39750	-9.01	-38.53			29.52	20.00	-9.52	Т3	
		5MHz	40620	-9.32	-37.81			28.49	20.00	-8.49	Т3	

Table 9-12 Raw Data Results for 2.4GHz WIFI

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	6	-6.67	-50.34	-63.19	2.00	43.67	20.00	-23.67	T4	2.4, 3.0
IEEE		1	-12.96	-40.67			27.71	20.00	-7.71	Т3	
802.11b	Radial	6	-13.02	-40.22	-64.63	N/A	27.20	20.00	-7.20	T3	2.4, 2.2
		11	-13.07	-41.92			28.85	20.00	-8.85	T3	
		1	-6.58	-50.01		2.00	43.43	20.00	-23.43	T4	
IEEE	Axial	6	-6.62	-50.11	-63.19	2.00	43.49	20.00	-23.49	T4	2.4, 3.0
802.11g		11	-6.71	-50.48		2.00	43.77	20.00	-23.77	T4	
	Radial	6	-12.95	-44.46	-64.63	N/A	31.51	20.00	-11.51	T4	2.4, 2.2
IEEE	Axial	6	-6.96	-50.54	-63.19	2.00	43.58	20.00	-23.58	T4	2.4, 3.0
802.11n	Radial	6	-13.39	-43.26	-64.63	N/A	29.87	20.00	-9.87	T3	2.4, 2.2
IEEE	Axial	6	-6.63	-50.70	-63.19	2.00	44.07	20.00	-24.07	T4	2.4, 3.0
802.11ac	Radial	6	-14.24	-45.41	-64.63	N/A	31.17	20.00	-11.17	T4	2.4, 2.2

Table 9-13Raw Data Results for 5GHz WIFI 802.11a

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	1	36	-6.66	-49.29		2.00	42.63	20.00	-22.63	T4	
		20MHz	1	40	-6.88	-49.35		2.00	42.47	20.00	-22.47	T4	
	Axial	20MHz	1	48	-6.67	-50.04	-63.19	2.00	43.37	20.00	-23.37	T4	2.4, 3.0
	AAldi	20MHz	2A	56	-6.65	-49.75	-03.19	2.00	43.10	20.00	-23.10	T4	2.4, 0.0
		20MHz	2C	120	-6.66	-49.87		2.00	43.21	20.00	-23.21	T4	
IEEE		20MHz	3	157	-6.68	-49.89		2.00	43.21	20.00	-23.21	T4	
802.11a													
002.114		20MHz	1	40	-13.10	-44.94	1		31.84	20.00	-11.84	T4	
		20MHz	2A	56	-13.14	-44.25			31.11	20.00	-11.11	T4	
	Radial	20MHz	2C	100	-13.19	-45.06	-64.63	-64.63 N/A	31.87	20.00	-11.87	T4	2.4.2.2
	Nadial	20MHz	2C	120	-13.22	-42.49	-04.03	IWA	29.27	20.00	-9.27	T3	2.4, 2.2
		20MHz	2C	144	-13.21	-45.06	06		31.85	20.00	-11.85	T4	
		20MHz	3	157	-13.22	-44.84			31.62	20.00	-11.62	T4	

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 33 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 55 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M

	Raw Data Results for 5GHz WIFI 802.11n														
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates		
	Axial	40MHz	1	38	-6.54	-49.61	-63.19	2.00	43.07	20.00	-23.07	T4	2.4.3.0		
IEEE		20MHz	1	40	-6.45	-49.96	-03.19	2.00	43.51	20.00	-23.51	T4	2.4, 3.0		
802.11n															
002.1111	Radial	40MHz	1	38	-13.06	-45.42	C4 C2		32.36	20.00	-12.36	T4	2.4.2.2		
		20MHz	1	40	-13.06	45.16	-64.63	3 N/A	32.10	20.00	-12.10	Τ4	2.77, 2.2		

Table 9-14 Raw Data Results for 5GHz WIFI 802.11n

Table 9-15Raw Data Results for 5GHz WIFI 802.11ac

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Avial	40MHz	1	38	-6.65	-49.90	-63.19	2.00	43.25	20.00	-23.25	T4	2.4.3.0
Axial	Aviai	20MHz	1	40	-6.70	-49.70	-03.13	2.00	43.00	20.00	-23.00	T4	2.4, 0.0
IEEE 802.11ac													
002.1 IdC	Radial	40MHz	1	38	-13.15	-46.10 04.00	20	32.95	20.00	-12.95	T4	2.4.2.2	
Radia	Naulai	20MHz	1	40	-13.09	-45.22	-64.63	N/A	32.13	20.00	-12.13	T4	2.4, 2.2

Table 9-16 Raw Data Results for EvDO (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
Secondary Cellular	Axial	564	8.76	-55.40	-63.19	1.56	64.16	20.00	-44.16	T4	2.4, 3.0
EvDO	Radial	564	1.51	-53.87	-64.63	N/A	55.38	20.00	-35.38	T4	2.4, 2.2
Cellular	Axial	384	8.65	-54.91	-63.19	1.56	63.56	20.00	-43.56	T4	2.4, 3.0
EvDO	Radial	384	1.67	-53.16	-64.63	N/A	54.83	20.00	-34.83	T4	2.4, 2.2
PCS	Axial	600	8.30	-55.55	-63.19	1.54	63.85	20.00	-43.85	T4	2.4, 3.0
EvDO	Radial	600	1.49	-53.53	-64.63	N/A	55.02	20.00	-35.02	T4	2.4, 2.2

Table 9-17 Raw Data Results for EDGE (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
EDGE850	Axial	190	8.84	-35.77	-63.19	1.60	44.61	20.00	-24.61	T4	2.4, 3.0
EDGE050	Radial	190	1.63	-32.30	-64.63	N/A	33.93	20.00	-13.93	T4	2.4,2.2
DGE1900	Axial	661	8.04	-37.62	-63.19	1.50	45.66	20.00	-25.66	T4	2.4, 3.0
DGE 1900	Radial	661	1.51	-34.24	-64.63	N/A	35.75	20.00	-15.75	T4	2.4,2.2

Table 9-18 Raw Data Results for HSPA (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	8.19	-55.03	-63.19	1.49	63.22	20.00	-43.22	T4	2.4, 3.0
HOPA V	Radial	4183	1.33	-52.85	-64.63	N/A	54.18	20.00	-34.18	T4	2.4,2.2
HSPA IV	Axial	1412	8.28	-55.66	-63.19	1.56	63.94	20.00	-43.94	T4	2.4, 3.0
ISPAN	Radial	1412	1.39	-53.16	-64.63	N/A	54.55	20.00	-34.55	T4	2.4,2.2
HSPAII	Axial	9400	8.02	-55.76	-63.19	1.56	63.78	20.00	-43.78	T4	2.4, 3.0
HOPAI	Radial	9400	1.49	-52.34	-64.63	N/A	53.83	20.00	-33.83	T4	2.4,2.2

Table 9-19 Raw Data Results for LTE B13 (OTT VoIP)

	Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		Axial	10MHz	23230	8.21	-43.92	-63.19	1.54	52.13	20.00	-32.13	T4	
			5MHz	23255	8.12	-44.86		1.56	52.98	20.00	-32.98	T4	2.4. 3.0
L	TE Band		5MHz	23230	8.19	-43.65		1.60	51.84	20.00	-31.84	T4	2.4, 3.0
	13		5MHz	23005	8.40	-44.54		1.55	52.94	20.00	-32.94	T4	
		Padial	10MHz	23230	1.37	-45.60	-64.63	N/A	46.97	20.00	-26.97	T4	2.4.2.2
		Radial	5MHz	23230	1.46	-46.78	-04.03	DV/A	48.24	20.00	-28.24	T4	2.4,2.2

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 34 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 34 01 00
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M

		aw Dai	a Resi	uits io		D41 P	ower	JIASS ∡	2 (01))	
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	8.75	-31.76		1.58	40.51	20.00	-20.51	T4	
	Axial	15MHz	41490	8.59	-34.27	-63.19	1.59	42.86	20.00	-22.86	T4	
		15MHz	41055	8.40	-36.86		1.55	45.26	20.00	-25.26	T4	
		15MHz	40620	8.18	-32.26		1.50	40.44	20.00	-20.44	T4	2.4, 3.0
		15MHz	40185	8.47	-35.85		1.57	44.32	20.00	-24.32	T4	2.4, 3.0
		15MHz	39750	8.23	-32.54		1.56	40.77	20.00	-20.77	T4	
		10MHz	40620	8.20	-32.78		1.55	40.98	20.00	-20.98	T4	
LTE Band		5MHz	40620	8.49	-32.82		1.59	41.31	20.00	-21.31	T4	
41		20MHz	40620	1.49	-34.77			36.26	20.00	-16.26	T4	
		15MHz	41490	1.64	-37.32			38.96	20.00	-18.96	T4	
		15MHz	41055	1.63	-39.90			41.53	20.00	-21.53	T4	
	Radial	15MHz	40620	1.53	-34.45	-64.63	N/A	35.98	20.00	-15.98	T4	2.4,2.2
	NaGIAI	15MHz	40185	1.65	-39.08	-04.03	IVA	40.73	20.00	-20.73	T4	2.4,2.2
		15MHz	39750	1.68	-35.36	1		37.04	20.00	-17.04	T4]
		10MHz	40620	1.43	-35.42			36.85	20.00	-16.85	T4]
		5MHz	40620	1.46	-35.64			37.10	20.00	-17.10	T4	

Table 9-20 Raw Data Results for LTF B41 Power Class 2 (OTT VoIP)

Table 9-21 Raw Data Results for 2.4GHz WIFI (OTT VoIP)

					• • • • = •		••••		,		
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	6	8.33	-47.30	-63.19	1.58	55.63	20.00	-35.63	T4	2.4, 3.0
IEEE		1	1.42	-39.05			40.47	20.00	-20.47	T4	
802.11b	Radial	6	1.66	-36.51	-64.63	N/A	38.17	20.00	-18.17	T4	2.4, 2.2
		11	1.50	-38.16			39.66	20.00	-19.66	T4	
IEEE	Axial	6	8.77	-47.48	-63.19	1.56	56.25	20.00	-36.25	T4	2.4, 3.0
802.11g	Radial	6	1.27	-38.49	-64.63	N/A	39.76	20.00	-19.76	T4	2.4, 2.2
		1	8.53	-45.50		1.57	54.03	20.00	-34.03	T4	
IEEE	Axial	6	8.60	-46.15	-63.19	1.49	54.75	20.00	-34.75	T4	2.4, 3.0
802.11n		11	8.58	-46.44		1.55	55.02	20.00	-35.02	T4	
	Radial	6	1.43	-37.81	-64.63	N/A	39.24	20.00	-19.24	T4	2.4, 2.2
IEEE	Axial	6	8.43	-47.35	-63.19	1.57	55.78	20.00	-35.78	T4	2.4, 3.0
802.11ac	Radial	6	1.55	-44.08	-64.63	N/A	45.63	20.00	-25.63	T4	2.4, 2.2

Table 9-22

Raw Data Results for 5GHz WIFI 802.11a (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	20MHz	1	40	8.81	-43.52	-63.19	1.50	52.33	20.00	-32.33	T4	
		20MHz	2A	52	8.36	-43.71		1.58	52.07	20.00	-32.07	T4	
		20MHz	2A	56	8.37	-43.31		1.55	51.68	20.00	-31.68	T4	2.4.3.0
IEEE		20MHz	2A	64	8.76	-44.10		1.59	52.86	20.00	-32.86	T4	2.4, 3.0
802.11a		20MHz	2C	120	8.77	-43.63		1.57	52.40	20.00	-32.40	T4	
		20MHz	3	157	8.75	-43.34		1.56	52.09	20.00	-32.09	T4	
	Radial	20MHz	1	40	1.53	-40.12	-64.63	N/A	41.65	20.00	-21.65	T4	2.4, 2.2

Table 9-23 Raw Data Results for 5GHz WIFI 802.11n (OTT VoIP)

											,		
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	40MHz	1	38	8.58	-44.39	-63.19	1.57	52.97	20.00	-32.97	T4	2.4. 3.0
	Avidi	20MHz	1	40	8.77	-44.07	-03.19	1.58	52.84	20.00	-32.84	T4	2.4, 3.0
		40MHz	1	38	1.52	-40.15			41.67	20.00	-21.67	T4	
		20MHz	1	40	1.47	-39.85			41.32	20.00	-21.32	T4	
IEEE		40MHz	2A	54	1.47	-39.08			40.55	20.00	-20.55	T4	
802.11n		20MHz	2A	56	1.58	-38.78			40.36	20.00	-20.36	T4	
	Radial	40MHz	2C	118	1.48	-38.92	-64.63	N/A	40.40	20.00	-20.40	T4	2.4, 2.2
		20MHz	2C	120	1.41	-39.14			40.55	20.00	-20.55	T4	
		40MHz	3	151	1.45	-38.81			40.26	20.00	-20.26	T4	
		40MHz	3	159	1.45	-39.03]		40.48	20.00	-20.48	T4	
		20MHz	3	157	1.53	-38.98			40.51	20.00	-20.51	T4	

Table 9-24

Raw Data Results for 5GHz WIFI 802.11ac (OTT VoIP)	Raw Data	Results for	5GHz WIFI	802.11ac	(OTT VoIP)
----------------------------------------------------	----------	-------------	-----------	----------	------------

				Juin	1.000				002.1	1001					
	Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		Axial	40MHz	1	38	8.78	-46.39	-63.19	1.60	55.17	20.00	-35.17	T4	2.4, 3.0	
	IEEE	Aviai	20MHz	1	40	8.77	-45.56	-03.13	1.60	54.33	20.00	-34.33	T4	2.4, 0.0	
	802.11ac														
		Radial	40MHz	1	38	1.48	-43.22	-64.63	N/A	44.70	20.00	-24.70	T4	2.4.2.2	
		Hadida	20MHz	1	40	1.44	-43.33	04.00		44.77	20.00	-24.77	T4	2.1, 2.2	
FCC ID: ZNFQ85	G					HAC (T-	COIL) TE	ST REP	ORT		(🕑 LG		Approved by: Quality Manager	
Filename:		Fest Dates:				DUT Type:								Page 35 of 86	
1M1812060222-1	F 12	2/31/2018	3 - 01/2	24/2019		Portat	ole Hands	et						3	
© 2019 PCTEST E	naineer	ng Labor	ratory. Inc												REV 3.2.M

2019 PCTEST Engineering Laboratory, Inc.

04/17/2018

П. **Test Notes**

A. General

- 1. Phone Condition: Mute on; Backlight off; Nominal Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone→Call Settings→Additional Settings→Hearing aids) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled for 2G/3G/4G modes while testing.
- 6. Licensed data modes and Bluetooth were disabled for WIFI modes while testing.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

B. CDMA

- 1. Power Configuration: Power Control Bits = "All Up"
- Vocoder Configuration: RC1/SO3 (CDMA EVRC)

C. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);
- D. UMTS
 - 1. Power Configuration: TPC= "All 1s";
 - 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);
- E. LTE FDD
 - 1. Power Configuration: TPC = "Max Power"
 - 2. Radio Configuration: 16QAM, 1RB, 0RB offset
 - 3. Vocoder Configuration: WB AMR 6.60kbps
 - 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 13 at 10MHz is the worst-case for both the Axial and Radial probe orientations but only supports 1 channel. Therefore, no additional tests were performed.

F. LTE TDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Power Class 3 Uplink-Downlink configuration: 1
- 4. Power Class 2 Uplink-Downlink configuration: 2
- 5. Vocoder Configuration: WB AMR 6.60kbps
- 6. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, mid-high and high channels for those combinations, LTE Band 41 (Power Class 2) at 20MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 10MHz bandwidth is the worst-case for the Radial probe orientation.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 36 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 30 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M


- G. WIFI
 - 1. Radio Configuration
 - a. 802.11b: CCK, 11Mbps
 - b. 802.11g/a: BPSK, 6Mbps
 - c. 802.11n/ac 20MHz: BPSK, 6.5Mbps
 - d. 802.11n/ac 40MHz: BPSK, 13.5Mbps
 - 2. Vocoder Configuration: WB AMR 6.6kbps
 - 3. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. 802.11g is the worst-case for the Axial probe orientation. 802.11b is the worst-case for the Radial probe orientation.
 - 4. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. 802.11a (U-NII 1) is the worst-case for the Axial probe orientation. 802.11a (U-NII 2C) is the worst-case for the Radial probe orientation.
- H. OTT VoIP
 - 1. Vocoder Configuration: 64kbps
 - 2. EvDO Configuration
 - a. Revision: A
 - 3. EDGE Configuration
 - a. MCS Index: 7
 - b. Number of TX slots: 2
 - 4. HSPA Configuration:
 - a. Release: 6
 - b. 3GPP 34.121 Subtest 1
 - 5. LTE FDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 0RB offset
 - c. LTE Band 13 was the worst-case band from Table 7-6 and was used to test both Axial and Radial probe orientations.
 - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 13 at 5MHz is the worst-case for the Axial probe orientation. LTE Band 13 at 10MHz bandwidth is the worst-case for the Radial probe orientation, but only supports 1 channel. Therefore, no additional tests were performed.
 - 6. LTE TDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 0RB offset
 - c. Power Class 2 Uplink-Downlink configuration: 2
 - d. LTE Band 41 (Power Class 2) was the worst-case band from Table 7-7 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Powers Class 2) at 15MHz is the worst-case for both the Axial and Radial probe orientations.
 - 7. WIFI Configuration:
 - a. Radio Configuration
 - i. 802.11b: CCK, 11Mbps
 - ii. 802.11g/a: BPSK, 6Mbps
 - iii. 802.11n/ac 20MHz: BPSK, 6.5Mbps
 - iv. 802.11n/ac 40MHz: BPSK, 13.5Mbps

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 37 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 37 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				


^{04/17/2018}

- b. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. 802.11n is the worst-case for the Axial probe orientation. 802.11b is the worst-case for the Radial probe orientation.
- c. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. 802.11a (U-NII 2A) is the worst-case for the Axial probe orientation. 802.11n 40MHz (U-NII 3) is the worst-case for the Radial probe orientation.


III. 1 kHz Vocoder Application Check



This model was verified to be within the linear region for ABM1 measurements at -18 dBm0 for CDMA. This measurement was taken in the axial configuration above the maximum location.

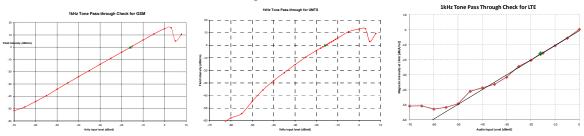

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 38 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 50 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				
				04/17/2018

IV. T-Coil Validation Test Results

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.799	PASS
Environmental Noise	< -58 dBA/m	-63.55	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

 Table 9-25

 Helmholtz Coil Validation Table of Results – 12/31/2018

Table 9-26Helmholtz Coil Validation Table of Results – 1/14/2019


Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.758	PASS
Environmental Noise	< -58 dBA/m	-63.19	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.032	PASS
Environmental Noise	< -58 dBA/m	-62.60	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

Table 9-27Helmholtz Coil Validation Table of Results – 1/21/2019

Item	Target	Result	Verdict
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.994	PASS
Environmental Noise	< -58 dBA/m	-64.63	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 39 of 86
© 2019 PCTEST Engineering	REV 3.2.M 04/17/2018			

V. ABM1 Magnetic Field Distribution Scan Overlays

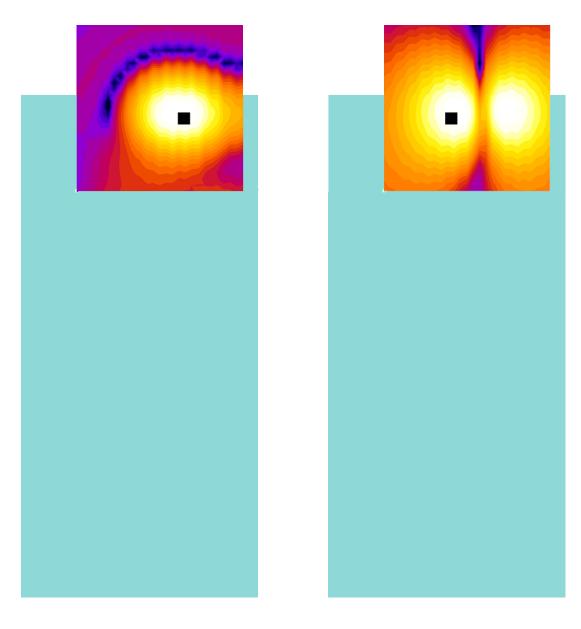

Axial Radial (Transverse) Figure 9-1 T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 40 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 40 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				

10. MEASUREMENT UNCERTAINTY

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)					17.7%	0.71	
Expanded uncertainty (k=2), 95% confidence level					35.3%	1.31	

Table 10-1 Uncertainty Estimation Table

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.

 All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 41 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 41 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				
	-			04/17/2018

11. EQUIPMENT LIST

Table 11-1 Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Listen	SoundConnect	Microphone Power Supply	9/6/2018	Annual	9/6/2020	0899-PS150
Listen	SoundCheck	Acoustic Analyzer System - Audio Interface	9/6/2018	Biennial	9/6/2020	23792992
Listen	SoundCheck	Acoustic Analyzer System - Laptop	9/6/2018	Biennial	9/6/2020	2655082910
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/19/2018	Annual	1/19/2019	162125
Rohde & Schwarz	CMW500	Radio Communication tester	8/3/2018	Annual	8/3/2019	140144
Rohde & Schwarz	CMW500	Radio Communication tester	4/20/2018	Annual	4/20/2019	128635
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	21053
TEM	Axial T-Coil Probe	Axial T-Coil Probe	9/19/2018	Annual	9/19/2020	TEM-1123
TEM	Radial T-Coil Probe	Radial T-Coil Probe	9/19/2018	Annual	9/19/2020	TEM-1129
TEM	Helmholtz Coil	Helmholtz Coil	10/10/2018	Annual	10/10/2020	SBI 1052
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM		HAC Positioner	N/A		N/A	N/A

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 42 of 86
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M 04/17/2018

12. TEST DATA

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 43 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 45 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				

© 2019 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018

12/31/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil – SN: SBI 1052 Type: HH Coil

Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Helmholtz Coil – SN: SBI 1052; Calibrated: 10/10/2018

Noise Spectrum

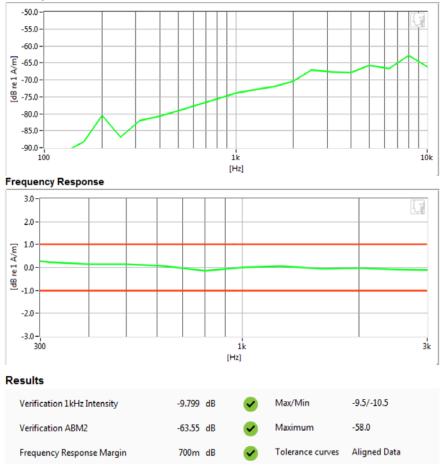

PCTEST 2018

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 44 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		1 age ++ 01 00
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M
				04/17/2018

1/14/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil – SN: SBI 1052 Type: HH Coil

Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1123; Calibrated: 09/19/2018

Helmholtz Coil – SN: SBI 1052; Calibrated: 10/10/2018

Noise Spectrum

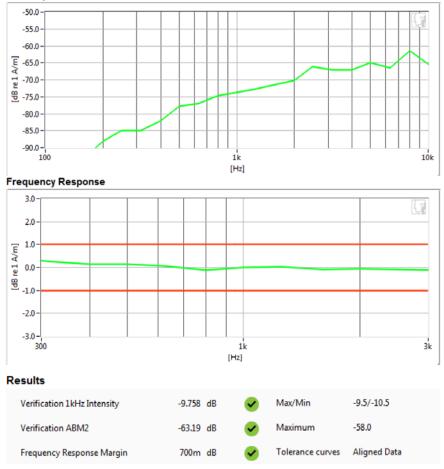

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 45 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 45 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				

1/14/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil - SN: SBI 1052

Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

• Helmholtz Coil – SN: SBI 1052; Calibrated: 10/10/2018

Noise Spectrum

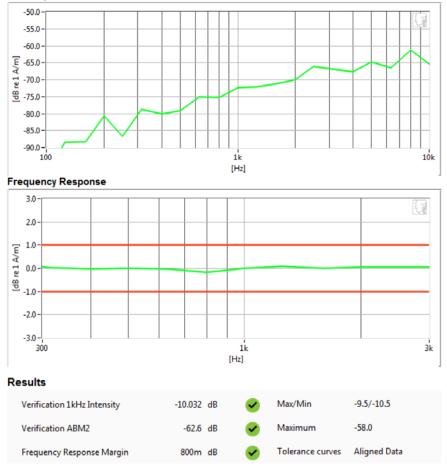

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 46 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 40 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M

1/21/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil - SN: SBI 1052

Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Helmholtz Coil – SN: SBI 1052; Calibrated: 10/10/2018

Noise Spectrum

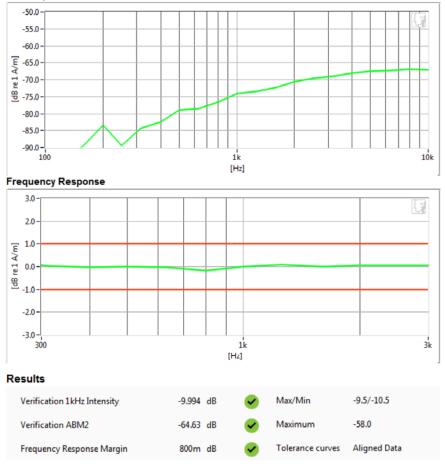

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 47 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		1 age 47 01 00
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M
				04/17/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: CDMA Secondary Cellular
- Channel: 564Speech Signal: ITU-T P.50 Artificial Voice



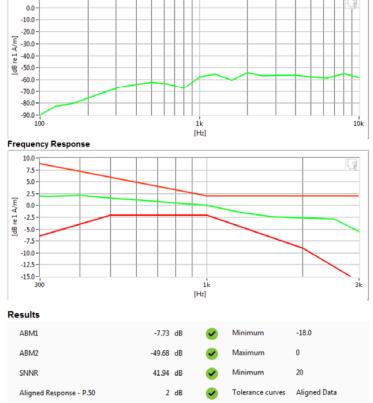

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 48 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 40 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:


٠

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: CDMA Cellular
 - Channel: 777
- Speech Signal: ITU-T P.50 Artificial Voice



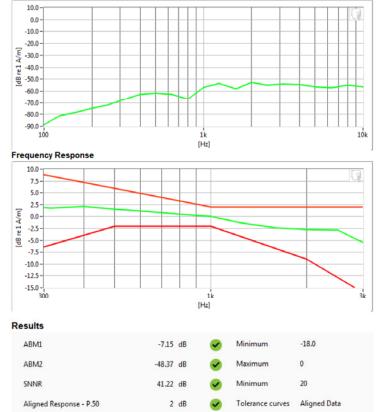

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 49 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 49 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:


٠

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: CDMA PCS
 - Channel: 25
- Speech Signal: ITU-T P.50 Artificial Voice



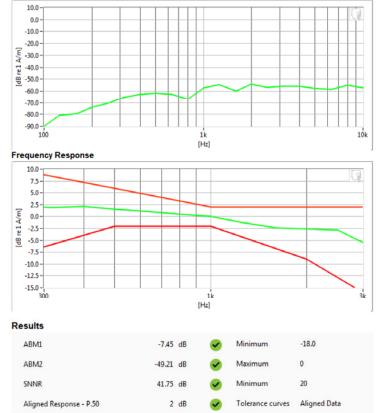

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 50 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 50 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: GSM 850
- Channel: 251

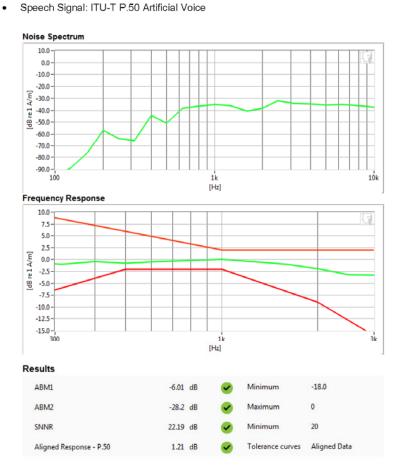

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 51 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Tage 51 01 00
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M
				04/17/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: GSM 1900
- Channel: 810
- Speech Signal: ITU-T P.50 Artificial Voice



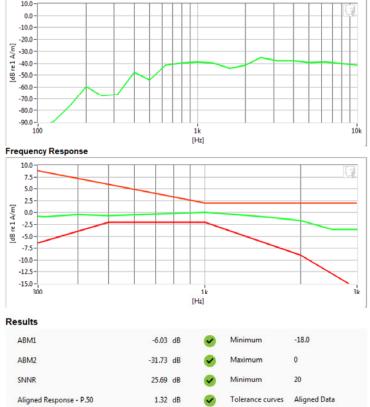

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 52 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 52 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: UMTS Band V
- Channel: 4132
- Speech Signal: ITU-T P.50 Artificial Voice



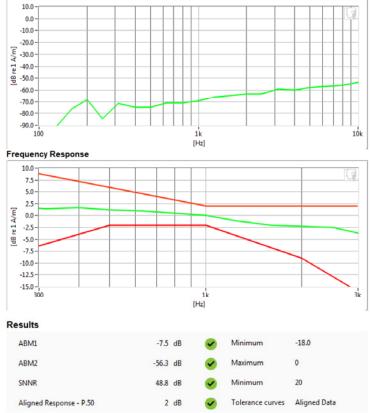

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 53 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 55 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

٠

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: UMTS Band IV
 - Channel: 1513
- Speech Signal: ITU-T P.50 Artificial Voice





PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 54 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 54 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: UMTS Band II
- Channel: 9262
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

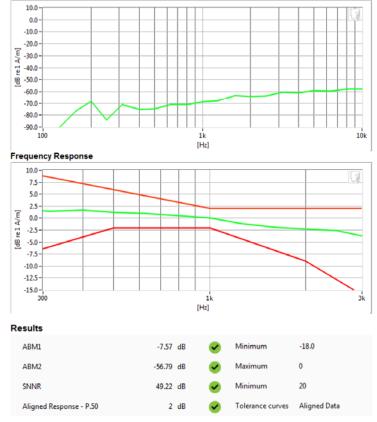

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 55 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 55 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: LTE FDD Band 13
- Bandwidth: 10MHz
- Channel: 23230
- Speech Signal: ITU-T P.50 Artificial Voice

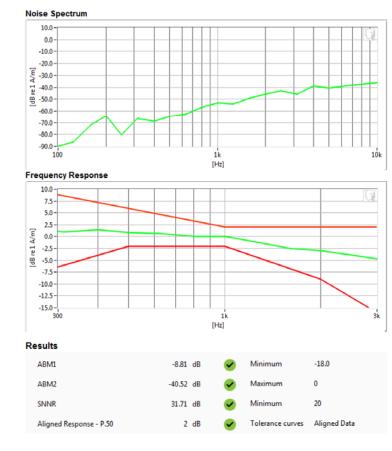

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 56 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 50 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: LTE TDD Band 41 (PC2)
- Bandwidth: 20MHz
- Channel: 40620
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

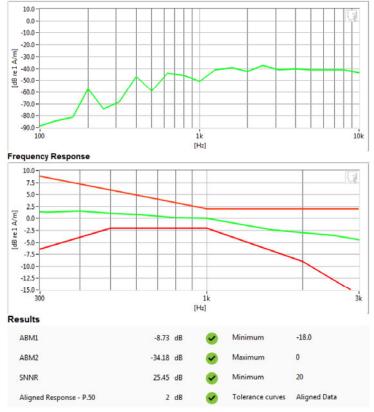

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 57 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 57 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11g
- Channel: 1
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

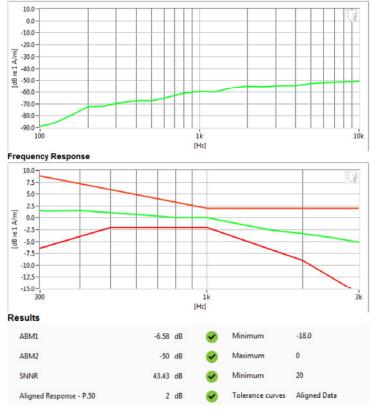

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 58 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 56 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: 5GHz WIFI
- Standard: IEEE 802.11a (U-NII 1)
- Bandwidth: 20MHz
- Channel: 40
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

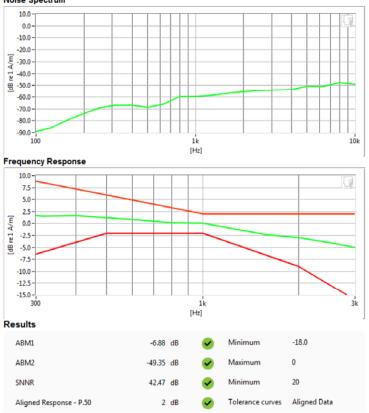

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 59 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 59 01 60
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M

© 2019 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- VolP Application: Google Duo
- Mode: LTE TDD Band 41 (PC2) ٠
- ٠ Bandwidth: 15MHz
- Channel: 40620 ٠
- Speech Signal: ITU-T P.50 Artificial Voice

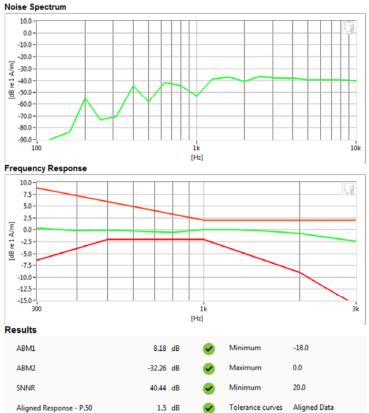

PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 60 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 00 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M

© 2019 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: CDMA Secondary Cellular
- Channel: 476

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 61 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		5
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M
	-			04/17/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: CDMA Cellular
- Channel: 777

Noise Spectrum



PCTEST 2019

	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Test Dates:	DUT Type:		Page 62 of 86	
12/31/2018 - 01/24/2019	Portable Handset		_	
© 2019 PCTEST Engineering Laboratory, Inc.				
	Test Dates: 12/31/2018 - 01/24/2019	Test Dates: DUT Type: 12/31/2018 - 01/24/2019 Portable Handset	Test Dates: DUT Type: 12/31/2018 - 01/24/2019 Portable Handset	



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: CDMA PCS
- Channel: 25

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 63 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		5
© 2019 PCTEST Engineering	REV 3.2.M 04/17/2018			



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: GSM 850
- Channel: 251

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 64 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		1 ugo o i oi oo
© 2019 PCTEST Engineering	REV 3.2.M 04/17/2018			



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: GSM 1900
- Channel: 810

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 65 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		C
© 2019 PCTEST Engineering	REV 3.2.M 04/17/2018			



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: UMTS Band V
- Channel: 4183

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 66 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		J
© 2019 PCTEST Engineering	REV 3.2.M 04/17/2018			



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: UMTS Band IV
- Channel: 1412

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 67 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		. ago or or oo
© 2019 PCTEST Engineering Laboratory, Inc.				REV 3.2.M 04/17/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: UMTS Band II
- Channel: 9400

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 68 of 86
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M 04/17/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: LTE FDD Band 13
- Bandwidth: 10MHz
- Channel: 23230

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 69 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M
	-			04/17/2018



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: LTE TDD Band 41 (PC2)
- Bandwidth: 10MHz
- Channel: 40620

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 70 of 86
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M 04/17/2018

1/21/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 6

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 71 of 86
© 2019 PCTEST Engineering		i onabie manaser		REV 3.2.M 04/17/2018

1/21/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- Mode: 5GHz WIFI
- Standard: IEEE 802.11a (U-NII 2C)
- Bandwidth: 20MHz
- Channel: 120

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 72 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		_
© 2019 PCTEST Engineering I	Laboratory, Inc.			REV 3.2.M
	-			04/17/2018

1/24/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFQ850QM

Type: Portable Handset Serial: 00307

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

- VoIP Application: Google Duo
- Mode: EDGE 850
- Channel: 190

Noise Spectrum



PCTEST 2019

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 73 of 86
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M 04/17/2018

13. CALIBRATION CERTIFICATES

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 74 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 74 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M

© 2019 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

04/17/2018

West (Caldwell Cal	ibratio	n Laborato	ories Inc.	
Cert	ificate	of (Calibi	ration	
	AXIA	L T COIL PF	OBE		
	Manufactured Model No: Serial No: Calibration Re	by:	TEM CONSULT AXIAL T COIL F TEM-1123 29156		
	Campration Re	Submitted B			
	Customer:	Andrew	-		Ś
	Company:	PCTest E	ngineering Lab		1000 1000 1000 1000 1000 1000 1000 100
	Address:	6660-B D Columbia	obbin Road a	MD 21045	
This document certifi submitter.	Standards and Techno es that the instrument ation Laboratories Pr	met the follo	-	C .	
Upon receipt for Cali	bration, the instrumer	it was found	to be:	12/4/2018	
Within	1 (X)			147/2010	
The information supp West Caldwell Calibr	ated specification. See Jied relates to the cali ation Laboratories' c 662A, ANSI/NCSL Z	brated item li dibration con	isted above. trol system meets t	he requirements, ISO	
Note: With this Certificate	, Report of Calibration is i	ncluded.	Approve	d by: Fc	
Calibration Date:	19-Sep-18		Felix Ch	ristopher (QA Mgr.)	
Certificate No:	29156 -2			VIEC 17025-2005	
QA Doc. #1051 Rev. 2.0 10/1/01	Certi	ficate Page 1 o		0/IEC 17025:2005	Ŕ
	Vest Caldwell Calibration	.			
uncompromised calibration	Laboratories,	, INC.	7920	on Lab. Cert. # 1533.01	

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 75 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 75 01 00
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M

HCATEMC_TEM-1123_Sep-19-2018



uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor NY 14564



ISO/IEC 17025: 2005

Calibration Lab. Cert. # 1533.01

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

REPORT OF CALIBRATION

libra	ation re	esults:								
		Probe Sen:	sitivity measured wit Helmholtz Coil;	h Helmhol	tz Coil		Refore &	& after data same	x .	
		the number of	turns on each coil:	10	No.		201010 0	and and came		
		••••	ach coil, in meters;	0.204	m		Lab	oratory Environment	:	
			coils, in amperes.;	0.08	А		А	mbient Temperature	: 22. 7	°C
		Helm	holtz Coil Constant;	7.09	A/m/V			Ambient Humidity	: 52.1	% RH
		Helmholtz	Coil magnetic field;	5.95	A/m			Ambient Pressure	99.326	kPa
								Calibration Date	: 19-Sep-2018	3
		P	robe Sensitivity at	1000	Hz.			Calibration Due	:	
			was	-59.89	dBV/A	/m		Report Number	: 2915	6-2
				1.013	mV/A/	m		Control Number		6
			Probe resistance	903	Ohms					
e e	ibove	listed instrum	ent meets or exceeds	the tested	manufac	cturer's sp	ecification	ıs.		
			rough NIST test numbers			34413-14				
			lbration: 0.30dB at 95% c	onfidence lev	el with a co	verage facto	r of k=2.			
ph	repres	sents Probes Freq	uency Response.							
					Axial Pro	be Respon	se		red Probe Resp.	1
	20 -		t	1				Weasu	red Flobe Resp.	
								Weasu	red Flobe Resp.	
	20 15							Weasu		
								Measu		
	15 -							Measu		
	15 -							Measu		
	15							Measu		
	15							Measu		
	15							Measu		
	15 10 5 0 -5									
	15									
	15 10 5 0 -5									
	15									
	15 - 10 - 5 - -5 - -10			En	eq. (Hz)	1000				

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Page 1 of 2

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M1812060222-12-R4.ZNF	Test Dates: 12/31/2018 - 01/24/2019	DUT Type: Portable Handset		Page 76 of 86
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M 04/17/2018

HCATEMC_TEM-1123_Sep-19-2018

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe Company: PCTest Enginering Lab for Model No.: Axial T Coil Probe

Serial No.: TEM-1123

Function Toler		nce	Measured values		
			Before	Out	Remarks
Probe Sensitivity at	1000 Hz.	dBV/A/m	-59.89		
······································	,	dB			
Probe Level Linearity		6	6.03		
	Ref. (0 dB)	0	0.00		
		-6	-6.03		
		-12	-12.05		
a gan gan an a		Hz			
Probe Frequency Response			-19.9		
		316			
		398			
		501	-6.0		
		631	-4.0		
		794	-2.0		
	Ref. (0 dB)	1000	0.0		
		1259	2.0		
		1585	4.0		
		1995	5.9		
		2512	7.9		
		3162	9.9		
		3981	11.9		
		5012	13.9		
		6310	15.9		
		7943	18.0		
		10000	20.1		
	Probe Sensitivity at	Probe Sensitivity at 1000 Hz. Probe Level Linearity Ref. (0 dB) Probe Frequency Response	Probe Sensitivity at 1000 Hz. dBV/A/m Probe Level Linearity 6 6 Ref. (0 dB) 0 -6 -12 -12 -12 Probe Frequency Response 100 126 158 200 251 316 398 501 631 794 -794 Ref. (0 dB) 1000 1259 1585 3981 501 6310 7943 1562	Before Probe Sensitivity at 1000 Hz. dBV/A/m -59.89 Probe Level Linearity 6 6.03 6 Ref. (0 dB) 0 0.00 -6 -6.03 -12 -12.05 -12 -12.05 Probe Frequency Response 100 -19.9 158 -15.9 200 -13.9 158 -15.9 200 -13.9 251 -11.9 316 -9.9 398 -7.9 316 -9.9 398 -7.9 501 -6.0 631 -4.0 794 -2.0 794 -2.0 Ref. (0 dB) 1000 0.0 1259 2.0 1565 4.0 1995 5.9 2512 7.9 3162 9.9 3981 11.9 3162 9.9 3981 11.9 5012 13.9 6310 15.9 6310 15.9 3162 9.9 3981 11.9 5012 13.9 6310 </td <td>Before Out Probe Sensitivity at 1000 Hz. dBV/A/m -59.89 -59.89 Probe Level Linearity 6 6.03 0.00 -6 Ref. (0 dB) 0 0.00 -6 -6.03 -12 -12 -12.05 -12 -12 Probe Frequency Response 100 -19.9 -158 -15.9 200 -13.9 -12 -11.9 -158 -15.9 200 -13.9 251 -11.9 -11.9 -11.9 -11.9 -11.9 -11.1 -11.9 -11.1 -11.9 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -</td>	Before Out Probe Sensitivity at 1000 Hz. dBV/A/m -59.89 -59.89 Probe Level Linearity 6 6.03 0.00 -6 Ref. (0 dB) 0 0.00 -6 -6.03 -12 -12 -12.05 -12 -12 Probe Frequency Response 100 -19.9 -158 -15.9 200 -13.9 -12 -11.9 -158 -15.9 200 -13.9 251 -11.9 -11.9 -11.9 -11.9 -11.9 -11.1 -11.9 -11.1 -11.9 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -11.1 -

Instruments used for c	alibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,287708	25-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,287708	25-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,287708	25-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/284413-14	25-Jul-2019

Cal. Date: 19-Sep-2018

Tested by: James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC


Page 2 of 2

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 77 of 86	
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage // 0100	
© 2019 PCTEST Engineering	© 2019 PCTEST Engineering Laboratory, Inc.				

Wort (tion Laboratories Inc.	
vv est C	laidweii Cambrai	tion Laboratories Inc.	
	· · · · · · · · · · · · · · · · · · ·		
Certi	ilcate oi	Calibration	
	for		
	RADIAL T CO		
	Manufactured by: Model No:	TEM CONSULTING LP RADIAL T COIL PROBE	
	Serial No: Calibration Recall No:	TEM-1129 29156	
	Submitt	ed By:	
	Customer: And	rew Harwell	
		est Engineering Lab -B Dobbin Road	
		mbia MD 21045	
National Institute of S	tandards and Technology or t	ed specification using standards traceable to t o accepted values of natural physical constants following specification upon its return to the	
West Caldwell Calibra	ation Laboratories Procedure	No. RADIAL T TEM C	
Upon receipt for Calil	pration, the instrument was for	und to be: VAH 12/4/2018	
Within	(X)	14-112010	
	ated specification. See attached lied relates to the calibrated it		
West Caldwell Calibra	ation Laboratories' calibration	c control system meets the requirements, ISO C Guide 25, ISO 9001:2008 and ISO 17025.	
Note: With this Certificate,	Report of Callbration is included.	Approved by: FC	
Calibration Date:	19-Sep-18	Felix Christopher (QA Mgr.)	
Certificate No:	29156 -1	ISO/IEC 17025:2005	
QA Doc. #1051 Rev. 2.0 10/1/01	Certificate Pag	e 1 of 1	
	Calibration		
uncompromised calibration 1575 State Route 96, Victor,	Laboratories, Inc. NY 14564, U.S.A.	Calibration Lab. Cert. # 1533.01	
Cameral O Calman	S. A. CONTRACTOR		

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 78 of 86	
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 70 01 00	
© 2019 PCTEST Engineering I	2019 PCTEST Engineering Laboratory, Inc.				

HCRTEMC_TEM-1129_Sep-19-2018

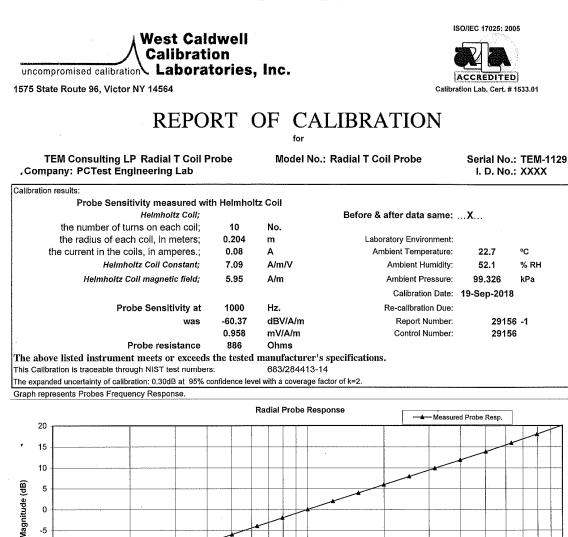

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure : Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISO 17025

 Cal. Date:
 19-Sep-2018
 Measurements performed by:
 James Zhu

 Calibrated on WCCL system type 9700
 James Zhu

 This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.
 Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 1 of 2

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 79 of 86	
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 79 01 00	
© 2019 PCTEST Engineering I	© 2019 PCTEST Engineering Laboratory, Inc.				

HCRTEMC_TEM-1129_Sep-19-2018

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab ^{for} Model No.: Radial T Coil Probe

Serial No.: TEM-1129

Test	Function	Tolera	Tolerance		Measured values		
	A 4 a			Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37			
	······		dB				
.0	Probe Level Linearity		6	6.03			
		Ref. (0 dB)	0	0.00			
			-6	-6.03			
			-12	-12.05			
			Hz				
6.0	Probe Frequency Response		100	-20.0			
			126	-17.9			
			158	-15.9			
			200	-14.0			
		251	-12.0				
			316	-10.0			
			398	-8.0			
			501	-6.0			
			631	-4.0			
			794	-2.0			
		Ref. (0 dB)	1000	0.0		·	
			1259	2.0			
			1585	4.0			
			1995	6.0			
			2512	7.9			
			3162	9.9			
			3981	11.9			
			5012	13.9			
			6310	15.9			
			7943	18.0			
			10000	20.1			

Instruments used for c	allbration:		Date of Cal.	Traceability No.	Due Date
' HP	34401A	S/N US360641	25-Jul-2018	,287708	25-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,287708	25-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,287708	25-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/284413-14	25-Jul-2019

Cal. Date: 19-Sep-2018

Tested by: James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 80 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage of 01 00
© 2019 PCTEST Engineering Laboratory, Inc.				

14. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 81 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Tage of biob
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M
				04/17/2018

15. **REFERENCES**

- 1. ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- 2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 82 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		Fage 02 01 00
© 2019 PCTEST Engineering I	_aboratory, Inc.			REV 3.2.M
				04/17/2018

- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFQ850QM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 83 of 86
1M1812060222-12-R4.ZNF	12/31/2018 - 01/24/2019	Portable Handset		·9
© 2019 PCTEST Engineering	Laboratory, Inc.			REV 3.2.M
				04/17/2018