



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : AI voice development kit
BRAND NAME : ESPRESSIF
MODEL NAME : ESP32-S3-BOX
FCC ID : Contains FCC ID : 2AC7Z-ESPS3WROOM1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jun. 24, 2022 ~ Jul. 08, 2022

The product was installed a module during the test: 2.4GHz Wi-Fi & BT IoT Module (Brand Name : ESPRESSIF, Model Name: ESP32-S3-WROOM-1, FCC ID: 2AC7Z-ESPS3WROOM1) during test.

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

***No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
3 TEST RESULT	11
3.1 Radiated Band Edges and Spurious Emission Measurement	11
3.2 AC Conducted Emission Measurement.....	15
3.3 Antenna Requirements	17
4 LIST OF MEASURING EQUIPMENT.....	18
5 UNCERTAINTY OF EVALUATION.....	19
APPENDIX A. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1N0920-02A	Rev. 01	Initial issue of report	Sep. 02, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	1
-	-	99% Bandwidth	-	Report only	1
-	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	1
-	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	1
-	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	1
3.1	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.31 dB at 48.430 MHz
3.2	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.89 dB at 0.341 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-
Remark 1: All test results were leveraged from module RF report which can refer to Report No.FR1N0920A.					

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AI voice development kit
Brand Name	ESPRESSIF
Model Name	ESP32-S3-BOX
FCC ID	Contains FCC ID : 2AC7Z-ESPS3WROOM1
HW Version	V1.3
SW Version	v1.1.3.4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Antenna Type / Gain	PCB Antenna with gain 3.26 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth LE / GFSK
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN Link(2.4G) + Dock + USB Cable(Charging from Adapter)
Remark: For Radiated Test Cases, The tests were performance with Adapter, Dock and USB Cable.	

2.3 Connection Diagram of Test System

For Radiated Emission

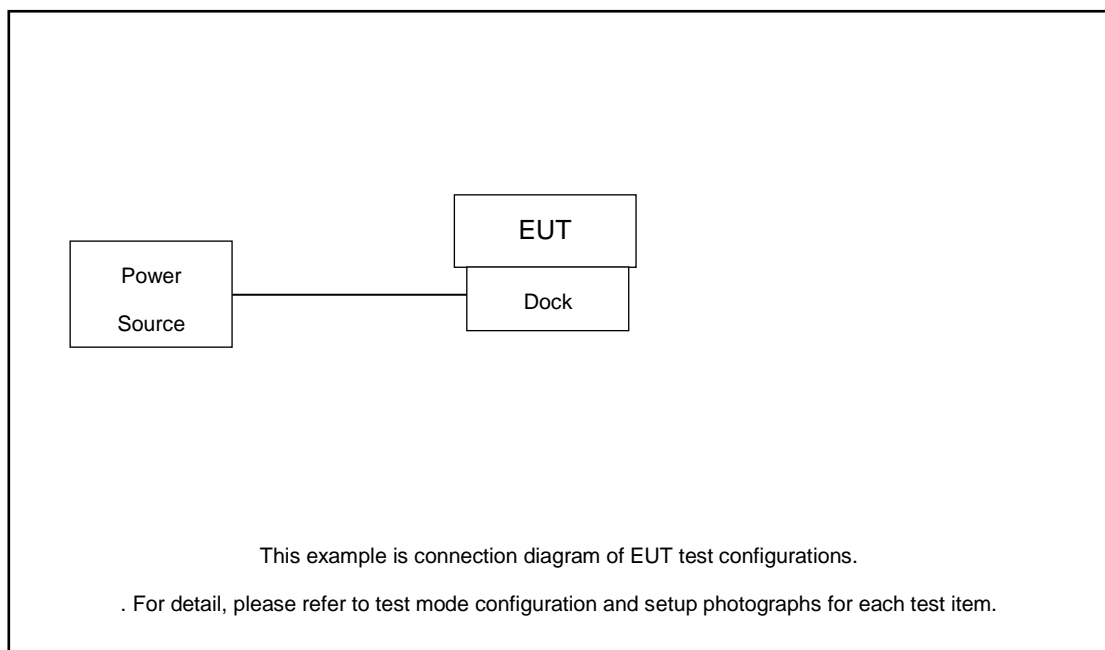

For Conducted Emission

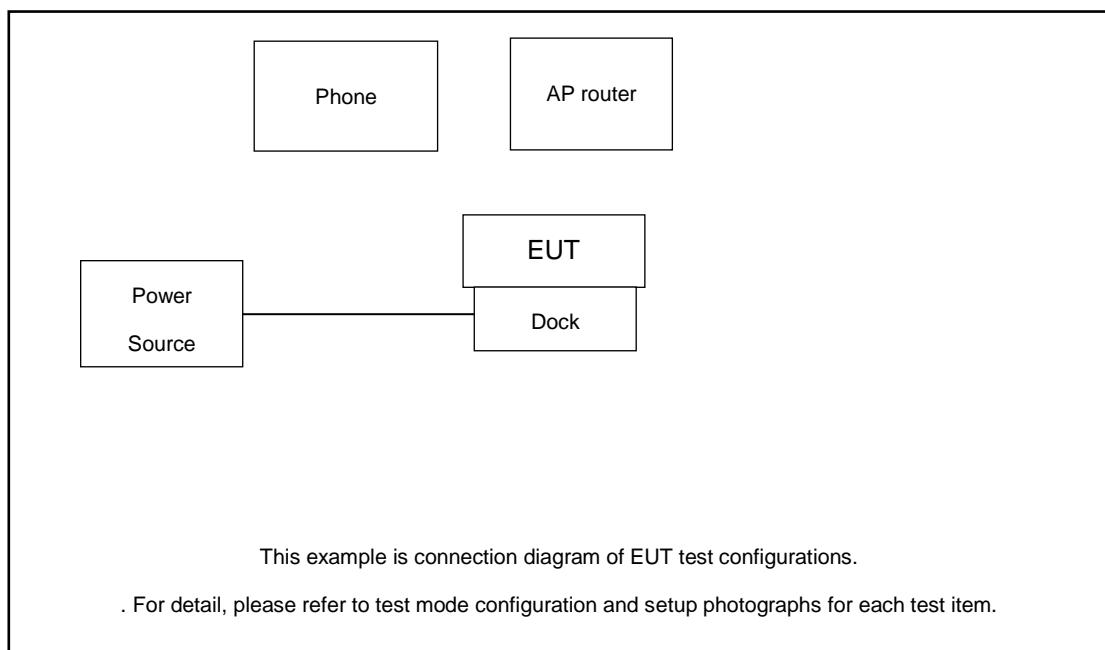



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Phone	MOTO	XT1952-1	N/A	N/A	N/A
3.	Adapter	MOTO	C-P56	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the phone/WLAN AP under large package sizes transmission.

3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.1.4 Test Setup


For radiated emissions below 30MHz

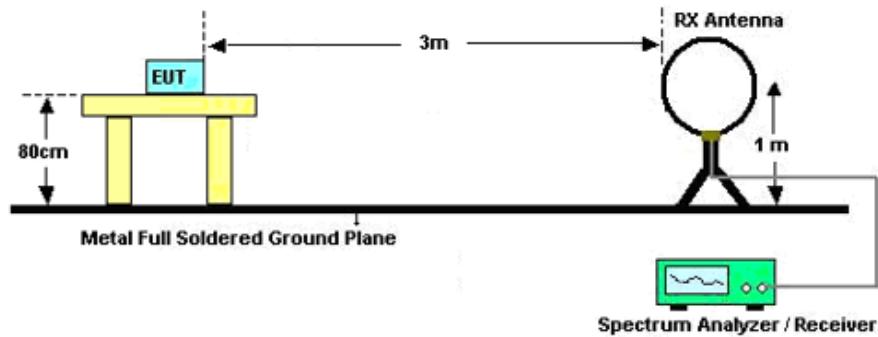

For radiated emissions from 30MHz to 1GHz

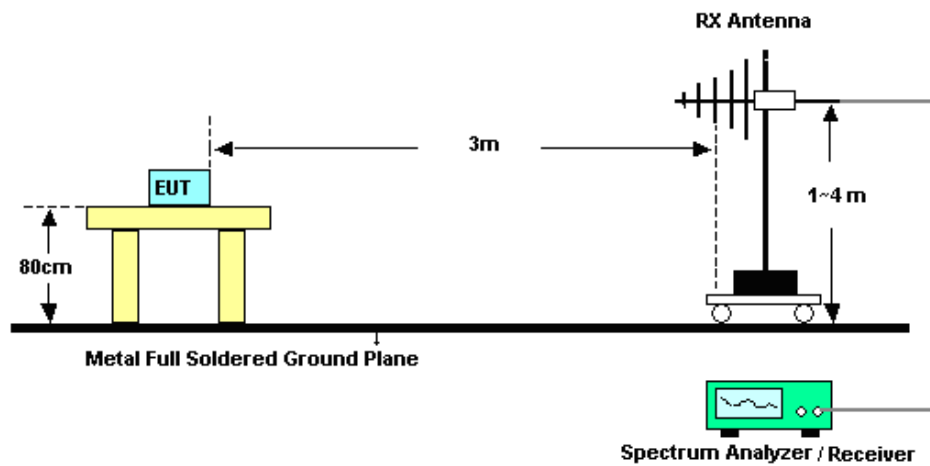

For radiated emissions above 1GHz

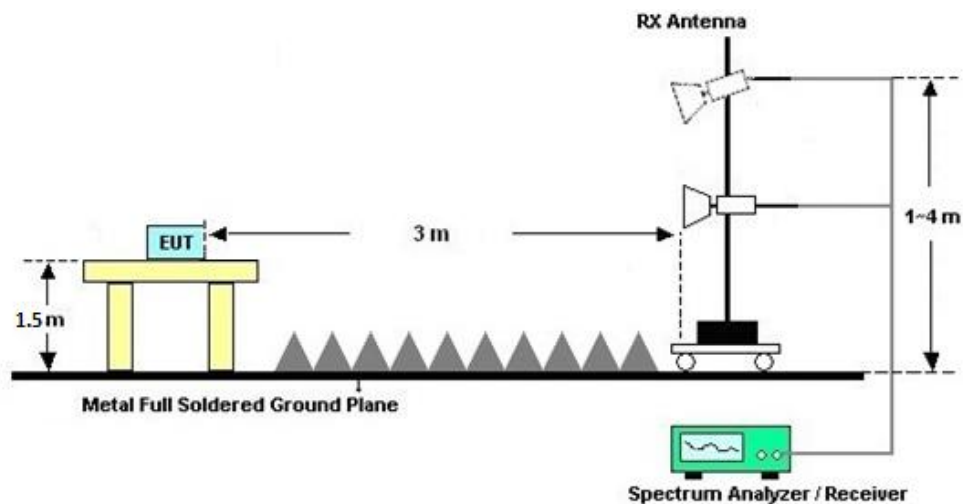



3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B&C.

3.1.7 Duty Cycle

Please refer to Appendix D.

3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B&C.

3.2 AC Conducted Emission Measurement

3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.2.4 Test Setup

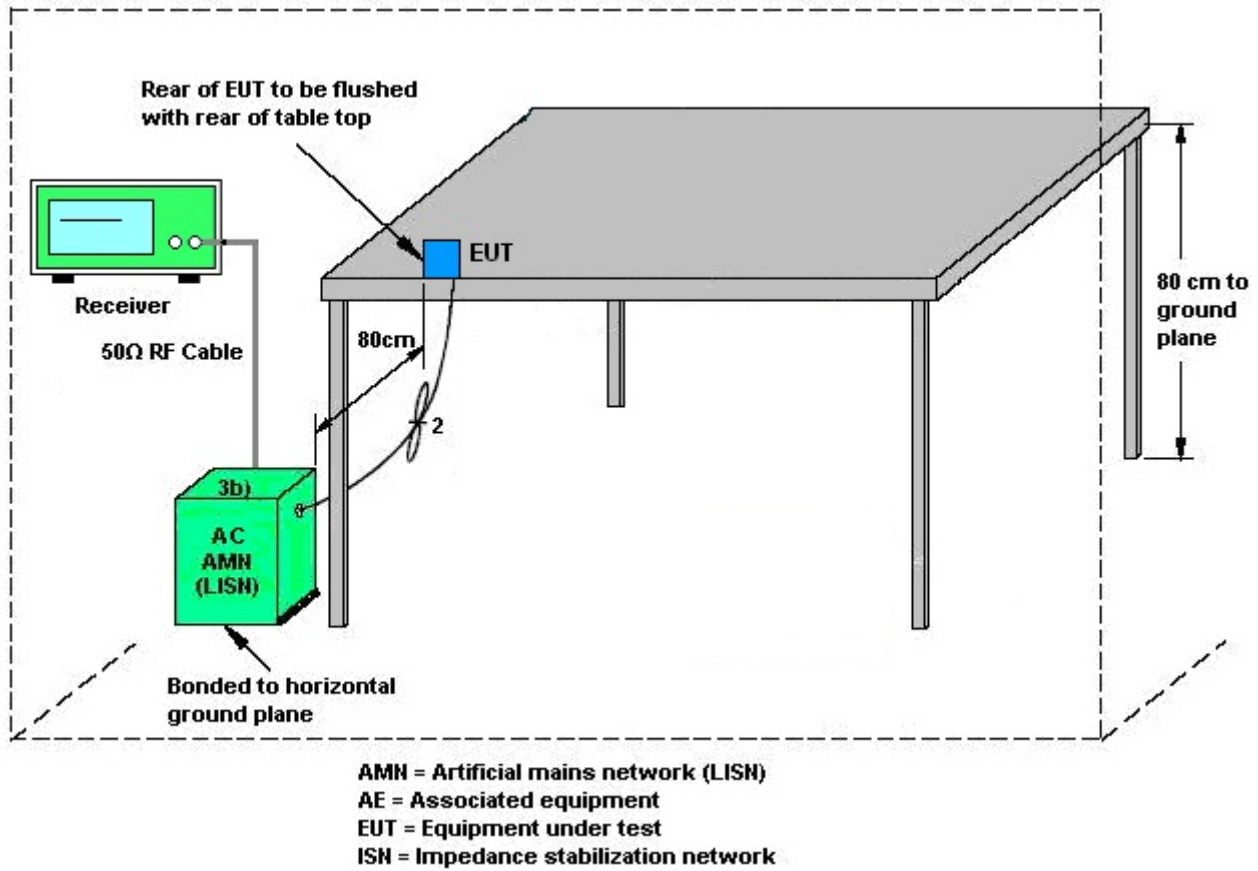

3.2.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jul. 08, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Mar 24, 2022	Jul. 08, 2022	Mar 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jul. 08, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 03, 2022	Jul. 08, 2022	Jun. 02, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2021	Jul. 08, 2022	Nov. 07, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jul. 08, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 11, 2022	Jul. 08, 2022	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Jul. 08, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz~18Ghz	Oct. 16, 2021	Jul. 08, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jul. 08, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 08, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 08, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 08, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Jun. 24, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jun. 24, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Jun. 24, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jun. 24, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------


Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----




Appendix A. AC Conducted Emission Test Results

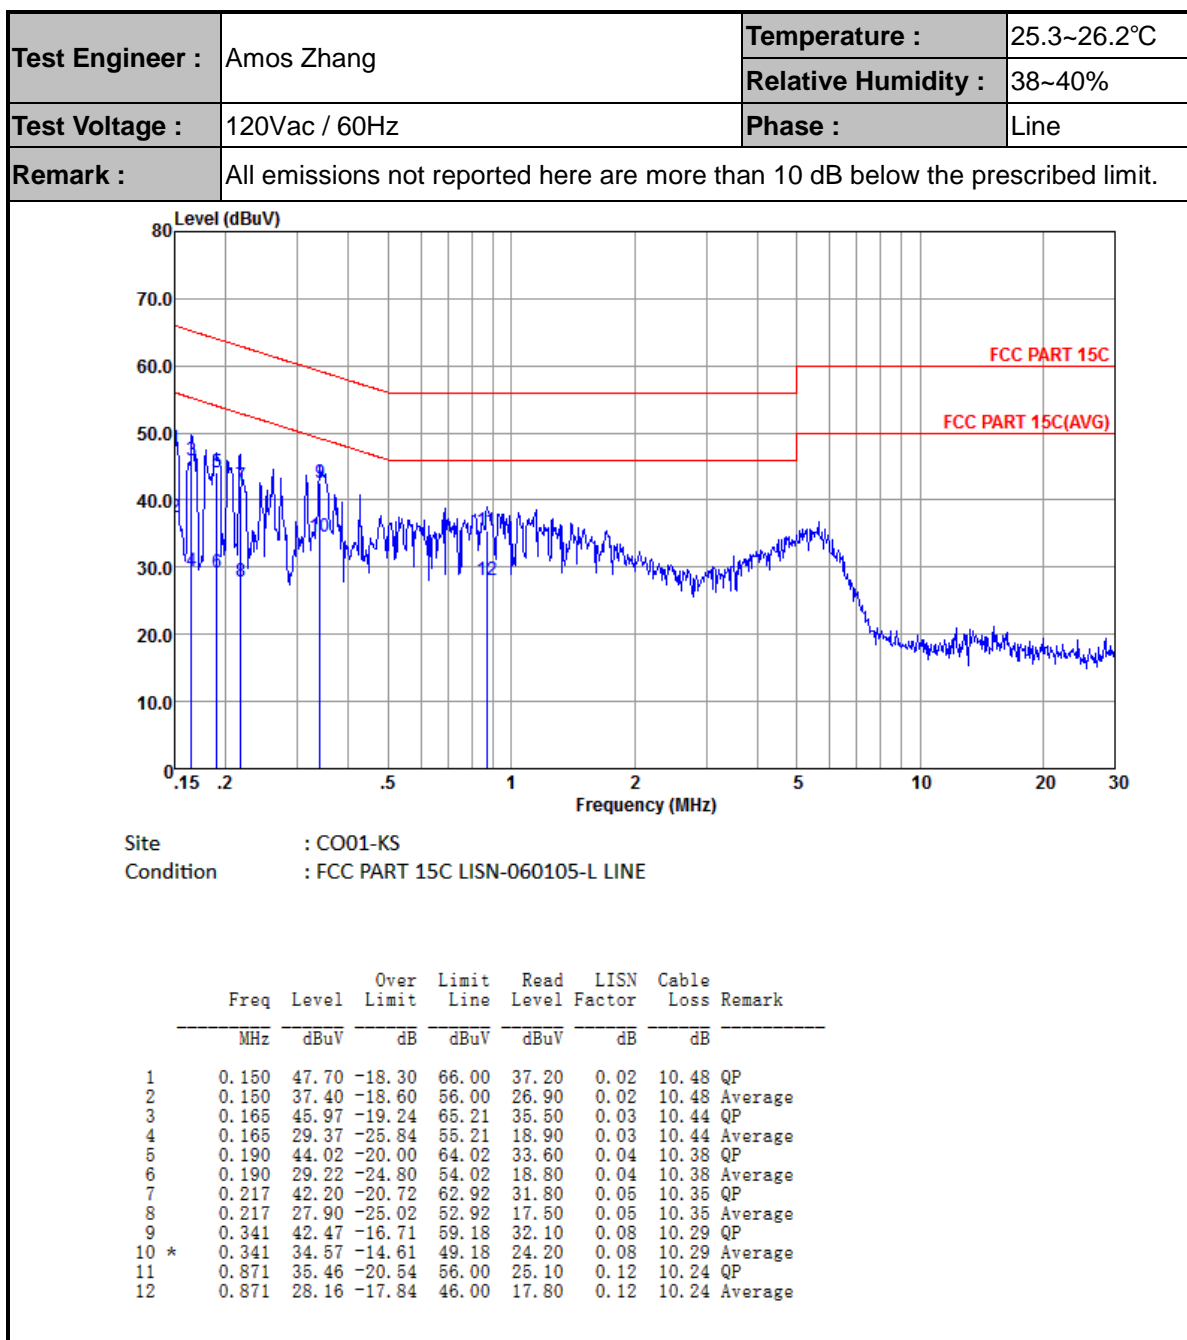



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

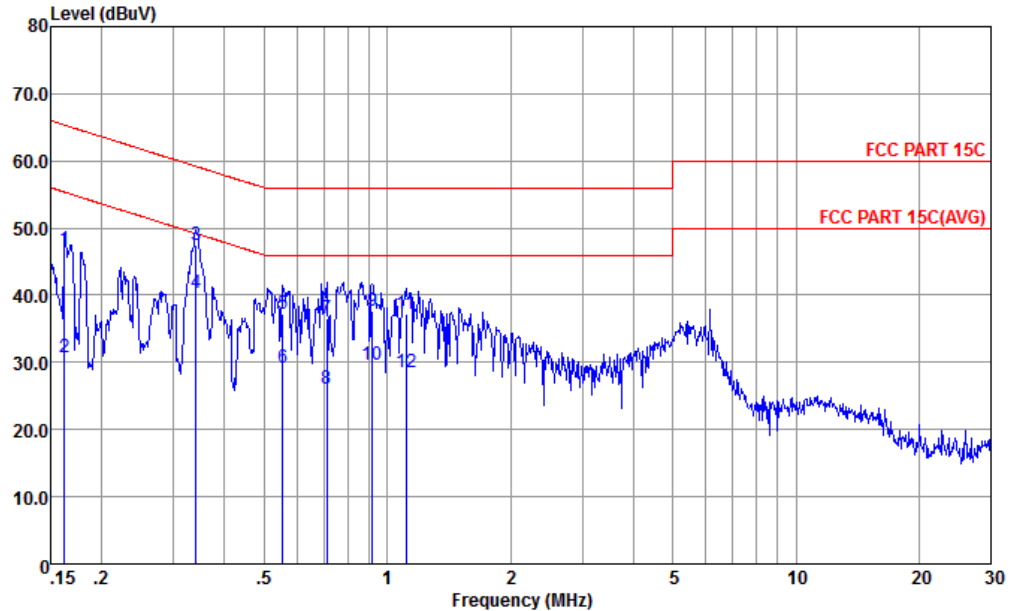

Site : CO01-KS
Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBμV	Limit	Line	Level	Factor	Loss	
			dB	dBμV	dBμV	dB	dB	
1	0.162	46.75	-18.59	65.34	36.19	0.11	10.45	QP
2	0.162	30.75	-24.59	55.34	20.19	0.11	10.45	Average
3	0.341	47.49	-11.69	59.18	37.10	0.10	10.29	QP
4 *	0.341	40.29	-8.89	49.18	29.90	0.10	10.29	Average
5	0.555	37.25	-18.75	56.00	26.90	0.11	10.24	QP
6	0.555	29.25	-16.75	46.00	18.90	0.11	10.24	Average
7	0.712	36.55	-19.45	56.00	26.20	0.11	10.24	QP
8	0.712	26.15	-19.85	46.00	15.80	0.11	10.24	Average
9	0.918	37.55	-18.45	56.00	27.19	0.12	10.24	QP
10	0.918	29.55	-16.45	46.00	19.19	0.12	10.24	Average
11	1.111	37.16	-18.84	56.00	26.81	0.12	10.23	QP
12	1.111	28.56	-17.44	46.00	18.21	0.12	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Radiated Spurious Emission

Test Engineer :	Carry Xu	Temperature :	22~23°C
		Relative Humidity :	41~42%

Band			Power setting
BLE Tx	CH39	2Mbps	11



2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		2483.5	50.1	-23.9	74	46.69	32.98	7.25	36.82	298	210	P	H
		2483.5	41.11	-12.89	54	37.7	32.98	7.25	36.82	298	210	A	H
	*	2480	101.06	-	-	97.65	32.98	7.25	36.82	298	210	P	H
	*	2480	98.5	-	-	95.09	32.98	7.25	36.82	298	210	A	H
		2485.84	51.4	-22.6	74	47.99	32.98	7.25	36.82	229	325	P	V
		2483.5	42.08	-11.92	54	38.67	32.98	7.25	36.82	229	325	A	V
	*	2480	102.92	-	-	99.51	32.98	7.25	36.82	229	325	P	V
	*	2480	100.33	-	-	96.92	32.98	7.25	36.82	229	325	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		4965	43	-31	74	63.78	34.28	10.41	65.47	300	0	P	H
		7440	42.24	-31.76	74	59.87	35.89	12.79	66.31	300	0	P	H
		4965	44.4	-29.6	74	65.18	34.28	10.41	65.47	100	0	P	V
		7440	42.74	-31.26	74	60.37	35.89	12.79	66.31	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	20.45	-19.55	40	26.94	25.5	0.71	32.7	-	-	P	H
		96.93	21.56	-21.94	43.5	35.38	17.47	1.49	32.78	-	-	P	H
		194.9	17.94	-25.56	43.5	32.47	16.42	2.12	33.07	-	-	P	H
		303.54	19.04	-26.96	46	28.99	20.29	2.66	32.9	-	-	P	H
		571.26	25.21	-20.79	46	28.39	25.73	3.65	32.56	-	-	P	H
		745.86	28.1	-17.9	46	30.19	26.44	4.18	32.71	-	-	P	H
		48.43	29.69	-10.31	40	45.84	15.77	1.05	32.97	-	-	P	V
		63.95	25.97	-14.03	40	44.55	13.32	1.2	33.1	-	-	P	V
		96.93	23.62	-19.88	43.5	37.44	17.47	1.49	32.78	-	-	P	V
		322.94	20.01	-25.99	46	29.42	20.75	2.74	32.9	-	-	P	V
		565.44	25.78	-20.22	46	28.94	25.78	3.63	32.57	-	-	P	V
		761.38	28.42	-17.58	46	30.26	26.59	4.22	32.65	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																					
ANT	BLE CH39 2480MHz																																																																																					
1	Horizontal					Fundamental																																																																																
Peak	<div><p>Site : 030605-KS Condition : FCC PART 15C 3m 3317 5N 75957 HORIZONTAL Project : RRM 1000 0000Hz VSW 3000 0000Hz SRT Auto Mode : V Plane : Y Full-directivity : Y IMEI : #2 Powersetting : 11</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2483.50</td><td>50.10</td><td>-23.99</td><td>74.00</td><td>46.69</td><td>32.98</td><td>7.25</td><td>36.82</td><td>298</td><td>210 Peak HORIZONTAL</td></tr></table></div>										Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2483.50	50.10	-23.99	74.00	46.69	32.98	7.25	36.82	298	210 Peak HORIZONTAL	<div><p>Site : 030605-KS Condition : FCC PART 15C 3m 3317 5N 75957 HORIZONTAL Project : RRM 1000 0000Hz VSW 3000 0000Hz SRT Auto Mode : V Plane : Y Full-directivity : Y IMEI : #2 Powersetting : 11</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2480.00</td><td>101.06</td><td>27.06</td><td>74.00</td><td>97.65</td><td>32.98</td><td>7.25</td><td>36.82</td><td>298</td><td>210 Peak HORIZONTAL</td></tr></table></div>										Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2480.00	101.06	27.06	74.00	97.65	32.98	7.25	36.82	298	210 Peak HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																														
1	2483.50	50.10	-23.99	74.00	46.69	32.98	7.25	36.82	298	210 Peak HORIZONTAL																																																																												
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																														
1	2480.00	101.06	27.06	74.00	97.65	32.98	7.25	36.82	298	210 Peak HORIZONTAL																																																																												
Avg.	<div><p>Site : 030605-KS Condition : FCC PART 15C (AVG) 3m 3317 5N 75957 HORIZONTAL Project : RRM 1000 0000Hz VSW 1.0000Hz SRT Auto Mode : V Plane : Y Full-directivity : Y IMEI : #2 Powersetting : 11</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2483.50</td><td>41.11</td><td>-12.89</td><td>54.00</td><td>37.70</td><td>32.98</td><td>7.25</td><td>36.82</td><td>298</td><td>210 Average HORIZONTAL</td></tr></table></div>										Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2483.50	41.11	-12.89	54.00	37.70	32.98	7.25	36.82	298	210 Average HORIZONTAL	<div><p>Site : 030605-KS Condition : FCC PART 15C (AVG) 3m 3317 5N 75957 HORIZONTAL Project : RRM 1000 0000Hz VSW 1.0000Hz SRT Auto Mode : V Plane : Y Full-directivity : Y IMEI : #2 Powersetting : 11</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2480.00</td><td>98.50</td><td>44.50</td><td>54.00</td><td>95.09</td><td>32.98</td><td>7.25</td><td>36.82</td><td>298</td><td>210 Average HORIZONTAL</td></tr></table></div>										Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2480.00	98.50	44.50	54.00	95.09	32.98	7.25	36.82	298	210 Average HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																														
1	2483.50	41.11	-12.89	54.00	37.70	32.98	7.25	36.82	298	210 Average HORIZONTAL																																																																												
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																														
1	2480.00	98.50	44.50	54.00	95.09	32.98	7.25	36.82	298	210 Average HORIZONTAL																																																																												



BLE		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																										
ANT		BLE CH39 2480MHz																																																																										
1	Vertical										Fundamental																																																																	
Peak	<div><p>Site : 030605-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM-1000-000MHz VSW-3000-000MHz SMT-Auto Bode : (FR)1N0920-02 Plane : Y Full-directivity : Y IMEI : #2 Powersetting : 11</p><table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2485.84</td><td>51.40</td><td>-22.60</td><td>74.00</td><td>47.99</td><td>32.98</td><td>7.25</td><td>36.82</td><td>229</td><td>325 Peak</td><td>VERTICAL</td></tr></table></div>										Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1	2485.84	51.40	-22.60	74.00	47.99	32.98	7.25	36.82	229	325 Peak	VERTICAL	<div><p>Site : 030605-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM-1000-000MHz VSW-3000-000MHz SMT-Auto Bode : (FR)1N0920-02 Plane : Y Full-directivity : Y IMEI : #2 Powersetting : 11</p><table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2480.00</td><td>102.92</td><td>28.92</td><td>74.00</td><td>99.51</td><td>32.98</td><td>7.25</td><td>36.82</td><td>229</td><td>325 Peak</td><td>VERTICAL</td></tr></table></div>										Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1	2480.00	102.92	28.92	74.00	99.51	32.98	7.25	36.82	229	325 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level Factor	Loss Factor																																																																								
1	2485.84	51.40	-22.60	74.00	47.99	32.98	7.25	36.82	229	325 Peak	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
1	2480.00	102.92	28.92	74.00	99.51	32.98	7.25	36.82	229	325 Peak	VERTICAL																																																																	
Avg.	<div><p>Site : 030605-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM-1000-000MHz VSW-1.000MHz SMT-Auto Bode : (FR)1N0920-02 Plane : Y Full-directivity : Y IMEI : #2 Powersetting : 11</p><table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2483.50</td><td>42.08</td><td>-11.92</td><td>54.00</td><td>38.67</td><td>32.98</td><td>7.25</td><td>36.82</td><td>229</td><td>325 Average</td><td>VERTICAL</td></tr></table></div>										Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1	2483.50	42.08	-11.92	54.00	38.67	32.98	7.25	36.82	229	325 Average	VERTICAL	<div><p>Site : 030605-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM-1000-000MHz VSW-1.000MHz SMT-Auto Bode : (FR)1N0920-02 Plane : Y Full-directivity : Y IMEI : #2 Powersetting : 11</p><table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2480.00</td><td>100.33</td><td>46.33</td><td>54.00</td><td>96.92</td><td>32.98</td><td>7.25</td><td>36.82</td><td>229</td><td>325 Average</td><td>VERTICAL</td></tr></table></div>										Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1	2480.00	100.33	46.33	54.00	96.92	32.98	7.25	36.82	229	325 Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level Factor	Loss Factor																																																																								
1	2483.50	42.08	-11.92	54.00	38.67	32.98	7.25	36.82	229	325 Average	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
1	2480.00	100.33	46.33	54.00	96.92	32.98	7.25	36.82	229	325 Average	VERTICAL																																																																	



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																					
ANT	BLE CH39 2480MHz																																																																																					
1	Horizontal	Vertical																																																																																				
Peak	<div><p>Site : 030H05-KS Condition : FCC PART 15C 3m 3317.5M 75957 HORIZONTAL Pwr : 100.000000 VSWR 3000.000000 SRT Auto Project : FR1N0920-02 Mode : 1 Plane : 1 Full-directivity : 1 Polarization : 1 Power setting : 11</p><table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamplifier</th><th>A-Pole</th><th>T-Pole</th><th>Remark</th><th>Polarization</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4965.00</td><td>43.00</td><td>-31.00</td><td>74.00</td><td>63.78</td><td>34.28</td><td>10.41</td><td>65.47</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>7440.00</td><td>42.24</td><td>-31.75</td><td>74.00</td><td>59.87</td><td>35.89</td><td>12.79</td><td>66.31</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr></table></div>	Freq	Level	Limit	ReadAntenna	Cable Preamplifier	A-Pole	T-Pole	Remark	Polarization	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	4965.00	43.00	-31.00	74.00	63.78	34.28	10.41	65.47	300	0 Peak	HORIZONTAL	2	7440.00	42.24	-31.75	74.00	59.87	35.89	12.79	66.31	300	0 Peak	HORIZONTAL	<div><p>Site : 030H05-KS Condition : FCC PART 15C 3m 3317.5M 75957 VERTICAL Pwr : 100.000000 VSWR 3000.000000 SRT Auto Project : FR1N0920-02 Mode : 1 Plane : 1 Full-directivity : 1 Polarization : 1 Power setting : 11</p><table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamplifier</th><th>A-Pole</th><th>T-Pole</th><th>Remark</th><th>Polarization</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4965.00</td><td>44.40</td><td>-29.60</td><td>74.00</td><td>65.18</td><td>34.28</td><td>10.41</td><td>65.47</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>7440.00</td><td>42.74</td><td>-31.26</td><td>74.00</td><td>60.37</td><td>35.89</td><td>12.79</td><td>66.31</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr></table></div>	Freq	Level	Limit	ReadAntenna	Cable Preamplifier	A-Pole	T-Pole	Remark	Polarization	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	4965.00	44.40	-29.60	74.00	65.18	34.28	10.41	65.47	100	0 Peak	VERTICAL	2	7440.00	42.74	-31.26	74.00	60.37	35.89	12.79	66.31	100	0 Peak	VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable Preamplifier	A-Pole	T-Pole	Remark	Polarization																																																																													
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																														
1	4965.00	43.00	-31.00	74.00	63.78	34.28	10.41	65.47	300	0 Peak	HORIZONTAL																																																																											
2	7440.00	42.24	-31.75	74.00	59.87	35.89	12.79	66.31	300	0 Peak	HORIZONTAL																																																																											
Freq	Level	Limit	ReadAntenna	Cable Preamplifier	A-Pole	T-Pole	Remark	Polarization																																																																														
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																														
1	4965.00	44.40	-29.60	74.00	65.18	34.28	10.41	65.47	100	0 Peak	VERTICAL																																																																											
2	7440.00	42.74	-31.26	74.00	60.37	35.89	12.79	66.31	100	0 Peak	VERTICAL																																																																											



Emission below 1GHz

2.4GHz BLE (LF)

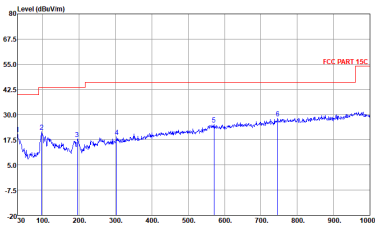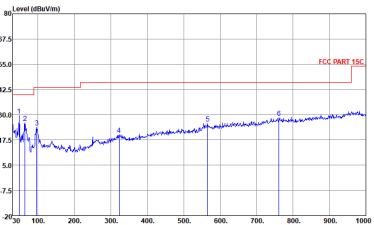BLE	2.4GHz 2400~2483.5MHz																																																																																																																																																													
ANT	BLE LF																																																																																																																																																													
1	Horizontal	Vertical																																																																																																																																																												
QP / Peak	<div><p>Site : 030905-KS Condition : FCC PART 15C 3m DBL1110 DN21188 HORIZONTAL Project : RSW 100.000KHz VSW 300.000KHz SMT Auto Project mode : 1 Full-directivity : 1 IME1 : #2 IME2 : #1</p><table><tr><th>Line</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>30.00</td><td>25.45</td><td>-19.55</td><td>40.00</td><td>26.94</td><td>25.50</td><td>0.71</td><td>32.70</td><td>--- Peak HORIZONTAL</td></tr><tr><td>2</td><td>96.93</td><td>21.56</td><td>-21.94</td><td>43.50</td><td>35.38</td><td>17.47</td><td>1.49</td><td>32.78</td><td>--- Peak HORIZONTAL</td></tr><tr><td>3</td><td>194.90</td><td>17.84</td><td>-25.56</td><td>43.50</td><td>32.47</td><td>16.42</td><td>2.12</td><td>33.07</td><td>--- Peak HORIZONTAL</td></tr><tr><td>4</td><td>303.04</td><td>19.54</td><td>-16.76</td><td>46.00</td><td>28.99</td><td>20.79</td><td>2.66</td><td>32.90</td><td>--- Peak HORIZONTAL</td></tr><tr><td>5</td><td>571.26</td><td>25.21</td><td>-20.79</td><td>46.00</td><td>28.39</td><td>25.73</td><td>3.65</td><td>32.56</td><td>--- Peak HORIZONTAL</td></tr><tr><td>6</td><td>745.86</td><td>28.10</td><td>-17.70</td><td>46.00</td><td>30.19</td><td>26.44</td><td>4.16</td><td>32.71</td><td>--- Peak HORIZONTAL</td></tr></table></div>	Line	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg			1	30.00	25.45	-19.55	40.00	26.94	25.50	0.71	32.70	--- Peak HORIZONTAL	2	96.93	21.56	-21.94	43.50	35.38	17.47	1.49	32.78	--- Peak HORIZONTAL	3	194.90	17.84	-25.56	43.50	32.47	16.42	2.12	33.07	--- Peak HORIZONTAL	4	303.04	19.54	-16.76	46.00	28.99	20.79	2.66	32.90	--- Peak HORIZONTAL	5	571.26	25.21	-20.79	46.00	28.39	25.73	3.65	32.56	--- Peak HORIZONTAL	6	745.86	28.10	-17.70	46.00	30.19	26.44	4.16	32.71	--- Peak HORIZONTAL	<div><p>Site : 030905-KS Condition : FCC PART 15C 3m DBL1110 DN21188 VERTICAL Project : RSW 100.000KHz VSW 300.000KHz SMT Auto Project mode : 1 Full-directivity : 1 IME1 : #2 IME2 : #1</p><table><tr><th>Line</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>48.43</td><td>29.49</td><td>-10.31</td><td>40.00</td><td>45.84</td><td>15.77</td><td>1.05</td><td>32.97</td><td>--- Peak VERTICAL</td></tr><tr><td>2</td><td>62.95</td><td>26.97</td><td>-14.03</td><td>40.00</td><td>44.50</td><td>13.35</td><td>1.30</td><td>32.10</td><td>--- Peak VERTICAL</td></tr><tr><td>3</td><td>96.93</td><td>23.42</td><td>-19.88</td><td>43.50</td><td>37.44</td><td>17.47</td><td>1.49</td><td>32.78</td><td>--- Peak VERTICAL</td></tr><tr><td>4</td><td>322.84</td><td>20.01</td><td>-25.99</td><td>46.00</td><td>29.42</td><td>20.79</td><td>2.74</td><td>32.80</td><td>--- Peak VERTICAL</td></tr><tr><td>5</td><td>565.44</td><td>25.78</td><td>-20.22</td><td>46.00</td><td>28.94</td><td>25.78</td><td>3.63</td><td>32.57</td><td>--- Peak VERTICAL</td></tr><tr><td>6</td><td>761.38</td><td>28.42</td><td>-17.58</td><td>46.00</td><td>30.26</td><td>26.59</td><td>4.22</td><td>32.65</td><td>--- Peak VERTICAL</td></tr></table></div>	Line	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg			1	48.43	29.49	-10.31	40.00	45.84	15.77	1.05	32.97	--- Peak VERTICAL	2	62.95	26.97	-14.03	40.00	44.50	13.35	1.30	32.10	--- Peak VERTICAL	3	96.93	23.42	-19.88	43.50	37.44	17.47	1.49	32.78	--- Peak VERTICAL	4	322.84	20.01	-25.99	46.00	29.42	20.79	2.74	32.80	--- Peak VERTICAL	5	565.44	25.78	-20.22	46.00	28.94	25.78	3.63	32.57	--- Peak VERTICAL	6	761.38	28.42	-17.58	46.00	30.26	26.59	4.22	32.65	--- Peak VERTICAL
	Line	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg																																																																																																																																																								
1	30.00	25.45	-19.55	40.00	26.94	25.50	0.71	32.70	--- Peak HORIZONTAL																																																																																																																																																					
2	96.93	21.56	-21.94	43.50	35.38	17.47	1.49	32.78	--- Peak HORIZONTAL																																																																																																																																																					
3	194.90	17.84	-25.56	43.50	32.47	16.42	2.12	33.07	--- Peak HORIZONTAL																																																																																																																																																					
4	303.04	19.54	-16.76	46.00	28.99	20.79	2.66	32.90	--- Peak HORIZONTAL																																																																																																																																																					
5	571.26	25.21	-20.79	46.00	28.39	25.73	3.65	32.56	--- Peak HORIZONTAL																																																																																																																																																					
6	745.86	28.10	-17.70	46.00	30.19	26.44	4.16	32.71	--- Peak HORIZONTAL																																																																																																																																																					
Line	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg																																																																																																																																																								
1	48.43	29.49	-10.31	40.00	45.84	15.77	1.05	32.97	--- Peak VERTICAL																																																																																																																																																					
2	62.95	26.97	-14.03	40.00	44.50	13.35	1.30	32.10	--- Peak VERTICAL																																																																																																																																																					
3	96.93	23.42	-19.88	43.50	37.44	17.47	1.49	32.78	--- Peak VERTICAL																																																																																																																																																					
4	322.84	20.01	-25.99	46.00	29.42	20.79	2.74	32.80	--- Peak VERTICAL																																																																																																																																																					
5	565.44	25.78	-20.22	46.00	28.94	25.78	3.63	32.57	--- Peak VERTICAL																																																																																																																																																					
6	761.38	28.42	-17.58	46.00	30.26	26.59	4.22	32.65	--- Peak VERTICAL																																																																																																																																																					

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 2Mbps	56.37	1.058	0.945	1KHz

Bluetooth LE 2Mbps

