

TEST REPORT

Product : led table lamp
Trade mark : Ottlite
Model/Type reference : M2A
Serial Number : N/A
Report Number : EED32K00216401
FCC ID : 2AI7B-M2A1
Date of Issue : Apr. 30, 2019
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

OttliteTechnologies Inc.
220 West 7th Avenue, STE 100 Tampa, FL 33602 USA

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Jay

Jay

Compiled by:

Kevin lan

Kevin lan

Reviewed by:

Ware Xin

Ware xin

Approved by:

Kevin Yang

Kevin yang

Date:

Apr. 30, 2019



Check No.: 2447635856

2 Version

Version No.	Date	Description
00	Apr. 30, 2019	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 DEVIATION FROM STANDARDS	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $K=2$)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	12
Appendix A): 20dB Occupied Bandwidth	13
Appendix B): Carrier Frequency Separation	17
Appendix C): Dwell Time	21
Appendix D): Hopping Channel Number	25
Appendix E): Conducted Peak Output Power	27
Appendix F): Band-edge for RF Conducted Emissions	31
Appendix G): RF Conducted Spurious Emissions	36
Appendix H): Pseudorandom Frequency Hopping Sequence	43
Appendix I): Antenna Requirement	44
Appendix J): AC Power Line Conducted Emission	45
Appendix K): Restricted bands around fundamental frequency (Radiated)	48
Appendix L): Radiated Spurious Emissions	56
PHOTOGRAPHS OF TEST SETUP	64
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	66

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

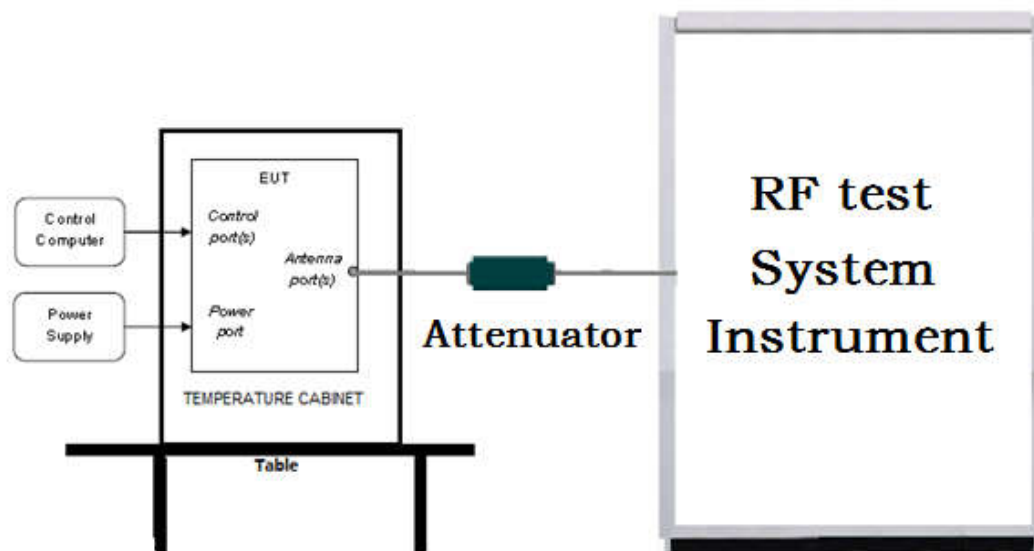

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

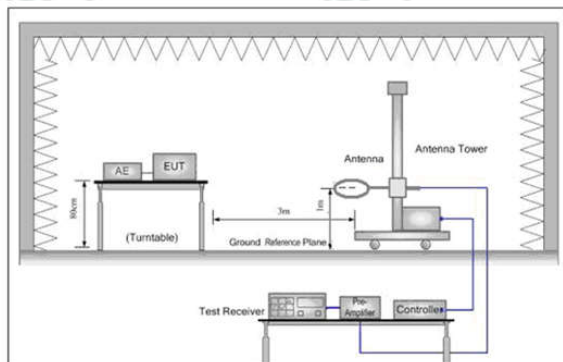


Figure 1. Below 30MHz

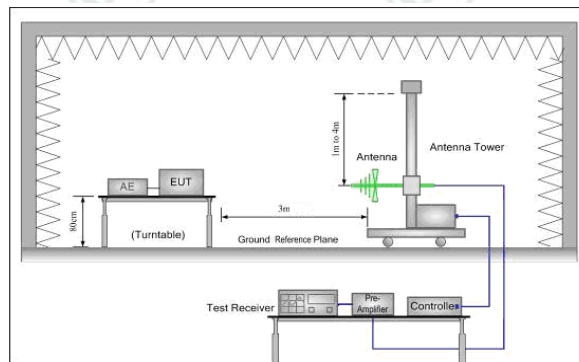


Figure 2. 30MHz to 1GHz


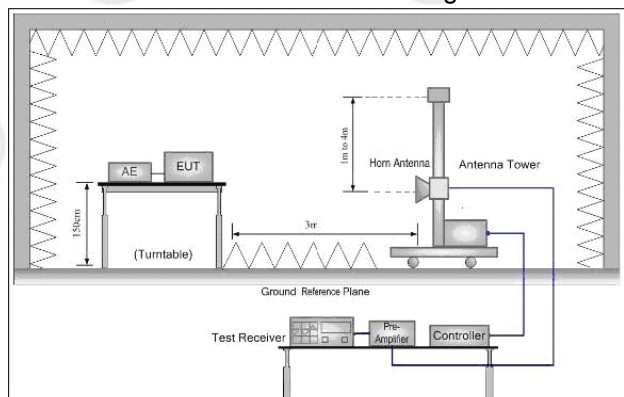


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

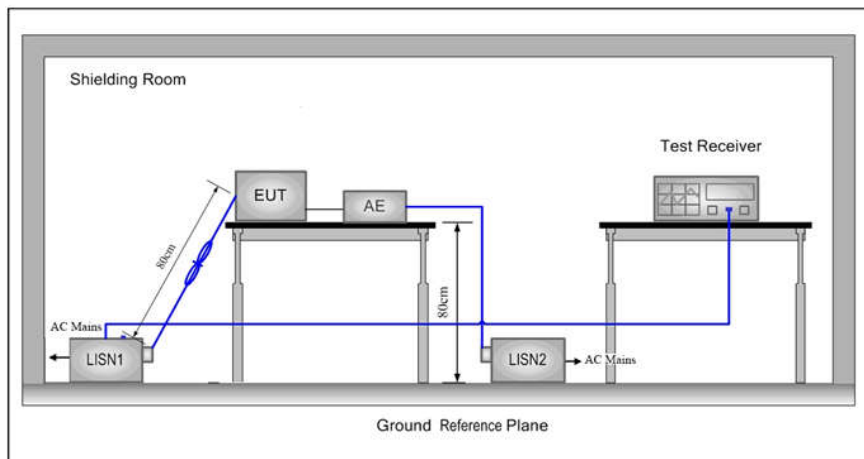

5.2 Test Environment

Operating Environment:	
Temperature:	22°C
Humidity:	57 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	-4.567	-3.992	-3.728

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	-4.456	-3.870	-3.741
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	-4.782	-4.425	-3.738

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	OttliteTechnologies Inc.
Address of Applicant:	220 West 7th Avenue, STE 100 Tampa, FL 33602 USA
Manufacturer:	Shenzhen Feihe Electronics Co., Ltd
Address of Manufacturer:	3/F, Bldg 3, Hongfa Innovative Park, Jiuwei, Bao'an district, Shenzhen, China
Factory:	Shenzhen Feihe Electronics Co., Ltd
Address of Factory:	3/F, Bldg 3, Hongfa Innovative Park, Jiuwei, Bao'an district, Shenzhen, China

6.2 General Description of EUT

Product Name:	led table lamp	
Model No.(EUT):	M2A	
Trade mark:	Ottlite	
EUT Supports Radios application:	Bluetooth 2.1+EDR, 2402-2480MHz	
Power Supply:	Adapter:	Model: TY1200200A1mn Input: AC 100-240V, 50/60Hz, 0.8A Output: 12.0V --- 2.0A
AC/DC ADAPTER:	185cm(Unshielded)	
AUX in Line:	83.5cm(shielded)	
Sample Received Date:	Aug. 09, 2018	
Sample tested Date:	Aug. 09, 2018 to Dec. 28, 2018	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	2.1+EDR						
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)						
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK						
Number of Channel:	79						
Hopping Channel Type:	Adaptive Frequency Hopping systems						
Hardware Version:	V1.0(manufacturer declare)						
Firmware version:	V3.2(manufacturer declare)						
Test Power Grade:	2(manufacturer declare)						
Test Software of EUT:	Eclipse Mars.1 Release(manufacturer declare)						
Antenna Type:	Printed Antenna						
Antenna Gain:	0dBi						
Test Voltage:	AC 120V, 60Hz						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz

3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	serial number	Supplied by	Certification
AE1	Cement load(2.5Ω)	NA	NA	NA	CTI	NA
AE2	Phone	Apple	A1367	TTF20120027	CTI	FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-10-2018	01-09-2019
power meter & power sensor	R&S	OSP120	101374	04-11-2018	04-10-2019
RF control unit	JS Tonscend	JS0806-2	2015860006	03-13-2018	03-12-2019

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Temperature/ Humidity Indicator	Belida	TT-512	A19	01-24-2018	01-23-2019
LISN	R&S	ENV216	100098	05-11-2018	05-10-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	06-05-2018	06-04-2019
Microwave Preamplifier	Tonscend	EMC051845SE	980380	01-19-2018	01-18-2019
Preamplifier	EMCI	EMC001330	980563	06-20-2018	06-19-2019
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	152394	03-16-2018	03-15-2019
High-pass filter	Sinoscite	FL3CX03WG18NM1 2-0398-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09CL12 -0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08CL12 -0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04CL12 -0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03CL12 -0394-001	---	01-10-2018	01-09-2019

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)




Appendix A): 20dB Occupied Bandwidth




Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9782	0.91162	PASS	Peak detector
GFSK	MCH	0.9840	0.92233	PASS	
GFSK	HCH	0.9879	0.92689	PASS	
$\pi/4$ DQPSK	LCH	1.120	1.0765	PASS	
$\pi/4$ DQPSK	MCH	1.121	1.0782	PASS	
$\pi/4$ DQPSK	HCH	1.119	1.0801	PASS	
8DPSK	LCH	1.081	1.0881	PASS	
8DPSK	MCH	1.081	1.0895	PASS	
8DPSK	HCH	1.084	1.0912	PASS	

Test Graph



<p>$\pi/4$DQPSK/LCH</p>	 <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0765 MHz</p> <p>Total Power 2.75 dBm</p> <p>Transmit Freq Error 35.442 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.120 MHz</p> <p>x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/MCH</p>	 <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0782 MHz</p> <p>Total Power 3.02 dBm</p> <p>Transmit Freq Error 36.287 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.121 MHz</p> <p>x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/HCH</p>	 <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0801 MHz</p> <p>Total Power 3.35 dBm</p> <p>Transmit Freq Error 36.488 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.119 MHz</p> <p>x dB -20.00 dB</p>

8DPSK/LCH	 <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0881 MHz Total Power 2.13 dBm</p> <p>Transmit Freq Error 35.427 kHz OBW Power 99.00 % x dB Bandwidth 1.081 MHz x dB -20.00 dB</p>
8DPSK/MCH	 <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0895 MHz Total Power 2.42 dBm</p> <p>Transmit Freq Error 35.605 kHz OBW Power 99.00 % x dB Bandwidth 1.081 MHz x dB -20.00 dB</p>
8DPSK/HCH	 <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0912 MHz Total Power 2.90 dBm</p> <p>Transmit Freq Error 36.500 kHz OBW Power 99.00 % x dB Bandwidth 1.084 MHz x dB -20.00 dB</p>


Appendix B): Carrier Frequency Separation


Result Table


Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.978	PASS
GFSK	MCH	0.942	PASS
GFSK	HCH	0.958	PASS
$\pi/4$ DQPSK	LCH	0.952	PASS
$\pi/4$ DQPSK	MCH	1.000	PASS
$\pi/4$ DQPSK	HCH	0.938	PASS
8DPSK	LCH	0.980	PASS
8DPSK	MCH	0.986	PASS
8DPSK	HCH	1.048	PASS

Test Graph

Graphs

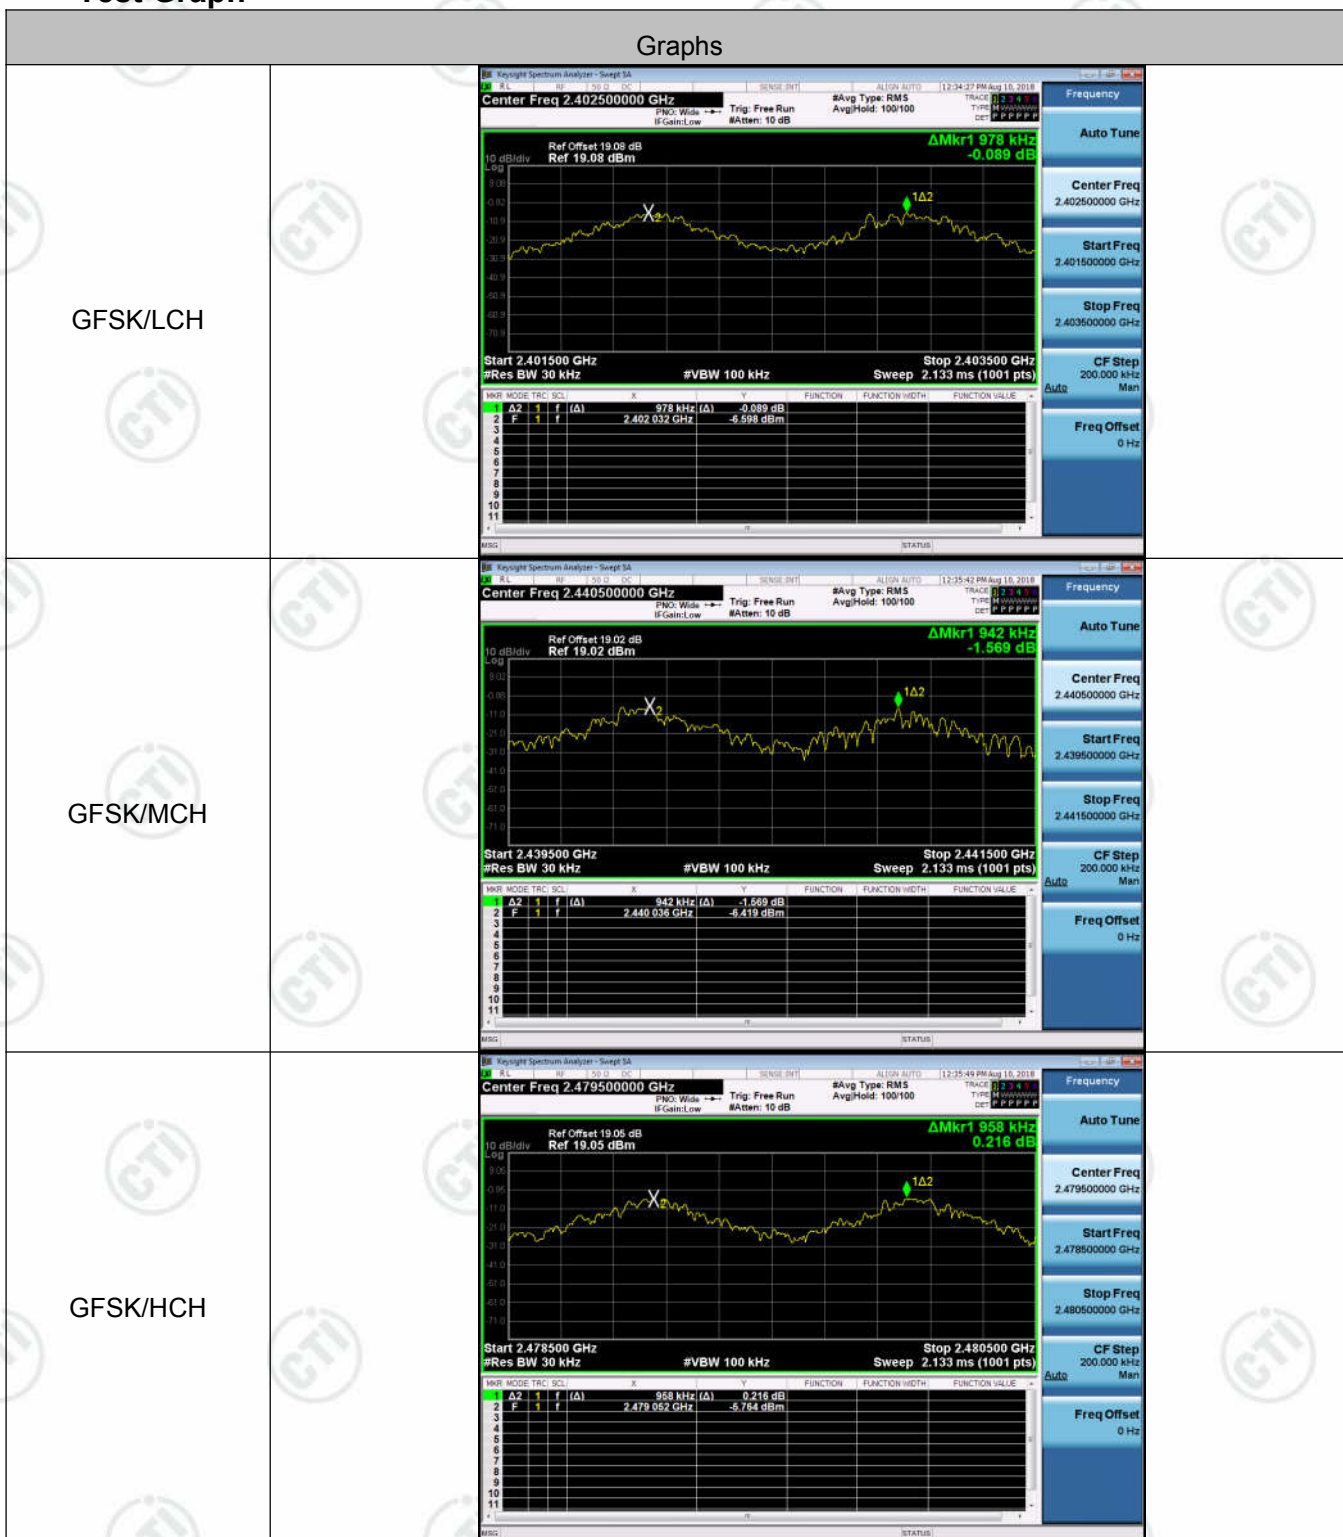

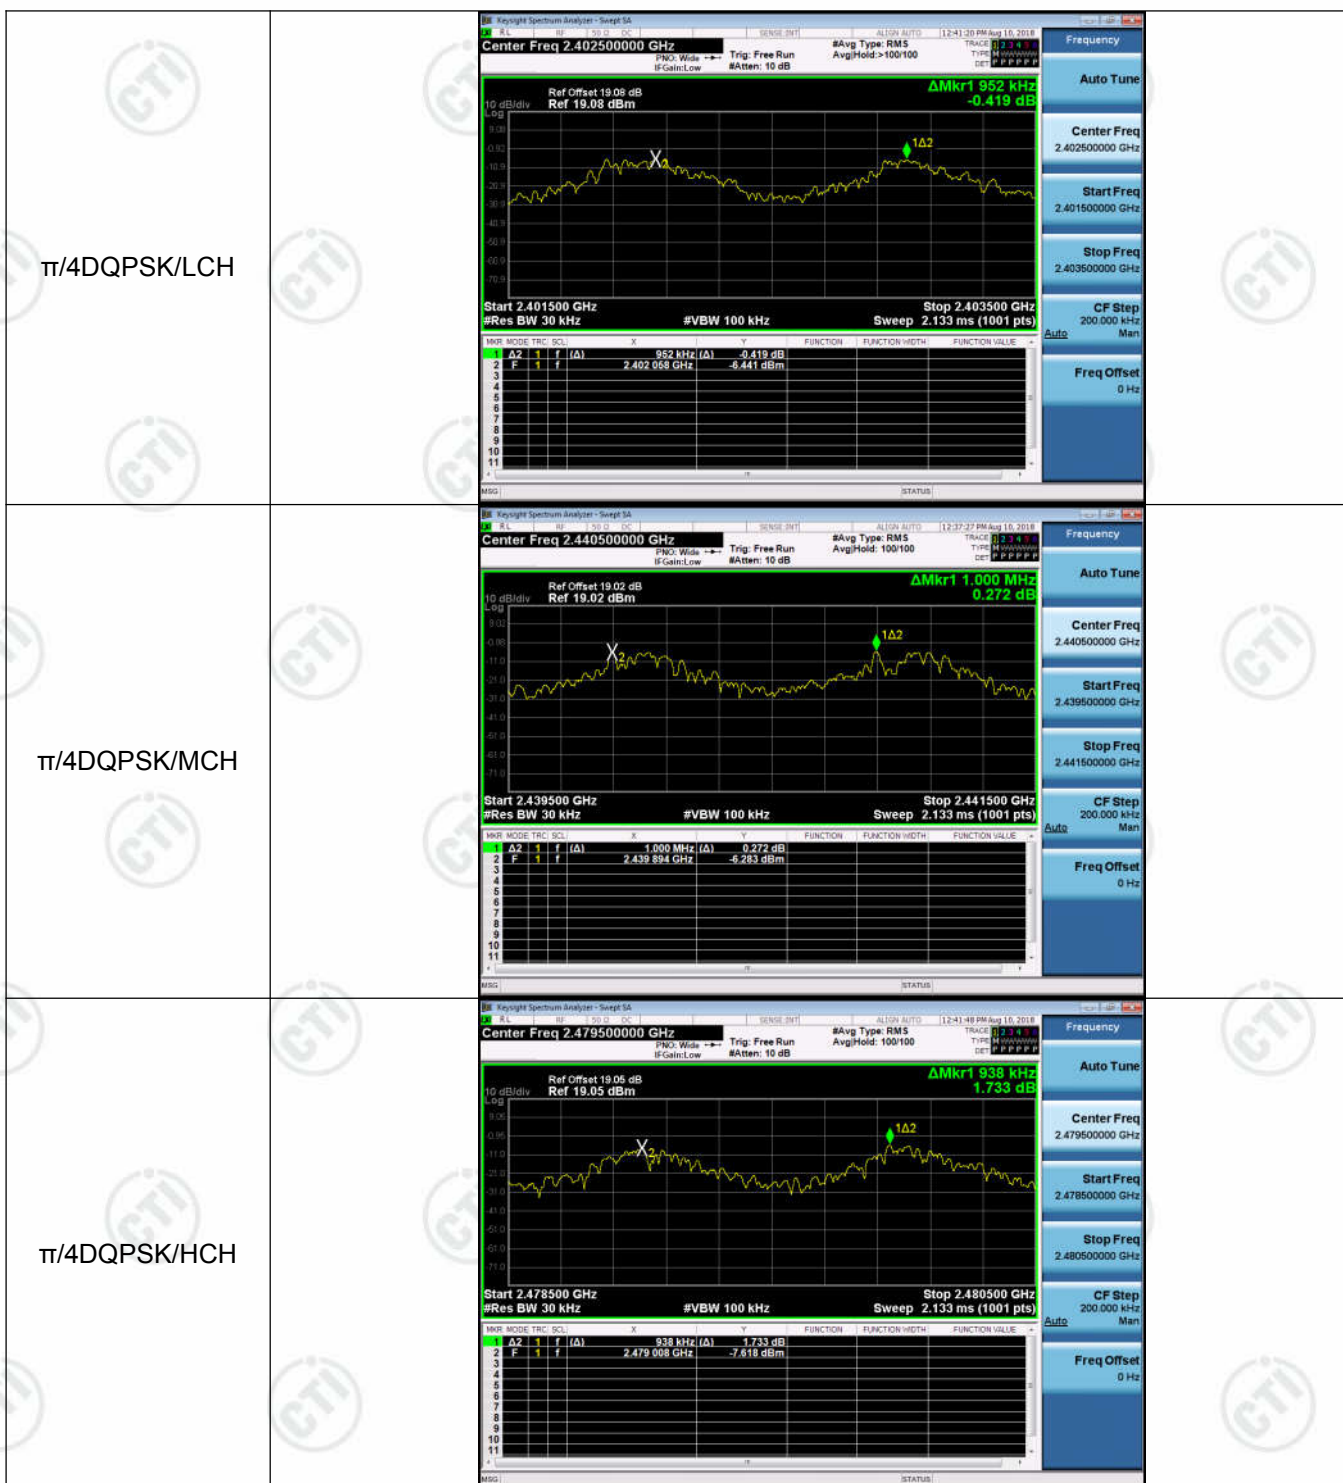

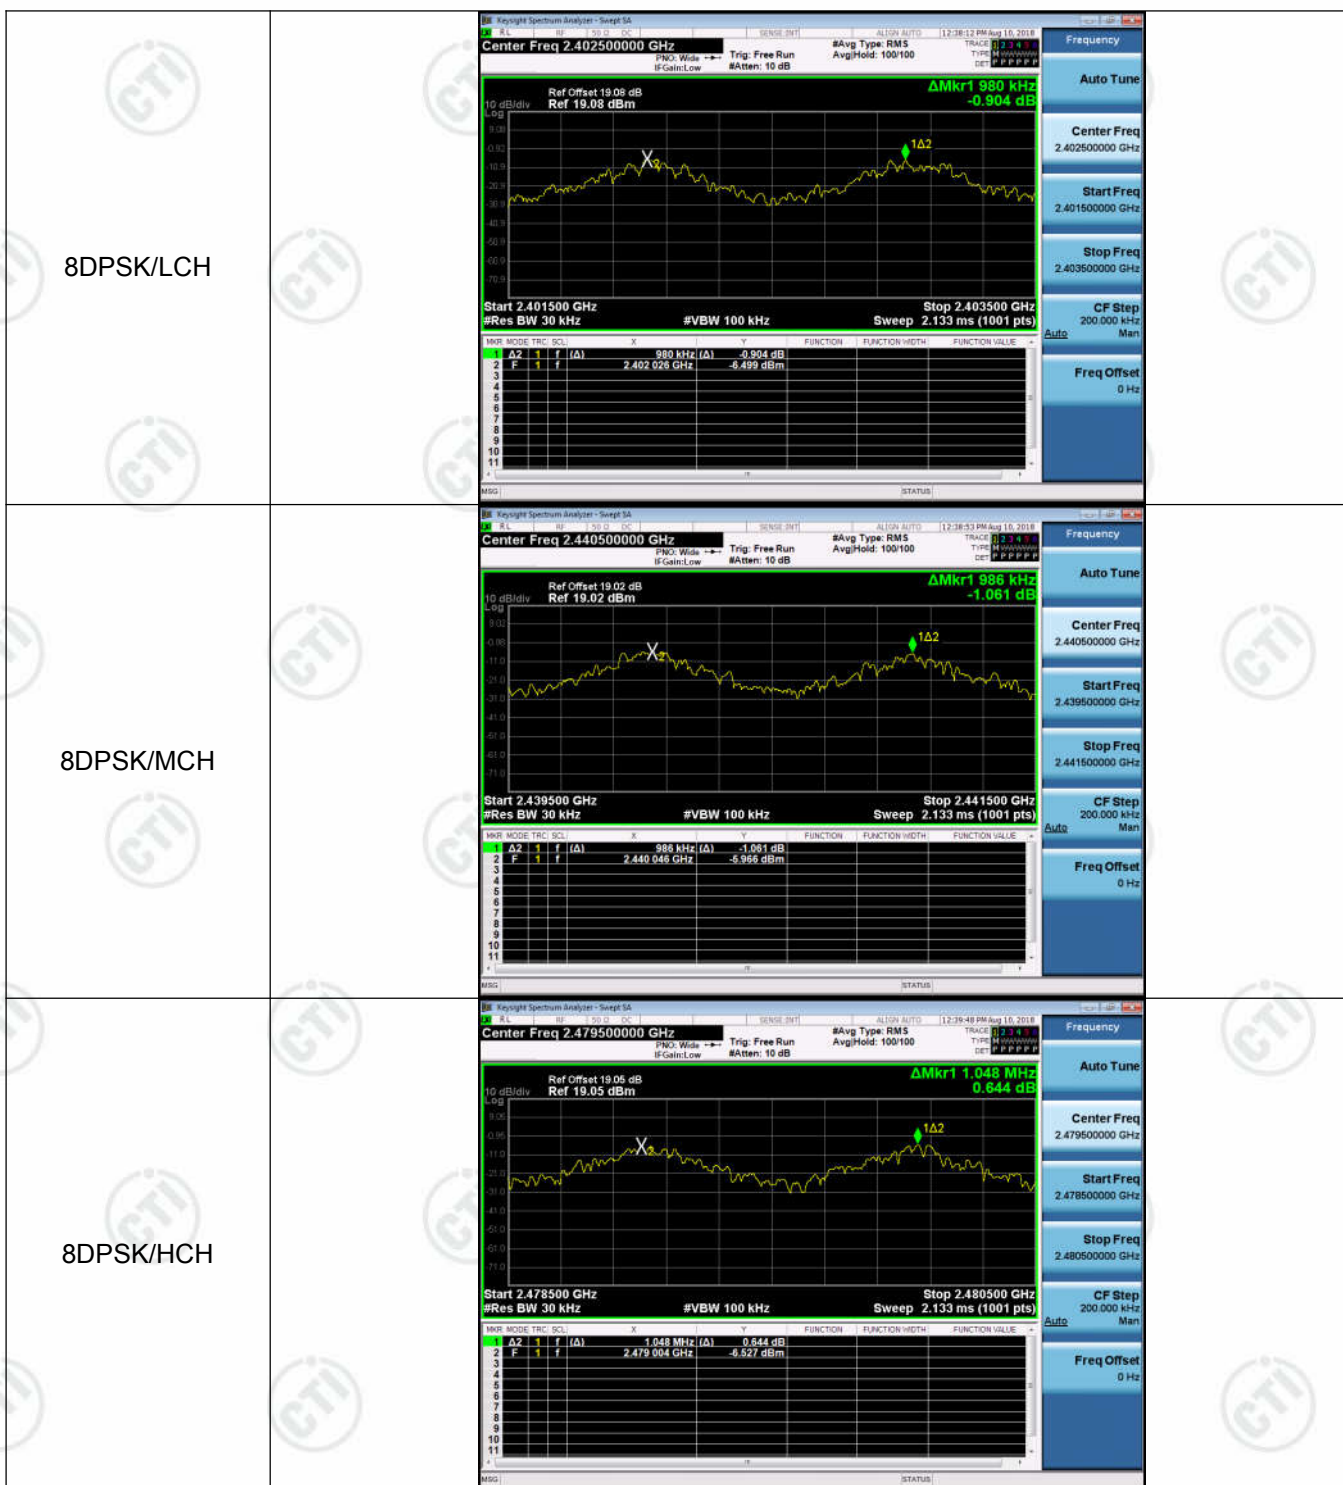

Appendix C): Dwell Time


Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.42687	320	0.137	0.34	PASS
GFSK	DH1	MCH	0.426867	320	0.137	0.34	PASS
GFSK	DH1	HCH	0.428133	320	0.137	0.34	PASS
GFSK	DH3	LCH	1.69987	160	0.272	0.68	PASS
GFSK	DH3	MCH	1.70113	160	0.272	0.68	PASS
GFSK	DH3	HCH	1.7024	160	0.272	0.68	PASS
GFSK	DH5	LCH	2.9348	106.7	0.313	0.78	PASS
GFSK	DH5	MCH	2.9348	106.7	0.313	0.78	PASS
GFSK	DH5	HCH	2.9256	106.7	0.312	0.78	PASS


Test Graph

Graphs


GFSK_DH1/LCH

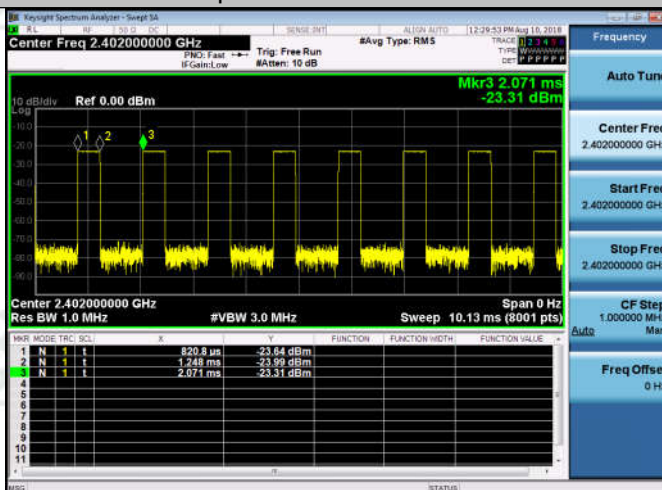



GFSK_DH1/MCH

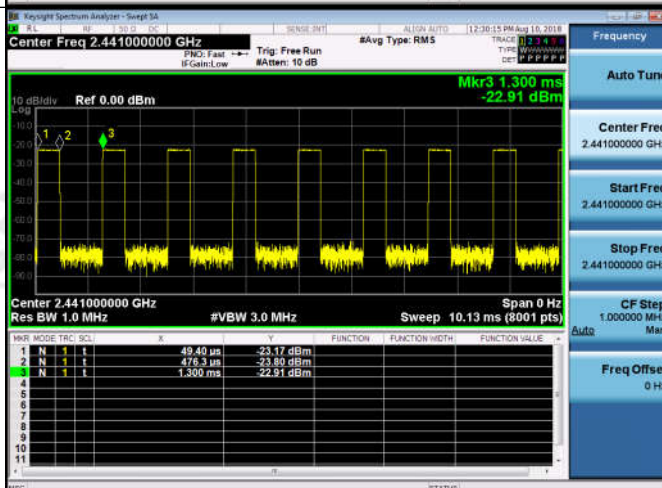

GFSK_DH1/HCH

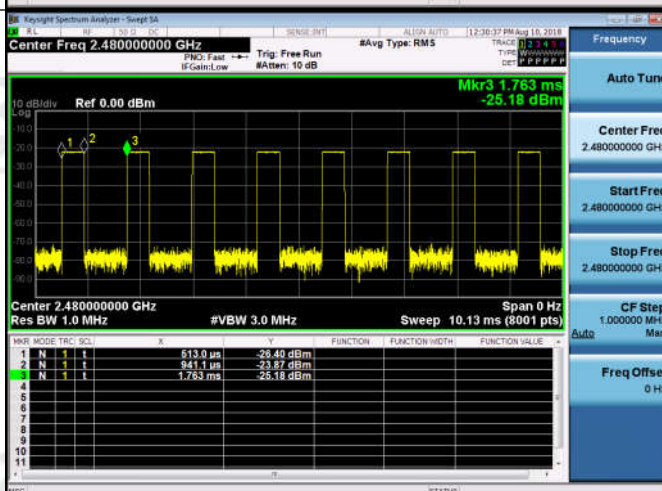

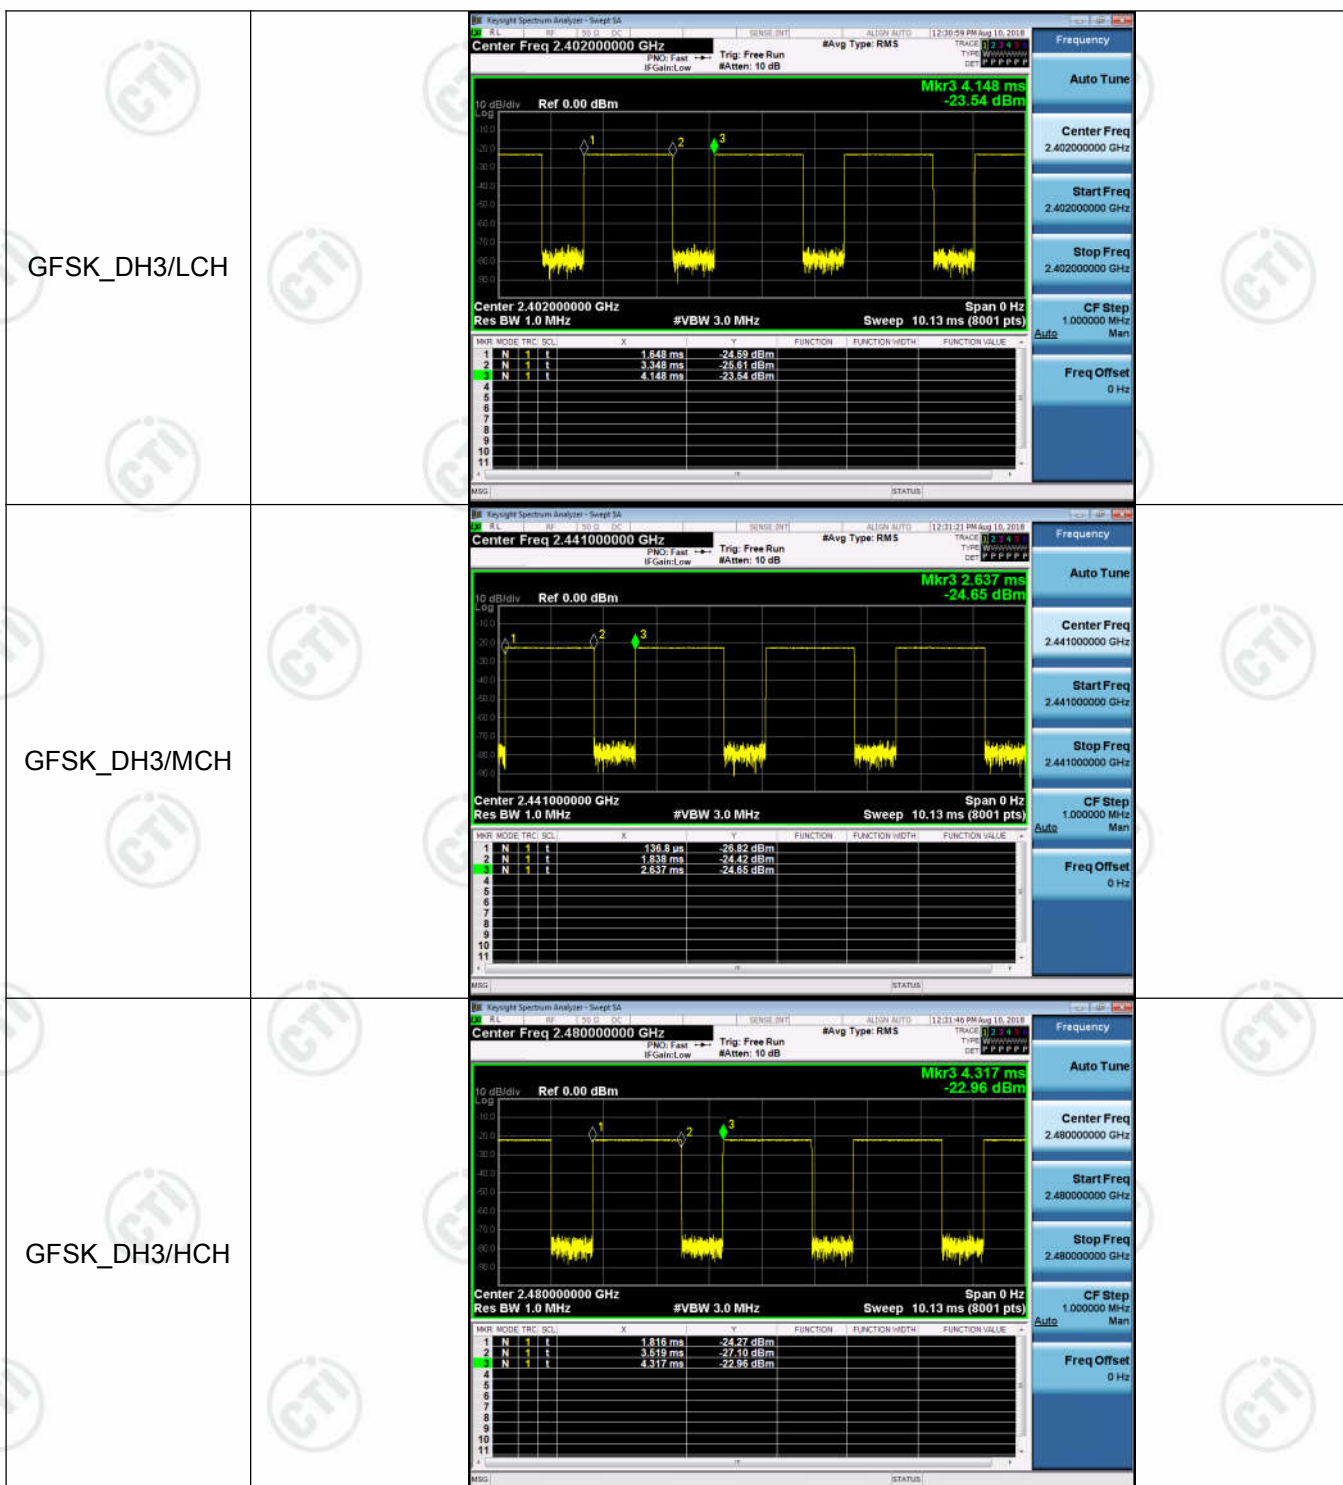

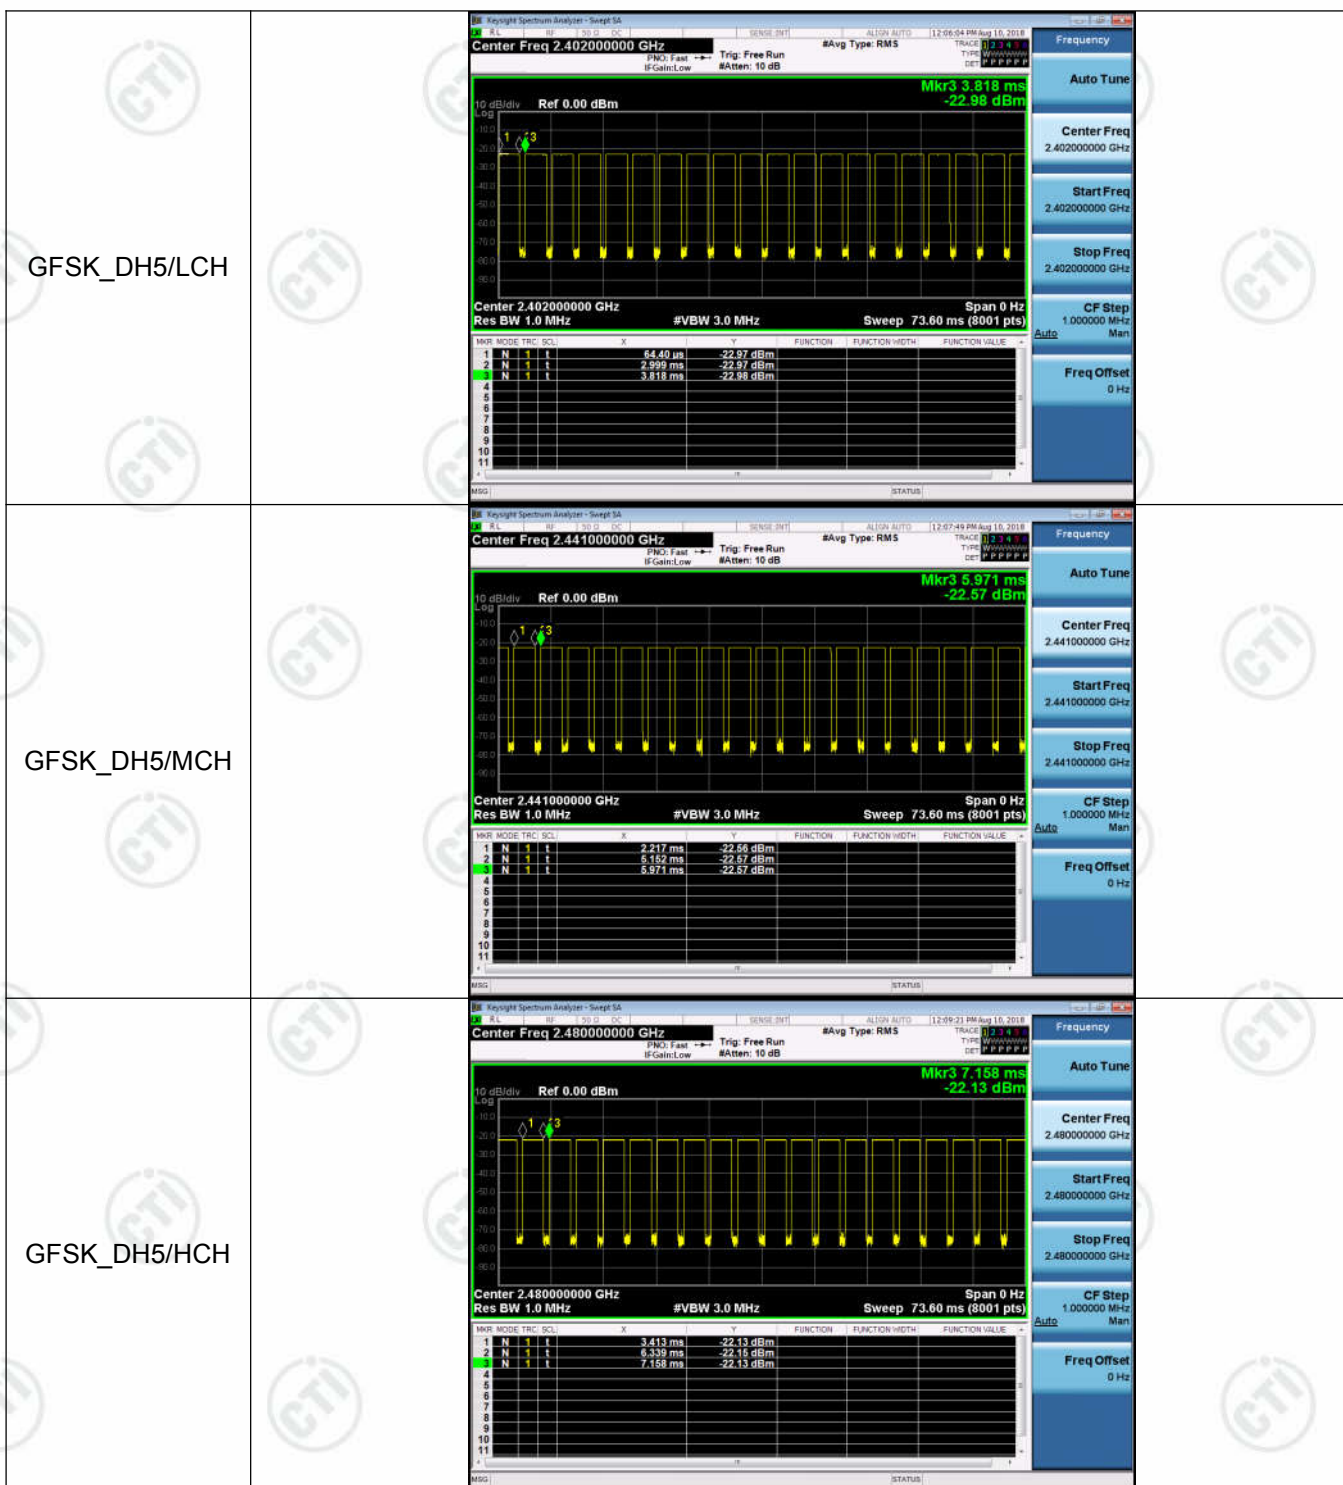


Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

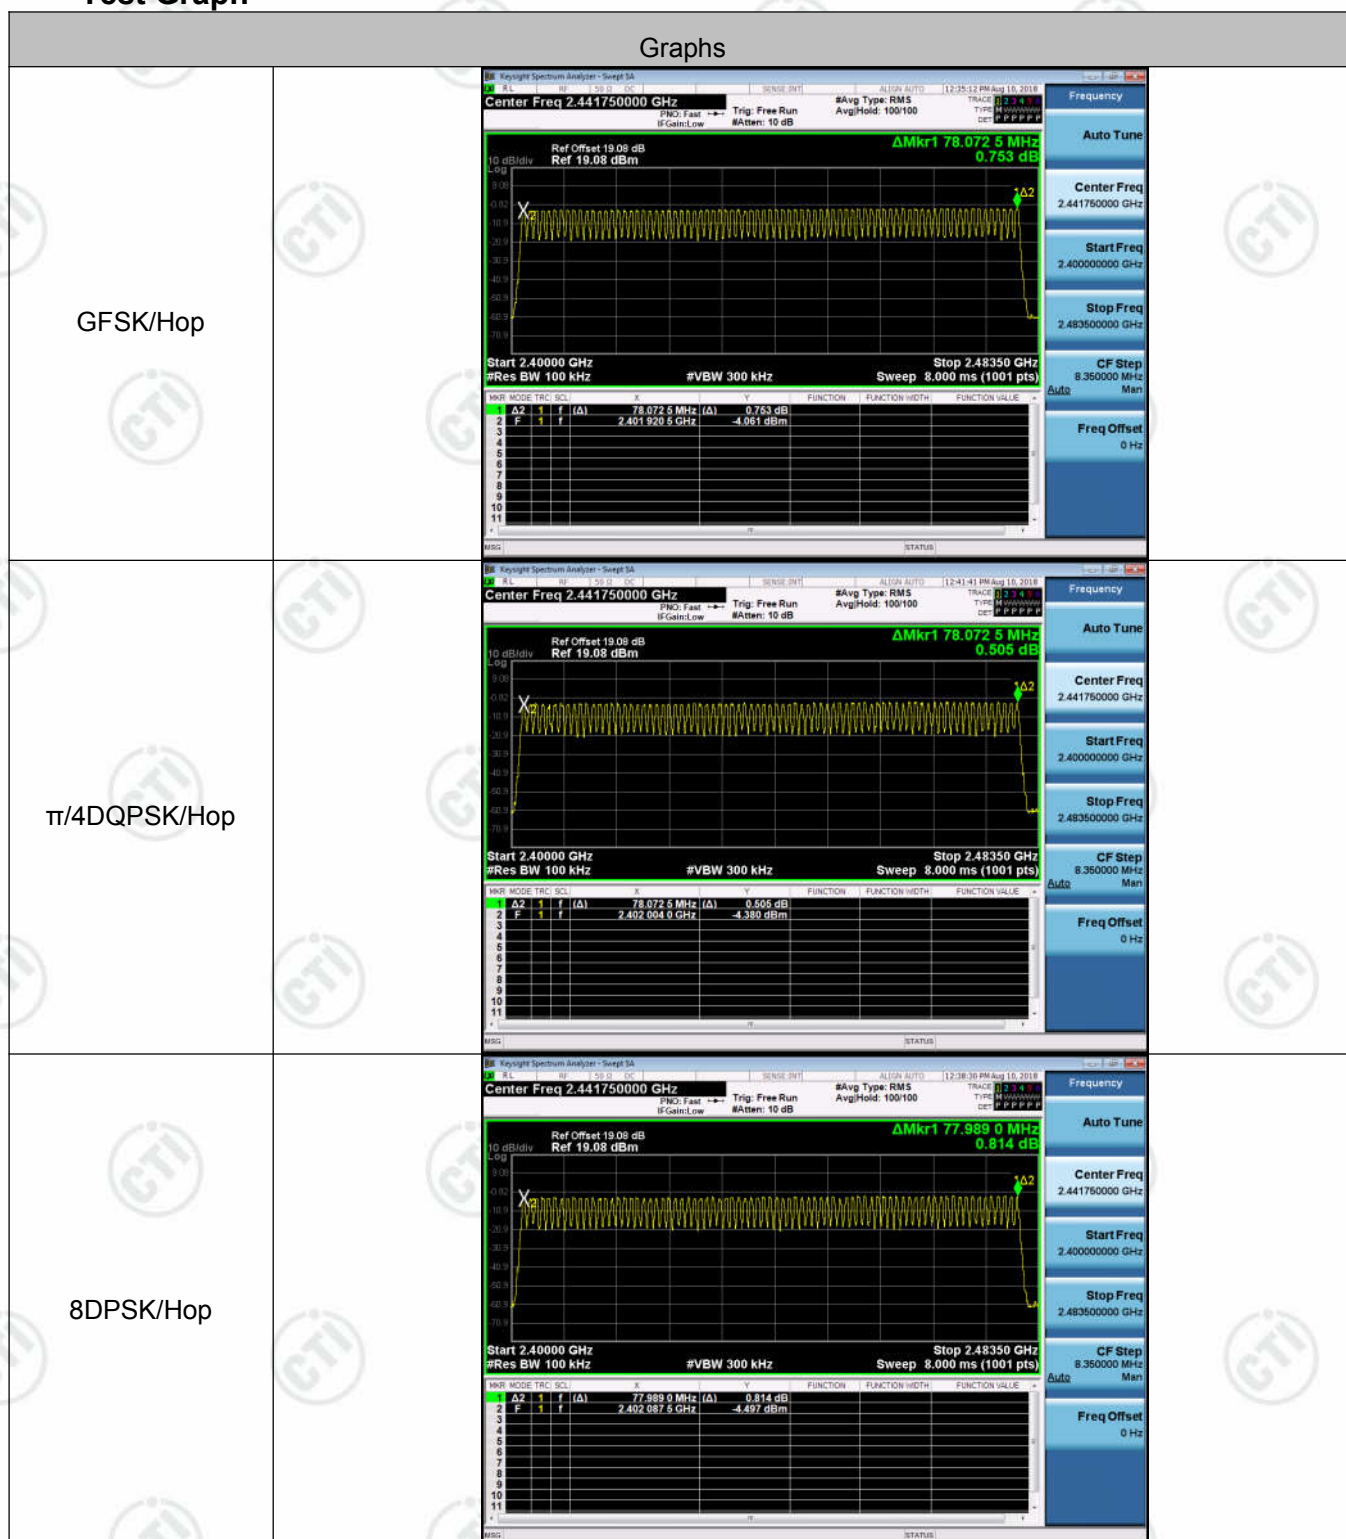



Appendix E): Conducted Peak Output Power


Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	-3.728	PASS
GFSK	MCH	-3.442	PASS
GFSK	HCH	-2.995	PASS
$\pi/4$ DQPSK	LCH	-3.741	PASS
$\pi/4$ DQPSK	MCH	-3.461	PASS
$\pi/4$ DQPSK	HCH	-2.981	PASS
8DPSK	LCH	-3.738	PASS
8DPSK	MCH	-3.456	PASS
8DPSK	HCH	-2.938	PASS

Test Graph

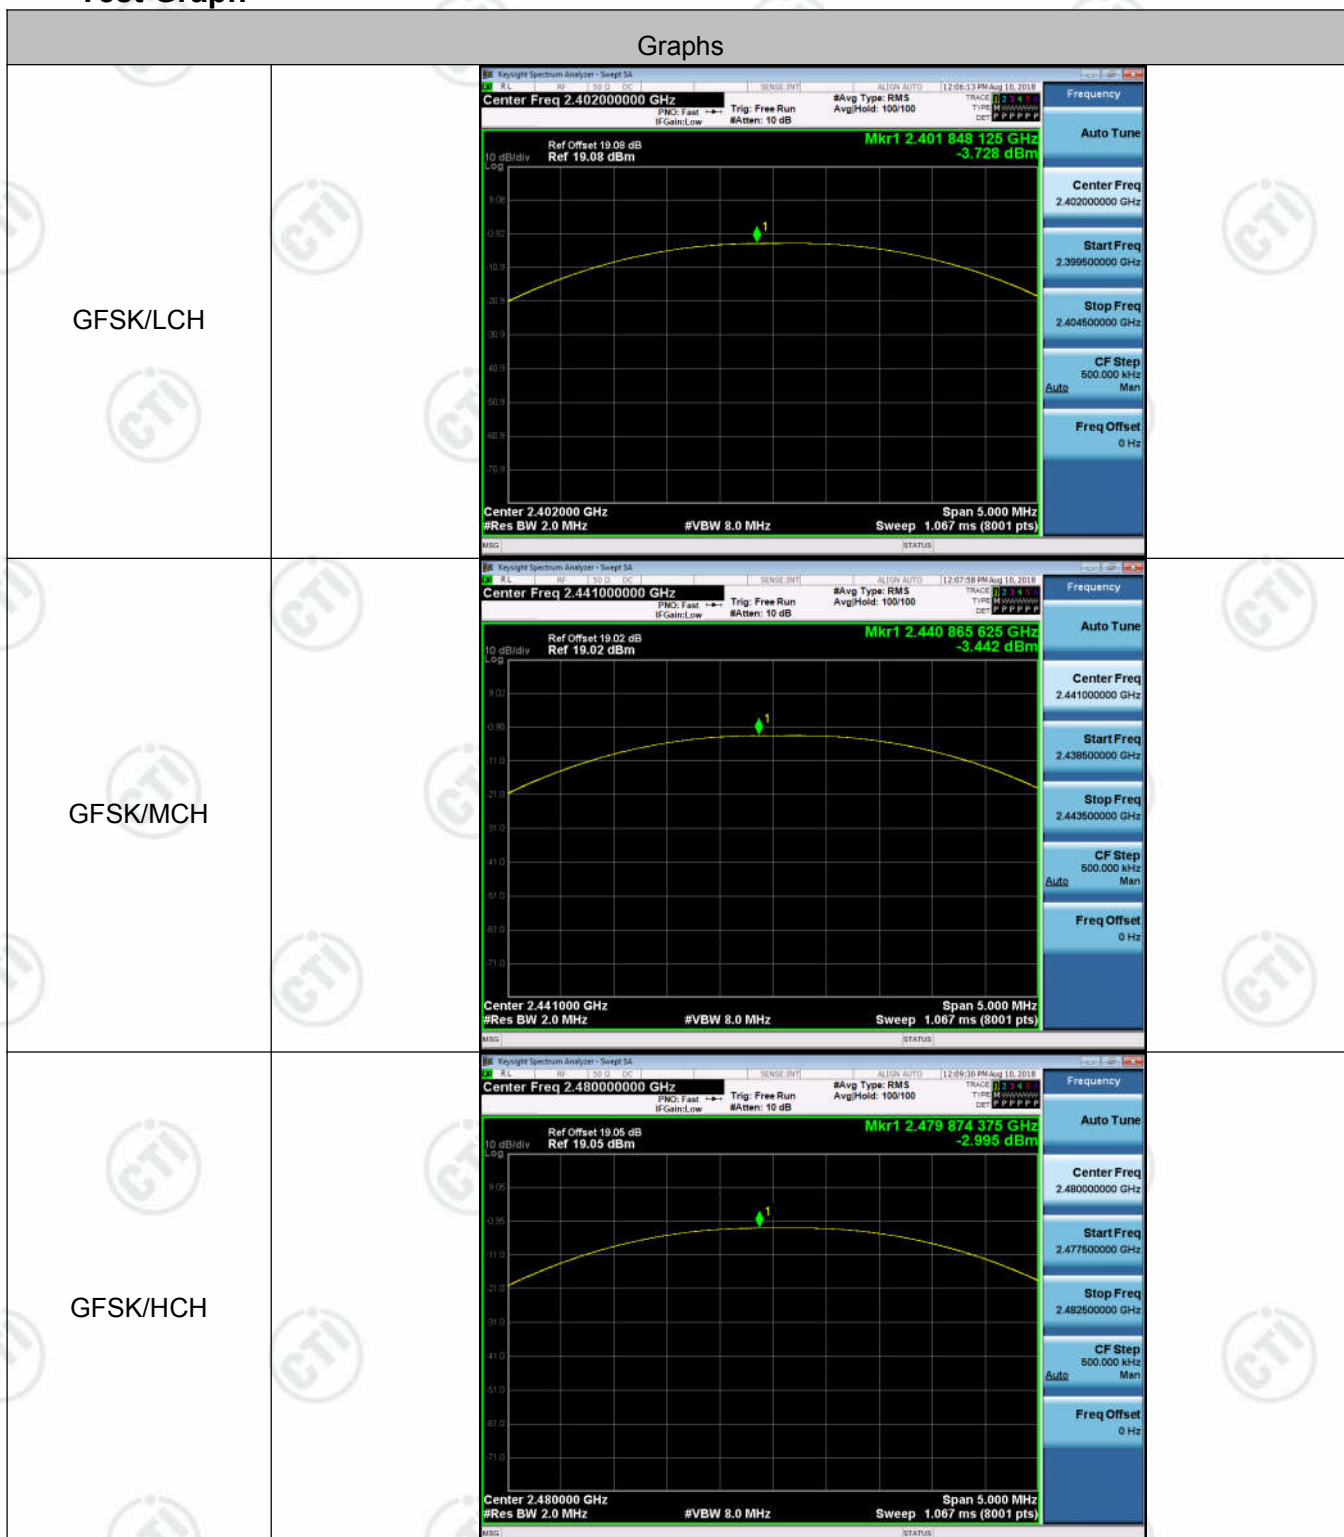
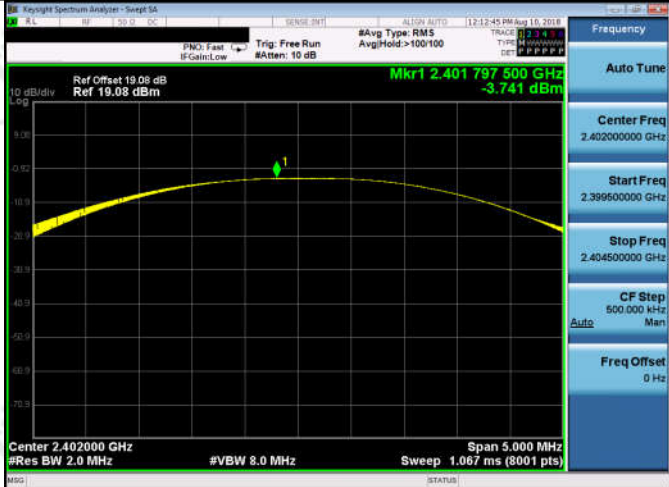
<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

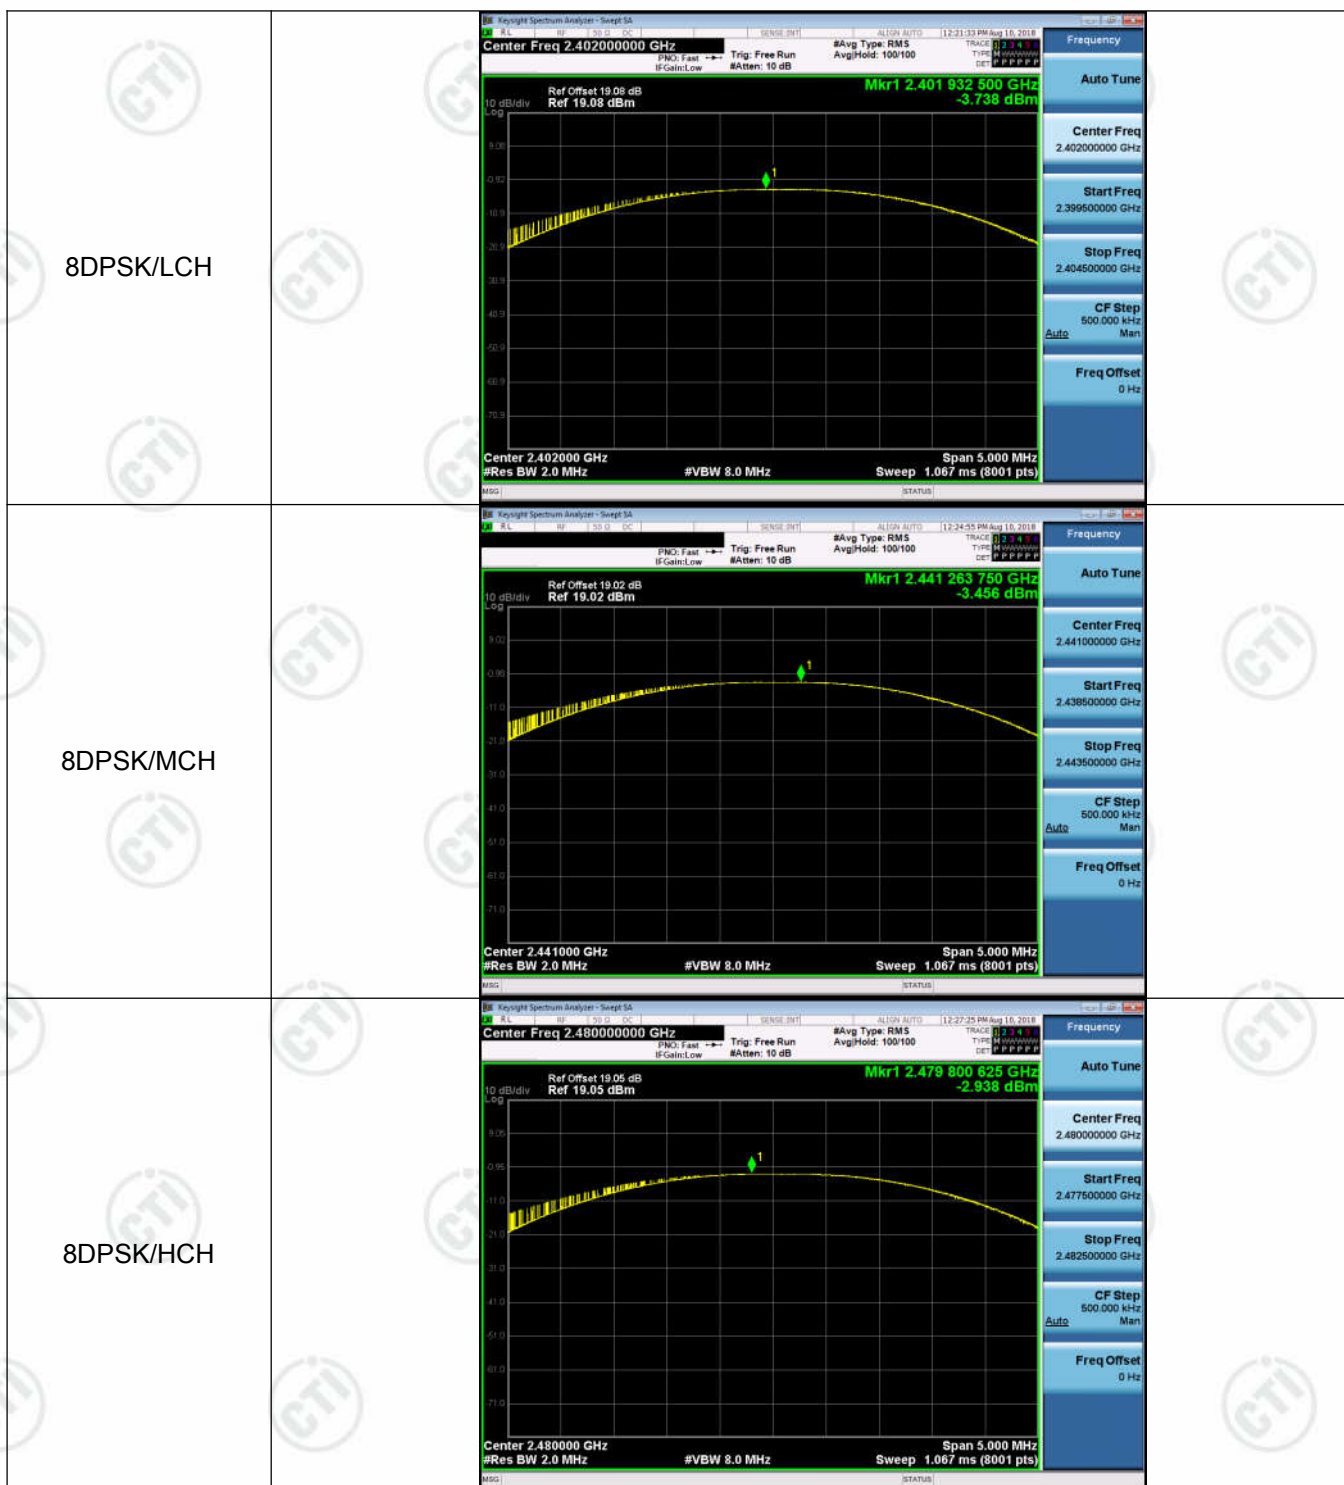

Appendix F): Band-edge for RF Conducted Emissions


Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	-3.974	Off	-60.863	-23.97	PASS
			-4.039	On	-60.053	-24.04	PASS
GFSK	HCH	2480	-3.306	Off	-60.184	-23.31	PASS
			-3.141	On	-60.458	-23.14	PASS
$\pi/4$ DQPSK	LCH	2402	-3.939	Off	-60.199	-23.94	PASS
			-4.026	On	-60.302	-24.03	PASS
$\pi/4$ DQPSK	HCH	2480	-3.165	Off	-51.673	-23.17	PASS
			-3.259	On	-60.050	-23.26	PASS
8DPSK	LCH	2402	-3.926	Off	-59.639	-23.93	PASS
			-4.059	On	-60.095	-24.06	PASS
8DPSK	HCH	2480	-3.143	Off	-48.786	-23.14	PASS
			-3.205	On	-59.757	-23.21	PASS


Test Graph

Graphs


GFSK/LCH/No Hop

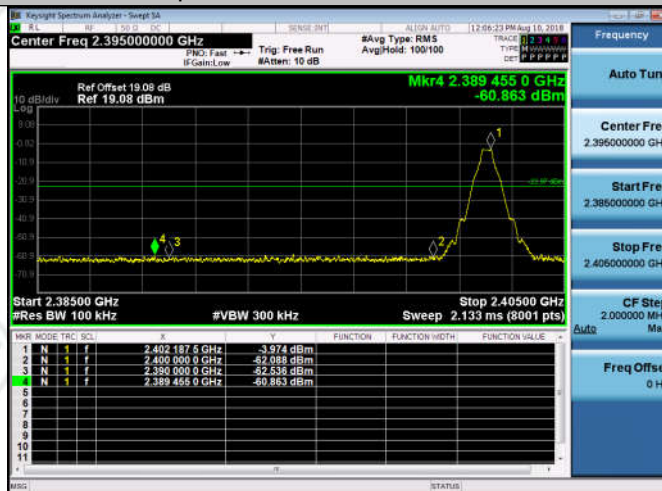



GFSK/LCH/Hop

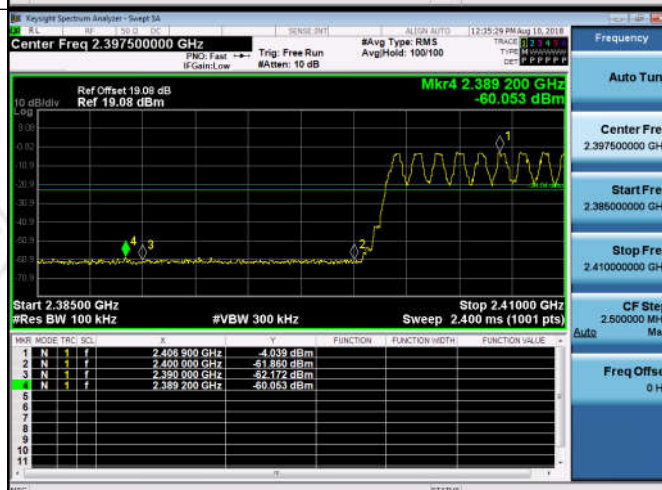


GFSK/HCH/No Hop

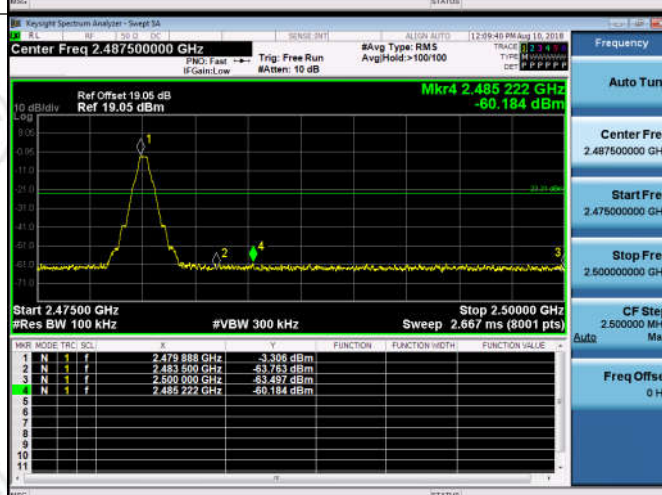

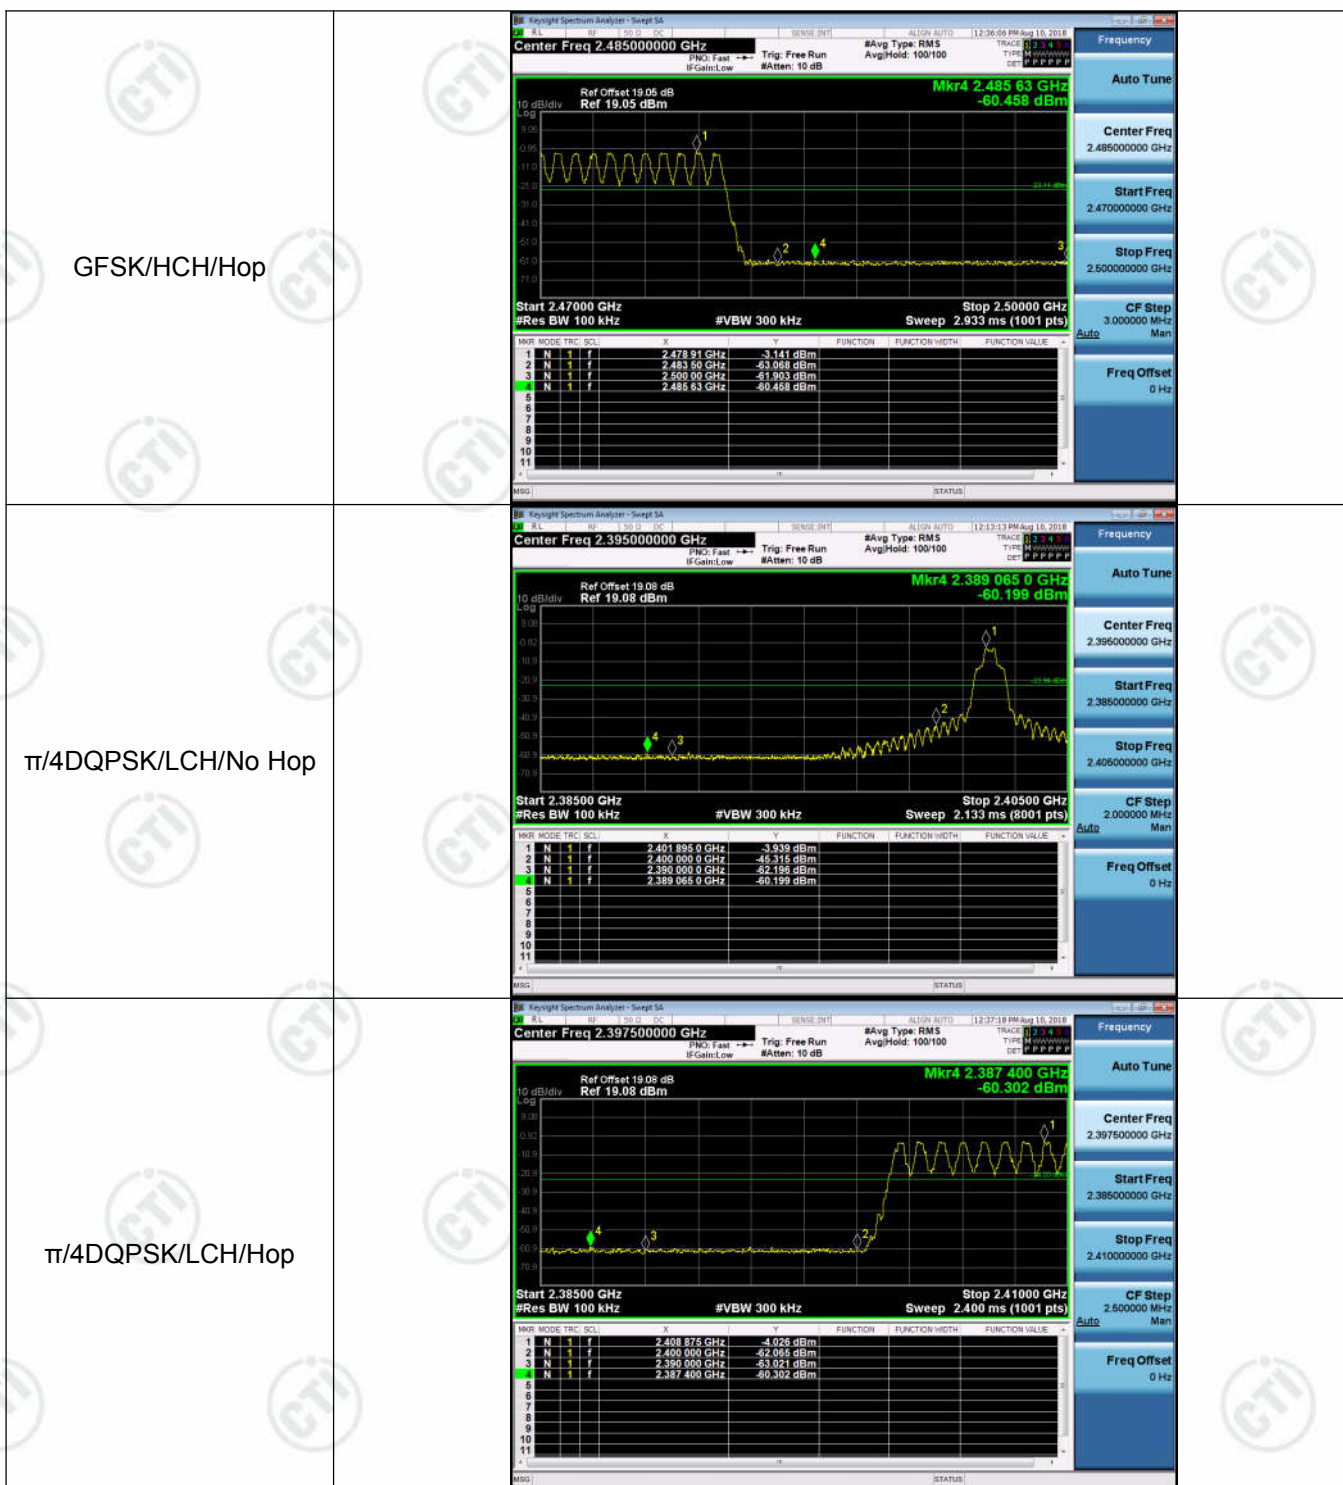

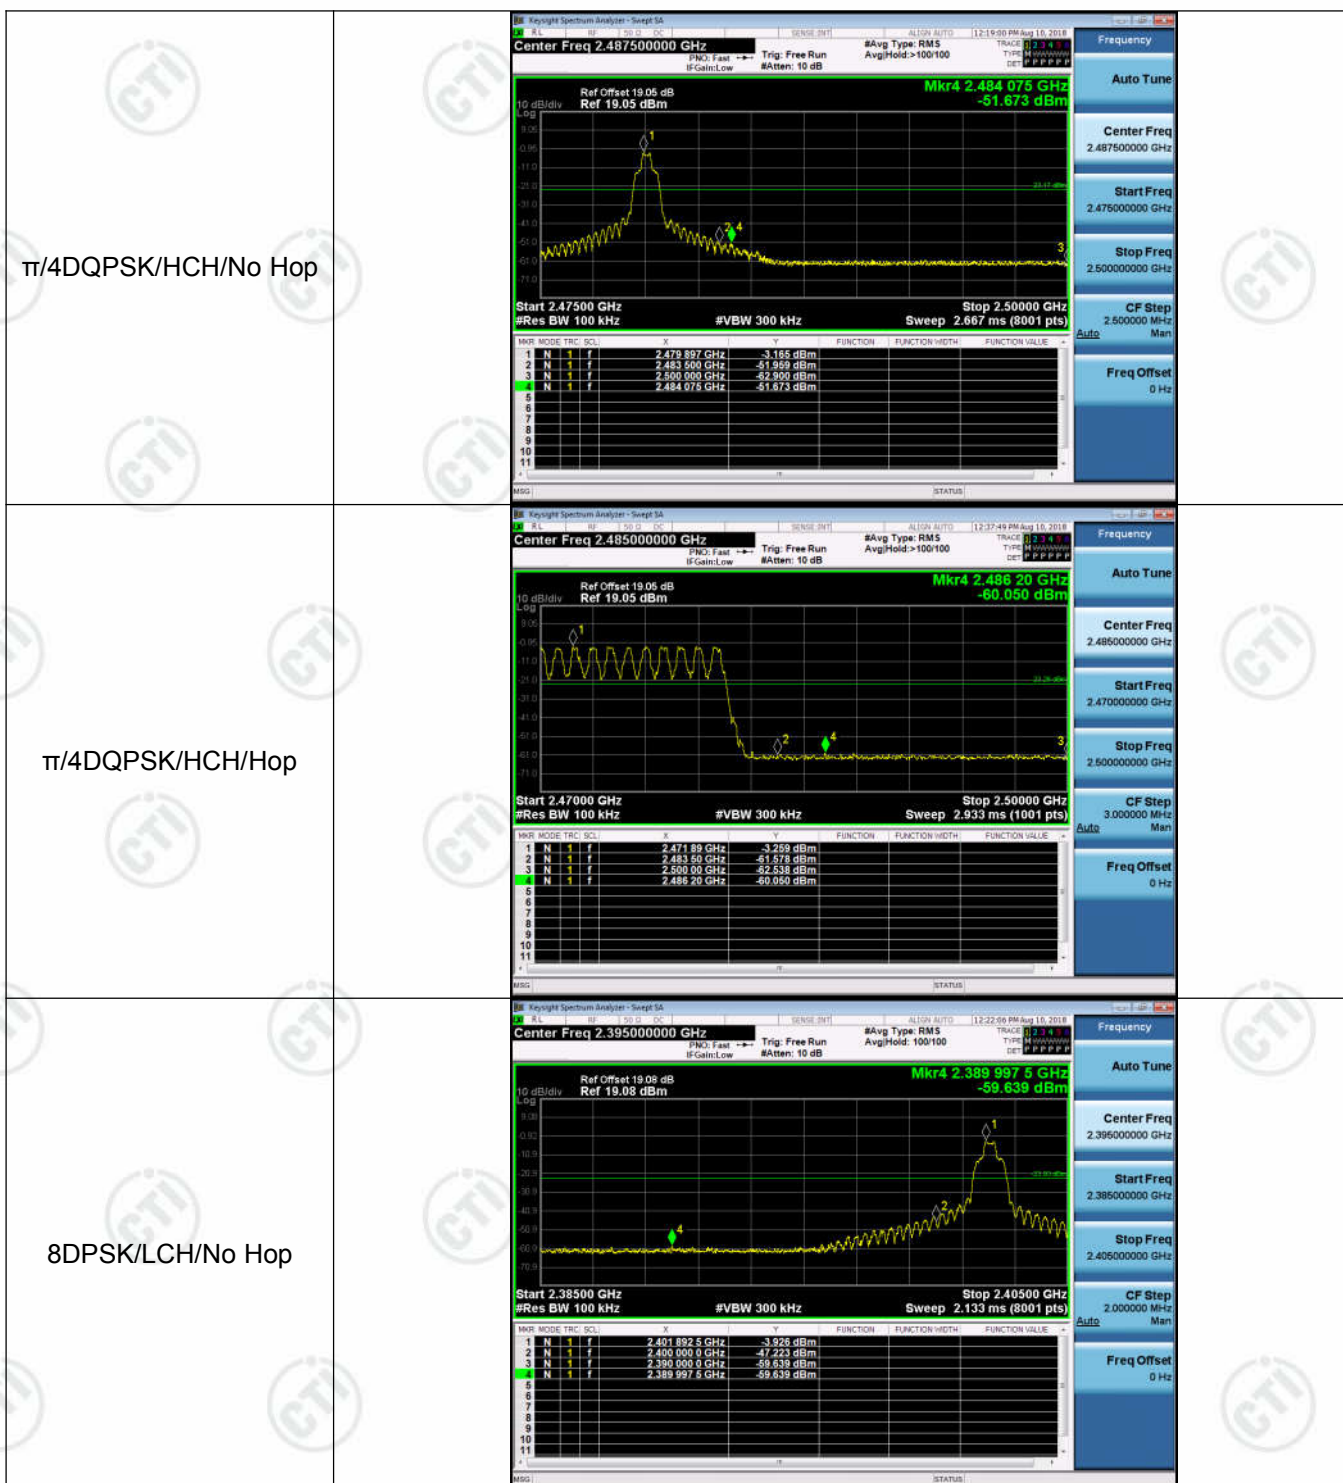

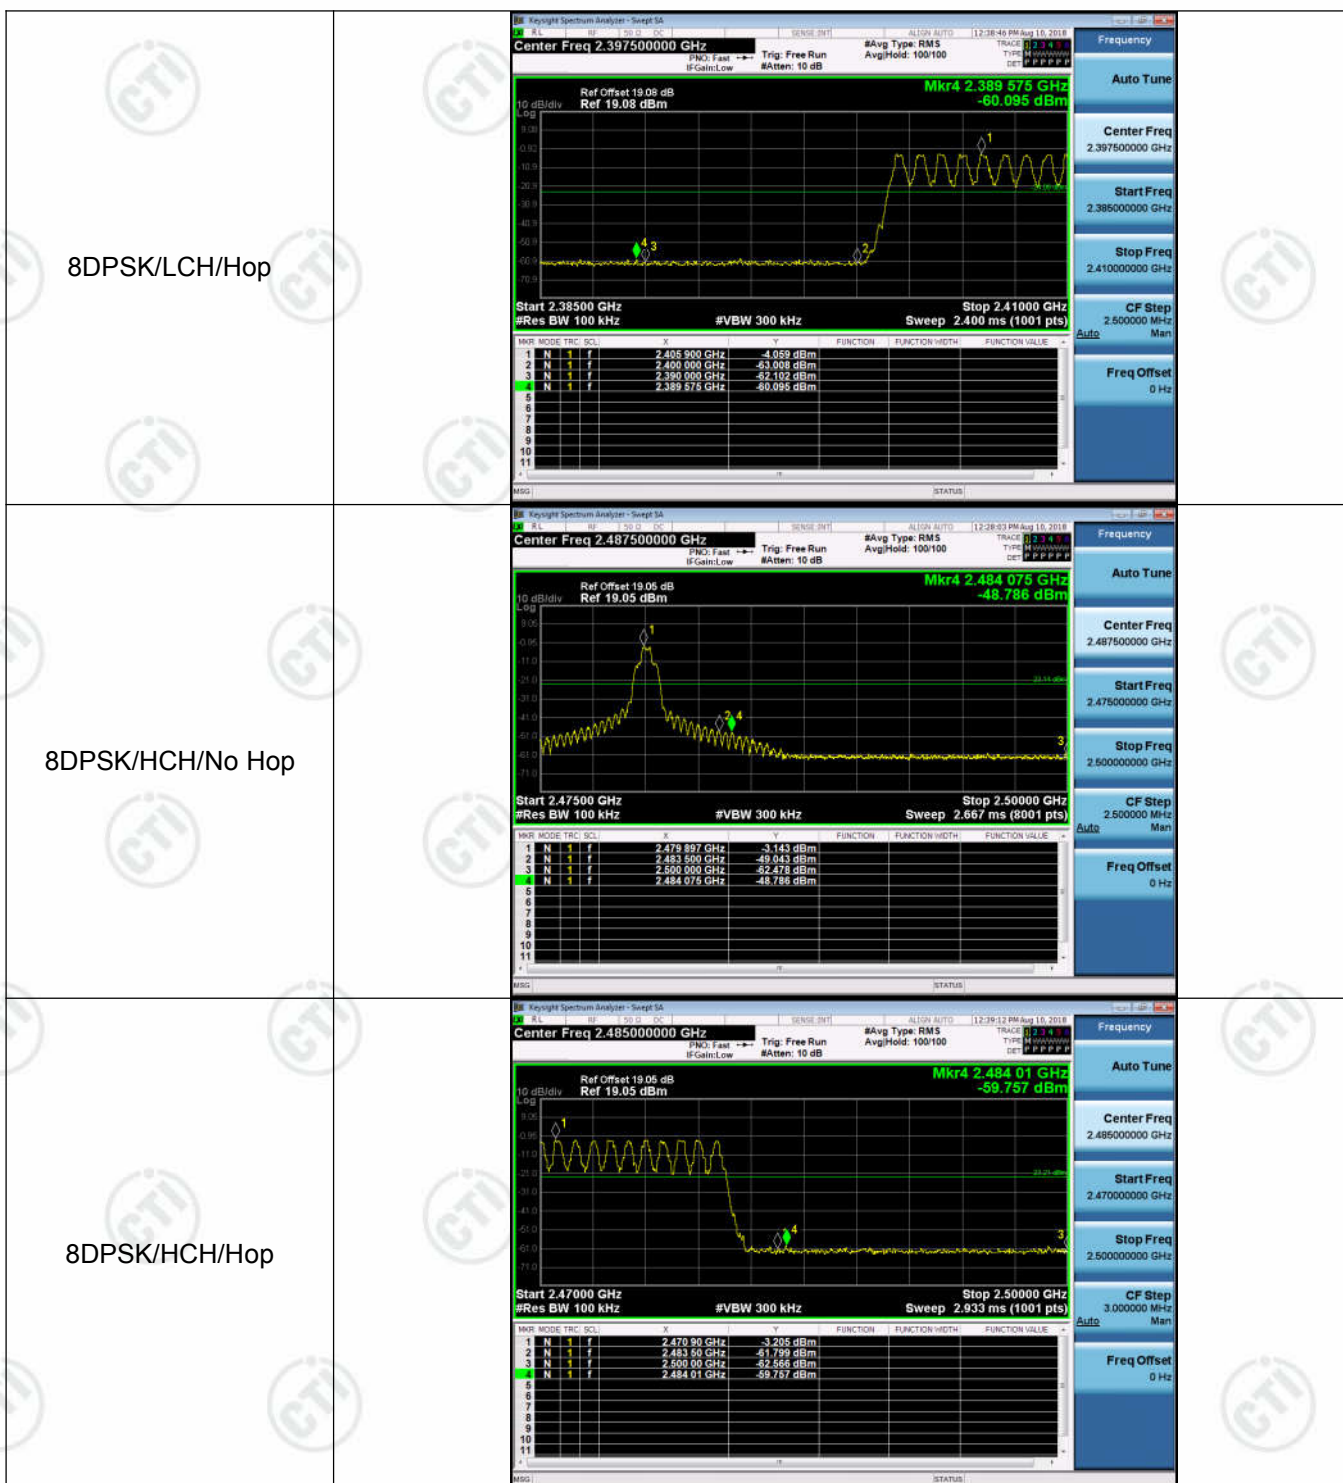



Appendix G): RF Conducted Spurious Emissions


Result Table



Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-4.047	<Limit	PASS
GFSK	MCH	-3.782	<Limit	PASS
GFSK	HCH	-3.311	<Limit	PASS
$\pi/4$ DQPSK	LCH	-4.032	<Limit	PASS
$\pi/4$ DQPSK	MCH	-3.743	<Limit	PASS
$\pi/4$ DQPSK	HCH	-3.28	<Limit	PASS
8DPSK	LCH	-4.046	<Limit	PASS
8DPSK	MCH	-3.755	<Limit	PASS
8DPSK	HCH	-3.277	<Limit	PASS



Test Graph




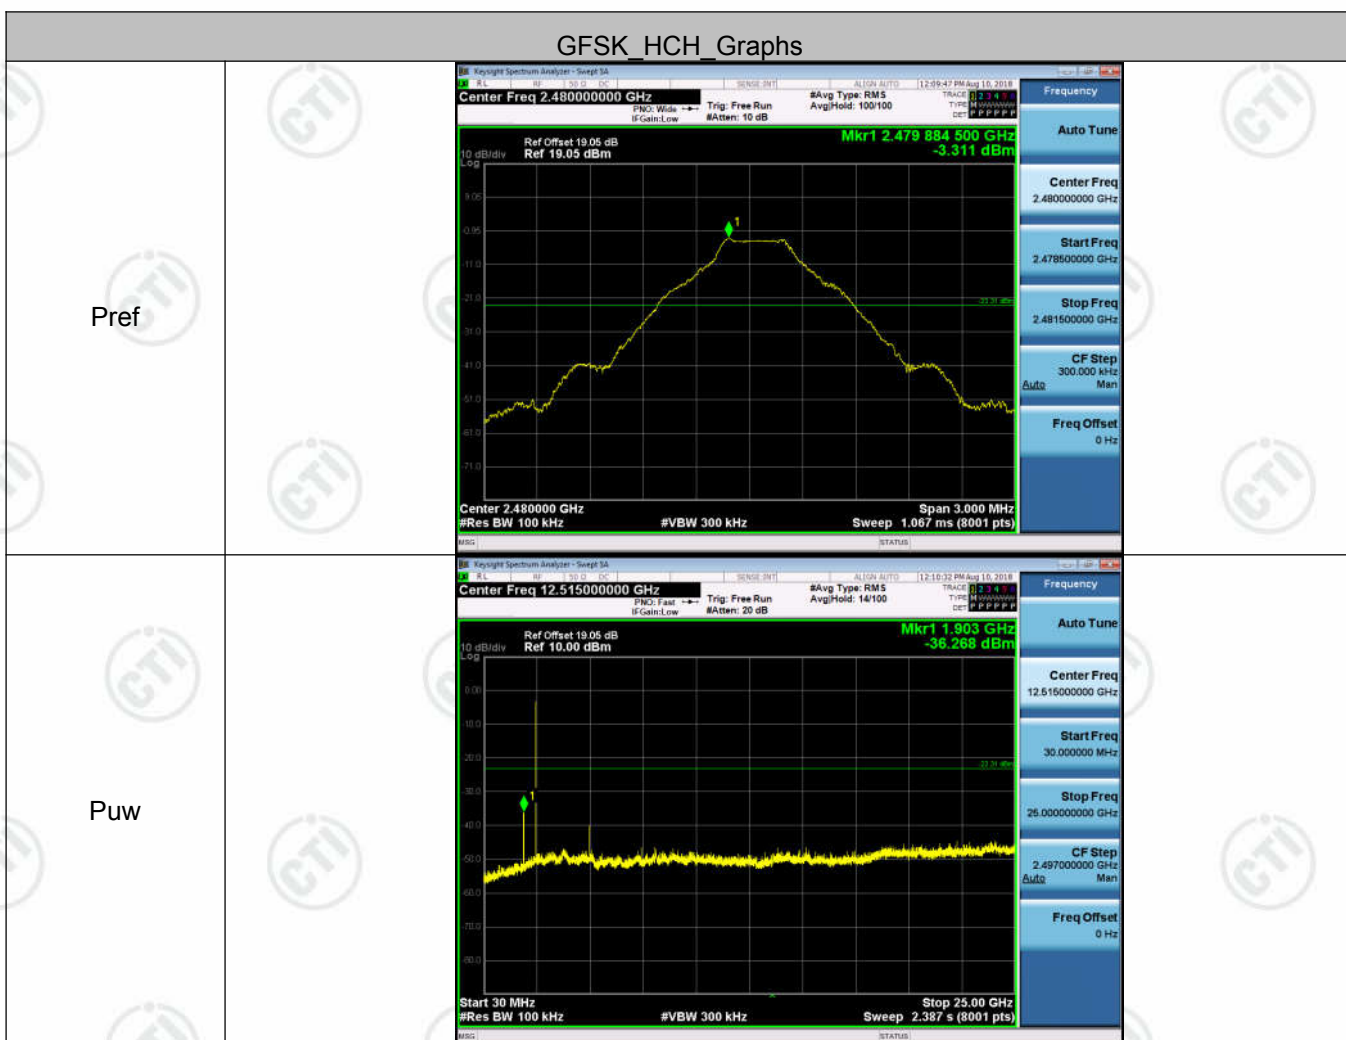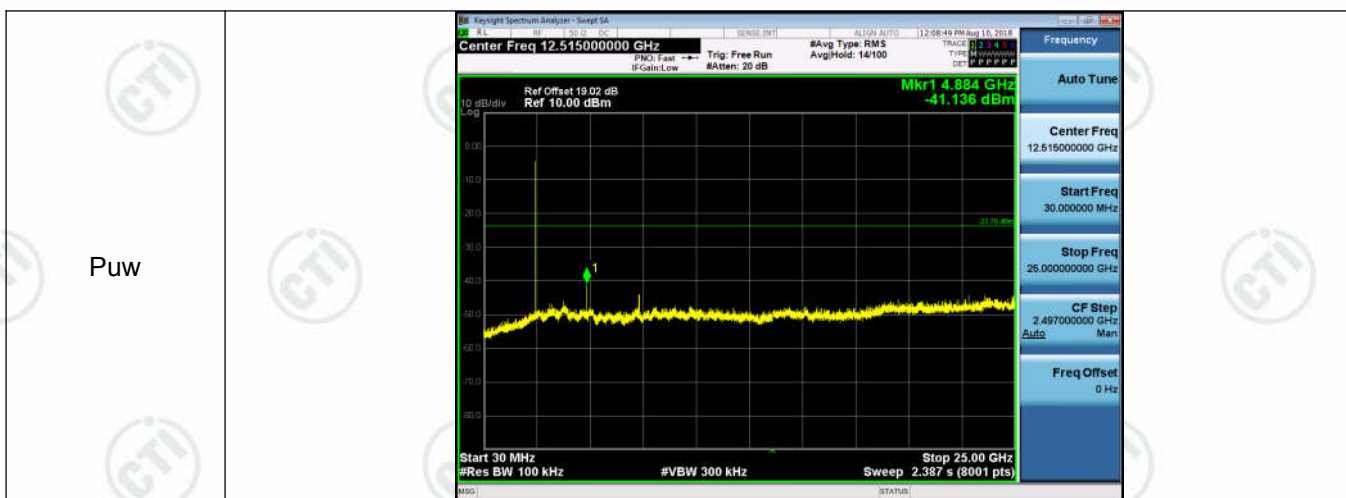

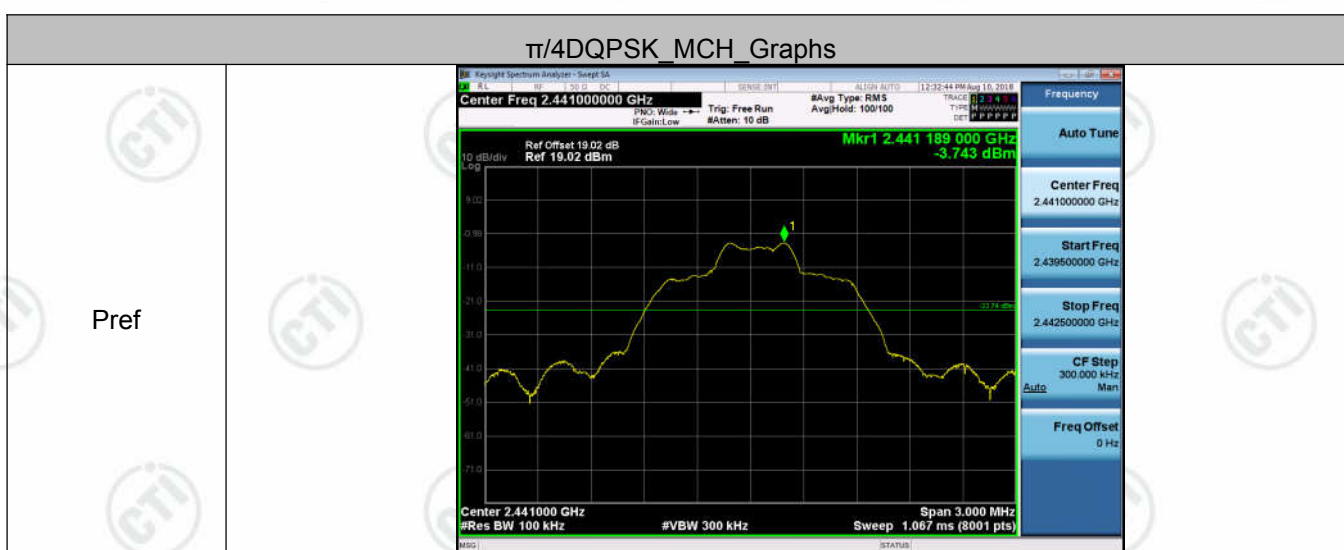

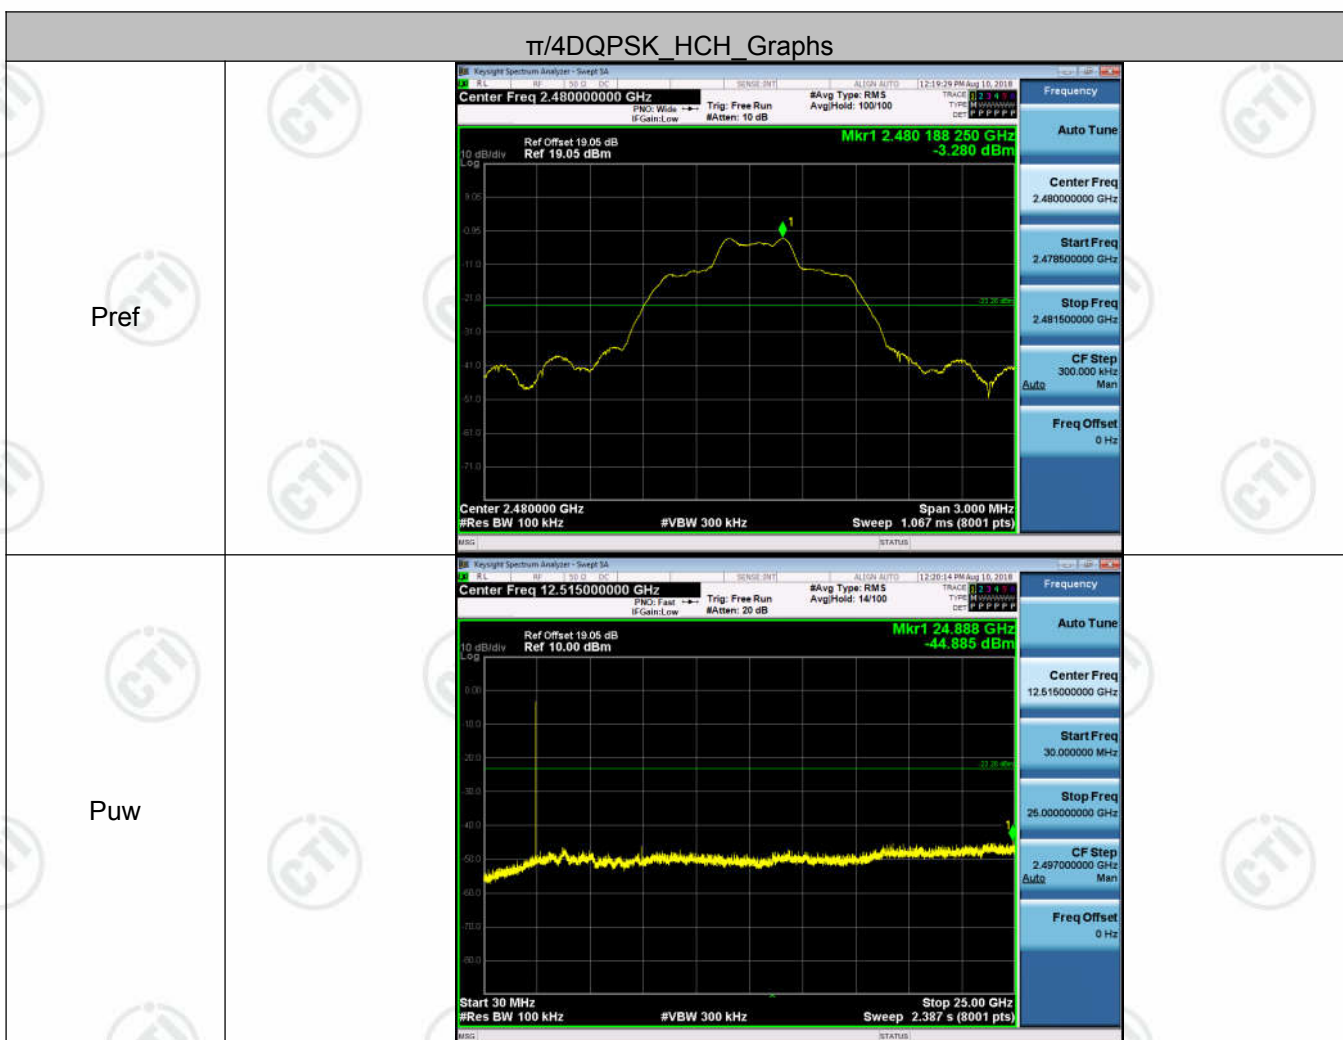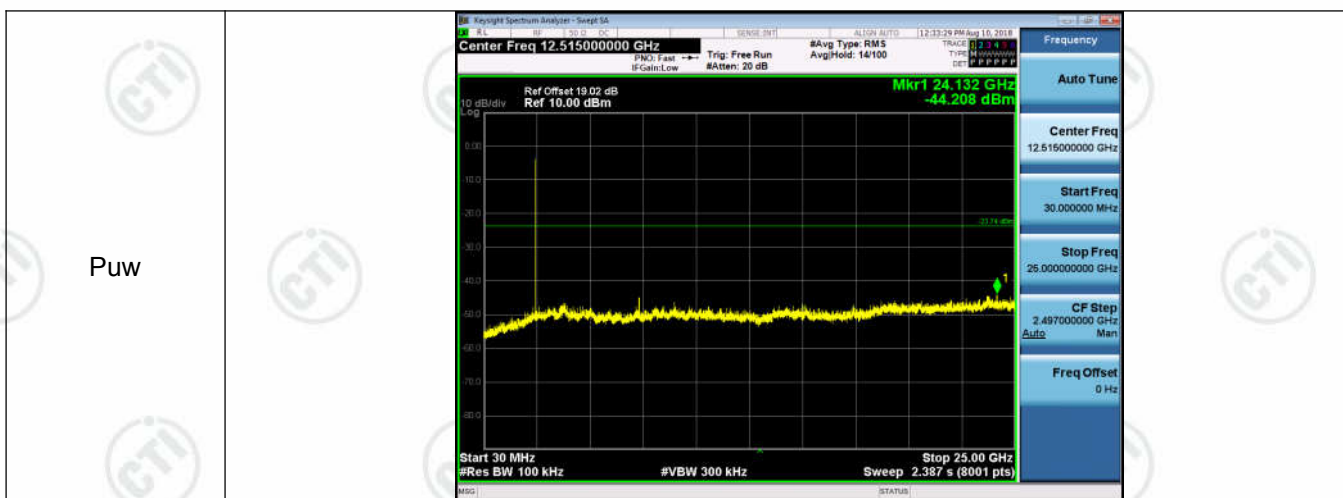

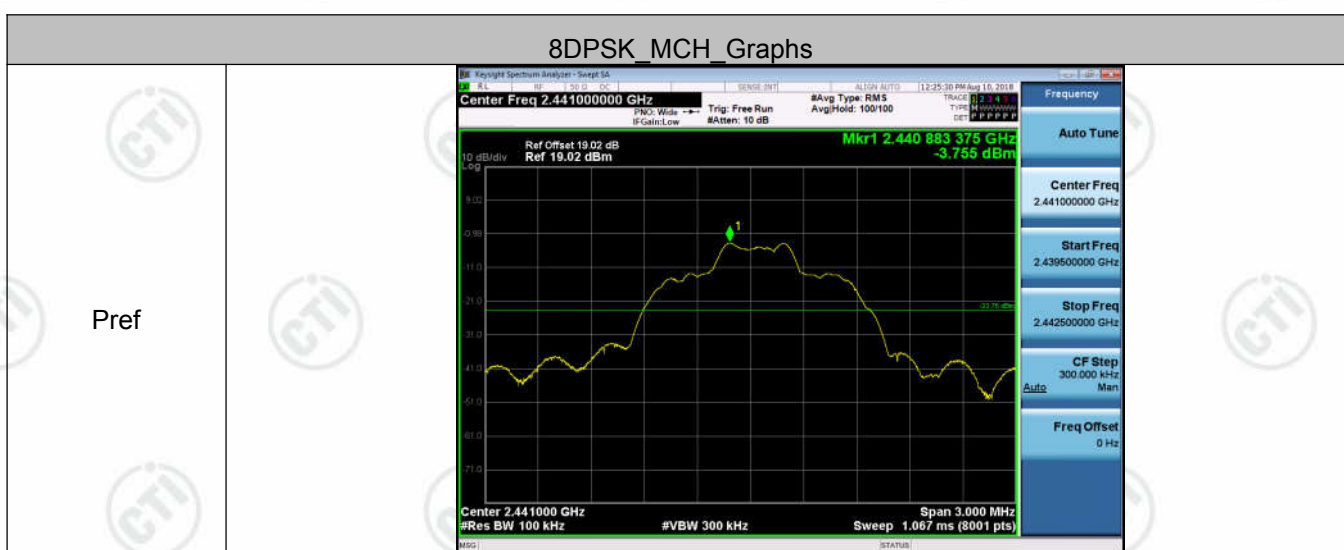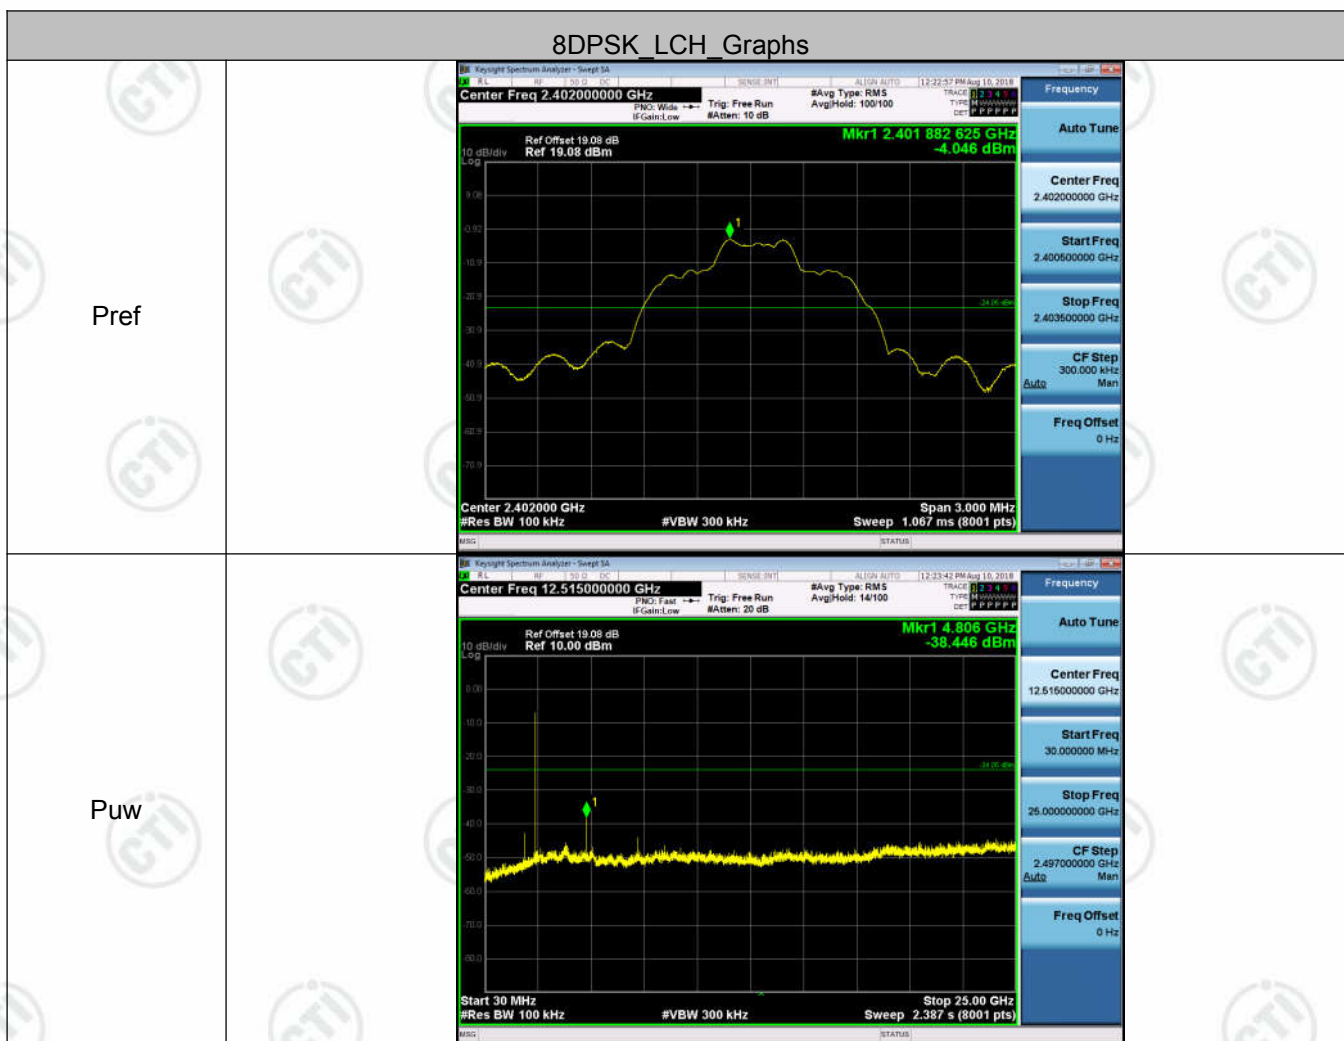

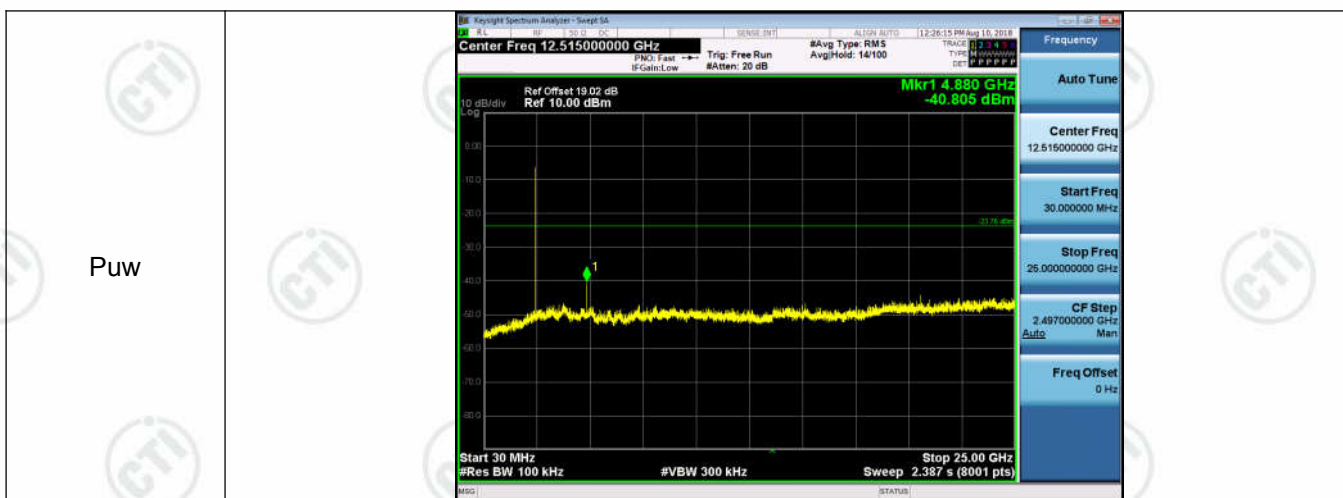

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="316 999 1370 1146" data-label="Diagram"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1245 1275 1393" data-label="Figure"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

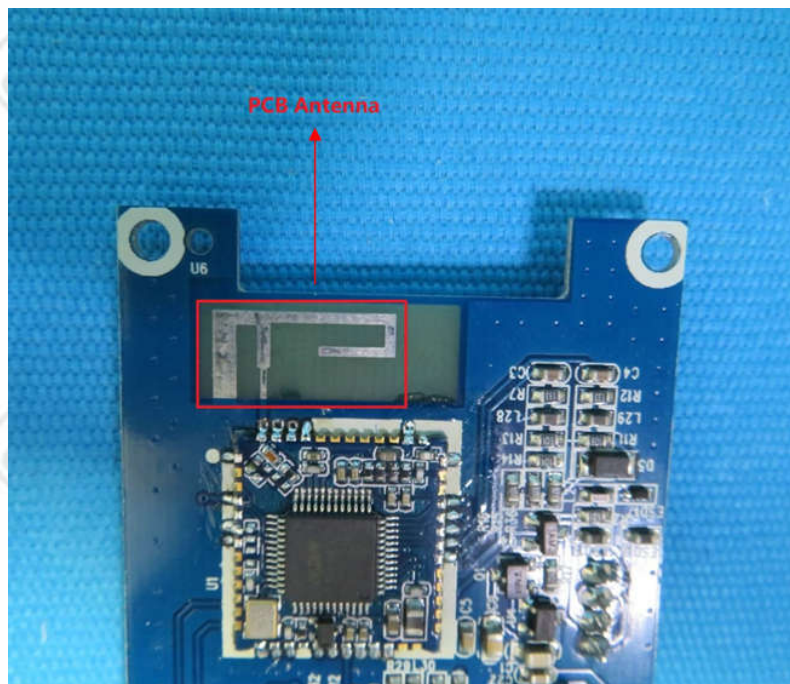

Appendix J): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

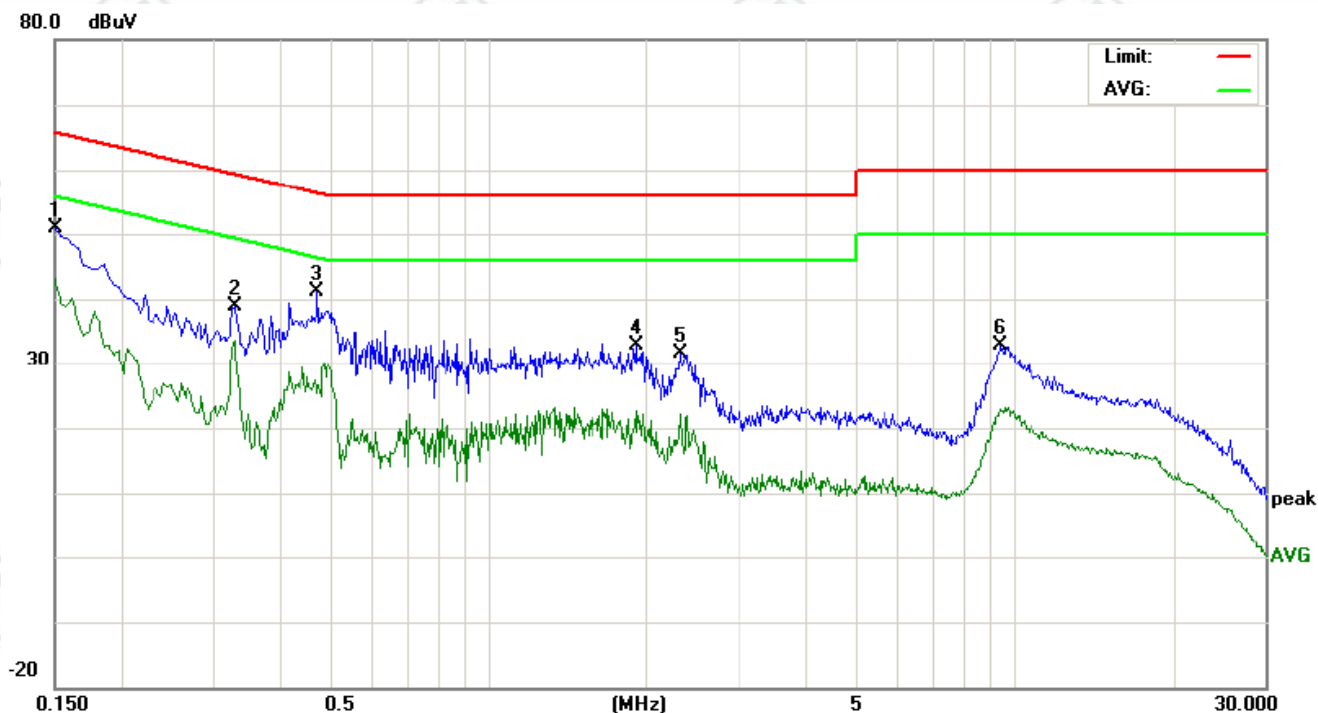

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	41.11	37.05	33.26	9.77	50.88	46.82	43.03	65.99	55.99	-19.17	-12.96	P	
2	0.3300	29.11	26.89	23.95	9.77	38.88	36.66	33.72	59.45	49.45	-22.79	-15.73	P	
3	0.4740	31.32	28.15	15.70	9.72	41.04	37.87	25.42	56.44	46.44	-18.57	-21.02	P	
4	1.9100	23.19	20.63	12.95	9.72	32.91	30.35	22.67	56.00	46.00	-25.65	-23.33	P	
5	2.3140	21.83	18.05	12.38	9.71	31.54	27.76	22.09	56.00	46.00	-28.24	-23.91	P	
6	9.4100	23.04	20.63	13.13	9.76	32.80	30.39	22.89	60.00	50.00	-29.61	-27.11	P	

Neutral line:

80.0 dBuV

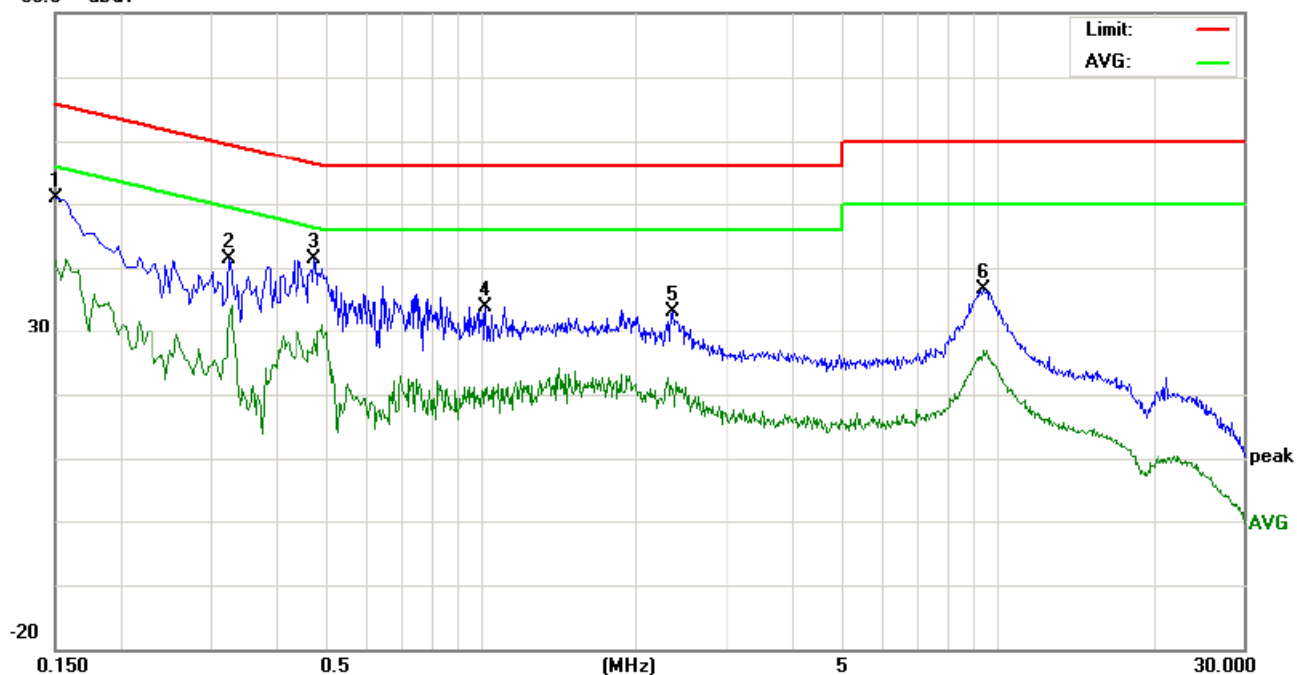

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	41.09	37.06	31.28	9.77	50.86	46.83	41.05	65.99	55.99	-19.16	-14.94	P	
2	0.3260	31.62	28.05	22.32	9.77	41.39	37.82	32.09	59.55	49.55	-21.73	-17.46	P	
3	0.4780	31.69	28.60	19.02	9.72	41.41	38.32	28.74	56.37	46.37	-18.05	-17.63	P	
4	1.0260	24.23	21.60	10.84	9.72	33.95	31.32	20.56	56.00	46.00	-24.68	-25.44	P	
5	2.3500	23.38	20.36	10.95	9.71	33.09	30.07	20.66	56.00	46.00	-25.93	-25.34	P	
6	9.4220	26.90	23.96	17.19	9.76	36.66	33.72	26.95	60.00	50.00	-26.28	-23.05	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table><tr><th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120kHz</td><td>300kHz</td><td>Quasi-peak</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average</td></tr></table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ul style="list-style-type: none">a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ul style="list-style-type: none">g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).h. b. Test the EUT in the lowest channel , the Highest channeli. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.j. Repeat above procedures until all frequencies measured was complete.																				
Limit:	<table><tr><th>Frequency</th><th>Limit (dBμV/m @3m)</th><th>Remark</th></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>74.0</td><td>Peak Value</td></tr></table>	Frequency	Limit (dBμV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBμV/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			


Test plot as follows:

Worse case mode:	GFSK(1-DH5)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

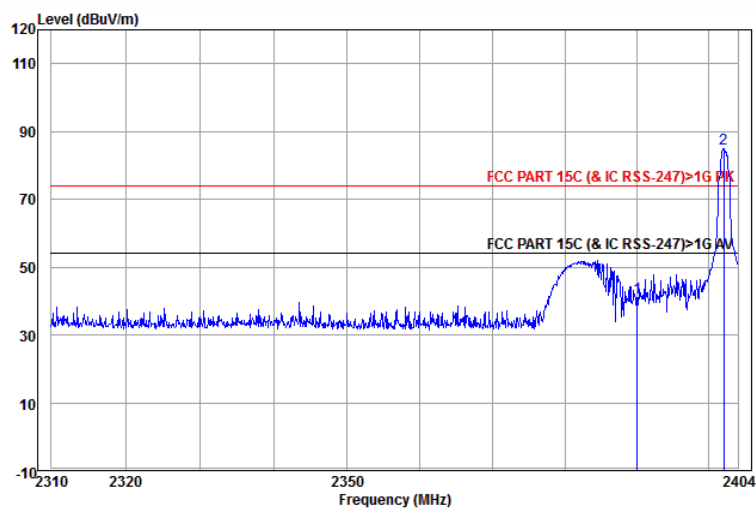


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	27.64	3.07	44.03	54.22	40.90	74.00	-33.10	Horizontal Peak
2 pp	2402.083	27.62	3.07	44.04	98.24	84.89	74.00	10.89	Horizontal Peak

Worse case mode:	GFSK(1-DH5)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

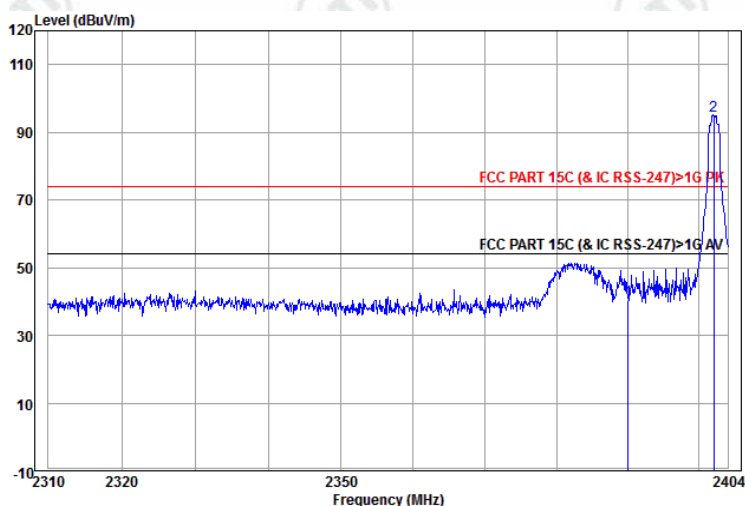


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	27.64	3.07	44.03	53.58	40.26	74.00	-33.74	Vertical Peak
2 pp	2402.083	27.62	3.07	44.04	108.17	94.82	74.00	20.82	Vertical Peak

Worse case mode:	GFSK(1-DH5)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

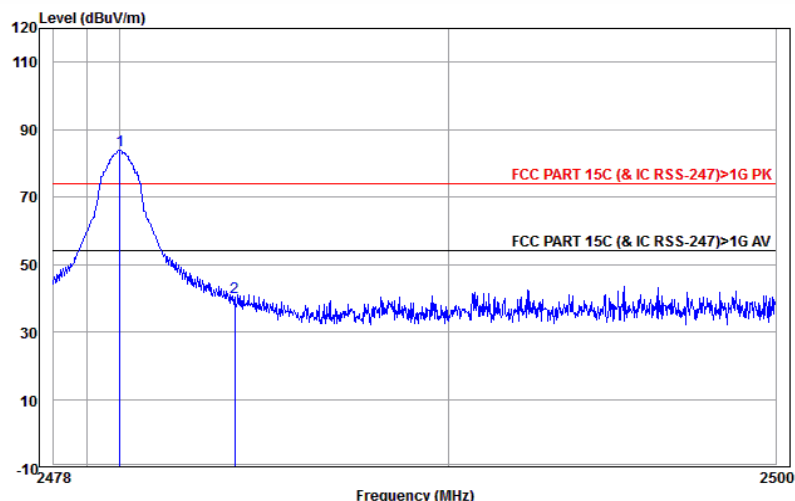


		Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dB/m	dB	dB	dBuV	dBuV/m	dB	
1	pp	2480.016	27.59	3.12	44.14	97.33	83.90	74.00	9.90 Horizontal Peak
2		2483.500	27.59	3.12	44.14	53.75	40.32	74.00	-33.68 Horizontal Peak

Worse case mode:	GFSK(1-DH5)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

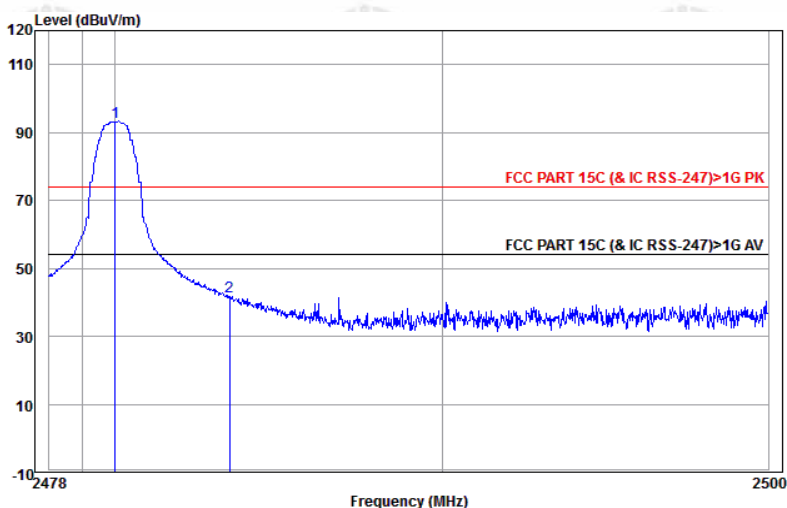


		Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dB/m	dB	dB	dBuV	dBuV/m	dB	
1	pp	2480.016	27.59	3.12	44.14	106.60	93.17	74.00	19.17 Horizontal Peak
2		2483.500	27.59	3.12	44.14	55.00	41.57	74.00	-32.43 Horizontal Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

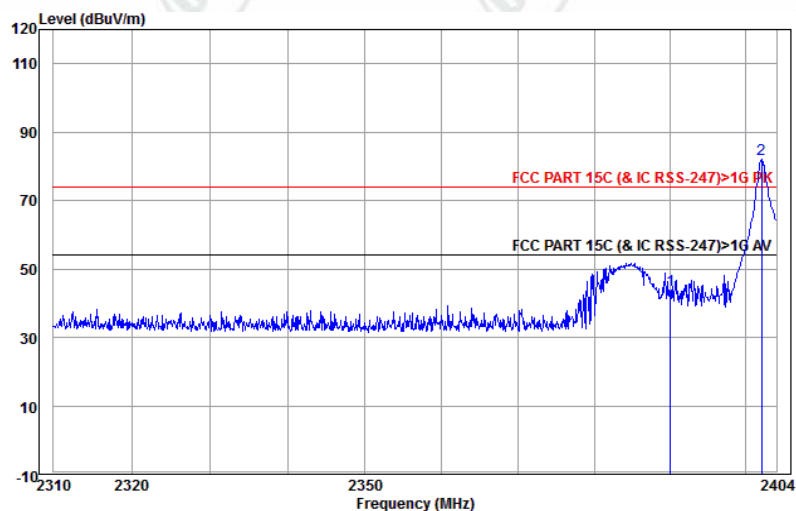


	Ant Freq	Factor	Cable Loss	Preamplifier	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	44.03	57.34	44.02	74.00	-29.98	Horizontal	Peak
2 pp	2402.083	27.62	3.07	44.04	95.41	82.06	74.00	8.06	Horizontal	Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

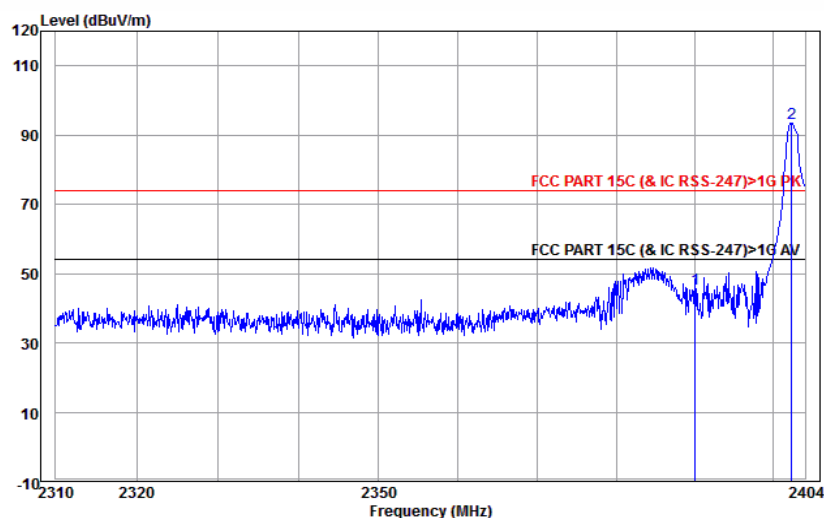


	Ant Freq	Factor	Cable Loss	Preamplifier	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	44.03	59.09	45.77	74.00	-28.23	Vertical	Peak
2 pp	2402.275	27.62	3.08	44.04	106.68	93.34	74.00	19.34	Vertical	Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

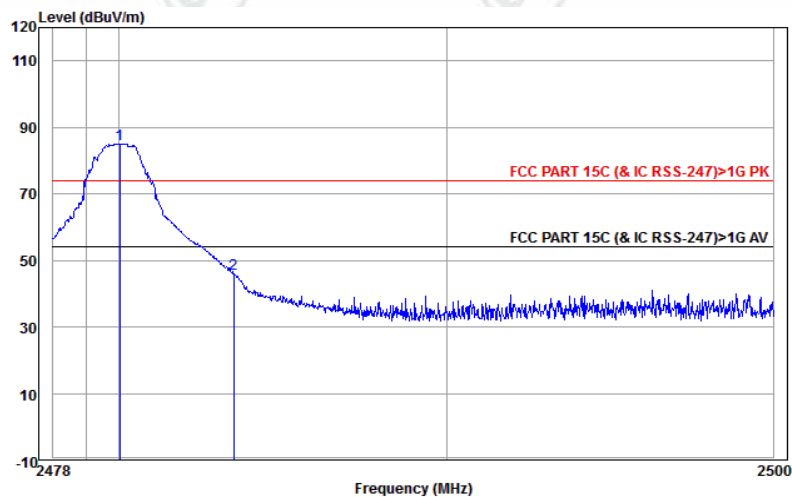


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.038	27.59	3.12	44.14	98.36	84.93	74.00	10.93	Horizontal Peak
2	2483.500	27.59	3.12	44.14	59.26	45.83	74.00	-28.17	Horizontal Peak

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

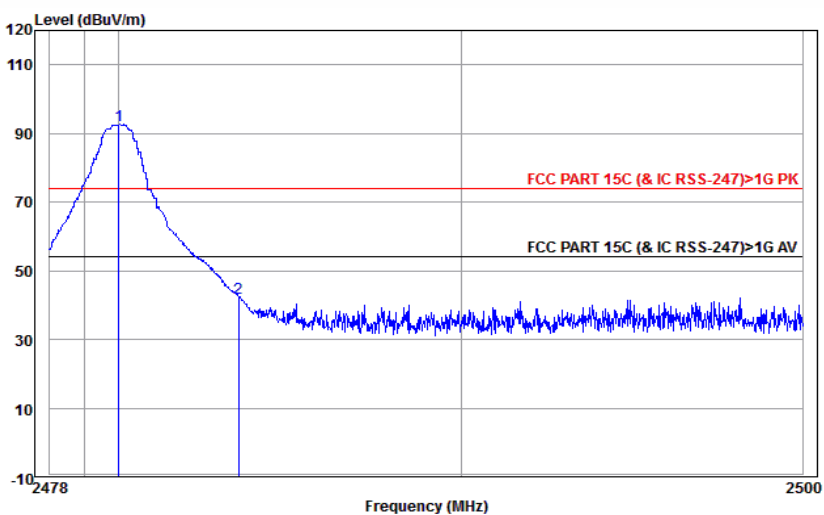


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.016	27.59	3.12	44.14	105.77	92.34	74.00	18.34	Vertical Peak
2	2483.500	27.59	3.12	44.14	55.57	42.14	74.00	-31.86	Vertical Peak

Worse case mode:	8DPSK(3-DH5)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

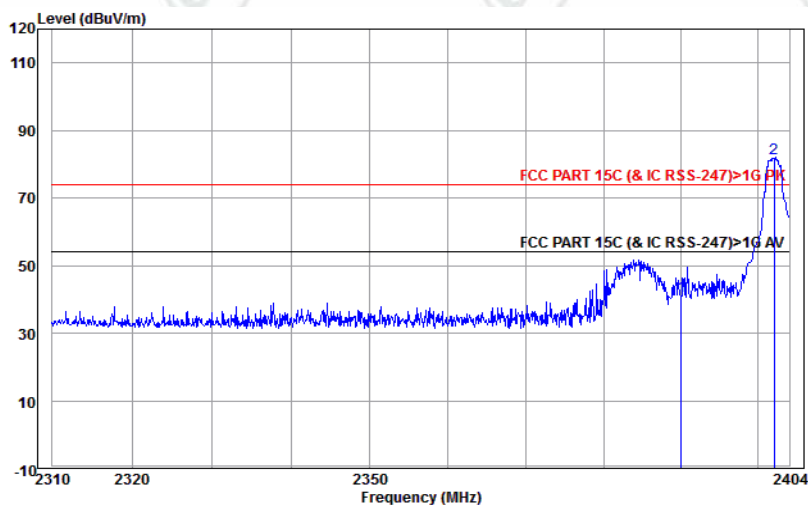


	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	44.03	54.49	41.17	74.00	-32.83	Horizontal	Peak
2 pp	2402.083	27.62	3.07	44.04	95.21	81.86	74.00	7.86	Horizontal	Peak

Worse case mode:	8DPSK(3-DH5)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

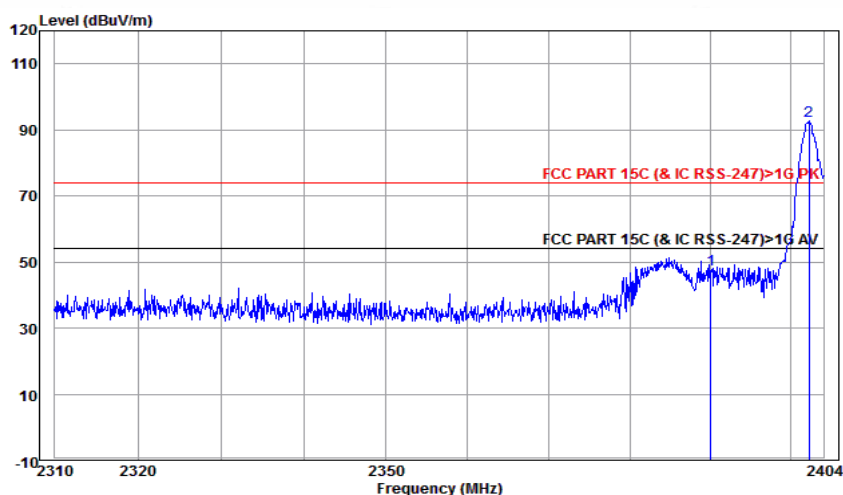


	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	44.03	61.22	47.90	74.00	-26.10	Vertical	Peak
2 pp	2402.179	27.62	3.07	44.04	106.00	92.65	74.00	18.65	Vertical	Peak

Worse case mode:	8DPSK(3-DH5)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

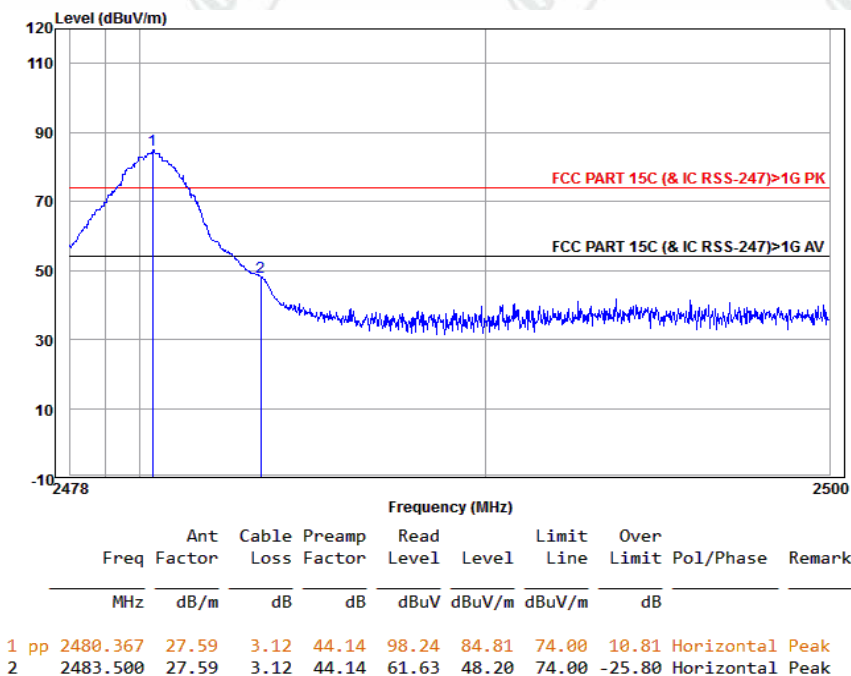

Worse case mode:	8DPSK(3-DH5)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

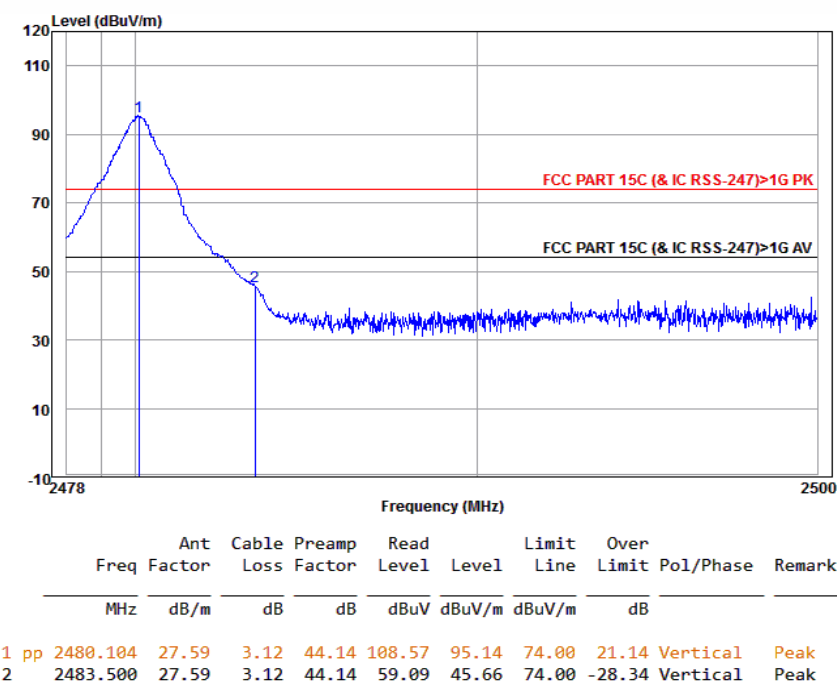

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


Appendix L): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	QP		

Test Graph

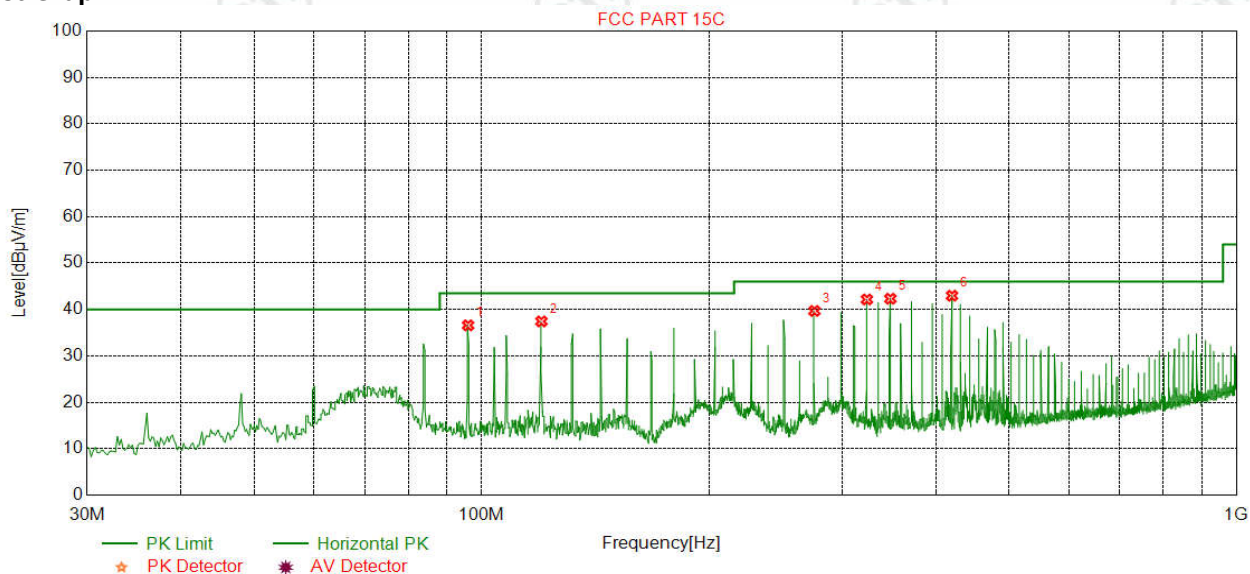


Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	95.9732	10.36	1.13	-32.08	57.18	36.59	43.50	6.91	Pass	Horizontal
2	120.0340	9.19	1.30	-32.06	59.01	37.44	43.50	6.06	Pass	Horizontal
3	276.0412	12.72	1.98	-31.91	56.90	39.69	46.00	6.31	Pass	Horizontal
4	323.9688	13.73	2.14	-31.81	58.10	42.16	46.00	3.84	Pass	Horizontal
5	348.0296	14.26	2.22	-31.86	57.70	42.32	46.00	3.68	Pass	Horizontal
6	420.0180	15.72	2.45	-31.84	56.65	42.98	46.00	3.02	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	QP		

Test Graph

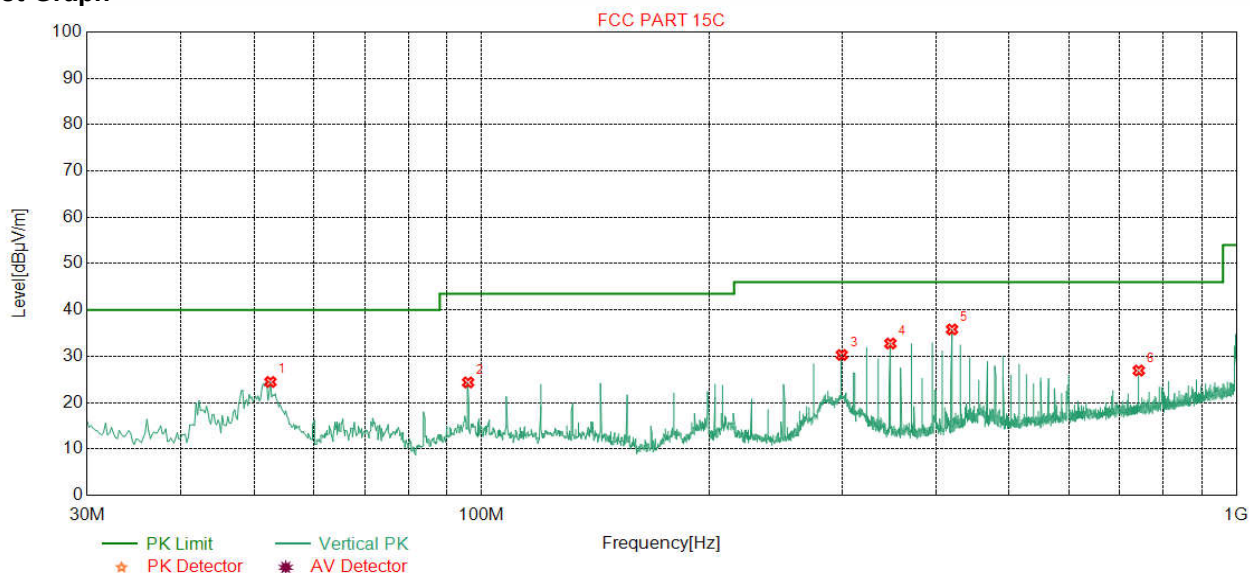

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBuV]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Result	Polarity
1	52.5085	12.80	0.82	-32.10	42.95	24.47	40.00	15.53	Pass	Vertical
2	95.9732	10.36	1.13	-32.08	44.95	24.36	43.50	19.14	Pass	Vertical
3	300.1020	13.20	2.06	-31.85	46.88	30.29	46.00	15.71	Pass	Vertical
4	348.0296	14.26	2.22	-31.86	48.14	32.76	46.00	13.24	Pass	Vertical
5	420.0180	15.72	2.45	-31.84	49.47	35.80	46.00	10.20	Pass	Vertical
6	742.5105	20.27	3.26	-32.11	35.50	26.92	46.00	19.08	Pass	Vertical

Transmitter Emission above 1GHz

Worse case mode: GFSK			Test channel: Lowest						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Polarity	Remark
3018.5269	33.21	4.89	-36.77	46.47	47.80	74.00	26.20	H	Peak
4804.000	34.50	4.55	-36.15	49.75	52.65	74.00	21.35	H	Peak
4804.0000	34.50	4.55	-36.15	44.25	47.15	54.00	6.85	H	Average
5500.1500	35.00	5.16	-36.15	42.87	46.88	74.00	27.12	H	Peak
7206.000	36.31	5.81	-36.43	50.72	56.41	74.00	17.59	H	Peak
7206.0000	36.31	5.81	-36.43	43.96	49.66	54.00	4.34	H	Average
8157.2907	36.46	6.41	-36.48	44.34	50.73	74.00	23.27	H	Peak
9608.000	37.64	6.63	-36.79	42.05	49.53	74.00	24.47	H	Peak
1196.0392	28.10	2.66	-37.65	52.40	45.51	74.00	28.49	V	Peak
3021.4521	33.21	4.89	-36.79	46.93	48.24	74.00	25.76	V	Peak
4804.000	34.50	4.55	-36.15	46.24	49.14	74.00	24.86	V	Peak
7206.000	36.31	5.81	-36.43	50.78	56.47	74.00	17.53	V	Peak
7206.0000	36.31	5.81	-36.43	44.26	49.96	54.00	4.04	V	Average
8253.8254	36.50	6.20	-36.60	44.58	50.68	74.00	23.32	V	Peak
9608.000	37.64	6.63	-36.79	42.46	49.94	74.00	24.06	V	Peak

Worse case mode: GFSK			Test channel: Middle						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Polarity	Remark
2906.3813	33.05	4.38	-36.64	46.49	47.28	74.00	26.72	H	Peak
4882.000	34.50	4.81	-36.10	51.13	54.34	74.00	19.66	H	Peak
4882.0000	34.50	4.81	-36.10	43.25	46.46	54.00	7.54	H	Average
6354.3354	35.87	5.45	-36.15	42.69	47.86	74.00	26.14	H	Peak
7323.000	36.42	5.85	-36.41	47.50	53.36	74.00	20.64	H	Peak
8376.6877	36.55	6.26	-36.46	43.95	50.30	74.00	23.70	H	Peak
7323.0000	36.42	5.85	-36.41	41.81	47.68	54.00	6.32	H	Average
9764.000	37.71	6.71	-36.83	42.01	49.60	74.00	24.40	H	Peak
3345.1845	33.34	4.53	-36.72	46.06	47.21	74.00	26.79	V	Peak
4882.000	34.50	4.81	-36.10	46.25	49.46	74.00	24.54	V	Peak
6355.3105	35.87	5.44	-36.15	43.50	48.66	74.00	25.34	V	Peak
7323.000	36.42	5.85	-36.41	46.47	52.33	74.00	21.67	V	Peak
7323.0000	36.42	5.85	-36.41	39.74	45.61	54.00	8.39	V	Average
7679.4929	36.53	6.21	-36.46	44.00	50.28	74.00	23.72	V	Peak
9764.000	37.71	6.71	-36.83	42.30	49.89	74.00	24.11	V	Peak

Worse case mode: GFSK			Test channel: Highest						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Polarity	Remark
2193.4387	31.97	3.65	-36.53	49.49	48.58	74.00	25.42	H	Peak
4557.2307	34.50	4.79	-36.29	43.83	46.83	74.00	27.17	H	Peak
4960.000	34.50	4.82	-36.20	49.63	52.75	74.00	21.25	H	Peak
4960.0000	34.50	4.82	-36.20	42.60	45.71	54.00	8.29	H	Average
5526.4776	35.04	5.16	-36.09	43.86	47.97	74.00	26.03	H	Peak
7440.000	36.54	5.85	-36.34	44.71	50.76	74.00	23.24	H	Peak
9920.000	37.77	6.79	-36.82	39.63	47.37	74.00	26.63	H	Peak
1750.1500	30.05	3.23	-36.78	52.42	48.92	74.00	25.08	V	Peak
3875.6376	33.70	4.35	-36.14	44.39	46.30	74.00	27.70	V	Peak
4960.000	34.50	4.82	-36.20	47.63	50.75	74.00	23.25	V	Peak
6513.2763	35.91	5.44	-36.20	43.44	48.59	74.00	25.41	V	Peak
7440.000	36.54	5.85	-36.34	44.01	50.06	74.00	23.94	V	Peak
9920.000	37.77	6.79	-36.82	41.34	49.08	74.00	24.92	V	Peak

Worse case mode: π/4DQPSK			Test channel: Lowest						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Polarity	Remark
2899.5799	33.04	4.38	-36.62	47.39	48.19	74.00	25.81	H	Peak
4804.000	34.50	4.55	-36.15	46.21	49.11	74.00	24.89	H	Peak
6367.0117	35.87	5.41	-36.20	43.63	48.71	74.00	25.29	H	Peak
7206.000	36.31	5.81	-36.43	48.70	54.39	74.00	19.61	H	Peak
7206.0000	36.31	5.81	-36.43	37.99	43.69	54.00	10.31	H	Average
8424.4674	36.57	6.36	-36.33	44.17	50.77	74.00	23.23	H	Peak
9608.000	37.64	6.63	-36.79	41.60	49.08	74.00	24.92	H	Peak
3985.8236	33.79	4.33	-36.20	45.25	47.17	74.00	26.83	V	Peak
4804.000	34.50	4.55	-36.15	47.47	50.37	74.00	23.63	V	Peak
5876.5377	35.60	5.07	-36.13	43.38	47.92	74.00	26.08	V	Peak
7206.000	36.31	5.81	-36.43	46.59	52.28	74.00	21.72	V	Peak
7206.0000	36.31	5.81	-36.43	34.85	40.55	54.00	13.45	V	Average
8374.7375	36.55	6.25	-36.48	43.96	50.28	74.00	23.72	V	Peak
9608.000	37.64	6.63	-36.79	42.08	49.56	74.00	24.44	V	Peak

Worse case mode: $\pi/4$ DQPSK			Test channel: Middle						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Remark
4367.0867	34.31	4.52	-36.32	44.34	46.85	74.00	27.15	H	Peak
4882.0000	34.50	4.81	-36.10	46.91	50.12	74.00	23.88	H	Peak
5830.7081	35.53	5.04	-36.01	43.53	48.09	74.00	25.91	H	Peak
7323.0000	36.42	5.85	-36.41	44.79	50.65	74.00	23.35	H	Peak
8470.2970	36.59	6.44	-36.44	43.84	50.43	74.00	23.57	H	Peak
9764.0000	37.71	6.71	-36.83	42.31	49.90	74.00	24.10	H	Peak
3688.4188	33.55	4.26	-36.23	44.71	46.29	74.00	27.71	V	Peak
3993.6244	33.79	4.33	-36.23	45.87	47.76	74.00	26.24	V	Peak
4882.0000	34.50	4.81	-36.10	43.41	46.62	74.00	27.38	V	Peak
7323.0000	36.42	5.85	-36.41	44.00	49.86	74.00	24.14	V	Peak
8390.3390	36.56	6.30	-36.35	43.90	50.41	74.00	23.59	V	Peak
9764.0000	37.71	6.71	-36.83	42.38	49.97	74.00	24.03	V	Peak

Worse case mode: $\pi/4$ DQPSK			Test channel: Highest						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Remark
1781.3563	30.26	3.29	-36.81	48.10	44.84	74.00	29.16	H	Peak
3218.4218	33.29	4.58	-36.74	46.35	47.48	74.00	26.52	H	Peak
4960.0000	34.50	4.82	-36.20	47.65	50.77	74.00	23.23	H	Peak
7058.3558	36.16	5.71	-36.18	43.75	49.44	74.00	24.56	H	Peak
7440.0000	36.54	5.85	-36.34	42.72	48.77	74.00	25.23	H	Peak
9920.0000	37.77	6.79	-36.82	40.29	48.03	74.00	25.97	H	Peak
1288.8578	28.19	2.73	-37.38	52.17	45.71	74.00	28.29	V	Peak
3000.9751	33.20	4.93	-36.71	45.50	46.92	74.00	27.08	V	Peak
4960.0000	34.50	4.82	-36.20	47.56	50.68	74.00	23.32	V	Peak
7440.0000	36.54	5.85	-36.34	40.19	46.24	74.00	27.76	V	Peak
8430.3180	36.57	6.37	-36.35	42.89	49.48	74.00	24.52	V	Peak
9920.0000	37.77	6.79	-36.82	39.32	47.06	74.00	26.94	V	Peak

Worse case mode: 8DPSK			Test channel: Lowest						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Polarity	Remark
1796.9594	30.36	3.31	-36.80	50.86	47.73	74.00	26.27	H	Peak
4804.0000	34.50	4.55	-36.15	47.15	50.05	74.00	23.95	H	Peak
6124.2124	35.82	5.26	-36.26	42.87	47.69	74.00	26.31	H	Peak
7206.0000	36.31	5.81	-36.43	48.68	54.37	74.00	19.63	H	Peak
7206.0000	36.31	5.82	-36.43	29.43	35.13	54.00	18.87	H	Average
8300.6301	36.52	6.11	-36.57	44.51	50.57	74.00	23.43	H	Peak
9608.0000	37.64	6.63	-36.79	41.99	49.47	74.00	24.53	H	Peak
3597.7348	33.48	4.34	-36.57	45.38	46.63	74.00	27.37	V	Peak
4804.0000	34.50	4.55	-36.15	45.16	48.06	74.00	25.94	V	Peak
6450.8701	35.89	5.52	-36.26	43.03	48.18	74.00	25.82	V	Peak
7206.0000	36.31	5.81	-36.43	45.29	50.98	74.00	23.02	V	Peak
8550.2550	36.71	6.32	-36.32	43.82	50.53	74.00	23.47	V	Peak
9608.0000	37.64	6.63	-36.79	41.87	49.35	74.00	24.65	V	Peak

Worse case mode: 8DPSK			Test channel: Middle						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Polarity	Remark
3228.1728	33.29	4.54	-36.76	45.62	46.69	74.00	27.31	H	Peak
4186.6937	34.06	4.49	-36.31	44.05	46.29	74.00	27.71	H	Peak
4882.0000	34.50	4.81	-36.10	47.52	50.73	74.00	23.27	H	Peak
7323.0000	36.42	5.85	-36.41	43.93	49.79	74.00	24.21	H	Peak
8482.9733	36.59	6.46	-36.44	43.26	49.87	74.00	24.13	H	Peak
9764.0000	37.71	6.71	-36.83	41.88	49.47	74.00	24.53	H	Peak
1923.3847	31.19	3.42	-36.80	50.63	48.44	74.00	25.56	V	Peak
4882.0000	34.50	4.81	-36.10	46.28	49.49	74.00	24.51	V	Peak
7323.0000	36.42	5.85	-36.41	44.55	50.41	74.00	23.59	V	Peak
7680.4680	36.53	6.22	-36.46	44.32	50.61	74.00	23.39	V	Peak
8491.7492	36.60	6.48	-36.45	44.33	50.96	74.00	23.04	V	Peak
9764.0000	37.71	6.71	-36.83	41.31	48.90	74.00	25.10	V	Peak

Worse case mode: 8DPSK			Test channel: Highest						
Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Remark
3020.4770	33.21	4.89	-36.78	46.61	47.93	74.00	26.07	H	Peak
4960.0000	34.50	4.82	-36.20	47.49	50.61	74.00	23.39	H	Peak
5800.4800	35.48	4.98	-36.02	43.74	48.18	74.00	25.82	H	Peak
7440.0000	36.54	5.85	-36.34	42.08	48.13	74.00	25.87	H	Peak
8488.8239	36.60	6.47	-36.45	44.13	50.75	74.00	23.25	H	Peak
9920.0000	37.77	6.79	-36.82	41.07	48.81	74.00	25.19	H	Peak
1594.1188	29.02	3.07	-37.00	52.36	47.45	74.00	26.55	V	Peak
4960.0000	34.50	4.82	-36.20	49.39	52.51	74.00	21.49	V	Peak
4960.0000	34.50	4.82	-36.21	31.26	34.37	54.00	19.63	V	Average
5629.8380	35.21	5.02	-36.07	43.94	48.10	74.00	25.90	V	Peak
7440.0000	36.54	5.85	-36.34	43.06	49.11	74.00	24.89	V	Peak
8871.0621	37.42	6.41	-36.51	43.23	50.55	74.00	23.45	V	Peak
9920.0000	37.77	6.79	-36.82	40.52	48.26	74.00	25.74	V	Peak

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: M2A



Radiated spurious emission Test Setup-1(Below 30M)



Radiated spurious emission Test Setup-2(Below 1GHz)




Radiated spurious emission Test Setup-3(Above 1GHz)




Conducted emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details


Test model No.: M2A

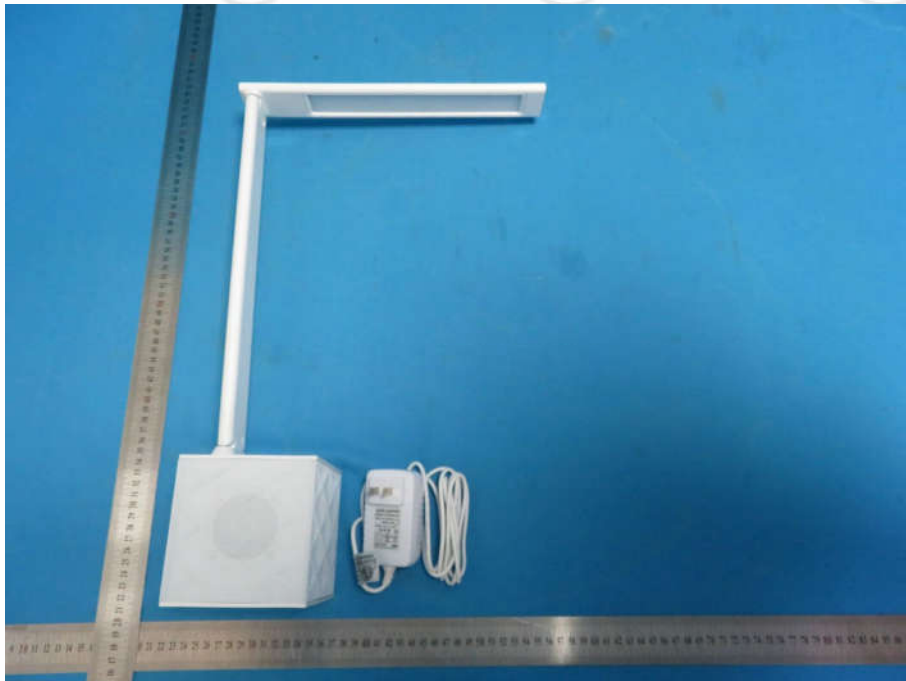


View of Product-1

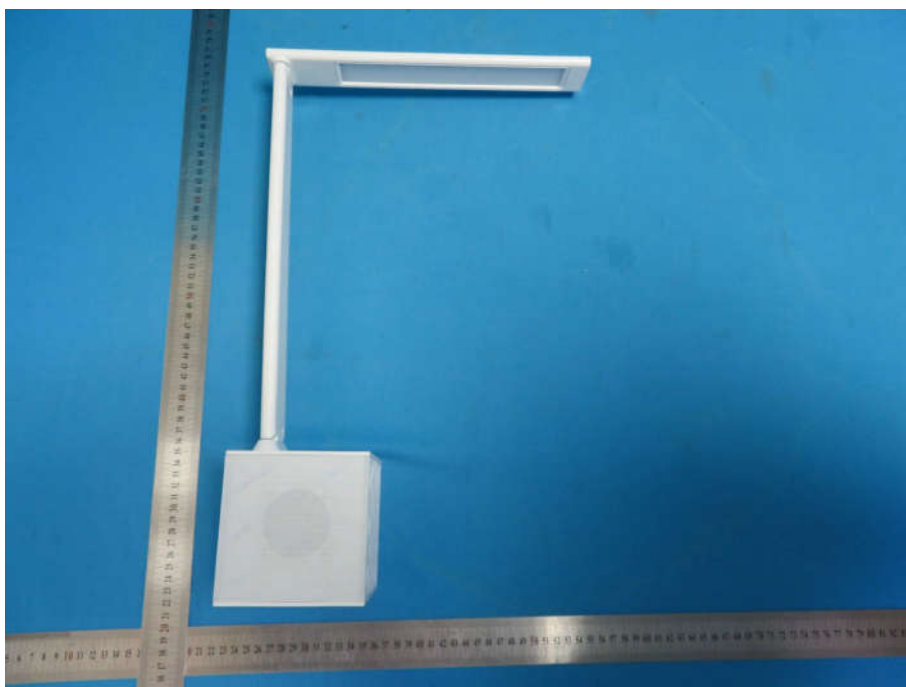


View of Product-2

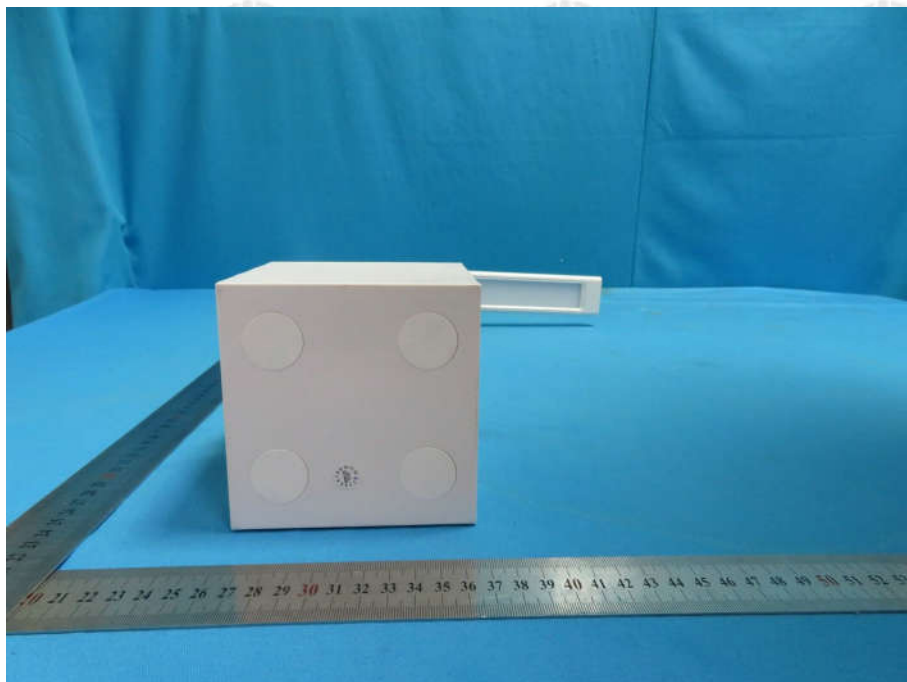


View of Product-3

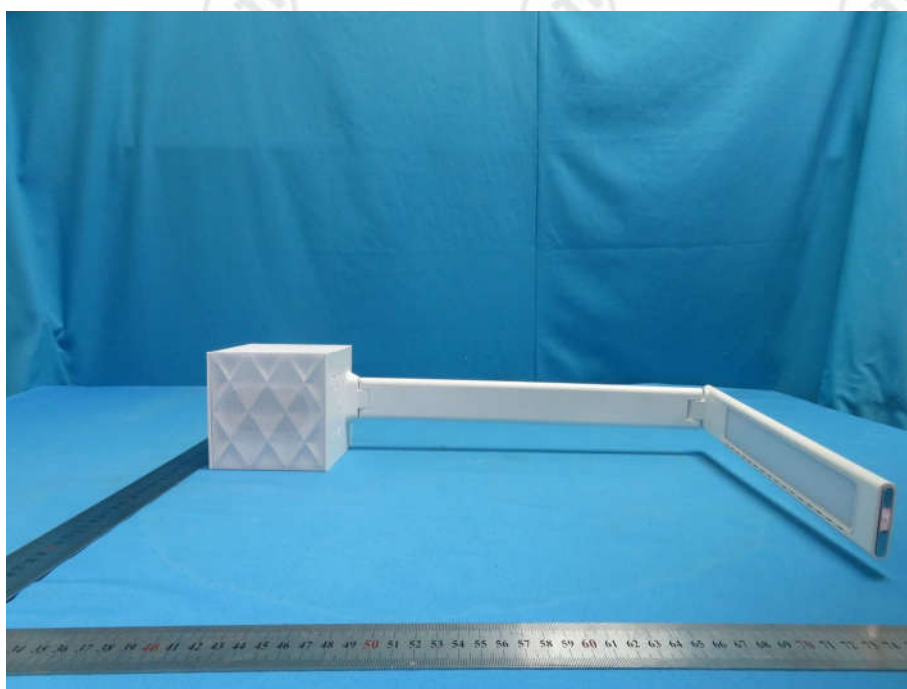


View of Product-4

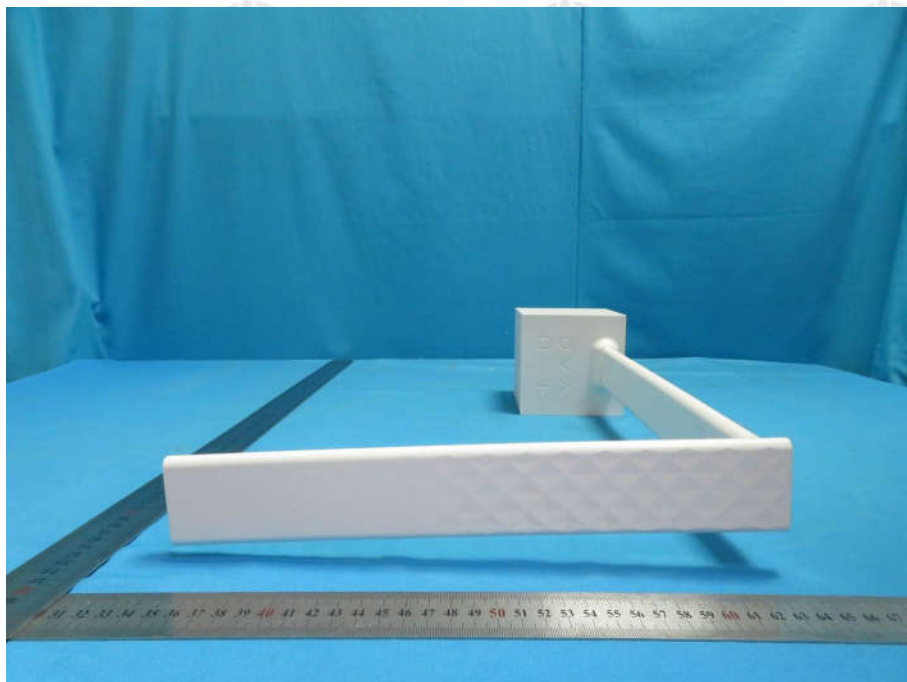


View of Product-5

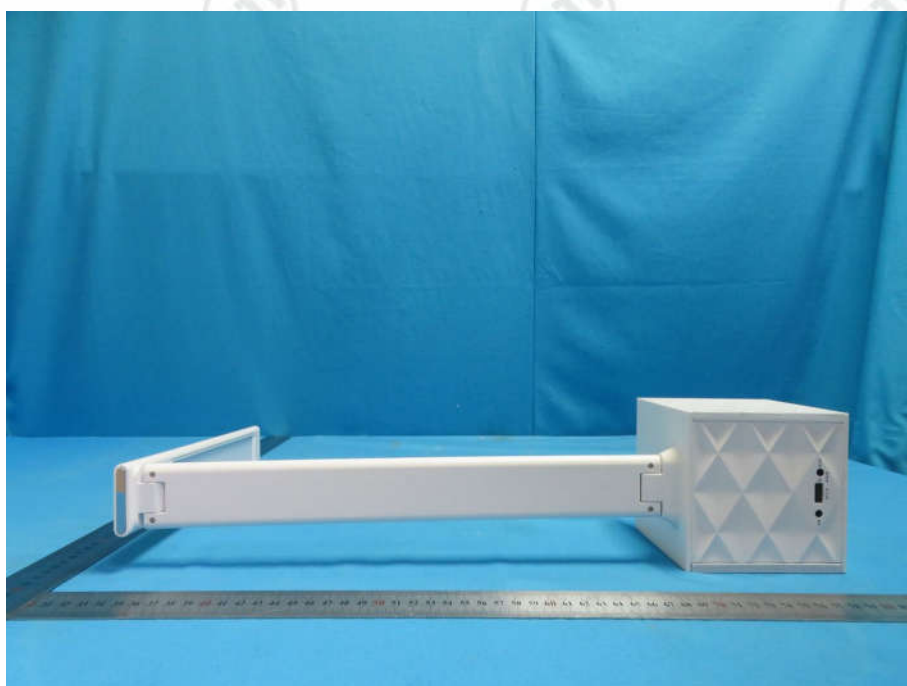


View of Product-6

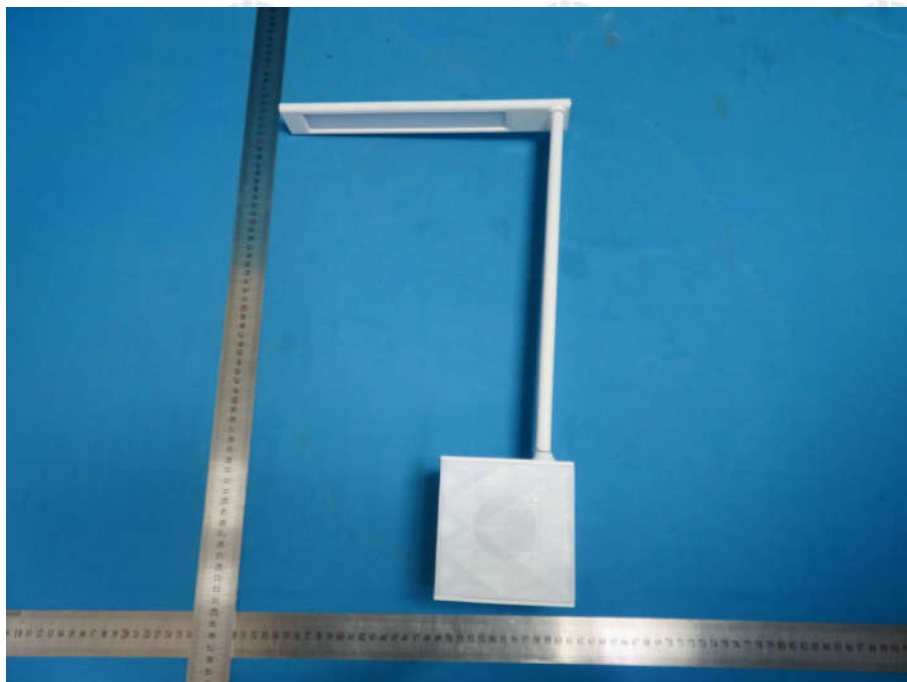


View of Product-7

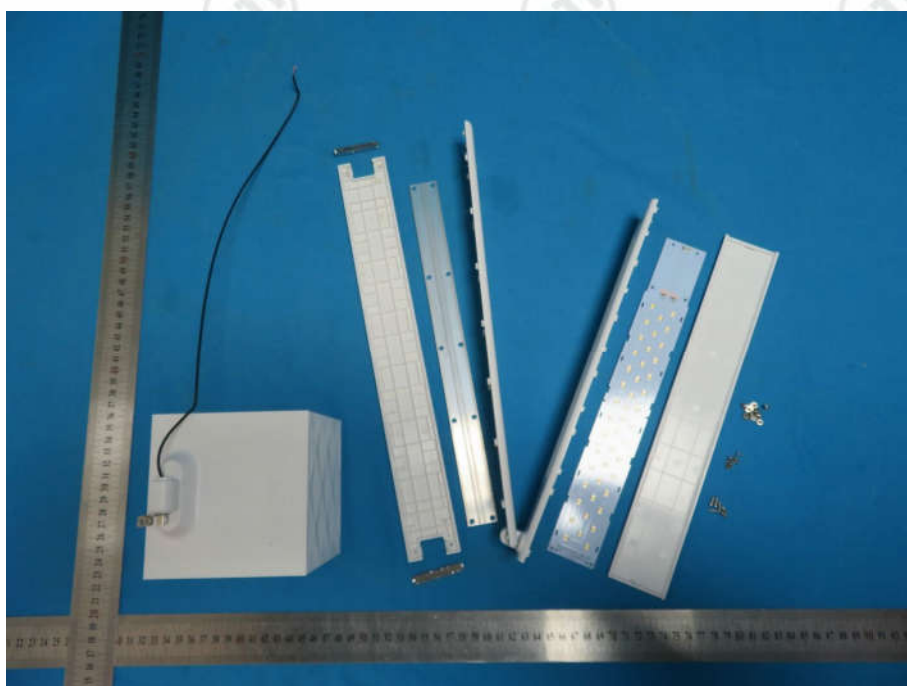


View of Product-8

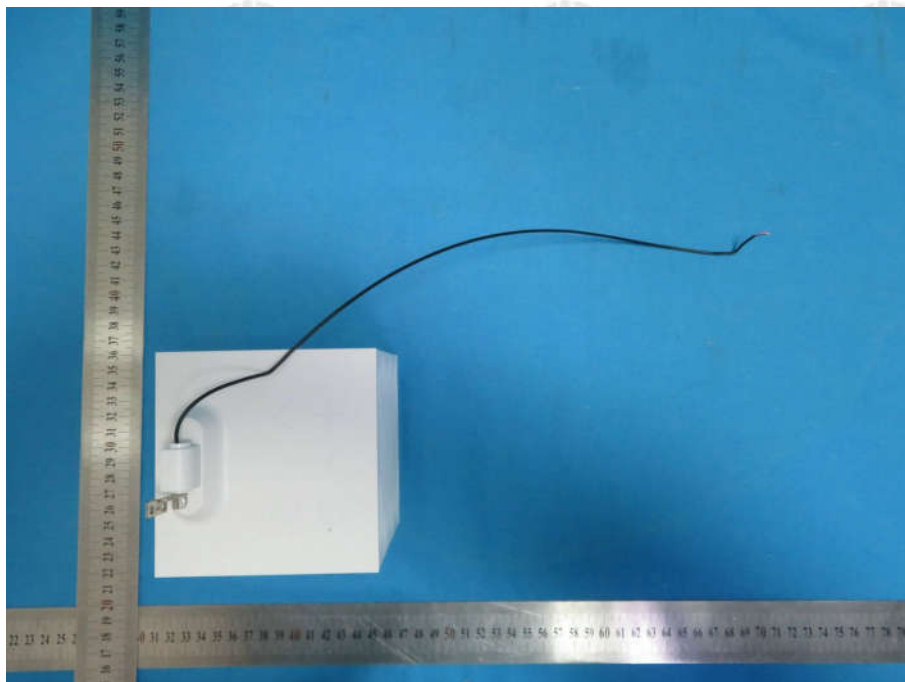


View of Product-9

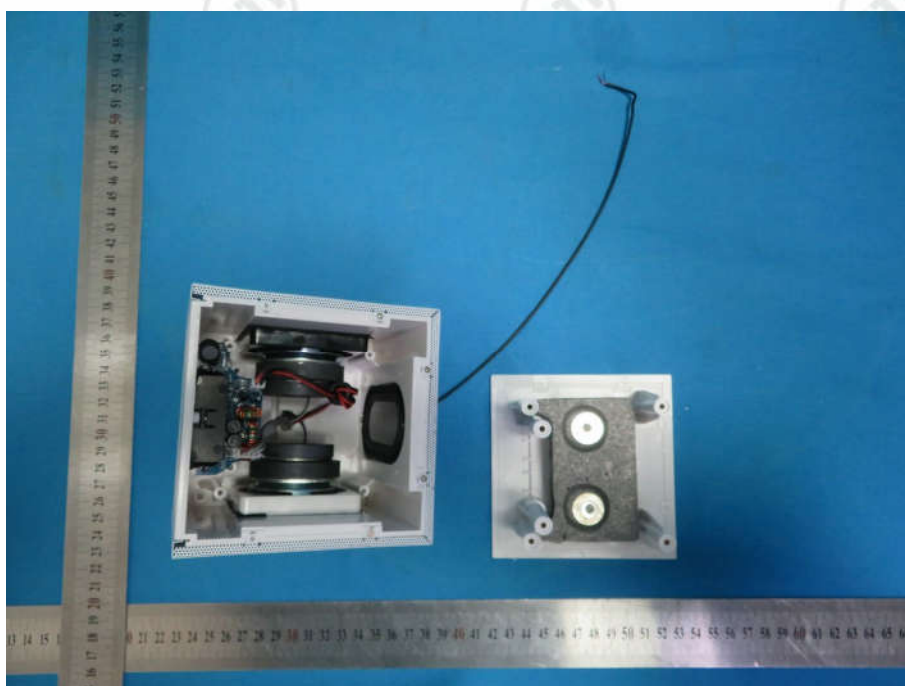


View of Product-10

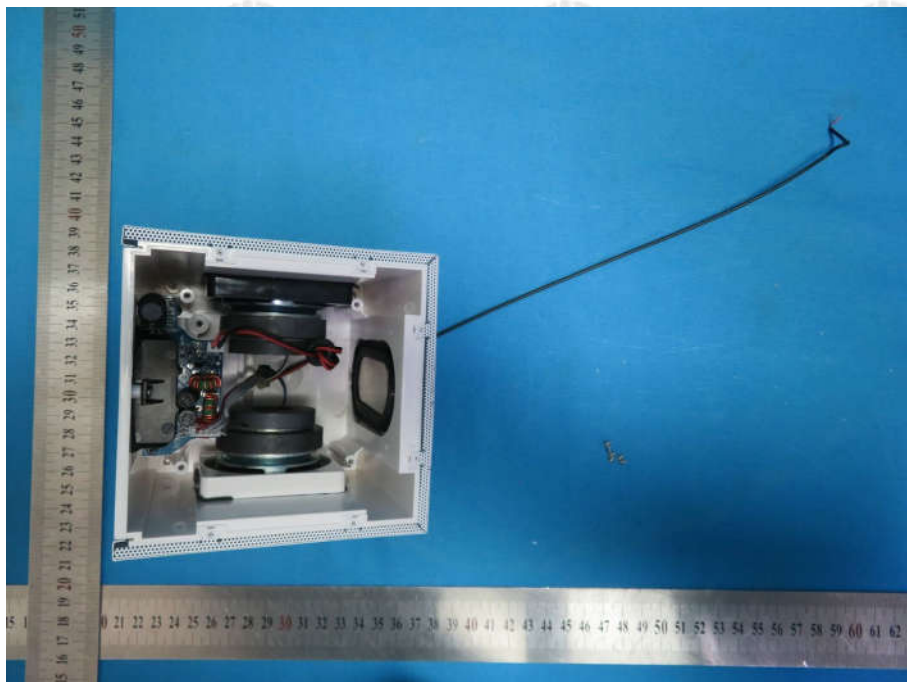


View of Product-11

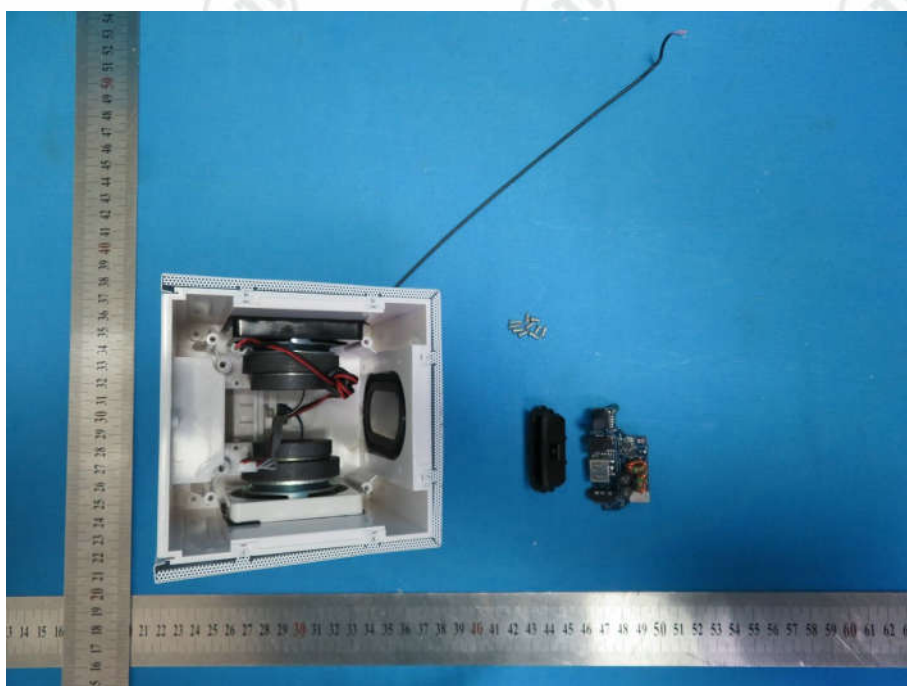


View of Product-12

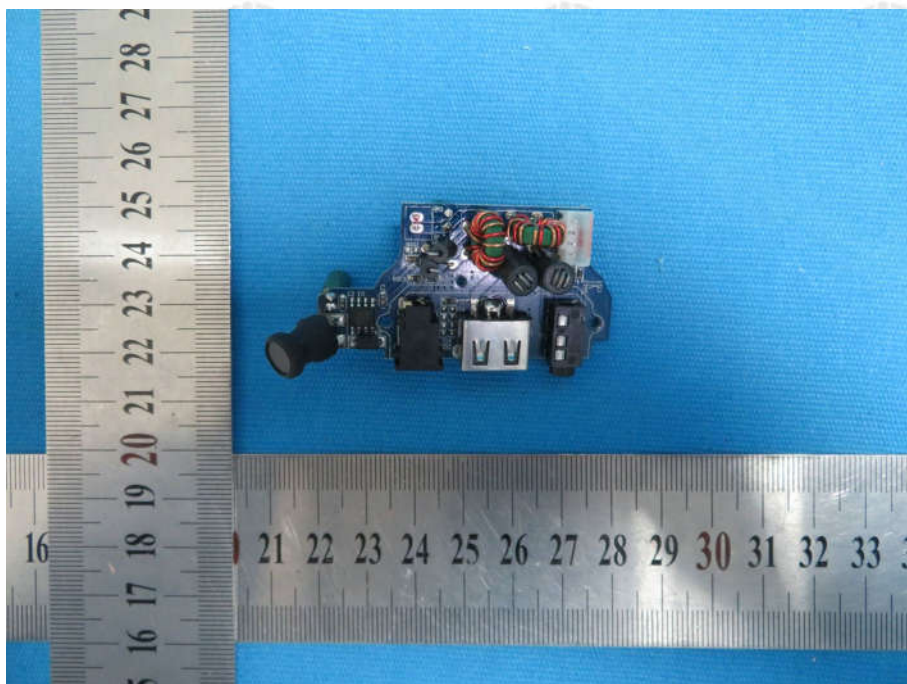


View of Product-13

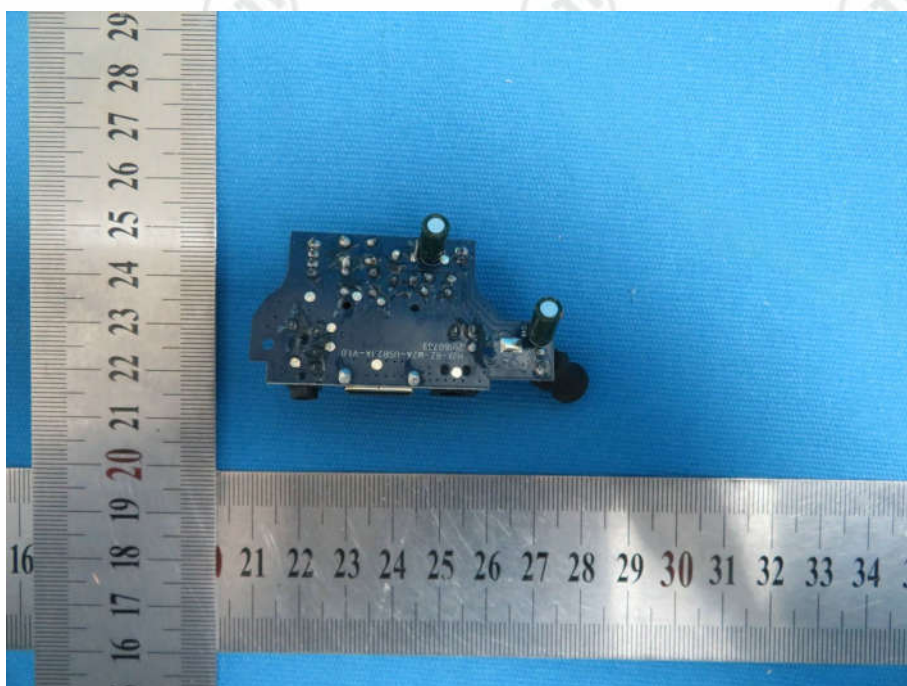


View of Product-14

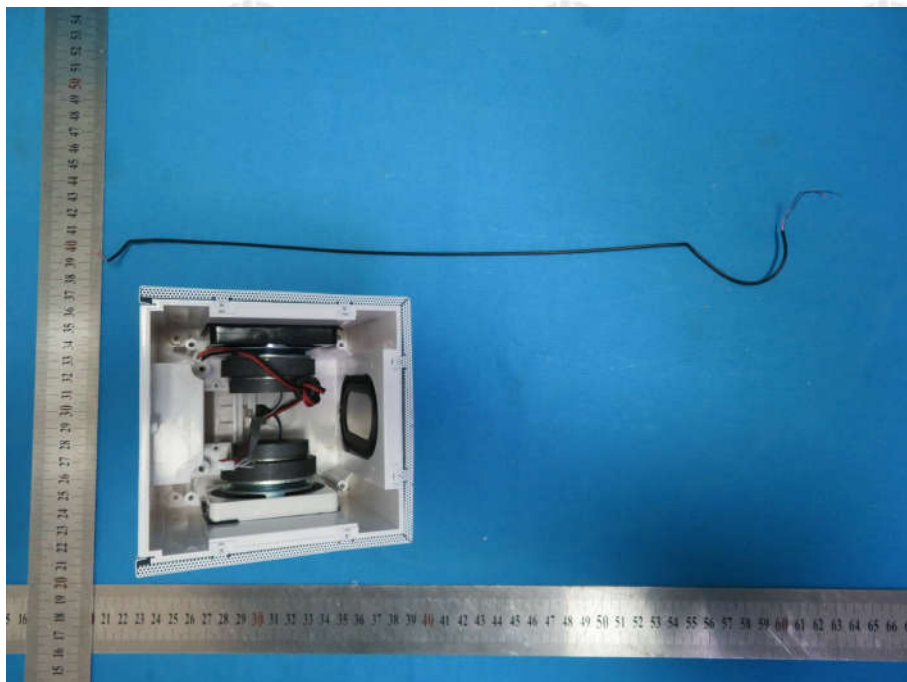


View of Product-15

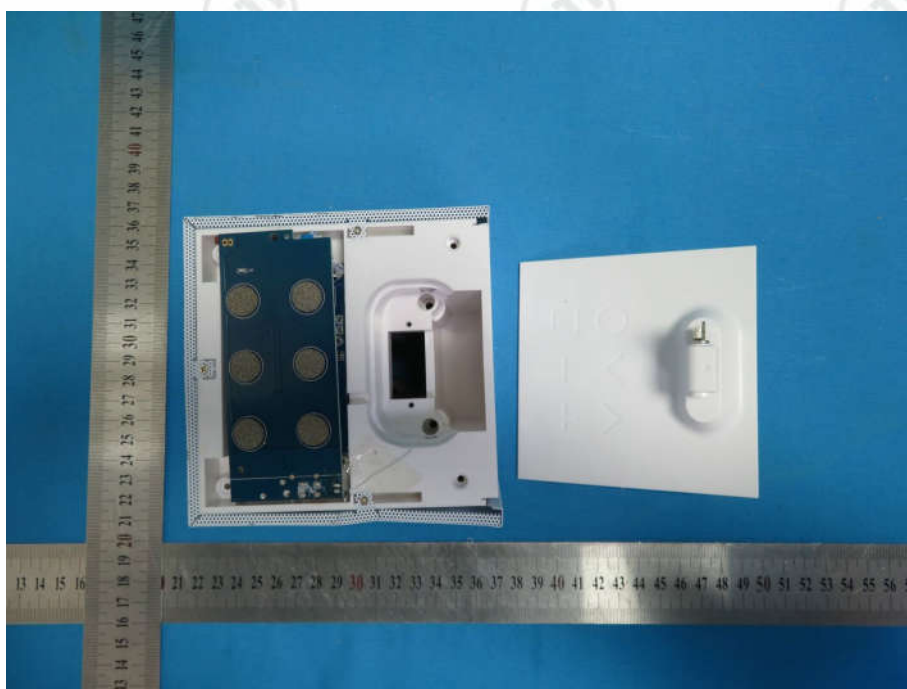


View of Product-16

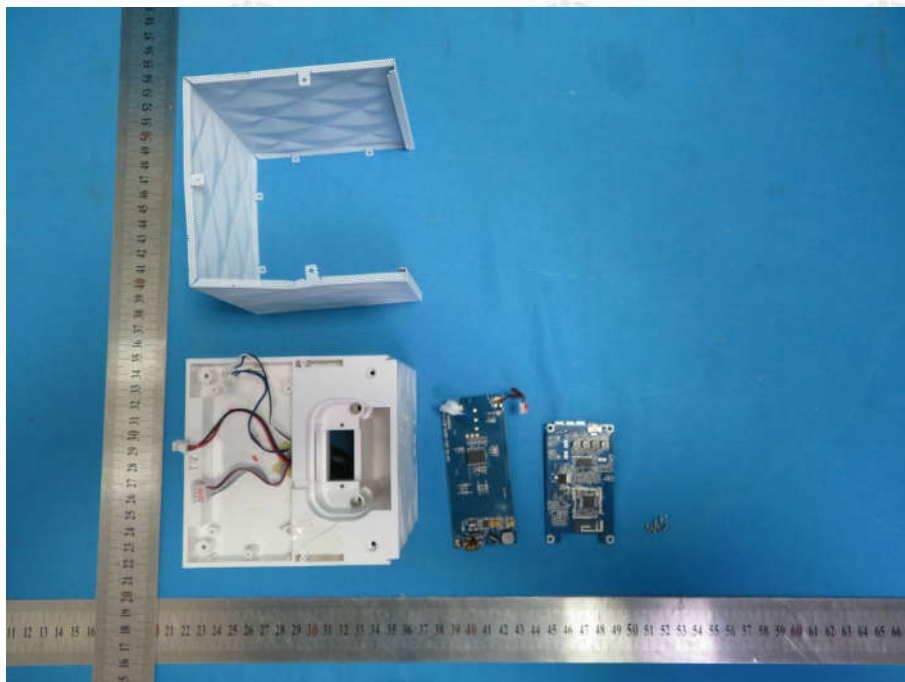


View of Product-17

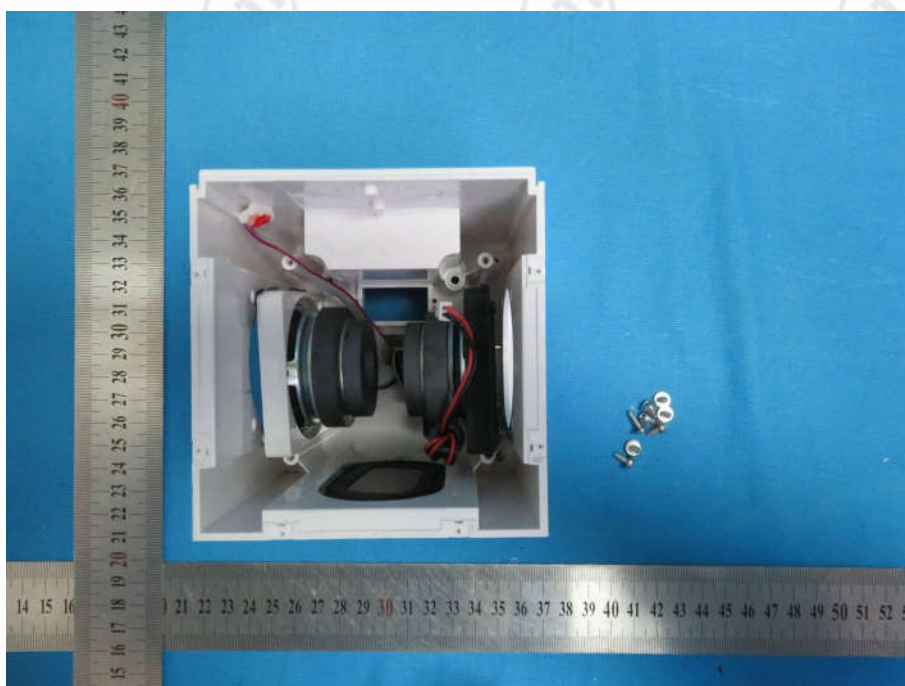


View of Product-18

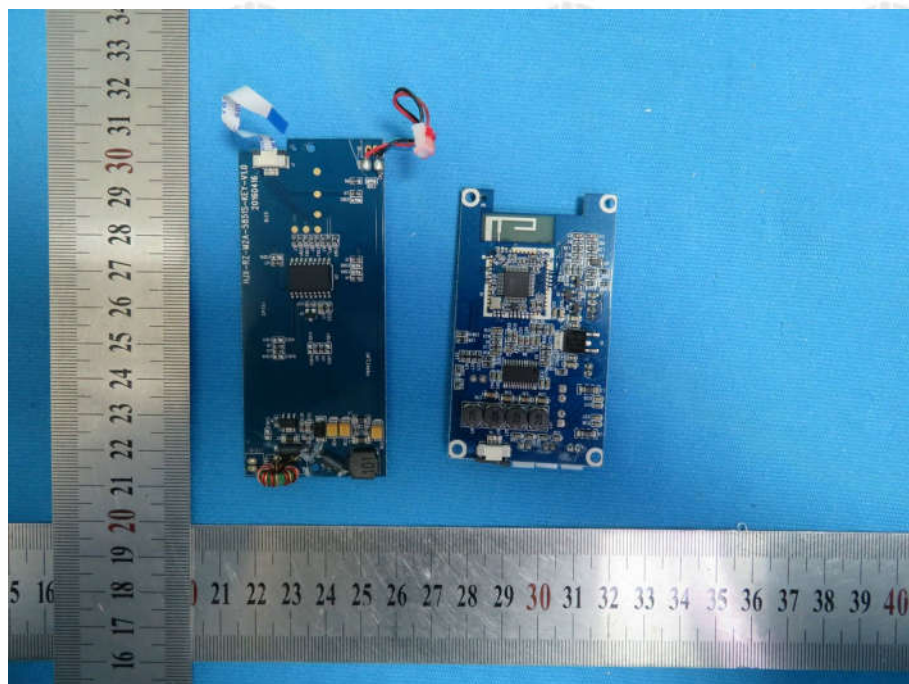


View of Product-19

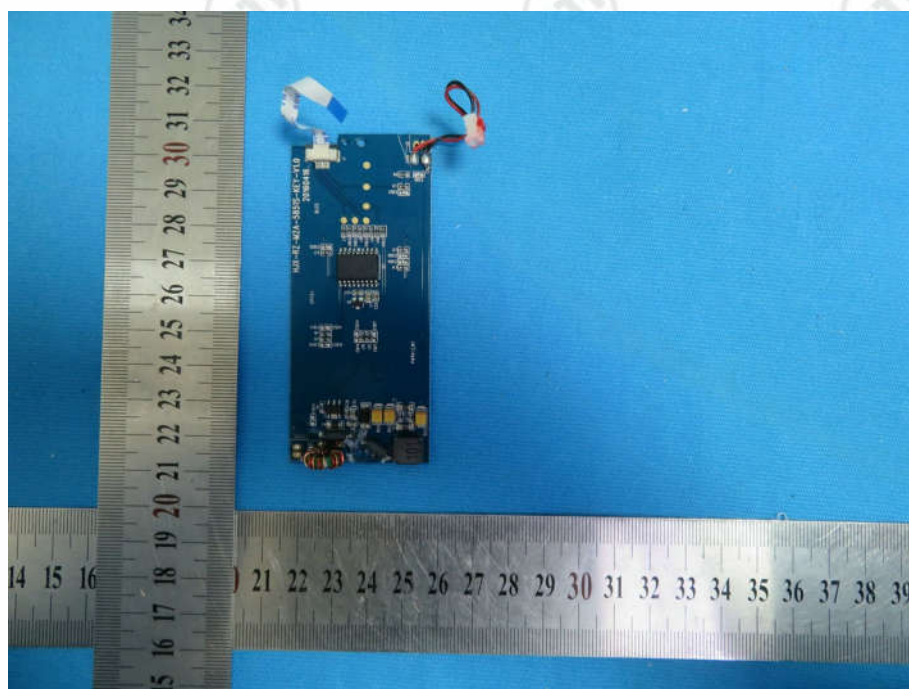


View of Product-20

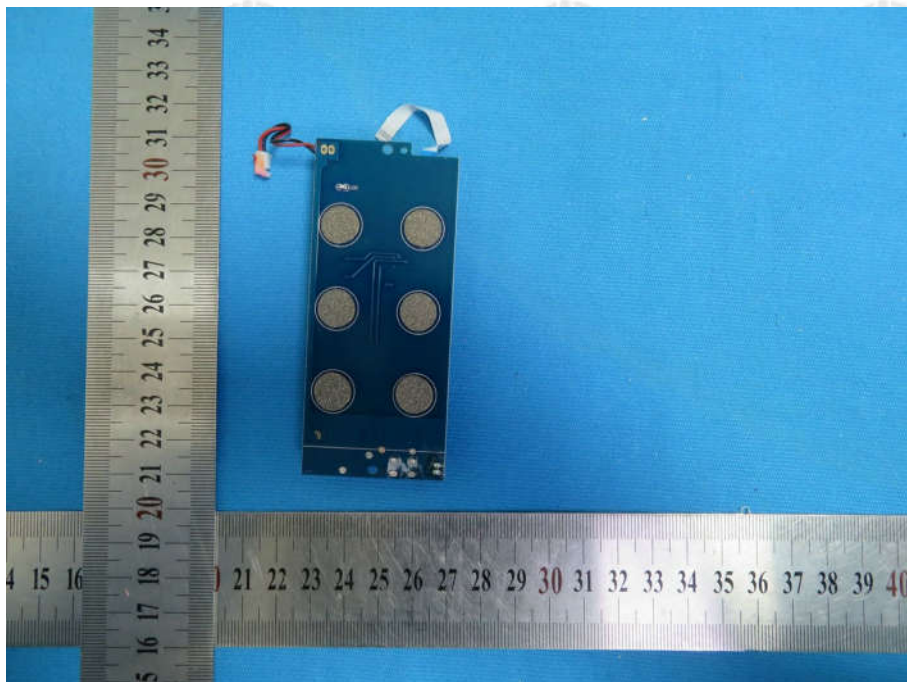


View of Product-21

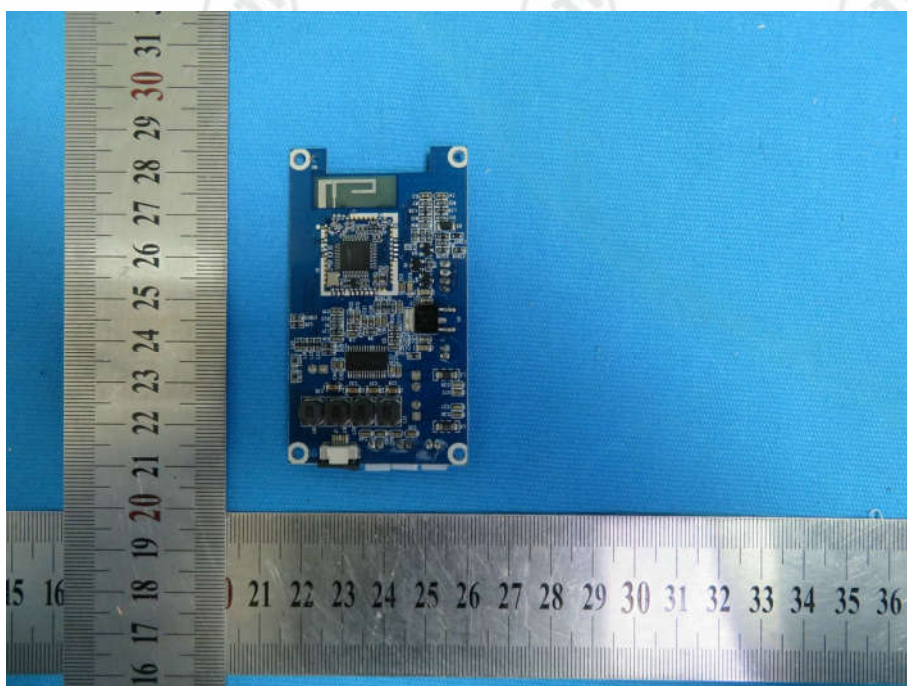


View of Product-22

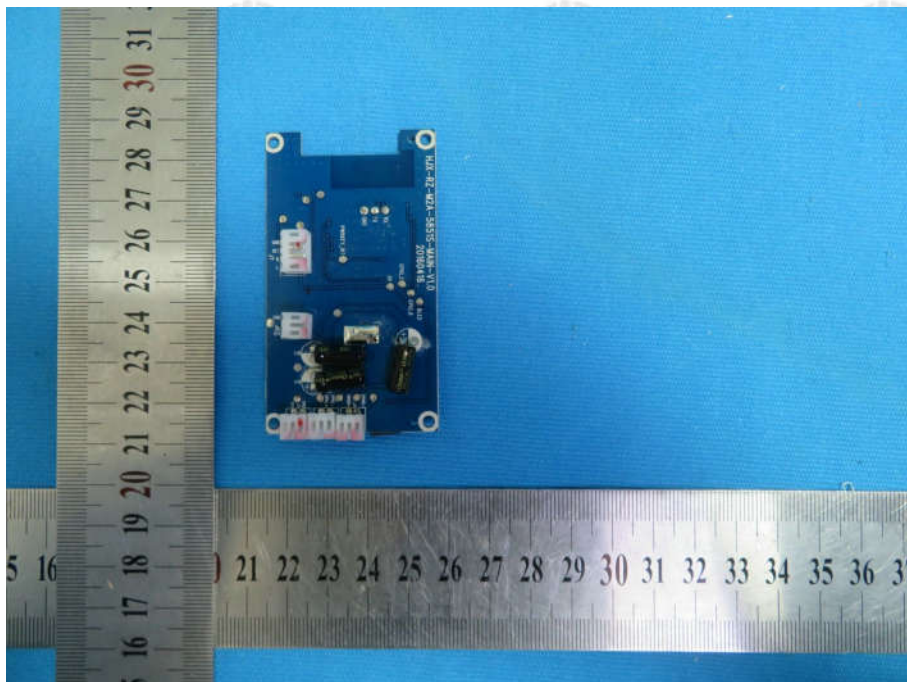


View of Product-23

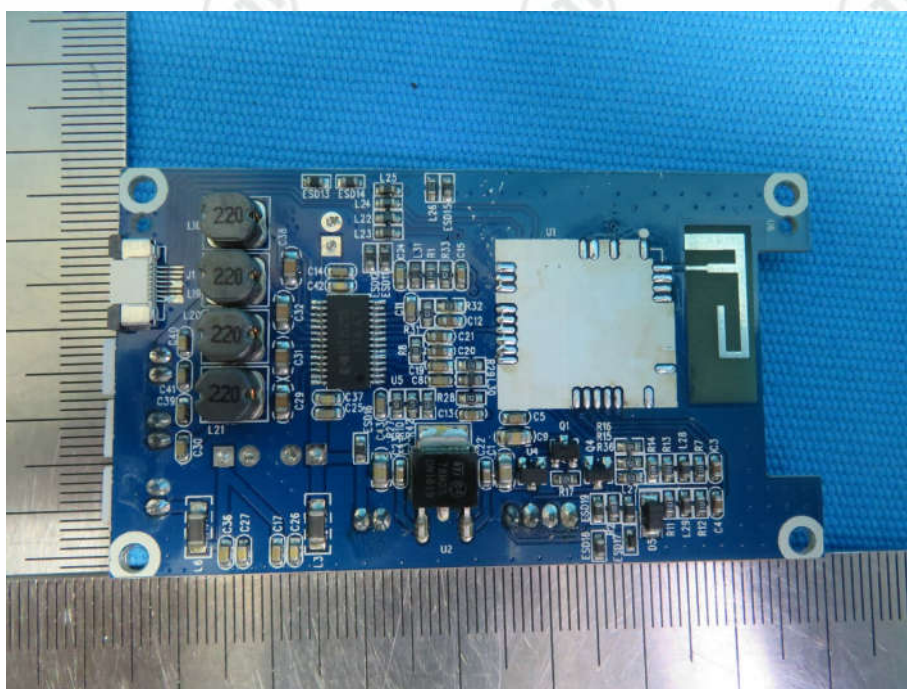

View of Product-24

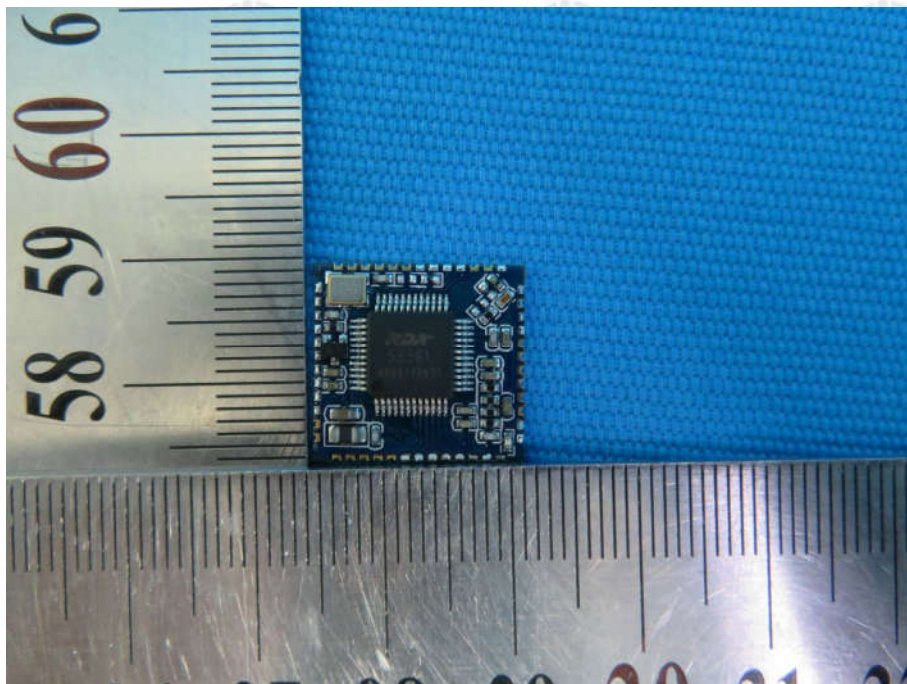

View of Product-25

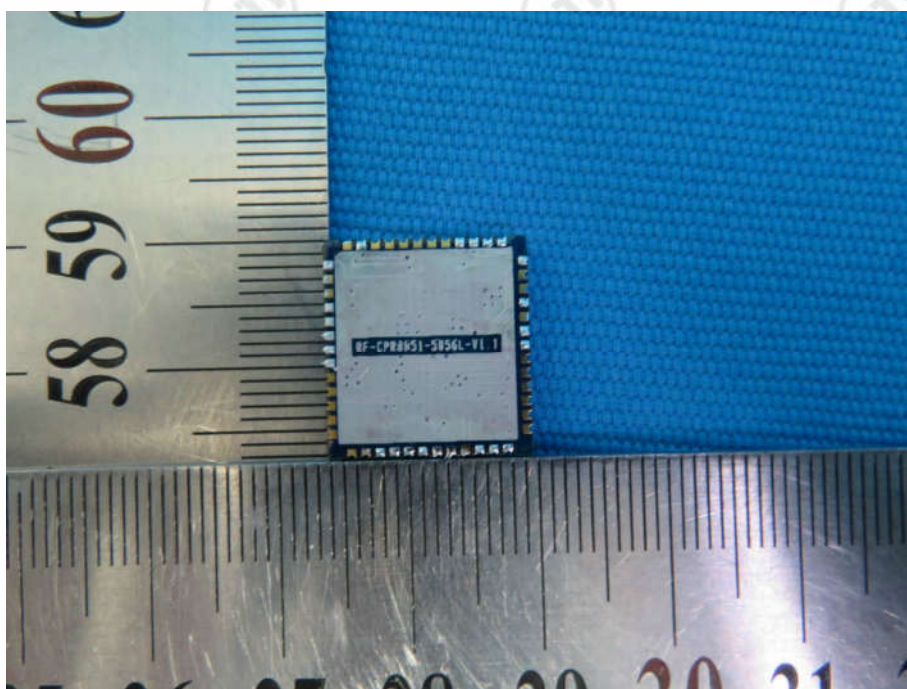

View of Product-26



View of Product-27




View of Product-28



View of Product-29



View of Product-30

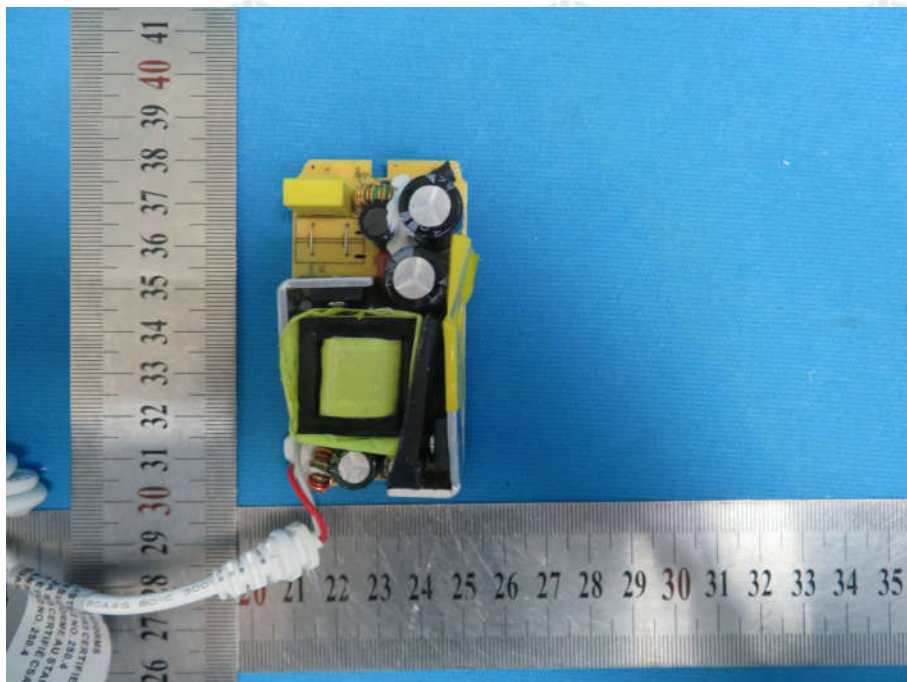

View of Product-31

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.