

ANTENNA SPECIFICATION

Client:	Shure
Project:	SBD1-UC
Version:	V0.1.1.2
Manufacturer or Supplier	Sunitec Enterprise Co., LTD.
Address	Building C No.725 , WeiXiangTai Industrial zone,FuCheng street , LongHua district , ShenZhen,GuangDong, China
Issued Date:	29-Feb-24
Tested by	Mo lite
Approved by	Huang zhishun

Contents

1. Revision History
2. Introduction
3. Electrical Characteristics

1.Revision History


Rev.No	Issued Date	Description	Summary
V1.0	29-Feb-24	initial release	

2. Introduction

2.1 Introduction of Product

This product is FPC antenna

2.2 Specification and Dimension

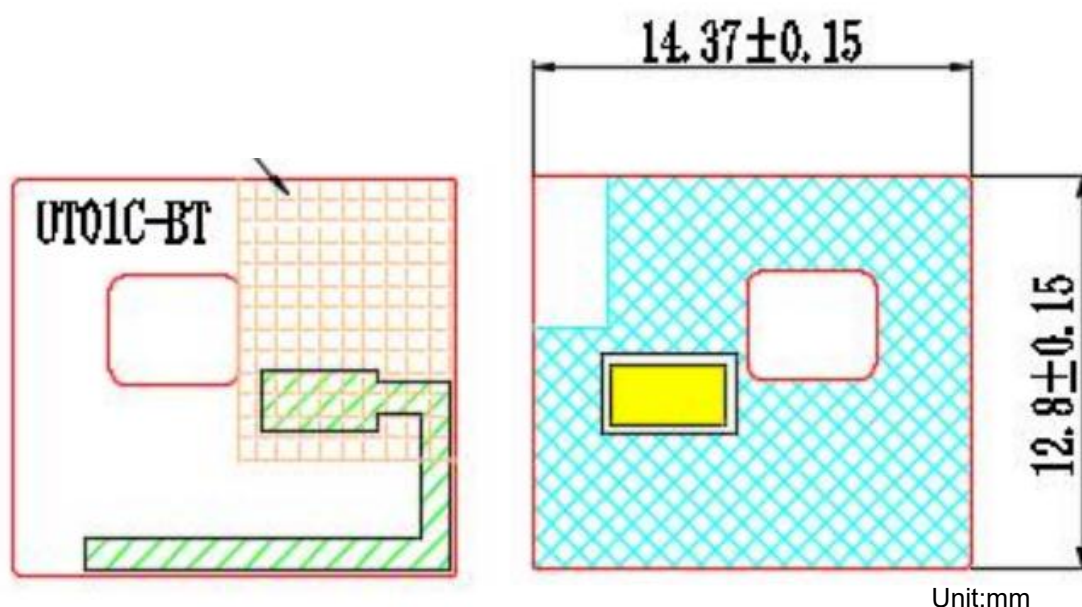

3. Electrical Characteristics

3.1 Test equipment:


VECTOR NETWORK ANALYZER

Agilent E5071C calibration date : 26 Oct 23 period of validity : 25 Oct 24 ;


Certificate No.DH23AX037490039

Antenna Measurement System


ETS-Lindgren Antenna Measurement System

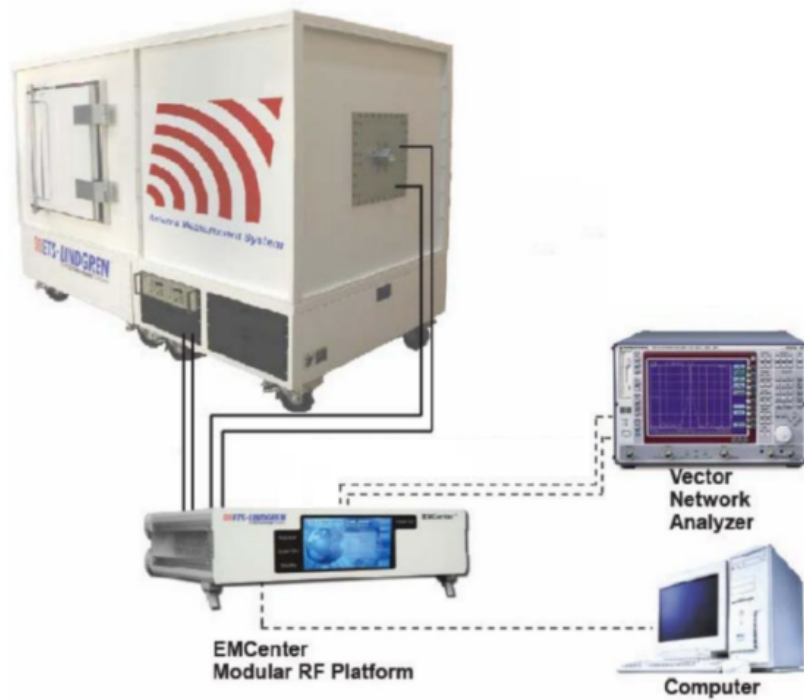

3.2 Antenna S11 parameters

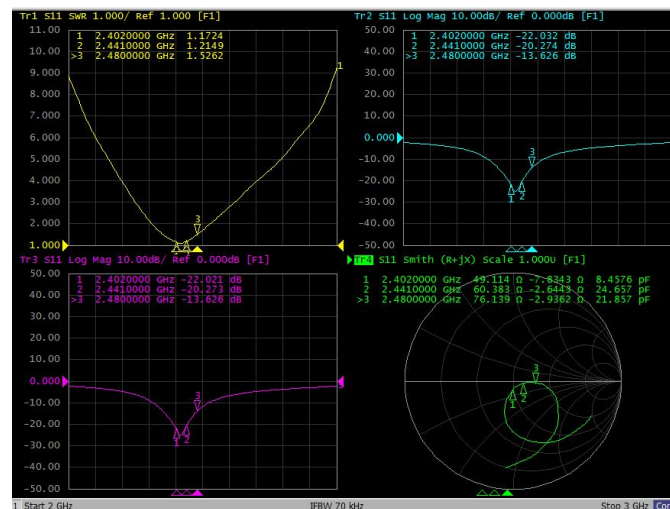

3.3 Antenna Test Settings:

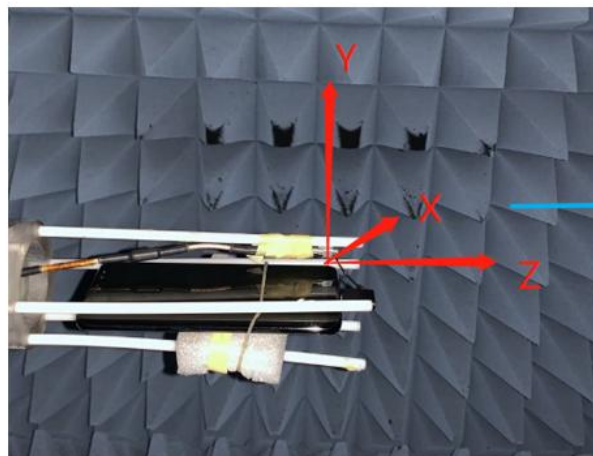


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SUNITEC ENTERPRISE CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION



深圳市丰禾原电子科技有限公司
SUNITEC ENTERPRISE CO.,LTD.

3.4 2/3D Radiation Pattern :

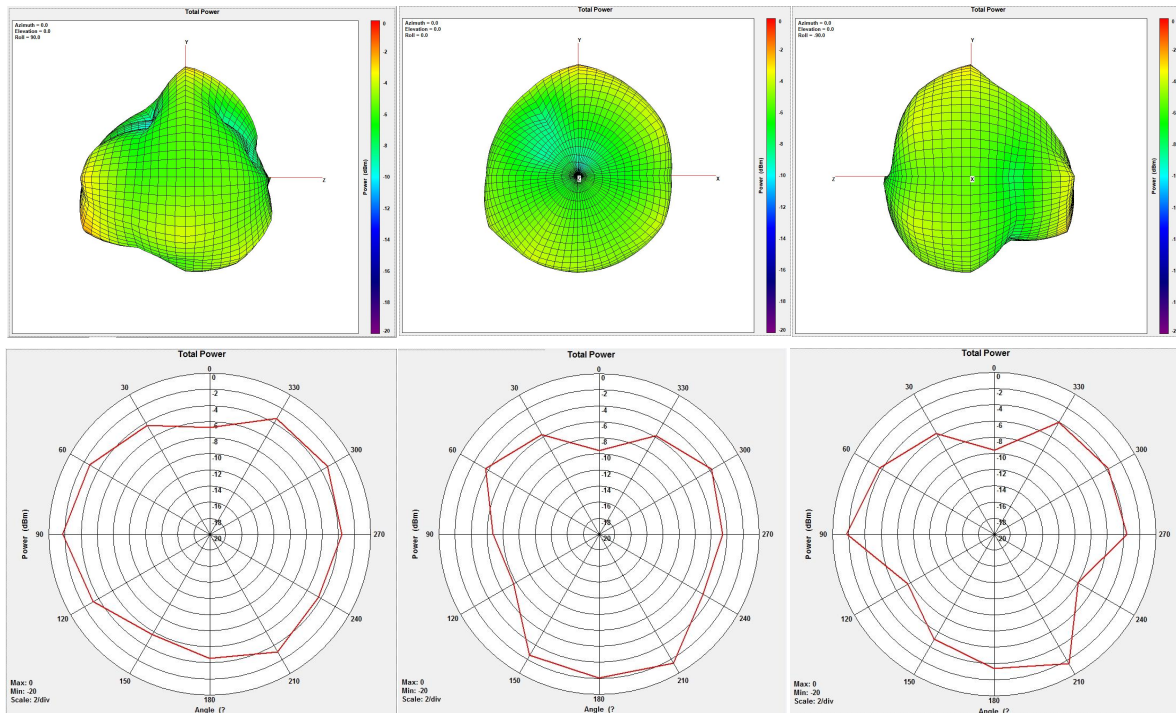

3.5 Antenna Data :

Freq(MHz)	Efficiency(dB)	Efficiency(%)	Gain(dB)
2400	-5.35	29.11	-2.09
2410	-5.02	31.41	-1.70
2420	-4.87	32.53	-1.53
2430	-4.67	34.11	-1.51
2440	-4.45	35.88	-1.45
2450	-4.39	36.36	-1.29
2460	-4.29	37.20	-0.94
2470	-4.27	37.38	-1.09
2480	-4.35	36.64	-1.20
2476	-4.19	38.10	-1.08
2463	-4.28	37.29	-0.88

3.6 Electrical Characteristics:

Antenna type	FPC Antenna
Working Frequency Range	2450+/-50MHz
Impedance	50Ω
Max Efficiency(%)	38.1%@2476MHz
Max peak Gain(dBi)	-0.88dBi@2463MHz

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SUNITEC ENTERPRISE CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION



深圳市丰禾原电子科技有限公司
SUNITEC ENTERPRISE CO.,LTD.