

FCC TEST REPORT FCC 47 CFR Part 22H ISED RSS-132, Issue 3 Cellular Telephones Operating in the Bands 824-849MHz and 869-894MHz FCC 47 CFR Part 24E ISED RSS-133, Issue 6 2GHz Personal Communication Services	
Report Reference No.	G0M-1607-5773-TFC224UL-V02
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 ISED OATS Filing assigned code: 3470A
Applicant's name	FALCOM GmbH
Address	Gewerbering 6 98704 Langewiesen GERMANY
Test specification:	
Standard	47 CFR Part 22H, 47 CFR Part 24E RSS-132, Issue 3: 2013-01, RSS-133, Issue 6: 2013-01
Test scope	partial Radio compliance test
Equipment under test (EUT):	
Product description	UMTS/GSM/GPS/LTE-Device
Model No.	FOX3-4G-NA
Additional Model(s)	None
Brand Name(s)	None
Hardware version	P281_Rev03c
Firmware / Software version	3.0.4
	FCC-ID: QIXFOX3-4G-NA IC: 5383A-FOX34GNA
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Test Lab Temperature : 20 – 23 °C

Test Lab Humidity : 32 – 38 %

Date of receipt of test item : 2016-10-05

Date (s) of performance of tests : 2016-12-13 - 2017-01-05

Compiled by : Burkhard Pudell

Tested by (+ signature) : Burkhard Pudell
(Responsible for Test) 

Approved by (+ signature) : Toralf Jahn
(Deputy Head of Lab) 

Date of issue : 2017-01-23

Total number of pages : 60

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Test case reduction on radiated measurements only is based on the requirements for host integration for full modular approved transmitter modules (KDB 996369 D02) used by the EUT. The EUT uses a module with full modular approval according to FCC and ISED rules. For details about the radio module see EUT description in section 1.

Version History

Version	Issue Date	Remarks	Revised by
01	2017-01-18	Initial Release	
02	2017-01-23	Additional comments and test scope added	T. Jahn

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment External	7
1.2	Photos – Equipment internal	10
1.3	Photos – Test setup	11
1.4	Supporting Equipment Used During Testing	12
1.5	Test Modes	13
1.6	Test Equipment Used During Testing	14
1.7	Sample emission level calculation	15
2	RESULT SUMMARY	16
3	TEST CONDITIONS AND RESULTS	17
3.1	Test Conditions and Results – Occupied Bandwidth	17
3.2	Test Conditions and Results – Effective radiated power / Equivalent isotropic radiated power	55
3.3	Test Conditions and Results – Transmitter radiated emissions	57
3.4	Test Conditions and Results – Receiver radiated emissions	59

1 Equipment (Test item) Description

Description	UMTS/GSM/GPS/LTE-Device		
Model	FOX3-4G-NA		
Additional Model(s)	None		
Brand Name(s)	None		
Serial number	None		
Hardware version	P281_Rev03c		
Software / Firmware version	3.0.4		
PMN	TRACKING UNIT		
HVIN	FOX3-4G-NA		
FVIN	None		
HMN	None		
FCC-ID	QIXFOX3-4G-NA		
IC	5383A-FOX34GNA		
Equipment type	End product		
Equipment classification	Mobile Device (Human Body distance > 20 cm)		
Radio type	Transceiver		
Radio technology	W-CDMA / LTE		
Operating frequency range	UMTS FDD V : TX = 824 - 849 MHz, RX = 869 - 894 MHz LTE FDD 5 : TX = 824 - 849 MHz, RX = 869 - 894 MHz UMTS FDD II : TX = 1850 - 1910 MHz, RX = 1930 - 1990 MHz LTE FDD 2 : TX = 1850 - 1910 MHz, RX = 1930 - 1990 MHz		
Assigned frequency band	Cell. Service Block A & B : 824 - 849 MHz & 869 - 894 MHz Broadband PCS : 1850 - 1910 MHz & 1930 - 1990 MHz		
Main test frequencies UMTS FDD V	F _{LOW}	CH : 4133 UL: 826.6 MHz	CH : 4358 DL: 871.6 MHz
	F _{MID}	CH : 4175 UL: 835.0 MHz	CH : 4400 DL: 880.0 MHz
	F _{HIGH}	CH : 4232 UL: 846.4 MHz	CH : 4457 DL: 891.4 MHz
Main test frequencies UMTS FDD II	F _{LOW}	CH : 9263 UL: 1852.6 MHz	CH : 9663 DL: 1932.6 MHz
	F _{MID}	CH : 9400 UL: 1880.0 MHz	CH : 9800 DL: 1960.0 MHz
	F _{HIGH}	CH : 9537 UL: 1907.4 MHz	CH : 9937 DL: 1987.4 MHz
Main test frequencies LTE FDD 5	F _{LOW}	CH : 20450 UL: 829.0 MHz	CH : 2450 DL: 874.0 MHz
	F _{MID}	CH : 20525 UL: 836.5 MHz	CH : 2525 DL: 881.5 MHz
	F _{HIGH}	CH : 20600 UL: 844.0 MHz	CH : 2600 DL: 889.0 MHz
Main test frequencies LTE FDD 2	F _{LOW}	CH : 18650 UL: 1855.0 MHz	CH : 650 DL: 1935.0 MHz
	F _{MID}	CH : 18900 UL: 1880.0 MHz	CH : 900 DL: 1960.0 MHz
	F _{HIGH}	CH : 19150 UL: 1905.0 MHz	CH : 1150 DL: 1985.0 MHz
Supported transmission modes	Circuit switched, Packet switched		
Modulations	HSDPA : QPSK, 16-QAM; HSUPA : BPSK LTE : QPSK, 16-QAM, 64-QAM		
Number of antennas	1x TX, 1x RX + 1x GPS		

Test Report No.: G0M-1607-5773-TFC224UL-V02

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radio module	Type	3G/4G module
	Model	TOBY-L200
	Manufacturer	UBlox
	HW Version	192CA0
	SW Version	15.90
	FCC-ID	XPYTOBYL200
	IC	8595A-TOBYL200
Antenna	Type	external dedicated
	Model	FAL-ANT14 MA220
	Manufacturer	Taoglas
	Gain	2 dBi (manufacturer declaration)
Manufacturer	FALCOM GmbH Gewerbering 6 98704 Langewiesen GERMANY	
Power supply	V _{NOM}	12 or 24 VDC (Battery only)
	V _{MIN}	N/A
	V _{MIN}	N/A
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A

1.1 Photos – Equipment External



Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

EUT INTERFACE





MULTI-BAND / GPS ANTENNA




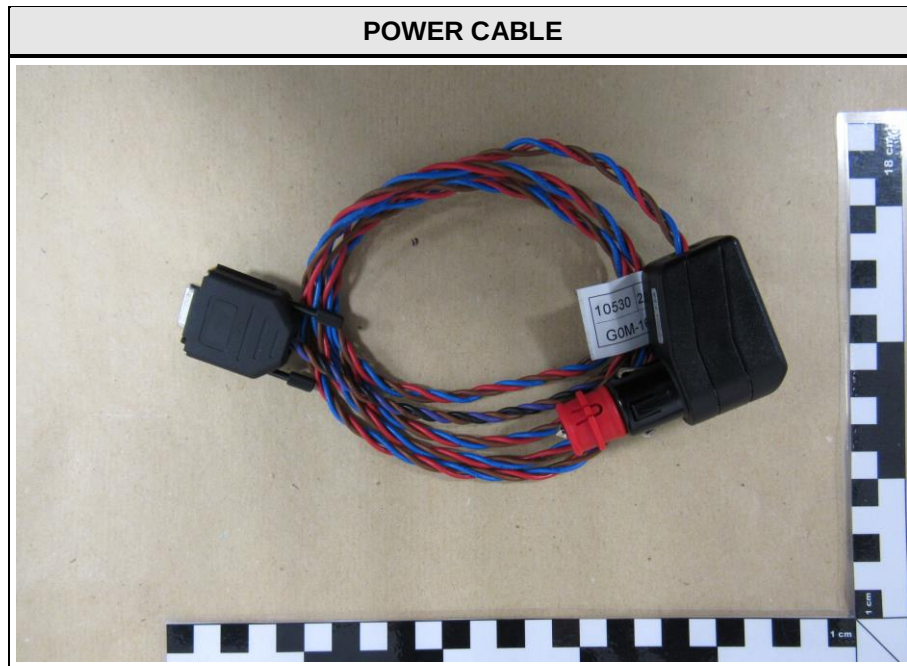

1.2 Photos – Equipment internal

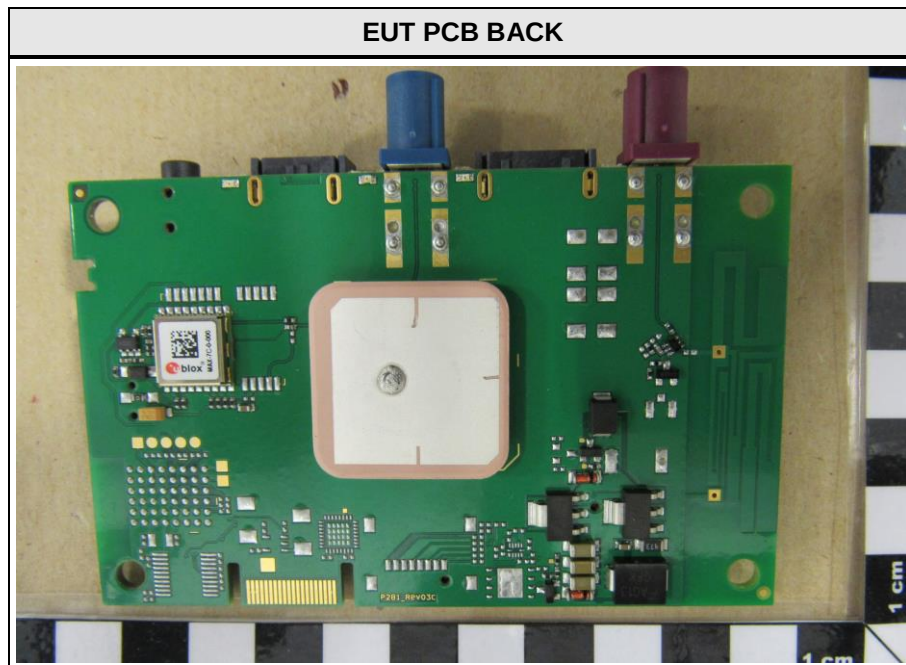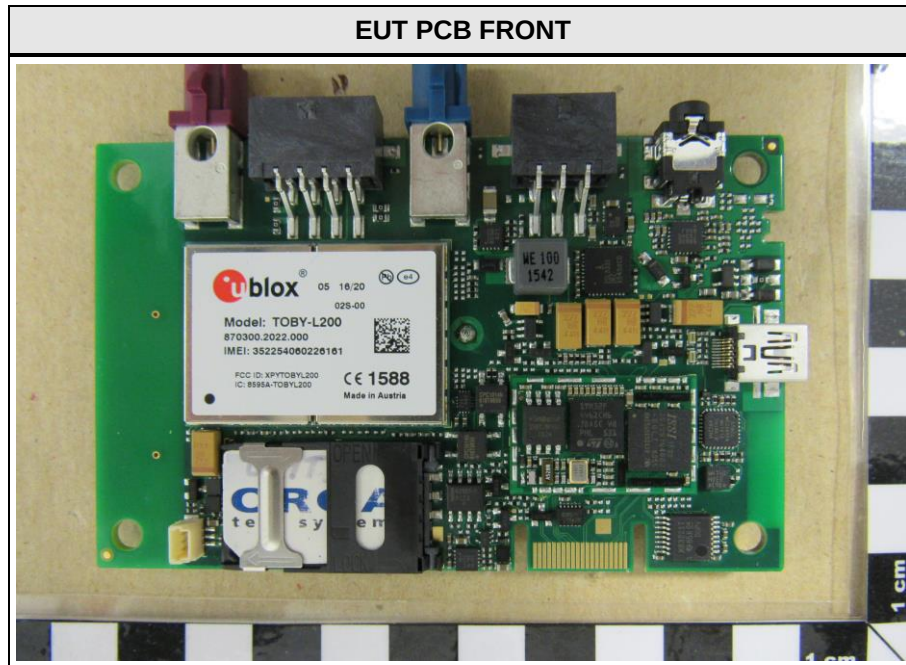

1.3 Photos – Test setup

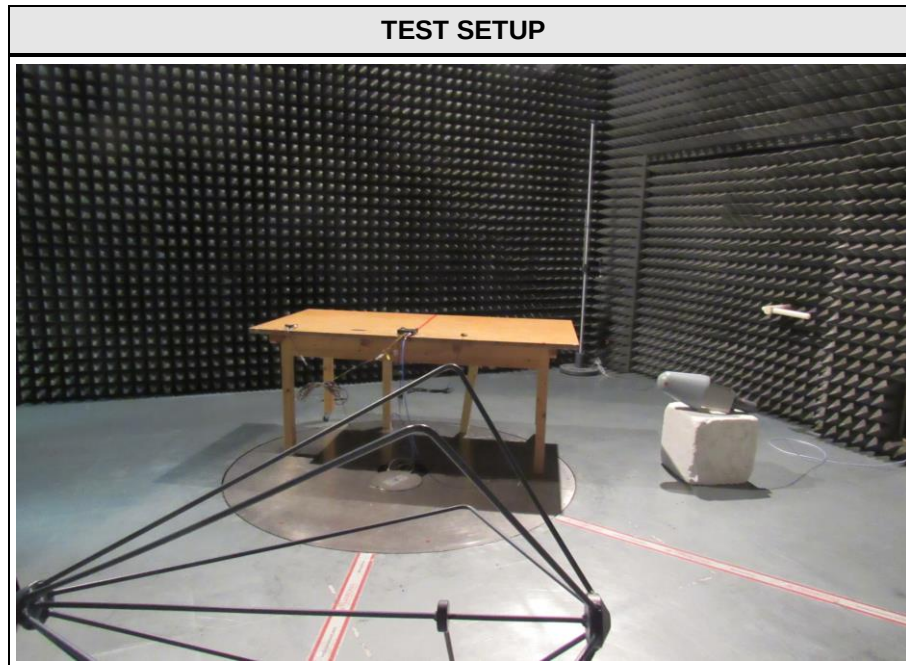

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
SIM	Network	R&S	CMW500	UMTS / LTE -Tester
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Test Modes

Mode #	Description	
W-CDMA - CS	General conditions:	EUT powered by battery. External GSM and GPS antenna connected. Active call to communication tester.
	Radio conditions:	Mode = transmit Connection = Circuit Switched Modulation = QPSK Configuration = RMC 12.2kbps Power level = Maximum
W-CDMA - PS	General conditions:	EUT powered by battery. External GSM and external GPS antenna connected. Active call to communication tester.
	Radio conditions:	Mode = transmit Connection = Packet Switched Modulation = QPSK Configuration = RMC 12.2kbps + HSPA Power level = Maximum
LTE FDD 2	General conditions:	EUT powered by battery. External GSM and GPS antenna connected. Active call to communication tester.
	Radio conditions:	LTE-1L QSPK / 10MHz / RB : 1 @ low end
		LTE-1H QSPK / 10MHz / RB : 1 @ high end
		LTE-HALF QSPK / 10MHz / RB : 50% @ center
		LTE-FULL QSPK / 10MHz / RB : 100%
LTE FDD 5	General conditions:	EUT powered by battery. External GSM and GPS antenna connected. Active call to communication tester.
	Radio conditions:	LTE-1L QSPK / 10MHz / RB : 1 @ low end
		LTE-1H QSPK / 10MHz / RB : 1 @ high end
		LTE-HALF QSPK / 10MHz / RB : 50% @ center
		LTE-FULL QSPK / 10MHz / RB : 100%
W-CDMA - RX	General conditions:	EUT powered by battery. Internal GSM and external GPS antenna connected.
	Radio conditions:	Mode = receive Connection = Sign. RAB Cell FACH
LTE FDD - RX	General conditions:	EUT powered by battery. Internal GSM and external GPS antenna connected.
	Radio conditions:	Mode = receive Connection = (CS) RMC Modulation = QPSK BW10 RB allocation = 0 up / 0 down

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	15.2.4

Occupied Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSIQ 26	EF00242	2016-04	2017-04

Radiated power					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Fully-anechoic chamber	Frankonia	AC 3	EF00199	functional test	functional test
Spectrum Analyzer	R&S	FSIQ 26	EF00242	2016-04	2017-04
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05
Horn Antenna	R&S	BBHA 9120D	EF01153	2016-07	2017-07

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	2016-01	2019-01
Spectrum Analyzer	R&S	FSEK 30	EF00168	2016-12	2017-12
Biconical Antenna	R&S	HK 116	EF00012	2016-05	2019-05
LPD Antenna	R&S	HL 223	EF00212	2016-04	2019-04
LPD Antenna	R&S	HL 025	EF00327	2015-10	2018-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 22H, 24E, ISED RSS-132, 133				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
ISED RSS-Gen 6.6	Occupied Bandwidth	ISED RSS-Gen 6.6 KDB 971168 ANSI C63.26-2015 5.4		Informational only
FCC § 24.235 FCC § 22.355 ISED RSS-132 § 4.3 ISED RSS-133 § 6.3	Frequency stability	FCC § 24.235 FCC § 22.355 ISED RSS-132 § 4.3 ISED RSS-133 § 6.3 KDB 971168 ANSI C63.26-2015 5.6	N/T	
FCC § 22.913(a)	Effective radiated power	ANSI/TIA-603-D KDB 971168	PASS	
FCC § 24.232(c) ISED RSS-132 § 4.4 ISED RSS-133 § 6.4	Equivalent isotropic radiated power	ANSI/TIA-603-D KDB 971168 ANSI C63.26-2015 5.2	PASS	
FCC § 24.232(d) ISED RSS-133 § 6.4	Peak to average ratio	KDB 971168	N/T	
FCC § 22.917(b) FCC § 24.238(b) ISED RSS-132 § 4.5 ISED RSS-133 § 6.5	Band-edge compliance	KDB 971168	N/T	
FCC § 22.917(a) FCC § 24.238(a) ISED RSS-132 § 4.5 ISED RSS-133 § 6.5	Conducted out-of-band emissions	KDB 971168 ANSI C63.26-2015 5.7	N/T	
FCC § 22.917(a) FCC § 24.238(a) ISED RSS-132 § 4.5 ISED RSS-133 § 6.5	Radiated out-of-band emissions	ANSI/TIA-603-D KDB 971168 ANSI C63.26-2015 5.5	PASS	
ISED RSS-132 § 4.6 ISED RSS-133 § 6.6 ISED RSS-Gen 7.1	Receiver radiated spurious emissions	ISED RSS-Gen 7.1 ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth

Occupied Bandwidth acc. to ISED RSS-Gen			
Test according to measurement reference	Reference Method		
	RSS-Gen 6.6 / KDB 971168 / ANSI C63.26-2015 5.4		
Test frequency range	Tested frequencies		
	F _{LOW} / F _{MID} / F _{HIGH}		
Limits			
None (Informational only)			
Test setup			
Spectrum Analyzer EUT			
Test procedure			
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1 % of span 4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function			
Test results – W-CDMA V			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	826.6	FDD - CS	4115
F _{MID}	835.0	FDD - CS	4135
F _{HIGH}	846.4	FDD - CS	4115
Test results – W-CDMA II			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	1852.6	FDD - CS	4135
F _{MID}	1880.0	FDD - CS	4135
F _{HIGH}	1907.4	FDD - CS	4125
Comments:			


Test results – LTE FDD 5			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	824.7	QPSK BW1.4	1124
F _{MID}	836.5	QPSK BW1.4	1118
F _{HIGH}	848.3	QPSK BW1.4	1130
F _{LOW}	825.5	QPSK BW 3	2705
F _{MID}	836.5	QPSK BW 3	2705
F _{HIGH}	847.5	QPSK BW 3	2693
F _{LOW}	826.5	QPSK BW 5	4549
F _{MID}	836.5	QPSK BW 5	4549
F _{HIGH}	846.5	QPSK BW 5	4529
F _{LOW}	829.0	QPSK BW 10	9098
F _{MID}	836.5	QPSK BW 10	9178
F _{HIGH}	844.0	QPSK BW 10	9058
Test results – LTE FDD 2			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	1850.7	QPSK BW1.4	1130
F _{MID}	1880.0	QPSK BW1.4	1124
F _{HIGH}	1909.3	QPSK BW1.4	1136
F _{LOW}	1851.5	QPSK BW 3	2705
F _{MID}	1880.0	QPSK BW 3	2705
F _{HIGH}	1908.5	QPSK BW 3	2705
F _{LOW}	1852.5	QPSK BW 5	4569
F _{MID}	1880.0	QPSK BW 5	4569
F _{HIGH}	1907.5	QPSK BW 5	4549
F _{LOW}	1855.0	QPSK BW 10	9178
F _{MID}	1880.0	QPSK BW 10	9178
F _{HIGH}	1905.0	QPSK BW 10	9018
F _{LOW}	1857.5	QPSK BW 15	13587
F _{MID}	1880.0	QPSK BW 15	13587
F _{HIGH}	1902.5	QPSK BW 15	13347
F _{LOW}	1860.0	QPSK BW 20	18116
F _{MID}	1880.0	QPSK BW 20	17876
F _{HIGH}	1900.0	QPSK BW 20	17796
Comments:			

Occupied Bandwidth – W-CDMA V F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: UMTS FDD V / CH: 4133 / RMC
Test Date: 2017-01-09
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.115 MHz

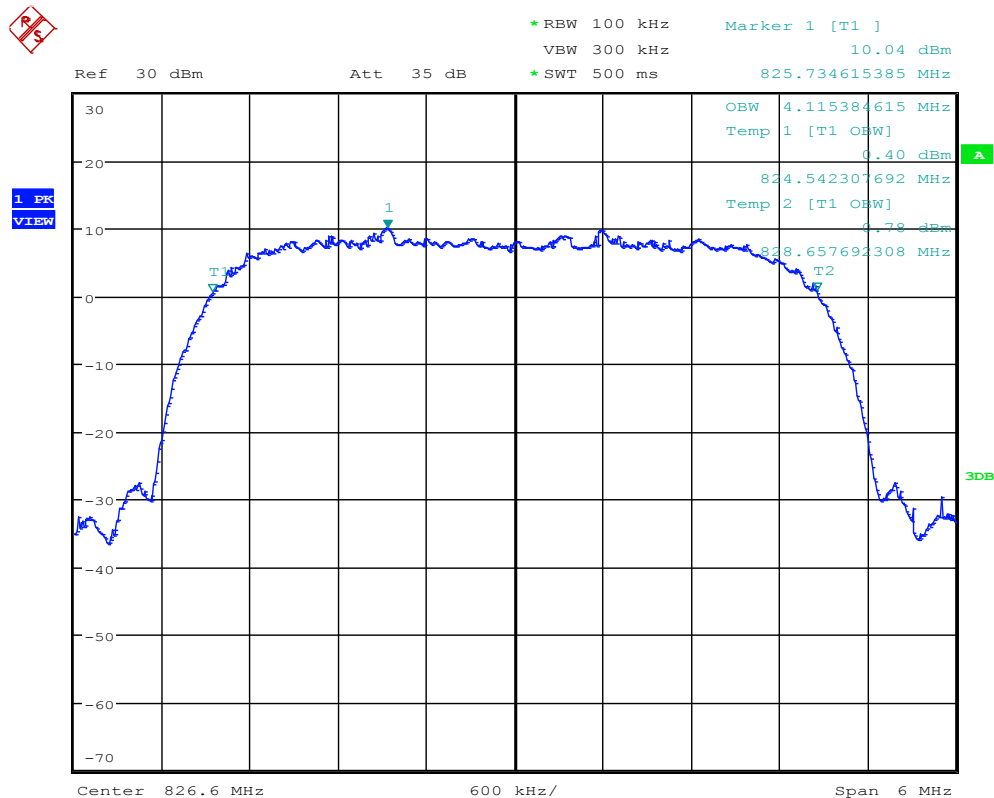

Date: 9.JAN.2017 11:21:37

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – W-CDMA V F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: UMTS FDD V / CH: 4175 / RMC
Test Date: 2017-01-09
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.135 MHz

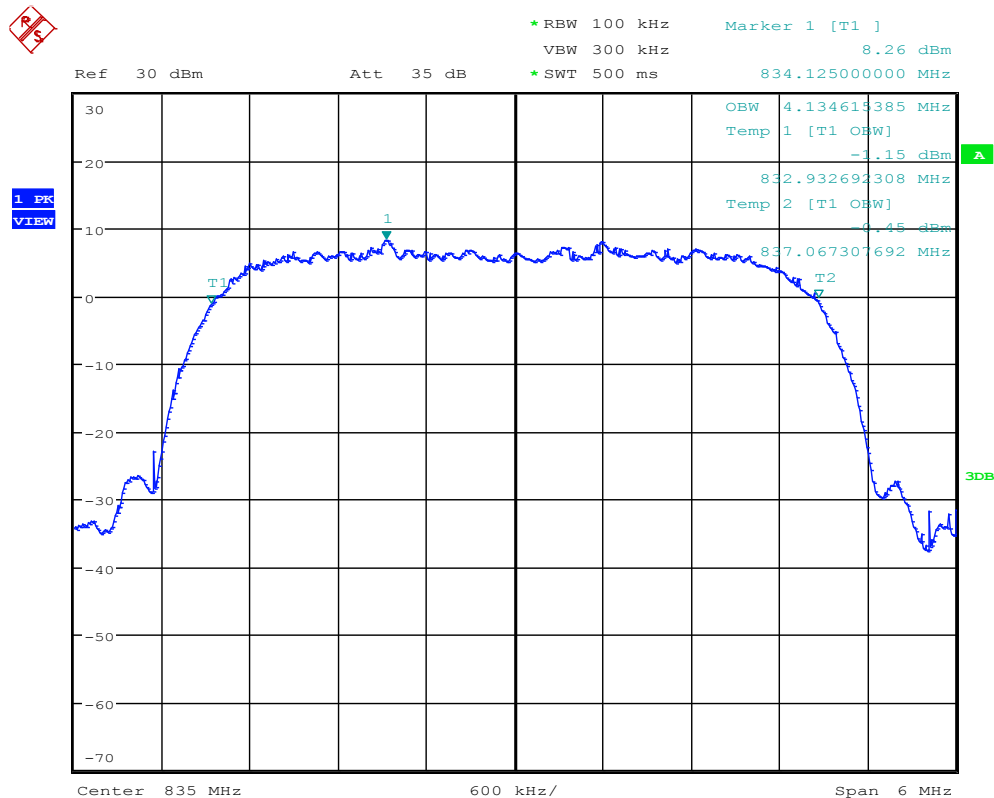

Date: 9.JAN.2017 11:33:02

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – W-CDMA V F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: UMTS FDD V / CH: 4232 / RMC
Test Date: 2017-01-09
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.115 MHz

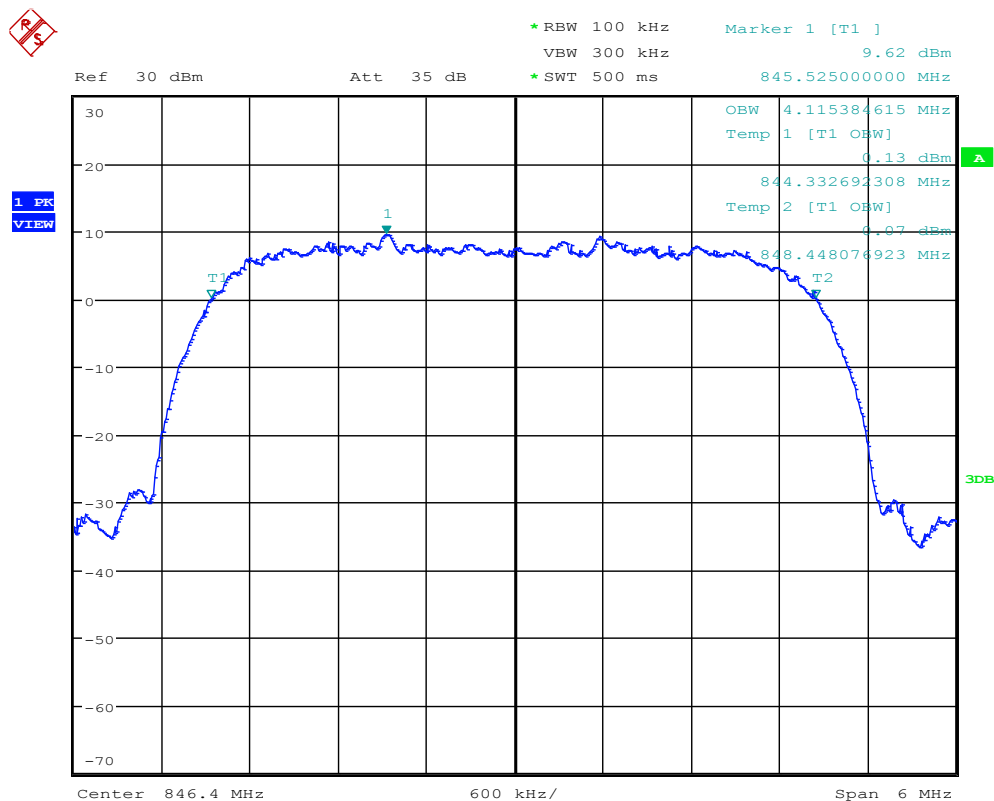

Date: 9.JAN.2017 11:37:18

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – W-CDMA II F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: UMTS FDD II / CH: 9263 / RMC
Test Date: 2017-01-09
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.135 MHz

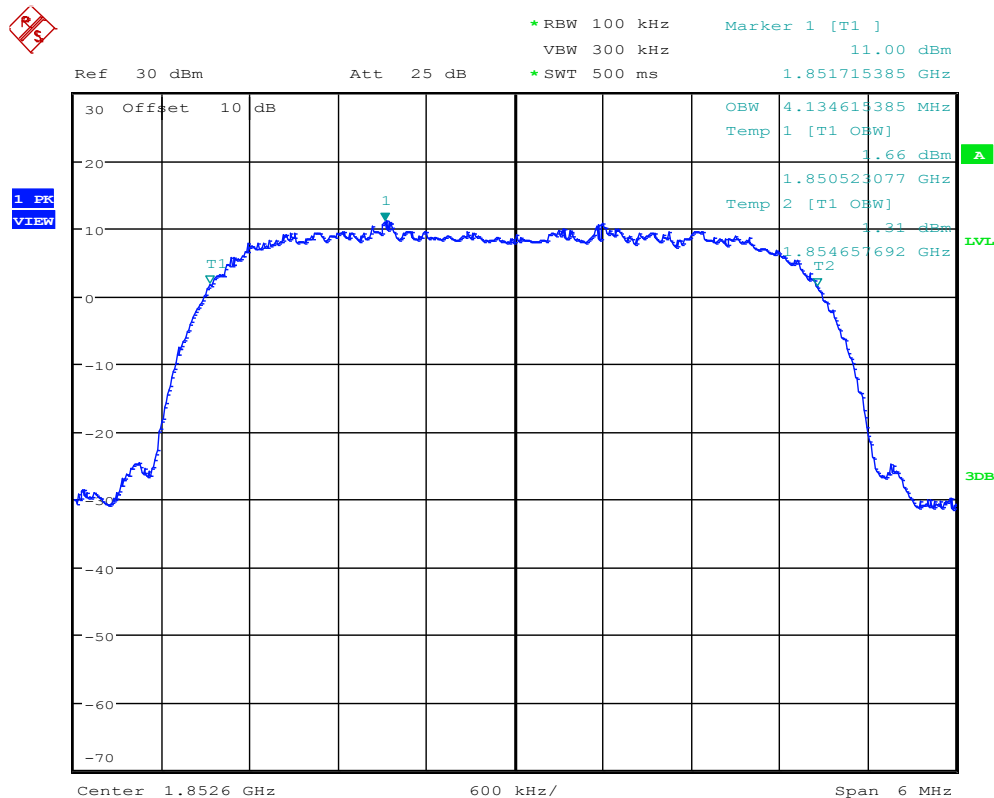

Date: 9.JAN.2017 11:44:21

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – W-CDMA II F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: UMTS FDD II / CH: 9400 / RMC
Test Date: 2017-01-09
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.135 MHz

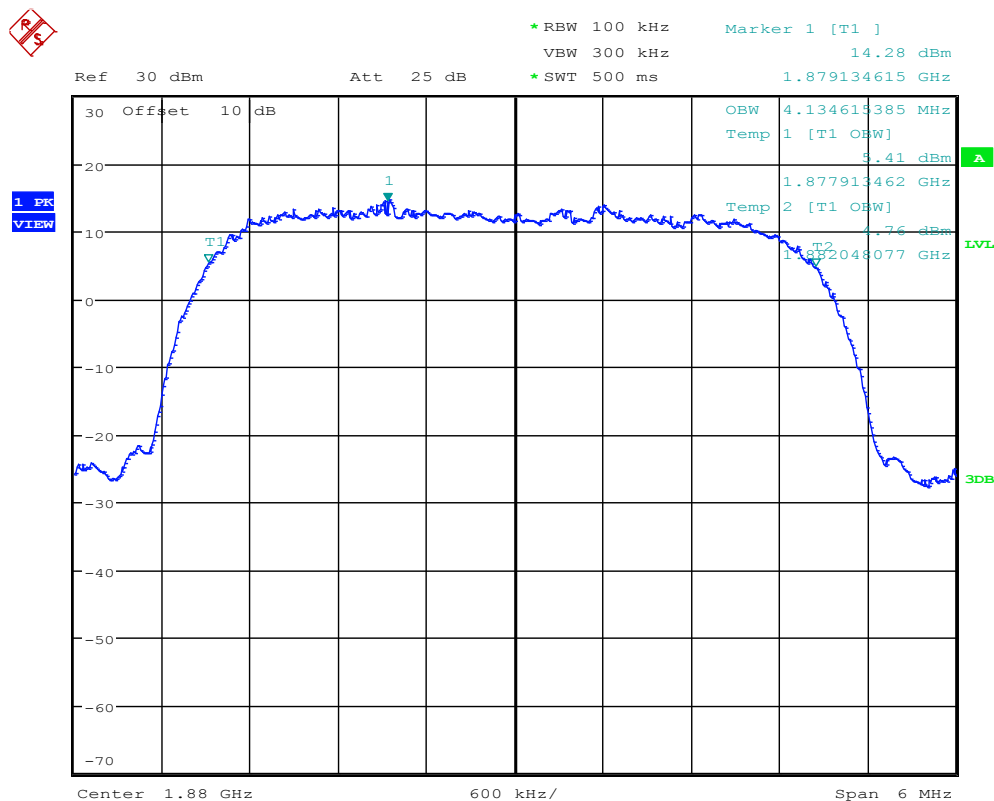

Date: 9.JAN.2017 11:47:54

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – W-CDMA II F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: UMTS FDD II / CH: 9537 / RMC
Test Date: 2017-01-09
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.125 MHz

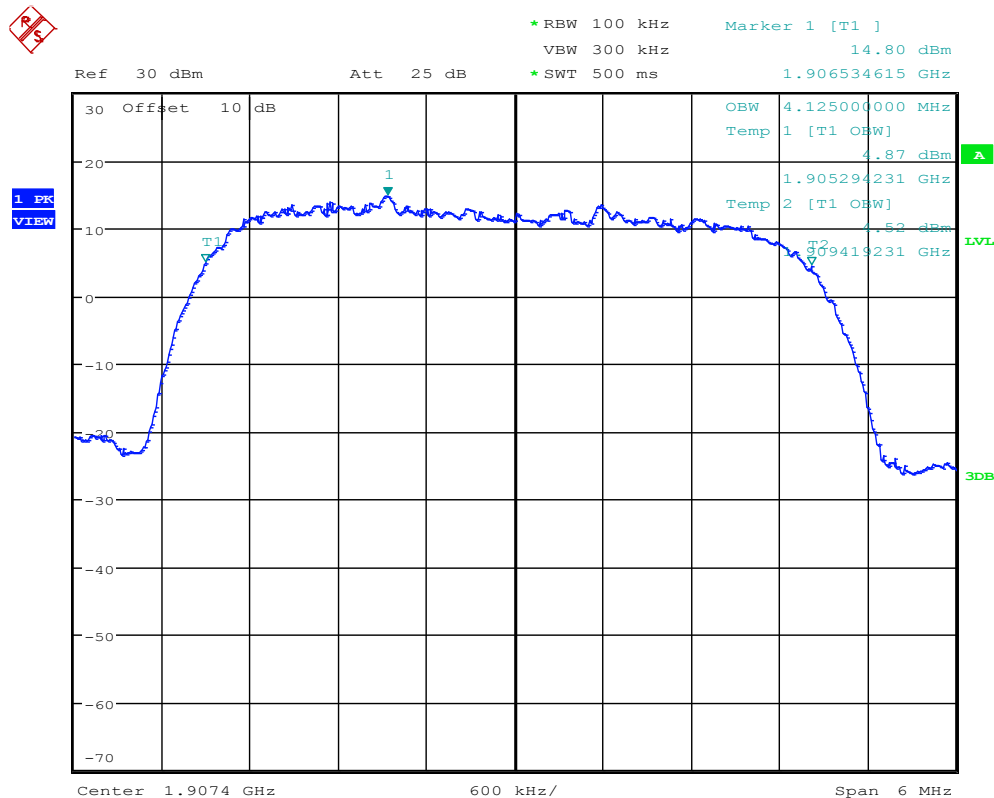

Date: 9.JAN.2017 11:50:09

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW1.4 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20407 / BW: 1.4MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 1.124 MHz

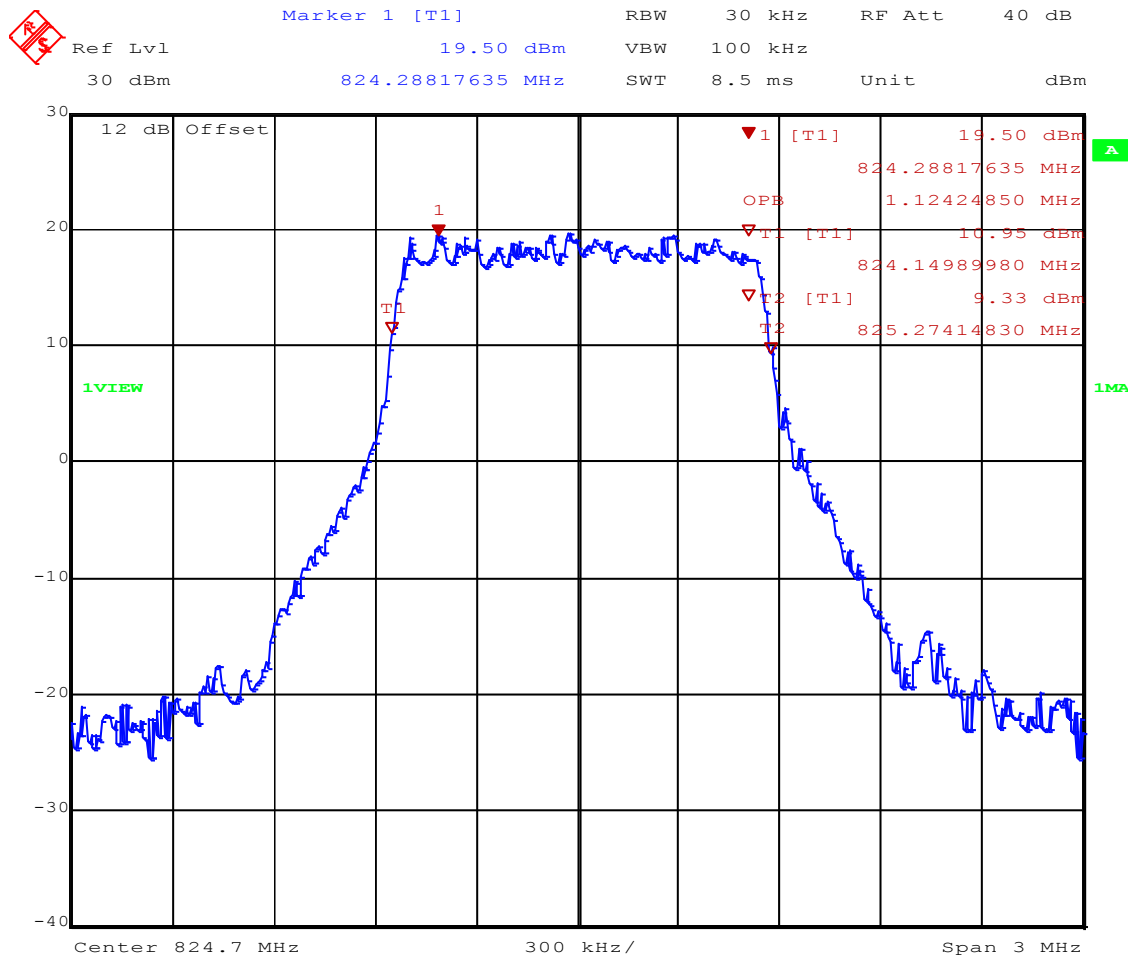

Date: 10.JAN.2017 09:58:01

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW1.4 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20525 / BW: 1.4MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 1.118 MHz

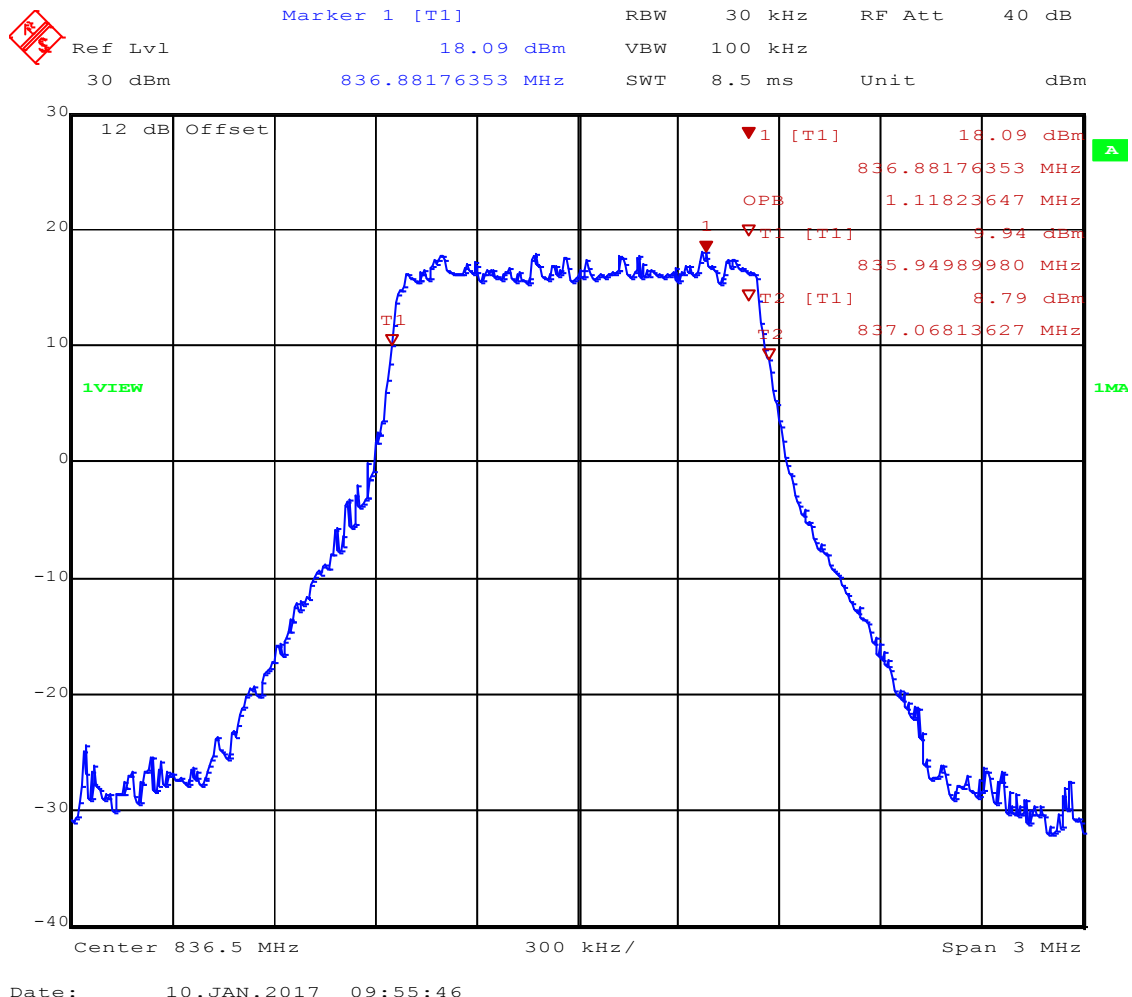

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW1.4 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20643 / BW: 1.4MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 1.130 MHz

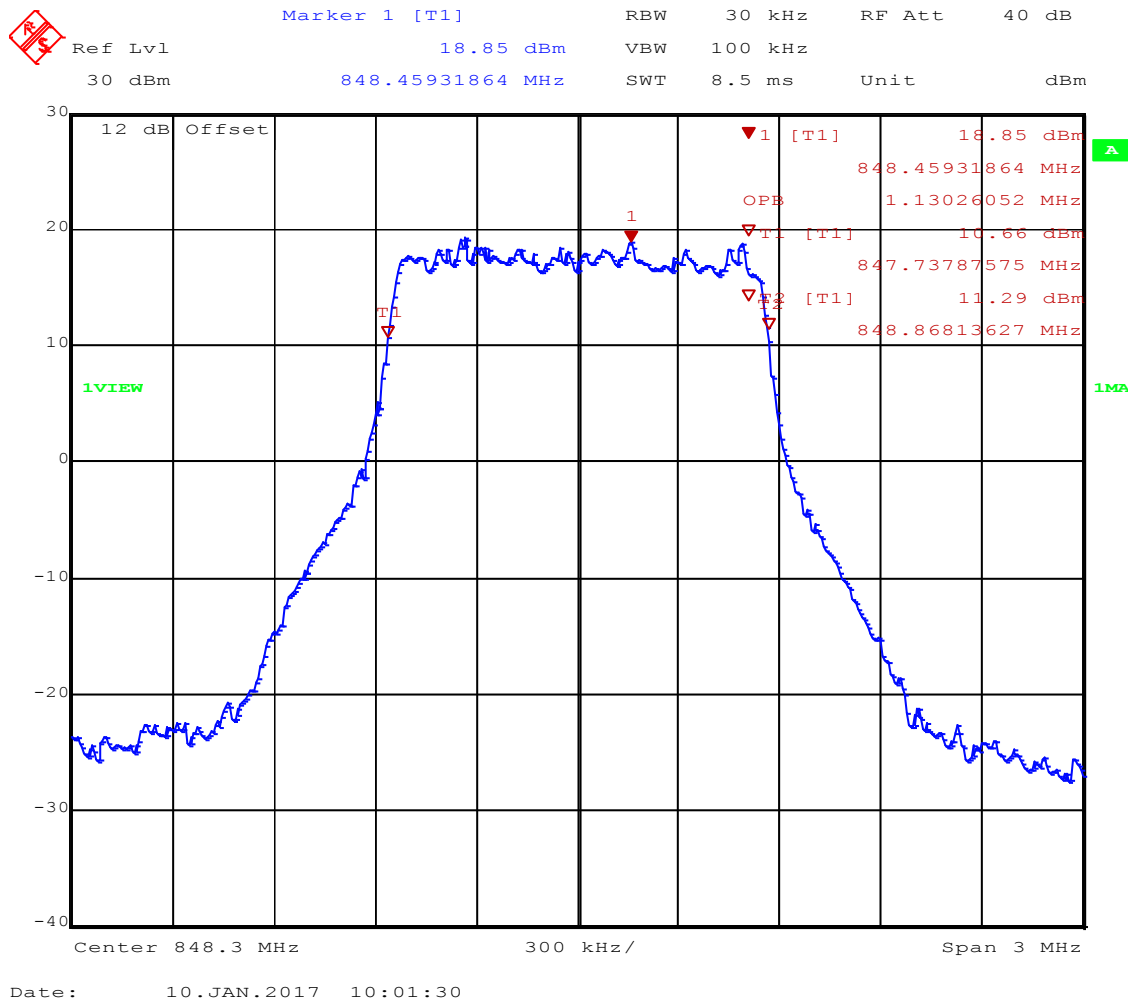

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW3 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20415 / BW: 3MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 2.705 MHz

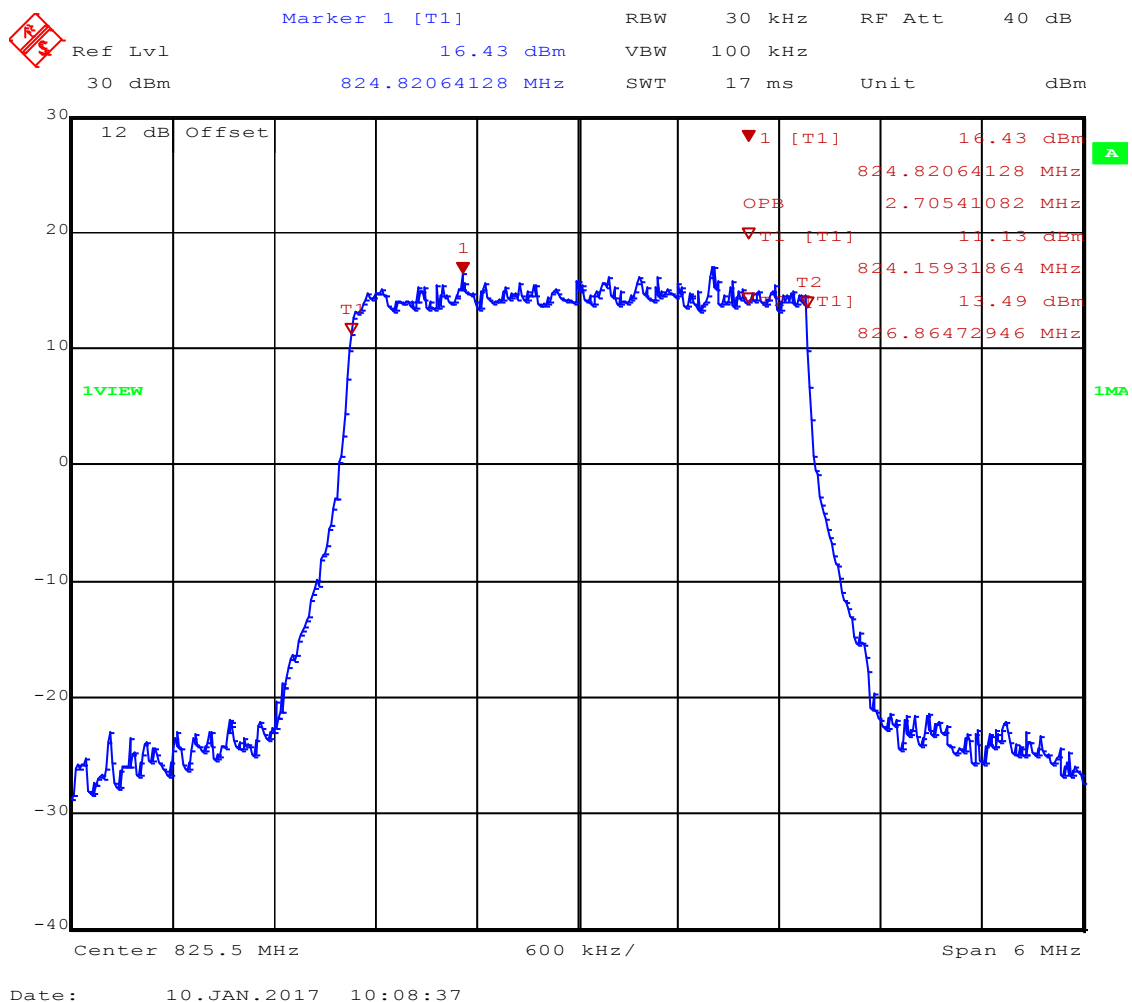

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW3 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20525 / BW: 3MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 2.705 MHz

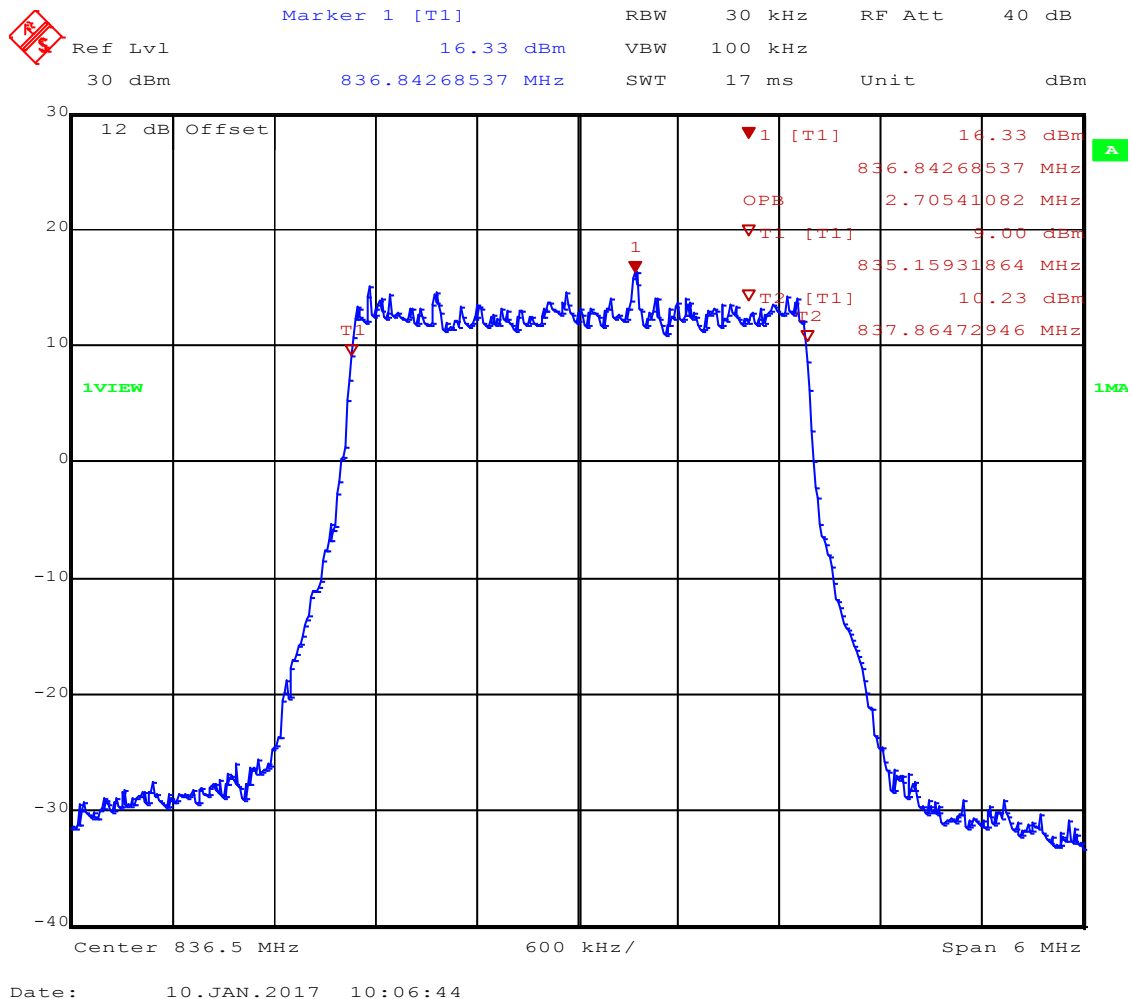

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW3 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20635 / BW: 3MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 2.693 MHz

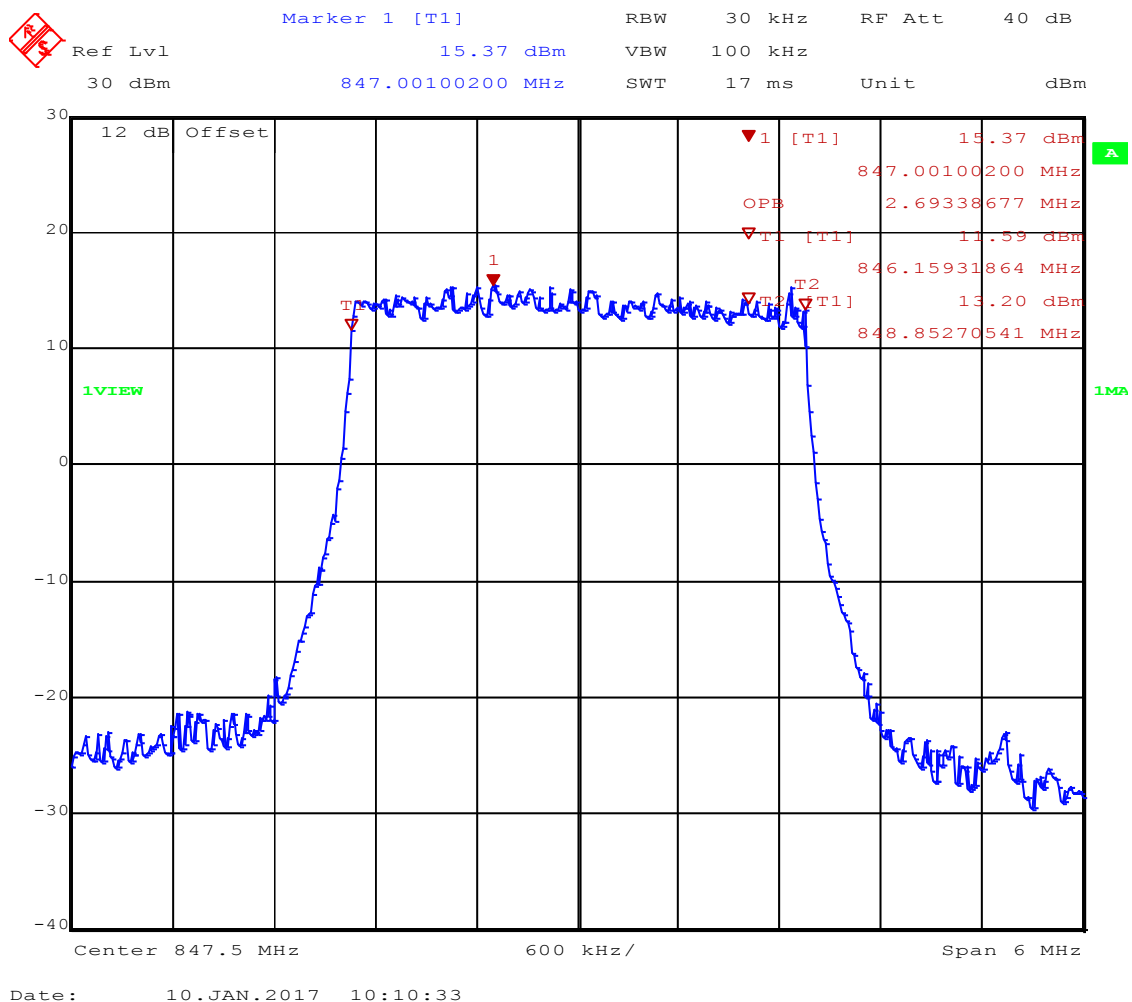

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW5 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20425 / BW: 5MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.549 MHz

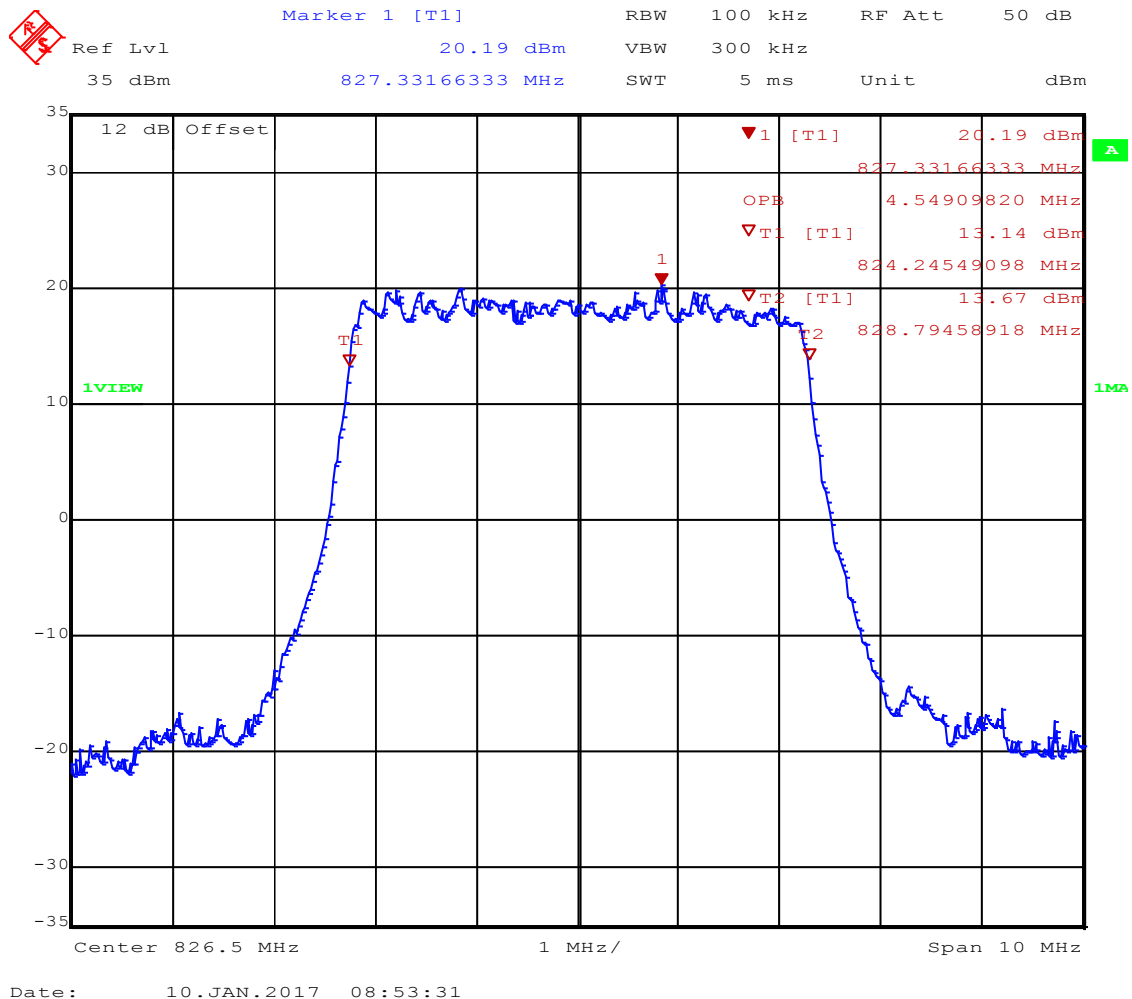


Occupied Bandwidth – LTE 5_QPSK-BW5 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20525 / BW: 5MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.549 MHz

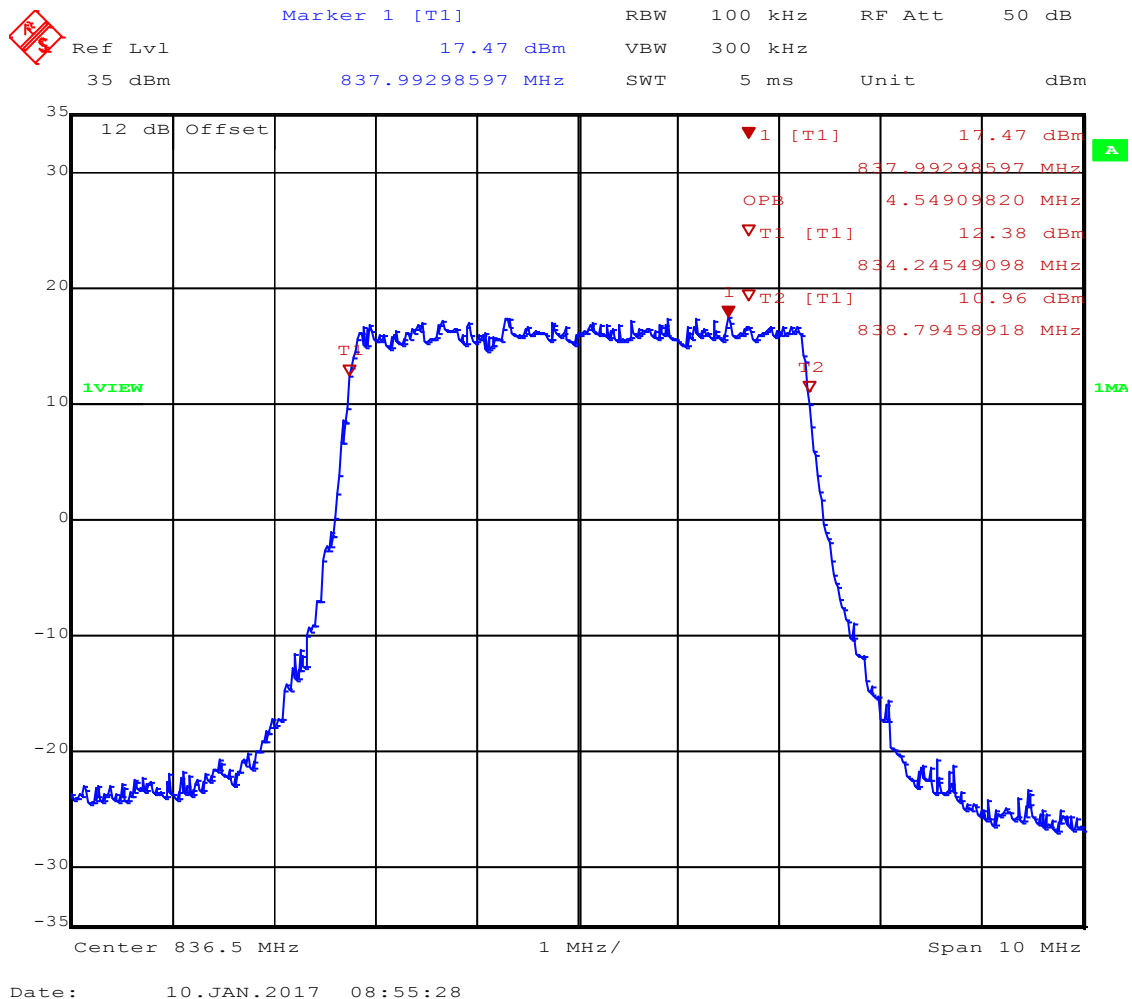

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW5 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20625 / BW: 5MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.529 MHz

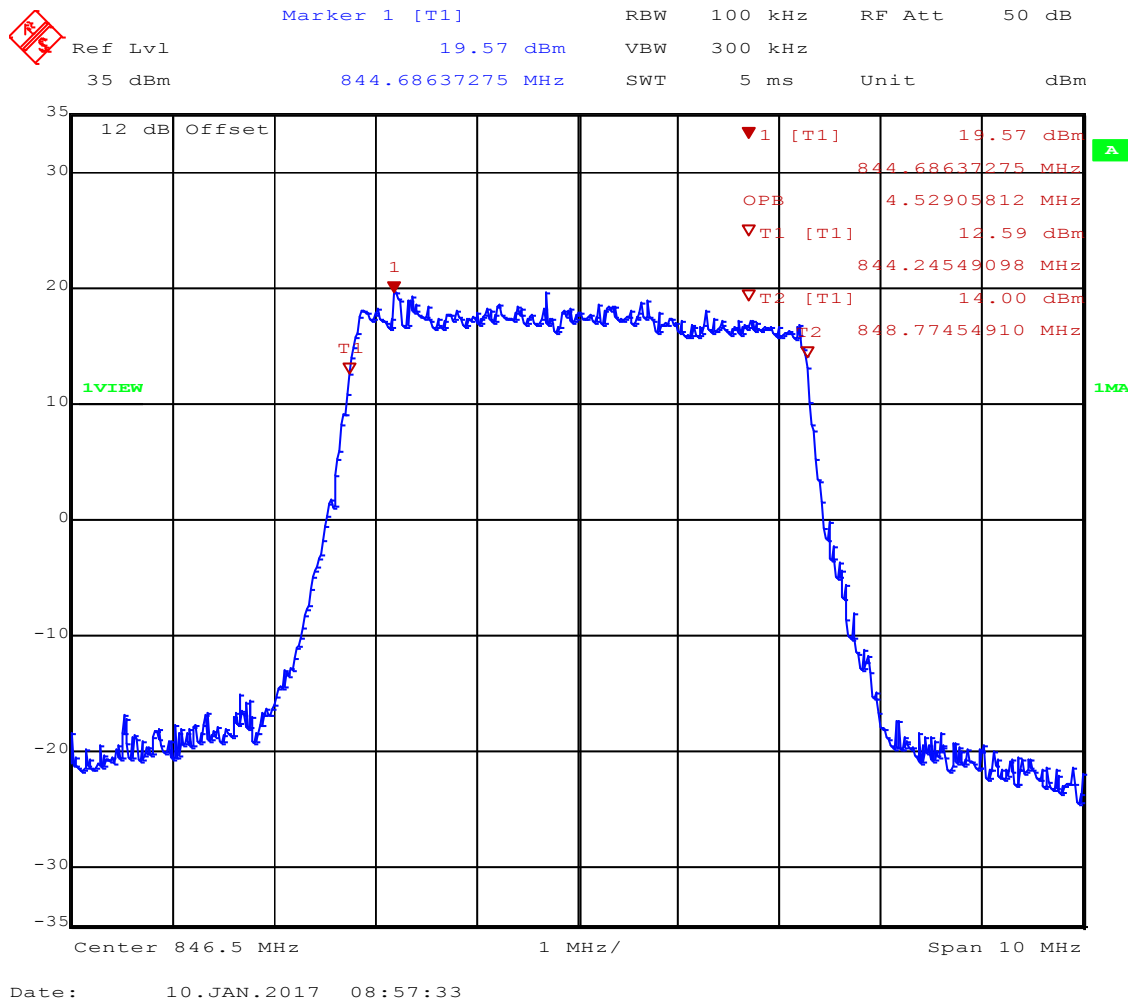

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW10 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20450 / BW: 10MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 9.098 MHz

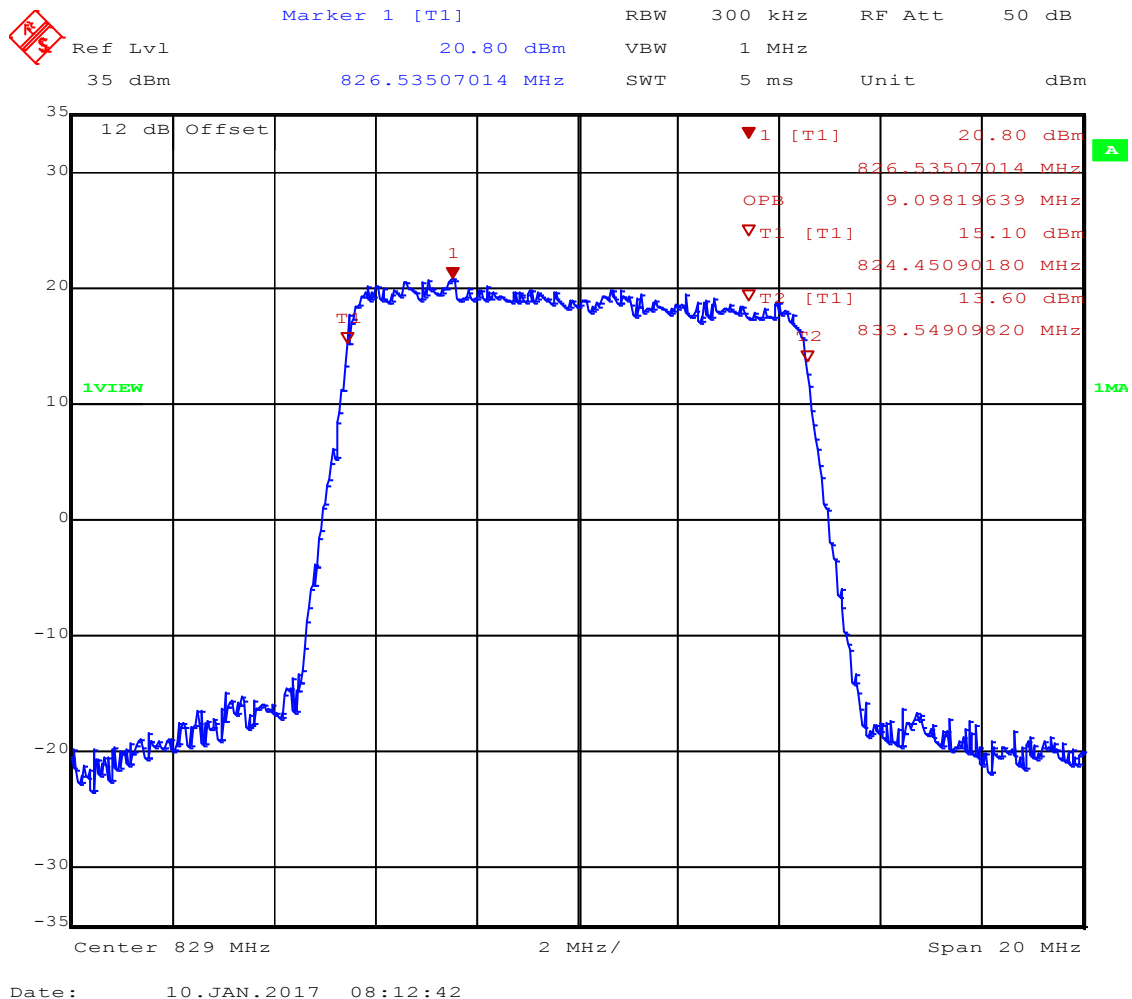

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW10 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20525 / BW: 10MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 9.178 MHz

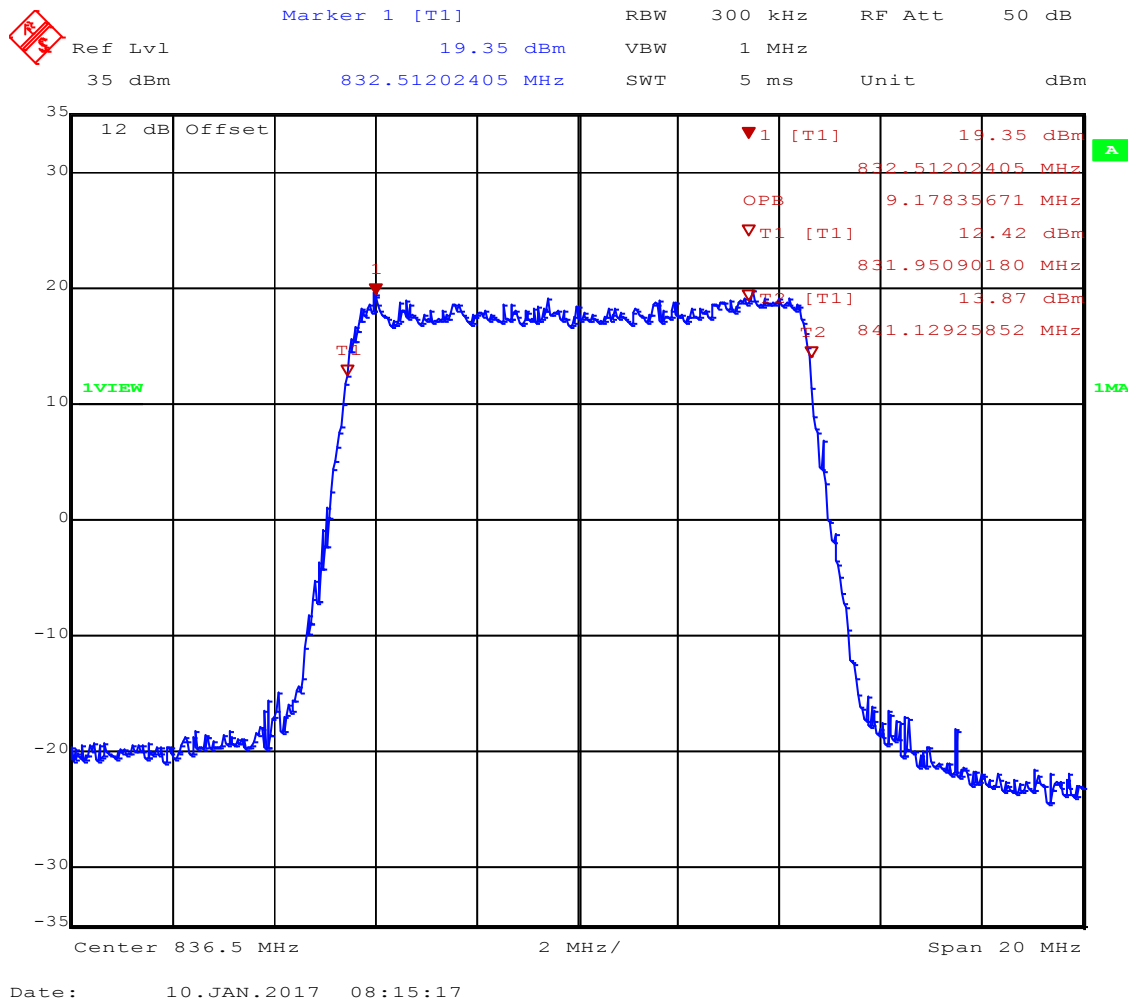

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 5_QPSK-BW10 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 5 / CH: 20600 / BW: 10MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 9.058 MHz

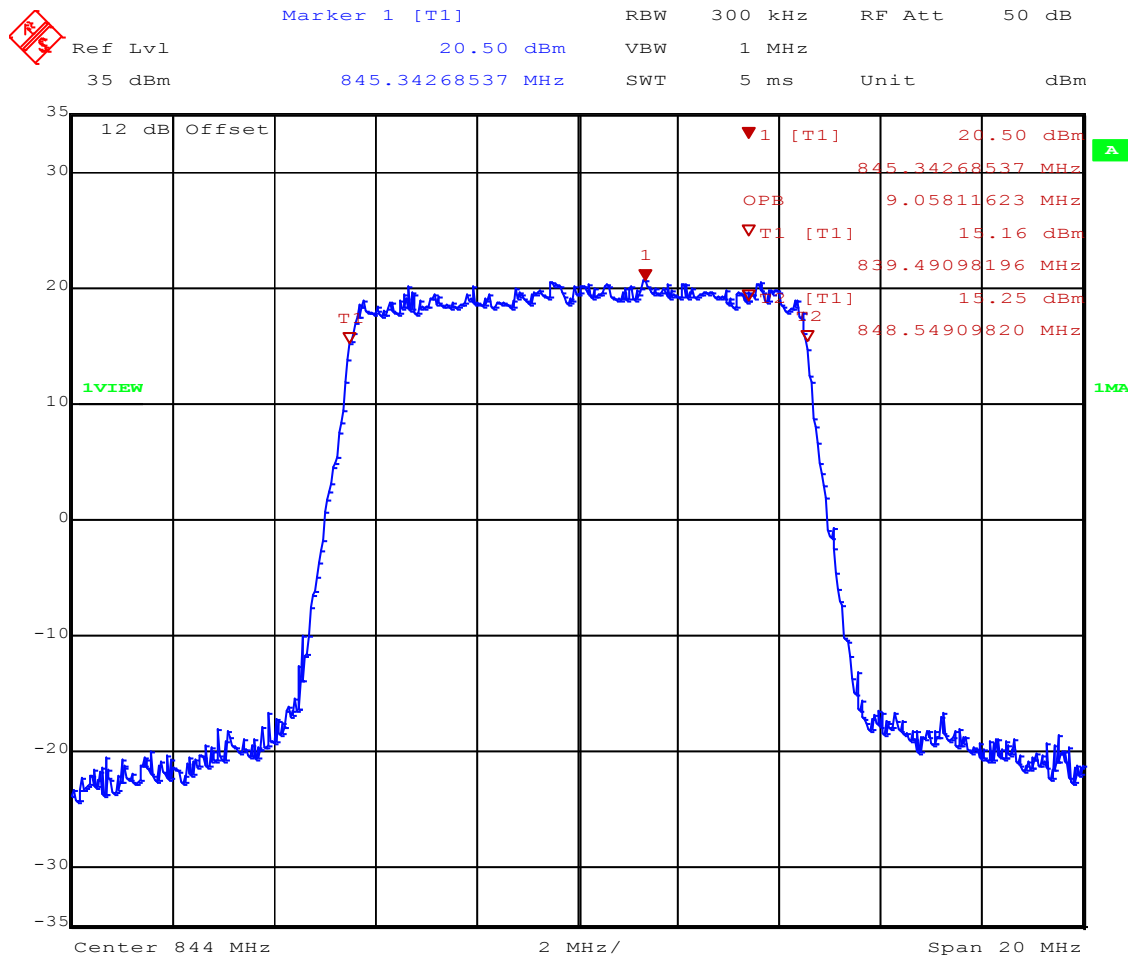

Date: 10.JAN.2017 08:17:19

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW1.4 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18607 / BW: 1.4MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 1.130 MHz

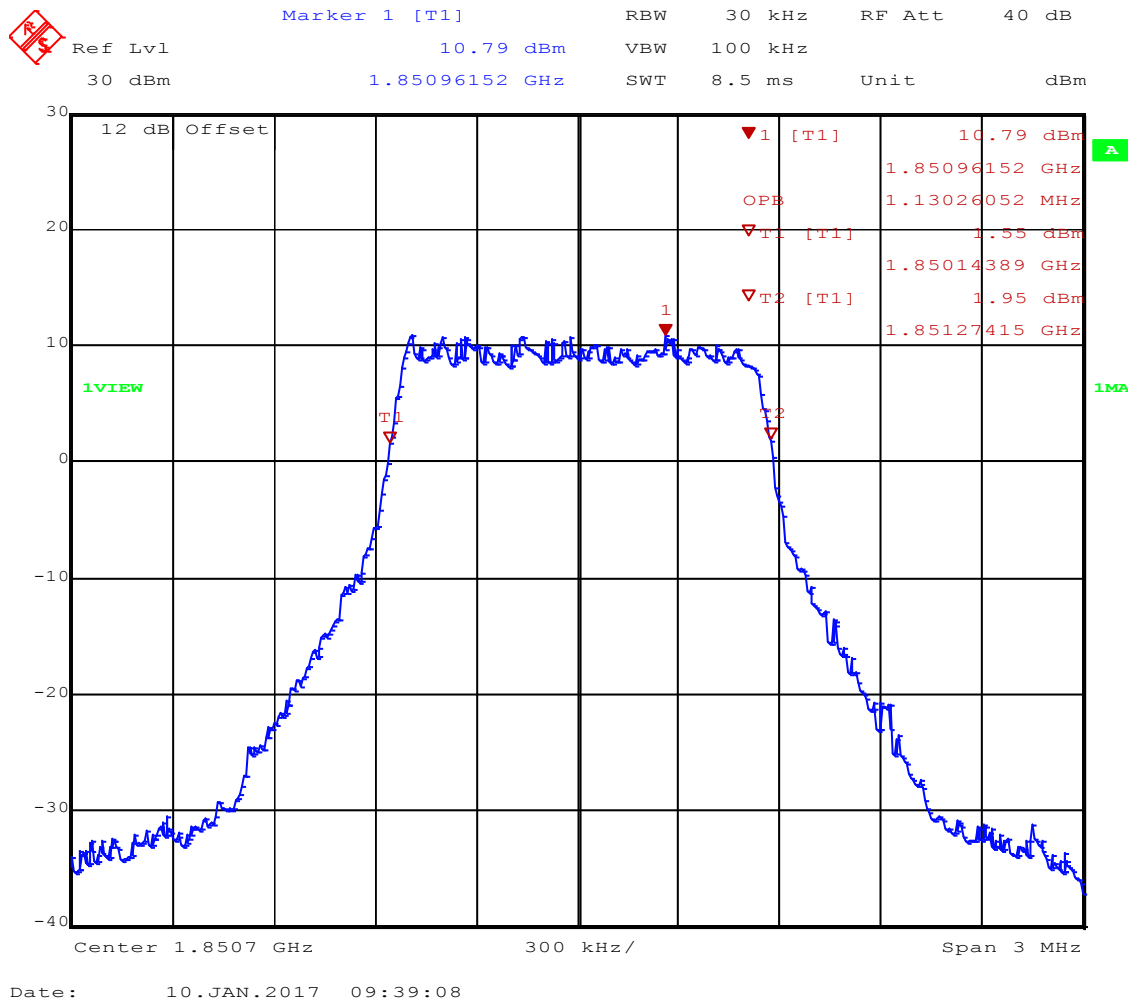


Occupied Bandwidth – LTE 2_QPSK-BW1.4 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18900 / BW: 1.4MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 1.124 MHz

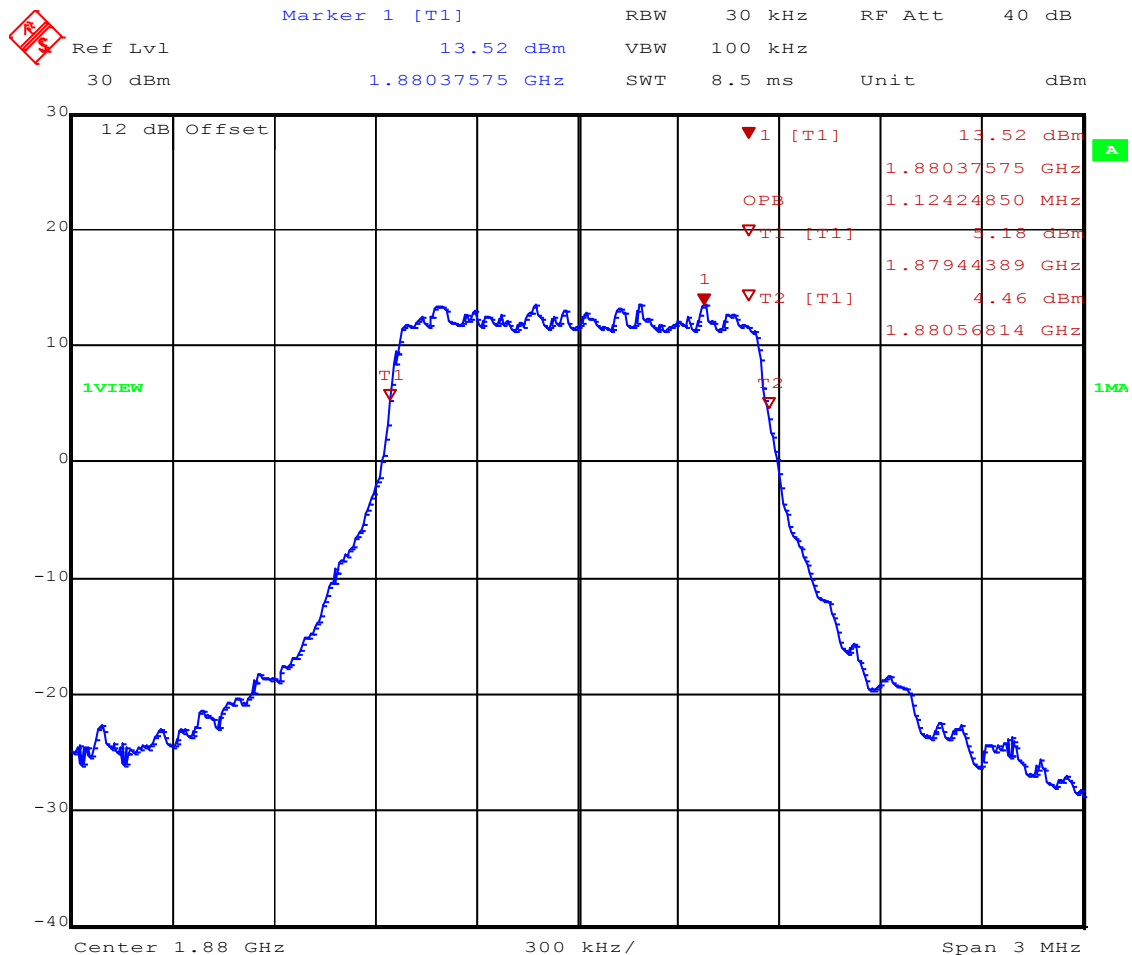

Date: 10.JAN.2017 09:37:02

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW1.4 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 19193 / BW: 1.4MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 1.136 MHz

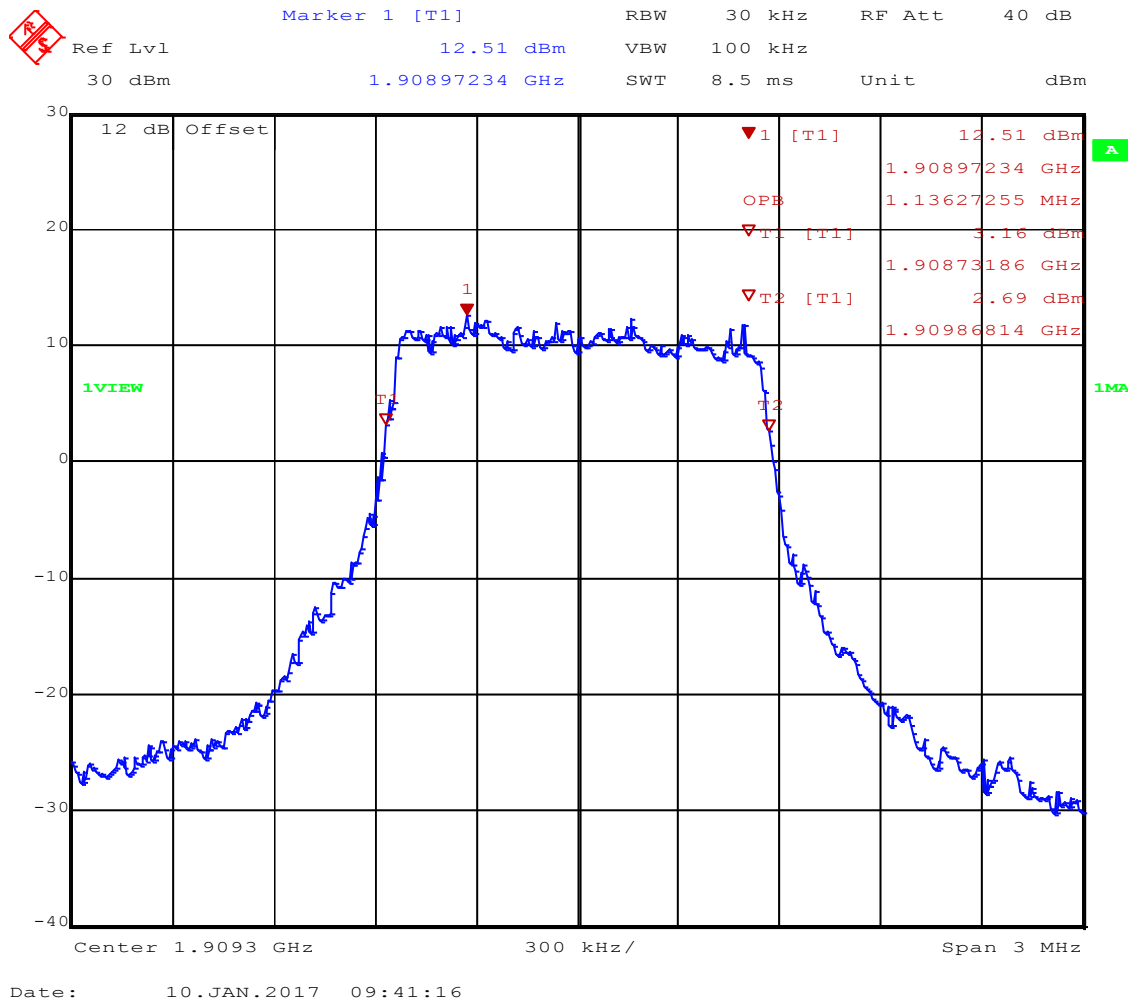

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW3 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18615 / BW: 3MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 2.705 MHz

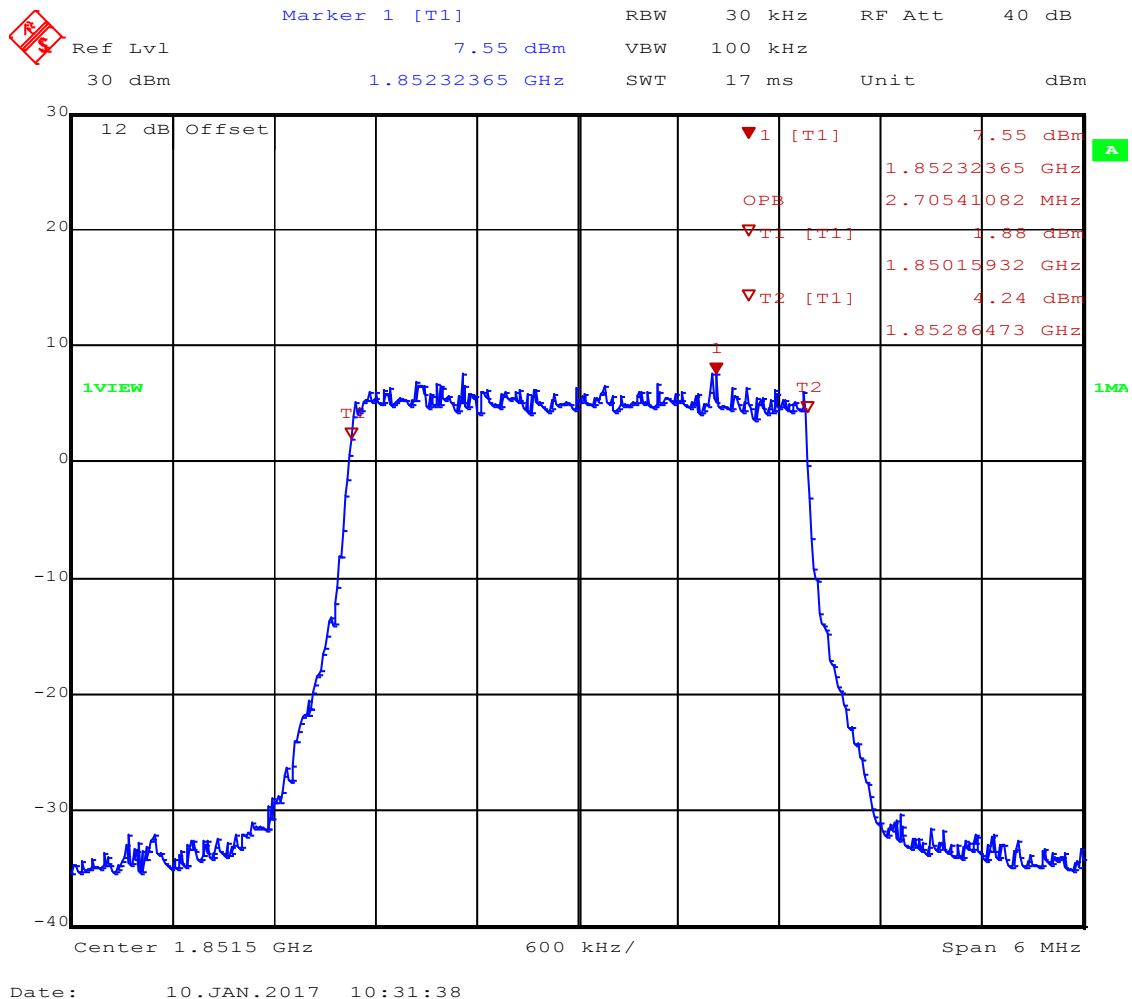

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW3 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18900 / BW: 3MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 2.705 MHz

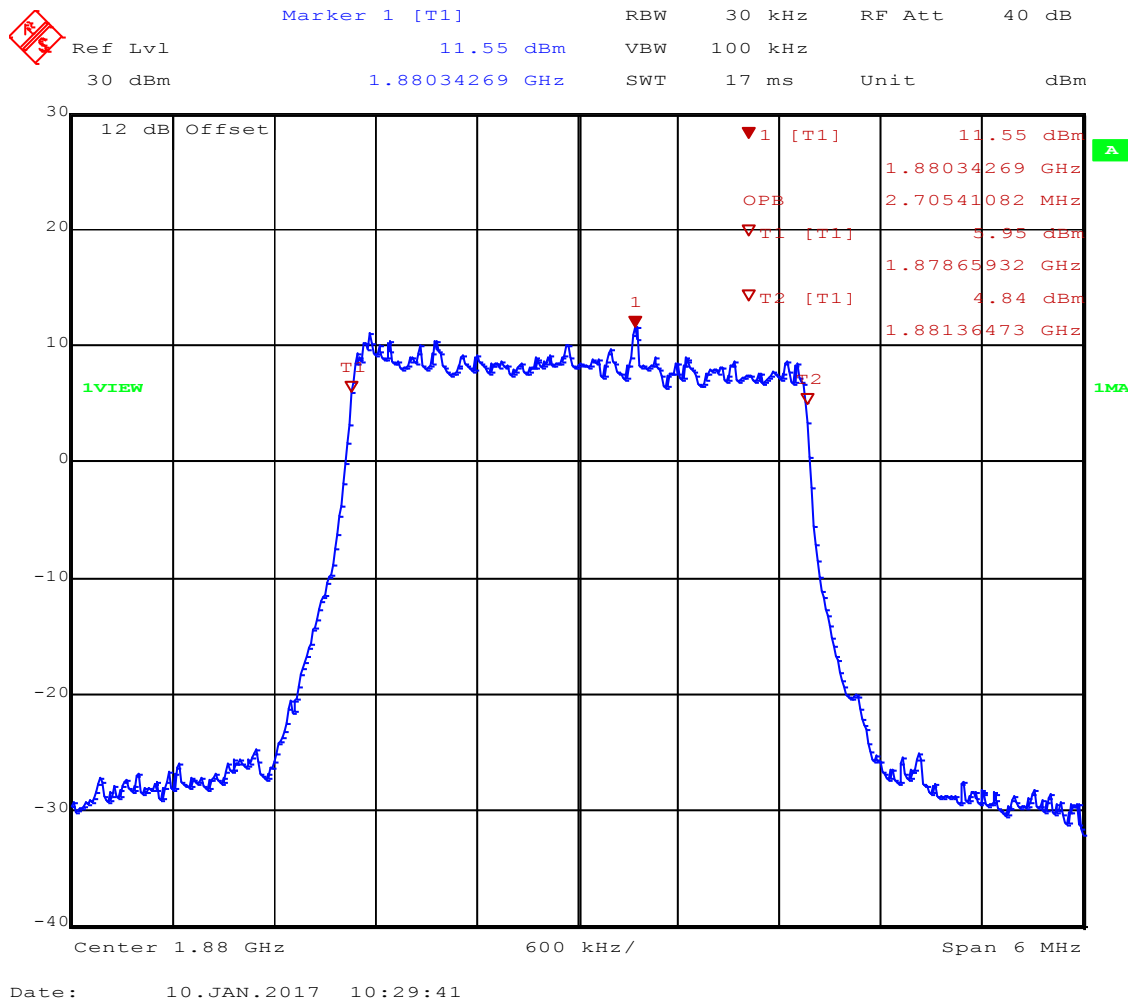

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW3 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 19185 / BW: 3MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 2.705 MHz

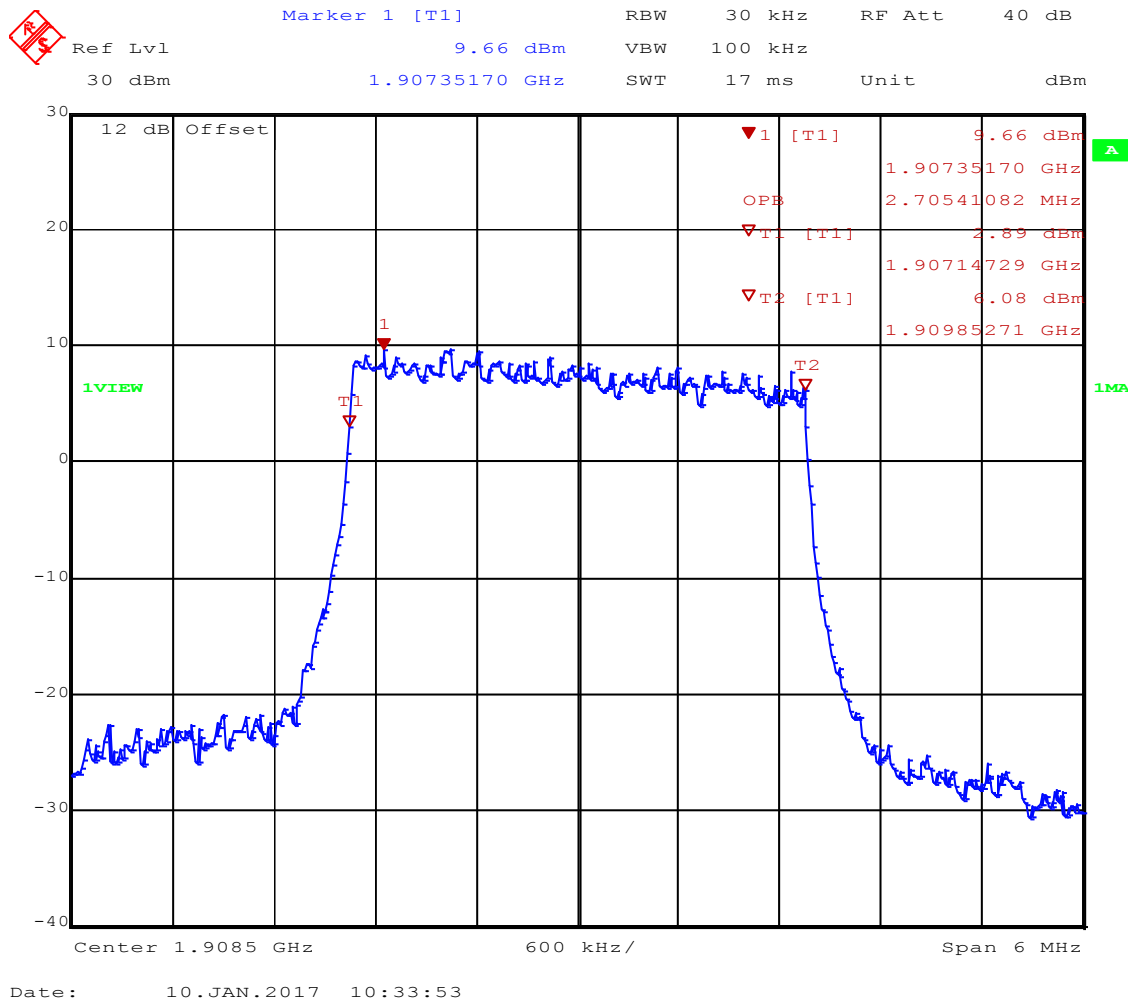

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW5 F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant:	FALCOM GmbH
EUT Name:	UMTS/GSM/GPS/LTE-Device
Model:	FOX3-4G-NA
Test Site:	Eurofins Product Service GmbH
Operator:	Burkhard Pudell
Test Conditions:	Tnom / Vnom
Mode:	LTE FDD 2 / CH: 18625 / BW: 5MHz; QPSK
Test Date:	2017-01-10
Verdict:	NONE (INFORMATION ONLY)
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	OBW = 4.569 MHz

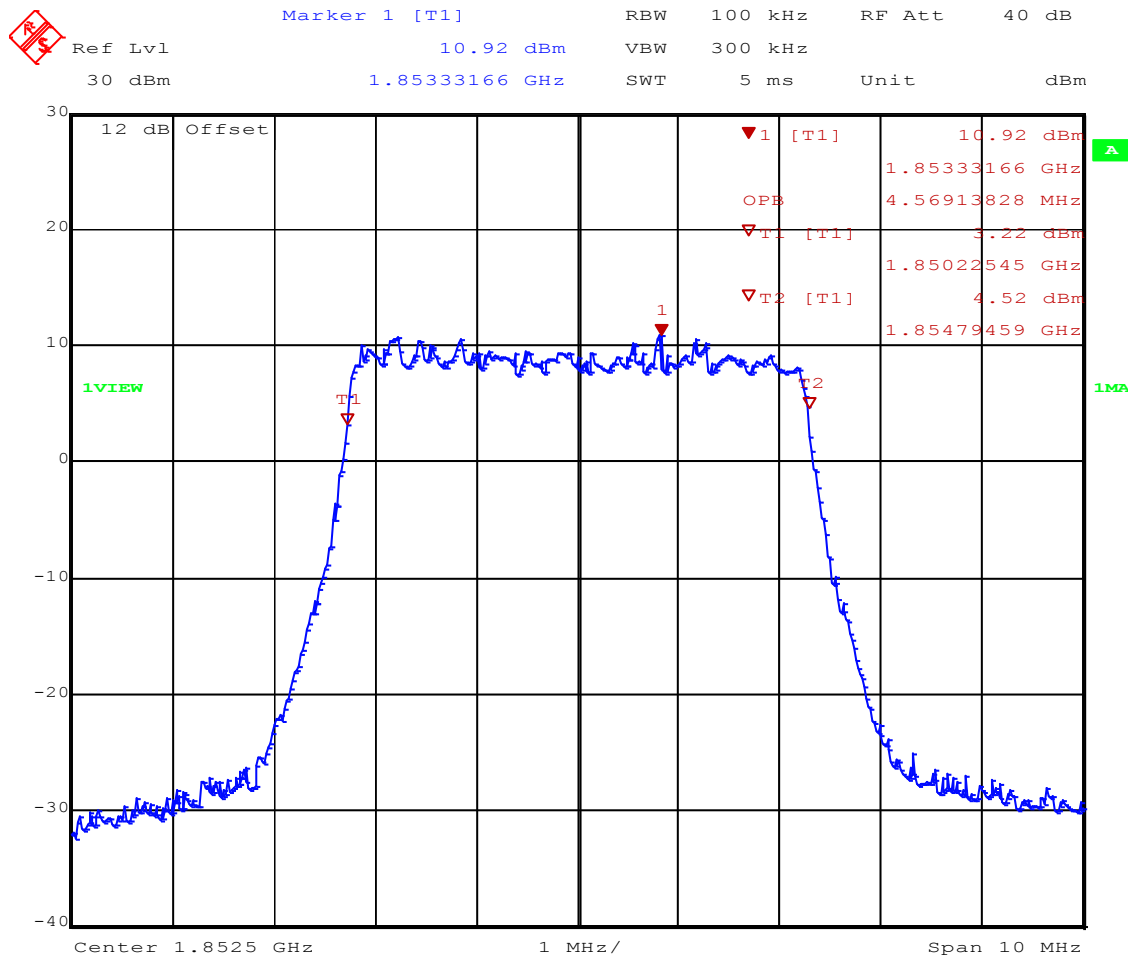

Date: 10.JAN.2017 09:18:23

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW5 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18900 / BW: 5MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.569 MHz

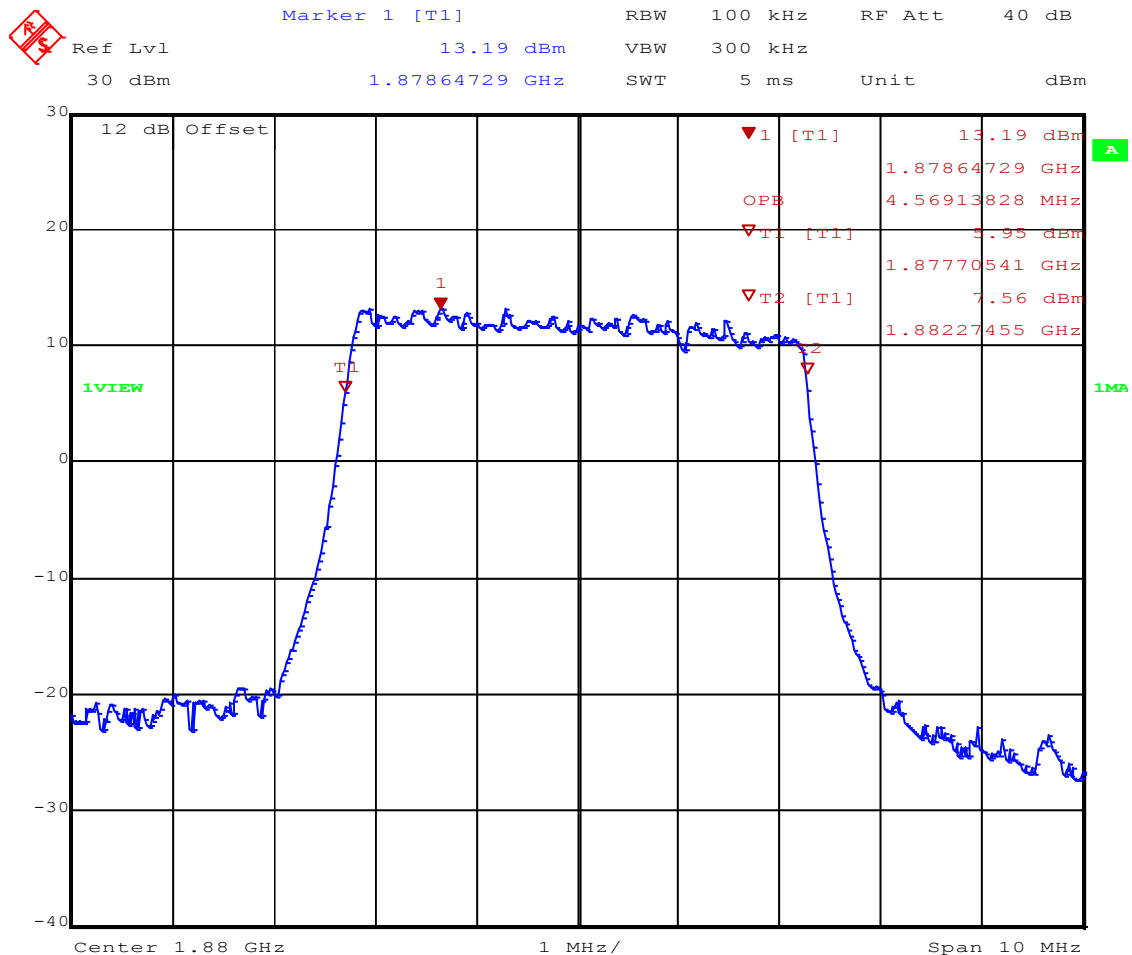

Date: 10.JAN.2017 09:22:19

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW5 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 19175 / BW: 5MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 4.549 MHz

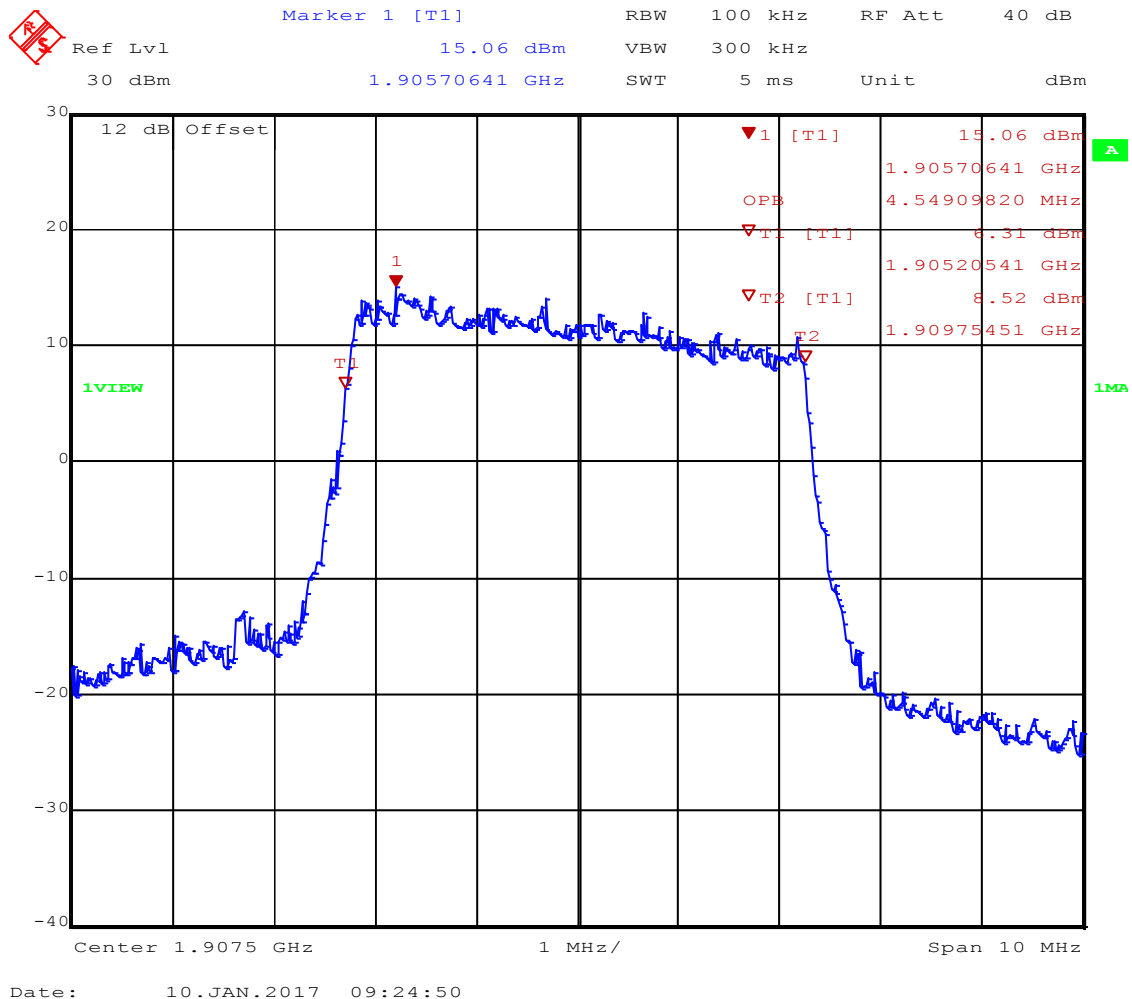


Occupied Bandwidth – LTE 2_QPSK-BW10 F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant:	FALCOM GmbH
EUT Name:	UMTS/GSM/GPS/LTE-Device
Model:	FOX3-4G-NA
Test Site:	Eurofins Product Service GmbH
Operator:	Burkhard Pudell
Test Conditions:	Tnom / Vnom
Mode:	LTE FDD 2 / CH: 18900 / BW: 10MHz; QPSK
Test Date:	2017-01-10
Verdict:	NONE (INFORMATION ONLY)
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	OBW = 9.178 MHz

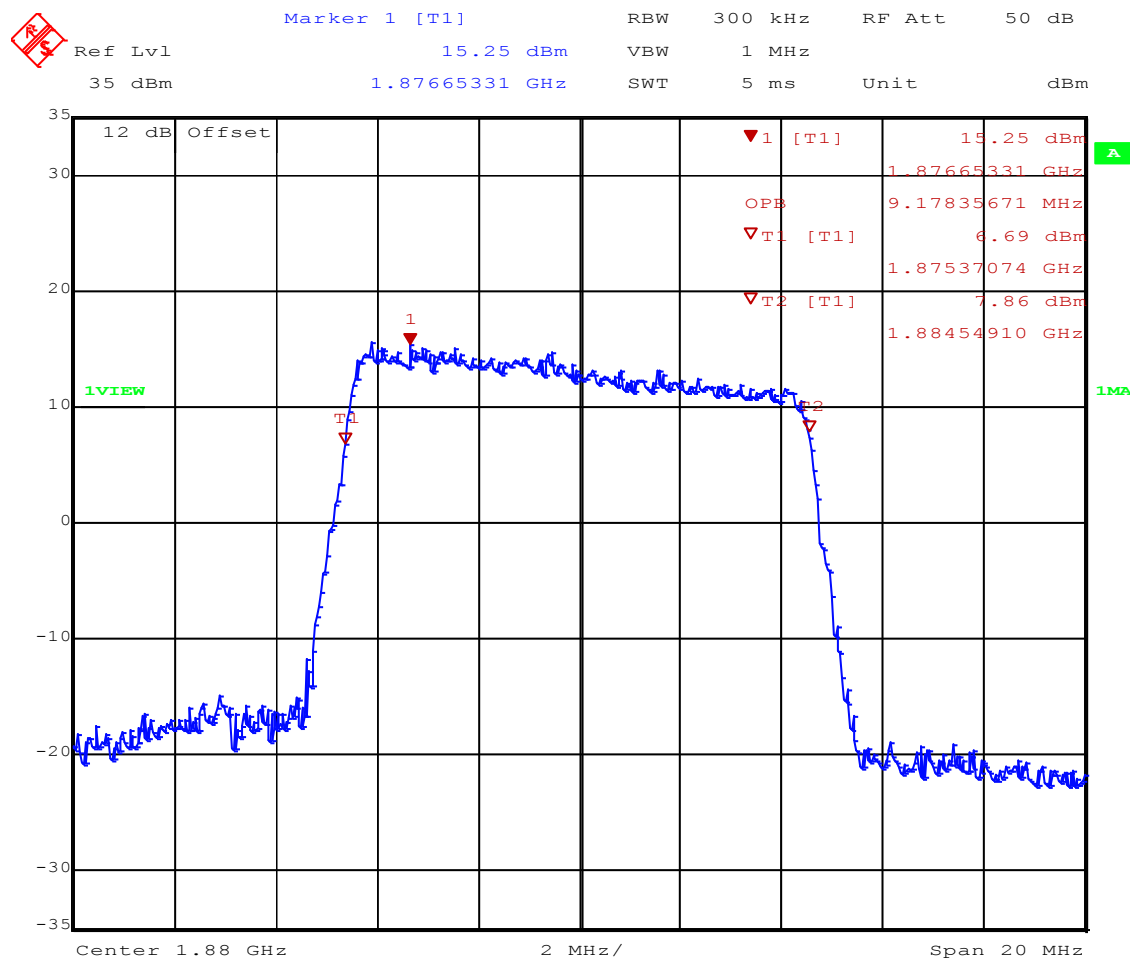

Date: 10.JAN.2017 08:01:13

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW10 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18900 / BW: 10MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 9.178 MHz

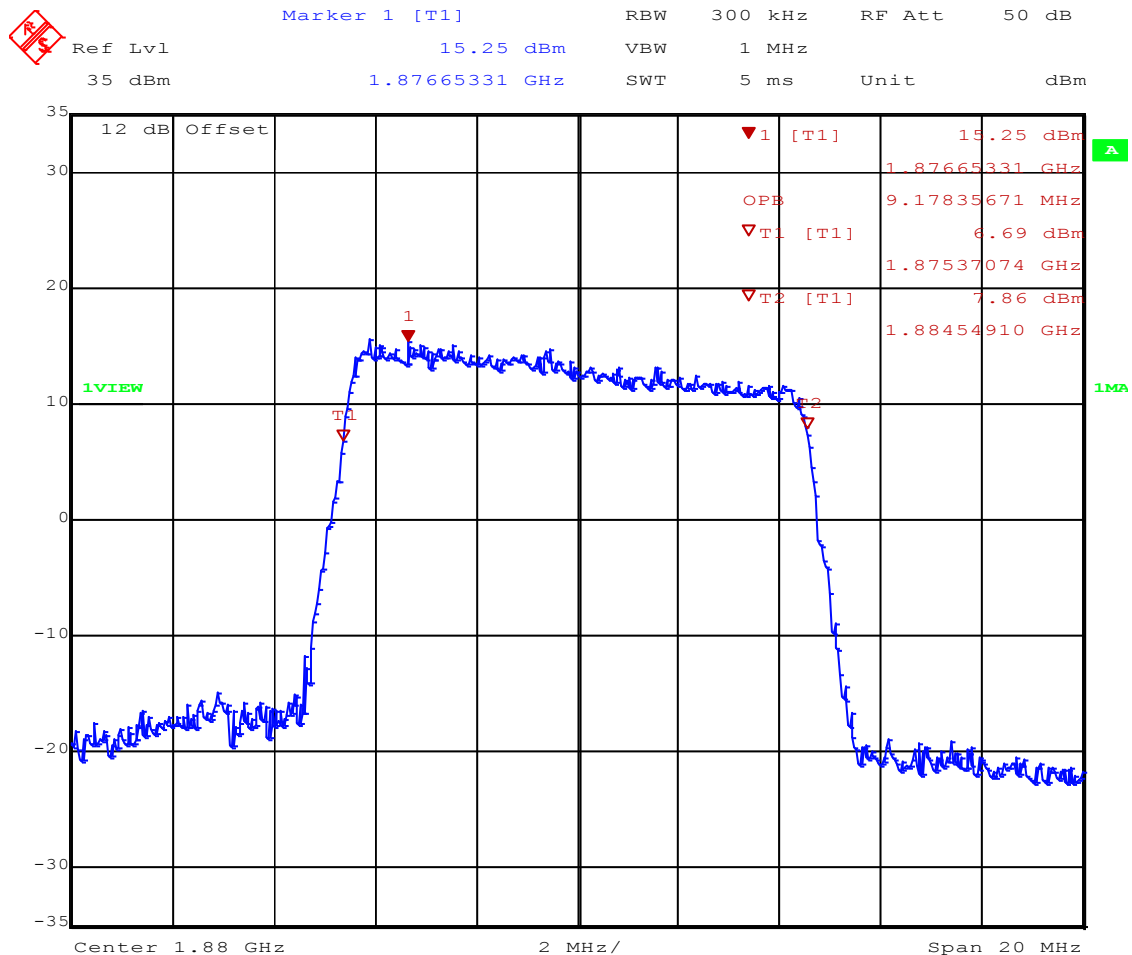

Date: 10.JAN.2017 08:01:13

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW10 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 19150 / BW: 10MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 9.018 MHz

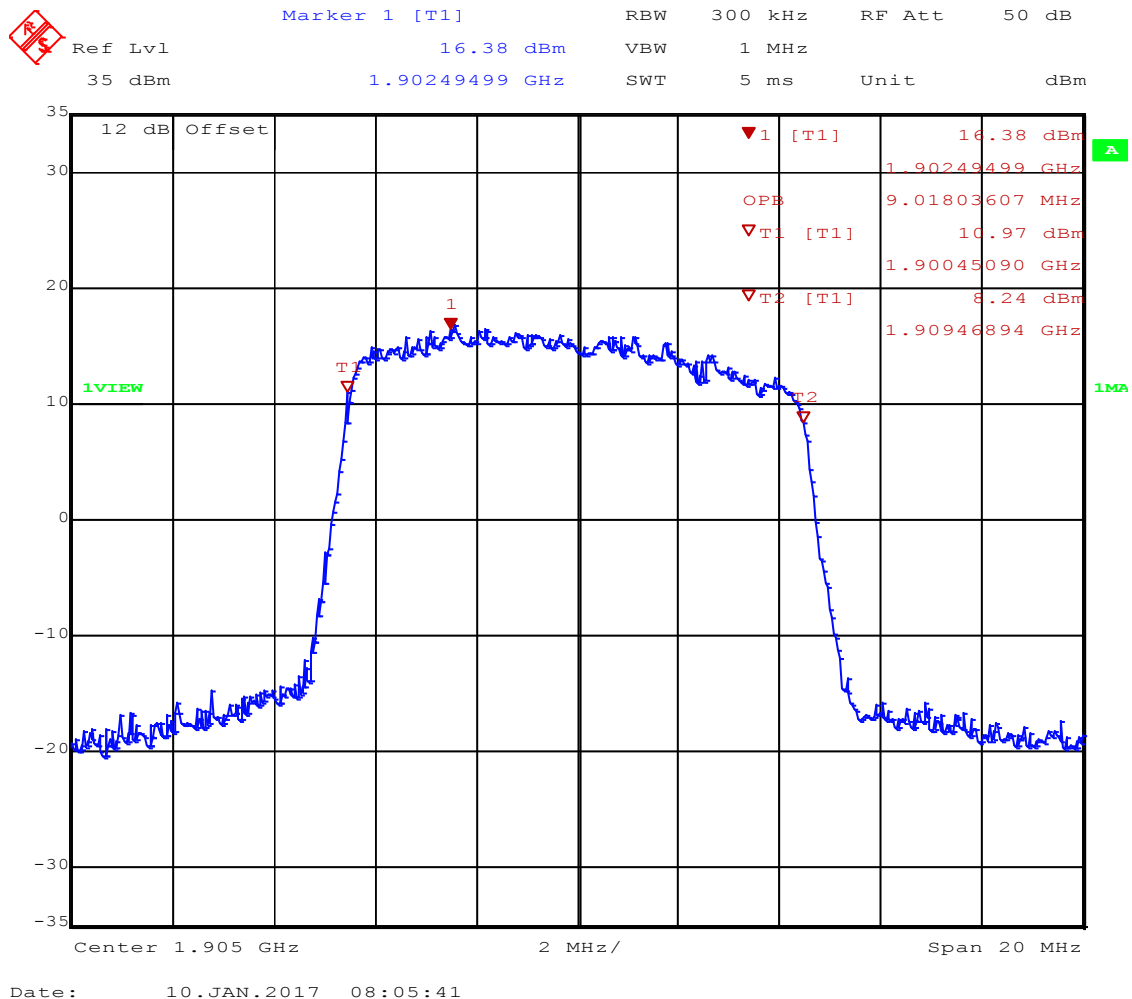

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW15 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18675 / BW: 15MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 13.587 MHz

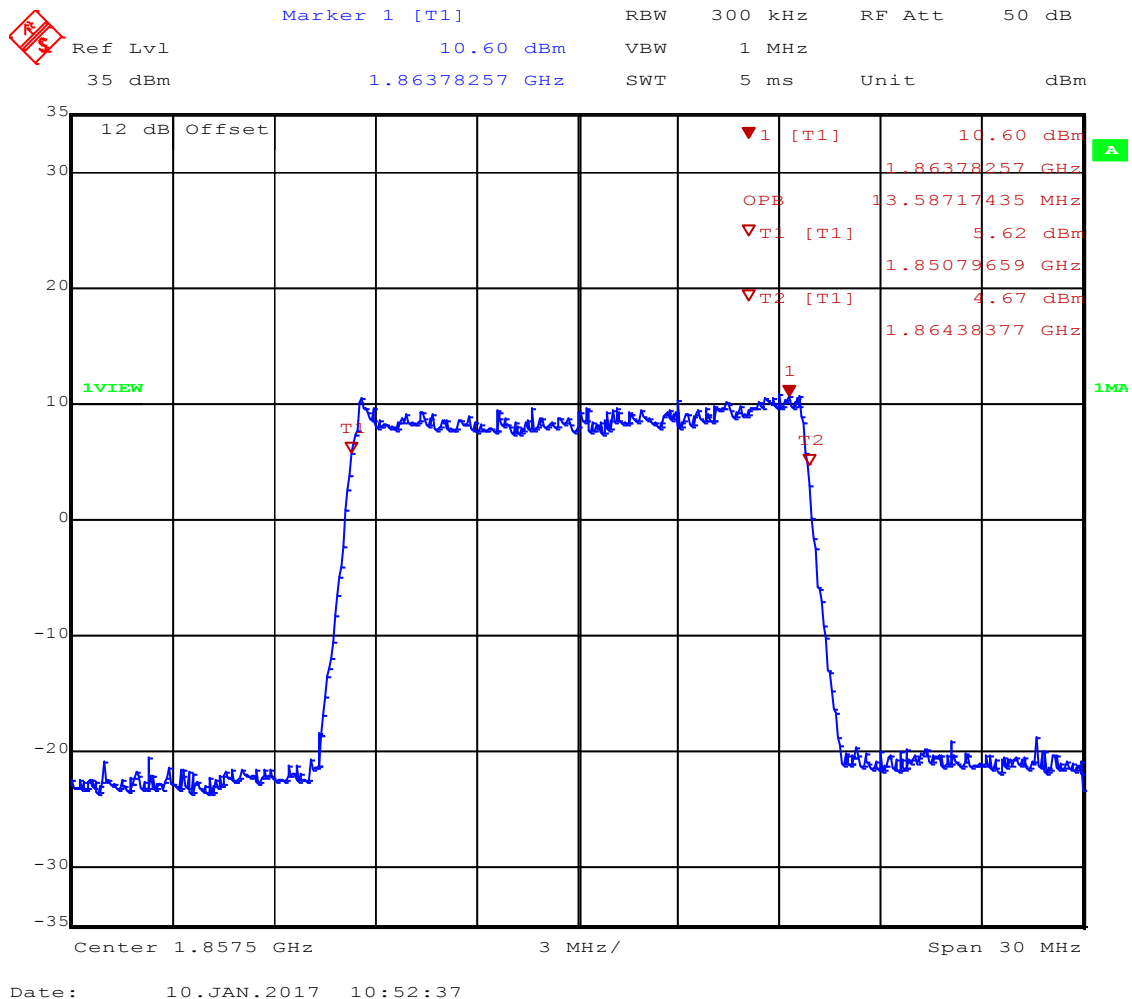

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW15 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18900 / BW: 15MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 13.587 MHz

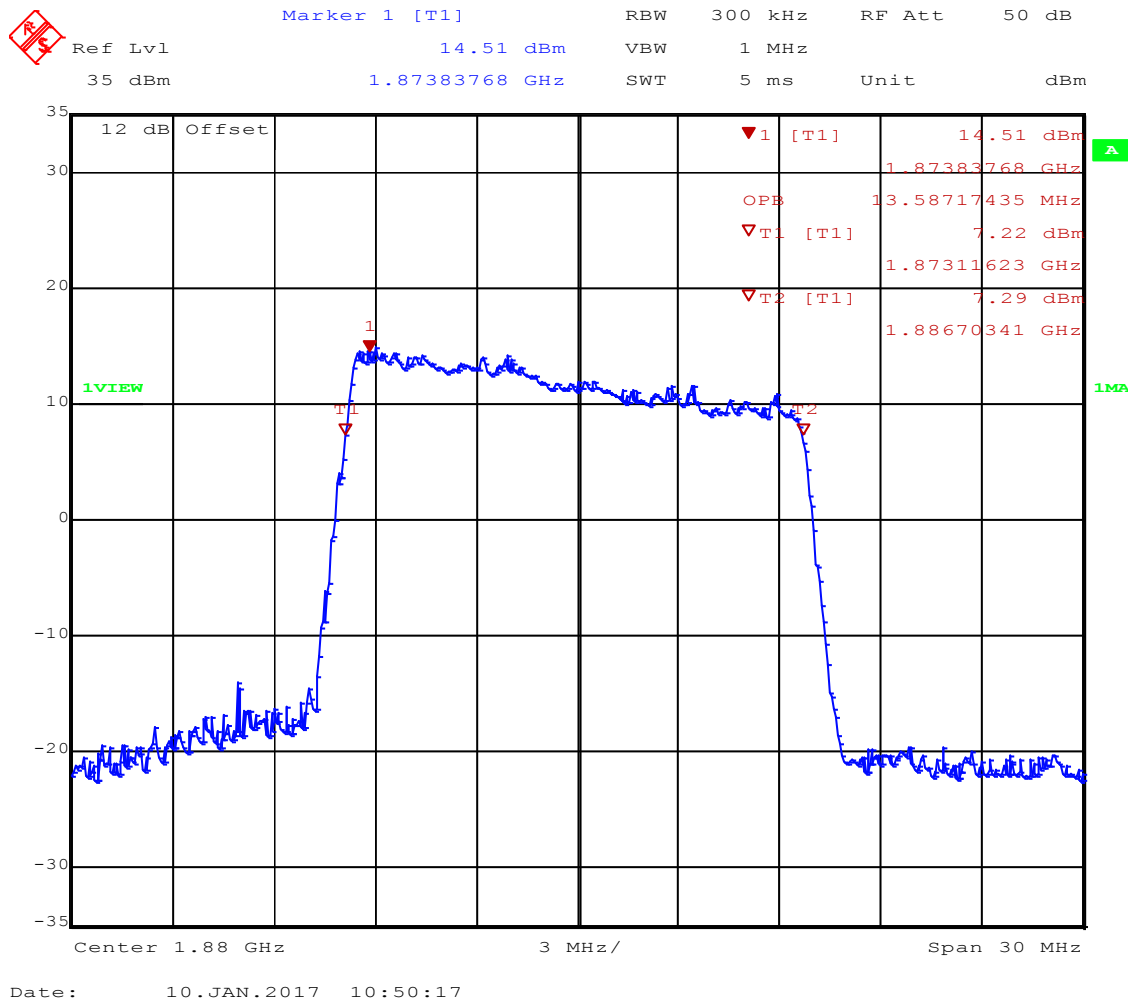


Occupied Bandwidth – LTE 2_QPSK-BW15 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 19125 / BW: 15MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 13.347 MHz

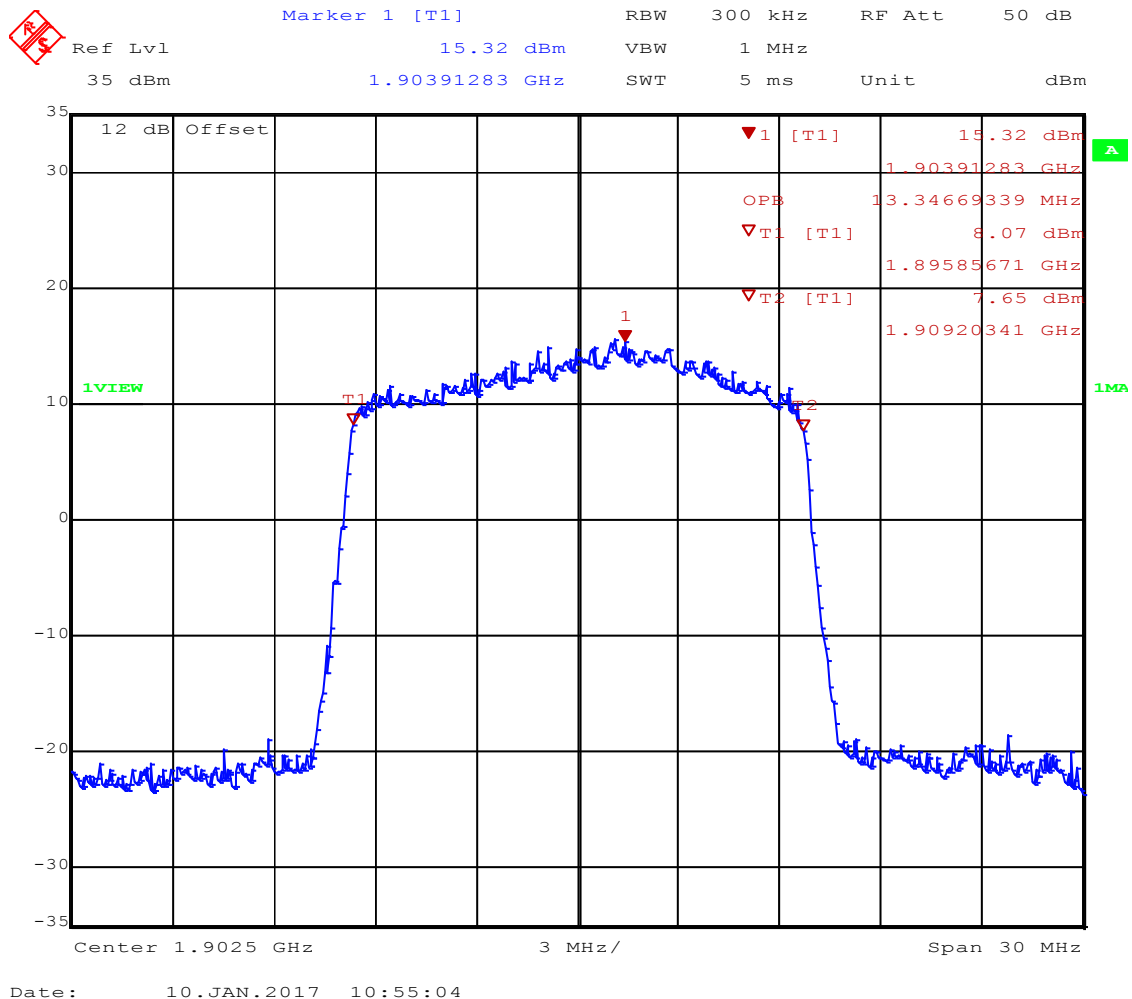

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW20 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18700 / BW: 20MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 18.116 MHz

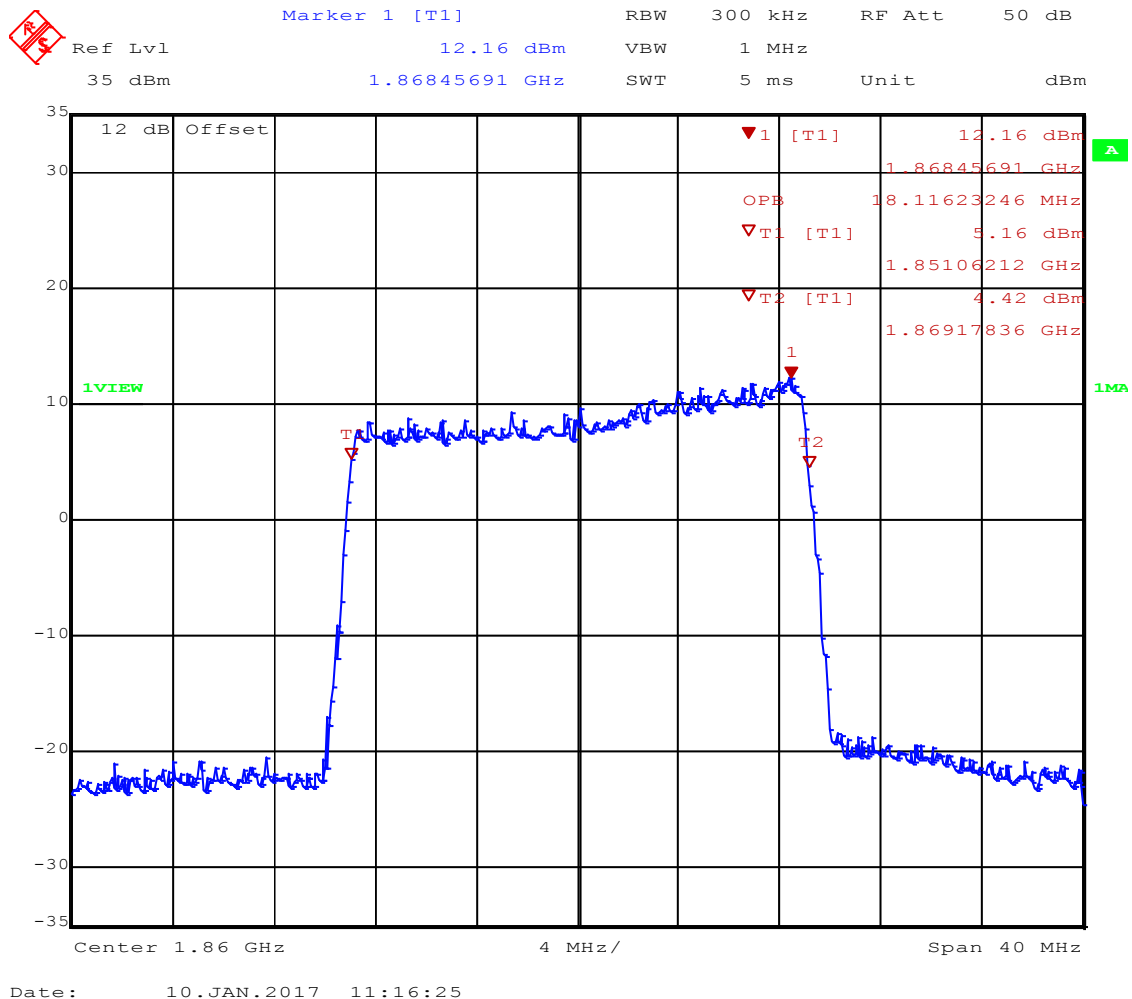

Test Report No.: GOM-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW20 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 18900 / BW: 20MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 17.876 MHz

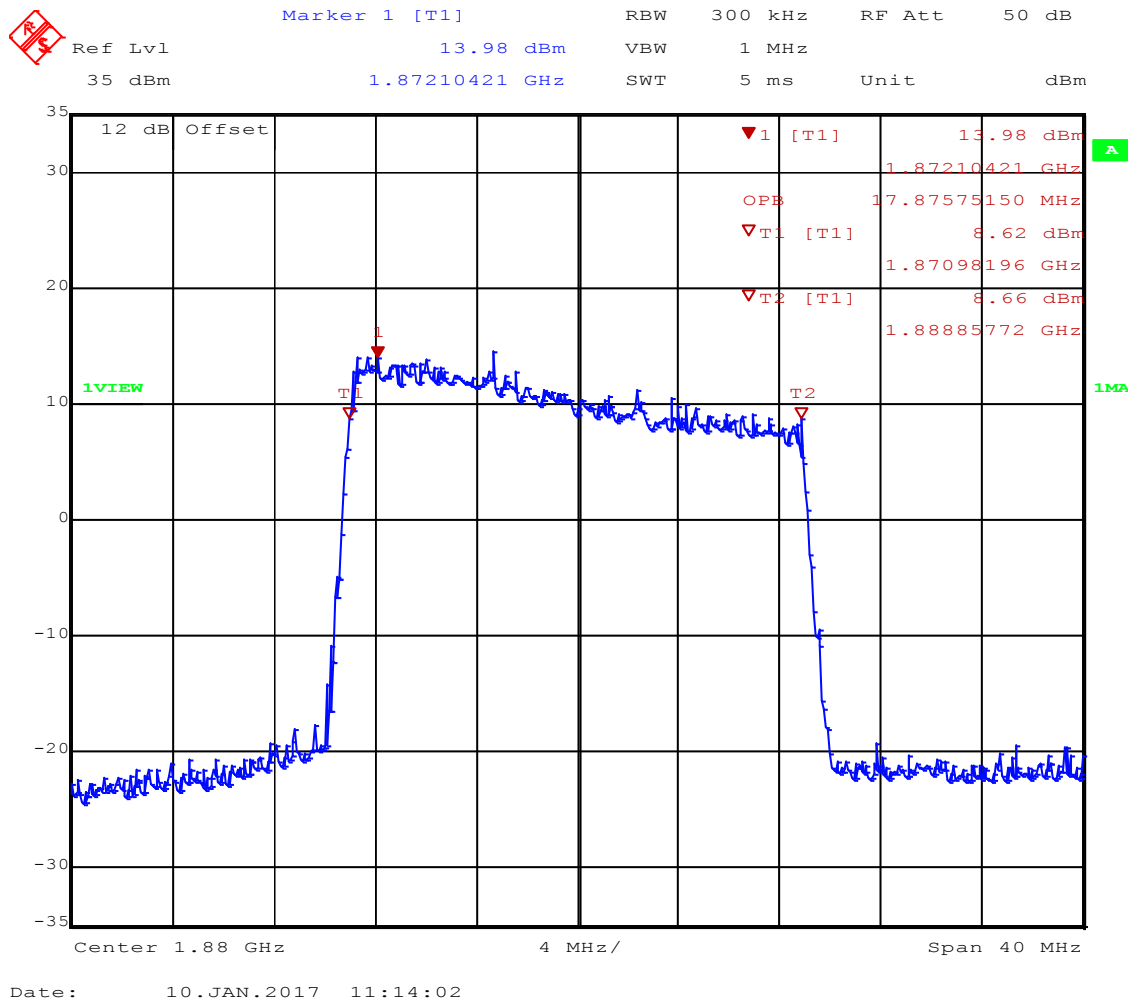

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – LTE 2_QPSK-BW20 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5773


Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS/LTE-Device
Model: FOX3-4G-NA
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: LTE FDD 2 / CH: 19100 / BW: 20MHz; QPSK
Test Date: 2017-01-10
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 17.796 MHz

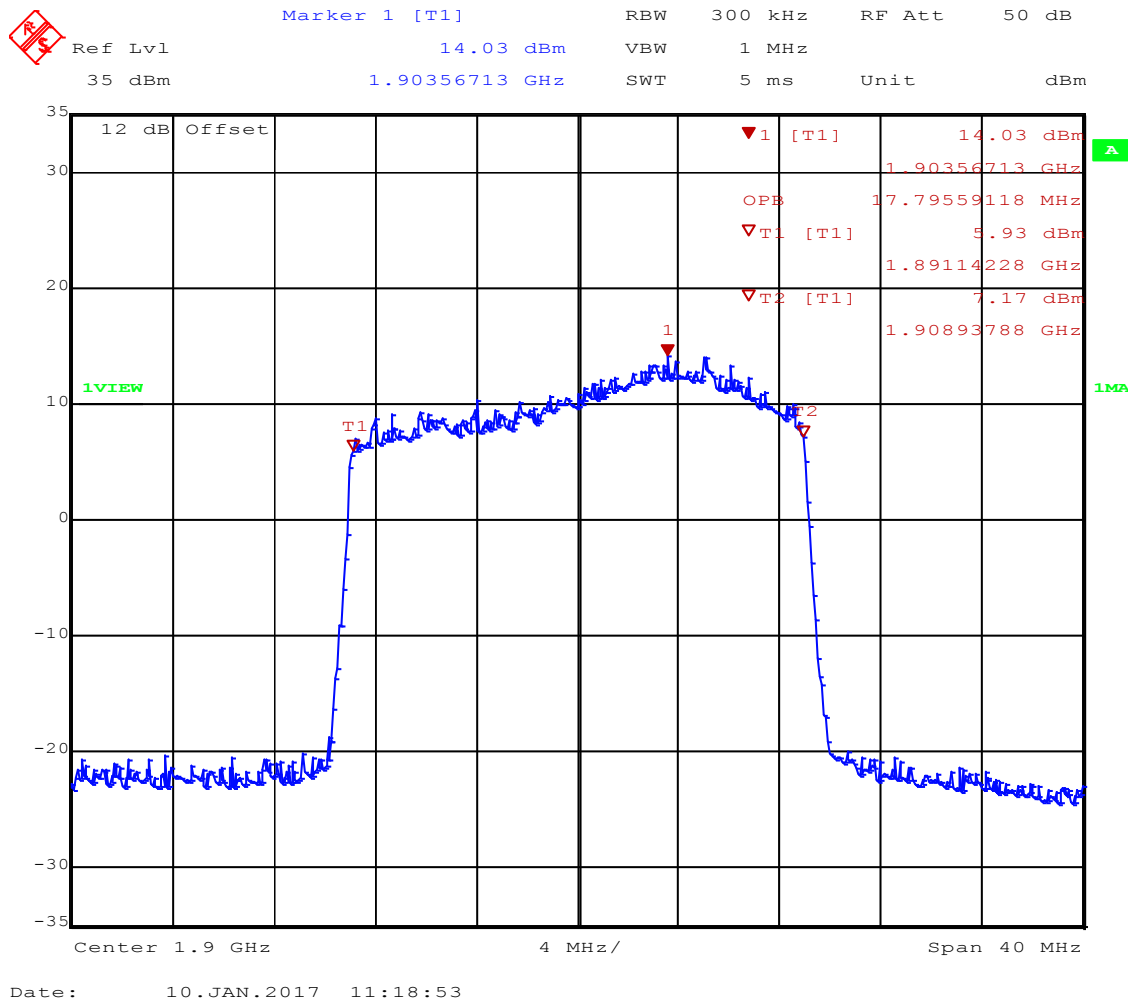

Test Report No.: G0M-1607-5773-TFC224UL-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.2 Test Conditions and Results – Effective radiated power / Equivalent isotropic radiated power

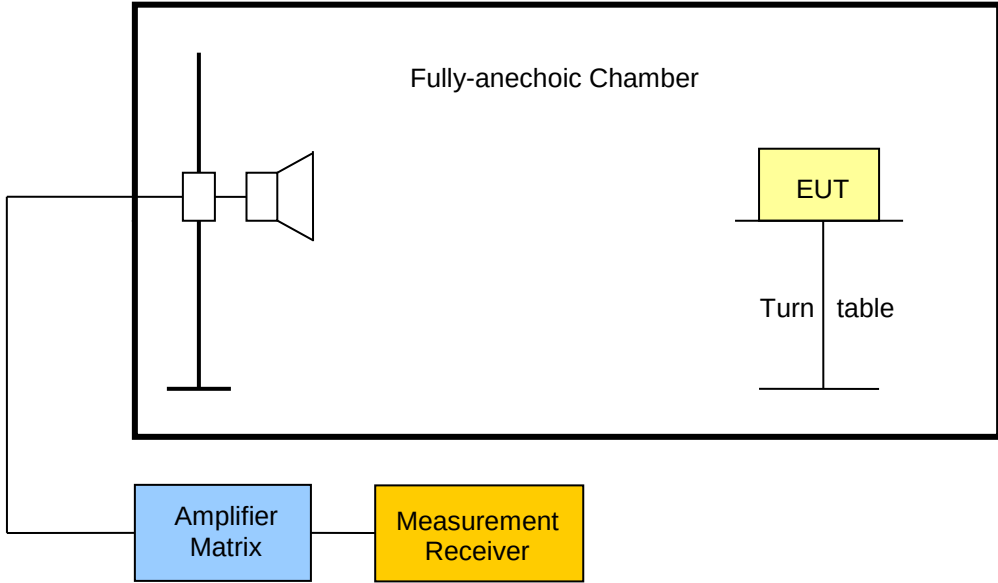Radiated power acc. to FCC 22H / FCC 24E / ISED RSS-132 / ISED RSS-133			Verdict: PASS
EUT requirement rule parts and clause	Reference		
	FCC § 22.913(a) / FCC § 24.232(c) ISED RSS-132 § 4.4 / ISED RSS-133 § 6.4		
Test according to measurement reference	Reference Method		
	FCC § 22.913(a) / FCC § 24.232(c) / ANSI/TIA-603-D ISED RSS-132 § 4.4 / ISED RSS-133 § 6.4 / ANSI C63.26-2015 5.2		
Test frequency range	Tested frequencies		
	$F_{\text{LOW}} / F_{\text{MID}} / F_{\text{HIGH}}$		
Limits			
Carrier Frequency range	Equipment type	Power limit	
824-849 MHz	Mobile transmitter	FCC : 7 Watts (38.45 dBm) e.i.r.p. IC : 11.5 Watts (40.60 dBm) e.i.r.p.	
1850-1910 MHz	Mobile transmitter	FCC : 2 Watts (33 dBm) e.i.r.p. IC : 2 Watts (33 dBm) e.i.r.p.	
Test setup			
			
Test procedure			
1. EUT set to test mode 2. The radiated power is measured with a measurement antenna in vertical polarization 3. To obtain maximum level the EUT is rotated 4. The EUT is replaced with a half-wave dipole and the power to the dipole is adjusted to obtain same radiated power measurement value			

Test results – GSM850 E.R.P.							
Channel	Frequency [MHz]	Mode	Pol.	Power [dBm e.r.p]	Limit [dBm e.r.p]	Margin [dB]	Result
F _{LOW}	826.6	FDD - CS	Hor	22.1	38.45	-16.35	PASS
F _{MID}	835.0	FDD - CS	Hor	21.5	38.45	-16.95	PASS
F _{HIGH}	846.4	FDD - CS	Hor	22.4	38.45	-16.05	PASS
F _{LOW}	829.0	QPSK BW 10	Hor	21.2	38.45	-17.25	PASS
F _{MID}	836.5	QPSK BW 10	Hor	23.4	38.45	-15.05	PASS
F _{HIGH}	844.0	QPSK BW 10	Hor	24.9	38.45	-14.45	PASS
Test results – GSM850 E.I.R.P.							
Channel	Frequency [MHz]	Mode	Pol.	Power [dBm e.i.r.p]	Limit [dBm e.i.r.p]	Margin [dB]	Result
F _{LOW}	826.6	FDD - CS	Hor	24.25	40.6	-16.35	PASS
F _{MID}	835.0	FDD - CS	Hor	23.65	40.6	-16.95	PASS
F _{HIGH}	846.4	FDD - CS	Hor	24.55	40.6	-16.05	PASS
F _{LOW}	829.0	QPSK BW 10	Hor	23.35	40.6	-17.25	PASS
F _{MID}	836.5	QPSK BW 10	Hor	25.65	40.6	-15.05	PASS
F _{HIGH}	844.0	QPSK BW 10	Hor	27.15	40.6	-14.45	PASS
Test results – GSM1900 E.I.R.P.							
Channel	Frequency [MHz]	Mode	Pol.	Power [dBm e.i.r.p]	Limit [dBm e.i.r.p]	Margin [dB]	Result
F _{LOW}	1852.6	FDD - CS	Hor	15.3	33	-17.7	PASS
F _{MID}	1880.0	FDD - CS	Hor	17.4	33	-15.6	PASS
F _{HIGH}	1907.4	FDD - CS	Hor	15.5	33	-17.5	PASS
F _{LOW}	1855.0	QPSK BW 10	Hor	15.3	33	-17.7	PASS
F _{MID}	1880.0	QPSK BW 10	Hor	17.8	33	-15.2	PASS
F _{HIGH}	1905.0	QPSK BW 10	Hor	16.6	33	-16.4	PASS
Comments:							

3.3 Test Conditions and Results – Transmitter radiated emissions

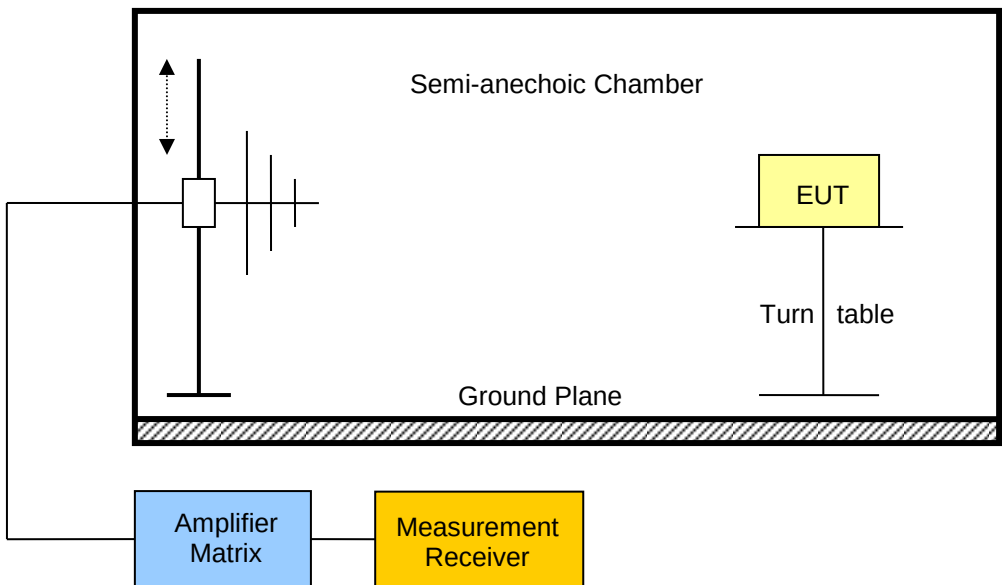Transmitter radiated power acc. to FCC 22H / FCC 24E / ISED RSS-132 / ISED RSS-133		Verdict: PASS
Test according referenced standards	Reference Method	
	FCC § 22.917(a) / FCC § 24.238(a) ISED RSS-132 § 4.5 / ISED RSS-133 § 6.5	
Test according to measurement reference	Reference Method	
	ANSI/TIA-603-D / ANSI C63.26-2015 5.5	
Test frequency range	Tested frequencies	
	30 MHz – 10 th Harmonic	
Limits		
Carrier Frequency range	Limit	
824-849 MHz	Attenuation below transmitter power ≥ 43 + 10 · log ₁₀ (P) [dB] = -13 dBm	
1850-1910 MHz	Attenuation below transmitter power ≥ 43 + 10 · log ₁₀ (P) [dB] = -13 dBm	
Test setup		
		
Test procedure		
1. EUT set to test mode 2. Maximum emission level is measured by rotating the EUT and adjusting the antenna height for vertical polarization 3. The EUT is replaced by a substitution antenna and generator 4. The power level is set to obtain the same power reading 5. Measurement is repeated for horizontal polarization		

Test results – W-CDMA FDD V							
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbm]	Pol.	Limit [dBm]	Margin [dB]
F _{LOW}	826.6	FDD - CS	845	-28	Hor	-13	-15
F _{MID}	835.0	FDD - CS	950	-25	Ver	-13	-12
F _{HIGH}	846.4	FDD - CS	895	-25	Ver	-13	-12
Comments:							

Test results – LTE 5							
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbm]	Pol.	Limit [dBm]	Margin [dB]
F _{LOW}	829.0	QPSK BW 10	845	-28	Hor	-13	-15
F _{MID}	836.5	QPSK BW 10	950	-26	Ver	-13	-13
F _{HIGH}	844.0	QPSK BW 10	930	-27	Hor	-13	-14
Comments:							

Test results – W-CDMA FDD II							
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbm]	Pol.	Limit [dBm]	Margin [dB]
F _{LOW}	1852.6	FDD - CS	705	-27	Ver	-13	-14
F _{MID}	1880	FDD - CS	950	-26	Hor	-13	-13
F _{HIGH}	1907.4	FDD - CS	895	-25	Hor	-13	-12
Comments:							

Test results – LTE II							
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbm]	Pol.	Limit [dBm]	Margin [dB]
F _{LOW}	1855.0	QPSK BW 10	880	-26	Ver	-13	-13
F _{MID}	1880.0	QPSK BW 10	950	-27	Hor	-13	-14
F _{HIGH}	1905.0	QPSK BW 10	895	-27	Hor	-13	-14
Comments:							

3.4 Test Conditions and Results – Receiver radiated emissions

Receiver radiated emissions acc. to ISED RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	ISED RSS-132 5.6 / 133 6.6			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	30 MHz – 5 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [μV/m]	Limit [dBμV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
<				

Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1MHz with peak/average detector is used above 1GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dBμV/m]	Emission Level [μV/m]	Det.	Limit [μV/m]	Margin [μV/m]
F _{MID}			**				
Comments: * Physical distance between EUT and measurement antenna. ** Emission level corresponds to ambient noise floor							