



**Nemko USA, Inc**  
11696 Sorrento Valley Rd., Suite F  
San Diego, CA 92121-1024

---

**EMC TEST REPORT**

**Kyocera Wireless Corp.**

**Tri-Mode Cellular Phone with Bluetooth capabilities**

Model: **KX21-2X0 Storm**

RADIATED EMISSIONS

FCC, PART 2.1053

FCC, PART 22 SUBPART H

FCC, PART 24 SUBPART E

INDUSTRY CANADA, RSS-129

INDUSTRY CANADA, RSS-133

TEST REPORT # 2006 01032 KX21-2X0 22/24

26-032-KYO

NEMKO USA, INC.  
11696 SORRENTO VALLEY ROAD SUITE F  
SAN DIEGO, CA 92121  
PHONE: 858-755-5525

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	2 of 28

## TABLE OF CONTENTS

1. DESCRIPTION OF TESTING METHODS.....	7
2 TEST RESULTS .....	13

## TEST SETUP DIAGRAMS

FIGURE 1. GENERAL EUT TEST SETUP PICTURE .....	9
FIGURE 2. RADIATED EMISSIONS TEST SETUP DIAGRAM.....	11
FIGURE 3. SUBSTITUTION METHOD TEST SETUP DIAGRAM .....	12

## TEST CONFIGURATION PHOTOGRAPHS

PHOTOGRAPH 1. KX21-2X0 STORM , TRI MODE MOBILE CELLULAR PHONE .....	8
PHOTOGRAPH 2. FCC, PART 22/24 RADIATED EMISSIONS TEST CONFIGURATION .....	22
PHOTOGRAPH 3. FCC, PART 22/24 RADIATED EMISSIONS TEST CONFIGURATION .....	23
PHOTOGRAPH 4. FCC, PART 22/24 RADIATED EMISSIONS TEST CONFIGURATION .....	24

## APPENDICES

A. RADIATED EMISSIONS MEASUREMENT UNCERTAINTIES .....	25
B. NEMKO USA, INC.'S TEST EQUIPMENT & FACILITIES CALIBRATION PROGRAM.....	27

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	3 of 28

**EMC Test Report**  
**For**  
**Kyocera Wireless Corp.**

Test Number : 26-032-KYO

Product Name : Tri-Mode Cellular Phone with Bluetooth capabilities

Regulation : FCC, Part 22, Subpart H, Part 24, Subpart E  
: Industry Canada, RSS-129, RSS-133

Date : JANUARY 25, 2006

Report Reviewed

Accepted by:

\_\_\_\_\_  
**Kyocera Wireless Corp.**  
**10300 Campus Point Drive**  
**San Diego, CA 92121**  
Phone: **858-882-3585**  
Fax: **858-882-1739**

Report Issued By: *F. R. Fluery*

F. R. Fluery, Frontline Manager

Tested By:

*Mike Krumweide*  
Mike Krumweide, EMC Test Engineer

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	4 of 28

## Administrative Data

Regulation : FCC, Part 22, Subpart H, Part 24, Subpart E  
: Industry Canada, RSS-129, RSS-133

Test Method : ANSI C63.4 – 2003  
: CSA C108. - M1983  
: TIA/EIA 603B

Test Type : Certification  
Manufacturer : Kyocera Wireless Corp.  
EUT Type/:Model # : Tri-Mode Cellular Phone with Bluetooth capabilities/ KX21-2X0 Storm  
Date(s) of Test : January 23 to January 24, 2006  
Customer Personnel : Thuy To, Regulatory Engineer

Nemko Personnel : Mike Krumweide, EMC Test Engineer  
:

Test Location : OPEN Area Test Site  
Nemko USA, Inc.  
11696 Sorrento Valley Road, Suite F  
San Diego, CA 92121

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	5 of 28

## EUT Description

The KX21-2X0 Storm is a Tri-Mode Cellular Phone with Bluetooth capabilities. Its function is to provide communication for mobile phone users. The EUT was exercised in CDMA Transmit and Receive, FM Transmit and Receive, and PCS Transmit and Receive for radiated emissions.

DEVICE	MANUFACTURER	POWER CABLE
	MODEL # SERIAL #	
EUT - Tri-Mode Cellular Phone with Bluetooth capabilities	Kyocera Wireless Corp. Model: <b>KX21-2X0 Storm</b> SN: AUDX----1CY7XR	N/A

CONNECTION	I/O CABLE
No connections	

### REASON FOR TEST

The EUT was tested to qualify for FCC Part 22 and Part 24, RSS-129 and RSS-133.

### CHANGES MADE DURING TEST

The following design modifications were made to the EUT during testing.

No design modifications were made to the EUT during testing.

### DEVIATIONS FROM STANDARD TEST METHOD

-- None

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	6 of 28

CERTIFICATION AND TEST SUMMARY

<i>Test Type</i>	<i>In Accordance with Document</i>	<i>Frequency Range Investigated</i>	<i>EUT Complies</i>
Radiated Spurious Emissions	FCC, Part 22, Subpart H, Part 24, Subpart E Industry Canada, RSS-129, RSS-133	824 – 19990 MHz	PASS

The **Tri-Mode Cellular Phone with Bluetooth capabilities** complied with FCC Part 15.109, Part 15.209, Part 22 and Part 24; Industry Canada, RSS129 and RSS-133 when tested in the system configuration defined herein.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	7 of 28

## DESCRIPTION OF TEST SITE AND EQUIPMENT

### Description of Test Site

The test site is located at 11696 Sorrento Valley Road, Suite F, San Diego, CA 92121. The site is physically located 18 miles Northwest of downtown San Diego. The general area is a valley 1.5 miles east of the Pacific Ocean. This particular part of the valley tends to minimize ambient levels, i.e. radio and TV broadcast stations and land mobile communications. The three and ten-meter Open Area Test Site (OATS) is located behind the office/lab building. It conforms to the normalized site attenuation limits and construction specifications as set in the EN 55022 (1998), CISPR 16 (2000) and 22 (1997) and ANSI C63.4 (2003) documents. The OATS normalized site attenuation characteristics are verified for compliance every year. The facility is NAVLAP accredited.

## 1. DESCRIPTION OF TESTING METHODS

### 1.1. Introduction

As required in 47 CFR, Parts 2 and 15, the methods employed to test the radiated and conducted emissions (as applicable) of the EUT are those contained within the American National Standards Institute document ANSI C63.4 (2003), titled "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz." All applicable FCC Rule Sections that provide further guidance for performance of such testing are also observed.

For General Test Configuration please refer to Figure 1 on the following page.

Digital devices sold in Canada are required to comply with the Interference Causing Equipment Standard for Digital Apparatus, ICES-003. These test methods and limits are specified in the Canadian Standards Association's (CSA) Standard C108.8-M1983 (1-1-94 version) and are "essentially equivalent" with FCC, Part 15 and CISPR 22 (EN55022) rules for unintentional radiators per EMCAB-3, Issue 3 (May 1998). No further testing is required for compliance to ICES-003.

<i>Nemko USA, Inc.</i>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	8 of 28

**Photograph 1. KX21-2X0 Storm , Tri Mode Mobile Cellular Phone**





<b><i>Nemko USA, Inc.</i></b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	9 of 28

**Figure 1. General EUT Test Setup Picture**



### **CONFIGURATION LEGEND**

1. EUT: Tri-Mode Cellular Phone with Bluetooth capabilities
2. 80cm Non-Conductive Support Table

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	10 of 28

## 1.2. Configuration and Methods of Measurements for Radiated Emissions

Section 8 of ANSI C63.4 determines the general configuration and procedures for measuring the radiated emissions of equipment under test. Initially, the primary emission frequencies are identified inside the test lab by positioning a broadband receive antenna one meter from the EUT to locate frequencies of significant radiation. Next, the EUT and associated system are placed on a turntable on a ten meter open area test site (registered with the FCC in accord with its Rules and ANSI C63.4) and the receive antenna is located at a distance of three meters from the EUT.

The EUT and associated system are configured to operate continuously, representing a “normally operating” mode. All significant radiated emissions are recorded when maximum radiation on each frequency is observed, in accordance with part 8 of ANSI C63.4 and Section 15.33 of the FCC Rules. To ensure that the maximum emission at each discrete frequency of interest is observed, the receive antenna is varied in height from one to four meters and rotated to horizontal and vertical polarities, and the turntable is also rotated to determine the worst emitting configuration. The numerical results of the test are included herein to demonstrate compliance.

The numerical results that are applied to the emissions limits are arrived at by the following method:

Example:  $A = RR + CL + AF$

A = Amplitude dBuV/M

RR = Receiver Reading dBuV

CL = cable loss dB

AF = antenna factor dBm-1

Example Frequency = 110MHz

18.5 dBuV (spectrum analyzer reading)

+3.0 dB (cable loss @ frequency)

21.5 dBuV

+15.4 dBm-1 (antenna factor @ frequency)


36.9 dBuV/M Final adjusted value

The final adjusted value is then compared to the appropriate emission limit to determine compliance.

For Radiated Emissions Test Configuration please refer to Figure 4 on the following page.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	11 of 28

**Figure 2. Radiated Emissions Test Setup Diagram**

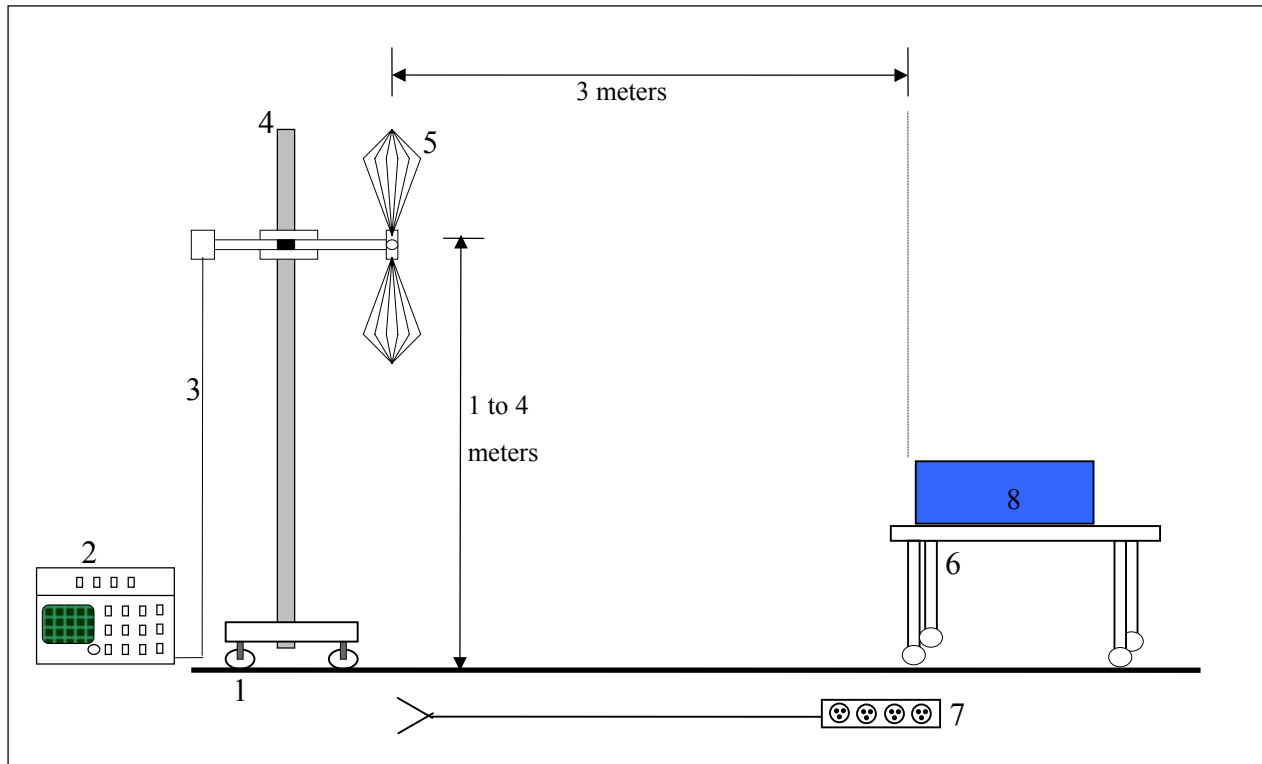

*NOT TO SCALE*


### CONFIGURATION LEGEND

1. Ground plane (11 X 17 meters)
2. Spectrum Analyzer with Quasi-Peak Adapter
3. Coax interconnect from Receive Antenna to Spectrum Analyzer
4. Antenna Mast with motorized mounting assembly
5. Receive Antenna (basic relative position)
6. Non-Conducting table 80 cm above ground plane
7. AC power for devices
8. EUT: **Tri-Mode Cellular Phone with Bluetooth capabilities**

Radiated emissions were measured on three orthogonal axes. Only the maximum emissions of the three axes are stated in this report. Test setup pictures of these axes are found further in this report.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	12 of 28

Figure 3. Substitution Method Test Setup Diagram

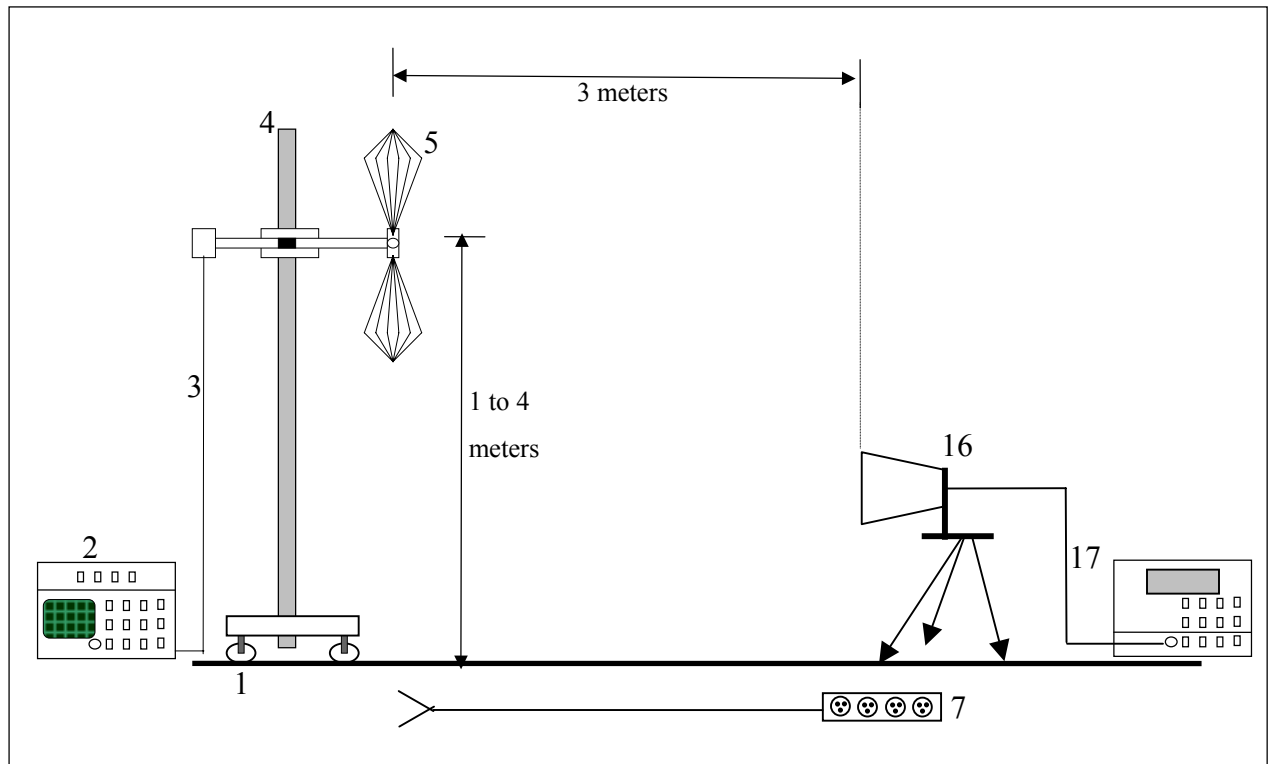

NOT TO SCALE

### CONFIGURATION LEGEND

- 9. Ground plane (11 X 17 meters)
- 10. Spectrum Analyzer with Quasi-Peak Adapter
- 11. Coax interconnect from Receive Antenna to Spectrum Analyzer
- 12. Antenna Mast with motorized mounting assembly
- 13. Receive Antenna (basic relative position)
- 14. Non-Conducting table 80 cm above ground plane
- 15. AC power for devices
- 16. Radiating Horn Antenna
- 17. Signal Generator

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	13 of 28

## 2 Test Results

### 2.1 Radiated Emissions Test Data

FCC Part 2, 22 & 24 Emissions Substitution

- 1) Methodology Used: TIA/EIA603 (see attached excerpt).
- 2) The Substitution Method is used for fundamental power levels and spurious emissions when RF emission signals are measured within 20 dB of the limit.
- 3) Formula Used to calculate the values:
  - a) Measured value + antenna factor + cable loss - preamplifier = Max Level
  - b) Margin = Max level - Limit
  - c) Signal Generator power level - cable loss + antenna gain = ERP Part 22 or EIRP Part 24
  - d) Substituted Margin = ERP (or EIRP) - Limit

*Note: gain for dipole = 0; antenna factor is not the same as antenna gain*

Note: The signal generator power level is the power required when transmitting into the substituting antenna to duplicate the Measured Value. Substituted margin is reported in 731 forms pertaining to certification grants and Class II Permissive Changes when a direct conducted power reading cannot be performed.

Note: Per FCC Part 2:1051 the FCC does not require reporting of Spurious Emissions when they are more than 20dB below the permissible limit, therefore no signal substitution measurements will be performed on these signals.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	14 of 28

### Radiated Emissions Data

Job # : 26-032-KYO      Test # : 1  
Page 1      of 1

Client Name :	Kyocera-Wireless		
EUT Name :	Cellular Phone		
EUT Model # :	KX21-2X0		
EUT Serial # :	AUDX----1CY7XR		
EUT Config. :	FM TX Harmonics		
	Open		
Specification :	FCC Part 22		
Rod. Ant. #:		Temp. (°C) :	19
Bicon Ant. #:		Humidity (%) :	17
Log Ant. #:		EUT Voltage :	NA
DRG Ant. #	529	EUT Frequency :	NA
Dipole Ant. #:		Phase:	NA
Cable#:	40ft	Location:	RN # 329550-01
Preamp#:	842	Distance:	3m
Spec An. #:	835	ERP conversion factor	7

Reference :  
Date : 01/23/06  
Staff : Mike Krumweide  
Peak Bandwidth: 1 MHz  
Video Bandwidth: 1 MHz

Meas. Freq. (MHz)	Vertical (dBuV) pk	Horizontal (dBuV) pk	CF (db)	Max Level (dBm) pk	Spec. Limit (ERP) (dBm) pk	Margin dB pk	EUT Rotation	Ant. Height	Pass Fail Unc.	Comment
										Maximum of 3 Axes
1648.08	75.2	77.0	-20.9	-41.2	-13.0	-28.2		1.5	Pass	*
2472.12	68.3	67.0	-16.2	-45.2	-13.0	-32.2		1.0	Pass	*
3296.16	51.9	52.2	-9.8	-54.9	-13.0	-41.9		2.0	Pass	*
4120.20	51.5	52.0	-5.0	-50.2	-13.0	-37.2		2.0	Pass	*
4944.24	50.5	50.5	-5.4	-52.1	-13.0	-39.1			Pass	NF
5768.28	50.6	50.6	-0.8	-47.4	-13.0	-34.4			Pass	NF
6592.32	50.7	50.7	0.7	-45.9	-13.0	-32.9			Pass	NF
7416.36	48.5	48.5	3.3	-45.5	-13.0	-32.5			Pass	NF
8240.40	47.1	47.1	5.6	-44.6	-13.0	-31.6			Pass	NF
9064.44	45.6	45.6	9.8	-41.9	-13.0	-28.9			Pass	NF
1672.98	72.5	74.8	-20.9	-43.4	-13.0	-30.4		1.0	Pass	*
2509.47	71.3	63.3	-15.3	-41.3	-13.0	-28.3		1.0	Pass	*
3345.96	51.3	52.6	-9.8	-54.5	-13.0	-41.5		2.2	Pass	*
4182.45	50.5	51.2	-5.0	-51.0	-13.0	-38.0		1.6	Pass	*
5018.94	50.5	50.5	-1.6	-48.3	-13.0	-35.3			Pass	NF
5855.43	50.8	50.8	-0.8	-47.2	-13.0	-34.2			Pass	NF
6691.92	49.5	49.5	0.7	-47.1	-13.0	-34.1			Pass	NF
7528.41	47.6	47.6	4.5	-45.2	-13.0	-32.2			Pass	NF
8364.90	49.5	49.5	5.6	-42.2	-13.0	-29.2			Pass	NF
9201.39	46	46	9.8	-41.5	-13.0	-28.5			Pass	NF
1697.94	75.6	71.7	-20.9	-42.6	-13.0	-29.6		1.0	Pass	*
2546.91	70.1	71.8	-15.3	-40.8	-13.0	-27.8		1.2	Pass	*
3395.88	52.1	53.3	-9.8	-53.8	-13.0	-40.8		1.8	Pass	*
4244.85	49.7	50.4	-5.0	-51.8	-13.0	-38.8		1.0	Pass	*
5093.82	50.3	50.3	-1.6	-48.5	-13.0	-35.5			Pass	NF
5942.79	49.8	49.8	-0.8	-48.2	-13.0	-35.2			Pass	NF
6791.76	48.3	48.3	0.7	-48.3	-13.0	-35.3			Pass	NF
7640.73	47.4	47.4	4.5	-45.4	-13.0	-32.4			Pass	NF
8489.70	47.8	47.8	5.6	-43.9	-13.0	-30.9			Pass	NF
9338.67	46.2	46.2	9.8	-41.3	-13.0	-28.3			Pass	NF

\* = Signal Measured      NF = Noise Floor, no signal observed, even at lower RBW.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	15 of 28

### Radiated Emissions Data

Job # : 26-032-KYO      Test # : 2  
Page 1      of 1

Client Name :	Kyocera-Wireless		
EUT Name :	Cellular Phone		
EUT Model # :	KX21-2X0		
EUT Serial # :	AUDX----1CY7XR		
EUT Config. :	FM TX Harmonics		
	Closed		
Specification :	FCC Part 22		
Rod. Ant. #:		Temp. (°C) :	19
Bicon Ant. #:		Humidity (%) :	17
Log Ant. #:		EUT Voltage :	NA
DRG Ant. #	529	EUT Frequency :	NA
Dipole Ant. #:		Phase:	NA
Cable#:	40ft	Location:	RN # 329550-01
Preamp#:	842	Distance:	3m
Spec An. #:	835	ERP conversion factor	7

Reference :  
Date : 01/23/06  
Staff : Mike Krumweide  
Peak Bandwidth: 1 MHz  
Video Bandwidth 1 MHz

Meas. Freq. (MHz)	Vertical (dBuV) pk	Horizontal (dBuV) pk	CF (db)	Max Level (dBm) pk	Spec. Limit (ERP) (dBm) pk	Margin dB pk	EUT Rotation	Ant. Height	Pass Fail Unc.	Comment
Maximum of 3 Axes										
1648.08	75.3	74.6	-20.9	-42.9	-13.0	-29.9		1.0	Pass	*
2472.12	59.8	60.5	-16.2	-53.0	-13.0	-40.0		1.4	Pass	*
3296.16	51.5	52.3	-9.8	-54.8	-13.0	-41.8		1.4	Pass	*
4120.20	51.0	51.5	-5.0	-50.7	-13.0	-37.7		1.0	Pass	*
4944.24	50.5	50.5	-5.4	-52.1	-13.0	-39.1			Pass	NF
5768.28	50.6	50.6	-0.8	-47.4	-13.0	-34.4			Pass	NF
6592.32	50.7	50.7	0.7	-45.9	-13.0	-32.9			Pass	NF
7416.36	48.5	48.5	3.3	-45.5	-13.0	-32.5			Pass	NF
8240.40	47.1	47.1	5.6	-44.6	-13.0	-31.6			Pass	NF
9064.44	45.6	45.6	9.8	-41.9	-13.0	-28.9			Pass	NF
1672.98	72.5	72.0	-20.9	-45.7	-13.0	-32.7		1.0	Pass	*
2509.47	75.4	74.5	-15.3	-37.2	-13.0	-24.2		1.0	Pass	*
3345.96	52.0	51.8	-9.8	-55.1	-13.0	-42.1		1.0	Pass	*
4182.45	50.9	50.8	-5.0	-51.3	-13.0	-38.3		1.7	Pass	*
5018.94	50.5	50.5	-1.6	-48.3	-13.0	-35.3			Pass	NF
5855.43	50.8	50.8	-0.8	-47.2	-13.0	-34.2			Pass	NF
6691.92	49.5	49.5	0.7	-47.1	-13.0	-34.1			Pass	NF
7528.41	47.6	47.6	4.5	-45.2	-13.0	-32.2			Pass	NF
8364.90	49.5	49.5	5.6	-42.2	-13.0	-29.2			Pass	NF
9201.39	46	46	9.8	-41.5	-13.0	-28.5			Pass	NF
1697.94	67.8	71.2	-20.9	-47.0	-13.0	-34.0		1.0	Pass	*
2546.91	74.8	77.0	-15.3	-35.6	-13.0	-22.6		2.0	Pass	*
3395.88	53.0	53.9	-9.8	-53.2	-13.0	-40.2		1.0	Pass	*
4244.85	50.3	49.7	-5.0	-51.9	-13.0	-38.9		2.0	Pass	*
5093.82	50.3	50.3	-1.6	-48.5	-13.0	-35.5			Pass	NF
5942.79	49.8	49.8	-0.8	-48.2	-13.0	-35.2			Pass	NF
6791.76	48.3	48.3	0.7	-48.3	-13.0	-35.3			Pass	NF
7640.73	47.4	47.4	4.5	-45.4	-13.0	-32.4			Pass	NF
8489.70	47.8	47.8	5.6	-43.9	-13.0	-30.9			Pass	NF
9338.67	46.2	46.2	9.8	-41.3	-13.0	-28.3			Pass	NF

\* = Signal Measured      NF = Noise Floor, no signal observed, even at lower RBW.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	16 of 28

### Radiated Emissions Data

Job # : 26-032-KYO      Test # : 3  
Page 1      of 1

Client Name :	Kyocera-Wireless		
EUT Name :	Cellular Phone		
EUT Model # :	KX21-2X0		
EUT Serial # :	AUDX----1CY7XR		
EUT Config. :	CDMA TX Harmonics		
	Open		
Specification :	FCC Part 22		
Rod. Ant. #:		Temp. (°C) :	19
Bicon Ant. #:		Humidity (%) :	17
Log Ant. #:		EUT Voltage :	NA
DRG Ant. #	529	EUT Frequency :	NA
Dipole Ant. #:		Phase:	NA
Cable#:	40ft	Location:	RN # 329550-01
Preamp#:	842	Distance:	3m
Spec An. #:	835	ERP conversion factor	7

Reference :  
 Date : 01/24/06  
 Staff : Mike Krumweide  
 Peak Bandwidth: 1 MHz  
 Video Bandwidth 1 MHz

Meas. Freq. (MHz)	Vertical (dBuV) pk	Horizontal (dBuV) pk	CF (db)	Max Level (dBm) pk	Spec. Limit (ERP) (dBm) pk	Margin dB pk	EUT Rotation	Ant. Height	Pass Fail Unc.	Comment
1649.40	75.9	78.8	-20.94	-39.4	-13.0	-26.4		1.0	Pass	Maximum of 3 Axes
2474.10	82.7	83.3	-16.2	-30.2	-13.0	-17.2		2.2	Pass	*
3298.80	56.0	52.6	-9.841	-51.1	-13.0	-38.1		1.7	Pass	*
4123.50	56.2	56.8	-4.952	-45.4	-13.0	-32.4		2.0	Pass	*
4948.20	50.5	50.5	-5.352	-52.1	-13.0	-39.1			Pass	NF
5772.90	50.6	50.6	-0.771	-47.4	-13.0	-34.4			Pass	NF
6597.60	50.7	50.7	0.6822	-45.9	-13.0	-32.9			Pass	NF
7422.30	50.2	50.2	3.3067	-43.8	-13.0	-30.8			Pass	NF
8247.00	49	49	5.5678	-42.7	-13.0	-29.7			Pass	NF
9071.70	47.2	47.2	9.7989	-40.3	-13.0	-27.3			Pass	NF
1672.98	76.5	78.2	-20.94	-40.0	-13.0	-27.0		1.0	Pass	*
2509.47	82.6	83.9	-15.3	-28.7	-13.0	-15.7		3.0	Pass	*
3345.96	57.0	59.7	-9.841	-47.4	-13.0	-34.4		2.3	Pass	*
4182.45	61.3	64.1	-4.952	-38.1	-13.0	-25.1		1.0	Pass	*
5018.94	50.0	50.0	-1.571	-48.8	-13.0	-35.8			Pass	NF
5855.43	54.6	54.2	-0.771	-43.4	-13.0	-30.4		1.1	Pass	*
6691.92	49.5	49.5	0.6822	-47.1	-13.0	-34.1			Pass	NF
7528.41	49.7	49.7	4.5067	-43.1	-13.0	-30.1			Pass	NF
8364.90	47.9	47.9	5.5678	-43.8	-13.0	-30.8			Pass	NF
9201.39	46.2	46.2	9.7989	-41.3	-13.0	-28.3			Pass	NF
1696.62	75.6	74.5	-20.94	-42.6	-13.0	-29.6		1.0	Pass	*
2544.93	79.2	79.0	-15.3	-33.4	-13.0	-20.4		1.6	Pass	*
3393.24	53.7	52.5	-9.841	-53.4	-13.0	-40.4		2.2	Pass	*
4241.55	59.1	50.5	-4.952	-43.1	-13.0	-30.1		1.7	Pass	*
5089.86	50.3	50.3	-1.571	-48.5	-13.0	-35.5			Pass	NF
5938.17	49.8	49.8	-0.771	-48.2	-13.0	-35.2			Pass	NF
6786.48	48.3	48.3	0.6822	-48.3	-13.0	-35.3			Pass	NF
7634.79	47.7	47.7	4.5067	-45.1	-13.0	-32.1			Pass	NF
8483.10	47.4	47.4	5.5678	-44.3	-13.0	-31.3			Pass	NF
9331.41	46.9	46.9	9.7989	-40.6	-13.0	-27.6			Pass	NF

\* = Signal Measured      NF = Noise Floor, no signal observed, even at lower RBW.



<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	17 of 28

### Radiated Emissions Data

Job # : 26-032-KYO      Test # : 4  
Page 1      of 1

Client Name : Kyocera-Wireless  
EUT Name : Cellular Phone  
EUT Model # : KX21-2X0  
EUT Serial # : AUDX----1CY7XR  
EUT Config. : CDMA TX Harmonics  
Closed  
Specification : FCC Part 22  
Reference :  
Rod. Ant. # : \_\_\_\_\_ Temp. (°C) : 19 Date : 01/24/06  
Bicon Ant.#: \_\_\_\_\_ Humidity (%) : 17 Staff : Mike Krumweide  
Log Ant.#: \_\_\_\_\_ EUT Voltage : NA Peak Bandwidth: 1 MHz  
DRG Ant. # 529 EUT Frequency : NA Video Bandwidth 1 MHz  
Dipole Ant.#: \_\_\_\_\_ Phase: NA  
Cable#: 40ft Location: RN # 329550-01  
Preamp#: 842 Distance: 3m  
Spec An.#: 835 ERP conversion factor 7

Meas. Freq. (MHz)	Vertical (dBuV) pk	Horizontal (dBuV) pk	CF (db)	Max Level (dBm) pk	Spec. Limit (ERP) (dBm) pk	Margin dB pk	EUT Rotation	Ant. Height	Pass Fail Unc.	Comment
1649.40	75.3	74.0	-20.94	-42.9	-13.0	-29.9		1.0	Pass	Maximum of 3 Axes
2474.10	75.7	69.7	-16.2	-37.8	-13.0	-24.8		1.5	Pass	*
3298.80	51.8	52.4	-9.841	-54.7	-13.0	-41.7		1.3	Pass	*
4123.50	47.2	48.0	-4.952	-54.2	-13.0	-41.2		1.2	Pass	*
4948.20	50.5	50.5	-5.352	-52.1	-13.0	-39.1			Pass	NF
5772.90	50.6	50.6	-0.771	-47.4	-13.0	-34.4			Pass	NF
6597.60	50.7	50.7	0.6822	-45.9	-13.0	-32.9			Pass	NF
7422.30	50.2	50.2	3.3067	-43.8	-13.0	-30.8			Pass	NF
8247.00	49	49	5.5678	-42.7	-13.0	-29.7			Pass	NF
9071.70	47.2	47.2	9.7989	-40.3	-13.0	-27.3			Pass	NF
1672.98	76.2	74.8	-20.94	-42.0	-13.0	-29.0		1.1	Pass	*
2509.47	75.5	65.7	-15.3	-37.1	-13.0	-24.1		1.3	Pass	*
3345.96	51.0	51.0	-9.841	-56.1	-13.0	-43.1			Pass	NF
4182.45	50.5	50.5	-4.952	-51.7	-13.0	-38.7			Pass	NF
5018.94	50.0	50.0	-1.571	-48.8	-13.0	-35.8			Pass	NF
5855.43	50.8	50.8	-0.771	-47.2	-13.0	-34.2			Pass	NF
6691.92	49.5	49.5	0.6822	-47.1	-13.0	-34.1			Pass	NF
7528.41	49.7	49.7	4.5067	-43.1	-13.0	-30.1			Pass	NF
8364.90	47.9	47.9	5.5678	-43.8	-13.0	-30.8			Pass	NF
9201.39	46.2	46.2	9.7989	-41.3	-13.0	-28.3			Pass	
1696.62	72.5	72.4	-20.94	-45.7	-13.0	-32.7		1.1	Pass	*
2544.93	77.2	70.7	-15.3	-35.4	-13.0	-22.4		1.2	Pass	*
3393.24	52.5	52.7	-9.841	-54.4	-13.0	-41.4		1.2	Pass	*
4241.55	50.3	50.3	-4.952	-51.9	-13.0	-38.9			Pass	NF
5089.86	50.3	50.3	-1.571	-48.5	-13.0	-35.5			Pass	NF
5938.17	49.8	49.8	-0.771	-48.2	-13.0	-35.2			Pass	NF
6786.48	48.3	48.3	0.6822	-48.3	-13.0	-35.3			Pass	NF
7634.79	47.7	47.7	4.5067	-45.1	-13.0	-32.1			Pass	NF
8483.10	47.4	47.4	5.5678	-44.3	-13.0	-31.3			Pass	NF
9331.41	46.9	46.9	9.7989	-40.6	-13.0	-27.6			Pass	

\* = Signal Measured      NF = Noise Floor, no signal observed, even at lower RBW.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	18 of 28

### Radiated Emissions Data

Job #: 26-032-KYO Test #: 5  
Page 1 of 1

Client Name : Kyocera-Wireless  
EUT Name : Cellular Phone  
EUT Model #: KX21-2X0  
EUT Serial #: AUDX----1CY7XR  
EUT Config. : PCS TX Harmonics  
Open  
Specification : FCC Part 24 Reference : Date : 01/24/06  
Rod. Ant. #:            Temp. (°C) : 19 Staff : Mike Krumweide  
Bicon Ant. #:            Humidity (%) : 17 Peak Bandwidth: 1 MHz  
Log Ant. #:            EUT Voltage : NA Video Bandwidth 1 MHz  
DRG Ant. # 529 EUT Frequency : NA  
Dipole Ant. #:            Phase: NA  
Cable#: 40ft Location: RN # 329550-01  
Preamp#: 842 Distance: 3m  
Spec An. #: 835 EIRP conversion factor 5.5

Meas. Freq. (MHz)	Vertical (dBuV) pk	Horizontal (dBuV) pk	CF (db)	Max Level (dBm) pk	Spec. Limit (ERIP) (dBm) pk	Margin dB pk	EUT Rotation	Ant. Height	Pass Fail Unc.	Comment
										Maximum of 3 Axes
3702.50	61.2	61.2	-8.4	-42.5	-13.0	-29.5		1.4	Pass	*
5553.75	65.8	63.9	-0.8	-30.2	-13.0	-17.2		1.2	Pass	*
7405.00	50.2	50.2	3.3	-41.8	-13.0	-28.8			Pass	NF
9256.25	46.9	46.9	9.8	-38.6	-13.0	-25.6			Pass	NF
11107.50	45.4	45.4	14.6	-35.3	-13.0	-22.3			Pass	NF
12958.75	44.1	44.1	16.0	-35.1	-13.0	-22.1			Pass	NF
14810.00	41	41	21.2	-33.1	-13.0	-20.1			Pass	NF 500kHz RBW
16661.25	36.4	36.4	22.4	-36.5	-13.0	-23.5			Pass	NF 500kHz RBW
18512.50	22.6	22.6	37.8	-34.8	-13.0	-21.8			Pass	NF 30kHz RBW
20363.75	19.2	19.2	38.5	-39.5	-13.0	-26.5			Pass	NF 30kHz RBW
3760.00	58.4	59.3	-8.4	-44.4	-13.0	-31.4		2.2	Pass	*
5640.00	66.1	65.3	-0.8	-29.9	-13.0	-16.9		1.0	Pass	*
7520.00	49.6	49.6	4.5	-41.2	-13.0	-28.2			Pass	NF
9400.00	46.5	46.5	9.8	-39.0	-13.0	-26.0			Pass	NF
11280.00	45.3	45.3	14.6	-35.4	-13.0	-22.4			Pass	NF
13160.00	40.1	40.4	18.5	-36.4	-13.0	-23.4			Pass	NF 500kHz RBW
15040.00	39.9	39.9	20.4	-34.9	-13.0	-21.9			Pass	NF 500kHz RBW
16920.00	37.5	37.5	22.4	-35.4	-13.0	-22.4			Pass	NF 500kHz RBW
18800.00	22.4	22.4	37.9	-34.9	-13.0	-21.9			Pass	NF 30kHz RBW
20690	19	19	38.6	-39.6	-13.0	-26.6			Pass	NF 30kHz RBW
3817.50	58.7	62.6	-8.4	-41.1	-13.0	-28.1		2.3	Pass	*
5726.25	51.5	56.3	-0.8	-39.7	-13.0	-26.7		1.0	Pass	*
7635.00	47.7	47.7	4.5	-43.1	-13.0	-30.1			Pass	NF
9543.75	46.4	46.4	9.5	-39.4	-13.0	-26.4			Pass	NF
11452.50	46.3	46.3	14.6	-34.4	-13.0	-21.4			Pass	NF
13361.25	42.2	42.2	18.5	-34.6	-13.0	-21.6			Pass	NF 500kHz RBW
15270.00	36.9	36.9	20.4	-37.9	-13.0	-24.9			Pass	NF 500kHz RBW
17178.75	26.5	26.5	29.9	-38.9	-13.0	-25.9			Pass	NF 100kHz RBW
19087.50	20.7	20.7	38.0	-36.5	-13.0	-23.5			Pass	NF 30kHz RBW
20996.25	18.8	18.8	39.1	-37.3	-13.0	-24.3			Pass	NF 30kHz RBW

\* = Signal Measured NF = Noise Floor, no signal observed, even at lower RBW.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	19 of 28

### Radiated Emissions Data

Job # : 26-032-KYO      Test # : 6  
Page 1      of 1

Client Name : Kyocera-Wireless  
EUT Name : Cellular Phone  
EUT Model # : KX21-2X0  
EUT Serial # : AUDX----1CY7XR  
EUT Config. : PCS TX Harmonics  
Closed  
Specification : FCC Part 24  
Rod. Ant. # : \_\_\_\_\_ Temp. (°C) : 19  
Bicon Ant.#: \_\_\_\_\_ Humidity (%) : 17  
Log Ant.#: \_\_\_\_\_ EUT Voltage : NA  
DRG Ant. # 529 EUT Frequency : NA  
Dipole Ant.#: \_\_\_\_\_ Phase: NA  
Cable#: 40ft Location: RN # 329550-01  
Preamp#: 842 Distance: 3m  
Spec An.#: 835 EIRP conversion factor 5.5

Reference :  
Date : 01/24/06  
Staff : Mike Krumweide  
Peak Bandwidth: 1 MHz  
Video Bandwidth 1 MHz

Meas. Freq. (MHz)	Vertical (dBuV) pk	Horizontal (dBuV) pk	CF (db)	Max Level (dBm) pk	Spec. Limit (ERIP) (dBm) pk	Margin dB pk	EUT Rotation	Ant. Height	Pass Fail Unc.	Comment
										Maximum of 3 Axes
3702.50	58.9	60.3	-8.4	-43.4	-13.0	-30.4		2.3	Pass	*
5553.75	53.8	57.4	-0.8	-38.6	-13.0	-25.6		1.5	Pass	*
7405.00	50.2	50.2	3.3	-41.8	-13.0	-28.8			Pass	NF
9256.25	46.9	46.9	9.8	-38.6	-13.0	-25.6			Pass	NF
11107.50	45.4	45.4	14.6	-35.3	-13.0	-22.3			Pass	NF
12958.75	44.1	44.1	16.0	-35.1	-13.0	-22.1			Pass	NF
14810.00	41	41	21.2	-33.1	-13.0	-20.1			Pass	NF 500kHz RBW
16661.25	36.4	36.4	22.4	-36.5	-13.0	-23.5			Pass	NF 500kHz RBW
18512.50	22.6	22.6	37.8	-34.8	-13.0	-21.8			Pass	NF 30kHz RBW
20363.75	19.2	19.2	38.5	-39.5	-13.0	-26.5			Pass	NF 30kHz RBW
3760.00	58.3	59.7	-8.4	-44.0	-13.0	-31.0		1.2	Pass	*
5640.00	52.5	52.6	-0.8	-43.4	-13.0	-30.4		1.1	Pass	*
7520.00	49.6	49.6	4.5	-41.2	-13.0	-28.2			Pass	NF
9400.00	46.5	46.5	9.8	-39.0	-13.0	-26.0			Pass	NF
11280.00	45.3	45.3	14.6	-35.4	-13.0	-22.4			Pass	NF
13160.00	40.1	40.1	18.5	-36.7	-13.0	-23.7			Pass	NF 500kHz RBW
15040.00	39.9	39.9	20.4	-34.9	-13.0	-21.9			Pass	NF 500kHz RBW
16920.00	37.5	37.5	22.4	-35.4	-13.0	-22.4			Pass	NF 500kHz RBW
18800.00	22.4	22.4	37.9	-34.9	-13.0	-21.9			Pass	NF 30kHz RBW
20690	19	19	38.6	-39.6	-13.0	-26.6			Pass	NF 30kHz RBW
3817.50	60.0	62.4	-8.4	-41.3	-13.0	-28.3		2.1	Pass	*
5726.25	52.7	54.7	-0.8	-41.3	-13.0	-28.3		1.1	Pass	*
7635.00	47.7	47.7	4.5	-43.1	-13.0	-30.1			Pass	NF
9543.75	46.4	46.4	9.5	-39.4	-13.0	-26.4			Pass	NF
11452.50	46.3	46.3	14.6	-34.4	-13.0	-21.4			Pass	NF
13361.25	42.2	42.2	18.5	-34.6	-13.0	-21.6			Pass	NF 500kHz RBW
15270.00	36.9	36.9	20.4	-37.9	-13.0	-24.9			Pass	NF 500kHz RBW
17178.75	26.5	26.5	29.9	-38.9	-13.0	-25.9			Pass	NF 100kHz RBW
19087.50	20.7	20.7	38.0	-36.5	-13.0	-23.5			Pass	NF 30kHz RBW
20996.25	18.8	18.8	39.1	-37.3	-13.0	-24.3			Pass	NF 30kHz RBW

\* = Signal Measured      NF = Noise Floor, no signal observed, even at lower RBW.

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	20 of 28

## 2.2 Substitution Method Test Data

### Substitution Method For Radiated Emissions

Complete	<u>Yes</u>	Job # :	<u>26-032-KYO</u>	Test # :	<u>1</u>
Preliminary	<u>          </u>	Page	<u>1</u>	of	<u>1</u>
Client Name :	<u>KYOCERA WIRELESS Corp.</u>				
EUT Name :	<u>Tri-Mode Cellular Phone</u>				
EUT Model # :	<u>KX21-2X0</u>				
EUT Part # :	<u>                                </u>				
EUT Serial # :	<u>AUDX----1CY7XR</u>				
EUT Config. :	<u>Substitution Method</u>				
Specification :	<u>FCC Part 22 and 24</u>				
Rod. Ant. #:	<u>          </u>	Temp. (deg. C) :	<u>18</u>	Reference :	<u>                                </u>
Bicon Ant. #:	<u>          </u>	Humidity (%) :	<u>73</u>	Date :	<u>1/24/2006</u>
Log Ant. #:	<u>          </u>	EUT Voltage :	<u>NA</u>	Time :	<u>                                </u>
DRG Ant. #	<u>529</u>	EUT Frequency :	<u>NA</u>	Staff :	<u>M. Krumweide</u>
Dipole Ant. #:	<u>NA</u>	Phase:	<u>NA</u>	Photo ID:	<u>                                </u>
Cable#:	<u>40ft</u>	Location:	<u>RN# 329550-01</u>	Peak Bandwidth:	<u>RBW-1MHz, VBW-1MHz</u>
Preamp#:	<u>842</u>	Distance:	<u>3m</u>		<u>                                </u>
Spec An. #:	<u>NA</u>				
QP #:	<u>NA</u>				
PreSelect#:	<u>NA</u>				

Part 22 Substitution

Target Frequency mHz	Level dBuV/m	Horn Gain dBi	Cable loss dB	Signal Generator dBm	Total dBm	Spec dBm	Margin dBm	
2474.1	83.3	8.81	4.6	-41.4	-37.19	-13	-24.2	1 MHz
2509.47	83.9	8.88	4.7	-38.8	-34.62	-13	-21.6	1 MHz

Part 24 Substitution

Target Frequency mHz	Level dBuV/m	Horn Gain dBi	Cable loss dB	Signal Generator dBm	Total dBm	Spec dBm	Margin dBm	
5553.75	65.8	9.27	8.7	-36.50	-35.93	-13	-22.9	1 MHz
5640.00	66.1	9.29	9.1	-37.50	-37.31	-13	-24.3	1 MHz

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	21 of 28

## RADIATED EMISSIONS AND SUBSTITUTION METHOD

### TEST EQUIPMENT

Client	Kyocera-Wireless	EUT Name		Tri-Mode Cellular Phone with Bluetooth capabilities		
PAN #	26-032-KYO	EUT Model		KX21-2X0		
Device Type		Model #	Asset #	Used	Cal Done	Cal Due
Pre-Amplifier						
High-Frequency		Nemko	842	X	5/19/05	5/19/06
Antenna						
Antenna, Ridged Guide		3115	877	X	4/19/05	4/19/06
Antenna, Ridged Guide		3115	529	X	4/13/05	4/13/06
Spectrum Analyzer / Receiver						
Spectrum Analyzer, R&S		RHDFSEK	835	X	1/18/06	1/18/07
Signal Generator, Gigatronics		1018	440	X	12/9/05	12/9/06

<b><i>Nemko USA, Inc.</i></b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	22 of 28

## Photograph 2. FCC, Part 22/24 Radiated Emissions Test Configuration

EUT IN “VERTICAL” POSITION CLOSED and OPEN



<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	23 of 28

### Photograph 3. FCC, Part 22/24 Radiated Emissions Test Configuration

EUT IN "ON-SIDE" POSITION CLOSED and OPEN





<b><i>Nemko USA, Inc.</i></b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	24 of 28

## Photograph 4. FCC, Part 22/24 Radiated Emissions Test Configuration

EUT IN "FACE-UP" POSITION CLOSED and OPEN





<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	25 of 28

## APPENDIX A

### A. Radiated Emissions Measurement Uncertainties

#### 1. Introduction

ISO/IEC 17025:1999 and ANSI/NCSL Z540-1-1994 require that all measurements contained in a test report be “traceable”. “Traceability” is defined in the *International Vocabulary of Basic and General Terms in Metrology* (ISO: 1993) as: “the property of the result of a measurement... whereby it can be related to stated references, usually national or international standards, through an unbroken chain of comparisons, *all having stated uncertainties*”.

The purposes of this Appendix are to “state the *Measurement Uncertainties*” of the conducted emissions and radiated emissions measurements contained in Section 5 of this Test Report, and to provide a practical explanation of the meaning of these measurement uncertainties.

#### 2. Statement of the Worst-Case Measurement Uncertainties for the Conducted and Radiated Emissions Measurements Contained in This Test Report

**Table 1: Worst-Case Expanded Uncertainty "U" of Measurement for a k=2 Coverage Factor**

<b>Radiated Emissions Measurement Detection Systems</b>	<b>Applicable Frequency Range</b>	<b>"U" for a k=2 Coverage Factor</b>
HP8568B Spectrum Analyzer with QPA & HP8447F Preamplifier	30 MHz - 200 MHz	+4.0 dB, -4.1 dB
HP8568B Spectrum Analyzer with QPA & HP8447F Preamplifier	200 MHz-1000 MHz	+/- 3.5 dB
HP8566B Spectrum Analyzer with QPA & Preselector	30 MHz - 200 MHz	+3.9 dB, -4.0 dB
HP8566B Spectrum Analyzer with QPA & Preselector	200 MHz-1000 MHz	+/- 3.4 dB
HP8566B Spectrum Analyzer with QPA & HP 8449A Preamplifier	1 GHz - 18 GHz	+2.5 dB, -2.6 dB
HP8566B Spectrum Analyzer with QPA & HP8449A Preamplifier	18 GHz - 40 GHz	+/- 3.4 dB

NOTES:

1. Applies to 3 and 10 meter measurement distances
2. Applies to all valid combinations of Transducers (i.e. LISNs, Line Voltage Probes, and Antennas, as appropriate)
3. Excludes the Repeatability of the EUT

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	26 of 28

### 3. Practical Explanation of the Meaning of Radiated Emissions Measurement Uncertainties

In general, a “Statement of Measurement Uncertainty” means that with a certain (specified) confidence level, the “true” value of a measurand will be between a (stated) upper bound and a (stated) lower bound.

In the specific case of EMC Measurements in this test report, the measurement uncertainties of the conducted emissions measurements and the radiated emissions measurements have been calculated in accordance with the method detailed in the following documents:

- *ANSI Z540.2 (2002) Guide to the Expression of Uncertainty in Measurement*
- NIS 81:1994, *The Treatment of Uncertainty in EMC Measurements* (NAMAS, 1994)
- NIST Technical Note 1297(1994), *Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results* (NIST, 1994)

The calculation method used in these documents requires that the stated uncertainty of the measurements be expressed as an “*expanded uncertainty*”, *U*, with a *k=2 coverage factor*. The practical interpretation of this method of expressing measurement uncertainty is shown in the following example:

EXAMPLE: Assume that at 39.51 MHz, the (measured) radiated emissions level was equal to +26.5 dBuV/m, and that the +/- 2 standard deviations (i.e. 95% confidence level) measurement uncertainty was +/- 3.4 dB.

In the example above, the phrase “*k = 2 Coverage Factor*” simply means that the measurement uncertainty is stated to cover +/- 2 standard deviations (i.e. a 95% confidence interval) about the measurand. The measurand is the radiated emissions measurement of +26.5 dBuV/m at 39.51 MHz, and the 95% bounds for the uncertainty are -3.4 dB to + 3.4 dB. One can thus be 95% confident that the “true” value of the radiated emissions measurement is between +23.1 dBuV/m and +29.5 dBuV/m. *In effect, this means that in the above example there is only a 2.5% chance that the “true” radiated emissions value exceeds +29.5 dBuV/m.*

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	27 of 28

## APPENDIX B

### B. Nemko USA, Inc.'s Test Equipment & Facilities Calibration Program

Nemko USA, Inc. operates a comprehensive Periodic Calibration Program in order to ensure the validity of all test data. Nemko USA's Periodic Calibration Program is fully compliant to the requirements of NVLAP Policy Guide PG-1-1988, ANSI/NCSL Z540-1-1994, ISO 10012:2003, ISO/IEC 17025:1999, and ISO-9000:2000. Nemko USA, Inc.'s calibrations program therefore meets or exceeds the US national commercial and military requirements [N.B. ANSI/NCSL Z540-1-1994 replaces MIL-STD-45662A].

Specifically, all of Nemko USA's *primary reference standard devices* (e.g. vector voltmeters, multimeters, attenuators and terminations, RF power meters and their detector heads, oscilloscope mainframes and plug-ins, spectrum analyzers, RF preselectors, quasi-peak adapters, interference analyzers, impulse generators, signal generators and pulse/function generators, field-strength meters and their detector heads, etc.) and certain *secondary standard devices* (e.g. RF Preamplifiers used in CISPR 11/22 and FCC Part 15/18 tests) are periodically recalibrated by:

- A Nemko USA-approved independent (third party) metrology laboratory that uses NIST-traceable standards and that is ISO Guide 25-accredited as a calibration laboratory by NIST; or,
- A Nemko USA-approved independent (third party) metrology laboratory that uses NIST-traceable standards and that is ISO Guide 25-accredited as a calibration laboratory by another accreditation body (such as A2LA) that is mutually recognized by NIST; or,
- A manufacturer of Measurement and Test Equipment (M&TE), if the manufacturer uses NIST-traceable standards and is ISO Guide 25-accredited as calibration laboratory either by NIST or by another accreditation body (such as A2LA) that is mutually recognized by NIST; or
- A manufacturer of M&TE (or by a Nemko USA-approved independent third party metrology laboratory) that is not ISO Guide 25-accredited. (In these cases, Nemko USA conducts an annual audit of the manufacturer or metrology laboratory for the purposes of proving traceability to NIST, ensuring that adequate and repeatable calibration procedures are being applied, and verifying conformity with the other requirements of ISO Guide 25).

<b>Nemko USA, Inc.</b>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
<b>DATE</b>	<b>DOCUMENT NAME</b>	<b>DOCUMENT #</b>	<b>PAGE</b>
January 25, 2006	Kyocera Wireless Corp. KX21-2X0 FCC Part 22/24 Test Report	2006 01032 KX21-2X0 22/24	28 of 28

In all cases, the entity performing the Calibration is required to furnish Nemko USA with a calibration test report and/or certificate of calibration, and a “calibration sticker” on each item of M&TE that is successfully calibrated.

Calibration intervals are normally one year, except when the manufacture advises a shorter interval (e.g. the HP 8568B Spectrum Analyzer is recalibrated every six months) or if US Government directives or client requirements demand a shorter interval. Items of instrumentation/related equipment which fail during routine use, or which suffer visible mechanical damage (during use or while in transit), are sidelined pending repair and recalibration. (Repairs are carried out either in-house [if minor] or by a Nemko USA-approved independent [third party] metrology laboratory, or by the manufacturer of the item of M&TE).

Each antenna used for CISPR 11 and CISPR 22 and FCC Part 15 and Part 18 radiated emissions testing (and for testing to the equivalent European Norms) is calibrated annually by either a NIST (or A2LA) ISO Standard 17025-Accredited third-party Antenna Calibration Laboratory or by the antenna’s OEM if the OEM is NIST or A2LA ISO Standard 17025-accredited as an antenna calibration laboratory. The antenna calibrations are performed using the methods specified in Annex G.5 of CISPR 16-1(2003) or ANSI C63.5-2004, including the “Three-Antenna Method”. Certain other kinds of antennas (e.g. magnetic-shielded loop antennas) are calibrated annually by either a NIST (or A2LA) ISO Standard 17025-accredited third-party antenna calibration laboratory, or by the antenna’s OEM if the OEM is NIST or A2LA ISO Standard 17025-accredited as an antenna calibration laboratory using the procedures specified in the latest version of SAE ARP-958.

In accordance with FCC and other regulations, Nemko USA recalibrates its suite of antennas used for radiated emissions tests on an annual basis. These calibrations are performed as a precursor to the FCC-required annual revalidation of the Normalized Site Attenuation properties of Nemko USA’s Open Area Test Site. Nemko USA, Inc. uses the procedures given in both Subclause 16.6 and Annex G.2 of CISPR 16-1 (2003), and, ANSI C63.4-2003 when performing the normalized site attenuation measurements.