

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.4 PK			1.55 H	22	62.0	47.4
2	*6825.00	98.4 AV			1.55 H	22	51.0	47.4
3	#13650.00	62.2 PK	88.2	-26.0	1.74 H	120	38.7	23.5
4	#13650.00	48.8 AV	68.2	-19.4	1.74 H	120	25.3	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.5 PK			1.75 V	42	63.1	47.4
2	*6825.00	99.5 AV			1.75 V	42	52.1	47.4
3	#13650.00	62.5 PK	88.2	-25.7	2.11 V	14	39.0	23.5
4	#13650.00	49.5 AV	68.2	-18.7	2.11 V	14	26.0	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.4 PK			1.50 H	2	60.7	48.7
2	*6985.00	98.1 AV			1.50 H	2	49.4	48.7
3	#7125.00	66.7 PK	88.2	-21.5	1.50 H	2	49.8	16.9
4	#7125.00	54.4 AV	68.2	-13.8	1.50 H	2	37.5	16.9
5	#13970.00	63.0 PK	88.2	-25.2	1.69 H	136	38.7	24.3
6	#13970.00	49.7 AV	68.2	-18.5	1.69 H	136	25.4	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.5 PK			1.74 V	41	61.8	48.7
2	*6985.00	99.6 AV			1.74 V	41	50.9	48.7
3	#7125.00	67.7 PK	88.2	-20.5	1.74 V	41	50.8	16.9
4	#7125.00	54.9 AV	68.2	-13.3	1.74 V	41	38.0	16.9
5	#13970.00	63.5 PK	88.2	-24.7	2.11 V	190	39.2	24.3
6	#13970.00	50.4 AV	68.2	-17.8	2.11 V	190	26.1	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5921.70	70.0 PK	88.2	-18.2	1.48 H	31	55.9	14.1
2	#5921.70	56.0 AV	68.2	-12.2	1.48 H	31	41.9	14.1
3	*6105.00	108.1 PK			1.48 H	31	62.8	45.3
4	*6105.00	96.8 AV			1.48 H	31	51.5	45.3
5	12210.00	59.6 PK	74.0	-14.4	1.77 H	133	38.6	21.0
6	12210.00	46.2 AV	54.0	-7.8	1.77 H	133	25.2	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5921.70	72.1 PK	88.2	-16.1	1.85 V	4	58.0	14.1
2	#5921.70	57.3 AV	68.2	-10.9	1.85 V	4	43.2	14.1
3	*6105.00	110.0 PK			1.85 V	4	64.7	45.3
4	*6105.00	98.3 AV			1.85 V	4	53.0	45.3
5	12210.00	58.5 PK	74.0	-15.5	2.11 V	189	37.5	21.0
6	12210.00	46.0 AV	54.0	-8.0	2.11 V	189	25.0	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	109.6 PK			1.51 H	4	63.8	45.8
2	*6265.00	97.3 AV			1.51 H	4	51.5	45.8
3	12530.00	58.9 PK	74.0	-15.1	1.70 H	110	38.1	20.8
4	12530.00	46.0 AV	54.0	-8.0	1.70 H	110	25.2	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	110.8 PK			1.75 V	48	65.0	45.8
2	*6265.00	98.5 AV			1.75 V	48	52.7	45.8
3	12530.00	59.5 PK	74.0	-14.5	2.14 V	190	38.7	20.8
4	12530.00	46.2 AV	54.0	-7.8	2.14 V	190	25.4	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	109.5 PK			1.25 H	4	62.9	46.6
2	*6425.00	98.0 AV			1.25 H	4	51.4	46.6
3	#12850.00	59.6 PK	88.2	-28.6	1.79 H	121	38.0	21.6
4	#12850.00	46.9 AV	68.2	-21.3	1.79 H	121	25.3	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.9 PK			1.76 V	48	64.3	46.6
2	*6425.00	99.4 AV			1.76 V	48	52.8	46.6
3	#12850.00	59.7 PK	88.2	-28.5	2.11 V	173	38.1	21.6
4	#12850.00	47.2 AV	68.2	-21.0	2.11 V	173	25.6	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.8 PK			1.35 H	5	63.5	47.3
2	*6585.00	99.0 AV			1.35 H	5	51.7	47.3
3	#13170.00	60.3 PK	88.2	-27.9	1.78 H	113	38.0	22.3
4	#13170.00	48.0 AV	68.2	-20.2	1.78 H	113	25.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	112.4 PK			1.91 V	48	65.1	47.3
2	*6585.00	100.5 AV			1.91 V	48	53.2	47.3
3	#13170.00	61.2 PK	88.2	-27.0	2.00 V	172	38.9	22.3
4	#13170.00	48.4 AV	68.2	-19.8	2.00 V	172	26.1	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.6 PK			1.53 H	10	63.0	47.6
2	*6745.00	98.4 AV			1.53 H	10	50.8	47.6
3	#13490.00	61.0 PK	88.2	-27.2	1.76 H	124	37.5	23.5
4	#13490.00	48.4 AV	68.2	-19.8	1.76 H	124	24.9	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.8 PK			1.86 V	44	64.2	47.6
2	*6745.00	99.6 AV			1.86 V	44	52.0	47.6
3	#13490.00	61.4 PK	88.2	-26.8	2.17 V	179	37.9	23.5
4	#13490.00	48.6 AV	68.2	-19.6	2.17 V	179	25.1	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	109.3 PK			1.51 H	5	61.4	47.9
2	*6905.00	97.8 AV			1.51 H	5	49.9	47.9
3	#7125.00	62.0 PK	88.2	-26.2	1.51 H	5	45.1	16.9
4	#7125.00	49.0 AV	68.2	-19.2	1.51 H	5	32.1	16.9
5	#13810.00	60.8 PK	88.2	-27.4	1.76 H	125	37.0	23.8
6	#13810.00	49.2 AV	68.2	-19.0	1.76 H	125	25.4	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	111.8 PK			1.90 V	44	63.9	47.9
2	*6905.00	99.5 AV			1.90 V	44	51.6	47.9
3	#7125.00	62.2 PK	88.2	-26.0	1.90 V	44	45.3	16.9
4	#7125.00	49.2 AV	68.2	-19.0	1.90 V	44	32.3	16.9
5	#13810.00	62.1 PK	88.2	-26.1	2.13 V	164	38.3	23.8
6	#13810.00	49.9 AV	68.2	-18.3	2.13 V	164	26.1	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Beamforming (4T4S)

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.55 H	40	47.0	14.1
2	#5925.00	48.3 AV	68.2	-19.9	1.55 H	40	34.2	14.1
3	*5955.00	111.6 PK			1.55 H	40	66.7	44.9
4	*5955.00	99.3 AV			1.55 H	40	54.4	44.9
5	11910.00	63.2 PK	74.0	-10.8	1.85 H	110	42.5	20.7
6	11910.00	49.5 AV	54.0	-4.5	1.85 H	110	28.8	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.3 PK	88.2	-22.9	2.05 V	341	51.2	14.1
2	#5925.00	49.5 AV	68.2	-18.7	2.05 V	341	35.4	14.1
3	*5955.00	113.7 PK			2.05 V	341	68.8	44.9
4	*5955.00	101.0 AV			2.05 V	341	56.1	44.9
5	11910.00	63.7 PK	74.0	-10.3	2.65 V	175	43.0	20.7
6	11910.00	50.2 AV	54.0	-3.8	2.65 V	175	29.5	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	111.0 PK			1.45 H	35	65.6	45.4
2	*6175.00	98.8 AV			1.45 H	35	53.4	45.4
3	12350.00	63.2 PK	74.0	-10.8	1.88 H	112	42.4	20.8
4	12350.00	50.0 AV	54.0	-4.0	1.88 H	112	29.2	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	113.7 PK			1.90 V	332	68.3	45.4
2	*6175.00	100.6 AV			1.90 V	332	55.2	45.4
3	12350.00	63.6 PK	74.0	-10.4	2.75 V	185	42.8	20.8
4	12350.00	50.5 AV	54.0	-3.5	2.75 V	185	29.7	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.1 PK			1.52 H	45	65.5	46.6
2	*6415.00	98.8 AV			1.52 H	45	52.2	46.6
3	#12830.00	62.8 PK	88.2	-25.4	1.85 H	115	41.2	21.6
4	#12830.00	49.8 AV	68.2	-18.4	1.85 H	115	28.2	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.8 PK			1.93 V	337	67.2	46.6
2	*6415.00	100.6 AV			1.93 V	337	54.0	46.6
3	#12830.00	63.6 PK	88.2	-24.6	2.92 V	185	42.0	21.6
4	#12830.00	50.6 AV	68.2	-17.6	2.92 V	185	29.0	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.4 PK			1.32 H	50	64.8	46.6
2	*6435.00	98.4 AV			1.32 H	50	51.8	46.6
3	#12870.00	63.1 PK	88.2	-25.1	1.75 H	118	41.5	21.6
4	#12870.00	49.9 AV	68.2	-18.3	1.75 H	118	28.3	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	113.4 PK			1.89 V	334	66.8	46.6
2	*6435.00	100.3 AV			1.89 V	334	53.7	46.6
3	#12870.00	63.4 PK	88.2	-24.8	2.85 V	175	41.8	21.6
4	#12870.00	50.3 AV	68.2	-17.9	2.85 V	175	28.7	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.6 PK			1.45 H	39	64.8	46.8
2	*6475.00	98.6 AV			1.45 H	39	51.8	46.8
3	#12950.00	63.3 PK	88.2	-24.9	1.85 H	118	41.5	21.8
4	#12950.00	49.8 AV	68.2	-18.4	1.85 H	118	28.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	113.4 PK			1.81 V	336	66.6	46.8
2	*6475.00	100.2 AV			1.81 V	336	53.4	46.8
3	#12950.00	63.6 PK	88.2	-24.6	2.75 V	195	41.8	21.8
4	#12950.00	50.7 AV	68.2	-17.5	2.75 V	195	28.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.7 PK			1.47 H	33	64.7	47.0
2	*6515.00	98.7 AV			1.47 H	33	51.7	47.0
3	#13030.00	63.1 PK	88.2	-25.1	1.88 H	129	41.2	21.9
4	#13030.00	49.6 AV	68.2	-18.6	1.88 H	129	27.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	114.1 PK			1.83 V	39	67.1	47.0
2	*6515.00	100.7 AV			1.83 V	39	53.7	47.0
3	#13030.00	63.4 PK	88.2	-24.8	2.78 V	195	41.5	21.9
4	#13030.00	50.7 AV	68.2	-17.5	2.78 V	195	28.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.7 PK			1.52 H	40	65.5	47.2
2	*6535.00	100.0 AV			1.52 H	40	52.8	47.2
3	#13070.00	63.0 PK	88.2	-25.2	1.85 H	132	41.0	22.0
4	#13070.00	49.8 AV	68.2	-18.4	1.85 H	132	27.8	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.4 PK			2.04 V	46	67.2	47.2
2	*6535.00	101.8 AV			2.04 V	46	54.6	47.2
3	#13070.00	63.5 PK	88.2	-24.7	2.72 V	198	41.5	22.0
4	#13070.00	51.0 AV	68.2	-17.2	2.72 V	198	29.0	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.6 PK			1.45 H	40	65.2	47.4
2	*6695.00	99.7 AV			1.45 H	40	52.3	47.4
3	13390.00	62.8 PK	74.0	-11.2	1.75 H	125	40.0	22.8
4	13390.00	50.0 AV	54.0	-4.0	1.75 H	125	27.2	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.9 PK			2.02 V	48	66.5	47.4
2	*6695.00	100.9 AV			2.02 V	48	53.5	47.4
3	13390.00	63.3 PK	74.0	-10.7	2.65 V	195	40.5	22.8
4	13390.00	50.6 AV	54.0	-3.4	2.65 V	195	27.8	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.4 PK			1.45 H	35	64.0	47.4
2	*6855.00	99.2 AV			1.45 H	35	51.8	47.4
3	#13710.00	63.0 PK	88.2	-25.2	1.88 H	122	39.5	23.5
4	#13710.00	50.0 AV	68.2	-18.2	1.88 H	122	26.5	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.9 PK			2.00 V	50	65.5	47.4
2	*6855.00	99.6 AV			2.00 V	50	52.2	47.4
3	#13710.00	63.3 PK	88.2	-24.9	2.65 V	192	39.8	23.5
4	#13710.00	50.5 AV	68.2	-17.7	2.65 V	192	27.0	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.6 PK			1.47 H	32	64.0	47.6
2	*6875.00	99.5 AV			1.47 H	32	51.9	47.6
3	#13750.00	62.8 PK	88.2	-25.4	1.92 H	118	39.2	23.6
4	#13750.00	50.1 AV	68.2	-18.1	1.92 H	118	26.5	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	112.2 PK			2.02 V	47	64.6	47.6
2	*6875.00	99.9 AV			2.02 V	47	52.3	47.6
3	#13750.00	63.6 PK	88.2	-24.6	2.75 V	185	40.0	23.6
4	#13750.00	50.8 AV	68.2	-17.4	2.75 V	185	27.2	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.7 PK			1.42 H	39	62.0	48.7
2	*6995.00	98.8 AV			1.42 H	39	50.1	48.7
3	#13990.00	63.3 PK	88.2	-24.9	1.95 H	135	38.8	24.5
4	#13990.00	50.0 AV	68.2	-18.2	1.95 H	135	25.5	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.3 PK			1.82 V	50	63.6	48.7
2	*6995.00	100.3 AV			1.82 V	50	51.6	48.7
3	#13990.00	64.0 PK	88.2	-24.2	2.75 V	188	39.5	24.5
4	#13990.00	50.9 AV	68.2	-17.3	2.75 V	188	26.4	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.3 PK			1.32 H	45	61.7	48.6
2	*7095.00	98.4 AV			1.32 H	45	49.8	48.6
3	#14190.00	63.4 PK	88.2	-24.8	1.85 H	138	38.5	24.9
4	#14190.00	50.0 AV	68.2	-18.2	1.85 H	138	25.1	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.3 PK			2.06 V	51	62.7	48.6
2	*7095.00	99.2 AV			2.06 V	51	50.6	48.6
3	#14190.00	64.1 PK	88.2	-24.1	2.65 V	185	39.2	24.9
4	#14190.00	50.9 AV	68.2	-17.3	2.65 V	185	26.0	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.8 PK			1.45 H	30	45.0	48.8
2	*7115.00	81.4 AV			1.45 H	30	32.6	48.8
3	#7125.00	79.1 PK	88.2	-9.1	1.45 H	30	62.2	16.9
4	#7125.00	66.4 AV	68.2	-1.8	1.45 H	30	49.5	16.9
5	#14230.00	63.7 PK	88.2	-24.5	1.88 H	155	38.8	24.9
6	#14230.00	50.1 AV	68.2	-18.1	1.88 H	155	25.2	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.4 PK			1.83 V	47	46.6	48.8
2	*7115.00	83.3 AV			1.83 V	47	34.5	48.8
3	#7125.00	81.6 PK	88.2	-6.6	1.83 V	47	64.7	16.9
4	#7125.00	67.9 AV	68.2	-0.3	1.83 V	47	51.0	16.9
5	#14230.00	63.6 PK	88.2	-24.6	2.65 V	182	38.7	24.9
6	#14230.00	50.1 AV	68.2	-18.1	2.65 V	182	25.2	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.1 PK	88.2	-22.1	1.45 H	47	52.0	14.1
2	#5925.00	49.6 AV	68.2	-18.6	1.45 H	47	35.5	14.1
3	*5965.00	111.0 PK			1.45 H	47	66.0	45.0
4	*5965.00	99.0 AV			1.45 H	47	54.0	45.0
5	11930.00	62.7 PK	74.0	-11.3	1.75 H	118	42.0	20.7
6	11930.00	49.7 AV	54.0	-4.3	1.75 H	118	29.0	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.6 PK	88.2	-20.6	2.00 V	351	53.5	14.1
2	#5925.00	50.6 AV	68.2	-17.6	2.00 V	351	36.5	14.1
3	*5965.00	114.2 PK			2.00 V	351	69.2	45.0
4	*5965.00	101.4 AV			2.00 V	351	56.4	45.0
5	11930.00	63.2 PK	74.0	-10.8	2.70 V	175	42.5	20.7
6	11930.00	50.1 AV	54.0	-3.9	2.70 V	175	29.4	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	111.3 PK			1.45 H	40	66.0	45.3
2	*6165.00	98.4 AV			1.45 H	40	53.1	45.3
3	12330.00	62.6 PK	74.0	-11.4	1.88 H	122	41.8	20.8
4	12330.00	49.5 AV	54.0	-4.5	1.88 H	122	28.7	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	113.3 PK			2.04 V	341	68.0	45.3
2	*6165.00	100.2 AV			2.04 V	341	54.9	45.3
3	12330.00	63.0 PK	74.0	-11.0	2.32 V	170	42.2	20.8
4	12330.00	49.8 AV	54.0	-4.2	2.32 V	170	29.0	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.2 PK			1.55 H	42	65.6	46.6
2	*6405.00	98.7 AV			1.55 H	42	52.1	46.6
3	#12810.00	62.8 PK	88.2	-25.4	1.85 H	122	41.2	21.6
4	#12810.00	49.6 AV	68.2	-18.6	1.85 H	122	28.0	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.6 PK			1.98 V	334	67.0	46.6
2	*6405.00	100.3 AV			1.98 V	334	53.7	46.6
3	#12810.00	63.6 PK	88.2	-24.6	2.21 V	165	42.0	21.6
4	#12810.00	50.6 AV	68.2	-17.6	2.21 V	165	29.0	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.8 PK			1.47 H	32	65.2	46.6
2	*6445.00	98.1 AV			1.47 H	32	51.5	46.6
3	#12890.00	63.1 PK	88.2	-25.1	1.77 H	118	41.5	21.6
4	#12890.00	50.1 AV	68.2	-18.1	1.77 H	118	28.5	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	113.4 PK			1.86 V	336	66.8	46.6
2	*6445.00	100.5 AV			1.86 V	336	53.9	46.6
3	#12890.00	63.7 PK	88.2	-24.5	2.32 V	165	42.1	21.6
4	#12890.00	50.5 AV	68.2	-17.7	2.32 V	165	28.9	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.9 PK			1.35 H	45	65.0	46.9
2	*6485.00	98.6 AV			1.35 H	45	51.7	46.9
3	#12970.00	63.2 PK	88.2	-25.0	1.88 H	122	41.4	21.8
4	#12970.00	49.8 AV	68.2	-18.4	1.88 H	122	28.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.0 PK			1.91 V	337	66.1	46.9
2	*6485.00	100.2 AV			1.91 V	337	53.3	46.9
3	#12970.00	63.6 PK	88.2	-24.6	2.21 V	185	41.8	21.8
4	#12970.00	50.5 AV	68.2	-17.7	2.21 V	185	28.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.8 PK			1.65 H	35	64.8	47.0
2	*6525.00	98.7 AV			1.65 H	35	51.7	47.0
3	#13050.00	62.7 PK	88.2	-25.5	1.82 H	125	40.8	21.9
4	#13050.00	49.9 AV	68.2	-18.3	1.82 H	125	28.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	113.6 PK			2.04 V	45	66.6	47.0
2	*6525.00	101.7 AV			2.04 V	45	54.7	47.0
3	#13050.00	63.7 PK	88.2	-24.5	2.22 V	188	41.8	21.9
4	#13050.00	50.4 AV	68.2	-17.8	2.22 V	188	28.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.3 PK			1.49 H	38	65.0	47.3
2	*6565.00	99.0 AV			1.49 H	38	51.7	47.3
3	#13130.00	62.9 PK	88.2	-25.3	1.82 H	126	40.8	22.1
4	#13130.00	49.9 AV	68.2	-18.3	1.82 H	126	27.8	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.1 PK			2.06 V	49	66.8	47.3
2	*6565.00	100.9 AV			2.06 V	49	53.6	47.3
3	#13130.00	63.6 PK	88.2	-24.6	2.18 V	190	41.5	22.1
4	#13130.00	50.5 AV	68.2	-17.7	2.18 V	190	28.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	112.3 PK			1.45 H	32	64.8	47.5
2	*6725.00	99.2 AV			1.45 H	32	51.7	47.5
3	#13450.00	62.7 PK	88.2	-25.5	1.95 H	118	39.5	23.2
4	#13450.00	50.4 AV	68.2	-17.8	1.95 H	118	27.2	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	113.9 PK			2.08 V	46	66.4	47.5
2	*6725.00	101.6 AV			2.08 V	46	54.1	47.5
3	#13450.00	63.8 PK	88.2	-24.4	2.22 V	185	40.6	23.2
4	#13450.00	50.7 AV	68.2	-17.5	2.22 V	185	27.5	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.9 PK			1.55 H	45	64.5	47.4
2	*6845.00	99.2 AV			1.55 H	45	51.8	47.4
3	#13690.00	62.7 PK	88.2	-25.5	1.88 H	125	39.2	23.5
4	#13690.00	49.7 AV	68.2	-18.5	1.88 H	125	26.2	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.8 PK			1.92 V	46	66.4	47.4
2	*6845.00	100.9 AV			1.92 V	46	53.5	47.4
3	#13690.00	63.5 PK	88.2	-24.7	2.21 V	192	40.0	23.5
4	#13690.00	50.7 AV	68.2	-17.5	2.21 V	192	27.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.8 PK			1.44 H	38	64.1	47.7
2	*6885.00	98.7 AV			1.44 H	38	51.0	47.7
3	#13770.00	63.0 PK	88.2	-25.2	1.69 H	118	39.2	23.8
4	#13770.00	49.5 AV	68.2	-18.7	1.69 H	118	25.7	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	113.0 PK			2.00 V	49	65.3	47.7
2	*6885.00	100.0 AV			2.00 V	49	52.3	47.7
3	#13770.00	63.6 PK	88.2	-24.6	2.15 V	185	39.8	23.8
4	#13770.00	50.3 AV	68.2	-17.9	2.15 V	185	26.5	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.0 PK			1.45 H	48	62.2	48.8
2	*7005.00	99.0 AV			1.45 H	48	50.2	48.8
3	#14010.00	63.3 PK	88.2	-24.9	1.78 H	122	38.7	24.6
4	#14010.00	49.8 AV	68.2	-18.4	1.78 H	122	25.2	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	112.9 PK			2.08 V	50	64.1	48.8
2	*7005.00	100.0 AV			2.08 V	50	51.2	48.8
3	#14010.00	63.8 PK	88.2	-24.4	2.32 V	175	39.2	24.6
4	#14010.00	50.6 AV	68.2	-17.6	2.32 V	175	26.0	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.8 PK			1.50 H	38	63.2	48.6
2	*7085.00	98.1 AV			1.50 H	38	49.5	48.6
3	#7125.00	66.4 PK	88.2	-21.8	1.50 H	38	49.5	16.9
4	#7125.00	53.4 AV	68.2	-14.8	1.50 H	38	36.5	16.9
5	#14170.00	63.3 PK	88.2	-24.9	1.87 H	122	38.4	24.9
6	#14170.00	50.3 AV	68.2	-17.9	1.87 H	122	25.4	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	113.9 PK			2.07 V	51	65.3	48.6
2	*7085.00	99.7 AV			2.07 V	51	51.1	48.6
3	#7125.00	67.9 PK	88.2	-20.3	2.07 V	51	51.0	16.9
4	#7125.00	54.6 AV	68.2	-13.6	2.07 V	51	37.7	16.9
5	#14170.00	63.9 PK	88.2	-24.3	2.25 V	175	39.0	24.9
6	#14170.00	50.8 AV	68.2	-17.4	2.25 V	175	25.9	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.1 PK	88.2	-18.1	1.02 H	29	56.0	14.1
2	#5925.00	52.1 AV	68.2	-16.1	1.02 H	29	38.0	14.1
3	*5985.00	111.5 PK			1.02 H	29	66.5	45.0
4	*5985.00	99.0 AV			1.02 H	29	54.0	45.0
5	11970.00	58.7 PK	74.0	-15.3	1.88 H	130	38.1	20.6
6	11970.00	45.6 AV	54.0	-8.4	1.88 H	130	25.0	20.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.6 PK	88.2	-17.6	2.12 V	69	56.5	14.1
2	#5925.00	52.8 AV	68.2	-15.4	2.12 V	69	38.7	14.1
3	*5985.00	112.3 PK			2.12 V	69	67.3	45.0
4	*5985.00	100.6 AV			2.12 V	69	55.6	45.0
5	11970.00	59.4 PK	74.0	-14.6	2.21 V	181	38.8	20.6
6	11970.00	46.3 AV	54.0	-7.7	2.21 V	181	25.7	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	111.1 PK			1.25 H	50	65.9	45.2
2	*6145.00	98.3 AV			1.25 H	50	53.1	45.2
3	12290.00	59.0 PK	74.0	-15.0	1.88 H	131	38.1	20.9
4	12290.00	46.1 AV	54.0	-7.9	1.88 H	131	25.2	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	112.6 PK			2.23 V	44	67.4	45.2
2	*6145.00	99.8 AV			2.23 V	44	54.6	45.2
3	12290.00	59.4 PK	74.0	-14.6	2.22 V	171	38.5	20.9
4	12290.00	46.2 AV	54.0	-7.8	2.22 V	171	25.3	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.6 PK			1.55 H	53	64.0	46.6
2	*6385.00	98.6 AV			1.55 H	53	52.0	46.6
3	#12770.00	59.3 PK	88.2	-28.9	1.90 H	120	37.8	21.5
4	#12770.00	46.4 AV	68.2	-21.8	1.90 H	120	24.9	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.9 PK			1.94 V	41	65.3	46.6
2	*6385.00	99.9 AV			1.94 V	41	53.3	46.6
3	#12770.00	59.7 PK	88.2	-28.5	1.50 V	178	38.2	21.5
4	#12770.00	46.6 AV	68.2	-21.6	1.50 V	178	25.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.4 PK			1.40 H	51	65.7	46.7
2	*6465.00	99.2 AV			1.40 H	51	52.5	46.7
3	#12930.00	59.5 PK	88.2	-28.7	1.70 H	120	37.7	21.8
4	#12930.00	47.0 AV	68.2	-21.2	1.70 H	120	25.2	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	113.6 PK			2.19 V	43	66.9	46.7
2	*6465.00	100.4 AV			2.19 V	43	53.7	46.7
3	#12930.00	59.8 PK	88.2	-28.4	2.22 V	199	38.0	21.8
4	#12930.00	47.3 AV	68.2	-20.9	2.22 V	199	25.5	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	112.2 PK			1.53 H	55	65.0	47.2
2	*6545.00	99.7 AV			1.53 H	55	52.5	47.2
3	#13090.00	60.3 PK	88.2	-27.9	1.87 H	122	38.2	22.1
4	#13090.00	47.3 AV	68.2	-20.9	1.87 H	122	25.2	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	113.8 PK			1.93 V	45	66.6	47.2
2	*6545.00	100.9 AV			1.93 V	45	53.7	47.2
3	#13090.00	60.8 PK	88.2	-27.4	2.01 V	169	38.7	22.1
4	#13090.00	47.8 AV	68.2	-20.4	2.01 V	169	25.7	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.5 PK			1.51 H	53	64.0	47.5
2	*6705.00	99.0 AV			1.51 H	53	51.5	47.5
3	#13410.00	60.4 PK	88.2	-27.8	1.87 H	123	37.5	22.9
4	#13410.00	48.1 AV	68.2	-20.1	1.87 H	123	25.2	22.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.8 PK			1.88 V	48	65.3	47.5
2	*6705.00	100.3 AV			1.88 V	48	52.8	47.5
3	#13410.00	60.8 PK	88.2	-27.4	2.00 V	172	37.9	22.9
4	#13410.00	48.5 AV	68.2	-19.7	2.00 V	172	25.6	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.2 PK			1.21 H	53	63.7	47.5
2	*6865.00	98.5 AV			1.21 H	53	51.0	47.5
3	#13730.00	61.7 PK	88.2	-26.5	1.80 H	115	38.1	23.6
4	#13730.00	48.6 AV	68.2	-19.6	1.80 H	115	25.0	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	112.6 PK			2.00 V	48	65.1	47.5
2	*6865.00	99.8 AV			2.00 V	48	52.3	47.5
3	#13730.00	62.1 PK	88.2	-26.1	2.12 V	178	38.5	23.6
4	#13730.00	48.9 AV	68.2	-19.3	2.12 V	178	25.3	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.5 PK			1.42 H	53	62.2	48.3
2	*6945.00	98.3 AV			1.42 H	53	50.0	48.3
3	#13890.00	62.2 PK	88.2	-26.0	1.77 H	115	38.3	23.9
4	#13890.00	49.1 AV	68.2	-19.1	1.77 H	115	25.2	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.9 PK			1.74 V	44	63.6	48.3
2	*6945.00	99.4 AV			1.74 V	44	51.1	48.3
3	#13890.00	62.5 PK	88.2	-25.7	2.21 V	175	38.6	23.9
4	#13890.00	49.6 AV	68.2	-18.6	2.21 V	175	25.7	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.6 PK			1.49 H	42	61.9	48.7
2	*7025.00	98.4 AV			1.49 H	42	49.7	48.7
3	#7125.00	67.1 PK	88.2	-21.1	1.49 H	42	50.2	16.9
4	#7125.00	53.7 AV	68.2	-14.5	1.49 H	42	36.8	16.9
5	#14050.00	62.4 PK	88.2	-25.8	2.11 H	122	37.7	24.7
6	#14050.00	49.7 AV	68.2	-18.5	2.11 H	122	25.0	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.8 PK			1.82 V	35	63.1	48.7
2	*7025.00	99.5 AV			1.82 V	35	50.8	48.7
3	#7125.00	67.9 PK	88.2	-20.3	1.82 V	35	51.0	16.9
4	#7125.00	54.1 AV	68.2	-14.1	1.82 V	35	37.2	16.9
5	#14050.00	62.5 PK	88.2	-25.7	2.19 V	178	37.8	24.7
6	#14050.00	49.8 AV	68.2	-18.4	2.19 V	178	25.1	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.7 PK	88.2	-13.5	1.55 H	43	60.6	14.1
2	#5925.00	53.8 AV	68.2	-14.4	1.55 H	43	39.7	14.1
3	*6025.00	110.9 PK			1.55 H	43	65.8	45.1
4	*6025.00	97.8 AV			1.55 H	43	52.7	45.1
5	12050.00	61.7 PK	74.0	-12.3	1.93 H	102	40.9	20.8
6	12050.00	49.2 AV	54.0	-4.8	1.93 H	102	28.4	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.5 PK	88.2	-10.7	2.18 V	38	63.4	14.1
2	#5925.00	59.1 AV	68.2	-9.1	2.18 V	38	45.0	14.1
3	*6025.00	112.6 PK			2.18 V	38	67.5	45.1
4	*6025.00	99.9 AV			2.18 V	38	54.8	45.1
5	12050.00	62.7 PK	74.0	-11.3	2.16 V	189	41.9	20.8
6	12050.00	49.8 AV	54.0	-4.2	2.16 V	189	29.0	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.9 PK			1.44 H	46	65.5	45.4
2	*6185.00	98.3 AV			1.44 H	46	52.9	45.4
3	12370.00	61.8 PK	74.0	-12.2	2.00 H	136	41.1	20.7
4	12370.00	49.1 AV	54.0	-4.9	2.00 H	136	28.4	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	112.7 PK			2.02 V	41	67.3	45.4
2	*6185.00	99.9 AV			2.02 V	41	54.5	45.4
3	12370.00	62.8 PK	74.0	-11.2	2.31 V	188	42.1	20.7
4	12370.00	49.9 AV	54.0	-4.1	2.31 V	188	29.2	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.1 PK			1.48 H	44	64.6	46.5
2	*6345.00	98.5 AV			1.48 H	44	52.0	46.5
3	12690.00	61.9 PK	74.0	-12.1	2.23 H	126	40.6	21.3
4	12690.00	49.9 AV	54.0	-4.1	2.23 H	126	28.6	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	112.8 PK			2.15 V	46	66.3	46.5
2	*6345.00	100.0 AV			2.15 V	46	53.5	46.5
3	12690.00	62.9 PK	74.0	-11.1	2.19 V	190	41.6	21.3
4	12690.00	49.8 AV	54.0	-4.2	2.19 V	190	28.5	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.9 PK			1.52 H	46	63.9	47.0
2	*6505.00	98.3 AV			1.52 H	46	51.3	47.0
3	#13010.00	62.1 PK	88.2	-26.1	2.11 H	134	40.2	21.9
4	#13010.00	49.5 AV	68.2	-18.7	2.11 H	134	27.6	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	112.9 PK			2.03 V	43	65.9	47.0
2	*6505.00	99.8 AV			2.03 V	43	52.8	47.0
3	#13010.00	62.8 PK	88.2	-25.4	2.18 V	193	40.9	21.9
4	#13010.00	50.2 AV	68.2	-18.0	2.18 V	193	28.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.5 PK			1.59 H	50	63.2	47.3
2	*6665.00	98.2 AV			1.59 H	50	50.9	47.3
3	13330.00	62.4 PK	74.0	-11.6	2.19 H	134	39.7	22.7
4	13330.00	49.8 AV	54.0	-4.2	2.19 H	134	27.1	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	112.7 PK			2.15 V	38	65.4	47.3
2	*6665.00	99.8 AV			2.15 V	38	52.5	47.3
3	13330.00	62.9 PK	74.0	-11.1	2.20 V	173	40.2	22.7
4	13330.00	49.9 AV	54.0	-4.1	2.20 V	173	27.2	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.4 PK			1.49 H	43	63.0	47.4
2	*6825.00	98.8 AV			1.49 H	43	51.4	47.4
3	#13650.00	62.4 PK	88.2	-25.8	1.92 H	132	38.9	23.5
4	#13650.00	49.3 AV	68.2	-18.9	1.92 H	132	25.8	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	112.9 PK			2.11 V	43	65.5	47.4
2	*6825.00	99.8 AV			2.11 V	43	52.4	47.4
3	#13650.00	63.1 PK	88.2	-25.1	2.22 V	196	39.6	23.5
4	#13650.00	50.2 AV	68.2	-18.0	2.22 V	196	26.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.0 PK			1.44 H	53	62.3	48.7
2	*6985.00	98.9 AV			1.44 H	53	50.2	48.7
3	#7125.00	77.1 PK	88.2	-11.1	1.44 H	53	60.2	16.9
4	#7125.00	52.2 AV	68.2	-16.0	1.44 H	53	35.3	16.9
5	#13970.00	62.1 PK	88.2	-26.1	1.96 H	132	37.8	24.3
6	#13970.00	49.5 AV	68.2	-18.7	1.96 H	132	25.2	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	112.8 PK			2.01 V	47	64.1	48.7
2	*6985.00	100.1 AV			2.01 V	47	51.4	48.7
3	#7125.00	78.5 PK	88.2	-9.7	2.01 V	47	61.6	16.9
4	#7125.00	54.5 AV	68.2	-13.7	2.01 V	47	37.6	16.9
5	#13970.00	62.8 PK	88.2	-25.4	2.24 V	194	38.5	24.3
6	#13970.00	49.9 AV	68.2	-18.3	2.24 V	194	25.6	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.6 PK	88.2	-13.6	1.52 H	42	60.5	14.1
2	#5925.00	56.1 AV	68.2	-12.1	1.52 H	42	42.0	14.1
3	*6105.00	109.5 PK			1.52 H	42	64.2	45.3
4	*6105.00	97.0 AV			1.52 H	42	51.7	45.3
5	12210.00	61.8 PK	74.0	-12.2	1.85 H	142	40.8	21.0
6	12210.00	49.2 AV	54.0	-4.8	1.85 H	142	28.2	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.1 PK	88.2	-12.1	2.06 V	43	62.0	14.1
2	#5925.00	61.0 AV	68.2	-7.2	2.06 V	43	46.9	14.1
3	*6105.00	111.2 PK			2.06 V	43	65.9	45.3
4	*6105.00	98.8 AV			2.06 V	43	53.5	45.3
5	12210.00	62.8 PK	74.0	-11.2	2.33 V	196	41.8	21.0
6	12210.00	49.7 AV	54.0	-4.3	2.33 V	196	28.7	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	109.9 PK			1.56 H	48	64.1	45.8
2	*6265.00	97.8 AV			1.56 H	48	52.0	45.8
3	12530.00	62.1 PK	74.0	-11.9	1.86 H	123	41.3	20.8
4	12530.00	49.0 AV	54.0	-5.0	1.86 H	123	28.2	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	111.9 PK			2.02 V	43	66.1	45.8
2	*6265.00	99.5 AV			2.02 V	43	53.7	45.8
3	12530.00	62.7 PK	74.0	-11.3	2.48 V	182	41.9	20.8
4	12530.00	49.8 AV	54.0	-4.2	2.48 V	182	29.0	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	109.8 PK			1.46 H	44	63.2	46.6
2	*6425.00	97.6 AV			1.46 H	44	51.0	46.6
3	#12850.00	61.8 PK	88.2	-26.4	1.73 H	105	40.2	21.6
4	#12850.00	49.0 AV	68.2	-19.2	1.73 H	105	27.4	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.7 PK			2.13 V	49	65.1	46.6
2	*6425.00	98.8 AV			2.13 V	49	52.2	46.6
3	#12850.00	62.9 PK	88.2	-25.3	2.48 V	186	41.3	21.6
4	#12850.00	49.8 AV	68.2	-18.4	2.48 V	186	28.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	109.9 PK			1.45 H	49	62.6	47.3
2	*6585.00	97.7 AV			1.45 H	49	50.4	47.3
3	#13170.00	61.5 PK	88.2	-26.7	1.80 H	124	39.2	22.3
4	#13170.00	49.3 AV	68.2	-18.9	1.80 H	124	27.0	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.9 PK			2.10 V	56	64.6	47.3
2	*6585.00	99.4 AV			2.10 V	56	52.1	47.3
3	#13170.00	62.7 PK	88.2	-25.5	2.33 V	185	40.4	22.3
4	#13170.00	49.8 AV	68.2	-18.4	2.33 V	185	27.5	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	109.7 PK			1.51 H	49	62.1	47.6
2	*6745.00	97.9 AV			1.51 H	49	50.3	47.6
3	#13490.00	61.7 PK	88.2	-26.5	1.80 H	112	38.2	23.5
4	#13490.00	49.0 AV	68.2	-19.2	1.80 H	112	25.5	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.8 PK			2.08 V	48	64.2	47.6
2	*6745.00	99.5 AV			2.08 V	48	51.9	47.6
3	#13490.00	62.8 PK	88.2	-25.4	2.41 V	189	39.3	23.5
4	#13490.00	49.7 AV	68.2	-18.5	2.41 V	189	26.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Titan Hsu		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	109.1 PK			1.50 H	46	61.2	47.9
2	*6905.00	96.4 AV			1.50 H	46	48.5	47.9
3	#7125.00	79.1 PK	88.2	-9.1	1.50 H	46	62.2	16.9
4	#7125.00	55.7 AV	68.2	-12.5	1.50 H	46	38.8	16.9
5	7250.00	68.0 PK	74.0	-6.0	1.50 H	46	50.6	17.4
6	7250.00	52.2 AV	54.0	-1.8	1.50 H	46	34.8	17.4
7	#13810.00	62.5 PK	88.2	-25.7	1.69 H	110	38.7	23.8
8	#13810.00	50.0 AV	68.2	-18.2	1.69 H	110	26.2	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.4 PK			2.07 V	49	62.5	47.9
2	*6905.00	97.5 AV			2.07 V	49	49.6	47.9
3	#7125.00	80.6 PK	88.2	-7.6	2.07 V	49	63.7	16.9
4	#7125.00	56.9 AV	68.2	-11.3	2.07 V	49	40.0	16.9
5	7250.00	69.3 PK	74.0	-4.7	2.07 V	49	51.9	17.4
6	7250.00	53.3 AV	54.0	-0.7	2.07 V	49	35.9	17.4
7	#13810.00	63.1 PK	88.2	-25.1	2.18 V	190	39.3	23.8
8	#13810.00	50.8 AV	68.2	-17.4	2.18 V	190	27.0	23.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 1

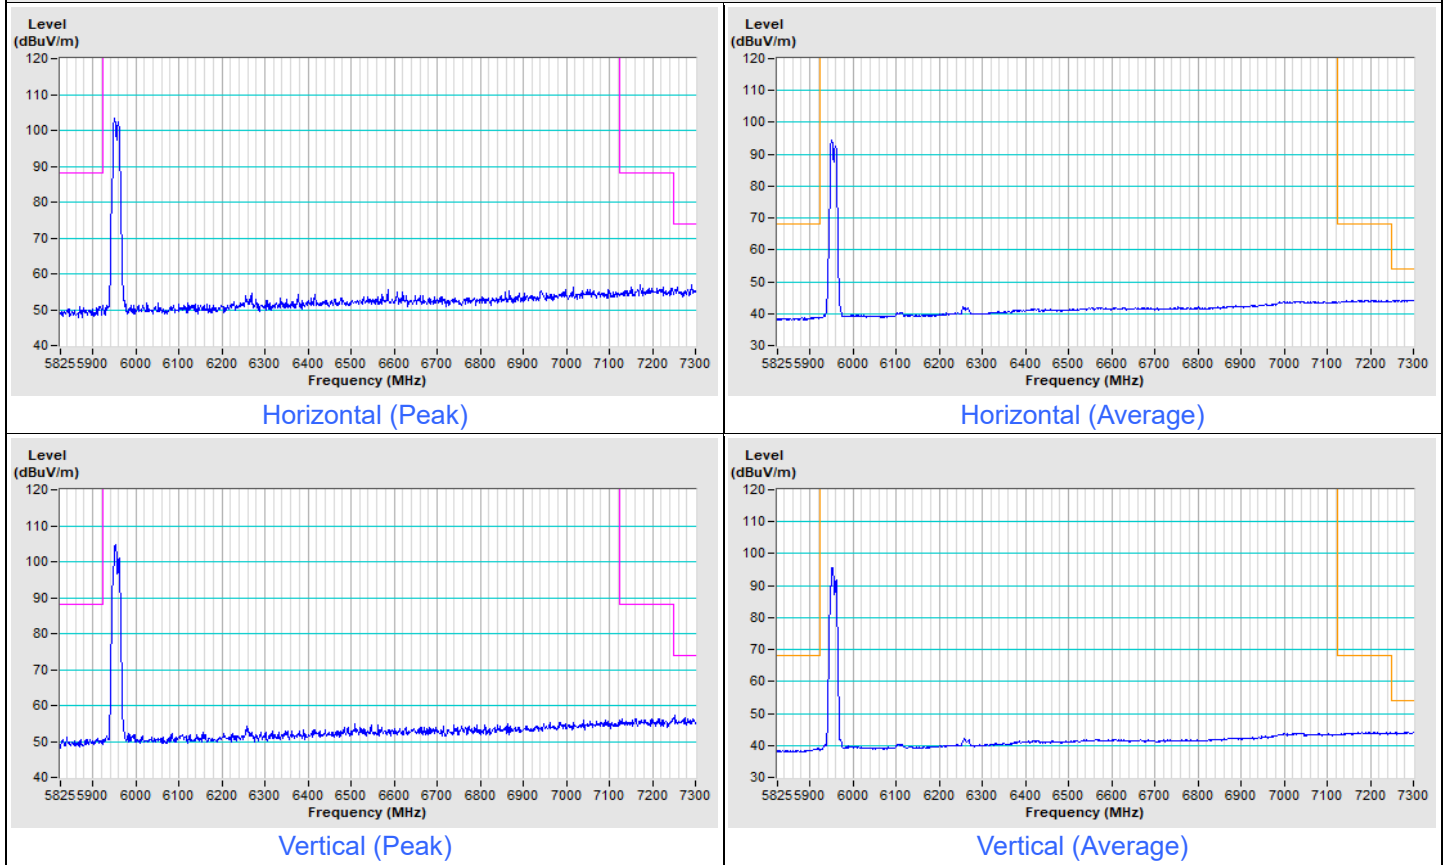


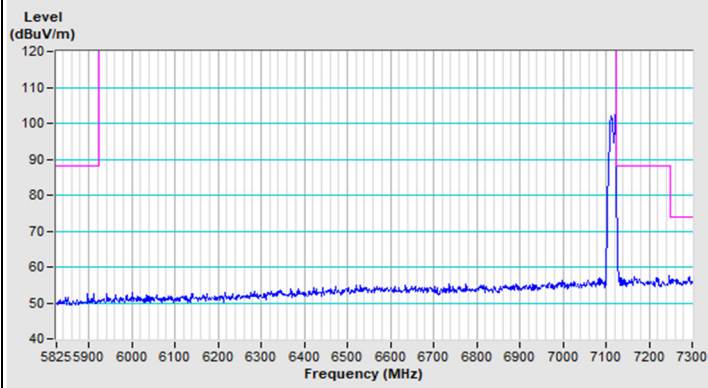802.11a Channel 233


Horizontal (Peak)

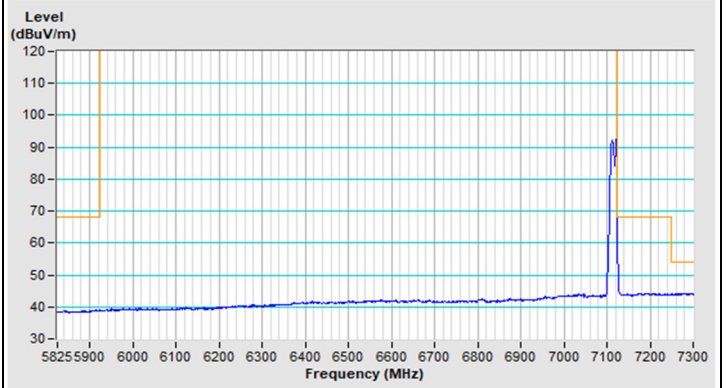

Horizontal (Average)

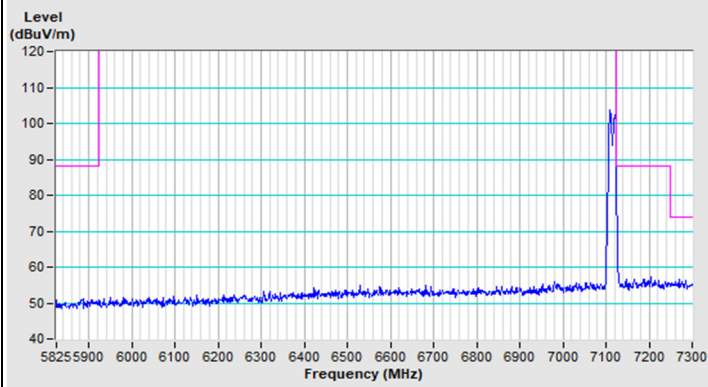

Vertical (Peak)

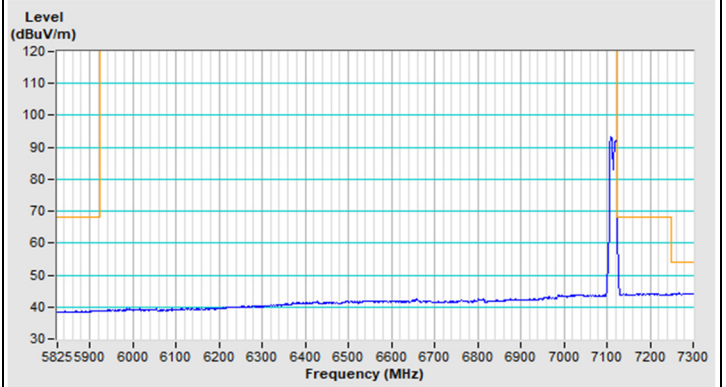



Vertical (Average)

Beamforming (4T1S)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 1

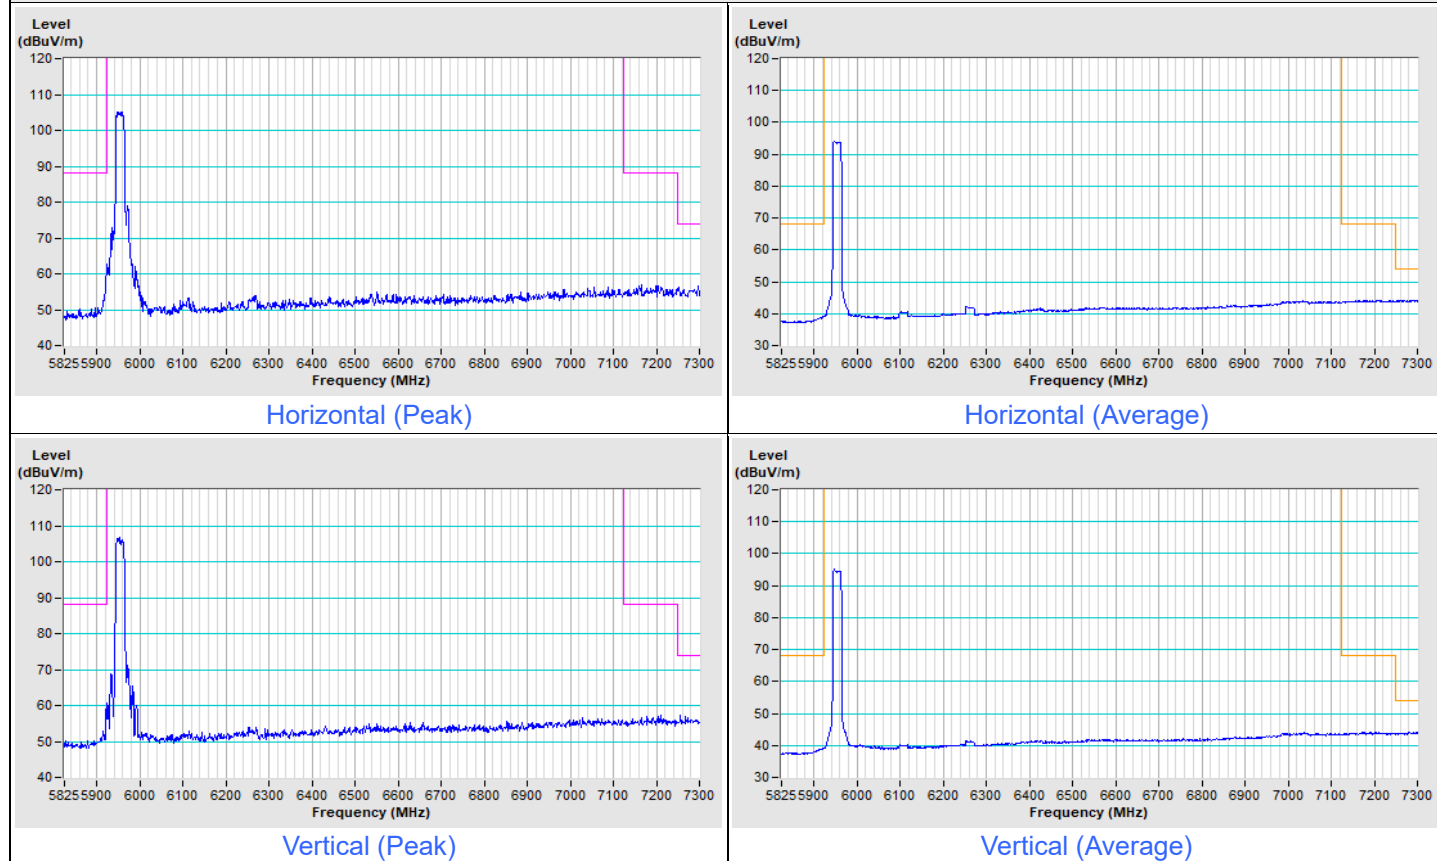


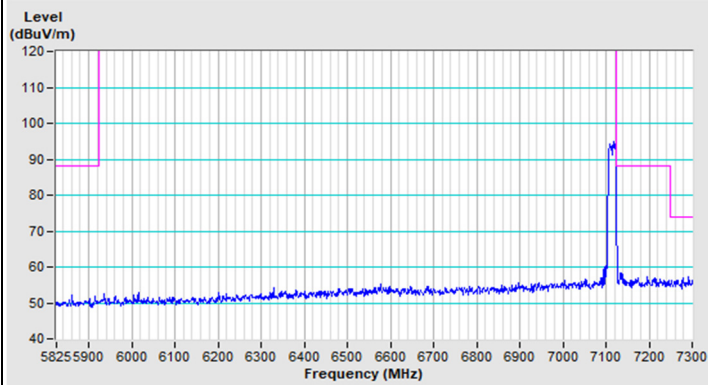802.11be (EHT20) Channel 233


Horizontal (Peak)

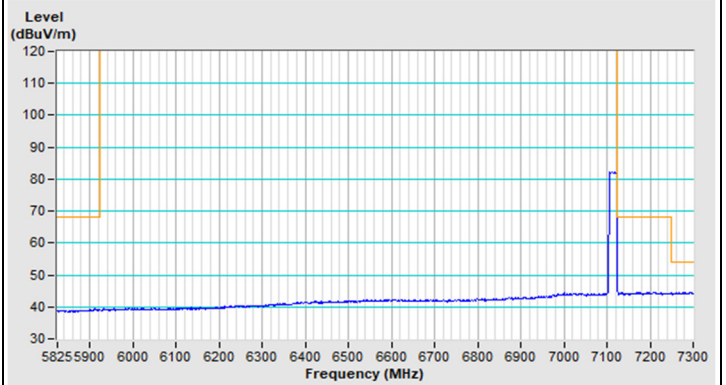

Horizontal (Average)

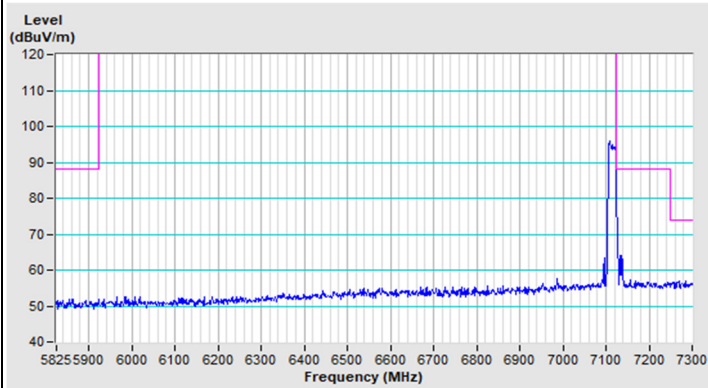


Vertical (Peak)

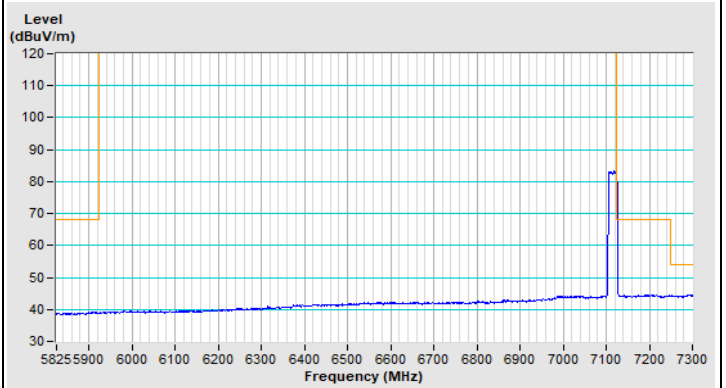


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

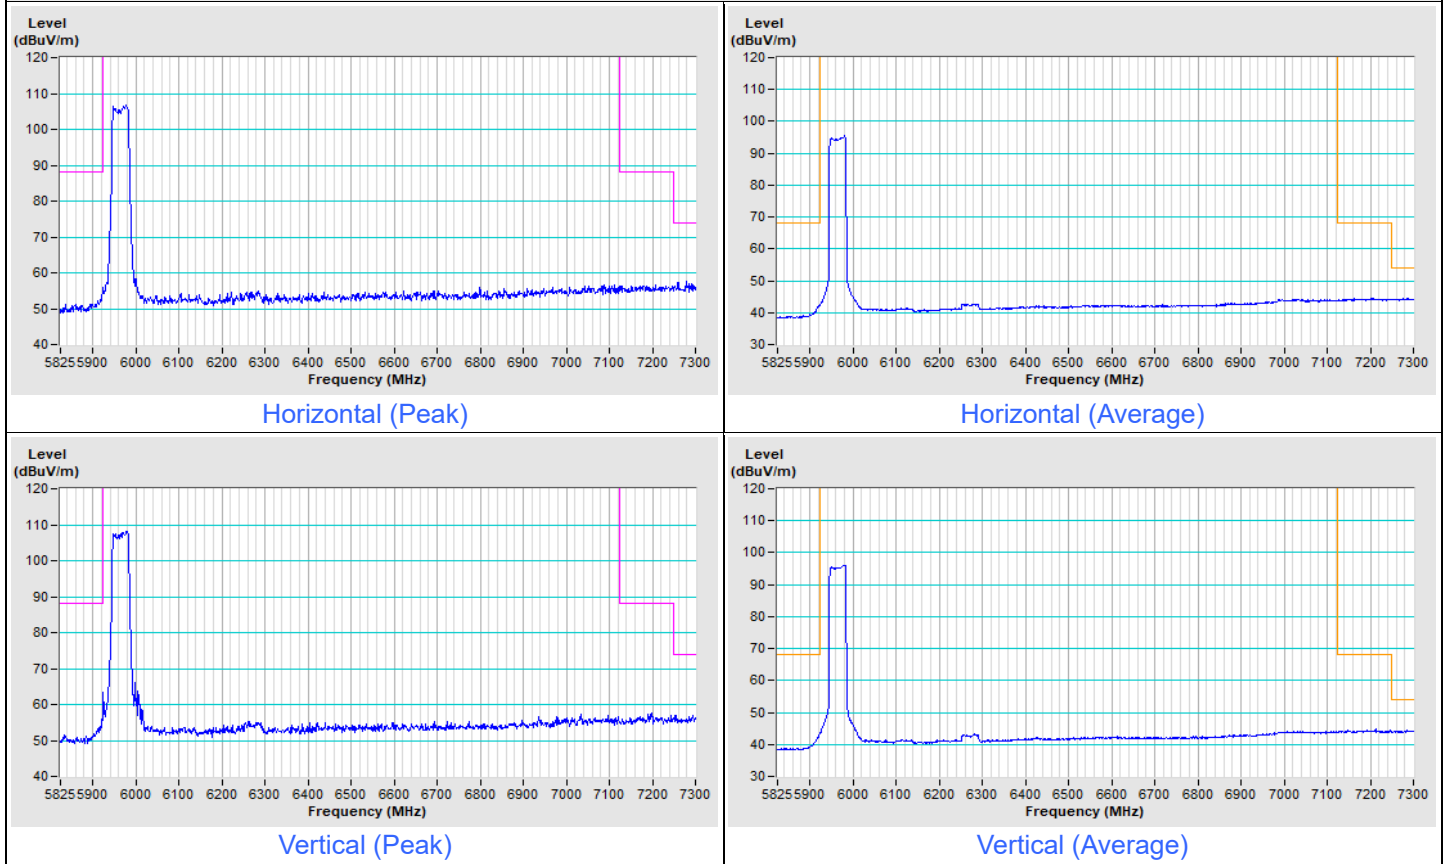


802.11be (EHT40) Channel 227

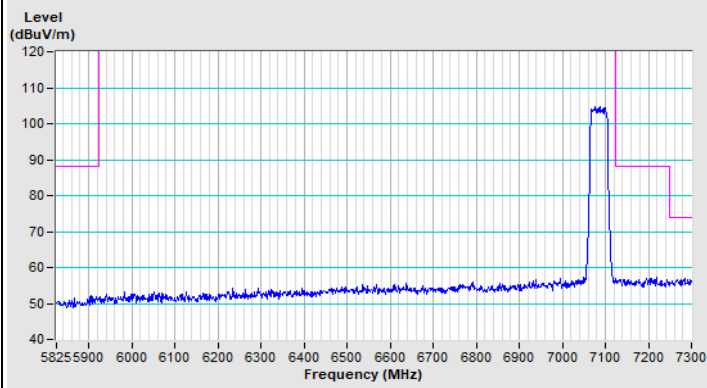


Horizontal (Peak)

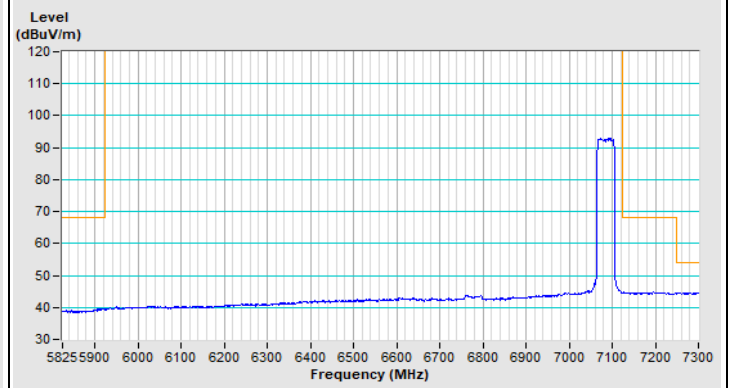

Horizontal (Average)

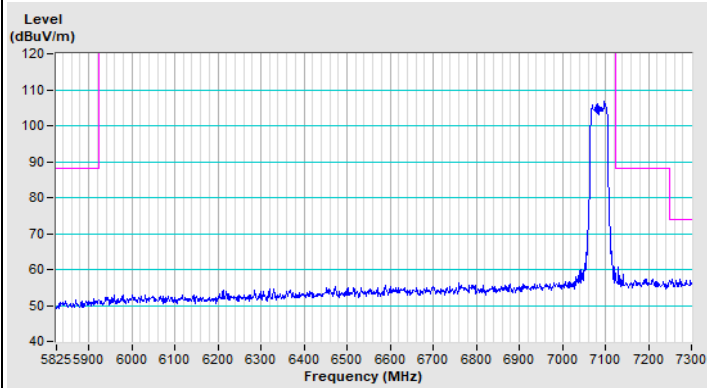


Vertical (Peak)

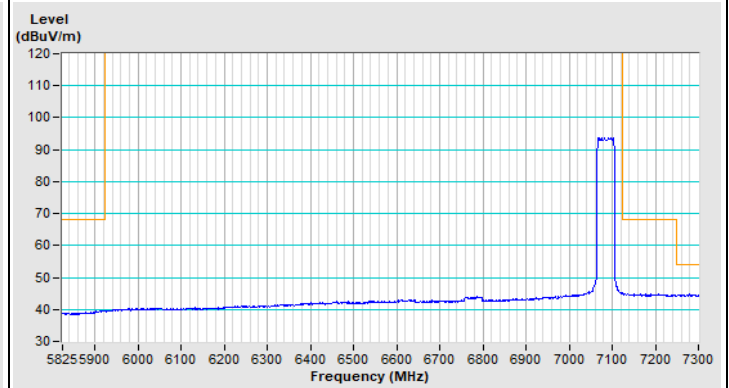


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

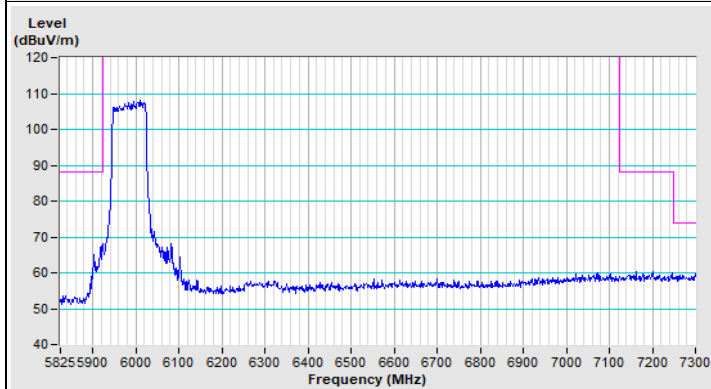


Horizontal (Peak)

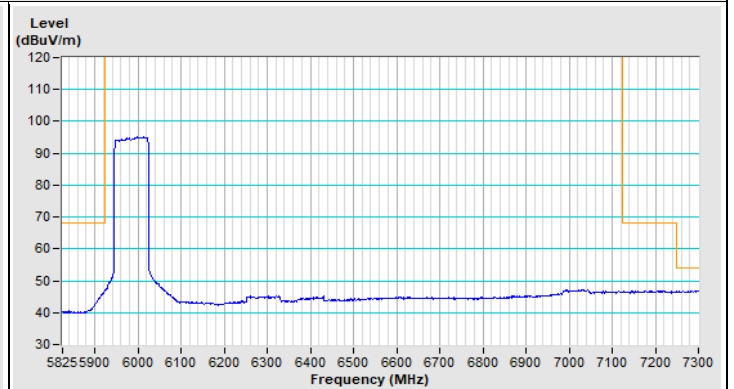


Horizontal (Average)

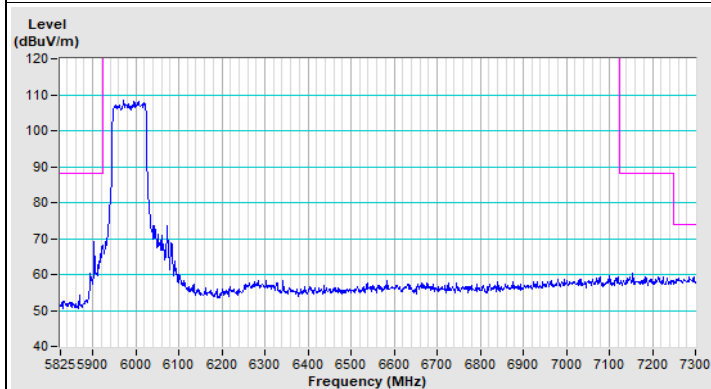


Vertical (Peak)

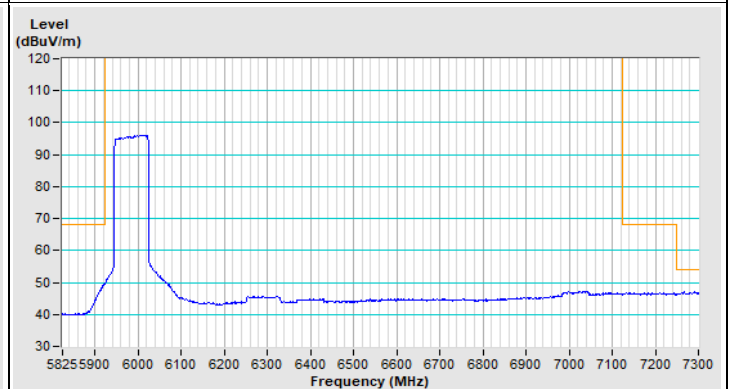


Vertical (Average)

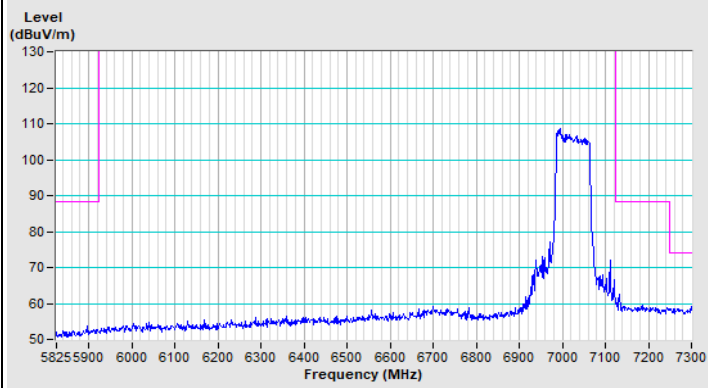802.11be (EHT80) Channel 215


Horizontal (Peak)

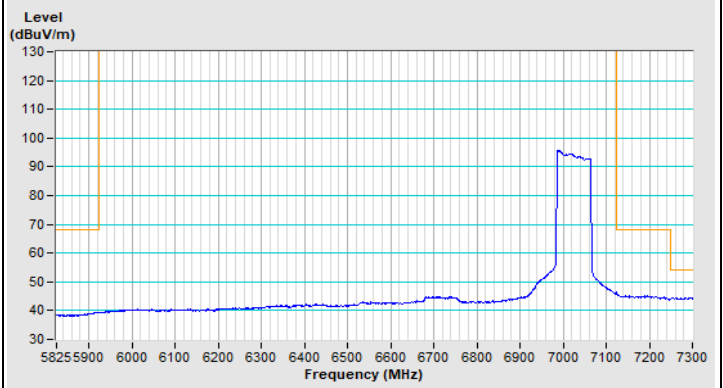

Horizontal (Average)

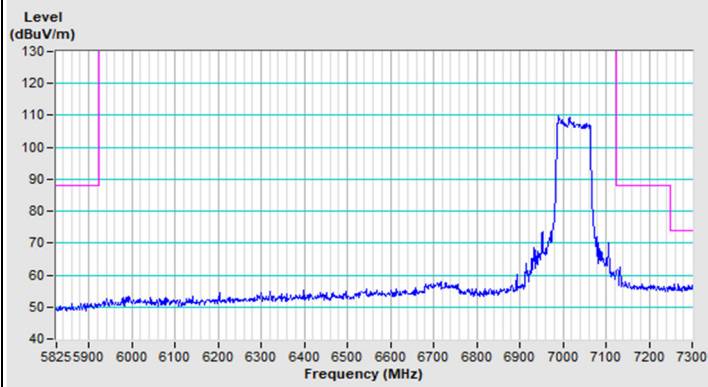


Vertical (Peak)

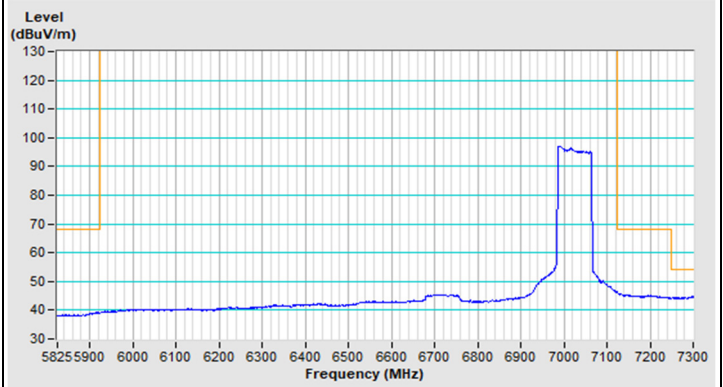


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

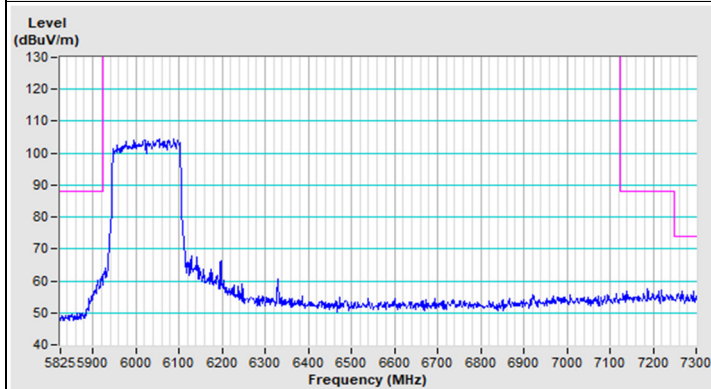


Horizontal (Peak)

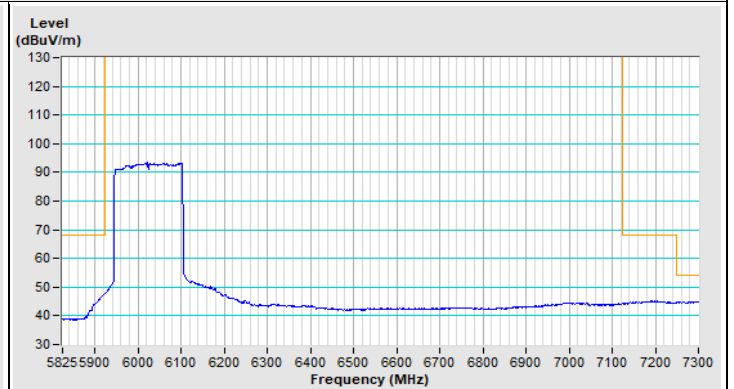

Horizontal (Average)

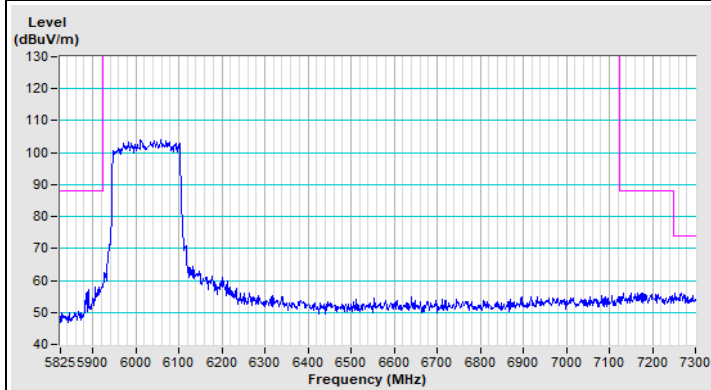


Vertical (Peak)

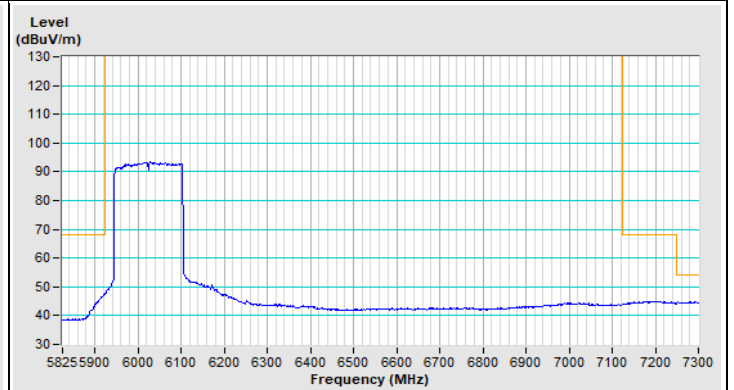


Vertical (Average)


802.11be (EHT160) Channel 207

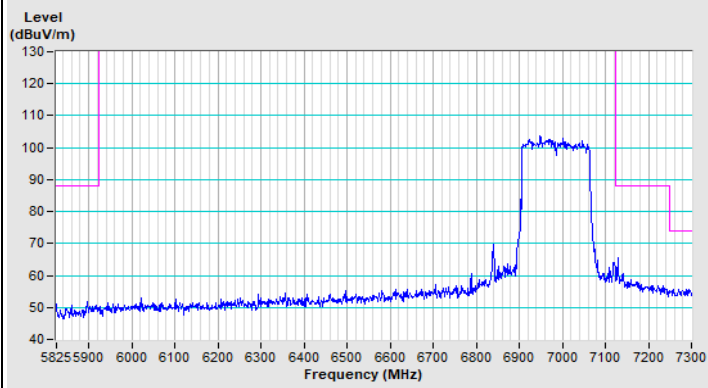


Horizontal (Peak)

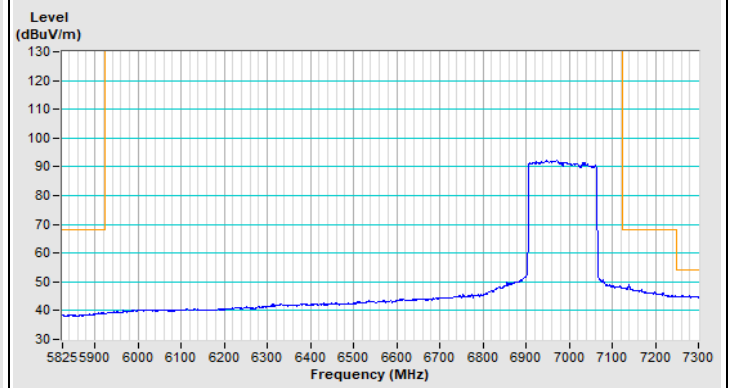

Horizontal (Average)

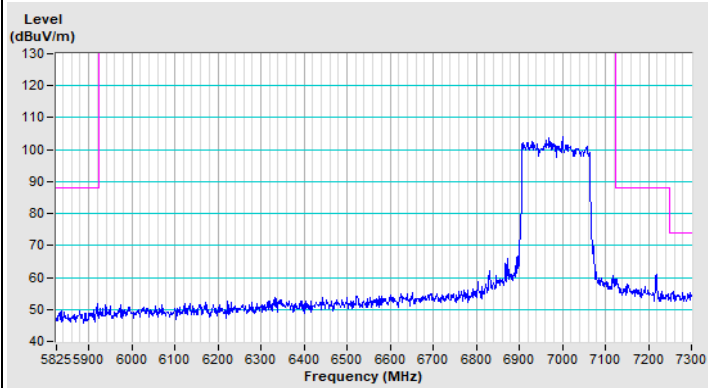


Vertical (Peak)

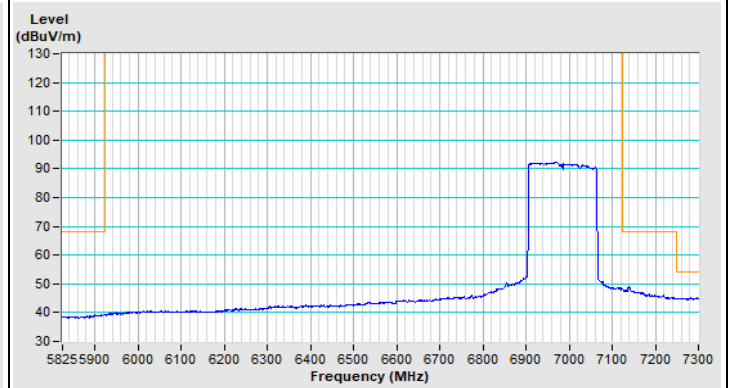


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

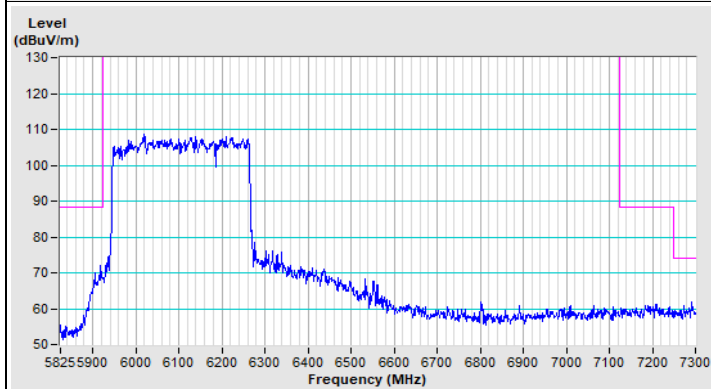


Horizontal (Peak)

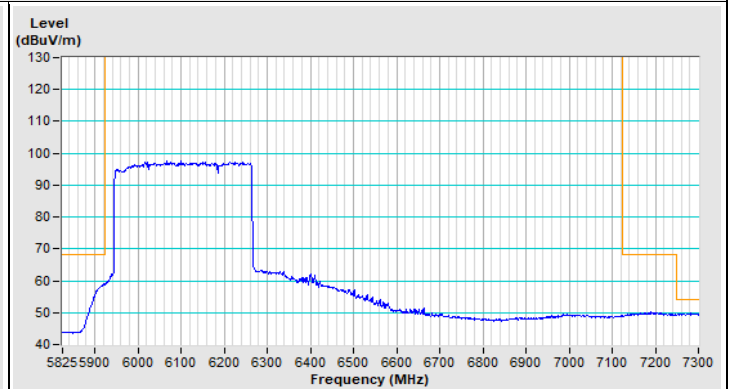

Horizontal (Average)

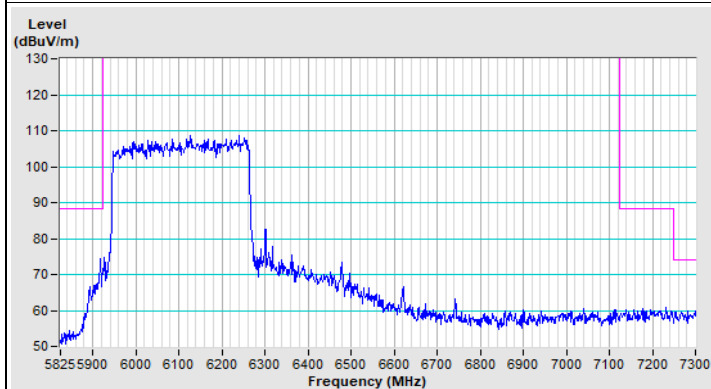


Vertical (Peak)

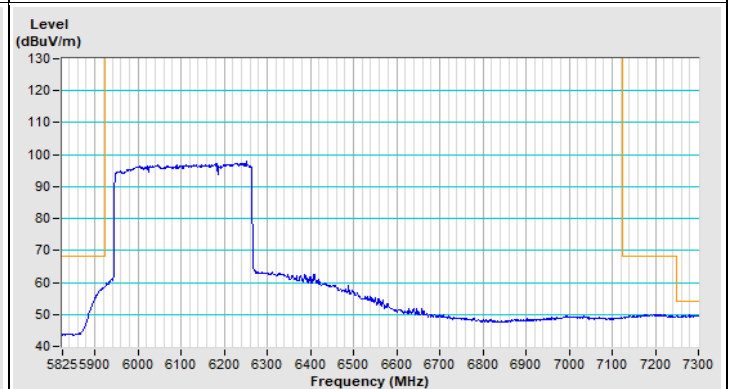


Vertical (Average)


802.11be (EHT320) Channel 191

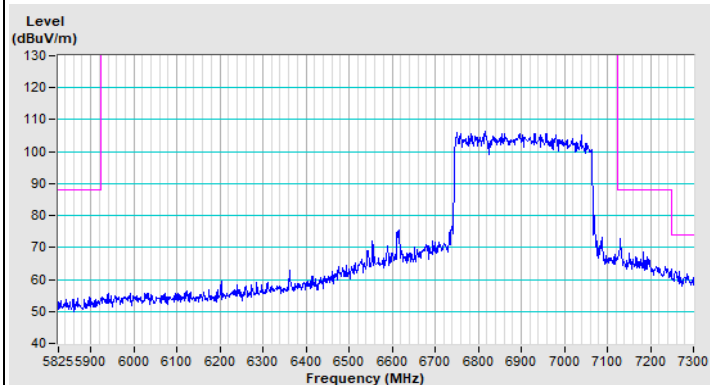


Horizontal (Peak)

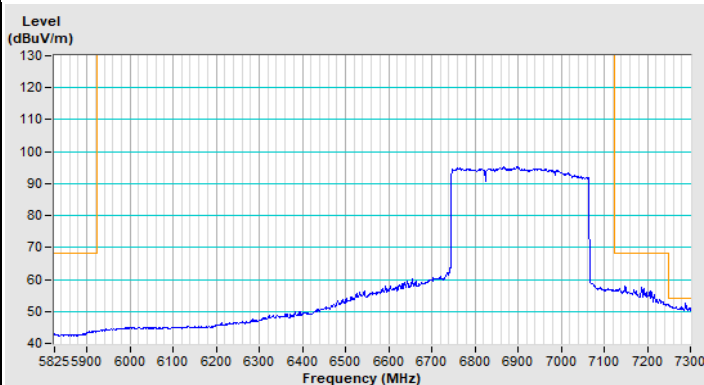

Horizontal (Average)

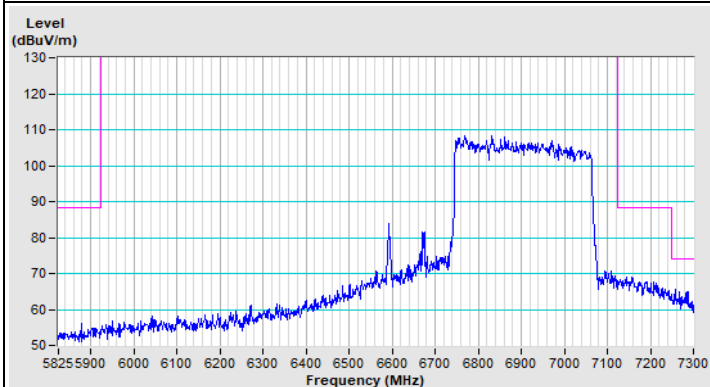

Vertical (Peak)

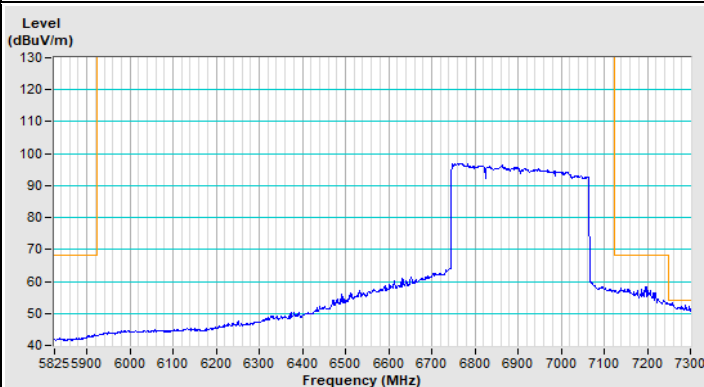


Vertical (Average)


Beamforming (4T4S)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 1

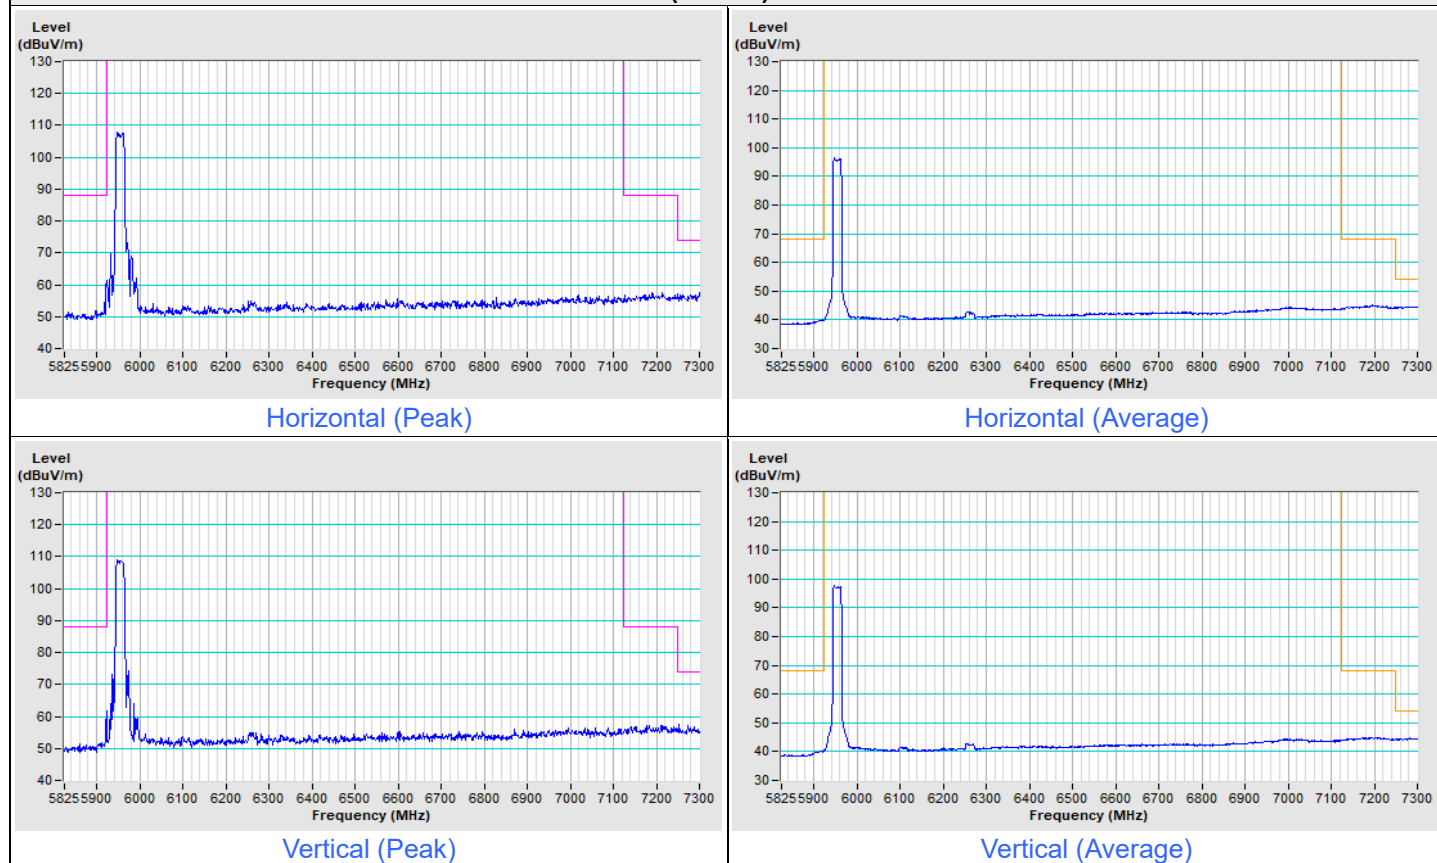


802.11be (EHT20) Channel 233

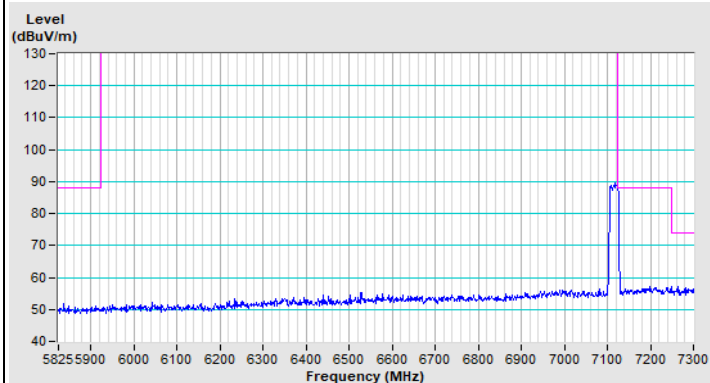


Horizontal (Peak)

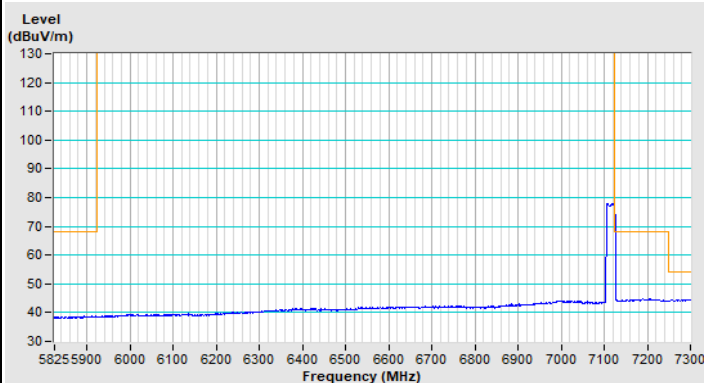

Horizontal (Average)

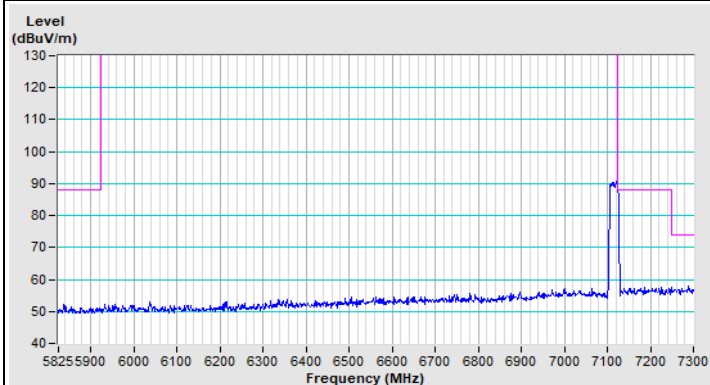


Vertical (Peak)

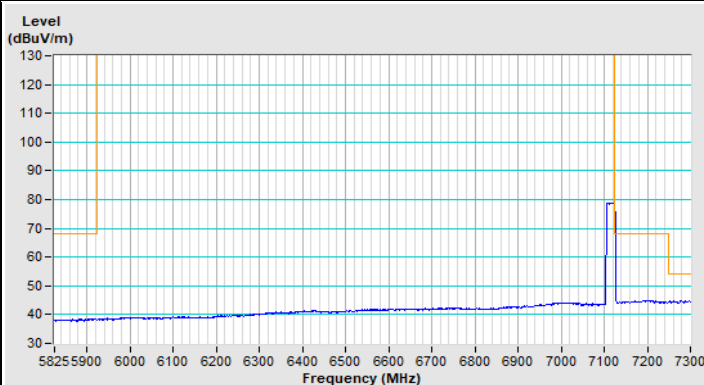


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

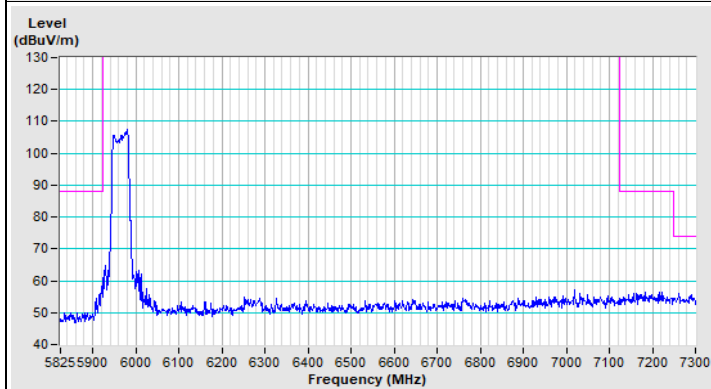


Horizontal (Peak)

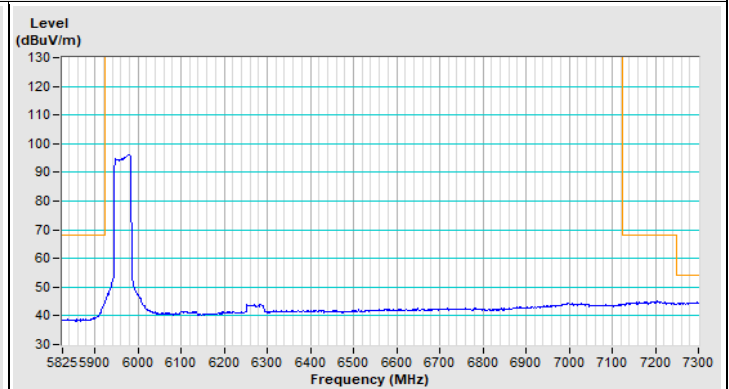

Horizontal (Average)

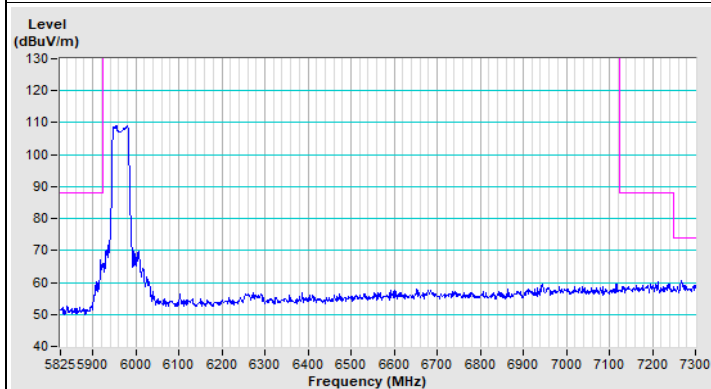


Vertical (Peak)

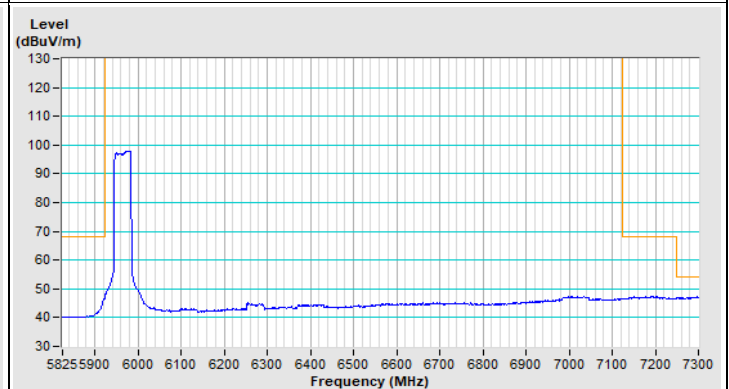


Vertical (Average)


802.11be (EHT40) Channel 227

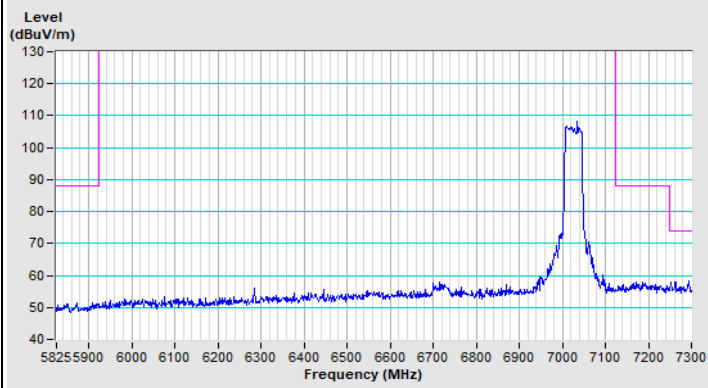


Horizontal (Peak)

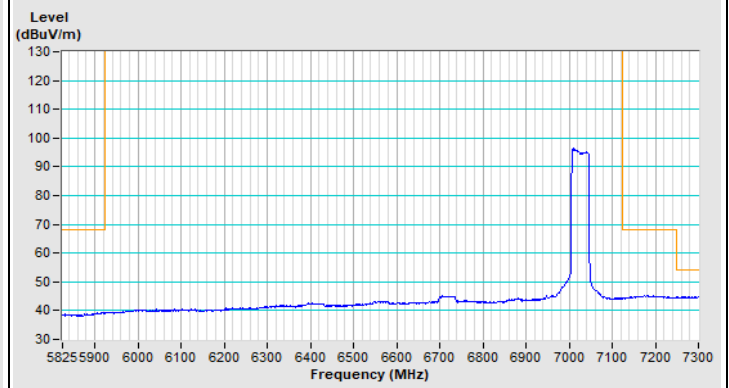

Horizontal (Average)

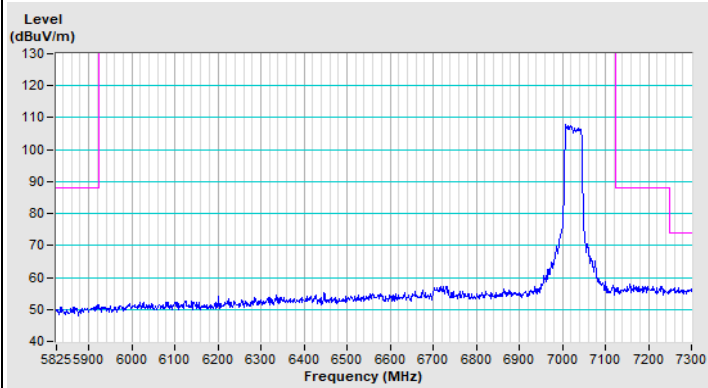


Vertical (Peak)

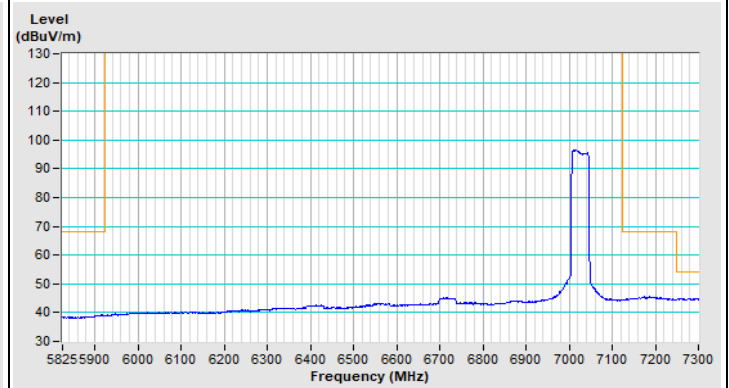


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

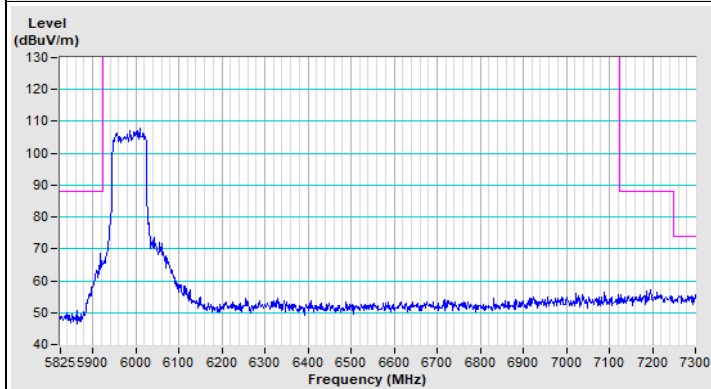


Horizontal (Peak)

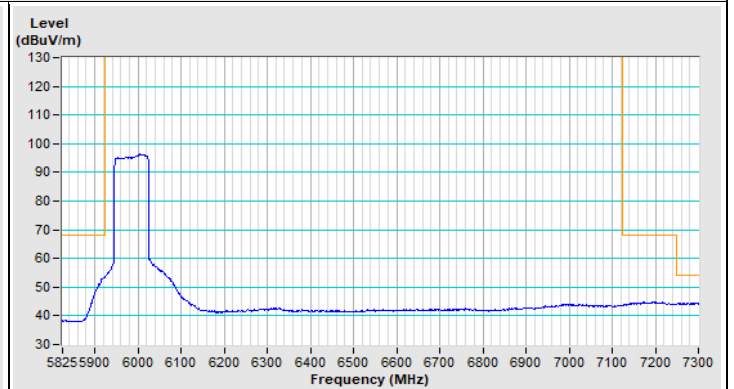


Horizontal (Average)

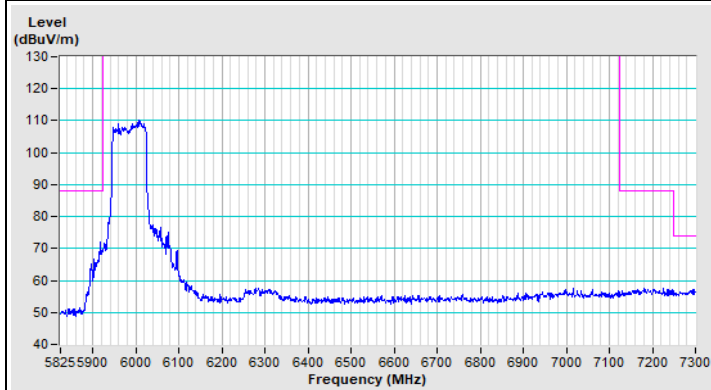


Vertical (Peak)

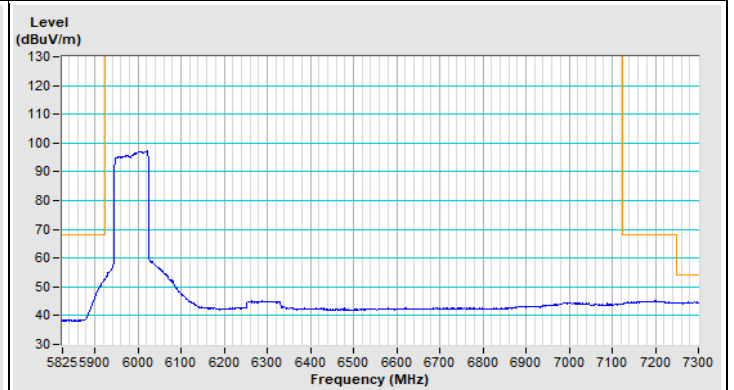


Vertical (Average)

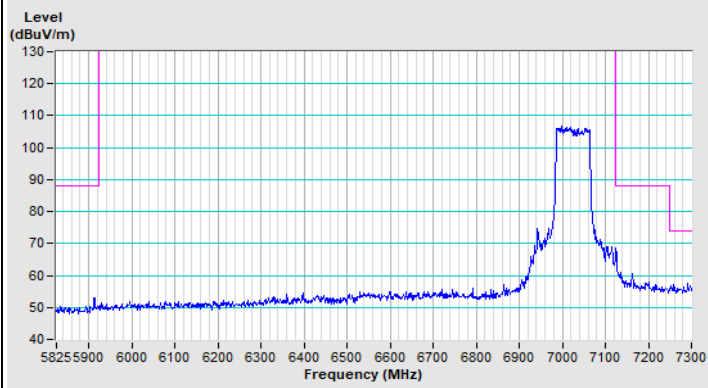802.11be (EHT80) Channel 215


Horizontal (Peak)

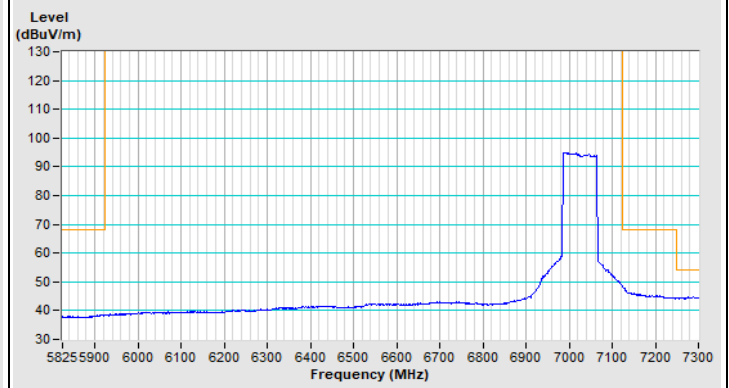

Horizontal (Average)

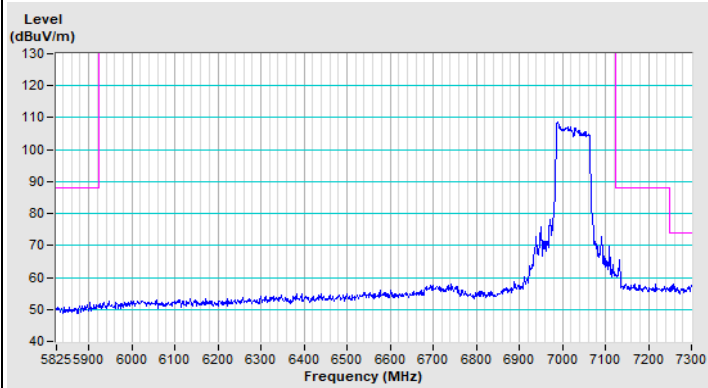


Vertical (Peak)

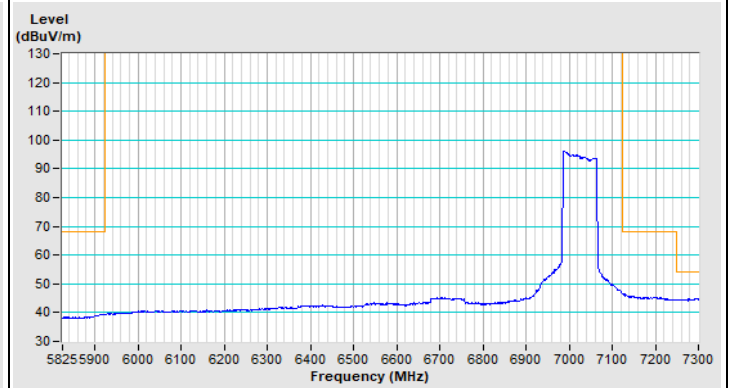


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

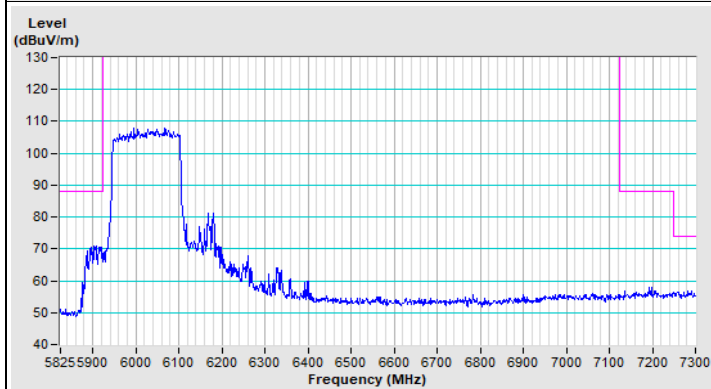


Horizontal (Peak)

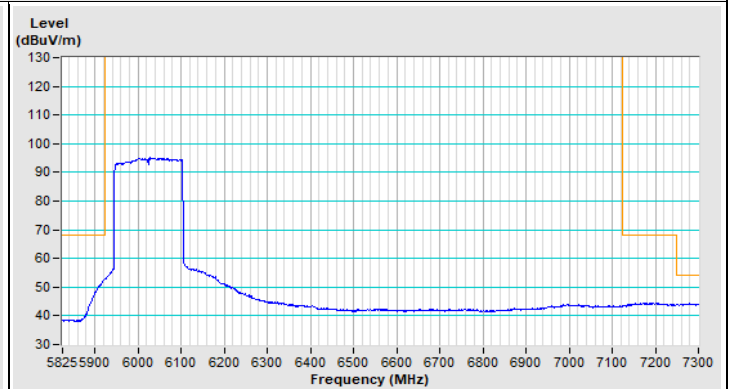

Horizontal (Average)

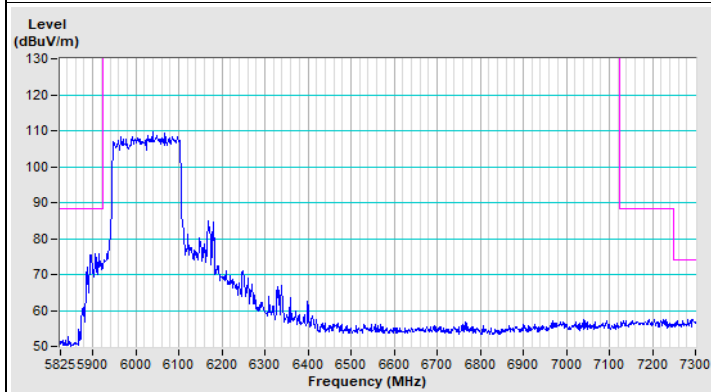


Vertical (Peak)

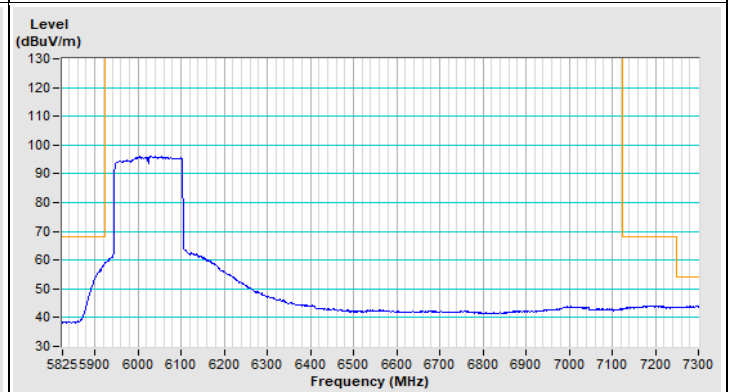


Vertical (Average)


802.11be (EHT160) Channel 207

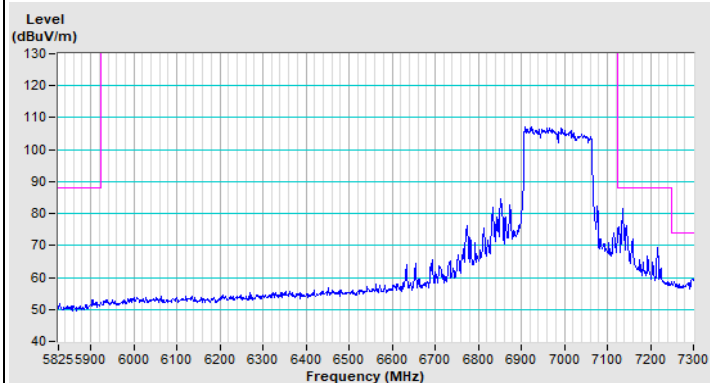


Horizontal (Peak)

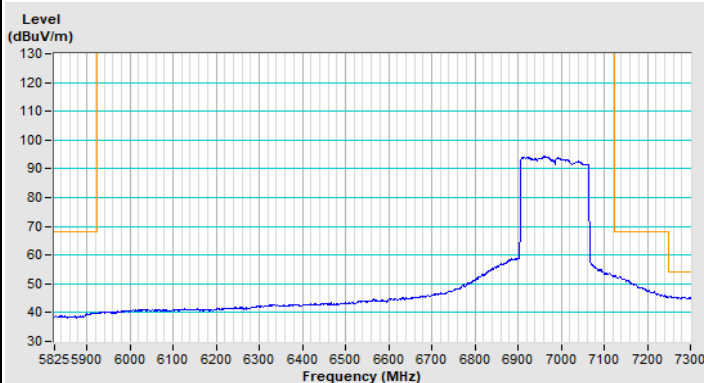

Horizontal (Average)

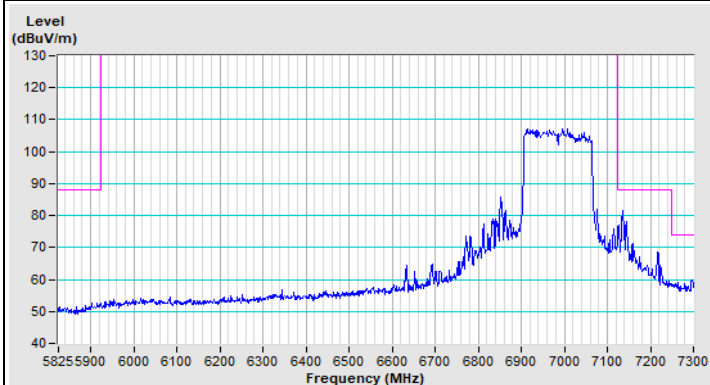


Vertical (Peak)

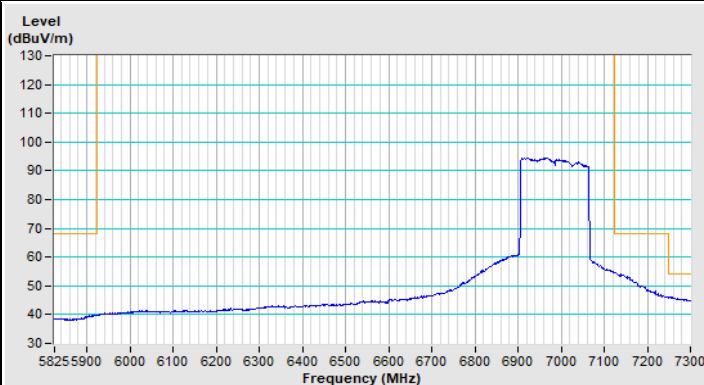


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

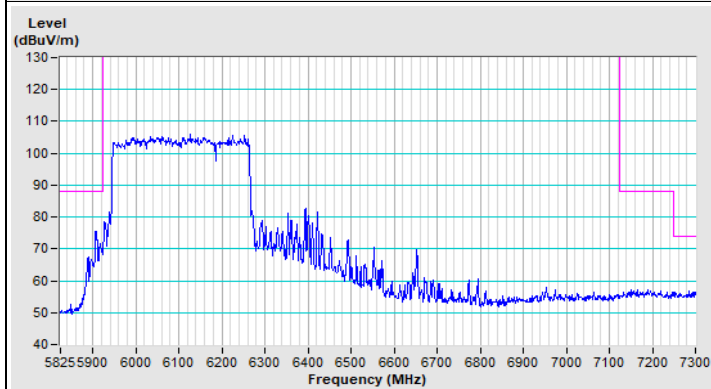


Horizontal (Peak)

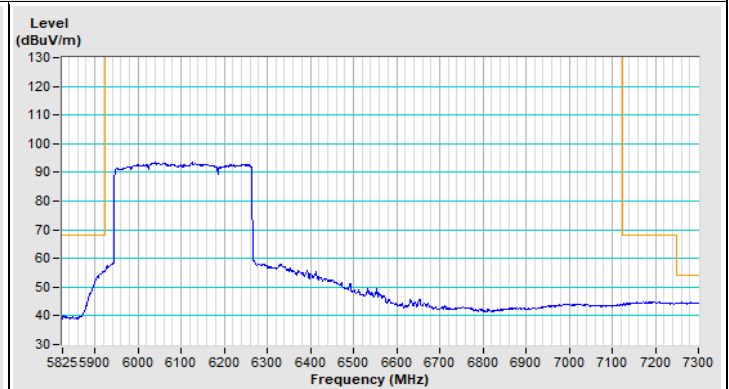

Horizontal (Average)

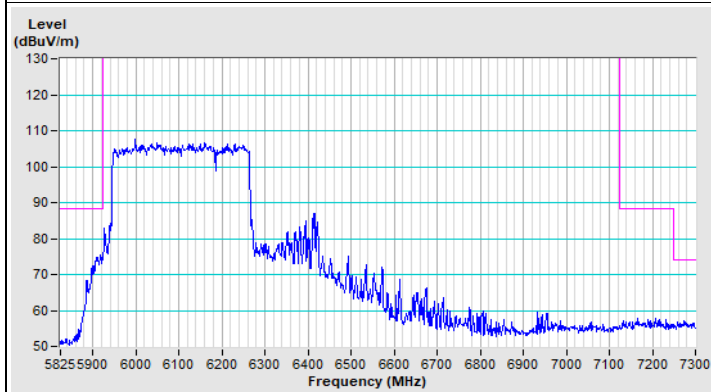


Vertical (Peak)

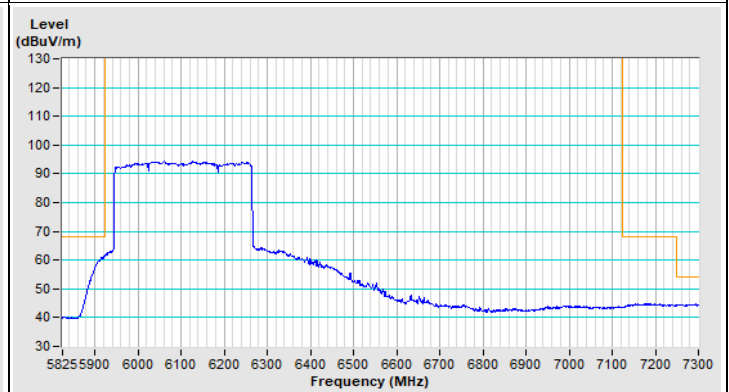


Vertical (Average)


802.11be (EHT320) Channel 191

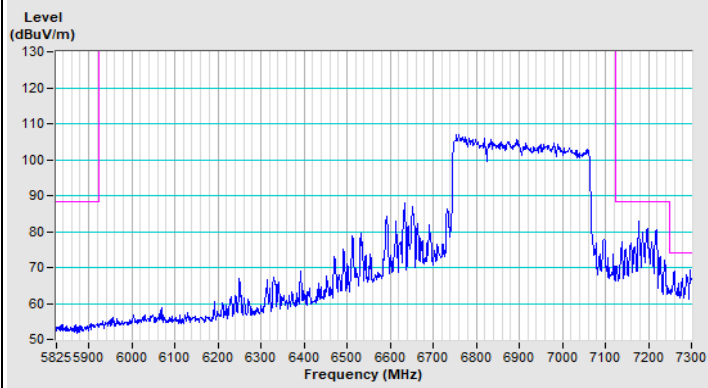


Horizontal (Peak)

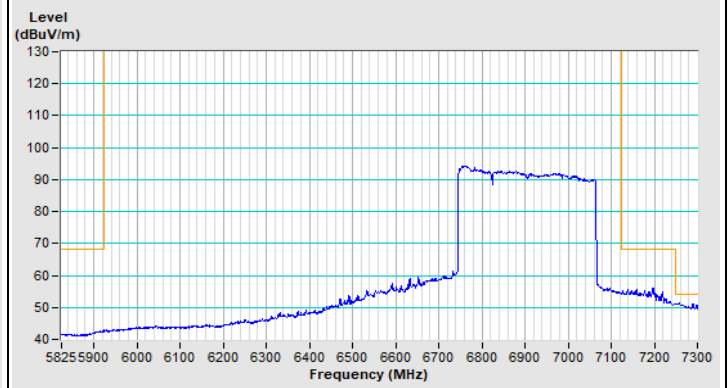

Horizontal (Average)

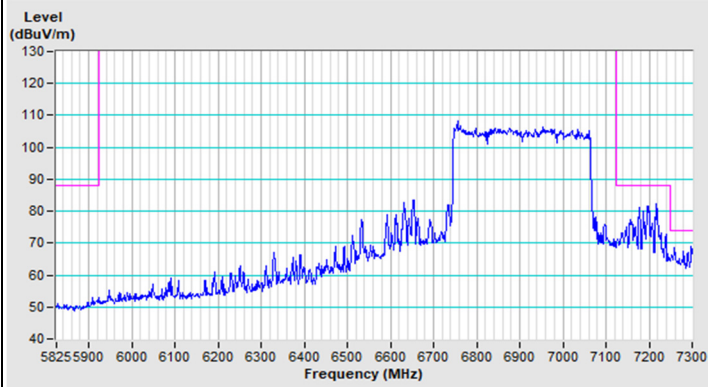

Vertical (Peak)

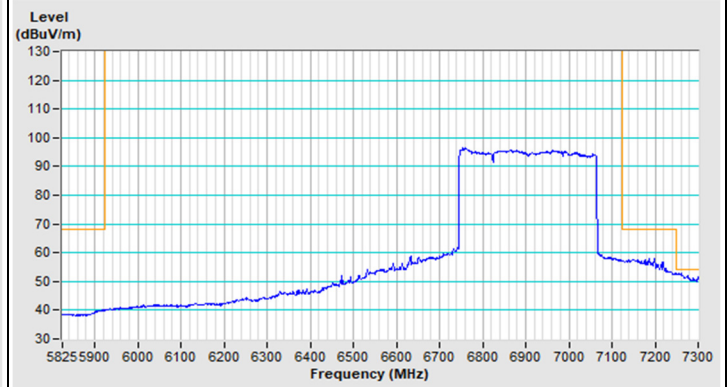

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---