



TEST REPORT

Report No.: **CHEW21100078** Report verification : 

Project No.: **SHT2109065202EW**

FCC ID.....: **2AZYA-AS8W**

Applicant's name.....: **Senwa Global International, S.A. de C.V.**

Address.....: Carretera Mexico-Toluca No. 5324 PB, Colonia El Yaqui Del. Cuajimalpa de Morelos, C.P. 05320 Ciudad de Mexico, Mexico

Test item description: **Tablet**

Trade Mark: ACER

Model/Type reference.....: SOSPIRO-AS8W

Listed Model(s): -

Standard: **47 CFR FCC Part 15 Subpart B**

Date of receipt of test sample.....: Sept.24, 2021

Date of testing.....: Sept.24, 2021- Oct.18, 2021

Date of issue.....: Oct.19, 2021

Result.....: **Pass**

Compiled by
 (position+printed name+signature)..: File administrators Echo Wei

Supervised by
 (position+printed name+signature)..: Project Engineer Kiki Kong

Approved by
 (position+printed name+signature)..: RF Manager Hans Hu

Echo Wei

Kiki Kong

Hans Hu

Testing Laboratory Name: **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Contents

| | | |
|-----------|---|------------------|
| 1. | <u>TEST STANDARDS AND REPORT VERSION</u> | <u>3</u> |
| 1.1. | Test Standards | 3 |
| 1.2. | Report version information | 3 |
| 2. | <u>TEST DESCRIPTION</u> | <u>4</u> |
| 3. | <u>SUMMARY.....</u> | <u>5</u> |
| 3.1. | Client Information | 5 |
| 3.2. | Product Description | 5 |
| 3.3. | EUT operation mode | 5 |
| 3.4. | Configuration of Tested System | 6 |
| 3.5. | Support unit used in test configuration | 6 |
| 4. | <u>TEST ENVIRONMENT</u> | <u>7</u> |
| 4.1. | Testing Laboratory Information | 7 |
| 4.2. | Environmental conditions | 7 |
| 4.3. | Statement of the measurement uncertainty | 7 |
| 4.4. | Equipments Used during the Test | 8 |
| 5. | <u>TEST CONDITIONS AND RESULTS</u> | <u>9</u> |
| 5.1. | Conducted Emissions Test | 9 |
| 5.2. | Radiated Emissions Test | 12 |
| 6. | <u>TEST SETUP PHOTOS OF THE EUT</u> | <u>17</u> |
| 7. | <u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u> | <u>18</u> |

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version information

| Revision No. | Date of issue | Description |
|--------------|---------------|-------------|
| N/A | 2021-10-19 | Original |
| | | |
| | | |
| | | |
| | | |

2. TEST DESCRIPTION

| Test Item | Section in CFR 47 | Result | Test Engineer |
|---------------------|-------------------|--------|---------------|
| Conducted Emissions | 15.107(a) | PASS | Jian Li |
| Radiated Emissions | 15.109(a) | PASS | Hongbin Zhong |

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

| | |
|---------------|--|
| Applicant: | Senwa Global International, S.A. de C.V. |
| Address: | Carretera Mexico-Toluca No. 5324 PB, Colonia El Yaqui Del. Cuajimalpa de Morelos, C.P. 05320 Ciudad de Mexico, Mexico |
| Manufacturer: | Q2 COMMUNICATION TECHNOLOGY LIMITED |
| Address: | Room 401, Building A, Baihui Creative Park, No. 5185, Yiyuan Road, Xin 'an Street, Bao 'an District, Shenzhen, Guangdong |
| Factory: | Q2 COMMUNICATION TECHNOLOGY LIMITED |
| Address: | Room 401, Building A, Baihui Creative Park, No. 5185, Yiyuan Road, Xin 'an Street, Bao 'an District, Shenzhen, Guangdong |

3.2. Product Description


| | |
|----------------------|---|
| Name of EUT: | Tablet |
| Trade Mark: | ACER |
| Model No.: | SOSPIRO-AS8W |
| Listed Model(s) | - |
| Power supply: | DC 3.7V |
| Battery Information: | 3.7V 4000mAh 14.8Wh |
| Adapter Information: | Model: JK050200-S86USU Input: 100-240Va.c.,50/60Hz 0.5A Output: 5.0Vd.c.,2A 10W |
| Hardware version: | ACER_AS8W_Ver 01 |
| Software version: | ACER_AS8W_Ver 01 |

3.3. EUT operation mode

| Test mode | Describe |
|-----------------------|--|
| Camera recording mode | Keep the EUT in Camera recording status |
| Video Playing mode | Keep the EUT in Video Playing status |
| Data exchange mode | Keep the EUT in Data exchange with PC status |

Pre-scan all of above modes. Only show data exchange mode for conducted emission, and data exchange mode for radiated emission, which is the worst case on the report.

3.4. Configuration of Tested System

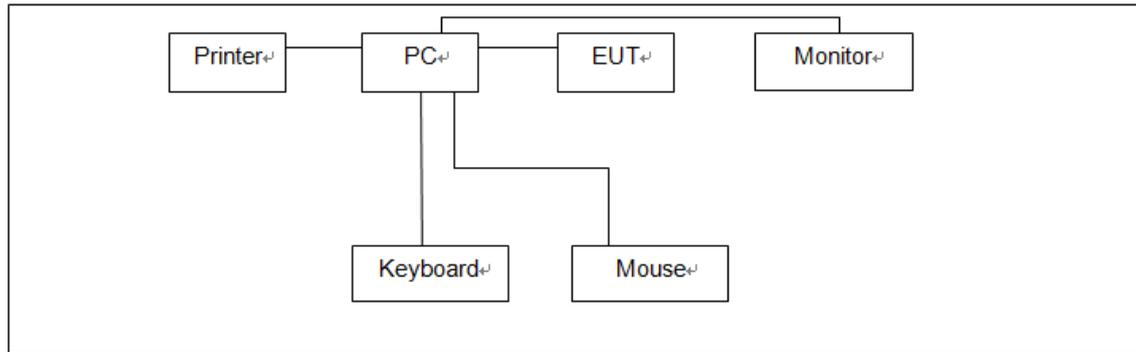

3.5. Support unit used in test configuration

| Item | Equipment | Manufacturer | Model No. | FCC ID / FCC DoC | Data Cable | Power Cord |
|------|-----------|--------------|------------------|------------------|------------------|-----------------|
| 1 | PC | DELL | OptiPlex 3020 MT | FCC DoC | N/A | Unshielded 1.8m |
| 2 | Monitor | DELL | E1912Hf | FCC DoC | N/A | Unshielded 1.8m |
| 3 | Keyboard | DELL | SK8115 | FCC DoC | Unshielded, 1.5m | N/A |
| 4 | Mouse | DELL | MS111-T | FCC DoC | Unshielded, 1.5m | N/A |
| 5 | Printer | EPSON | L101 | FCC DoC | N/A | Unshielded 1.8m |

4. TEST ENVIRONMENT

4.1. Testing Laboratory Information

| | | |
|----------------------|---|----------------------|
| Laboratory Name | Shenzhen Huatongwei International Inspection Co., Ltd. | |
| Laboratory Location | 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China | |
| Connect information: | Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn | |
| Qualifications | Type | Accreditation Number |
| | FCC | 762235 |

4.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|--------------------|-------------|
| Temperature: | 15~35°C |
| Relative Humidity: | 30~60 % |
| Air Pressure: | 950~1050mba |

4.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emissions | 30~1000MHz | 4.90 dB | (1) |
| Radiated Emissions | 1~18GHz | 4.96 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.02 dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.4. Equipments Used during the Test

| ● Conducted Emission | | | | | | | |
|----------------------|---------------------|--------------------|---------------|----------------|---------------|---------------------------|---------------------------|
| Used | Test Equipment | Manufacturer | Equipment No. | Model No. | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) |
| ● | Shielded Room | Albatross projects | HTWE0114 | N/A | N/A | 2018/09/28 | 2023/09/27 |
| ● | EMI Test Receiver | R&S | HTWE0111 | ESCI | 101247 | 2021/9/14 | 2022/9/13 |
| ● | Artificial Mains | SCHWARZBECK | HTWE0113 | NNLK 8121 | 573 | 2021/9/17 | 2022/9/16 |
| ● | Pulse Limiter | R&S | HTWE0033 | ESH3-Z2 | 100499 | 2021/9/13 | 2022/9/12 |
| ● | RF Connection Cable | HUBER+SUHNER | HTWE0113-02 | ENVIROFLEX_142 | EF-NM-BNCM-2M | 2021/9/17 | 2022/9/16 |
| ● | Test Software | R&S | N/A | ES-K1 | N/A | N/A | N/A |

| ● Radiated Emission-6th test site | | | | | | | |
|-----------------------------------|-------------------------|--------------------|---------------|-------------|------------|---------------------------|---------------------------|
| Used | Test Equipment | Manufacturer | Equipment No. | Model No. | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) |
| ● | Semi-Anechoic Chamber | Albatross projects | HTWE0127 | SAC-3m-02 | C11121 | 2018/09/30 | 2022/09/29 |
| ● | EMI Test Receiver | R&S | HTWE0099 | ESCI | 100900 | 2021/9/14 | 2022/9/13 |
| ● | Ultra-Broadband Antenna | SCHWARZBECK | HTWE0119 | VULB9163 | 546 | 2020/04/28 | 2023/04/27 |
| ● | Pre-Amplifier | SCHWARZBECK | HTWE0295 | BBV 9742 | N/A | 2020/11/13 | 2021/11/12 |
| ● | RF Connection Cable | HUBER+SUHNER | HTWE0062-01 | N/A | N/A | 2021/02/26 | 2022/02/25 |
| ● | RF Connection Cable | HUBER+SUHNER | HTWE0062-02 | SUCOFLEX104 | 501184/4 | 2021/02/26 | 2022/02/25 |
| ● | Test Software | R&S | N/A | ES-K1 | N/A | N/A | N/A |

| ● Radiated emission-7th test site | | | | | | | |
|-----------------------------------|-------------------------|--------------------|---------------|-----------|------------|---------------------------|---------------------------|
| Used | Test Equipment | Manufacturer | Equipment No. | Model No. | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) |
| ● | Semi-Anechoic Chamber | Albatross projects | HTWE0122 | SAC-3m-01 | N/A | 2018/09/27 | 2022/09/26 |
| ● | Spectrum Analyzer | R&S | HTWE0098 | FSP40 | 100597 | 2021/9/13 | 2022/9/12 |
| ● | Horn Antenna | SCHWARZBECK | HTWE0126 | 9120D | 1011 | 2020/04/01 | 2023/03/31 |
| ● | Broadband Pre-amplifier | SCHWARZBECK | HTWE0201 | BBV 9718 | 9718-248 | 2021/03/05 | 2022/03/04 |
| ● | RF Connection Cable | HUBER+SUHNER | HTWE0126-01 | RE-7-FH | N/A | 2021/03/05 | 2022/03/04 |
| ● | Test Software | Audix | N/A | E3 | N/A | N/A | N/A |

5. TEST CONDITIONS AND RESULTS

5.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

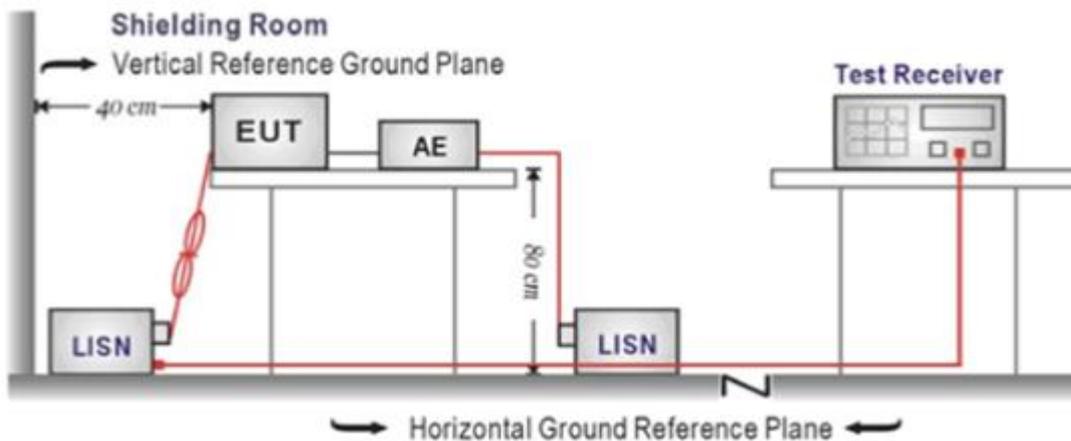

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Test Line:

L

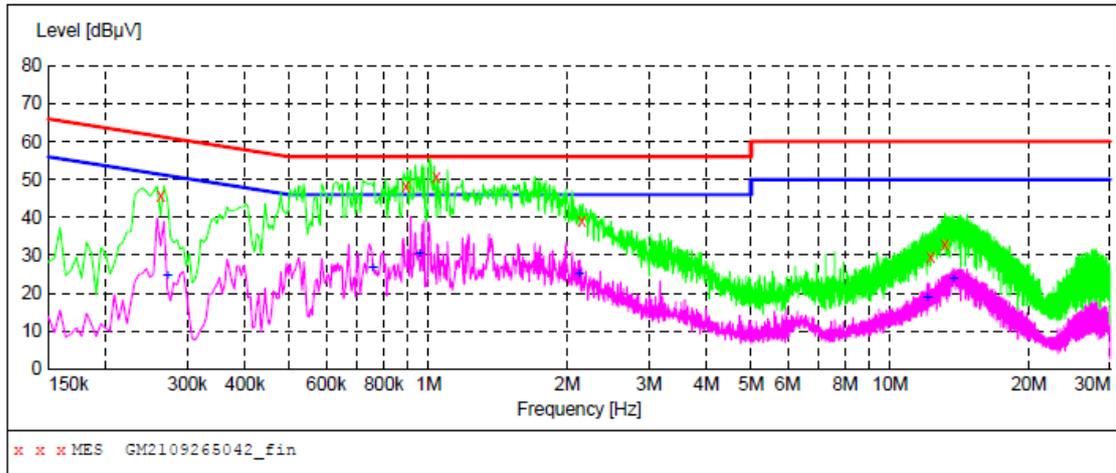

MEASUREMENT RESULT: "GM2109265042_fin"

9/26/2021 2:26PM

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.262500 | 45.70 | 10.2 | 61 | 15.7 | QP | L1 | GND |
| 0.892500 | 48.10 | 10.2 | 56 | 7.9 | QP | L1 | GND |
| 1.041000 | 50.70 | 10.2 | 56 | 5.3 | QP | L1 | GND |
| 2.148000 | 39.00 | 10.2 | 56 | 17.0 | QP | L1 | GND |
| 12.255000 | 29.70 | 10.3 | 60 | 30.3 | QP | L1 | GND |
| 13.159500 | 32.70 | 10.3 | 60 | 27.3 | QP | L1 | GND |


MEASUREMENT RESULT: "GM2109265042_fin2"

9/26/2021 2:26PM

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.271500 | 24.40 | 10.2 | 51 | 26.7 | AV | L1 | GND |
| 0.757500 | 26.60 | 10.2 | 46 | 19.4 | AV | L1 | GND |
| 0.955500 | 30.20 | 10.2 | 46 | 15.8 | AV | L1 | GND |
| 2.121000 | 24.80 | 10.2 | 46 | 21.2 | AV | L1 | GND |
| 12.075000 | 18.60 | 10.3 | 50 | 31.4 | AV | L1 | GND |
| 13.722000 | 23.80 | 10.3 | 50 | 26.2 | AV | L1 | GND |

Test Line:

N

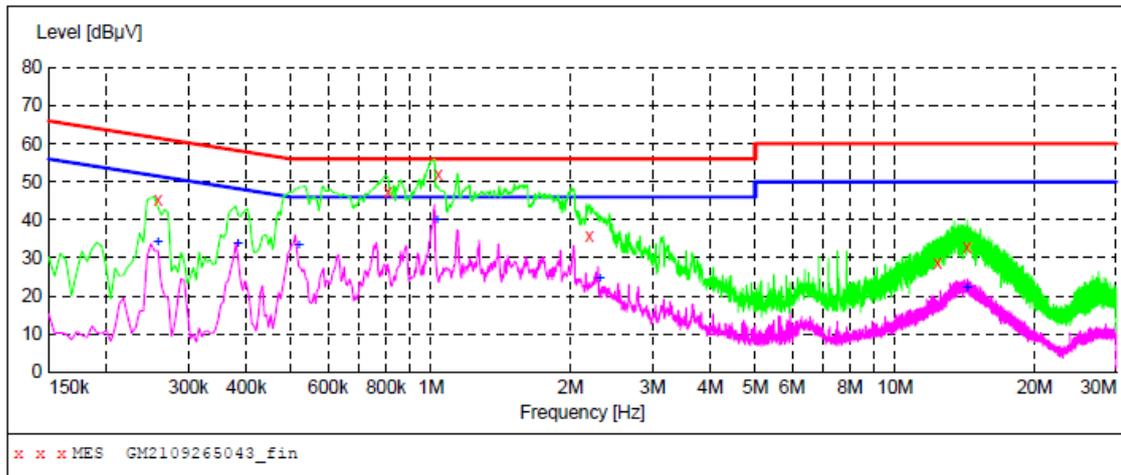

MEASUREMENT RESULT: "GM2109265043_fin"

9/26/2021 2:33PM

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.258000 | 45.50 | 10.2 | 62 | 16.0 | QP | L1 | GND |
| 0.807000 | 47.50 | 10.2 | 56 | 8.5 | QP | L1 | GND |
| 1.036500 | 52.10 | 10.2 | 56 | 3.9 | QP | L1 | GND |
| 2.193000 | 35.90 | 10.2 | 56 | 20.1 | QP | L1 | GND |
| 12.331500 | 28.70 | 10.3 | 60 | 31.3 | QP | L1 | GND |
| 14.311500 | 32.70 | 10.3 | 60 | 27.3 | QP | L1 | GND |

MEASUREMENT RESULT: "GM2109265043_fin2"

9/26/2021 2:33PM

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.258000 | 34.20 | 10.2 | 52 | 17.3 | AV | L1 | GND |
| 0.384000 | 33.80 | 10.2 | 48 | 14.4 | AV | L1 | GND |
| 0.519000 | 33.10 | 10.2 | 46 | 12.9 | AV | L1 | GND |
| 1.032000 | 40.10 | 10.2 | 46 | 5.9 | AV | L1 | GND |
| 2.314500 | 24.50 | 10.2 | 46 | 21.5 | AV | L1 | GND |
| 14.293500 | 22.10 | 10.3 | 50 | 27.9 | AV | L1 | GND |

5.2. Radiated Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.109


| Frequency | Limit (dBuV/m @3m) | Value |
|---------------|--------------------|------------|
| 30MHz-88MHz | 40.00 | Quasi-peak |
| 88MHz-216MHz | 43.50 | Quasi-peak |
| 216MHz-960MHz | 46.00 | Quasi-peak |
| 960MHz-1GHz | 54.00 | Quasi-peak |
| Above 1GHz | 54.00 | Average |
| | 74.00 | Peak |

TEST CONFIGURATION

➤ 30MHz ~ 1GHz

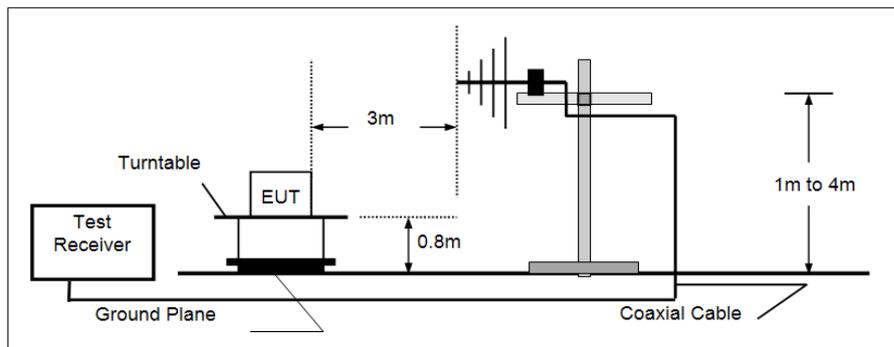

➤ Above 1GHz

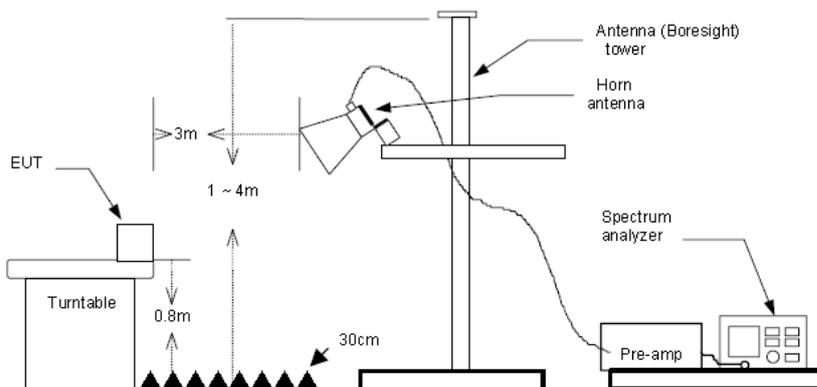

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground.
3. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
4. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
5. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz,
 - RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
 - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Passed **Not Applicable**

Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
The emission levels of frequency above 6GHz are very lower than limit and not show in test report.

Polarization:


Horizontal

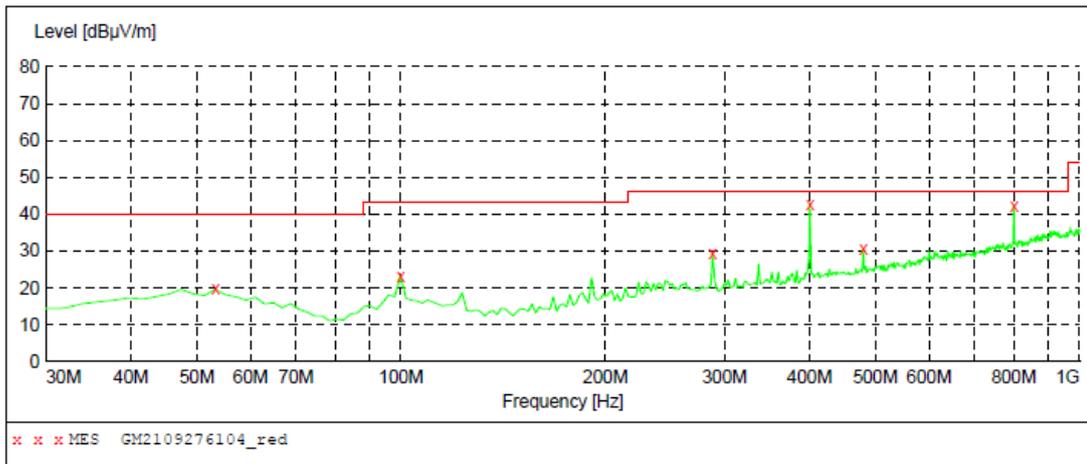



MEASUREMENT RESULT: "GM2109276104_red"

9/27/2021 9:44PM

| Frequency MHz | Level dBuV/m | Transd dB | Limit dBuV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 53.280000 | 19.70 | -8.9 | 40.0 | 20.3 | QP | 100.0 | 27.00 | HORIZONTAL |
| 99.840000 | 23.30 | -10.5 | 43.5 | 20.2 | QP | 300.0 | 295.00 | HORIZONTAL |
| 288.020000 | 29.40 | -7.4 | 46.0 | 16.6 | QP | 100.0 | 285.00 | HORIZONTAL |
| 400.540000 | 42.70 | -3.8 | 46.0 | 3.3 | QP | 100.0 | 99.00 | HORIZONTAL |
| 480.080000 | 30.40 | -2.2 | 46.0 | 15.6 | QP | 100.0 | 285.00 | HORIZONTAL |
| 800.180000 | 42.30 | 5.3 | 46.0 | 3.7 | QP | 100.0 | 296.00 | HORIZONTAL |

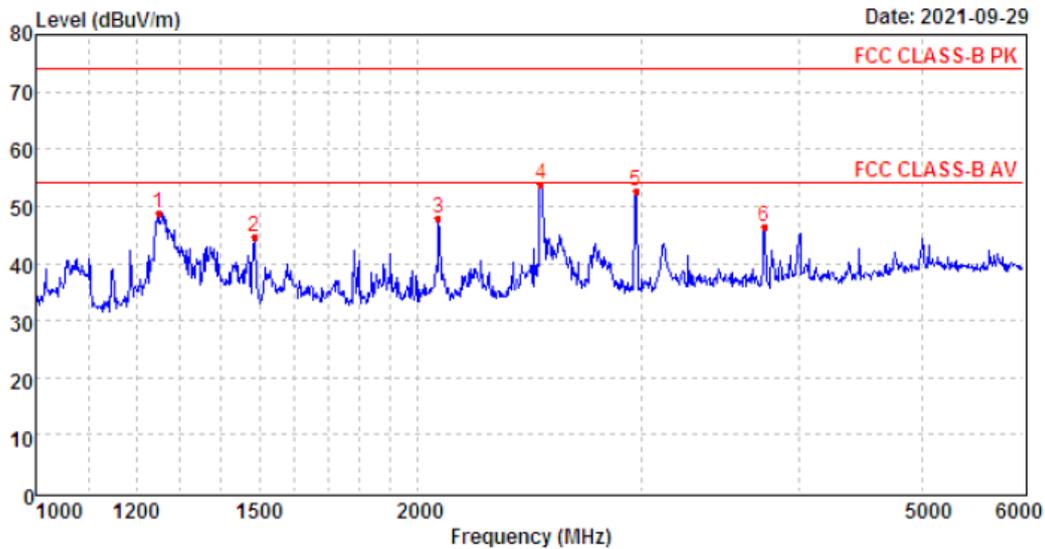


| Mark | Frequency MHz | Reading dBuV/m | Antenna dB | Cable dB | Preamp dB | Level dBuV/m | Limit dBuV/m | Over limit | Remark |
|------|---------------|----------------|------------|----------|-----------|--------------|--------------|------------|--------|
| 1 | 1248.79 | 55.44 | 25.89 | 3.95 | 36.50 | 48.78 | 74.00 | -25.22 | Peak |
| 2 | 1485.84 | 51.13 | 25.96 | 4.30 | 36.81 | 44.58 | 74.00 | -29.42 | Peak |
| 3 | 2077.24 | 53.17 | 26.83 | 5.12 | 37.18 | 47.94 | 74.00 | -26.06 | Peak |
| 4 | 2502.73 | 57.93 | 27.40 | 5.66 | 37.25 | 53.74 | 74.00 | -20.26 | Peak |
| 5 | 2972.46 | 55.14 | 28.70 | 6.18 | 37.46 | 52.56 | 74.00 | -21.44 | Peak |
| 6 | 3752.11 | 46.91 | 29.50 | 7.07 | 37.13 | 46.35 | 74.00 | -27.65 | Peak |

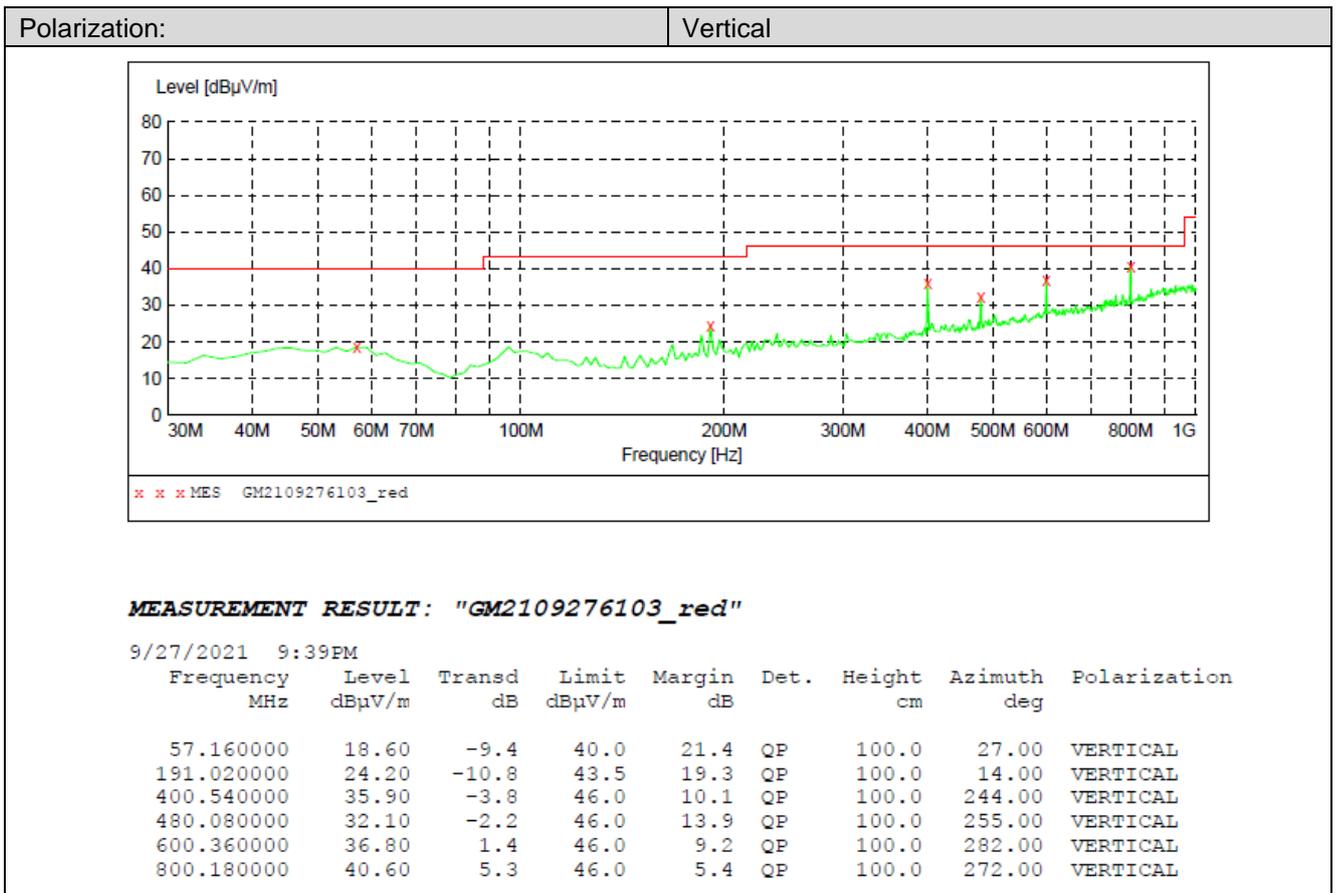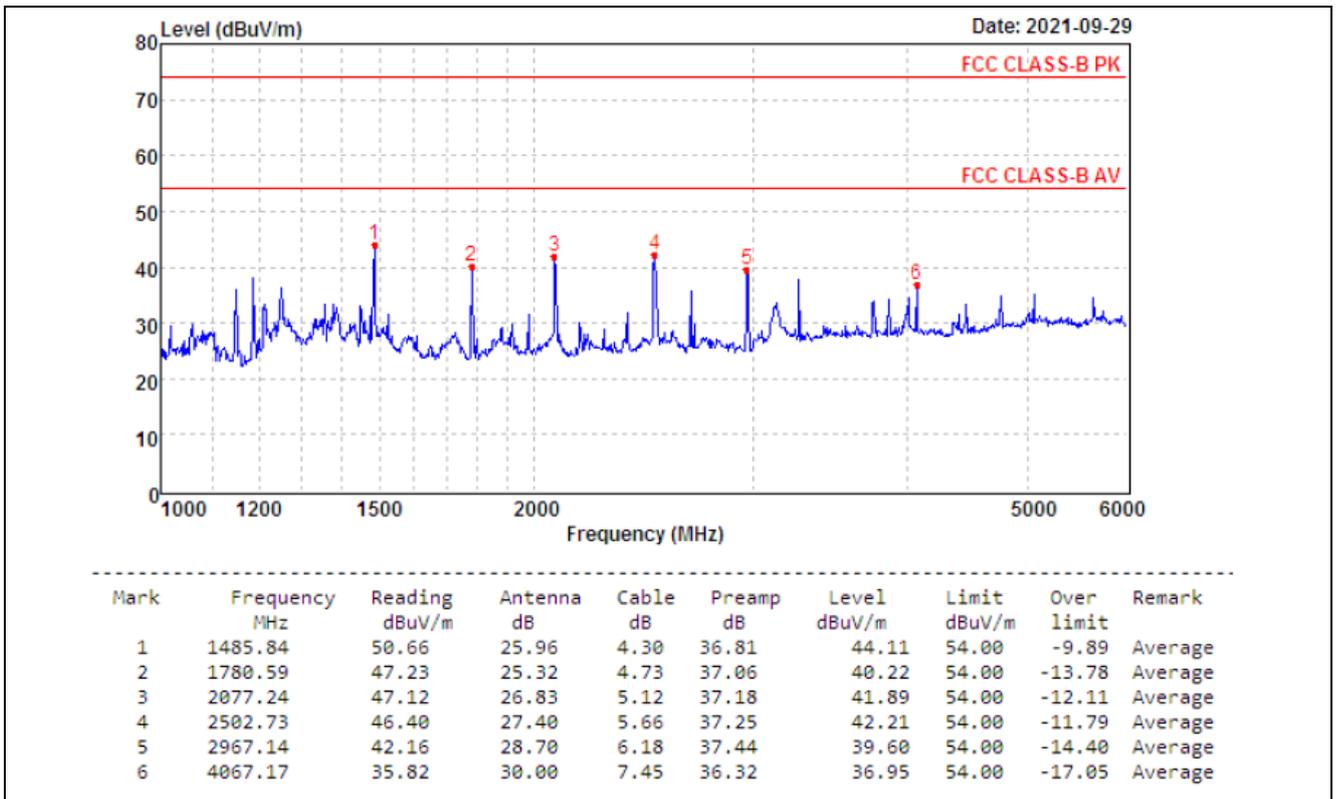



| Mark | Frequency MHz | Reading dBuV/m | Antenna dB | Cable dB | Preamp dB | Level dBuV/m | Limit dBuV/m | Over limit | Remark |
|------|------------------|-------------------|---------------|-------------|--------------|-----------------|-----------------|---------------|--------|
| 1 | 1248.79 | 56.76 | 25.89 | 3.95 | 36.50 | 50.10 | 74.00 | -23.90 | Peak |
| 2 | 1485.84 | 54.07 | 25.96 | 4.30 | 36.81 | 47.52 | 74.00 | -26.48 | Peak |
| 3 | 1780.59 | 51.15 | 25.32 | 4.73 | 37.06 | 44.14 | 74.00 | -29.86 | Peak |
| 4 | 2498.25 | 57.10 | 27.40 | 5.66 | 37.26 | 52.90 | 74.00 | -21.10 | Peak |
| 5 | 2972.46 | 56.57 | 28.70 | 6.18 | 37.46 | 53.99 | 74.00 | -20.01 | Peak |
| 6 | 3752.11 | 43.32 | 29.50 | 7.07 | 37.13 | 42.76 | 74.00 | -31.24 | Peak |

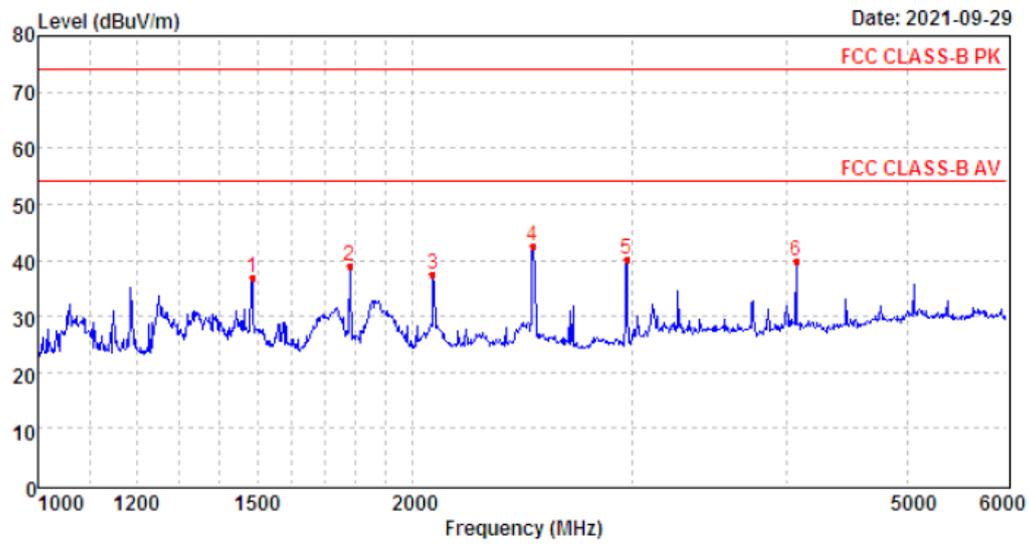

| Mark | Frequency MHz | Reading dBuV/m | Antenna dB | Cable dB | Preamp dB | Level dBuV/m | Limit dBuV/m | Over limit | Remark |
|------|------------------|-------------------|---------------|-------------|--------------|-----------------|-----------------|---------------|---------|
| 1 | 1485.84 | 43.33 | 25.96 | 4.30 | 36.81 | 36.78 | 54.00 | -17.22 | Average |
| 2 | 1780.59 | 45.98 | 25.32 | 4.73 | 37.06 | 38.97 | 54.00 | -15.03 | Average |
| 3 | 2077.24 | 42.80 | 26.83 | 5.12 | 37.18 | 37.57 | 54.00 | -16.43 | Average |
| 4 | 2498.25 | 46.87 | 27.40 | 5.66 | 37.26 | 42.67 | 54.00 | -11.33 | Average |
| 5 | 2972.46 | 42.66 | 28.70 | 6.18 | 37.46 | 40.08 | 54.00 | -13.92 | Average |
| 6 | 4067.17 | 38.66 | 30.00 | 7.45 | 36.32 | 39.79 | 54.00 | -14.21 | Average |

6. TEST SETUP PHOTOS OF THE EUT

Conducted Emissions (AC Mains)



Radiated Emissions





7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No.: CHTEW21100075

-----End of Report-----