

FCC Test Report

FCC ID : 2ANR7-T56011

Equipment : Tire-Pressure Monitoring System

Model No. : MDMAXTPMS2.0 / MDMAX2.0 / MAXTPMS2.0 /

VT51

(Refer to item 1.1.1 for more details)

Brand Name : ATEQ / MATCO

(For marketing purpose)

Applicant : ATEQ INSTRUMENTS(ASIA)PTE LTD.TAIWAN

BRANCH(SINGAPORE)

Address : 3 LANE223, SAN JIA DONG STREET, 40642,

TAICHUNG, TAIWAN.

Standard : 47 CFR FCC Part 15.209

Received Date : Dec. 05, 2019

Tested Date : Dec. 13 ~ Dec. 16, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen // Assistant Manager Gary Chang / Manager

TAF
Testing Laboratory

Report No.: FR9D0501 Page : 1 of 21



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	
1.2	Test Setup Chart	
1.3	The Equipment List	
1.4	Test Standards	8
1.5	Deviation from Test Standard and Measurement Procedure	8
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	Radiated Emissions	14
4	TEST LABORATORY INFORMATION	21



Release Record

Report No.	Version	Description	Issued Date
FR9D0501	Rev. 01	Initial issue	Feb. 07, 2020

Report No.: FR9D0501 Page : 3 of 21



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV/m at 3m]: 0.567MHz 30.01 (Margin -15.99dB) - AV	Pass
15.209	Radiated Emissions	[dBuV/m at 3m]: 32.91MHz 34.68 (Margin -5.32dB) - PK	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR9D0501 Page: 4 of 21



1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Difference Item	Main Model	Series Model	Series Model	Series Model
Difference item	MDMAXTPMS2.0	MDMAX2.0	MAXTPMS2.0	VT51
Communication	WIFI	WIFI	WIFI	WIFI
Function	TPMS	TPMS	TPMS	TPMS
Battery	0	0	0	0
TPMS Frame	0	0	0	0
POLY PANEL	MATCO RED · ORANGE · GEEN	MATCO	MATCO DEMO BLACK	ATEQ

Note 1: "O" means the item is same with main model.

Note 2: Only difference of production appearance, the function design and electronic circuit are the same.

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (kHz)	Modulation	Ch. Frequency (kHz)	Channel Number	Data/Bit Rate	
123 ~ 127	ASK	125	1	100bps, 3.9kbps, 5kbps Baud	

1.1.3 Antenna Details

Ant. No.	Туре	Connector	Gain (dBi)	Remark
1	WIRE	N/A	25	

1.1.4 EUT Operational Condition

I STINNIV VOITAGE	5Vdc from AC adapter
cappi, remage	3.7Vdc from battery

Report No.: FR9D0501 Page: 5 of 21




1.1.5 Accessories


	Accessories					
No.	Equipment	Description				
1	AC adapter	Brand: DEE VAN ENTERPRISE CO., LTD. Model: DSA-10PFP-05 050200 I/P: 100-240Vac, 50/60Hz, 0.3A O/P: 5Vdc, 2A				
2	Lithium battery	Brand: Shenzhen Honcell Energy Co., Ltd. Model: HCP104060FC Rating: 3.7Vdc, 3000mAh				
3	USB cable	0.75m shielded with one core				
4	OBDII/TTD					

Report No.: FR9D0501 Page: 6 of 21



1.2 Test Setup Chart

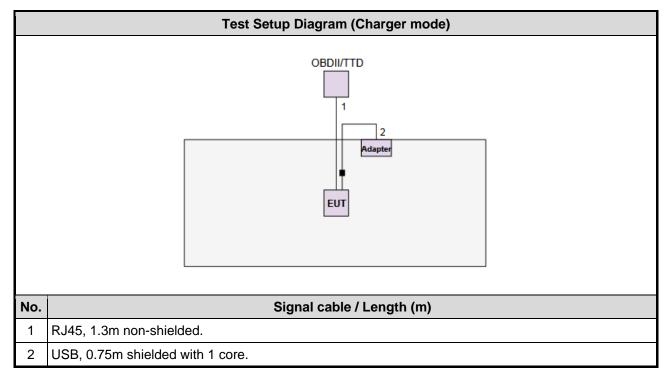

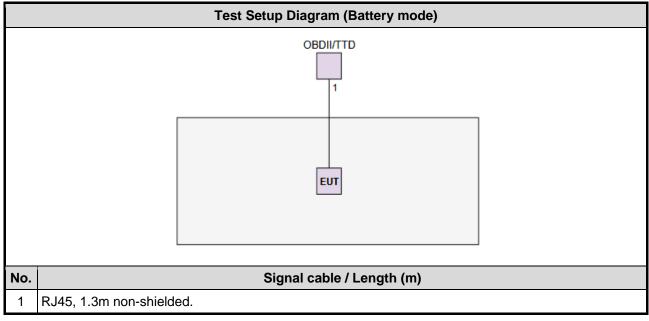

Report No.: FR9D0501 Page: 7 of 21



1.3 The Equipment List

Test Item	Radiated Emission					
Test Site	966 chamber1 / (03CH01-WS)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
Spectrum Analyzer	R&S	FSV40	101498	Dec. 27, 2018	Dec. 26, 2019	
Receiver	Agilent	N9038A	MY53290044	Sep. 17, 2019	Sep. 16, 2020	
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020	
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 18, 2018	Dec. 17, 2019	
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020	
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020	
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020	
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020	
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020	
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020	
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020	
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020	
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020	
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020	
Measurement Software	AUDIX	e3	6.120210g	NA	NA	

1.4 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.209

ANSI C63.10-2013

1.5 Deviation from Test Standard and Measurement Procedure

None

Report No.: FR9D0501 Page: 8 of 21



1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Parameters	Uncertainty	
AC conducted emission	±2.92 dB	
Radiated emission ≤ 30MHz	±2.3 dB	
Radiated emission > 30MHz	±3.41 dB	

Report No.: FR9D0501 Page: 9 of 21



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 69%	Akun Chung
Radiated Emissions	03CH01-WS	21°C / 65%	Aska Huang

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (kHz)	Test Configuration
AC Conducted Emissions			Charger mode
Radiated Emissions			Charger mode
Radiated Emissions	ASK	125	Battery mode

NOTE:

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report

Report No.: FR9D0501 Page: 10 of 21



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit					
Frequency Emission (MHz)	Quasi-Peak	Average			
0.15-0.5	66 - 56 *	56 - 46 *			
0.5-5	56	46			
5-30	60	50			
Note 1: * Decreases with the logarithm of the frequency.					

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

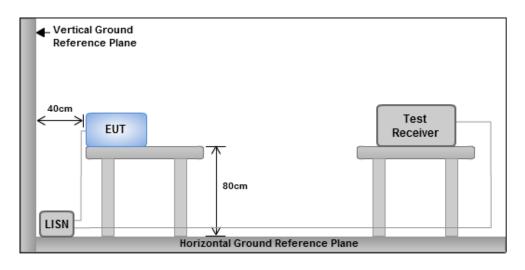

Note: 1. Support units were connected to second LISN.


Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR9D0501 Page: 11 of 21




Charger mode

3.1.4 Test Result of Conducted Emissions

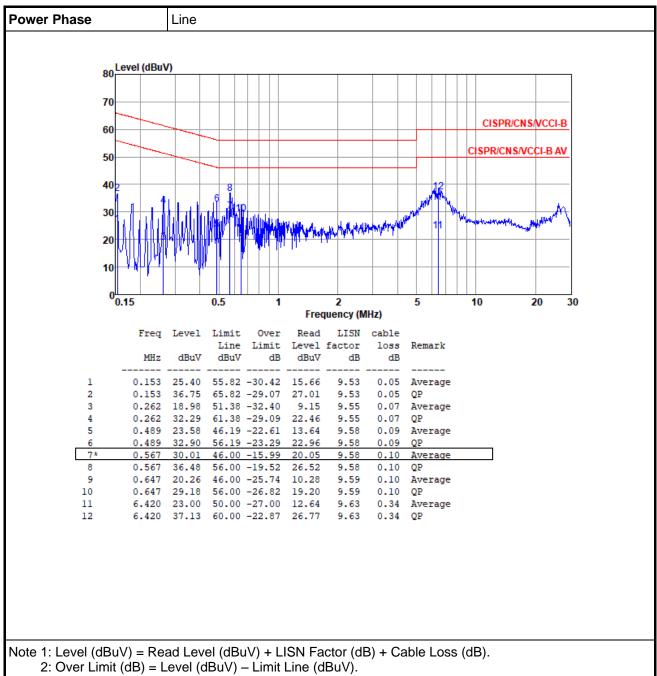

Report No.: FR9D0501 Page: 12 of 21



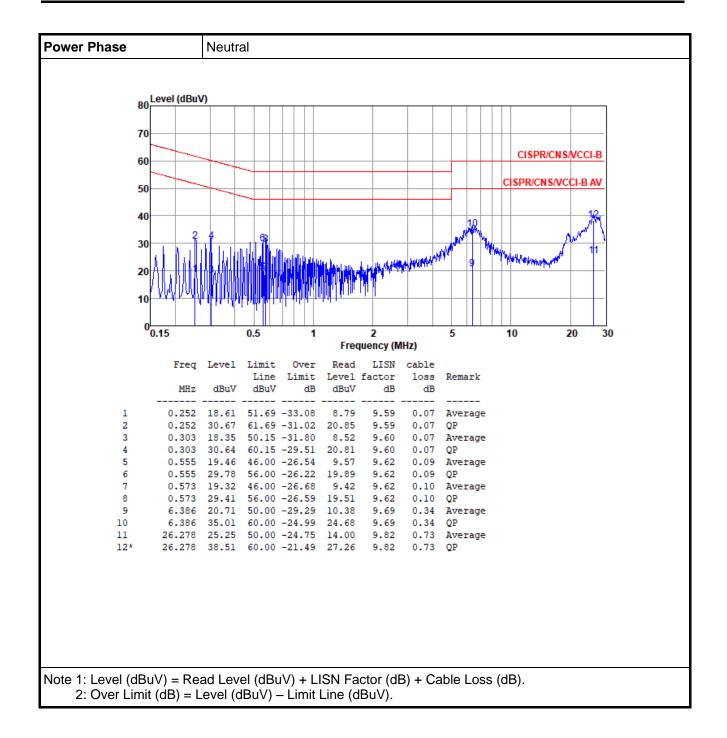

Report No.: FR9D0501 Page: 13 of 21



3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions

Restricted Band Emissions Limit							
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300				
0.490~1.705	24000/F(kHz)	33.8 - 23	30				
1.705~30.0	30	29.54	30				
30~88	100	40	3				
88~216	150	43.5	3				
216~960	200	46	3				
Above 960	500	54	3				

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. Correction values between measurement form the semi-anechoic chamber and open-field test site have been confirmed and added to the factor.

Report No.: FR9D0501 Page: 14 of 21



3.2.3 Test Setup

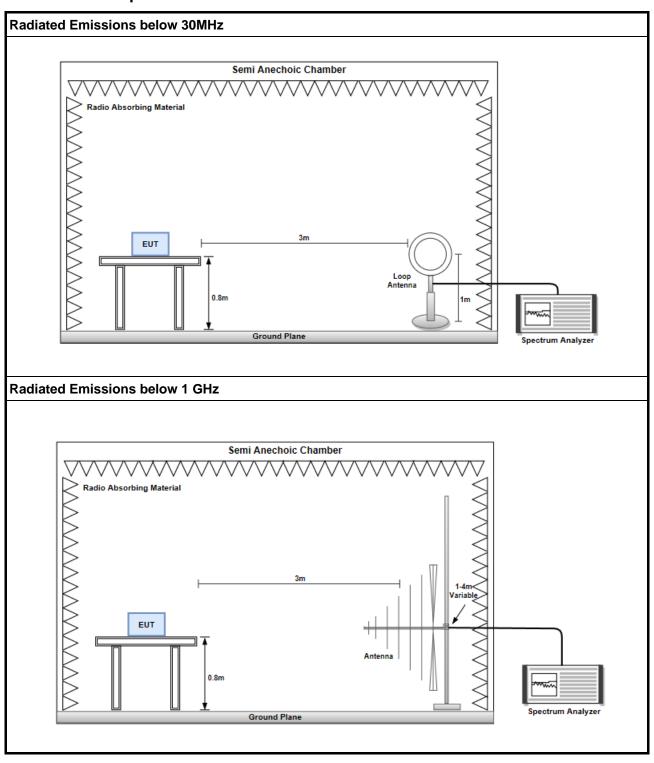

Report No.: FR9D0501 Page: 15 of 21



Battery mode

3.2.4 Transmitter Radiated Unwanted Emissions (9kHz ~ 30MHz)

Polari	zation	Loop Open					
Frequ	uency (MHz)	Emission Level dBuV/m	Limit (dBuV/m)	Margin (dB)	SA Reading (dBuV/m)	Factor	Remark
1	0.125	67.88	125.67	-57.79	45.98	21.90	PK
2	0.125	68.04	105.67	-37.63	46.14	21.90	AV
3	0.25	53.16	115.73	-62.57	31.19	21.97	PK
4	0.25	52.74	95.73	-42.99	30.77	21.97	AV
5	0.375	43.01	108.68	-65.67	21.09	21.92	PK
6	0.375	42.55	88.68	-46.13	20.63	21.92	AV
7	13.62	36.88	50.90	-14.02	12.83	24.05	QP

Polari	zation	Loop Close					
Frequ	uency (MHz)	Emission Level dBuV/m	Limit (dBuV/m)	Margin (dB)	SA Reading (dBuV/m)	Factor	Remark
1	0.125	55.80	125.67	-69.87	33.90	21.90	PK
2	0.125	55.61	105.67	-50.06	33.71	21.90	AV
3	0.25	46.03	115.73	-69.70	24.06	21.97	PK
4	0.25	45.59	95.73	-50.14	23.62	21.97	AV
5	0.375	40.13	108.68	-68.55	18.21	21.92	PK
6	0.375	39.70	88.68	-48.98	17.78	21.92	AV
7	15.24	37.65	49.92	-12.27	13.33	24.32	QP

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB).


*Factor includes antenna factor and cable loss.

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9D0501 Page: 16 of 21



3.2.5 Transmitter Radiated Unwanted Emissions (Above 30MHz)

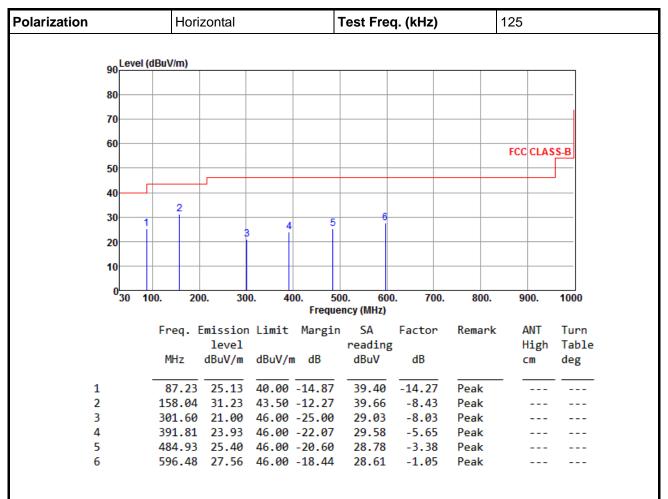


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m)

Report No.: FR9D0501 Page: 17 of 21



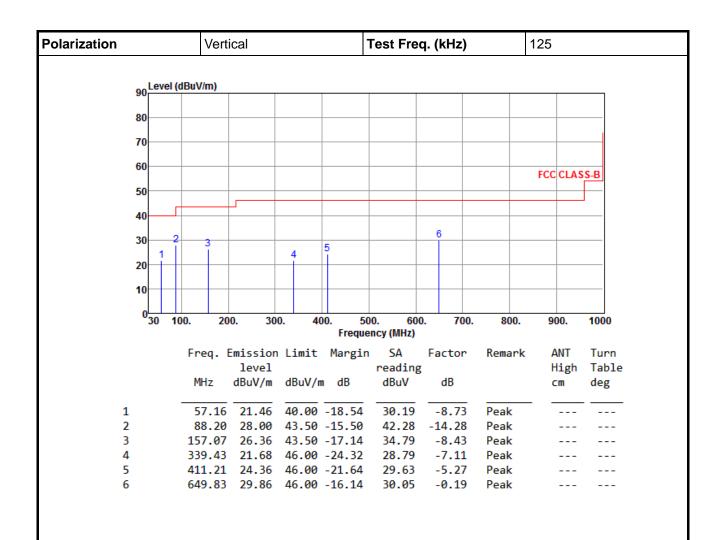

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m)

Report No.: FR9D0501 Page: 18 of 21



Charger mode

3.2.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

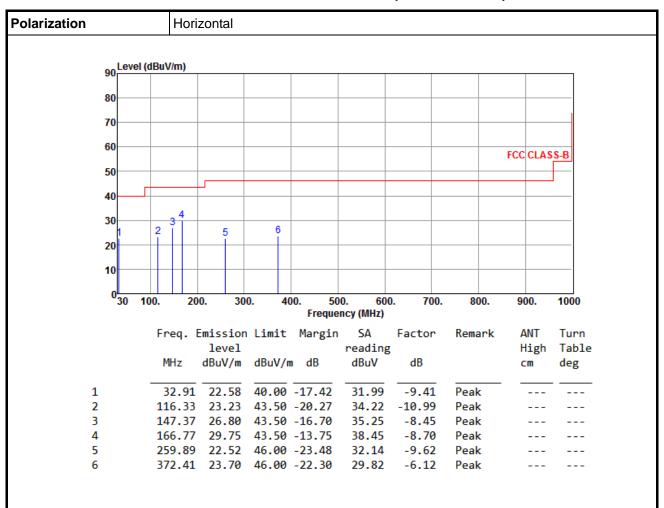


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m)

Report No.: FR9D0501 Page: 19 of 21



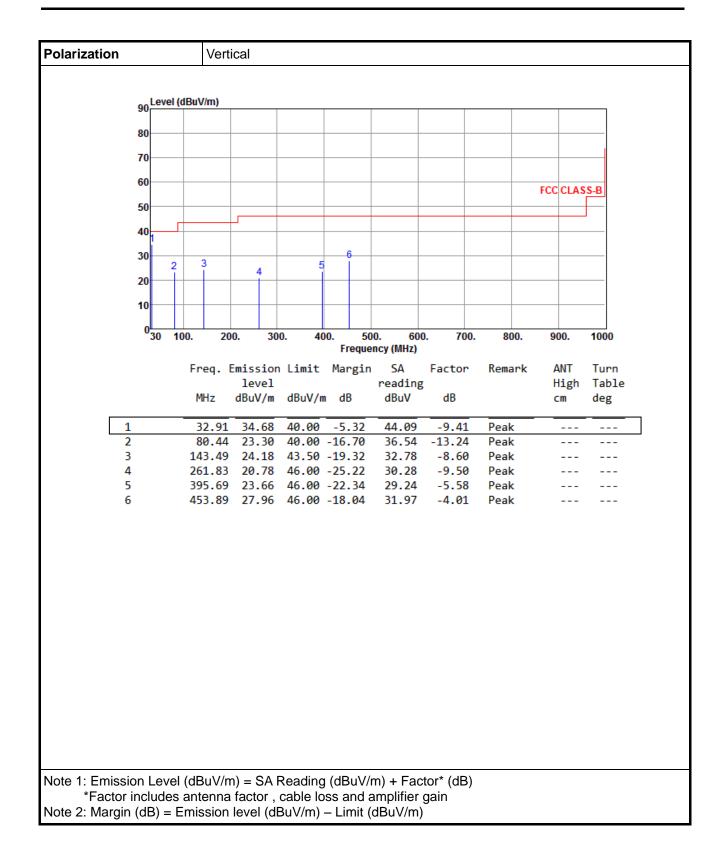

Report No.: FR9D0501 Page: 20 of 21



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640 No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR9D0501 Page: 21 of 21