

Page 71 of 77

12. Frequency Separation Measurement

12.1 Provisions Applicable

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

12.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) ≥ RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

12.3 Measurement Setup (Block Diagram of Configuration)

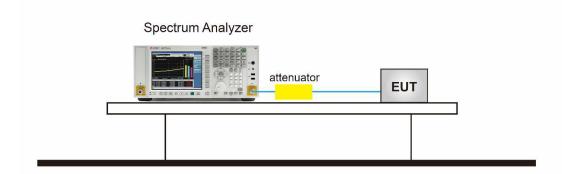


12.4 Measurement Result

	Test Data of Frequency Separa	tion	
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail
GFSK	0.993	0.853333	Pass





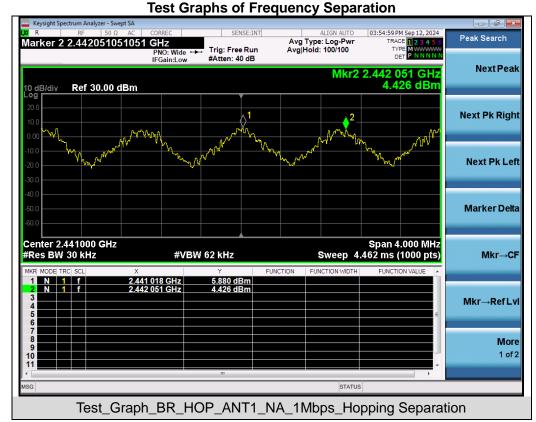

Note: All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report.



Page 73 of 77

13. AC Power Line Conducted Emission Test


13.1 Measurement Limit

Fraguenay	Maximum RF	Line Voltage
Frequency	Q.P. (dBμV)	Average (dBµV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2 Measurement Setup (Block Diagram of Configuration)

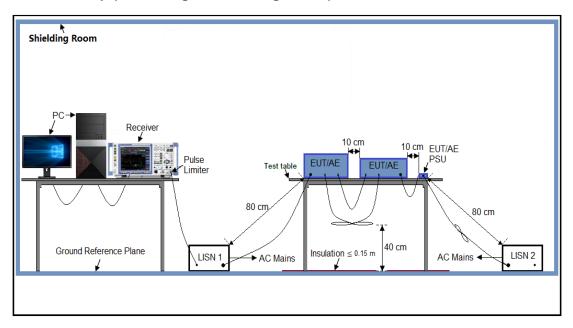



Page 74 of 77

13.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4 Final Procedure of Line Conducted Emission Test

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

13.5 Measurement Results



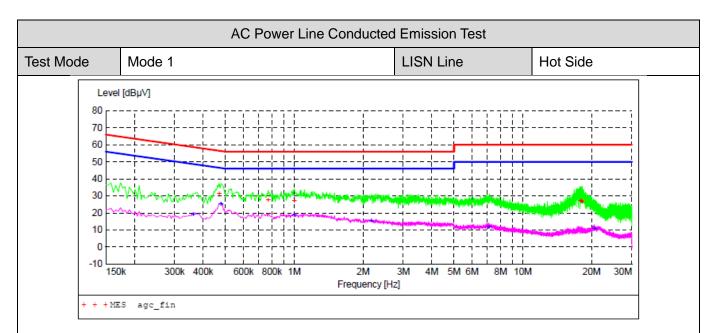

MEASUREMENT RESULT: "agc_fin"


2	02	4/	9/	18	9:	36
		_				

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.470000	31.10	6.1	57	25.4	QP	L1
0.770000	27.30	6.2	56	28.7	QP	L1
1.002000	27.00	6.2	56	29.0	QP	L1
17.942000	27.10	7.0	60	32.9	QP	L1
18.010000	27.10	7.0	60	32.9	QP	L1
18.182000	26.50	7.0	60	33.5	OP	L1

MEASUREMENT RESULT: "agc fin2"

2024	/9/18	9.36
/11/4	/ 7/ 1/5	9 - 5 -

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000	18.80	6.1	49	29.9	AV	L1
0.478000	25.00	6.1	46	21.4	AV	L1
0.998000	18.50	6.2	46	27.5	AV	L1
2.174000	15.20	6.3	46	30.8	AV	L1
7.106000	11.60	6.5	50	38.4	AV	L1
20.530000	10.50	7.2	50	39.5	AV	L1





N.4 I.			er Line Cond			.	0:1
Mode	Mode 1			LIS	SN Line	Neutral	Side
Level [d	BµV]						
80							
70	· 		· -		-iiii	i - i - i	·
60		_					
50	· 	- 	;		-;		<u> </u>
40 TM	1/1/Mu/V~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	Mary Mary Mary Mary Mary Mary Mary Mary	ين بلد يس ميايماميا	والمستور والماليونان		-+-	11
30	1/4-1442 1-22 - 24/4/- 0 - 1/4 - 1/4/2 1-22 - 24/4/-		#-10-1-10 - W. 11-10		Tales of the best of the later		The second
20		- + 2 2 - 1 - 1 - 1	The same of the sa	all the table of the same of the		- + '2	and The
0							
-10		- +	1		1 1 1 1		
150k	300k 400k	600k 800k 1		M 3M ency [Hz]	4M 5M 6M 8I	M 10M	20M 30M
MEAS	SUREMENT	RESULT	: "agc	fin"			
		_	-				
	/9/18 9:3						
E'	requency	Level	Transd	Limit	Margin	Detector	Line
	MHz	dΒμV	dB	dΒμV	dB		
	0.454000	35.40	6.1	57	21.4	QP	N
	0.710000	26.90	6.2	56	29.1	QP	N
	0.730000	28.30	6.2	56	27.7	QP	N
	0.982000	29.20	6.2	56	26.8	QP	N
	1.138000	26.70	6.2	56	29.3	QP	N
	1.750000	25.20	6.2	56	30.8	QP	N
MEA!	SUREMENT	RESULT	: "agc_	fin2"			
2024	/9/18 9:3	3	-				
2024	/9/18 9:3 requency	3 Level	Transd	Limit		Detector	Line
2024	/9/18 9:3	3	-		Margin dB	Detector	Line
2024 F	/9/18 9:3 requency	3 Level	Transd	Limit			Line N
2024, F:	/9/18 9:3 requency MHz	3 Level dBµV 22.70 20.90	Transd dB	Limit dBµV	dB		
2024; F:	/9/18 9:3 requency MHz 0.150000	3 Level dBµV 22.70	Transd dB	Limit dBµV	dB 33.3 28.0	AV	N
2024 F:	/9/18 9:3 requency MHz 0.150000 0.354000 0.462000 1.354000	3 Level dBµV 22.70 20.90 27.40 19.20	Transd dB 6.1 6.1 6.1 6.2	Limit dBµV 56 49 47 46	dB 33.3 28.0 19.3 26.8	AV AV AV	N N
2024 F:	/9/18 9:3 requency MHz 0.150000 0.354000 0.462000	3 Level dBµV 22.70 20.90 27.40	Transd dB 6.1 6.1 6.1	Limit dBµV 56 49 47	dB 33.3 28.0 19.3 26.8 29.1	AV AV AV	N N N



Page 77 of 77

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01689240814AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01689240814AP02

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.