

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 1(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03	FCC ID: L6ARBA40GW

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 2(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Date/Time: 03/03/2006 12:32:00 PM

Test Laboratory: RTS

Dipole Validation_835 MHz_Amb_Temp. 24.6_Liq_Temp. 23.1_03_03_06

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.1 V/m; Power Drift = -0.014 dB


Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 8.29 mW/g; SAR(10 g) = 5.36 mW/g

Maximum value of SAR (measured) = 8.98 mW/g

d=15mm, Pin=250mW/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 8.90 mW/g

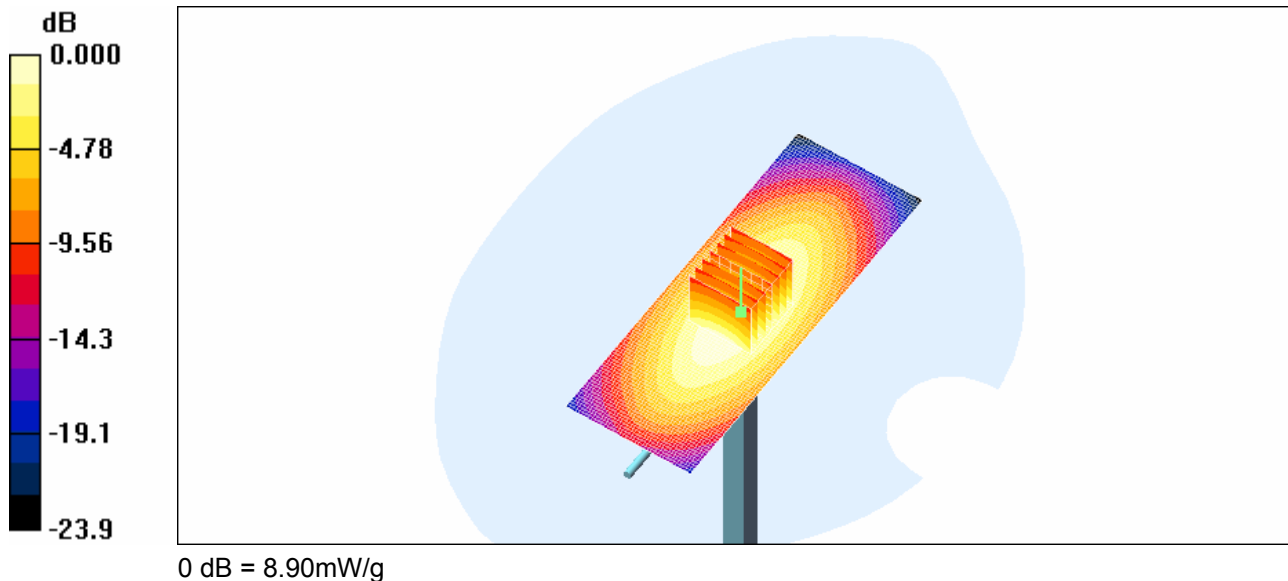

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 3(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Date/Time: 06/03/2006 11:20:34 AM

Test Laboratory: RTS

Dipole Validation_835 MHz_Amb_Temp. 24_5_Liq_Temp. 24_0_03_06_06

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.5 V/m; Power Drift = -0.056 dB


Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 8.4 mW/g; SAR(10 g) = 5.44 mW/g

Maximum value of SAR (measured) = 9.05 mW/g

d=15mm, Pin=250mW/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 9.09 mW/g

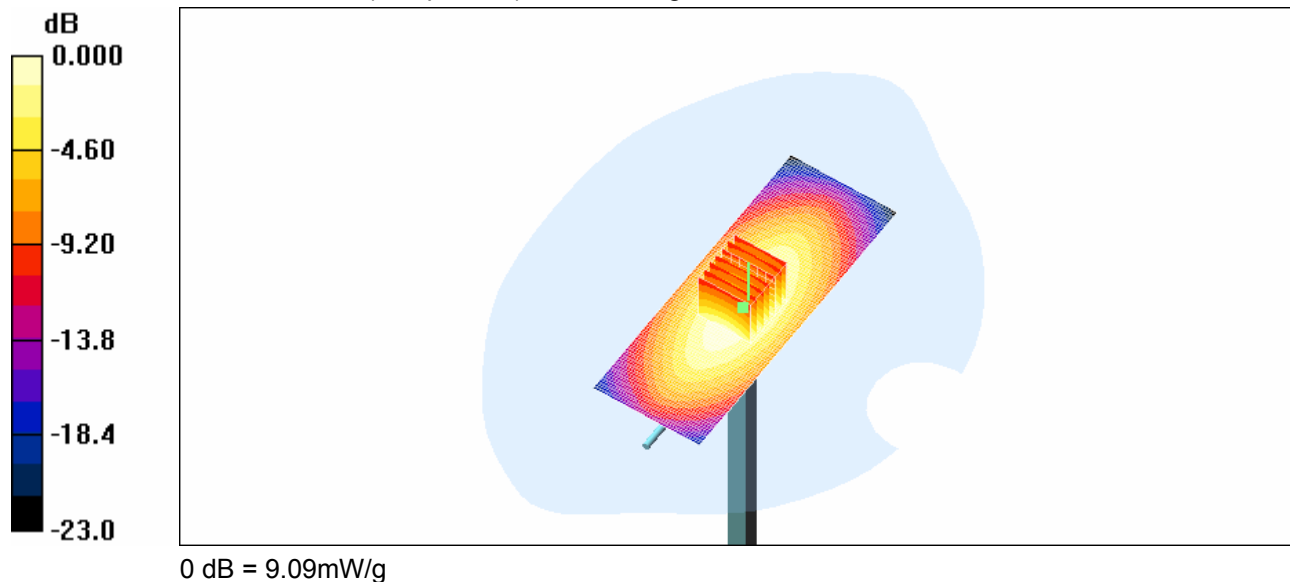

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 4(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Date/Time: 14/03/2006 5:20:53 PM

Test Laboratory: RTS

Dipole Validation 835 MHz_Amb_Temp 25_4_Liq_Temp 23-8_03_14_06

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 42.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.8 V/m; Power Drift = -0.008 dB


Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 9.58 mW/g; SAR(10 g) = 6.22 mW/g

Maximum value of SAR (measured) = 10.3 mW/g

d=15mm, Pin=250mW/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 10.4 mW/g

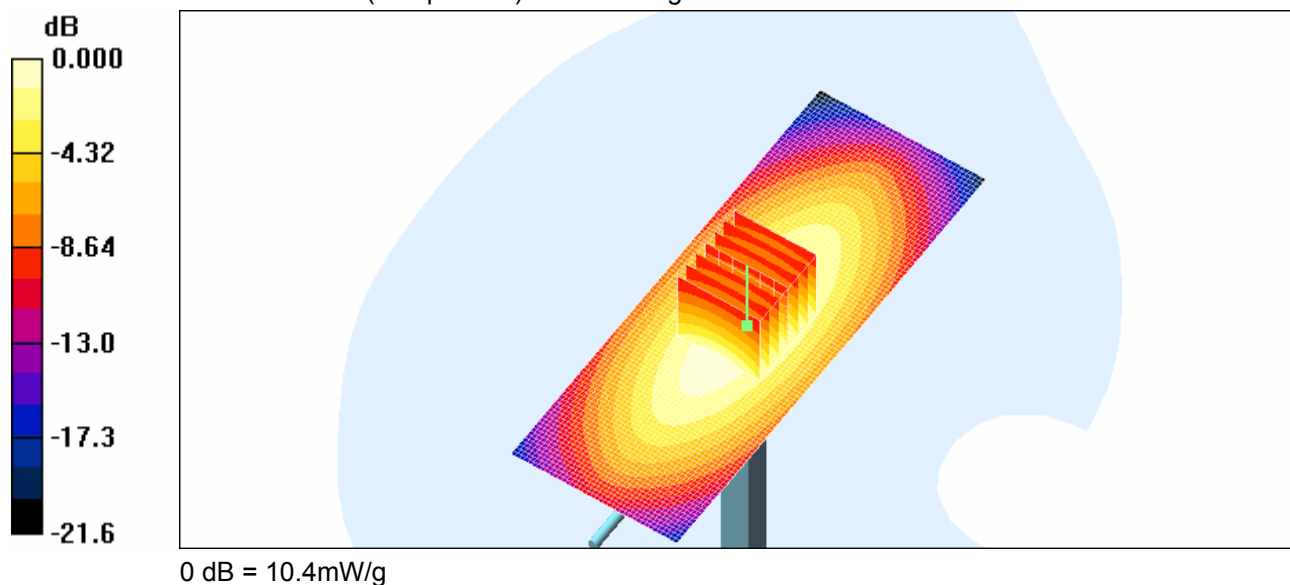

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 5(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Date/Time: 10/04/2006 11:50:39 AM

Test Laboratory: RTS

Dipole Validation_835 MHz_Amb_Temp 24_2_Liq_Temp 22_8_04_10_06

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 43.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.4 V/m; Power Drift = -0.003 dB


Peak SAR (extrapolated) = 15.0 W/kg

SAR(1 g) = 9.89 mW/g; SAR(10 g) = 6.4 mW/g

Maximum value of SAR (measured) = 10.7 mW/g

d=15mm, Pin=250mW/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 10.7 mW/g

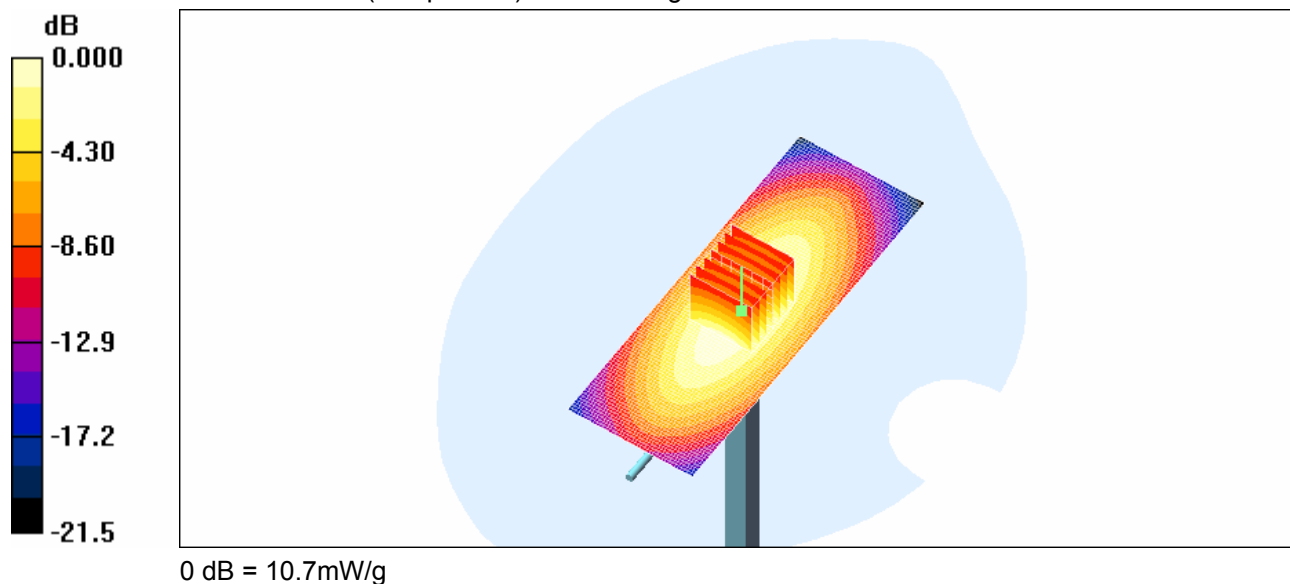

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 6(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Date/Time: 09/03/2006 2:26:51 PM

Test Laboratory: RTS

1900MHz_Validation_Ambient_Temp_24_6_C_Liq_Temp_23_8_C

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.25, 5.25, 5.25); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Dipole Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 184.9 V/m; Power Drift = 0.046 dB


Peak SAR (extrapolated) = 63.5 W/kg

SAR(1 g) = 37.6 mW/g; SAR(10 g) = 19.9 mW/g

Maximum value of SAR (measured) = 42.4 mW/g

Dipole Validation/Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 45.4 mW/g

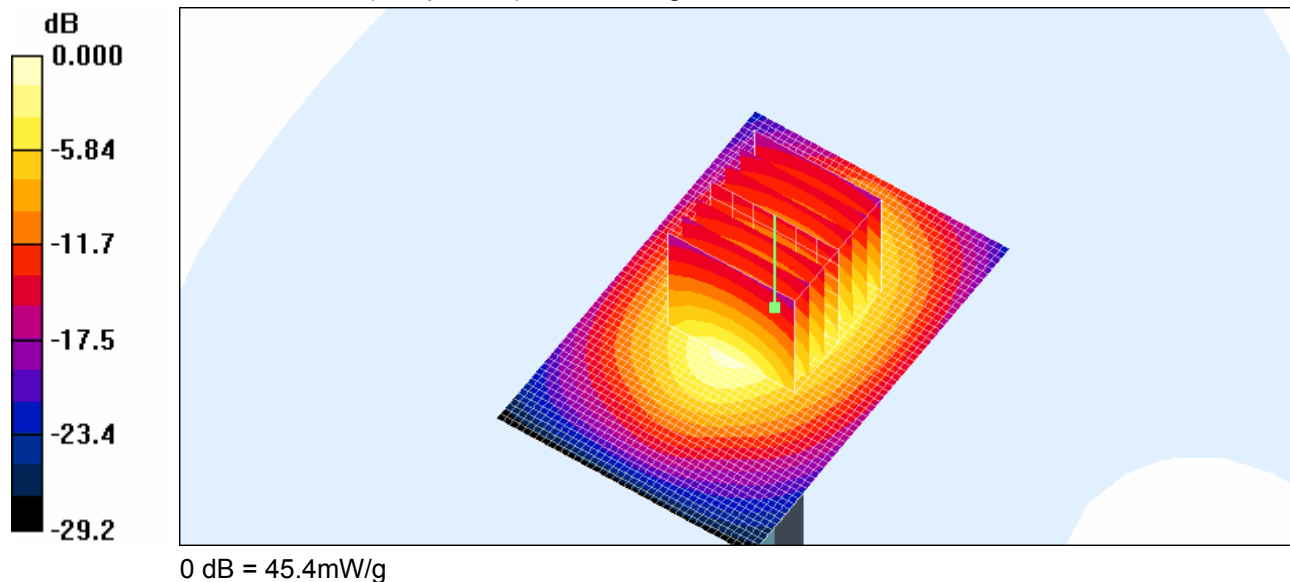

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 7(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW			

Date/Time: 13/03/2006 4:58:05 PM

Test Laboratory: RTS

1900MHz_Validation_Amb_Temp_25_0_C_Liq_Temp_24_0_C

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.25, 5.25, 5.25); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Dipole Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 185.8 V/m; Power Drift = 0.023 dB


Peak SAR (extrapolated) = 65.9 W/kg

SAR(1 g) = 38.5 mW/g; SAR(10 g) = 20.3 mW/g

Maximum value of SAR (measured) = 43.8 mW/g

Dipole Validation/Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 46.5 mW/g

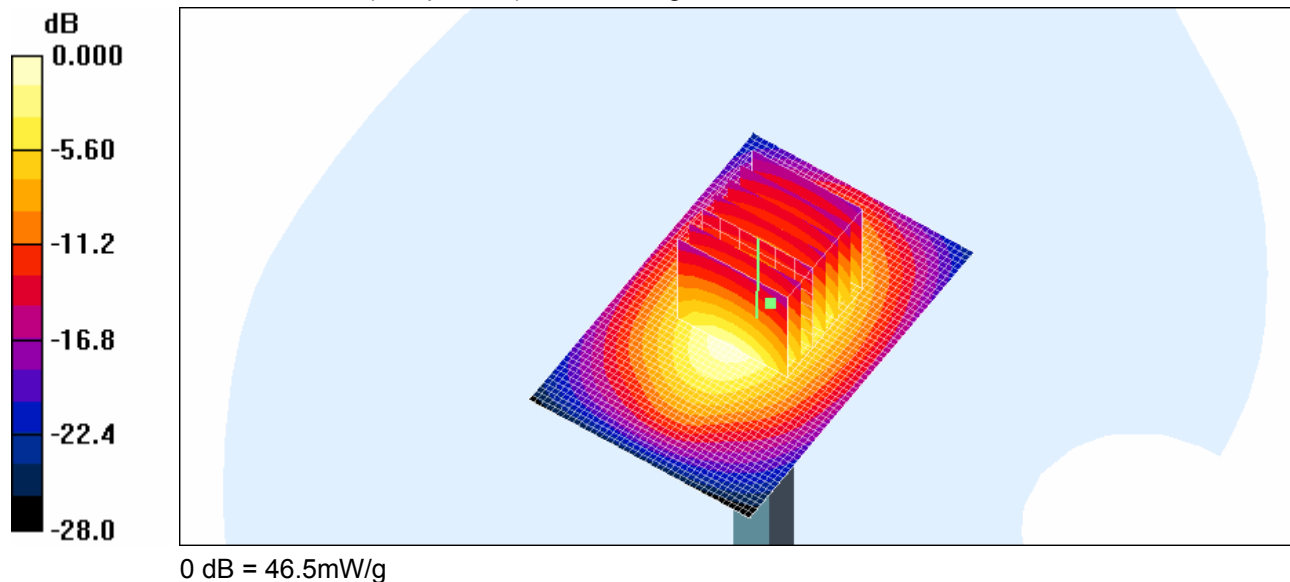

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		8(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 9(73)
	Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Date/Time: 03/03/2006 2:44:37 PM

Test Laboratory: RTS

RightHandSide_Touch_GSM850_High_Chan_Amb_Temp_24_5_Liq_Temp_23_1

DUT: BlackBerry Wireless Handheld; Type: Sample

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.965 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.5 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.893 mW/g; SAR(10 g) = 0.663 mW/g

Maximum value of SAR (measured) = 0.958 mW/g

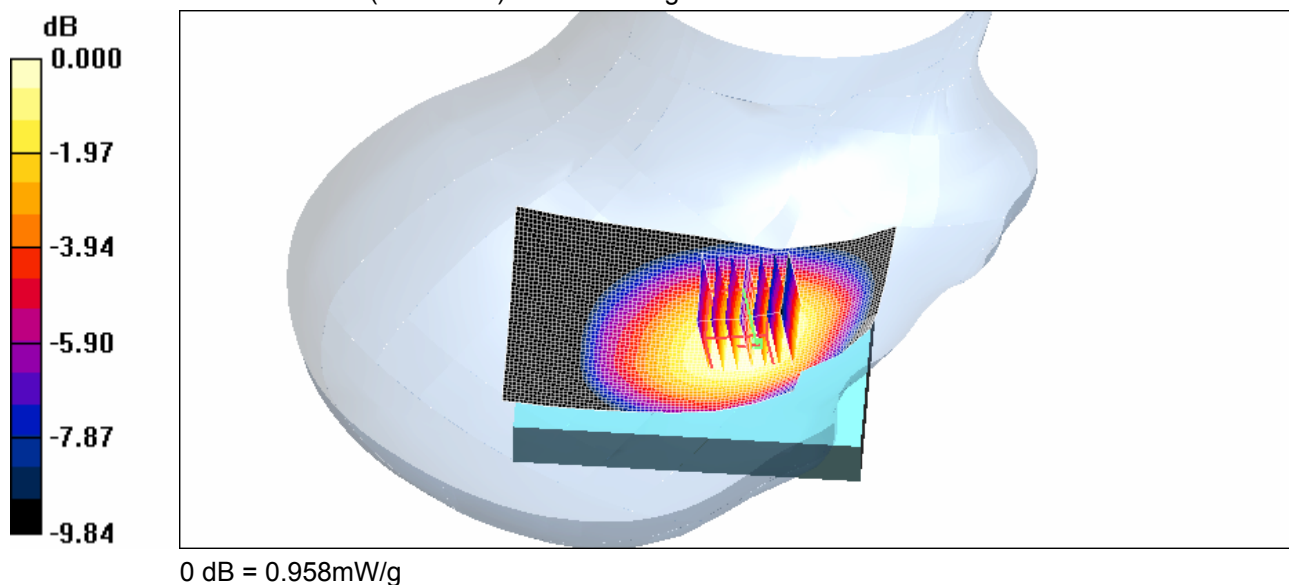

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 10(73)
	Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Date/Time: 10/04/2006 12:40:09 PM

Test Laboratory: RTS

RightHandSide_Touch_GSM850_High_Chan_LCD2_Amb_Temp_23_5_Liq_Temp_22_7

DUT: BlackBerry Wireless Handheld Model R6230GN; Type: Sample

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 43.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.08 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.0 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.749 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

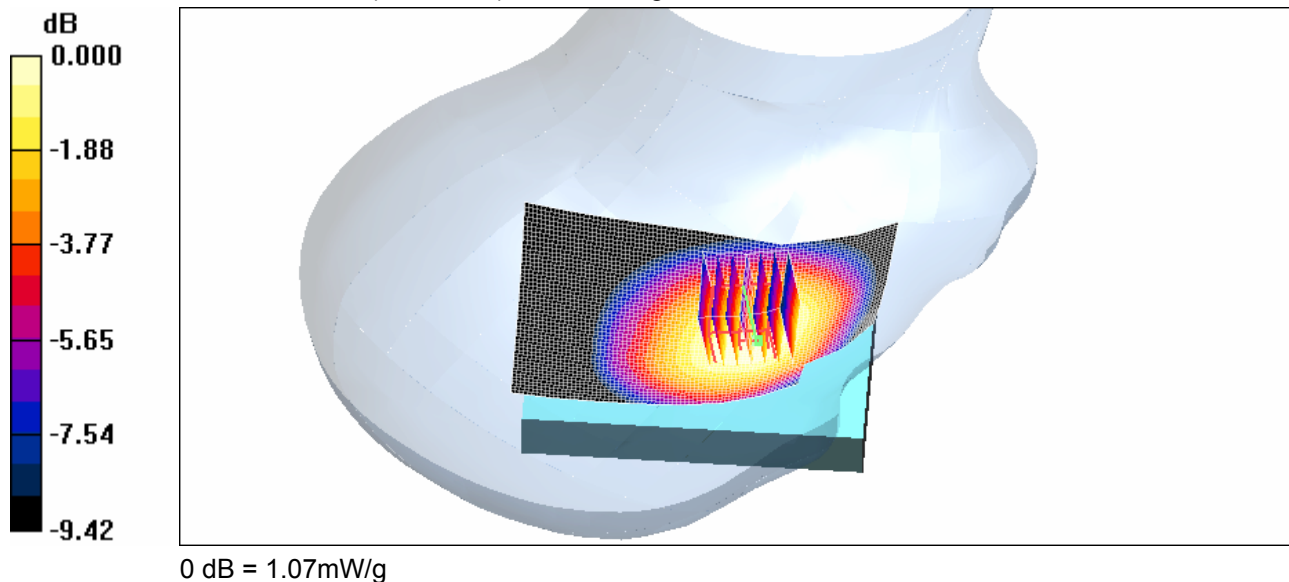

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 11(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Date/Time: 10/04/2006 1:19:11 PM

Test Laboratory: RTS

RightHandSide_Touch_GSM850_High_Chan_RBA42GW__Amb_Temp_24_2_Liq_Temp_23_0

DUT: BlackBerry Wireless Handheld Model R6230GN; Type: Sample

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 43.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.18 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.7 V/m ; Power Drift = -0.227 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.09 mW/g ; SAR(10 g) = 0.798 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

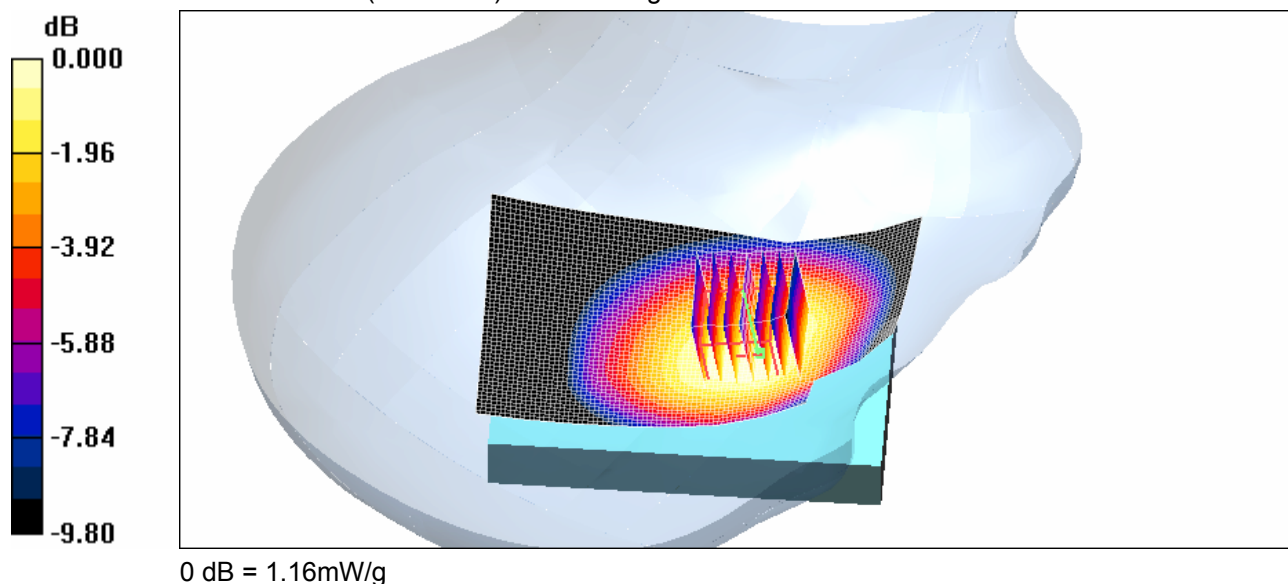

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		12(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Date/Time: 03/03/2006 3:08:54 PM

Test Laboratory: RTS

RightHandSide_Tilted_GSM850_Mid_Chan_Amb_Temp_24_3_Liq_Temp_23_0

DUT: BlackBerry Wireless Handheld; Type: Sample

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.8 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.472 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.8 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.330 mW/g

Maximum value of SAR (measured) = 0.470 mW/g

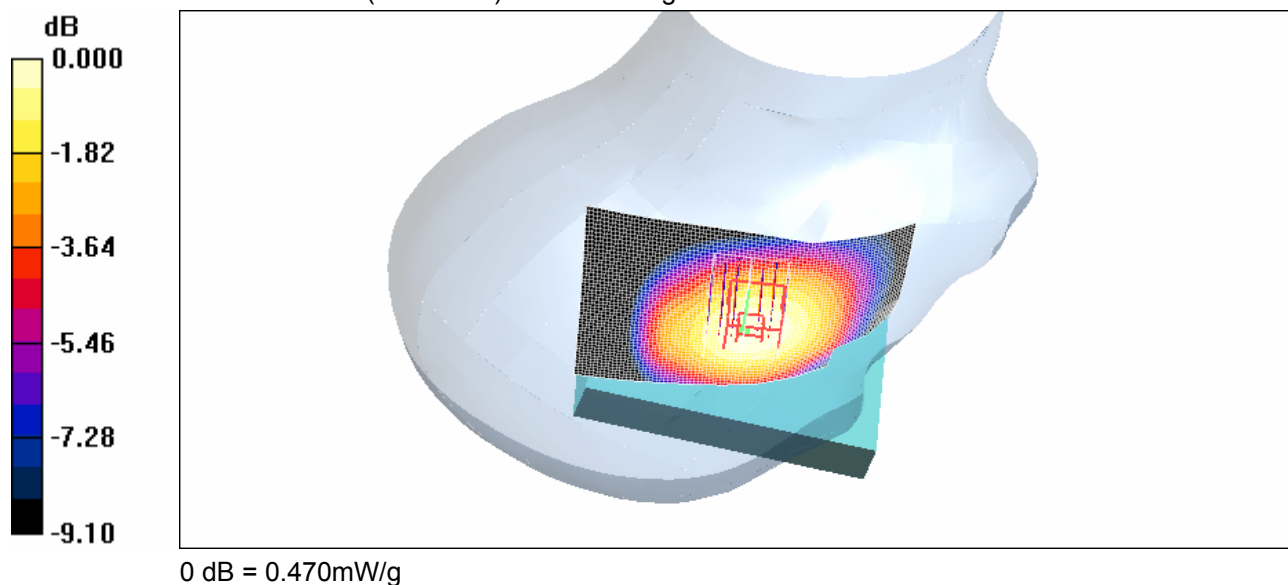

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		13(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attavi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Date/Time: 03/03/2006 4:50:33 PM

Test Laboratory: RTS

LeftHandSide_Touch_GSM850_High_Chann_Amb_Temp_24_4_Liq_Temp_23_0

DUT: BlackBerry Wireless Handheld; Type: Sample

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.181 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.835 mW/g; SAR(10 g) = 0.613 mW/g

Maximum value of SAR (measured) = 0.879 mW/g

Touch position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.921 mW/g

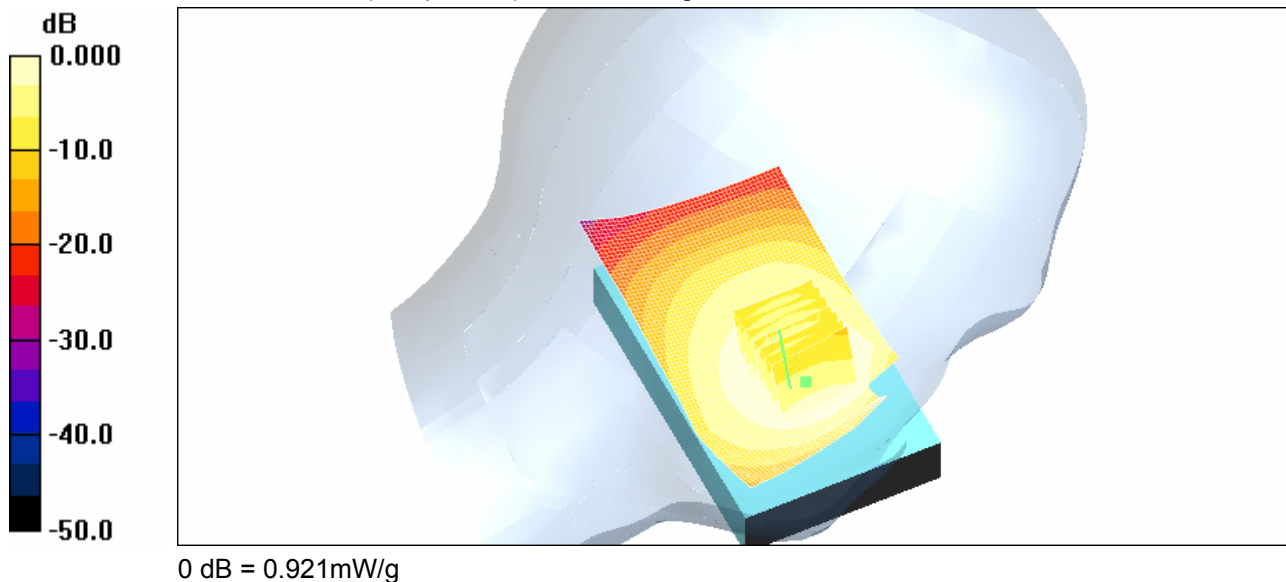

Date/Time: 03/03/2006 5:20:43 PM

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		14(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Test Laboratory: RTS

LeftHandSide_Tilted_GSM850_Mid_Chan_Amb_Temp_24_4_Liq_Temp_22_9

DUT: BlackBerry Wireless Handheld Model R6230GN; Type: Sample

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.8 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.27, 6.27, 6.27); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.089 dB


Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

Touch position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.521 mW/g

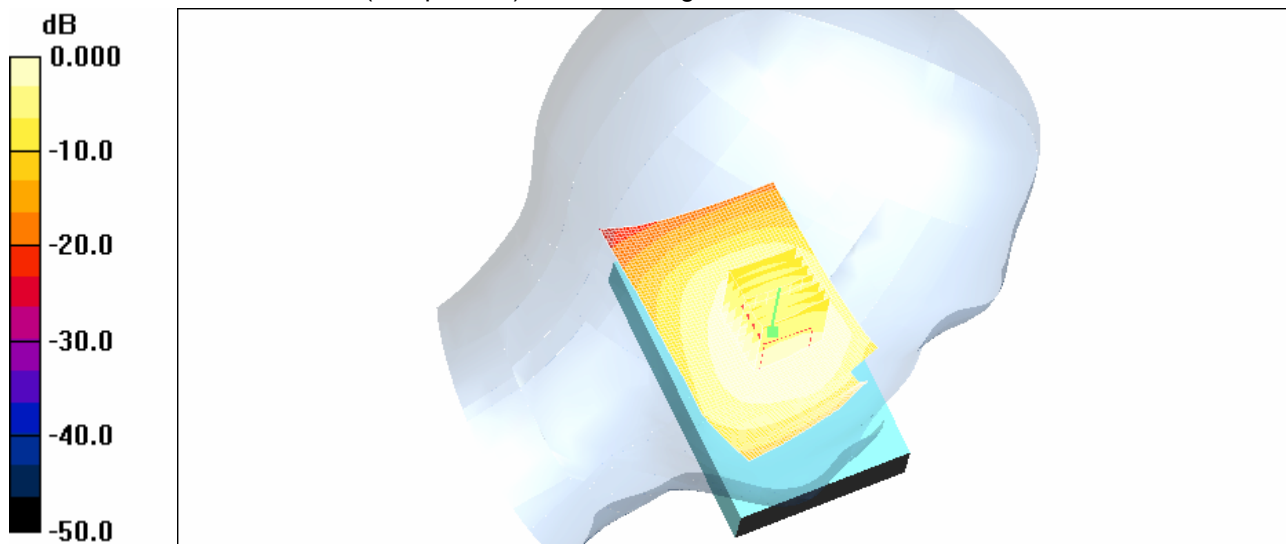

0 dB = 0.521mW/g

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 15(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Date/Time: 09/03/2006 3:24:31 PM

Test Laboratory: RTS

RightHandSide_Touch_GSM1900_Mid_Chan_Amb_Temp_24_8_Liq_Temp_23_9

DUT: BlackBerry Wireless Handheld; Type: Sample

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.25, 5.25, 5.25); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.827 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.5 V/m; Power Drift = -0.326 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.684 mW/g; SAR(10 g) = 0.399 mW/g

Maximum value of SAR (measured) = 0.753 mW/g

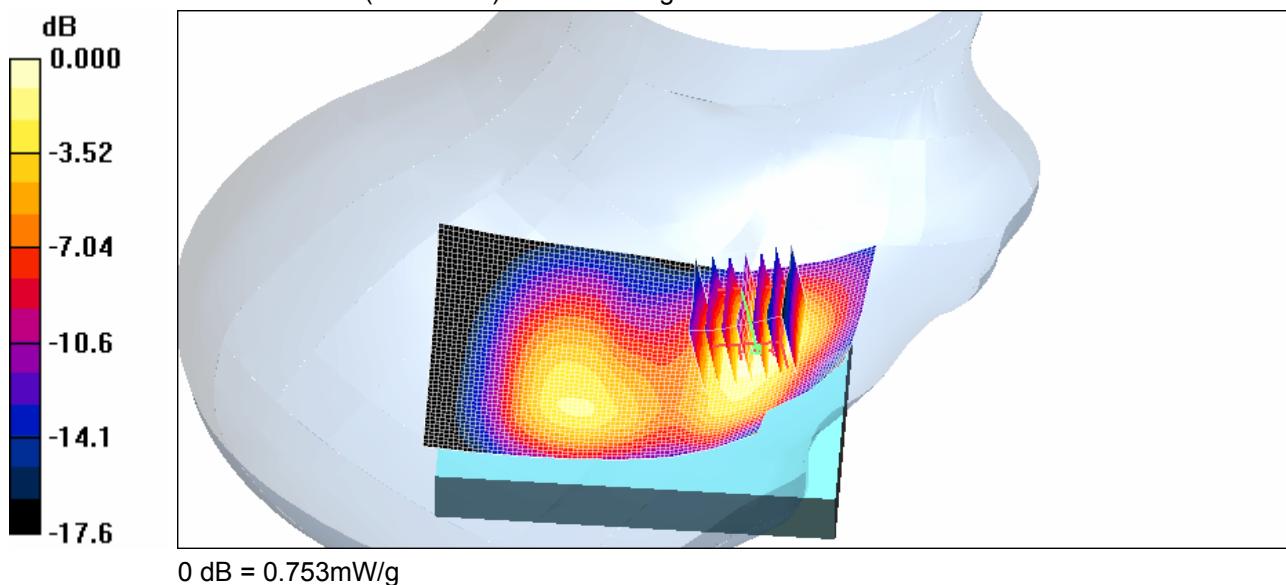

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 16(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Date/Time: 09/03/2006 3:50:19 PM

Test Laboratory: RTS

RightHandSide_Tilted_GSM1900_Mid_Chann_Amb_Temp_24_6_Liq_Temp_24_0

DUT: BlackBerry Wireless Handheld; Type: Sample

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.25, 5.25, 5.25); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Mid/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.399 mW/g


Touch position - Mid/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.5 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.366 mW/g

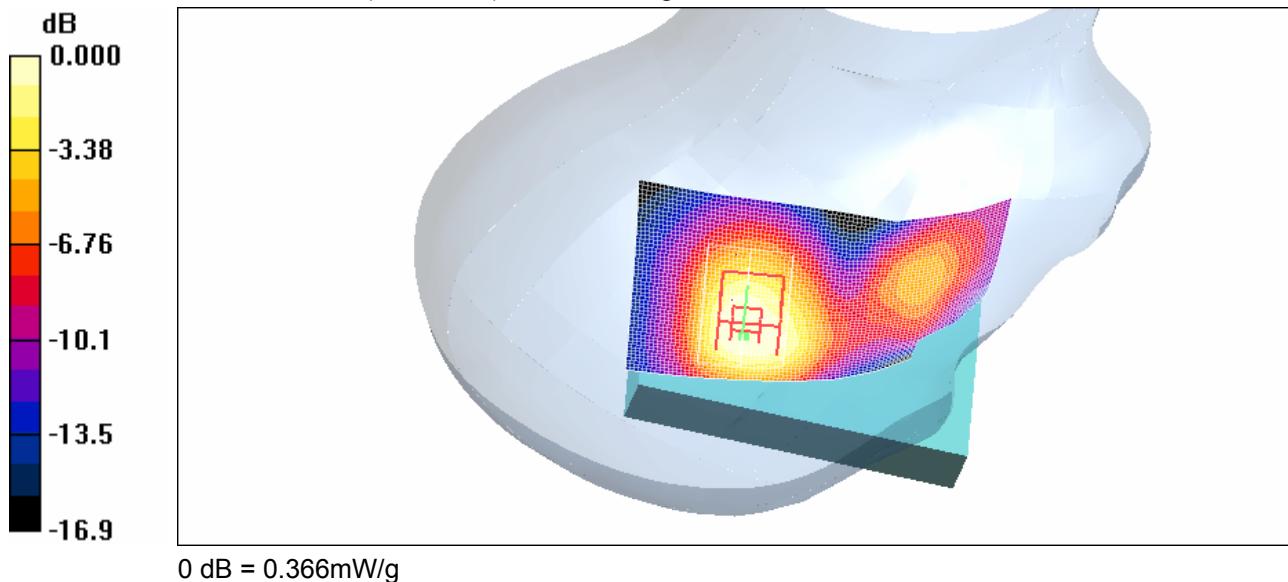

Date/Time: 09/03/2006 4:30:29 PM

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		17(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Test Laboratory: RTS

Left_Touch_GSM1900_Mid_Chann_Amb_Temp_24_7_C_Liq_Temp_23_8_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.25, 5.25, 5.25); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Middle/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.684 mW/g


Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.1 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 0.636 mW/g

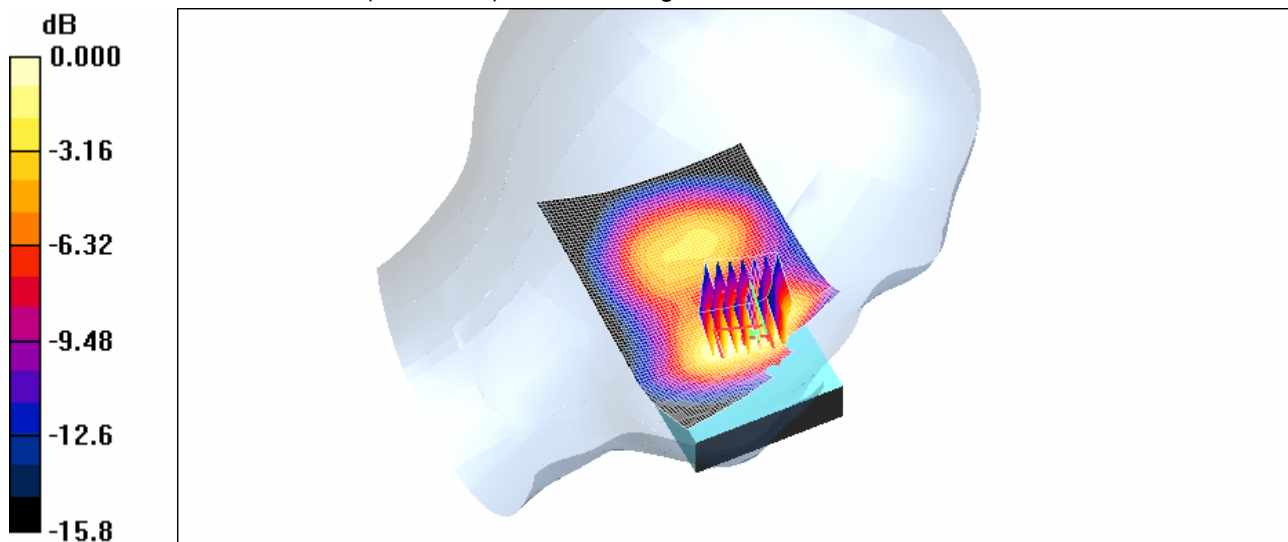

0 dB = 0.636mW/g

Date/Time: 09/03/2006 4:58:25 PM

Test Laboratory: RTS

Copyright 2006, RIM Testing Services (RTS), A division of Research In Motion Limited

This report shall NOT be reproduced except in full without the written consent of RTS

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 18(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Left Tilted GSM1900 Mid Chan Amb Temp 24.6 C Liq Temp 23.9 C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.25, 5.25, 5.25); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Middle/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.361 mW/g


Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.9 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.432 W/kg


SAR(1 g) = 0.313 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.339 mW/g

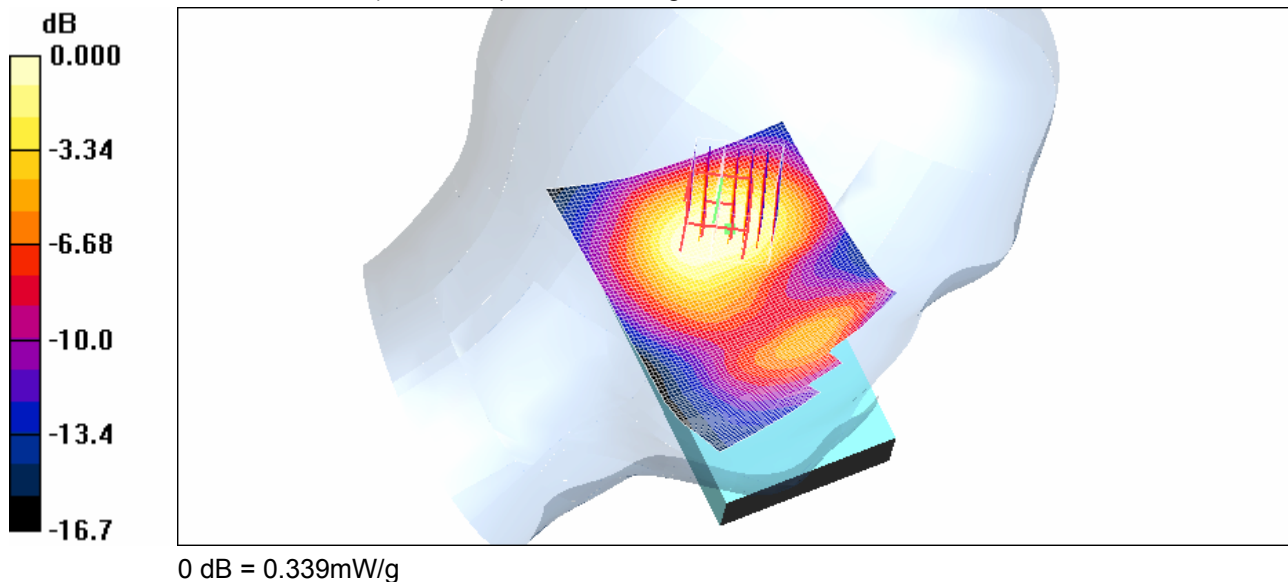

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 19(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Z-axis plot for worst-case head configuration:

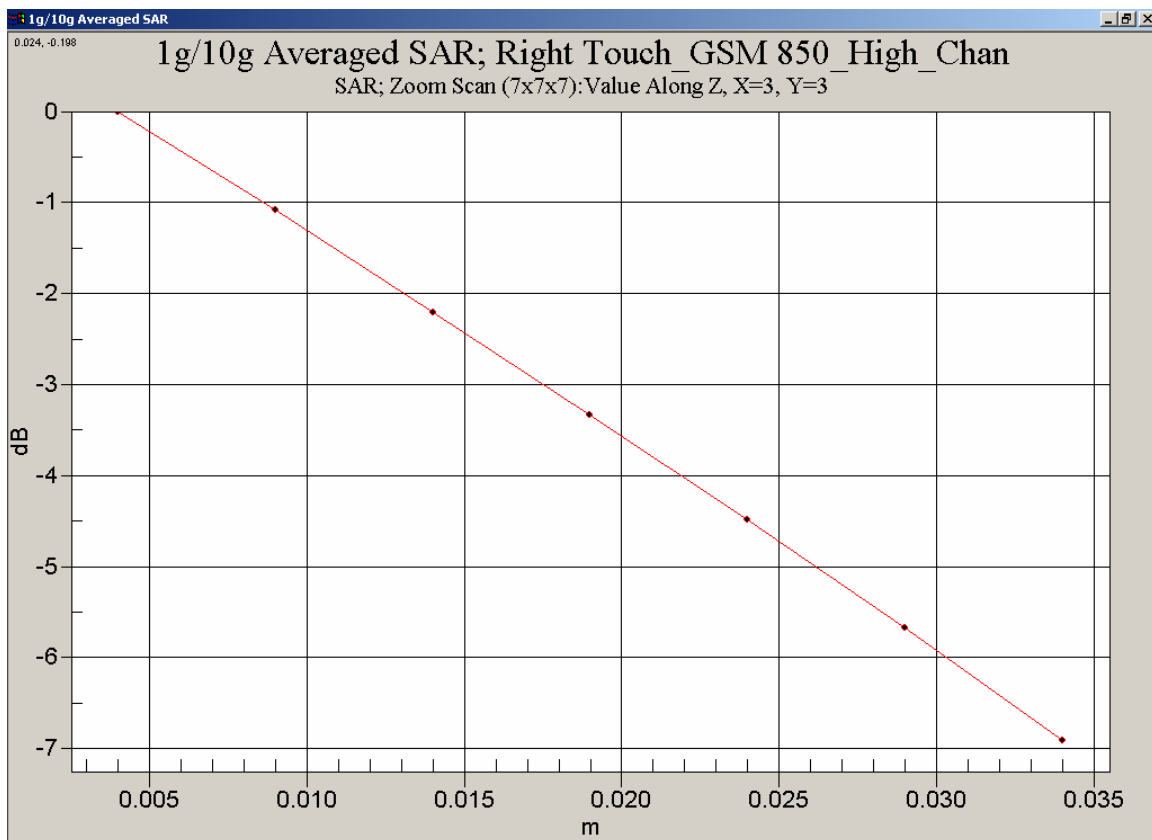

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		20(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 21(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW			

Date/Time: 07/03/2006 10:16:55 AM

Test Laboratory: RTS

Body_worn_Holster1_GPRS850_Low_Chan_Back_Amb_Temp_24_7_C_Liquid_Temp_23_3_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.4 V/m; Power Drift = -0.016 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.916 mW/g

Maximum value of SAR (measured) = 1.36 mW/g

Unnamed procedure/Area Scan (101x151x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.37 mW/g

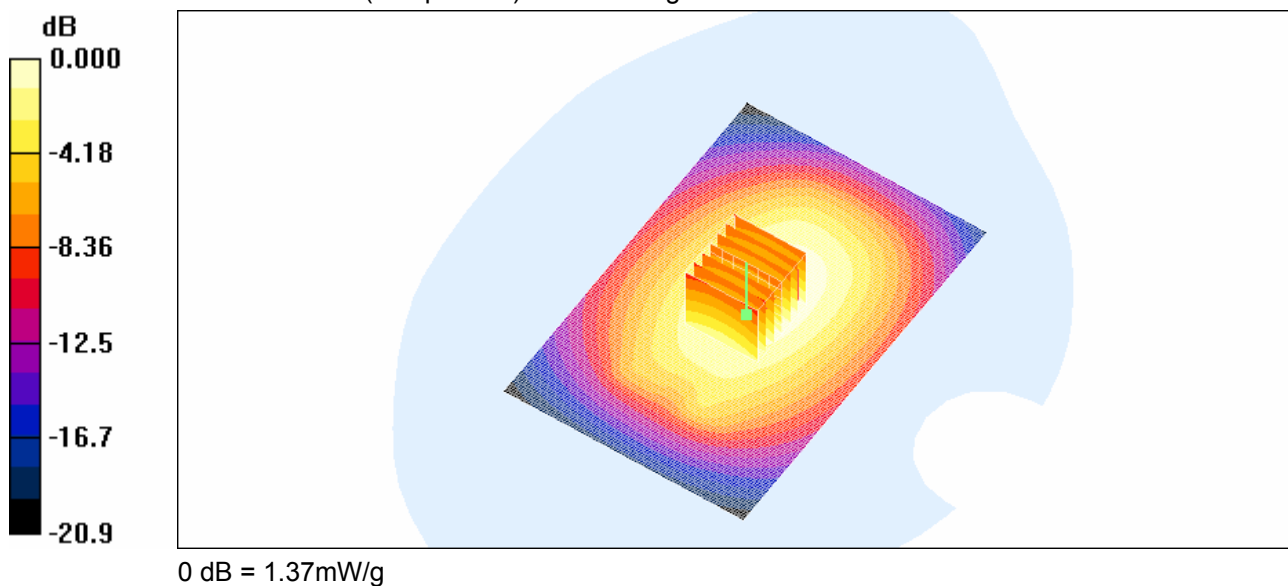

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 22(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW			

Date/Time: 15/03/2006 11:04:29 AM

Test Laboratory: RTS

Body_worn_Holster2_GPRS850_Low_Chan_Back_Amb_Temp_24_5_C_Liq_Temp_23_1_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.5 V/m ; Power Drift = 0.013 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.746 mW/g ; SAR(10 g) = 0.515 mW/g

Maximum value of SAR (measured) = 0.805 mW/g

Unnamed procedure/Area Scan (101x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.804 mW/g

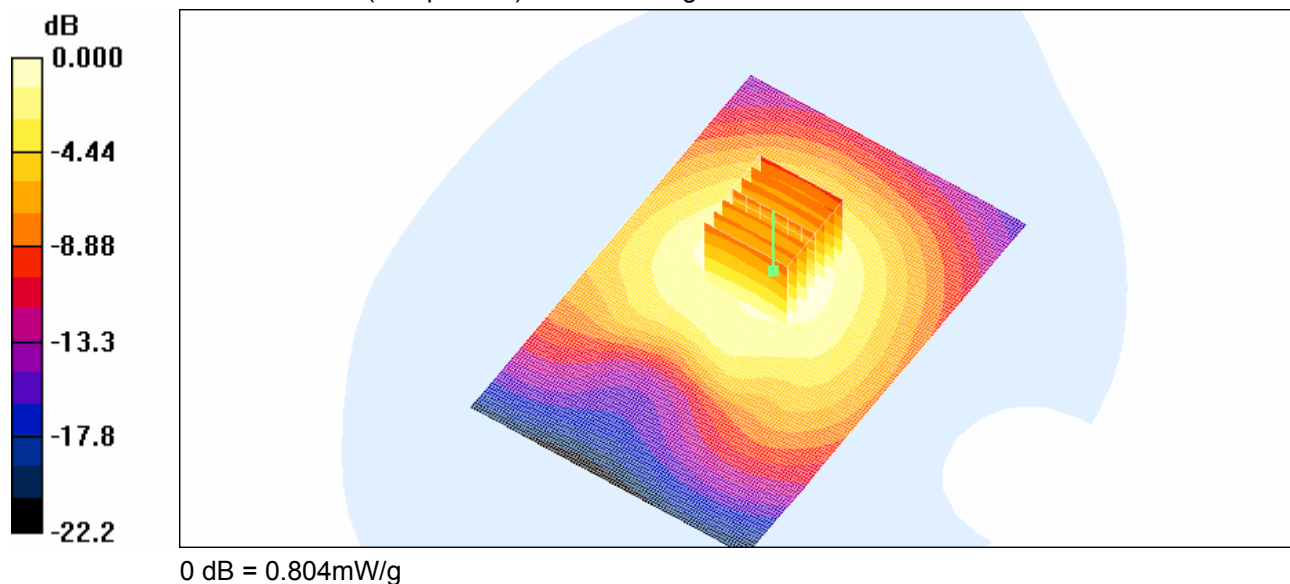

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 23(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Date/Time: 07/03/2006 2:11:45 PM

Test Laboratory: RTS

Body_worn_Holster3_GPRS850_Low_Chan_Back_Amb_Temp_25_0_C_Liquid_Temp_23_3_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.0 V/m; Power Drift = -0.055 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.980 mW/g; SAR(10 g) = 0.711 mW/g

Maximum value of SAR (measured) = 1.04 mW/g

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g

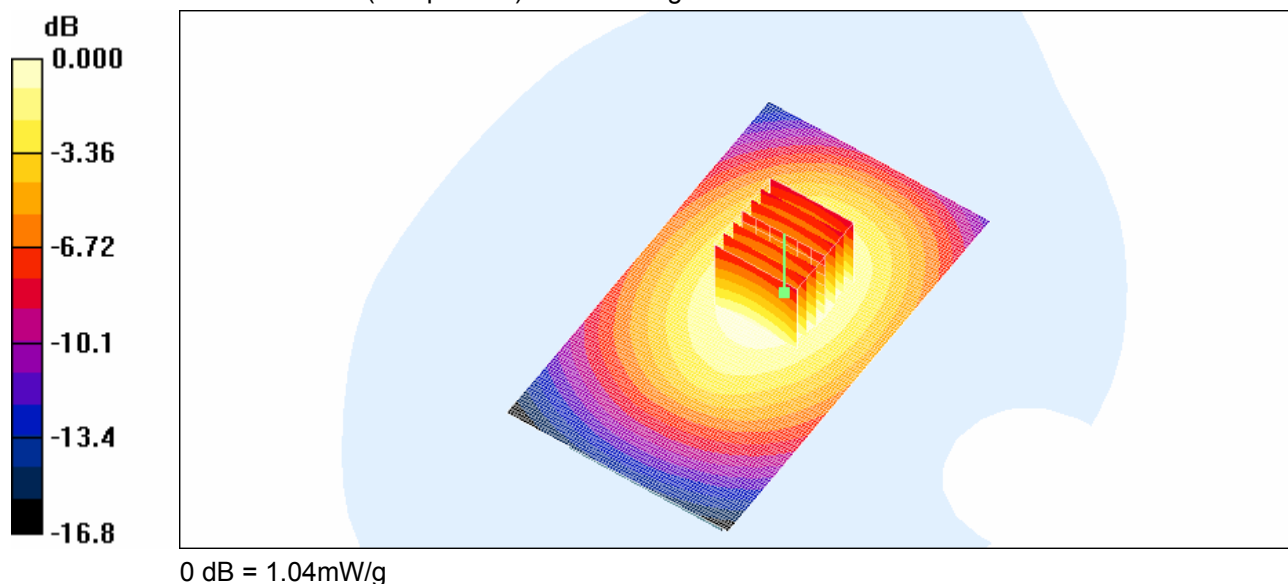

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 24(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Date/Time: 15/03/2006 11:40:30 AM

Test Laboratory: RTS

Body_worn_Holster4_GPRS850_Low_Chan_Back_Amb_Temp_24_6_C_Liq_Temp_23_2_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.3 V/m; Power Drift = 0.034 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.921 mW/g; SAR(10 g) = 0.672 mW/g

Maximum value of SAR (measured) = 0.975 mW/g

Unnamed procedure/Area Scan (101x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.983 mW/g

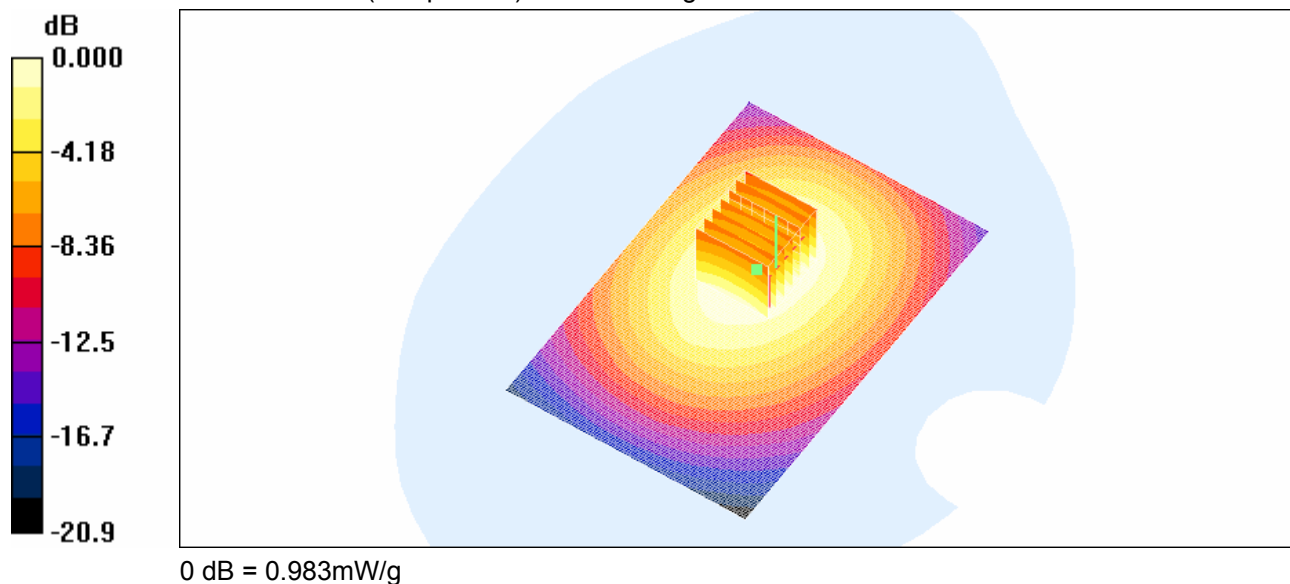

Date/Time: 07/03/2006 4:14:17 PM

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 25(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Test Laboratory: RTS

Body_worn_Holster1_GPRS850_Low_Chan_Back_Batt2_Amb_Temp_25_0_C_Liquid_Temp_23_4_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.7 V/m; Power Drift = -0.014 dB


Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.933 mW/g

Maximum value of SAR (measured) = 1.40 mW/g

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.44 mW/g

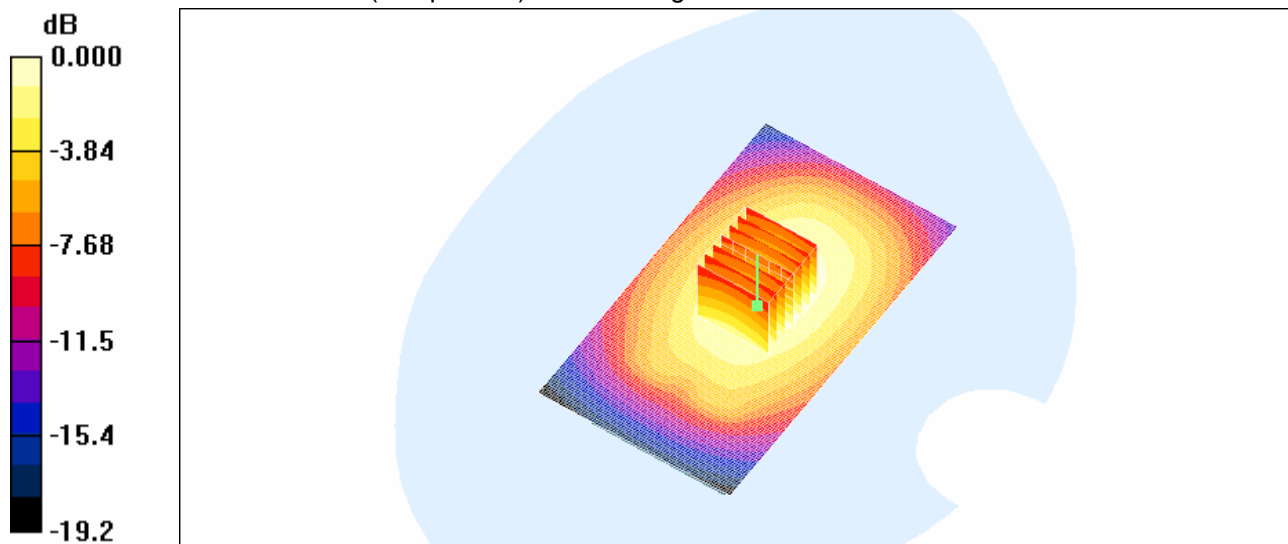

0 dB = 1.44mW/g

Date/Time: 10/04/2006 3:51:50 PM

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		26(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Test Laboratory: RTS

Body_worn_Holster1_GPRS850_Low_Chan_LCD2_Back_Amb_Temp_24_0_C_Liq_Temp_23_1_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.2 V/m; Power Drift = -0.076 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.885 mW/g

Maximum value of SAR (measured) = 1.31 mW/g

Unnamed procedure/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.32 mW/g

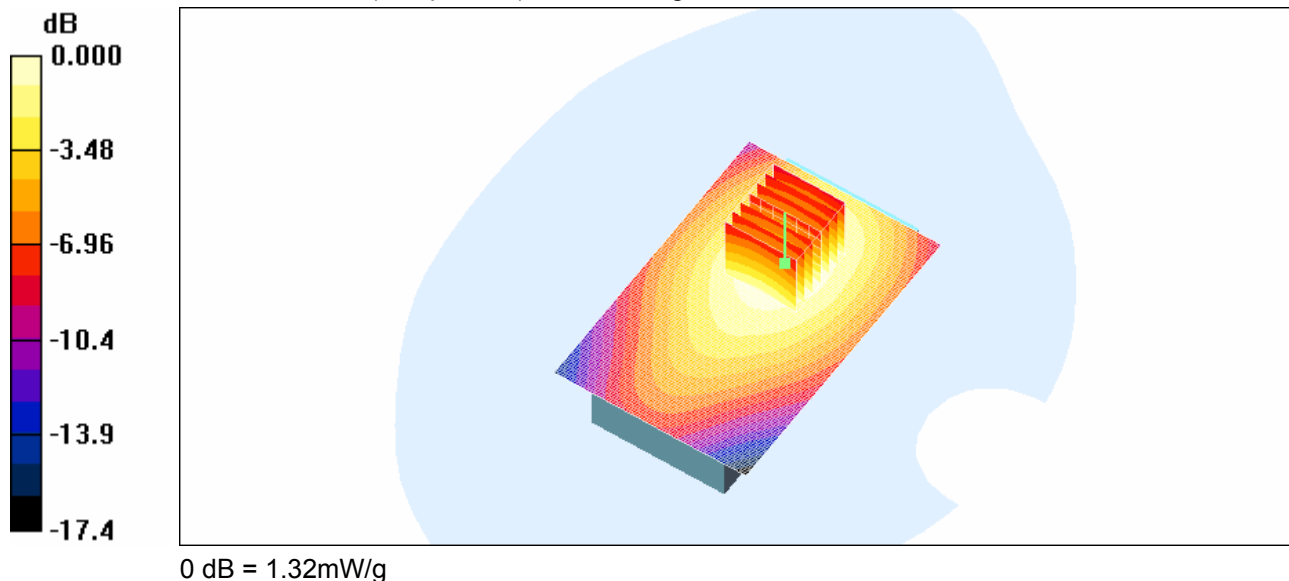

Date/Time: 10/04/2006 3:23:26 PM

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		27(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attavi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Test Laboratory: RTS

**Body_worn_Holster1_GPRS850_Low_Chan_RBA42GW_Back_Amb_Temp_24_0_C_Liquid
_Temp_23_1_C**

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.8 V/m; Power Drift = -0.030 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.947 mW/g

Maximum value of SAR (measured) = 1.38 mW/g

Unnamed procedure/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.39 mW/g

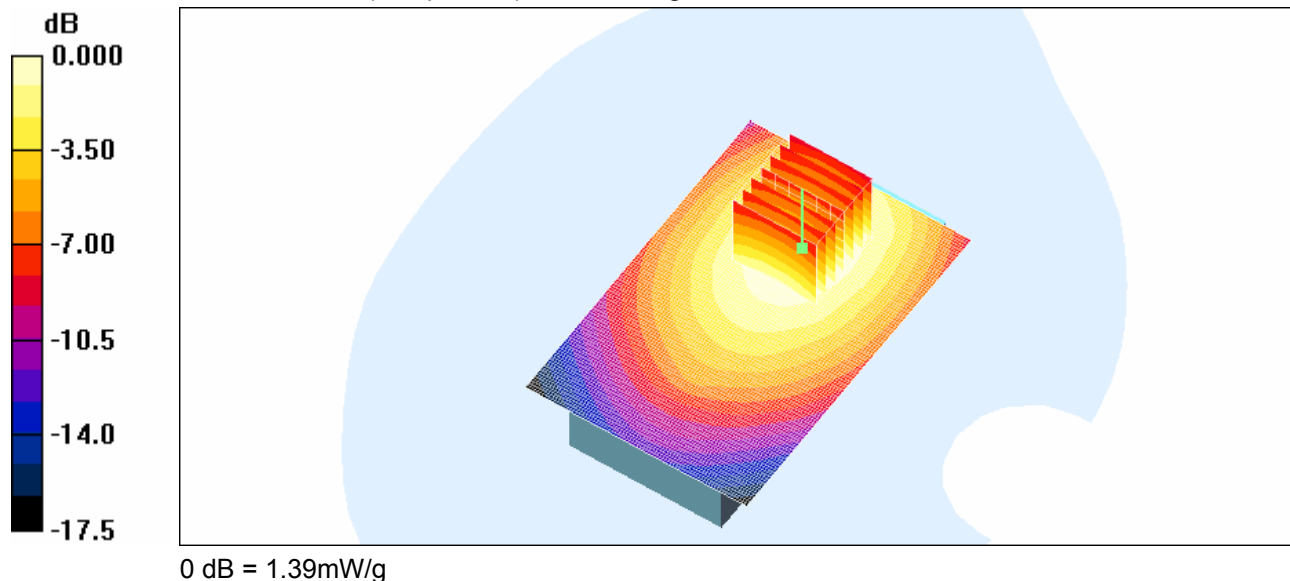

Date/Time: 07/03/2006 4:52:02 PM

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		28(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Test Laboratory: RTS

Body_worn_Holster1_GPRS850_Low_Chan_Back_Batt3_Amb_Temp_24_8_C_Liquid_Temp_23_3_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.7 V/m; Power Drift = -0.052 dB


Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.801 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.22 mW/g

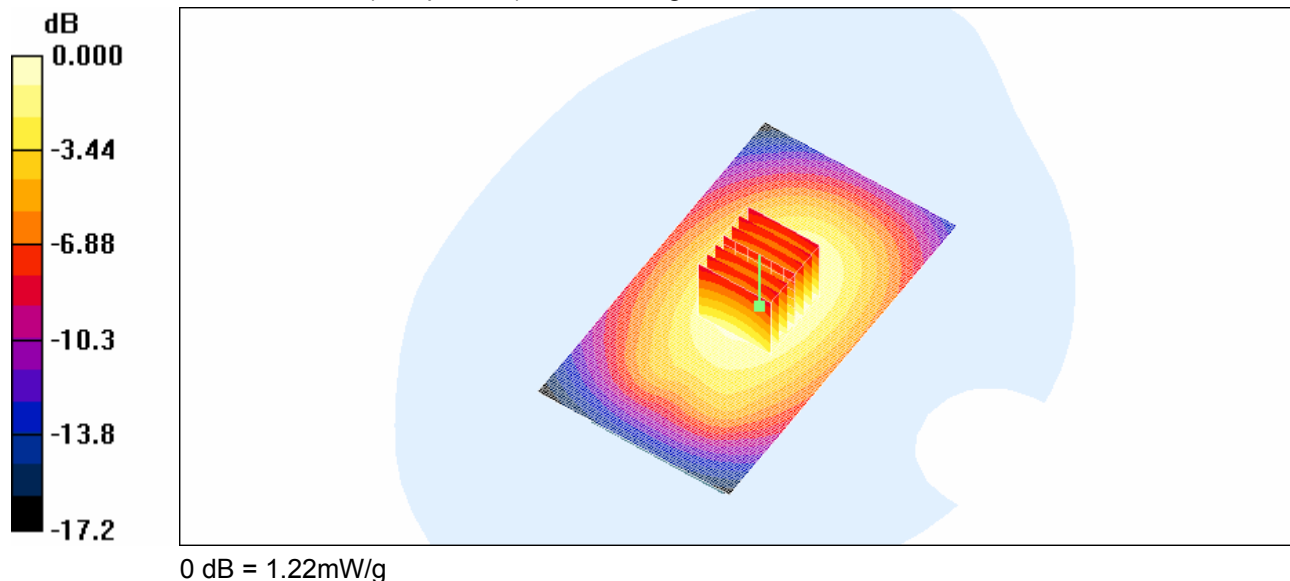

Date/Time: 07/03/2006 5:24:52 PM

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		29(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attavi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Test Laboratory: RTS

Body_worn_Holster1_GPRS850_Low_Chan_Back_Batt2_Headset_BT_ON_Amb_Temp_24_8_C_Liquid_Temp_23_3_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.7 V/m; Power Drift = -0.052 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.785 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.20 mW/g

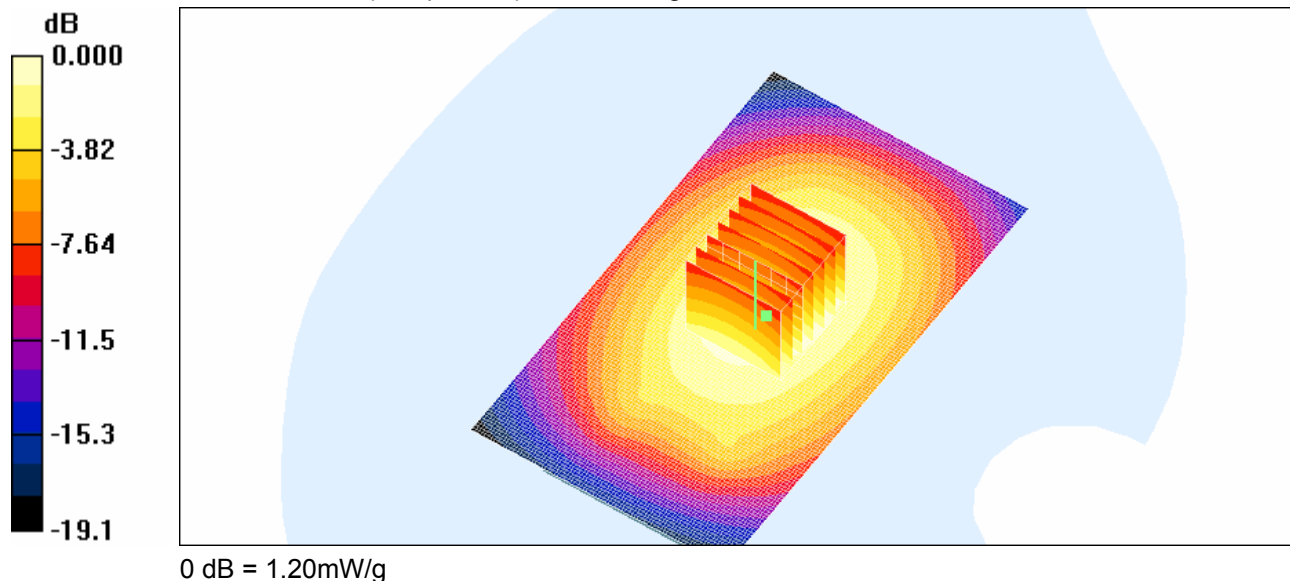

Date/Time: 07/03/2006 3:25:51 PM

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 30(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Test Laboratory: RTS

Body_worn_15mm_Distance_GPRS850_Low_Chan_Back_Amb_Temp_24_9_C_Liquid_Temp_23_5_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(6.16, 6.16, 6.16); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.3 V/m; Power Drift = -0.045 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.960 mW/g; SAR(10 g) = 0.697 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

Unnamed procedure/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.03 mW/g

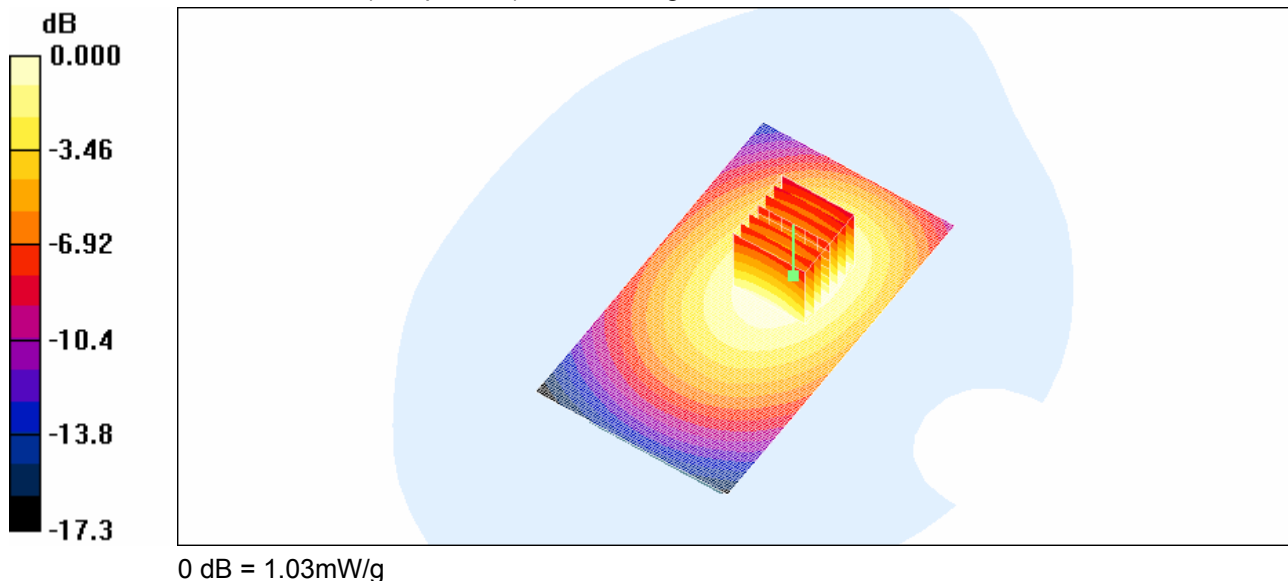

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 31(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Date/Time: 14/03/2006 9:19:10 AM

Test Laboratory: RTS

Body_Holster1_Back_GPRS1900_Low_Chann_Amb_Temp_24_5_C_Liq_Temp_23_2_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.51, 4.51, 4.51); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Area Scan (81x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 1.26 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 16.4 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.676 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

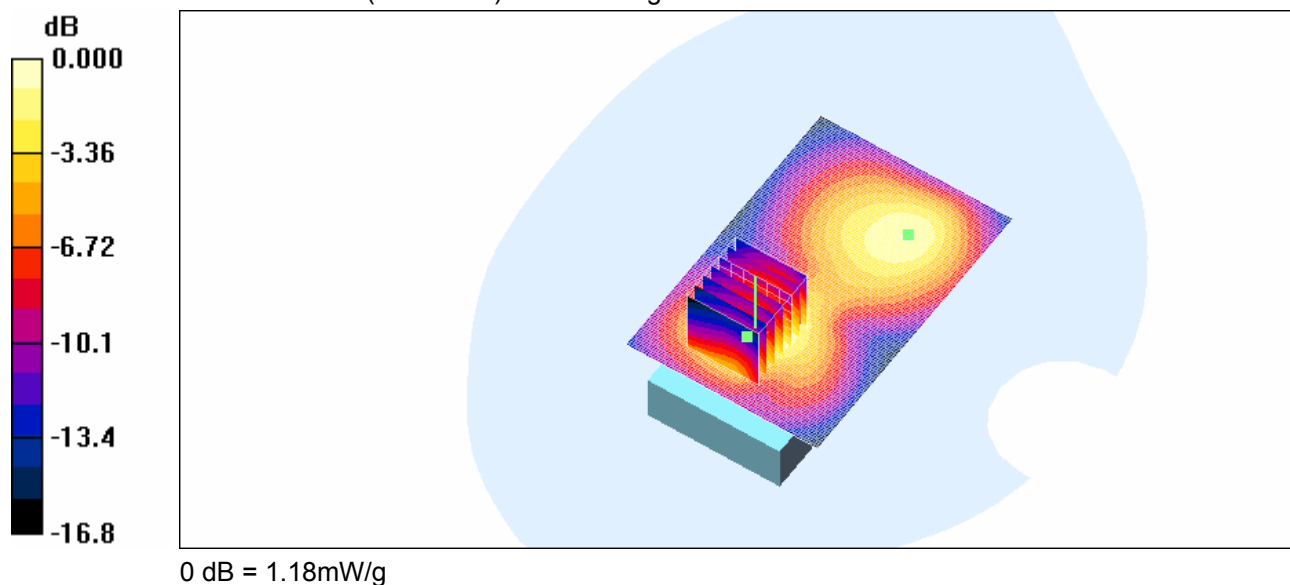

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 32(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Date/Time: 14/03/2006 10:33:11 AM

Test Laboratory: RTS

Body_Holster1_Front_GPRS1900_Mid_Chan_Amb_Temp_24_7_C_Liq_Temp_23_0_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.51, 4.51, 4.51); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Area Scan (81x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.02 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.6 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.901 mW/g; SAR(10 g) = 0.563 mW/g

Maximum value of SAR (measured) = 0.998 mW/g

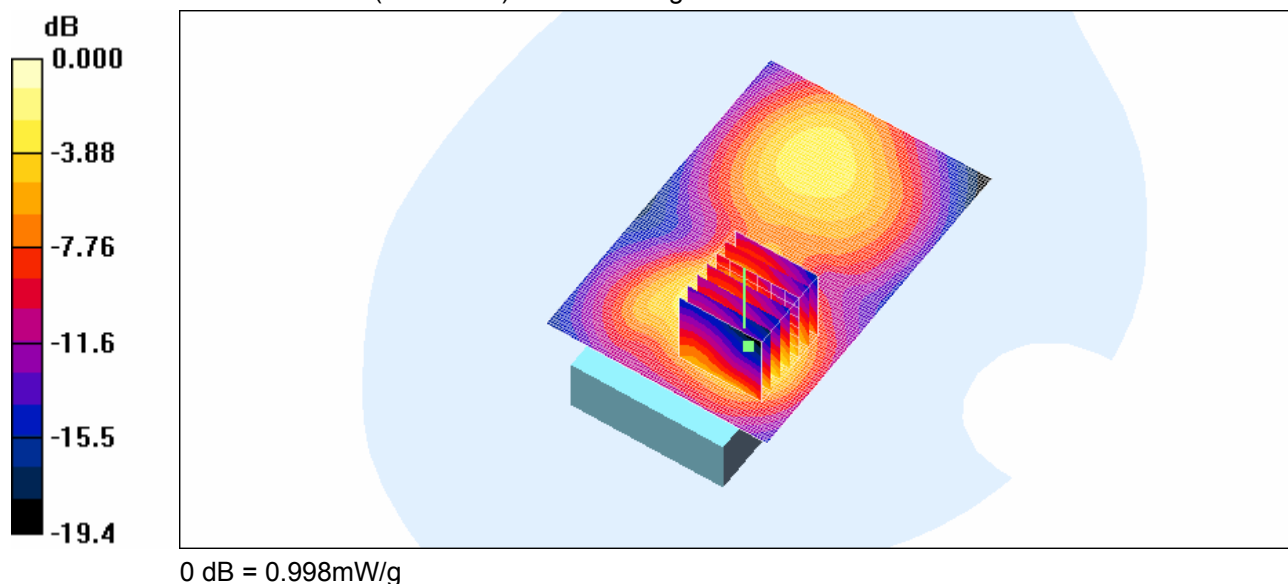

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 33(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Date/Time: 14/03/2006 1:20:54 PM

Test Laboratory: RTS

Body_Holster2_Back_GPRS1900_Low_Chan_Amb_Temp_24_6_C_Liq_Temp_23_1_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.51, 4.51, 4.51); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Area Scan (81x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.581 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.4 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.577 mW/g

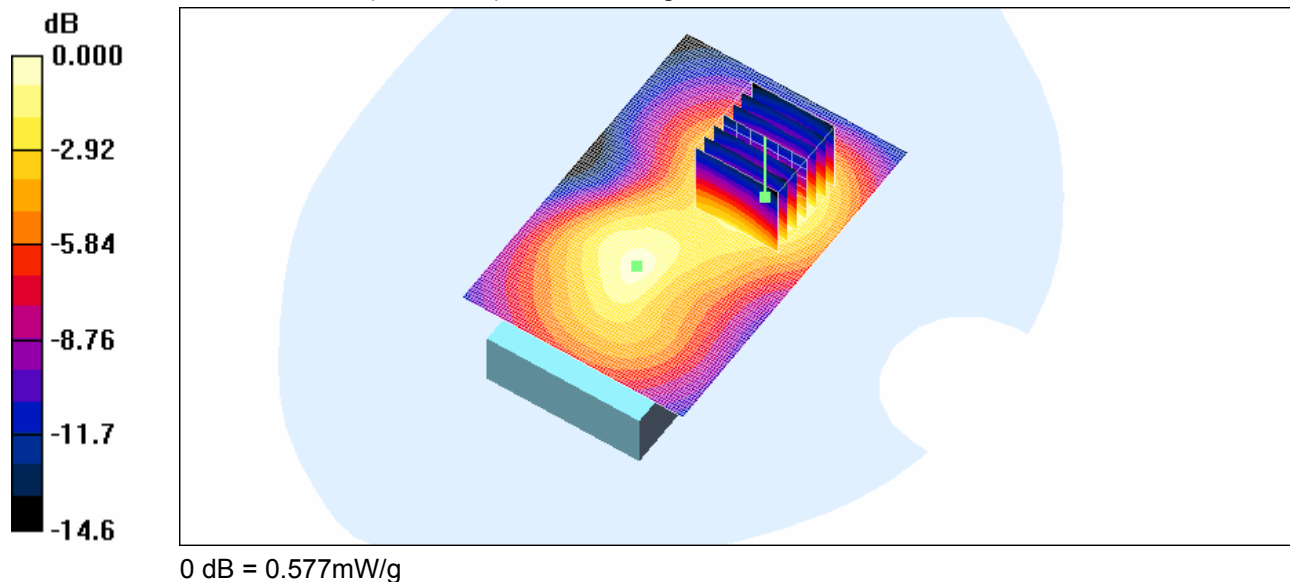

Date/Time: 14/03/2006 1:52:25 PM

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 34(73)
	Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

Test Laboratory: RTS

Body_Holster3_Back_GPRS1900_Low_Chan_Amb_Temp_25_0_C_Liq_Temp_23_0_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.51, 4.51, 4.51); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.507 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = -0.067 dB

Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.497 mW/g

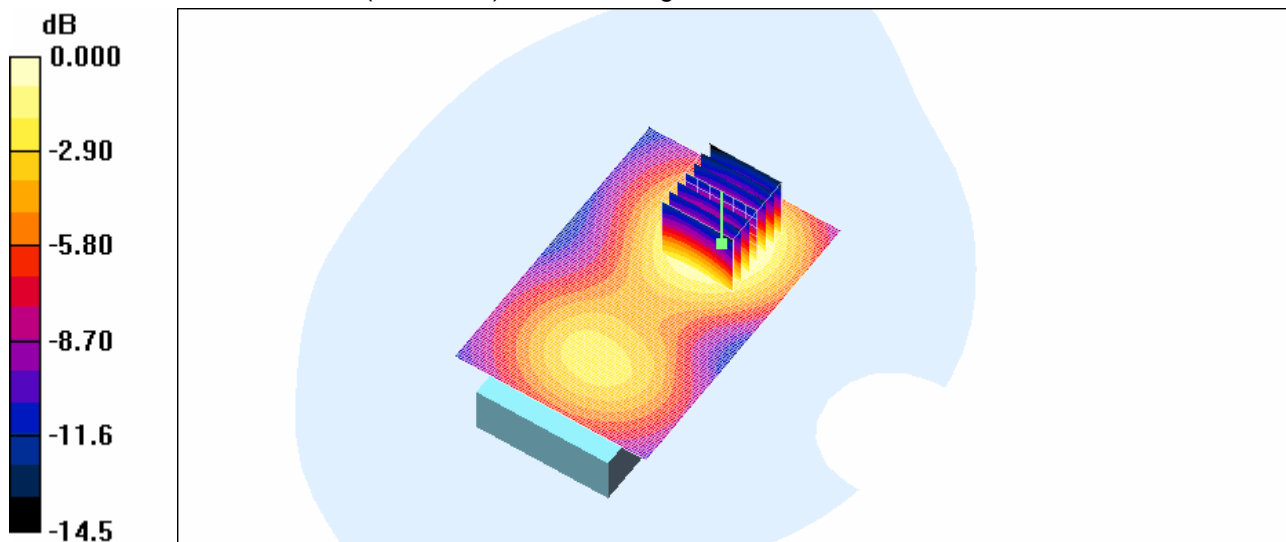

0 dB = 0.497mW/g

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 35(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Date/Time: 14/03/2006 2:20:19 PM

Test Laboratory: RTS

Body_Holster4_Back_GPRS1900_Low_Chan_Amb_Temp_24_5_C_Liq_Temp_23_1_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:4.2

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.51, 4.51, 4.51); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Area Scan (81x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.516 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.2 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.511 mW/g

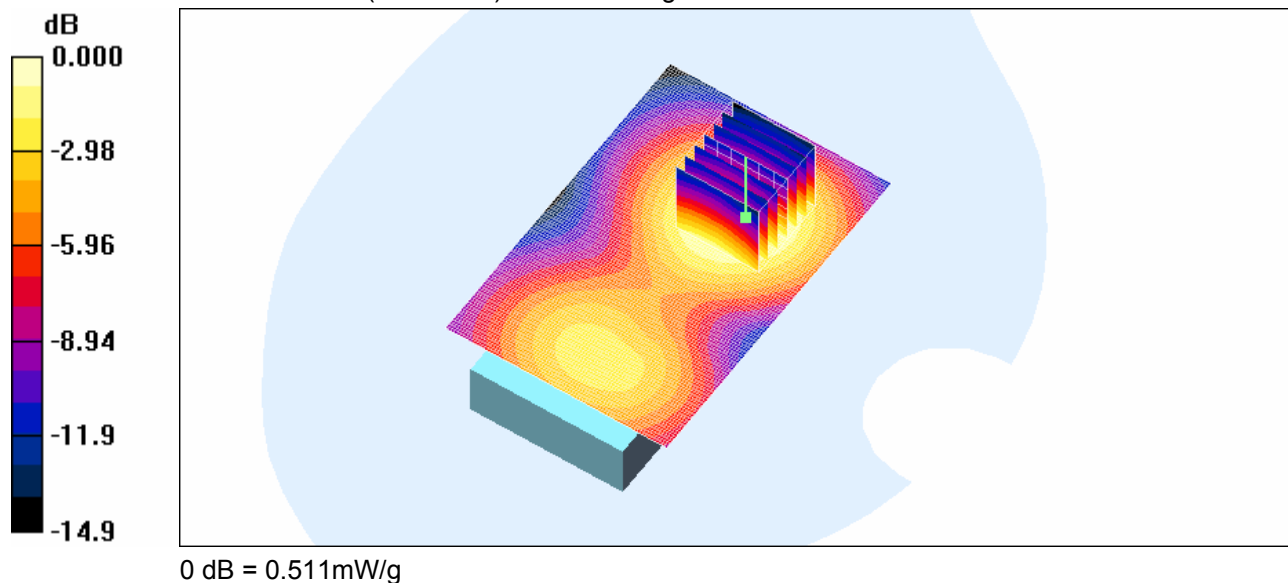

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 36(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Date/Time: 14/03/2006 2:52:17 PM

Test Laboratory: RTS

Body_Holster1_Back_GPRS1900_Headset_BT_ON_Low_Chan_Amb_Temp_24_4_C_Liq_Temp_23_2_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.51, 4.51, 4.51); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.929 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.3 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.831 mW/g; SAR(10 g) = 0.530 mW/g

Maximum value of SAR (measured) = 0.895 mW/g

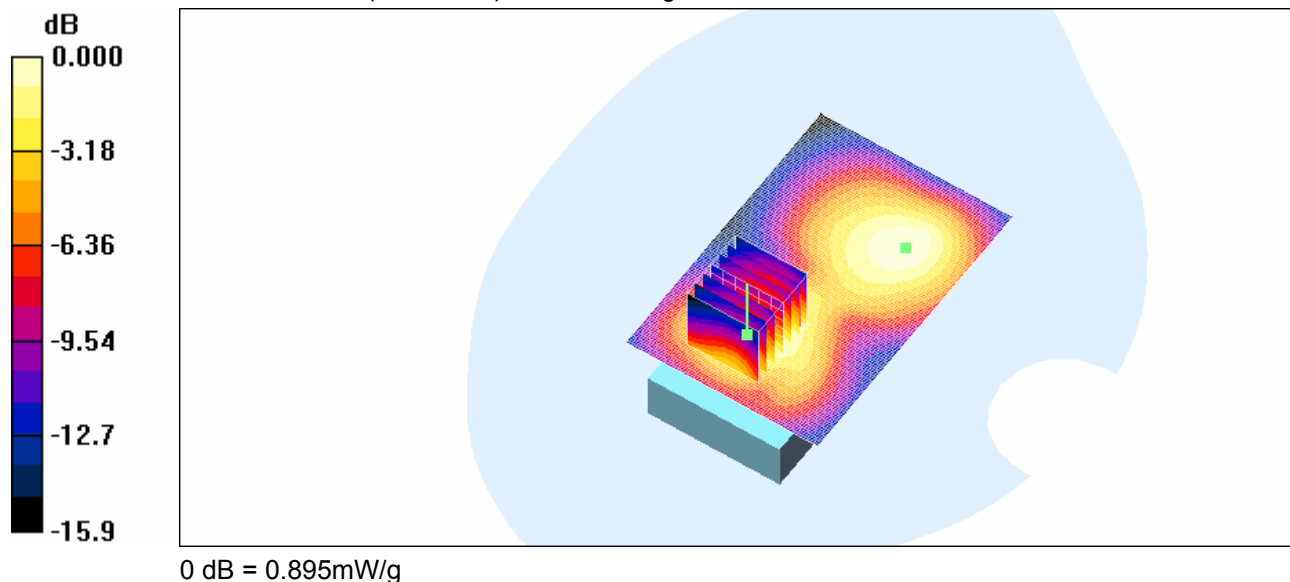

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		37(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

Date/Time: 14/03/2006 3:21:06 PM

Test Laboratory: RTS

Body_15 mm_Back_GPRS1900_Low_Chan_Amb_Temp_24_4_C_Liq_Temp_23_0_C

DUT: BlackBerry Wireless Handheld ; Type: Sample

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.51, 4.51, 4.51); Calibrated: 11/11/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 12/01/2006
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Unnamed procedure/Area Scan (81x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.519 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.63 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.731 W/kg


SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.283 mW/g

Maximum value of SAR (measured) = 0.507 mW/g

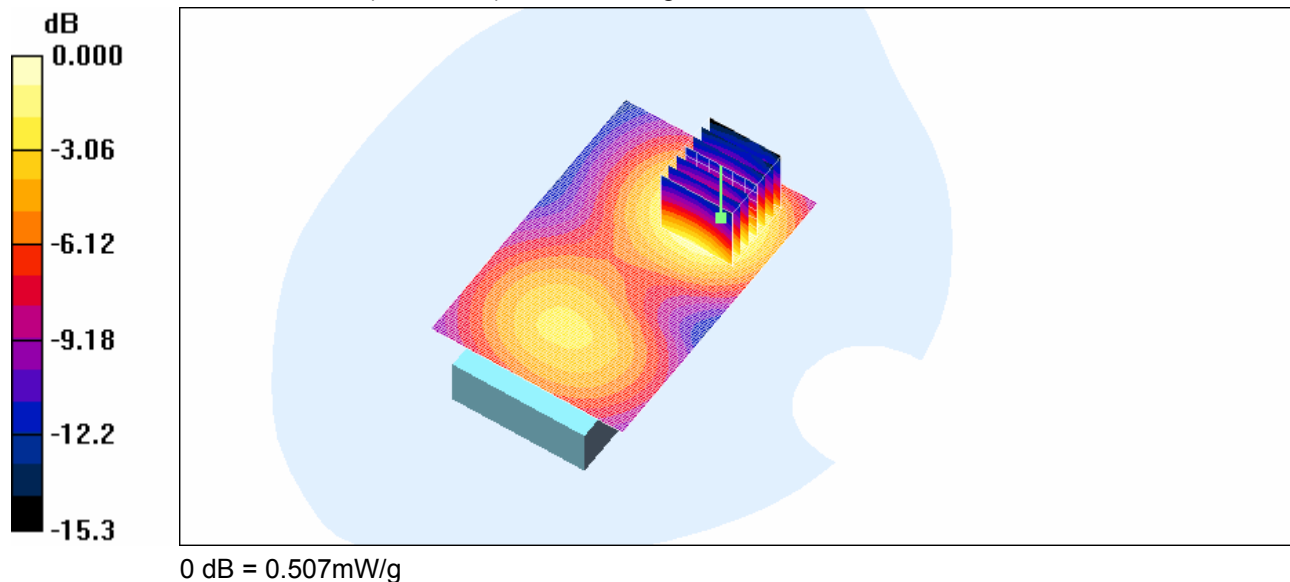

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 38(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Z-axis plot for worst-case body worn configuration:

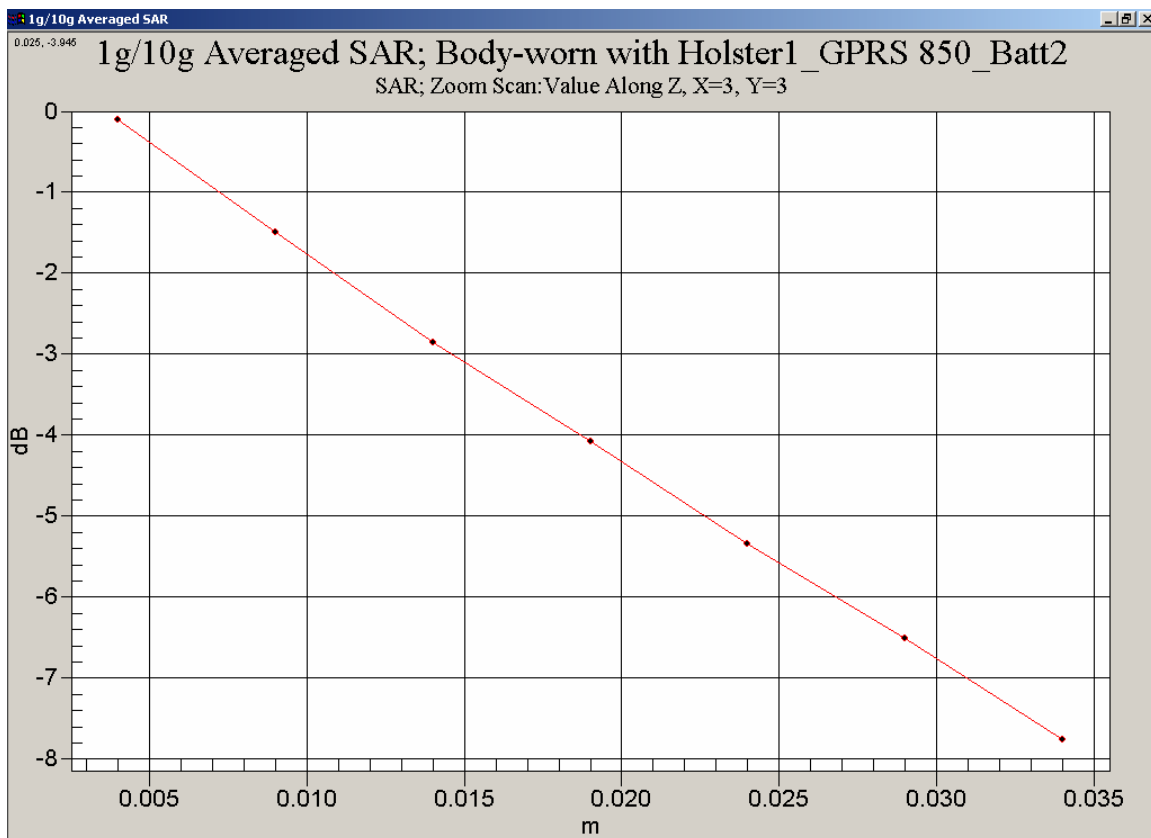

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		39(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

APPENDIX D: PROBE & DIPOLE CALIBRATION DATA

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 40(73)
	Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
 C Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RIM**

Certificate No: **ET3-1644_Nov05**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1644**

Calibration procedure(s) **QA CAL-01.v5
 Calibration procedure for dosimetric E-field probes**

Calibration date: **November 11, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realizes the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 654	27-Oct-05 (SPEAG, No. DAE4-654_Oct05)	Oct-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: November 12, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1644_Nov05

Page 1 of 9

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 41(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03 FCC ID: L6ARBA40GW

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 42(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
			FCC ID: L6ARBA40GW

ET3DV6 SN:1644

November 11, 2005

Probe ET3DV6

SN:1644

Manufactured:	November 7, 2001
Last calibrated:	November 19, 2004
Recalibrated:	November 11, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 43(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

ET3DV6 SN:1644

November 11, 2005

DASY - Parameters of Probe: ET3DV6 SN:1644

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.81 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	92 mV
NormY	1.97 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	92 mV
NormZ	1.89 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	92 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	8.3	4.3
SAR _{be} [%]	With Correction Algorithm	0.0	0.2

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	15.5	10.2
SAR _{be} [%]	With Correction Algorithm	0.5	0.2

Sensor Offset

Probe Tip to Sensor Center 2.7 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.


RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 44(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

ET3DV6 SN:1644

November 11, 2005

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

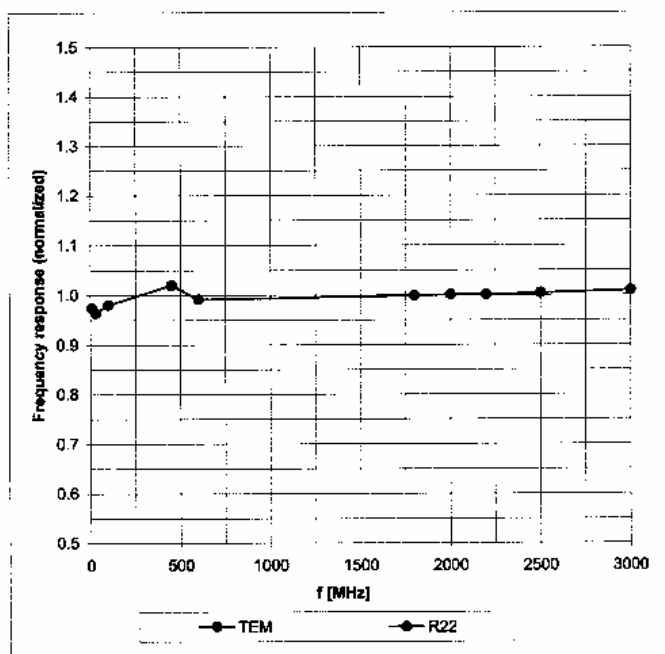


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 45(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

ET3DV6 SN:1644

November 11, 2005

Receiving Pattern (ϕ), $\theta = 0^\circ$

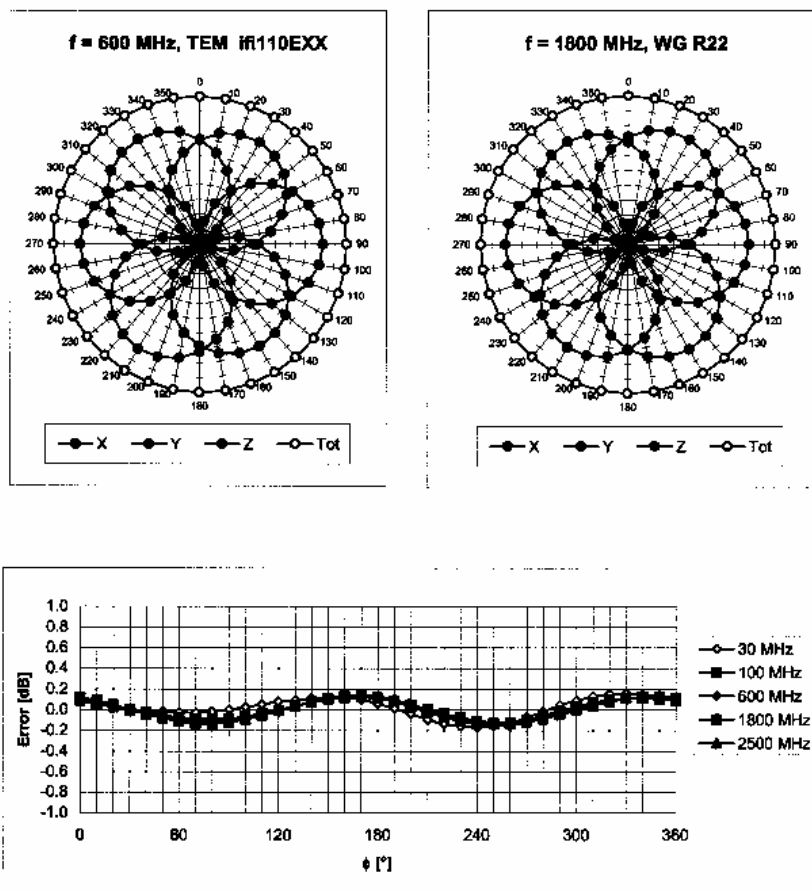


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 46(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

ET3DV6 SN:1644

November 11, 2005

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)

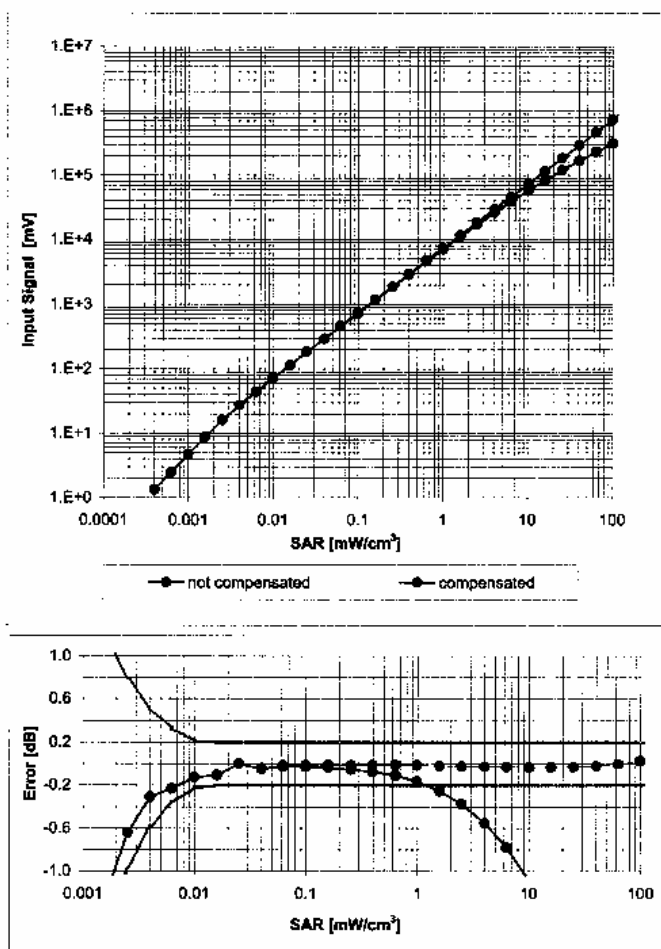


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 47(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

ET3DV6 SN:1644

November 11, 2005

Conversion Factor Assessment

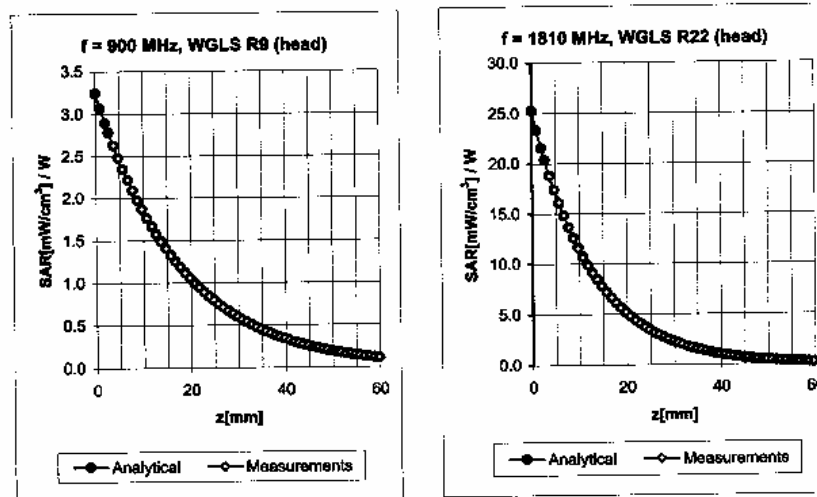

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.62	1.77	6.27 ± 11.0% (k=2)	
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.66	2.37	5.25 ± 11.0% (k=2)	
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.49	2.07	6.16 ± 11.0% (k=2)	
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.60	2.65	4.51 ± 11.0% (k=2)	

^c The validity of ± 100 MHz only applies for DASy v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 48(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

ET3DV6 SN:1644

November 11, 2005

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

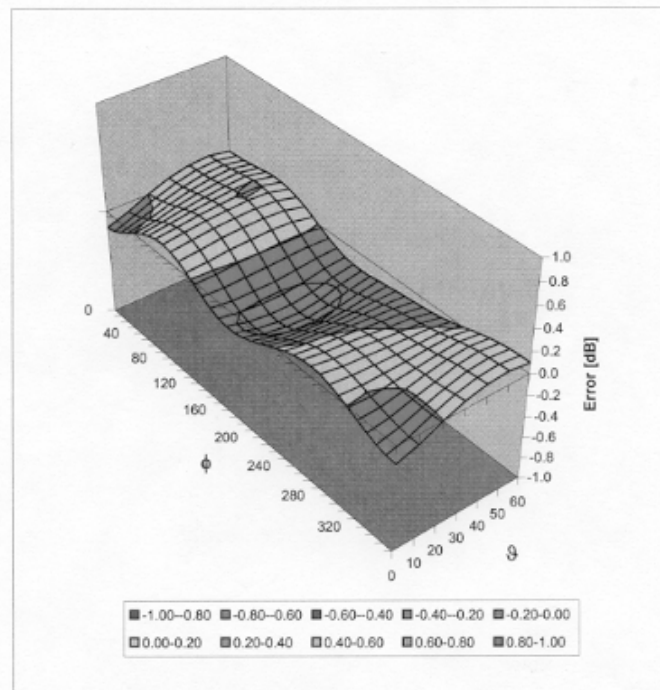

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		49(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 50(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RIM**

Certificate No: **D835V2-446_Jan05**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 446**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **January 7, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1507	26-Oct-04 (SPEAG, No. ET3-1507_Oct04)	Oct-05
DAE4	SN 907	03-May-04 (SPEAG, No. DAE4-907_May04)	May-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05

Calibrated by:	Name Judith Müller	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 13, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D835V2-446_Jan05

Page 1 of 6

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 51(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 52(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	42.2 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature during test	(22.0 \pm 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	2.27 mW / g
SAR normalized	normalized to 1W	9.08 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.10 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.48 mW / g
SAR normalized	normalized to 1W	5.92 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	5.93 mW / g \pm 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 53(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.1 Ω - 7.1 j Ω
Return Loss	- 22.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.385 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 24, 2001

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		54(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attavi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

DASY4 Validation Report for Head TSL

Date/Time: 01/07/05 15:08:43

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN446

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 42.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.24, 6.24, 6.24); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 03.05.2004
- Phantom: Flat Phantom 4.9L; Type: QD000P50AA; Serial: SN:1001;
- Measurement SW: DASY4, V4.4 Build 10; Postprocessing SW: SEMCAD, V1.8 Build 133

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.44 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.27 mW/g; SAR(10 g) = 1.48 mW/g

Maximum value of SAR (measured) = 2.45 mW/g

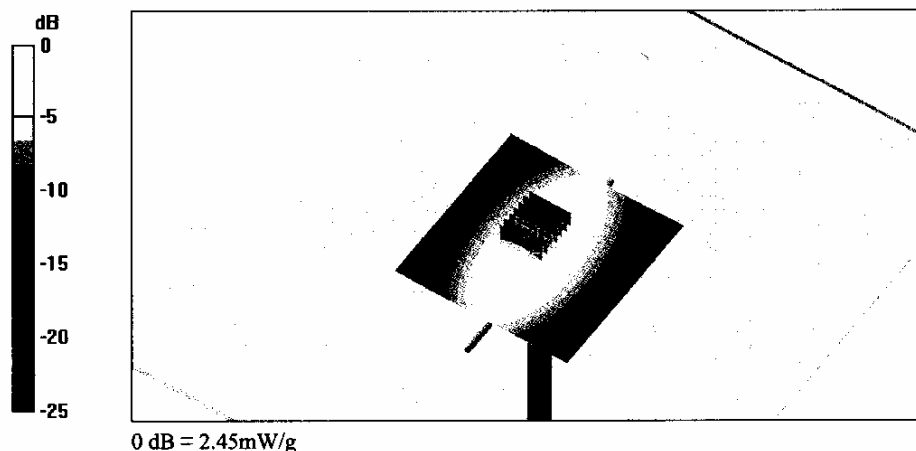

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 56(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RIM**

Certificate No: **D1900V2-545_Jan05**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 545**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **January 06, 2005**



Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1507	26-Oct-04 (SPEAG, No. ET3-1507_Oct04)	Oct-05
DAE4	SN 907	03-May-04 (SPEAG, No. DAE4-907_May04)	May-05
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

Calibrated by:	Name Judith Müller	Function Laboratory Technician	Signature 
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 13, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1900V2-545_Jan05

Page 1 of 6

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 57(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03 FCC ID: L6ARBA40GW

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 58(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.9 \pm 6 %	1.45 mho/m \pm 6 %
Head TSL temperature during test	(22.0 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	10.2 mW / g
SAR normalized	normalized to 1W	40.8 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	39.5 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.34 mW / g
SAR normalized	normalized to 1W	21.4 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	20.7 mW / g \pm 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 59(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.7 Ω + 2.1 j Ω
Return Loss	- 31.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.198 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 15, 2001

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 60(73)
	Author Data Daoud Attavi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW	

DASY4 Validation Report for Head TSL

Date/Time: 01/06/05 18:30:23

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN545

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.96, 4.96, 4.96); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 03.05.2004
- Phantom: Flat Phantom quarter size; Type: QD000P50AA; Serial: SN:1001;
- Measurement SW: DASY4, V4.4 Build 10; Postprocessing SW: SEMCAD, V1.8 Build 133

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 11.6 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 95.2 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 18 W/kg


SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.34 mW/g

Maximum value of SAR (measured) = 11.7 mW/g

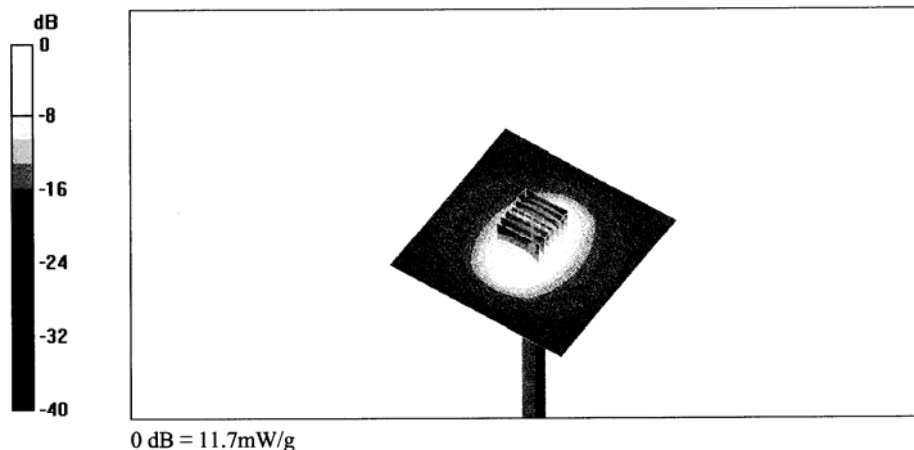

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 61(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW

Impedance Measurement Plot for Head TSL

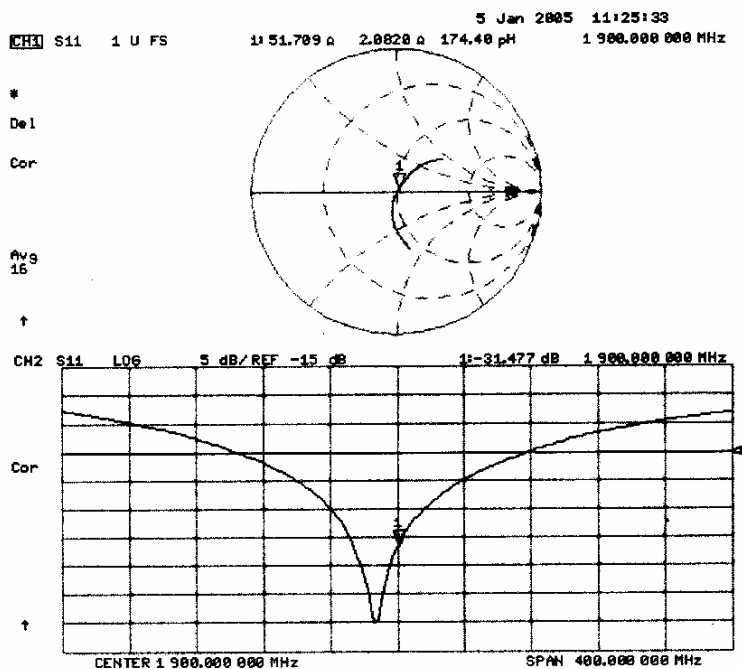

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		62(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW

APPENDIX E: SAR SET UP PHOTOS

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 63(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		

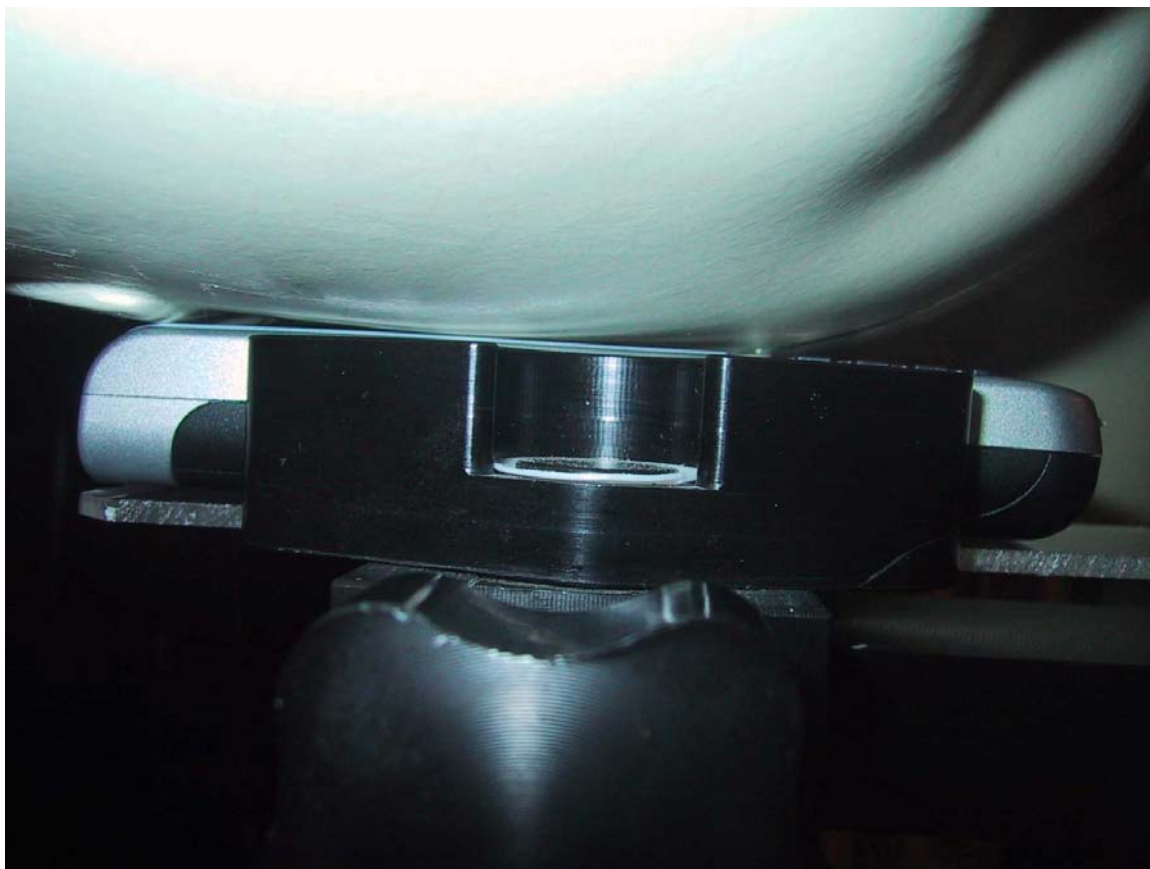


Figure E1. Right touch position

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 64(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW



Figure E2. Right tilt position

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 65(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		



Figure E3. Left touch position

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 66(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
		FCC ID: L6ARBA40GW



Figure E4. Left tilt position

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 67(73)
	Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
			FCC ID: L6ARBA40GW



<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		68(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW



Figure E6. Body worn configuration (Holster 1)

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 69(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		



Figure E7. Body worn configuration (Holster 2)

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 70(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		



Figure E8. Body worn configuration (Holster 3)

<div>RTS</div> <div>RIM Testing Services</div>	Document		Page
	Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		71(73)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	March 03-16, April 10-11, 2006	RTS-0279-0603-03	L6ARBA40GW



Figure E9. Body worn configuration (Holster 4)

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report	Page 72(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03
FCC ID: L6ARBA40GW		



Figure E10. Body worn configuration with BT ON and headset attached (Holster 1)

RTS RIM Testing Services	Document Appendices for the BlackBerry Wireless Handheld Model RBA41GW / RBA42GW / RBA43GW SAR Report		Page 73(73)
Author Data Daoud Attayi	Dates of Test March 03-16, April 10-11, 2006	Test Report No RTS-0279-0603-03	FCC ID: L6ARBA40GW



Figure E12. Body worn configuration (15 mm distance)