




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (26) of (45)

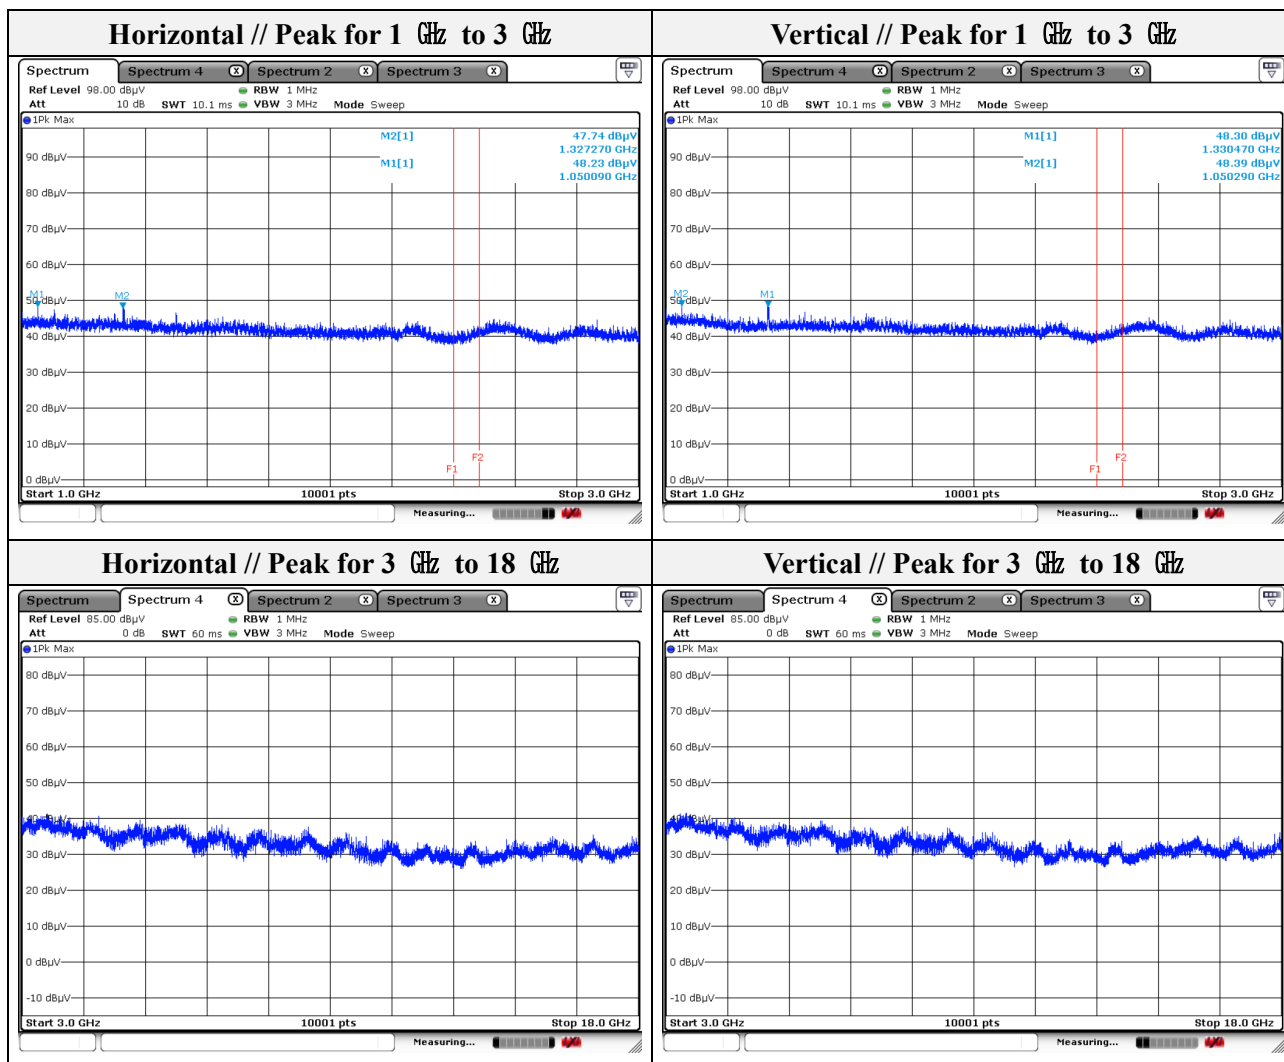

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (27) of (45)

Mode: 802.11g (6 Mbps)
Channel: 06
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.30	48.10	Peak	H	-9.97	-	38.13	74.00	35.87
1 050.29	47.33	Peak	V	-9.64	-	37.69	74.00	36.31
1 327.07	47.19	Peak	V	-7.58	-	39.61	74.00	34.39
1 331.87	48.37	Peak	H	-7.54	-	40.83	74.00	33.17

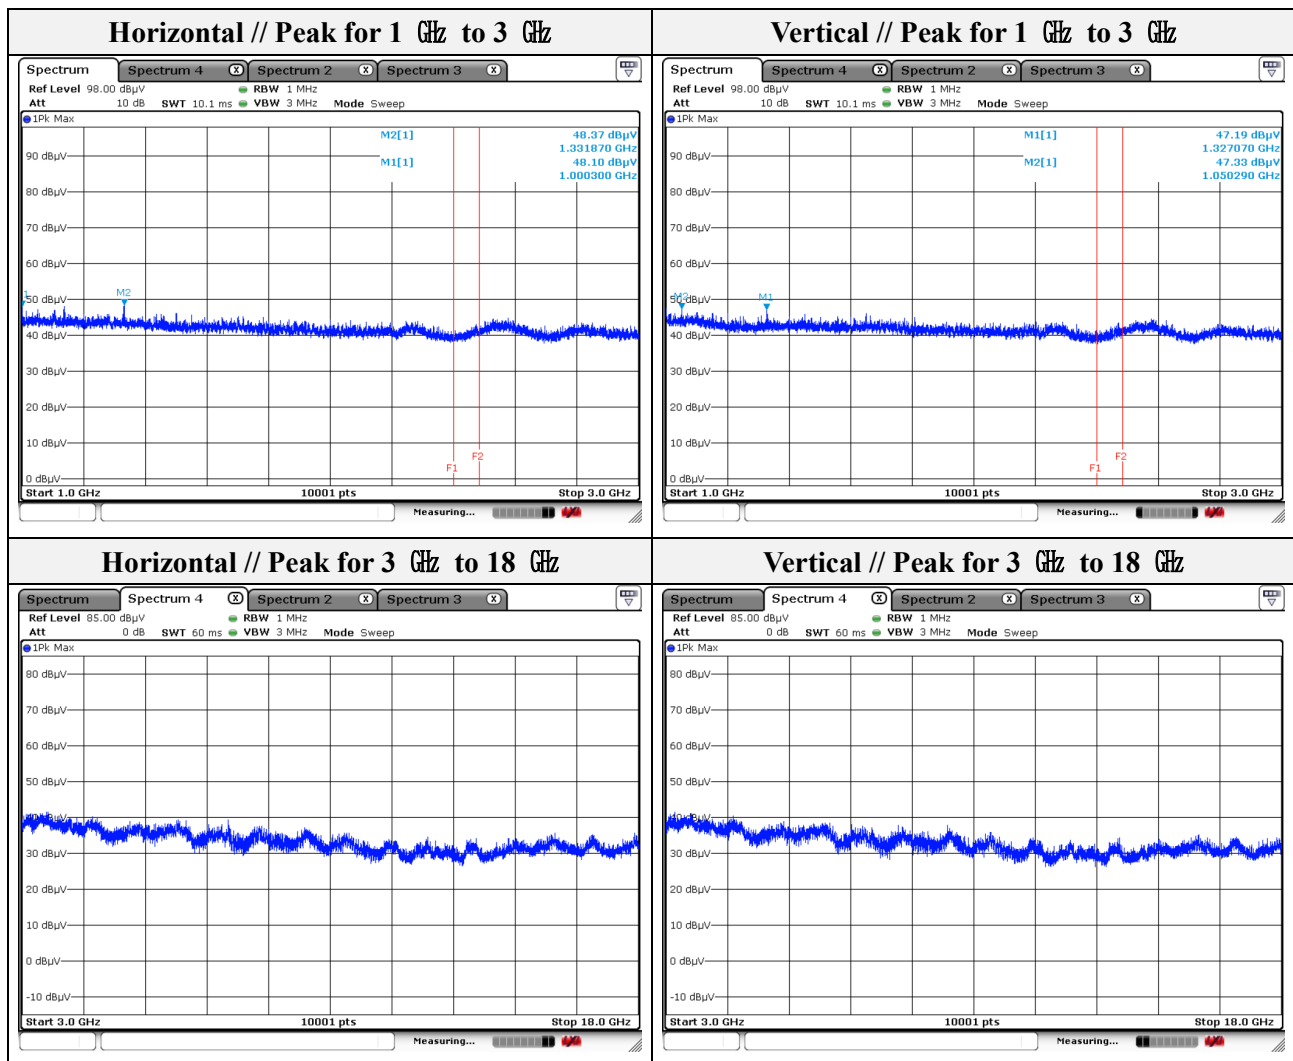

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (28) of (45)


Mode: 802.11g (6 Mbps)
Channel: 11
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.10	48.04	Peak	H	-9.97	-	38.07	74.00	35.93
1 050.29	48.12	Peak	V	-9.64	-	38.48	74.00	35.52
1 328.07	47.60	Peak	V	-7.57	-	40.03	74.00	33.97
1 331.67	49.41	Peak	H	-7.54	-	41.87	74.00	32.13

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 488.69	46.17	Peak	V	-1.65	-	45.19	74.00	28.81
2 490.29	46.21	Peak	H	-1.65	-	44.56	74.00	29.44

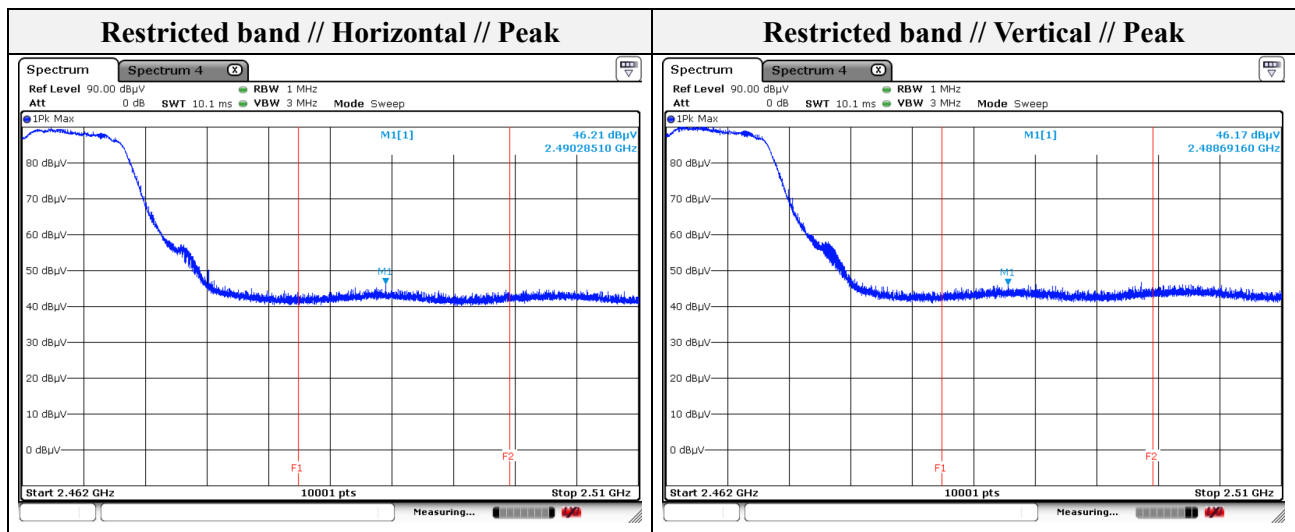


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (29) of (45)

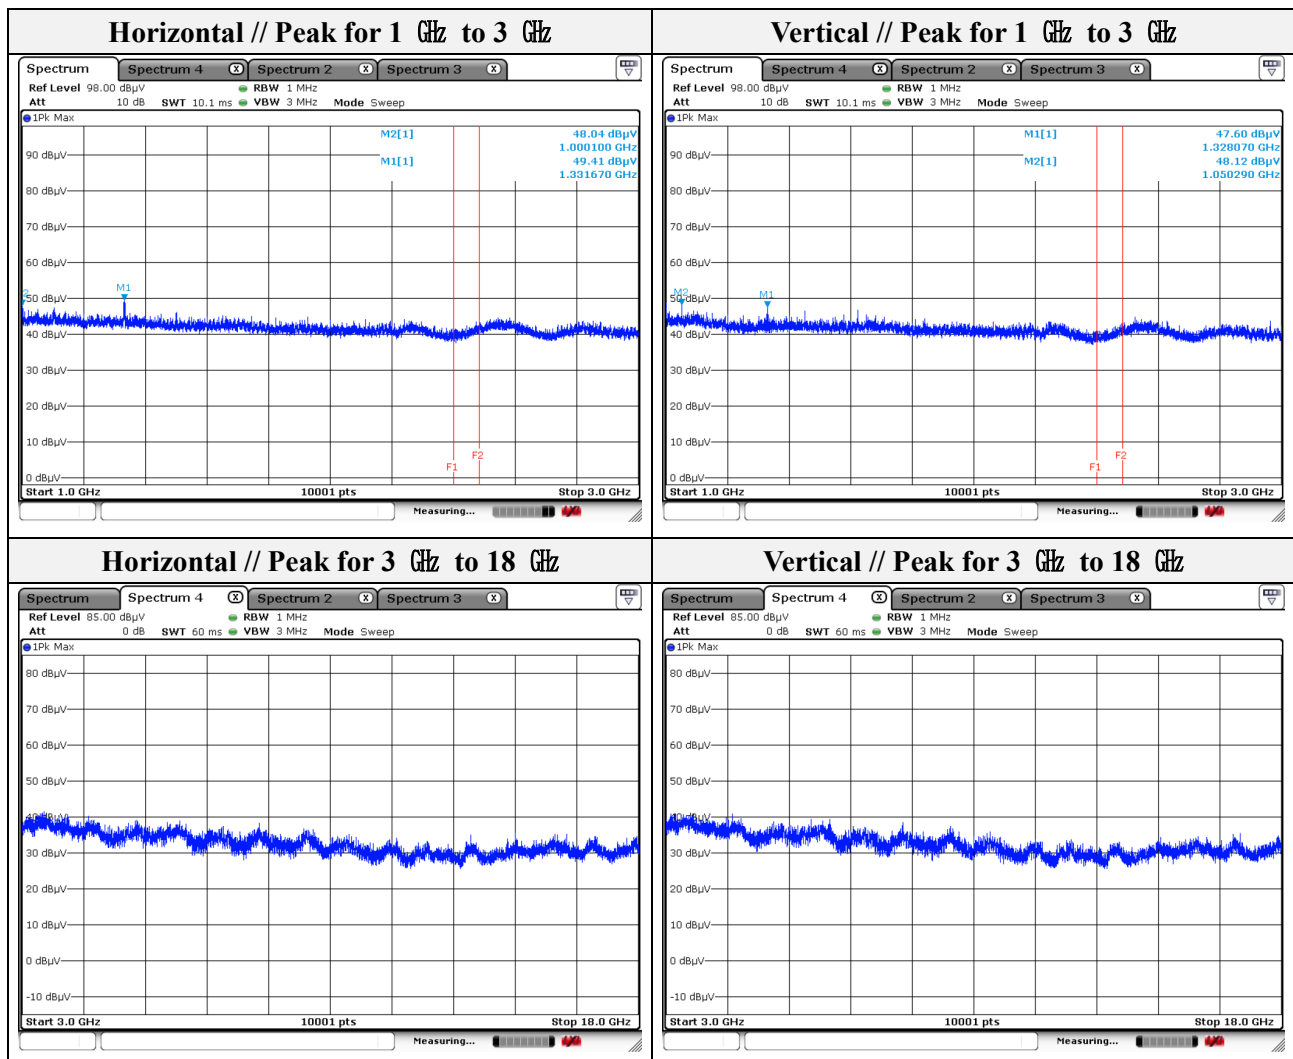

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (30) of (45)


Mode: 802.11n_HT20 (MCS0)
Channel 01
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.10	47.45	Peak	H	-9.97	-	37.48	74.00	36.52
1 050.29	47.30	Peak	V	-9.64	-	37.66	74.00	36.34
1 331.87	48.74	Peak	H	-7.54	-	41.20	74.00	32.80
1 333.07	47.61	Peak	V	-7.53	-	40.08	74.00	33.92

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 358.11	44.90	Peak	V	-1.87	-	43.03	74.00	30.97
2 377.46	44.07	Peak	H	-1.87	-	42.20	74.00	31.80

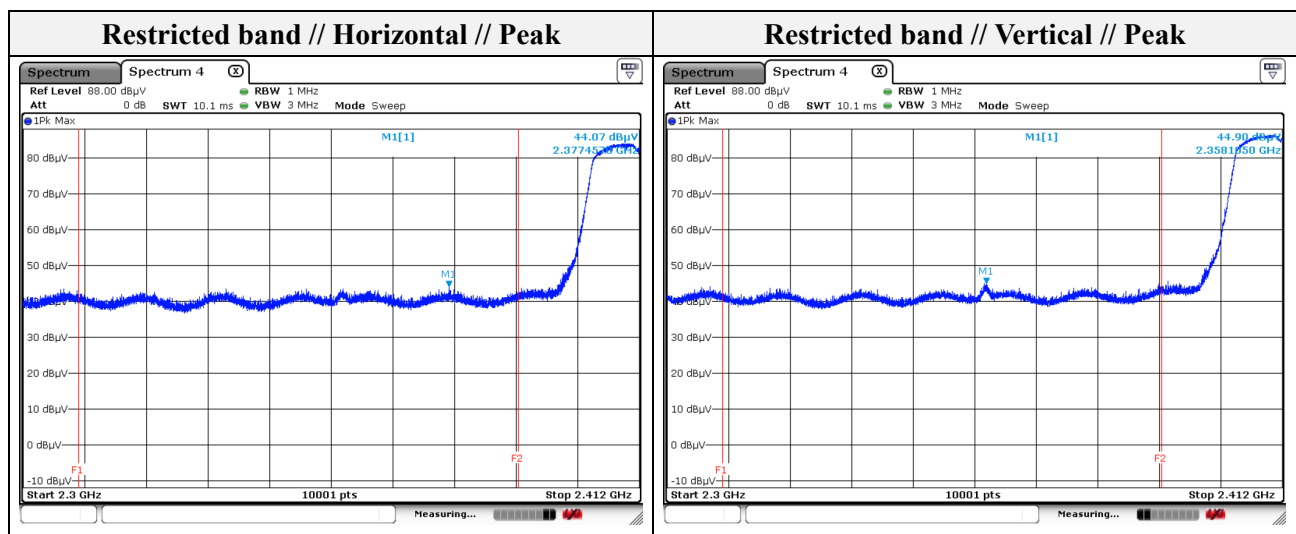


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (31) of (45)

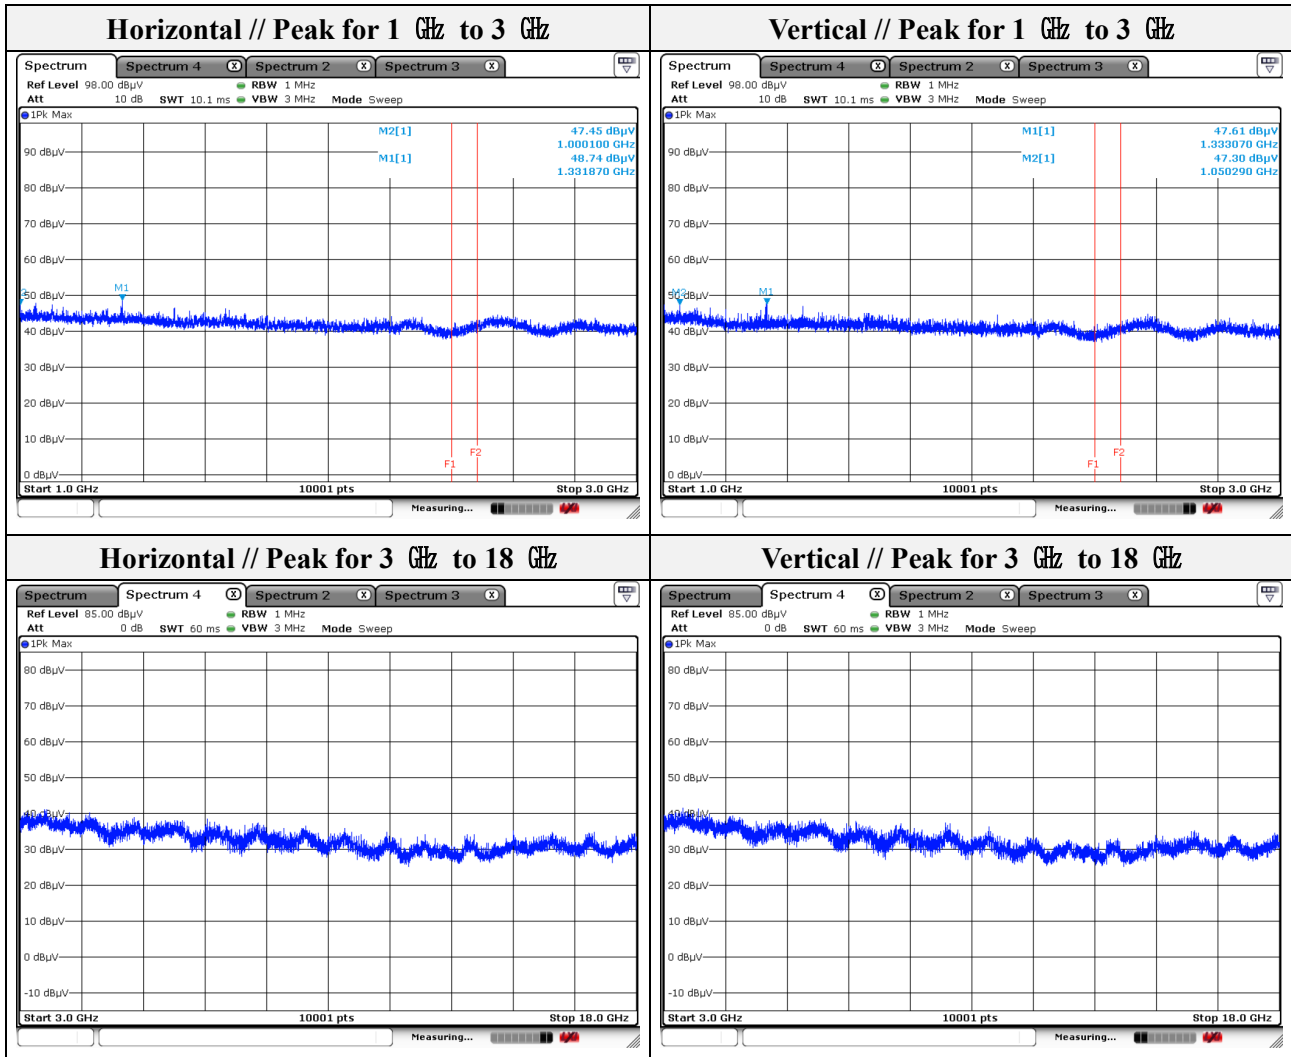

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (32) of (45)

Mode: 802.11n_HT20 (MCS0)
Channel 06
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 050.29	46.84	Peak	V	-9.64	-	37.20	74.00	36.80
1 103.69	47.96	Peak	H	-9.28	-	38.68	74.00	35.32
1 327.07	49.64	Peak	H	-7.58	-	42.06	74.00	31.94
1 331.67	48.68	Peak	V	-7.54	-	41.14	74.00	32.86

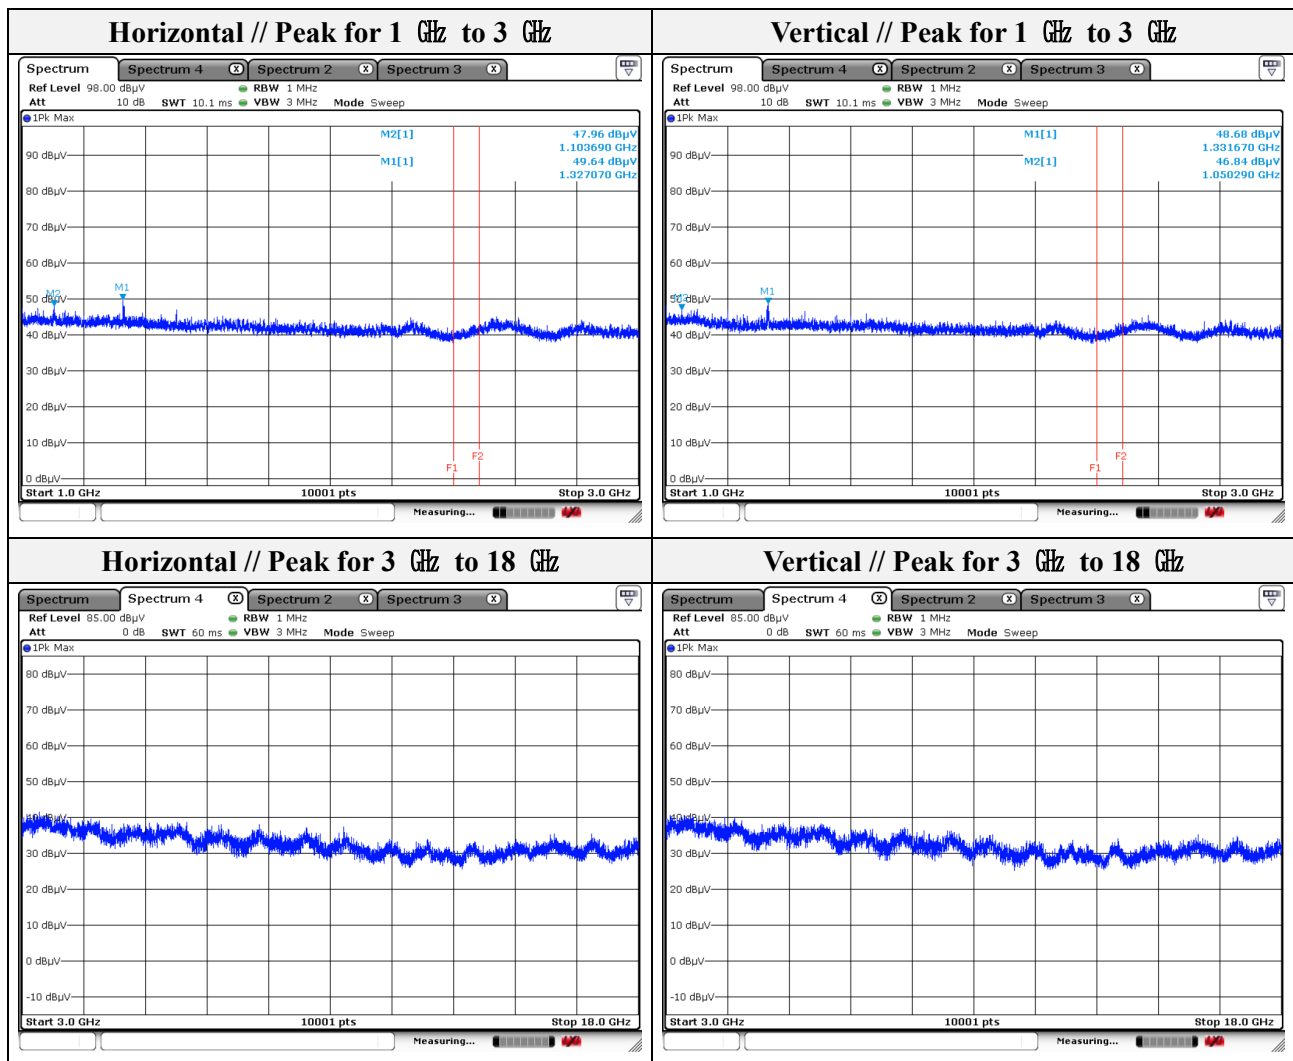

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (33) of (45)


Mode: 802.11n_HT20 (MCS0)
Channel: 11
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.10	47.70	Peak	H	-9.97	-	37.73	74.00	36.27
1 050.29	47.07	Peak	V	-9.64	-	37.43	74.00	36.57
1 330.27	49.05	Peak	V	-7.55	-	41.50	74.00	32.50
1 332.67	48.71	Peak	H	-7.53	-	41.18	74.00	32.82

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 489.35	47.00	Peak	V	-1.65	-	46.02	74.00	27.98
2 489.61	46.44	Peak	H	-1.65	-	44.79	74.00	29.21

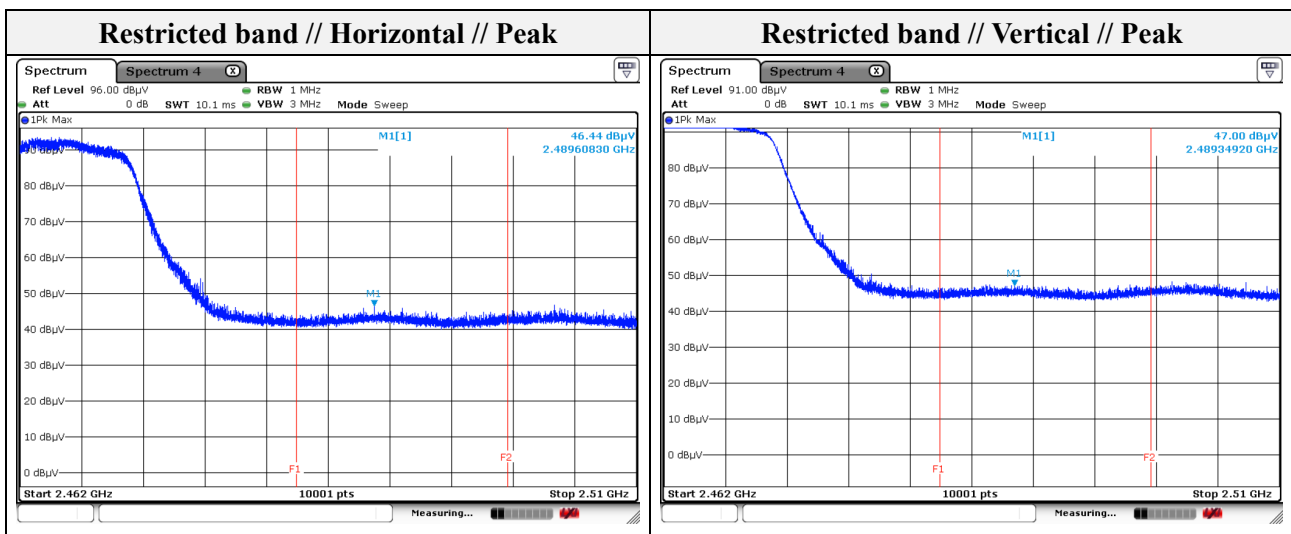


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (34) of (45)

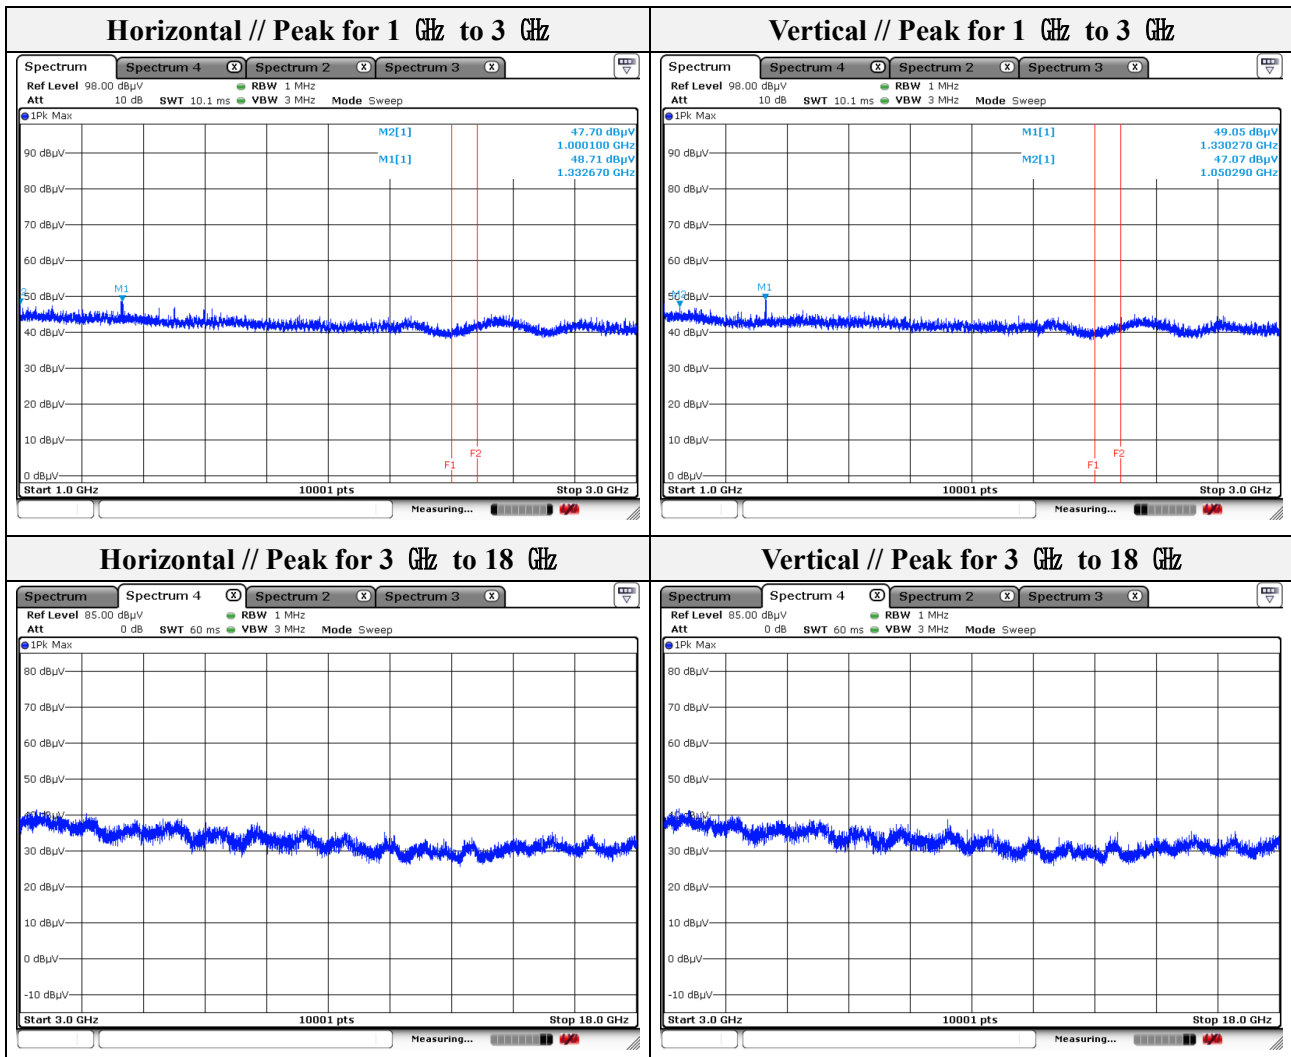

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (35) of (45)


Mode: 802.11n_HT40 (MCS0)
Channel: 03
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.10	49.21	Peak	H	-9.97	-	39.24	74.00	34.76
1 050.29	47.82	Peak	V	-9.64	-	38.18	74.00	35.82
1 328.47	48.72	Peak	V	-7.57	-	41.15	74.00	32.85
1 330.47	49.51	Peak	H	-7.55	-	41.96	74.00	32.04

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 388.08	44.68	Peak	H	-1.86	-	42.82	74.00	31.18
2 388.89	48.14	Peak	V	-1.86	-	46.28	74.00	27.72
2 389.12	44.25	Peak	H	-1.86	-	42.39	74.00	31.61
2 389.66	48.42	Peak	V	-1.86	-	46.56	74.00	27.44

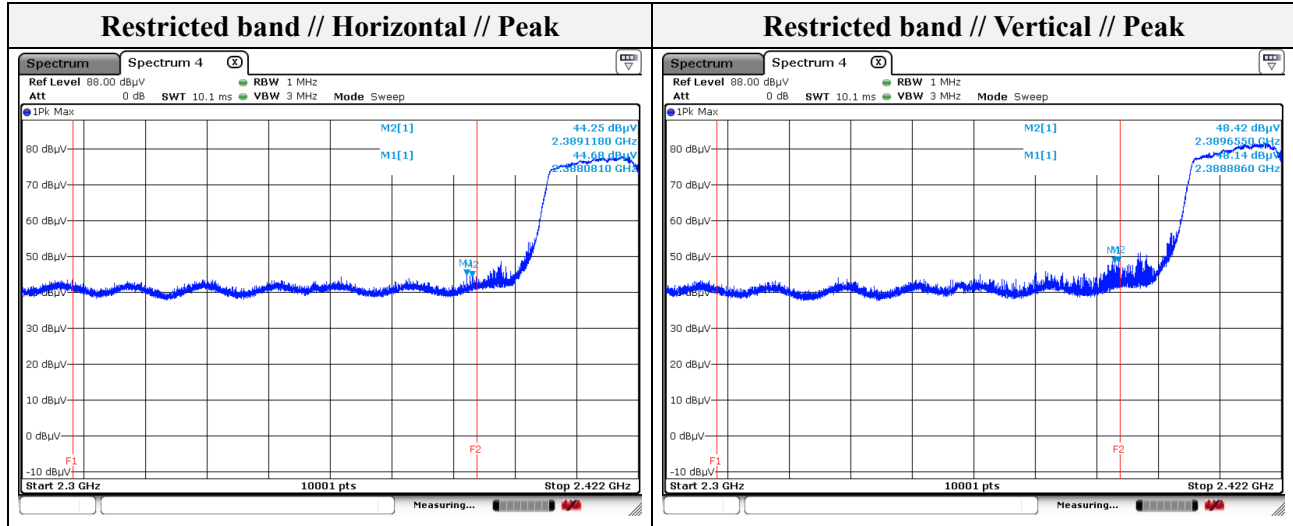


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (36) of (45)

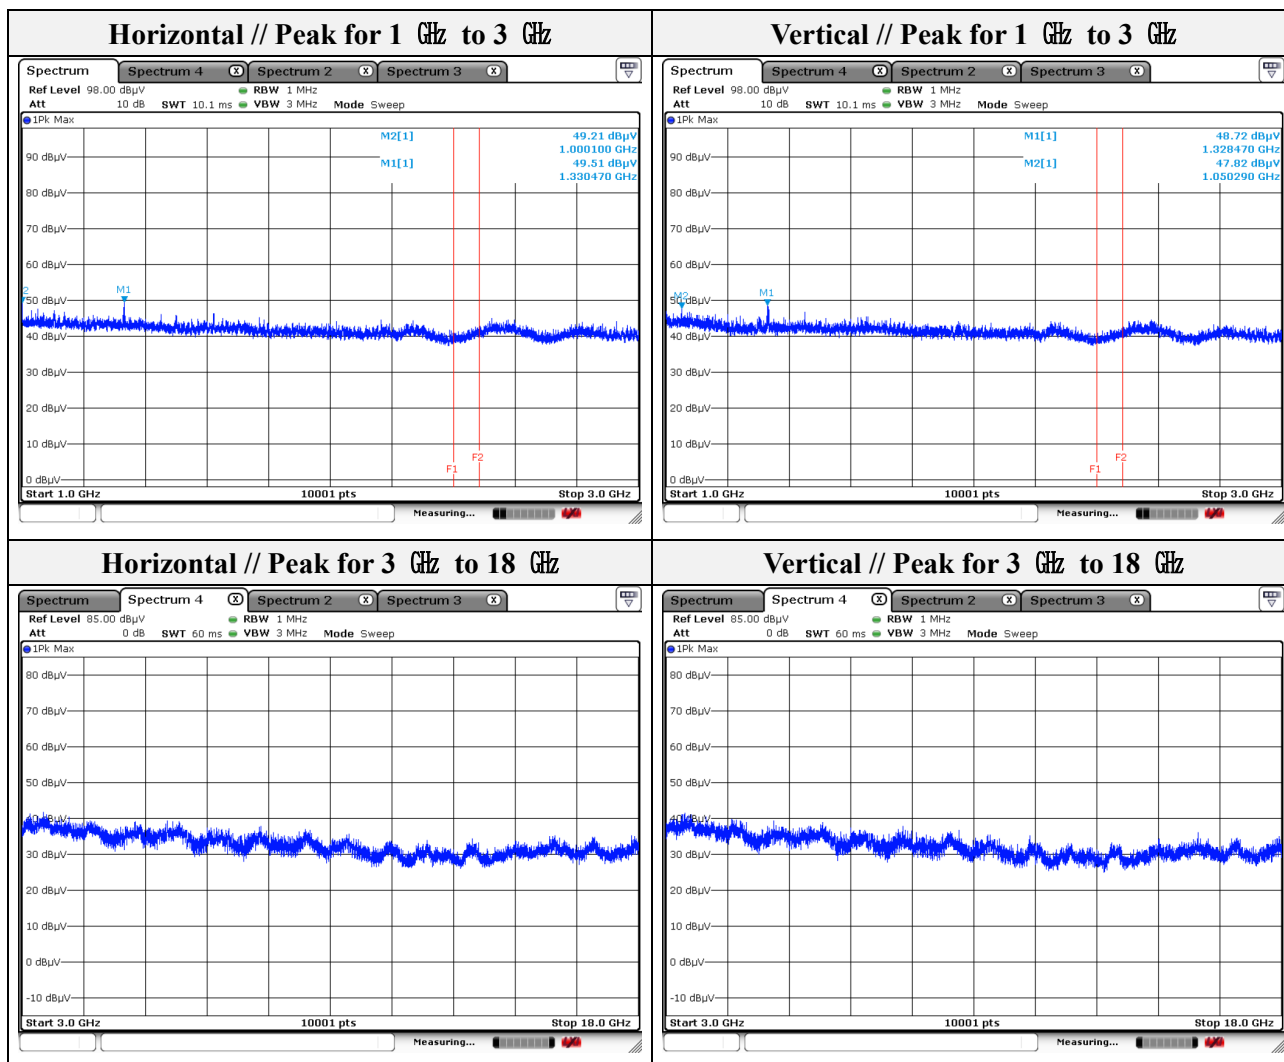

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (37) of (45)

Mode: 802.11n_HT40 (MCS0)
Channel: 06
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 050.09	48.14	Peak	H	-9.64	-	38.50	74.00	35.50
1 050.29	47.63	Peak	V	-9.64	-	37.99	74.00	36.01
1 327.27	48.51	Peak	V	-7.58	-	40.93	74.00	33.07
1 331.87	48.29	Peak	H	-7.54	-	40.75	74.00	33.25

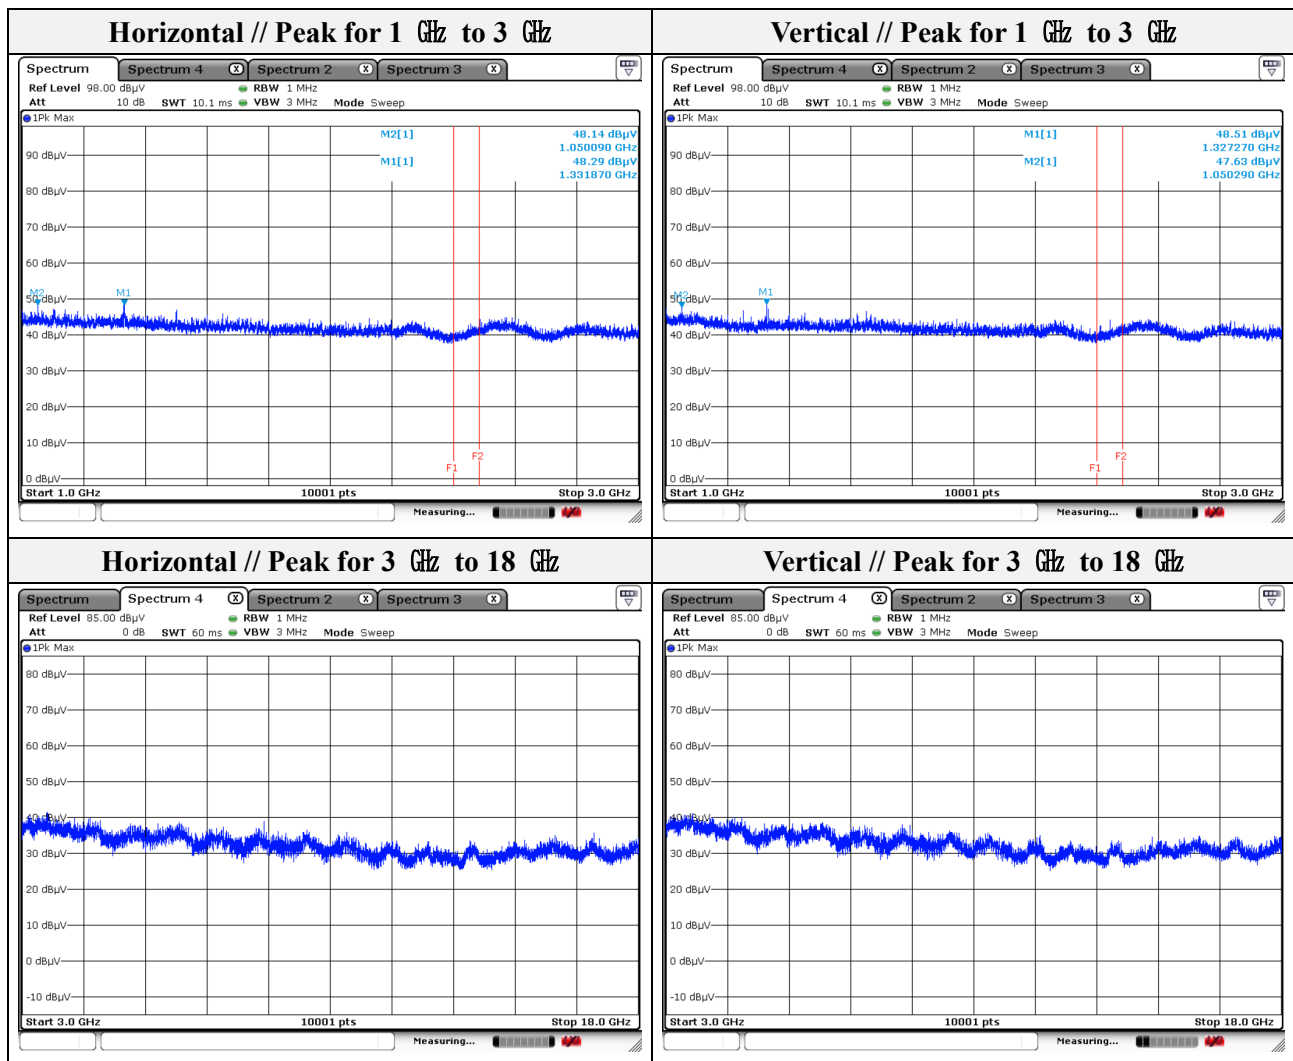

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (38) of (45)


Mode: 802.11n_HT40 (MCS0)
Channel: 09
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.30	48.65	Peak	H	-9.97	-	38.68	74.00	35.32
1 050.29	47.95	Peak	V	-9.64	-	38.31	74.00	35.69
1 327.27	49.56	Peak	V	-7.58	-	41.98	74.00	32.02
1 328.07	49.83	Peak	H	-7.57	-	42.26	74.00	31.74

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 484.91	55.10	Peak	V	-1.66	-	53.44	74.00	20.56
2 485.31	54.89	Peak	V	-1.66	-	53.23	74.00	20.77
2 485.33	50.31	Peak	H	-1.66	-	48.65	74.00	25.35
2 486.99	50.73	Peak	H	-1.65	-	49.08	74.00	24.92

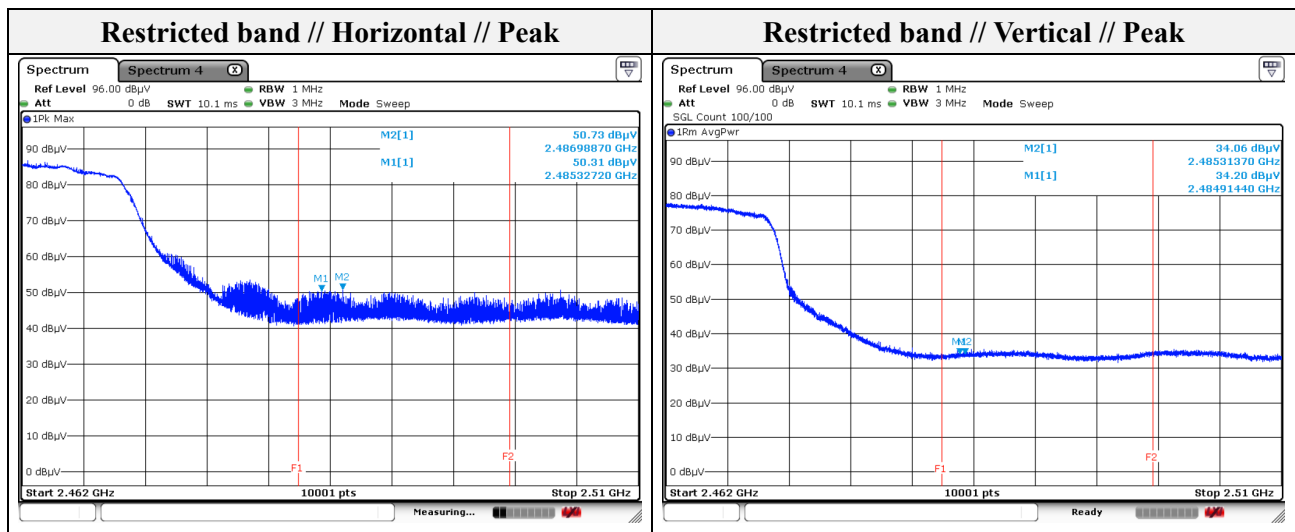


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (39) of (45)

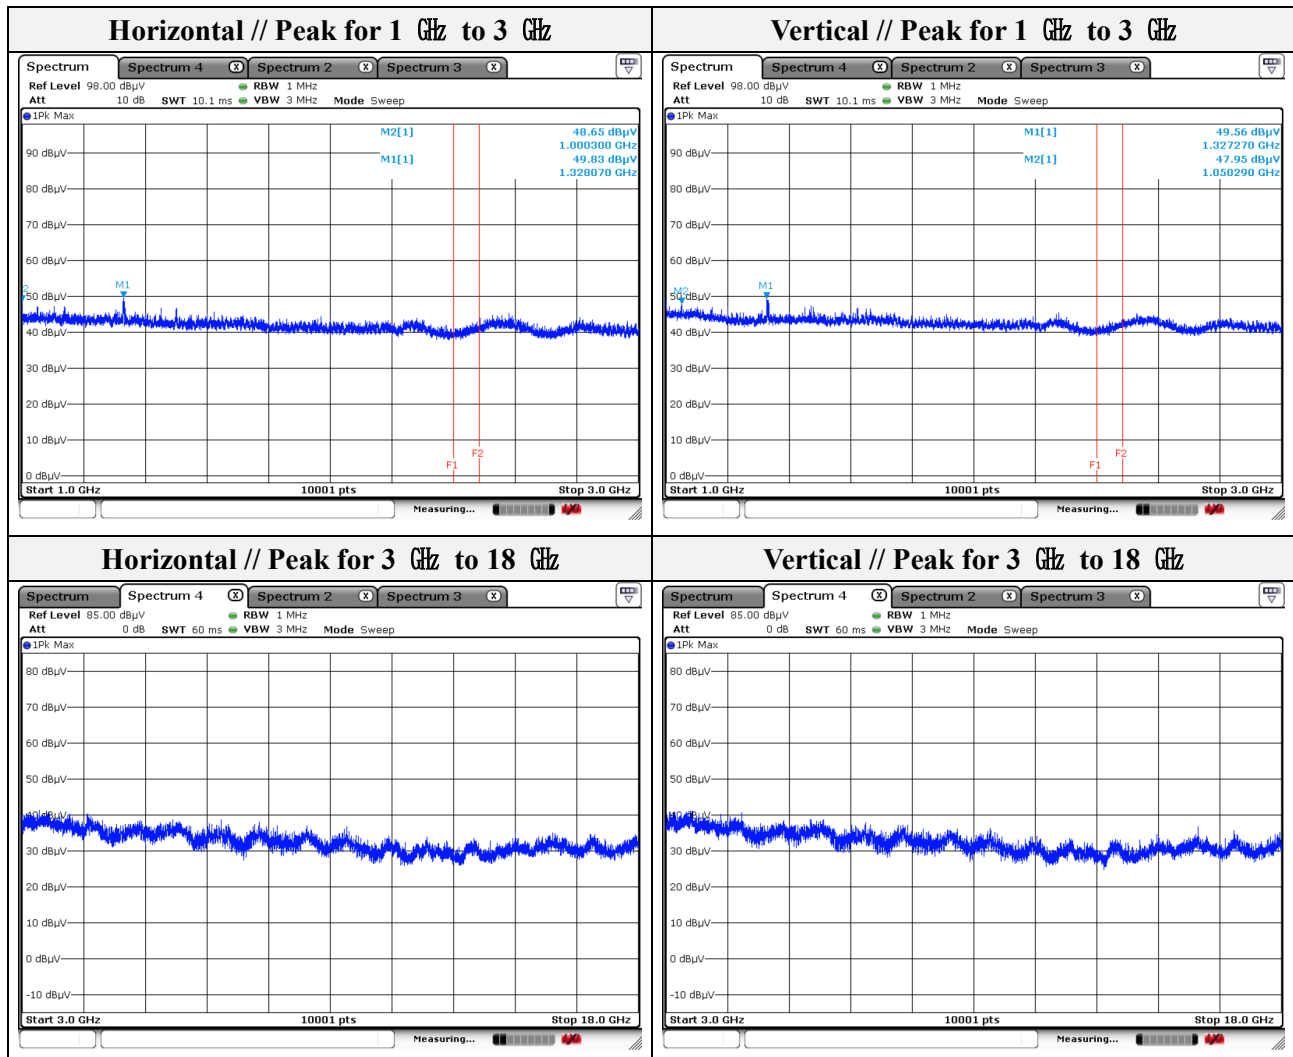

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:
KES-RF-23T0069
Page (40) of (45)

Test results (18 GHz to 30 GHz)

Mode: 802.11b (1 Mbps)

Channel: 01 (Worst case)

Distance of measurement: 3 meter

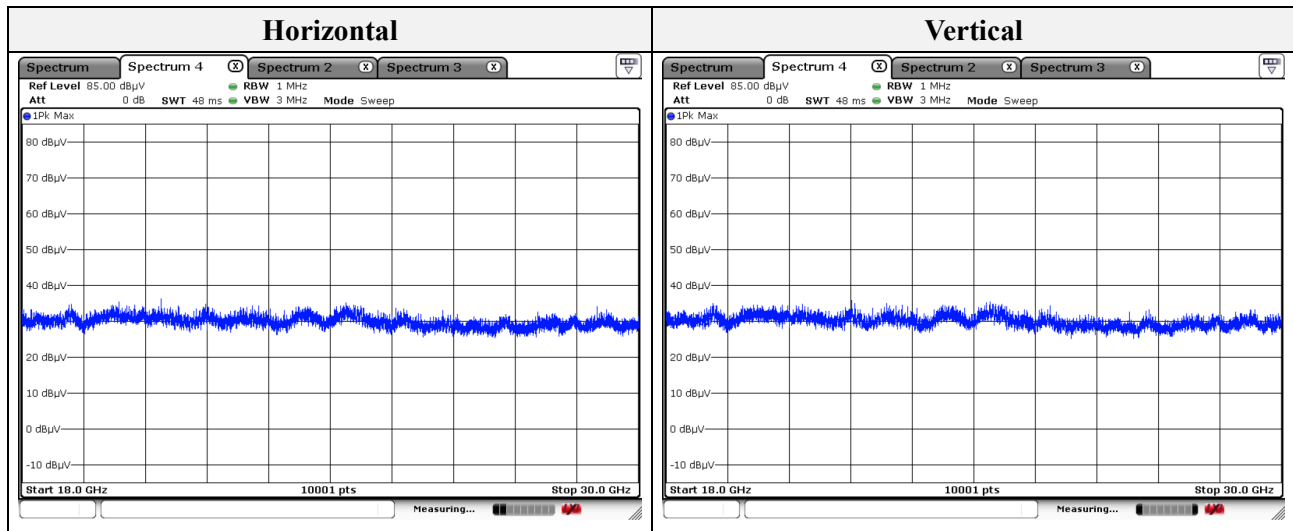

Note.

1. No spurious emission were detected above 18 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (41) of (45)

3.3. AC conducted emissions

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:
KES-RF-23T0069
Page (42) of (45)

Test results

Mode: 802.11b (1 Mbps)

Channel 01 (Worst case)


Hot Line

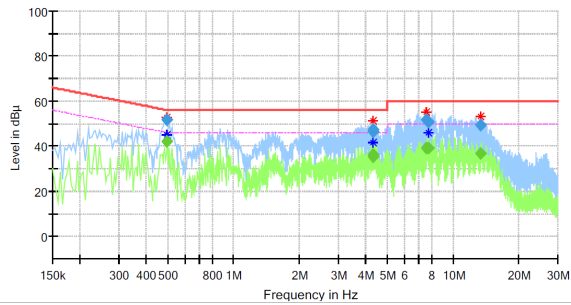

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.498000	51.64	---	56.03	4.39	1000.0	9.000	L1	19.8
0.498000	---	42.09	46.03	3.94	1000.0	9.000	L1	19.8
4.318000	47.35	---	56.00	8.65	1000.0	9.000	L1	20.1
4.318000	---	36.14	46.00	9.86	1000.0	9.000	L1	20.1
4.330000	46.33	---	56.00	9.67	1000.0	9.000	L1	20.0
4.330000	---	35.52	46.00	10.48	1000.0	9.000	L1	20.0
7.522000	51.73	---	60.00	8.27	1000.0	9.000	L1	19.9
7.522000	---	39.19	50.00	10.81	1000.0	9.000	L1	19.9
7.710000	50.58	---	60.00	9.42	1000.0	9.000	L1	19.9
7.710000	---	39.28	50.00	10.72	1000.0	9.000	L1	19.9
13.306000	---	36.97	50.00	13.03	1000.0	9.000	L1	20.5
13.306000	49.12	---	60.00	10.88	1000.0	9.000	L1	20.5

Neutral Line

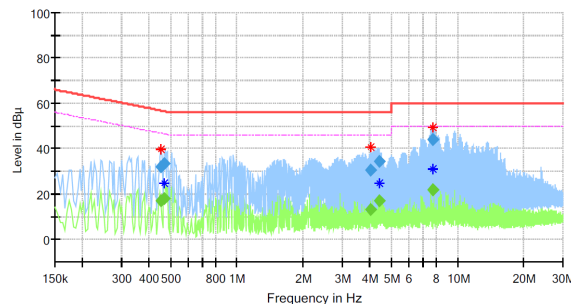

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.454000	---	16.96	46.80	29.84	1000.0	9.000	N	19.8
0.454000	32.16	---	56.80	24.64	1000.0	9.000	N	19.8
0.470000	---	18.19	46.51	28.32	1000.0	9.000	N	19.8
0.470000	33.56	---	56.51	22.95	1000.0	9.000	N	19.8
4.030000	---	13.37	46.00	32.63	1000.0	9.000	N	20.1
4.030000	30.35	---	56.00	25.65	1000.0	9.000	N	20.1
4.410000	---	17.19	46.00	28.81	1000.0	9.000	N	20.0
4.410000	34.39	---	56.00	21.61	1000.0	9.000	N	20.0
7.710000	---	21.99	50.00	28.01	1000.0	9.000	N	19.9
7.710000	43.89	---	60.00	16.11	1000.0	9.000	N	19.9
7.762000	---	21.79	50.00	28.21	1000.0	9.000	N	19.9
7.762000	44.00	---	60.00	16.00	1000.0	9.000	N	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



3.4. Antenna Requirement

According to 15.207(a), An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-23T0069
Page (44) of (45)

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV3044	101272	1 year	2024.03.16
Spectrum analyzer	R&S	FSV40	101725	1 year	2023.06.16
MXG Vector SIGNAL GENERATOR	Agilent	N5182A	MY50143829	1 year	2024.01.12
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2023.05.13 2024.05.12
BAND REJECT FILTER	MICRO-TRONICS	BRM50702	G272	1 year	2024.01.12
BAND REJECT FILTER	MICRO-TRONICS	BRM50716	G199	1 year	2024.01.12
Attenuator	Mini-Circuits	BW-S10-2W263+	3	1 year	2024.01.13
Attenuator	HUBER+SUHNER	6806.17.A	-	1 year	2024.03.21
Power Meter	Anritsu	ML2495A	2010001	1 year	2023.04.27 2024.04.19
Pulse Power Sensor	Anritsu	MA2411B	1911111	1 year	2023.04.27 2024.04.18
Loop Antenna	Schwarzbeck	FMZB1513	1513-257	2 years	2025.01.16
BILOG ANTENNA	Schwarzbeck	VULB 9168	9168-461	2 years	2024.04.27
Horn Antenna	A.H	SAS-571	414	1 year	2024.01.16
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 year	2024.01.16
Amplifier	SONOMA INSTRUMENT	310N	401123	1 year	2023.06.02
PREAMPLIFIER	HP	8449B	3008A00538	1 year	2023.06.02
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2024.01.16
DC POWER SUPPLY	SORENSEN	DCS40-75E	1408A02745	1 year	2024.01.12
EMI Test Receiver	R&S	ESU26	100517	1 year	2023.08.01
EMI Test Receiver	R&S	ESR3	101783	1 year	2023.11.11
PULSE LIMITER	R&S	ESH2-Z2	101915	1 year	2023.11.10
LISN	R&S	ENV216	101787	1 year	2023.11.10

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LGS53	306QCZP560949

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Appendix B. Test setup photos



The end of test report.