

# Starkey Laboratories, Inc.

Livio micro RIC 312

FCC 15.247:2019

Bluetooth Low Energy (DTS) Radio

Report # STAK0185







NVLAP LAB CODE: 200881-0

# **CERTIFICATE OF TEST**



Last Date of Test: October 3, 2019 Starkey Laboratories, Inc. EUT: Livio micro RIC 312

# **Radio Equipment Testing**

#### **Standards**

Specification	Method
FCC 15.247:2019	ANSI C63.10:2013, KDB 558074

#### Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

### **Deviations From Test Standards**

None

Approved By:

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

Report No. STAK0185 2/45

# **REVISION HISTORY**



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

Report No. STAK0185

# ACCREDITATIONS AND AUTHORIZATIONS



#### **United States**

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

#### Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

#### **European Union**

European Commission - Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

#### Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

#### Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

#### Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

#### **Taiwan**

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

#### **Singapore**

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

#### Israel

MOC - Recognized by MOC as a CAB for the acceptance of test data.

#### **Hong Kong**

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

#### **Vietnam**

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

#### SCOPE

For details on the Scopes of our Accreditations, please visit: <a href="https://www.nwemc.com/emc-testing-accreditations">https://www.nwemc.com/emc-testing-accreditations</a>

Report No. STAK0185 4/45


# **FACILITIES**







California	Minnesota	Oregon	Texas	Washington	
Labs OC01-17 41 Tesla Irvine, CA 92618	Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445	Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124	Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074	Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011	
(949) 861-8918	(612)-638-5136	(503) 844-4066	(469) 304-5255	(425)984-6600	
		NVLAP			
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0	
	Innovation, Sci	ence and Economic Develop	ment Canada		
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1	
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R	
	VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110	
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	US0017	US0191	US0157	

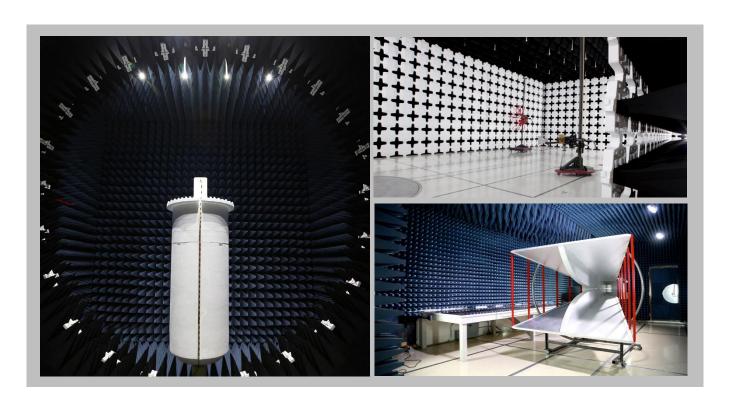

Report No. STAK0185 5/45

# **MEASUREMENT UNCERTAINTY**



# **Measurement Uncertainty**

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	- MU
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Report No. STAK0185 6/45


# **Test Setup Block Diagrams**




#### **Antenna Port Conducted Measurements**

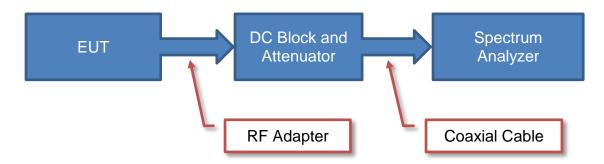

# **Near Field Test Fixture Measurements**

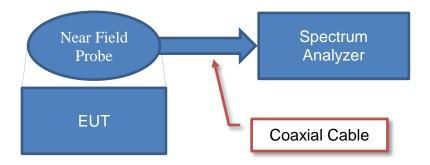

# **Spurious Radiated Emissions**

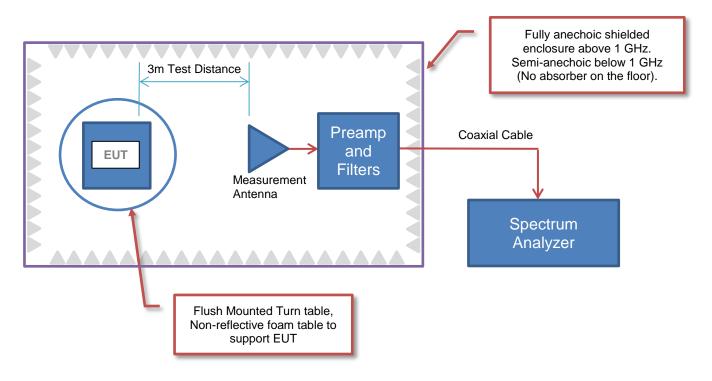

Report No. STAK0185 7/45

# PRODUCT DESCRIPTION



# **Client and Equipment Under Test (EUT) Information**

Company Name:	Starkey Laboratories, Inc.
Address:	6600 Washington Ave S
City, State, Zip:	Eden Prairie, MN 55344-3404
Test Requested By:	Bill Mitchell
EUT:	Livio micro RIC 312
First Date of Test:	October 2, 2019
Last Date of Test:	October 3, 2019
Receipt Date of Samples:	October 2, 2019
Equipment Design Stage:	Production
<b>Equipment Condition:</b>	No Damage
Purchase Authorization:	Verified

# **Information Provided by the Party Requesting the Test**

Functional Descrip	ption of the EUT:
Hearing aid with 2.4	4 GHz radio

#### Testing Objective:

To demonstrate compliance of the Bluetooth Low Energy (DTS) radio to FCC 15.247 requirements.

Report No. STAK0185

# **CONFIGURATIONS**



# Configuration STAK0185-1

Software/Firmware Running during test		
Description	Version	
Firmware	7.1.2.2.25	

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Hearing Aid	Starkey Laboratories, Inc.	Livio Micro RIC 312	192041412

# **Configuration STAK0185-3**

Software/Firmware Running during test		
Description	Version	
Firmware	7.1.2.2.25	

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Hearing Aid	Starkey Laboratories, Inc.	Livio Micro RIC 312	192041403

Report No. STAK0185 9/45

# **MODIFICATIONS**



# **Equipment Modifications**

Item	Date	Test	Modification	Note	Disposition of EUT
		Spurious	Tested as	No EMI suppression	EUT remained at
1	2019-10-02	Radiated	delivered to	devices were added or	Element following the
		Emissions	Test Station.	modified during this test.	test.
			Tested as	No EMI suppression	EUT remained at
2	2019-10-03	Duty Cycle	delivered to	devices were added or	Element following the
			Test Station.	modified during this test.	test.
		Occupied	Tested as	No EMI suppression	EUT remained at
3	2019-10-03	Bandwidth	delivered to	devices were added or	Element following the
		Danuwium	Test Station.	modified during this test.	test.
			Tested as	No EMI suppression	EUT remained at
4	2019-10-03	Output Power	delivered to	devices were added or	Element following the
		•	Test Station.	modified during this test.	test.
5	2019-10-03	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
	0040 40 00	Power Spectral	Tested as	No EMI suppression	EUT remained at
6	2019-10-03	Density	delivered to Test Station.	devices were added or modified during this test.	Element following the test.
		Dand Edma	Tested as	No EMI suppression	EUT remained at
7	2019-10-03	Band Edge	delivered to	devices were added or	Element following the
		Compliance	Test Station.	modified during this test.	test.
		Spurious	Tested as	No EMI suppression	Sahadulad taating
8	2019-10-03		delivered to	devices were added or	Scheduled testing
		Emissions	Test Station.	modified during this test.	was completed.

Report No. STAK0185 10/45

# SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

#### **MODES OF OPERATION**

Tx on Low channel (2402 MHz), Mid channel (2442 MHz), and High channel (2480 MHz); 2 Mbps BLE

#### **POWER SETTINGS INVESTIGATED**

Battery

#### **CONFIGURATIONS INVESTIGATED**

STAK0185 - 1

#### FREQUENCY RANGE INVESTIGATED

	Start Frequency 1 GHz	Stop Frequency	18 GHz
--	-----------------------	----------------	--------

#### SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Interval
Antenna - Double Ridge	ETS-Lindgren	3115	AJQ	16-Jan-2019	24 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	17-Sep-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	8-Mar-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	8-Feb-2019	12 mo
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFD	28-Jul-2019	12 mo
Attenuator	Fairview Microwave	SA18E-20	TWZ	17-Sep-2019	12 mo
Attenuator	Fairview Microwave	SA18E-10	TYA	17-Sep-2019	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	LFN	12-Sep-2019	12 mo

Report No. STAK0185 11/45

#### **TEST DESCRIPTION**

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of 10\*LOG(1/dc).

Report No. STAK0185 12/45

# **SPURIOUS RADIATED EMISSIONS**



				EmiR5 2017.09.18.1 PSA-ESCI 2019.05.10
Work Order:	STAK0185	Date:	2-Oct-2019	
Project:	None	Temperature:	21.1 °C	1 P TE
Job Site:	MN05	Humidity:	48.8% RH	Cog Nogsian
Serial Number:	192041412	Barometric Pres.:	1020 mbar	Tested by: Andrew Rogstad
EUT:	Livio micro RIC 312			
Configuration:	1			
Customer:	Starkey Laboratories,	Inc.		
Attendees:	John Quach, Charlie E	sch		
EUT Power:	Battery			
Operating Mode:	Tx on Low channel (24	402 MHz), Mid channel	(2442 MHz), and Hi	ligh channel (2480 MHz); 2 Mbps BLE
Deviations:	None			
	measurements (DCCF		ng at frequencies b	n Factor of 5.0 dB was added to the average below 1 GHz and above 18 GHz is documented in II, and modulation
Test Specifications			Test Met	ethod
FCC 15.247:2019	•		ANSI C6	63.10:2013

Run # 24	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
80						
70						
60						
50	•					
40	•	•				
30			•			
20						
10						
1000			10000			10000

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	
()													Comments
7325.993	31.0	13.5	2.8	62.0	5.0	0.0	Vert	AV	0.0	49.5	54.0	-4.5	EUT vert, Mid ch., 2 Mbps
7326.510	30.9	13.5	1.0	105.0	5.0	0.0	Horz	AV	0.0	49.4	54.0	-4.6	EUT vert, Mid ch., 2 Mbps
7440.913	31.0	13.2	1.0	47.0	5.0	0.0	Horz	AV	0.0	49.2	54.0	-4.8	EUT vert, High ch., 2 Mbps
7440.980	31.0	13.2	1.0	348.9	5.0	0.0	Vert	AV	0.0	49.2	54.0	-4.8	EUT vert, High ch., 2 Mbps
7440.383	31.0	13.2	1.0	94.0	5.0	0.0	Horz	AV	0.0	49.2	54.0	-4.8	EUT horz, High ch., 2 Mbps
7440.440	31.0	13.2	1.0	229.9	5.0	0.0	Horz	AV	0.0	49.2	54.0	-4.8	EUT on side, High ch., 2 Mbps
7440.977	30.9	13.2	1.0	336.9	5.0	0.0	Vert	AV	0.0	49.1	54.0	-4.9	EUT horz, High ch., 2 Mbps
7440.927	30.8	13.2	1.8	297.0	5.0	0.0	Vert	AV	0.0	49.0	54.0	-5.0	EUT on side, High ch., 2 Mbps
2485.263	32.7	-3.7	1.0	163.9	5.0	10.0	Horz	AV	0.0	44.0	54.0	-10.0	EUT on side, High ch,. 2 Mbps
2483.553	32.8	-3.8	1.0	311.9	5.0	10.0	Horz	AV	0.0	44.0	54.0	-10.0	EUT vert, High ch., 2 Mbps
2483.683	32.8	-3.8	1.0	149.9	5.0	10.0	Horz	AV	0.0	44.0	54.0	-10.0	EUT horz, High ch., 2 Mbps
2483.577	32.8	-3.8	1.0	231.0	5.0	10.0	Vert	AV	0.0	44.0	54.0	-10.0	EUT on side, High ch,. 2 Mbps
2389.473	32.6	-3.6	3.7	84.0	5.0	10.0	Vert	AV	0.0	44.0	54.0	-10.0	EUT on side, Low ch., 2 Mbps
2483.933	32.7	-3.8	1.0	339.0	5.0	10.0	Vert	AV	0.0	43.9	54.0	-10.1	EUT vert, High ch., 2 Mbps
2484.890	32.7	-3.8	1.0	274.0	5.0	10.0	Vert	AV	0.0	43.9	54.0	-10.1	EUT horz, High ch., 2 Mbps
2389.990	32.5	-3.6	3.1	185.9	5.0	10.0	Horz	AV	0.0	43.9	54.0	-10.1	EUT vert, Low ch., 2 Mbps
4803.167	30.9	4.6	1.0	186.9	5.0	0.0	Vert	AV	0.0	40.5	54.0	-13.5	EUT vert, Low ch., 2 Mbps
4884.930	30.6	4.7	1.0	92.9	5.0	0.0	Vert	AV	0.0	40.3	54.0	-13.7	EUT vert, Mid ch., 2 Mbps
4883.193	30.5	4.7	1.0	160.9	5.0	0.0	Horz	AV	0.0	40.2	54.0	-13.8	EUT vert, Mid ch., 2 Mbps
4960.583	30.0	4.8	1.4	149.9	5.0	0.0	Vert	AV	0.0	39.8	54.0	-14.2	EUT vert, High ch., 2 Mbps
4803.407	30.2	4.6	1.0	214.0	5.0	0.0	Horz	AV	0.0	39.8	54.0	-14.2	EUT vert, Low ch., 2 Mbps
4959.717	29.9	4.8	1.0	329.0	5.0	0.0	Horz	AV	0.0	39.7	54.0	-14.3	EUT vert, High ch., 2 Mbps

Report No. STAK0185 13/45

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
12402.500	29.0	5.4	1.0	337.9	5.0	0.0	Vert	AV	0.0	39.4	54.0	-14.6	EUT vert, High ch., 2 Mbps
12402.490	28.4	5.4	1.0	257.0	5.0	0.0	Horz	AV	0.0	38.8	54.0	-15.2	EUT vert, High ch., 2 Mbps
7326.050	42.2	13.5	1.0	105.0	0.0	0.0	Horz	PK	0.0	55.7	74.0	-18.3	EUT vert, Mid ch., 2 Mbps
7439.387	42.4	13.2	1.0	47.0	0.0	0.0	Horz	PK	0.0	55.6	74.0	-18.4	EUT vert, High ch., 2 Mbps
7439.047	42.2	13.2	1.0	94.0	0.0	0.0	Horz	PK	0.0	55.4	74.0	-18.6	EUT horz, High ch., 2 Mbps
7439.503	42.1	13.2	1.0	229.9	0.0	0.0	Horz	PK	0.0	55.3	74.0	-18.7	EUT on side, High ch., 2 Mbps
7326.103	41.8	13.5	2.8	62.0	0.0	0.0	Vert	PK	0.0	55.3	74.0	-18.7	EUT vert, Mid ch., 2 Mbps
7439.977	41.8	13.2	1.8	297.0	0.0	0.0	Vert	PK	0.0	55.0	74.0	-19.0	EUT on side, High ch., 2 Mbps
7439.270	41.7	13.2	1.0	336.9	0.0	0.0	Vert	PK	0.0	54.9	74.0	-19.1	EUT horz, High ch., 2 Mbps
7440.417	41.5	13.2	1.0	348.9	0.0	0.0	Vert	PK	0.0	54.7	74.0	-19.3	EUT vert, High ch., 2 Mbps
12397.500	30.1	-0.6	1.7	343.9	5.0	0.0	Vert	AV	0.0	34.5	54.0	-19.5	EUT vert, High ch., 2 Mbps
12397.530	29.8	-0.6	1.0	138.9	5.0	0.0	Horz	AV	0.0	34.2	54.0	-19.8	EUT vert, High ch., 2 Mbps
12211.000	29.7	-1.7	1.0	16.0	5.0	0.0	Vert	AV	0.0	33.0	54.0	-21.0	EUT vert, Mid ch., 2 Mbps
12210.740	29.6	-1.7	1.0	282.0	5.0	0.0	Horz	AV	0.0	32.9	54.0	-21.1	EUT vert, Mid ch., 2 Mbps
12009.060	29.8	-2.2	1.0	353.0	5.0	0.0	Vert	AV	0.0	32.6	54.0	-21.4	EUT vert, Low ch., 2 Mbps
12010.790	29.6	-2.2	1.0	141.0	5.0	0.0	Horz	AV	0.0	32.4	54.0	-21.6	EUT vert, Low ch., 2 Mbps
2485.420	44.2	-3.7	1.0	231.0	0.0	10.0	Vert	PK	0.0	50.5	74.0	-23.5	EUT on side, High ch,. 2 Mbps
2485.440	43.9	-3.7	1.0	339.0	0.0	10.0	Vert	PK	0.0	50.2	74.0	-23.8	EUT vert, High ch., 2 Mbps
2484.747	43.7	-3.8	1.0	274.0	0.0	10.0	Vert	PK	0.0	49.9	74.0	-24.1	EUT horz, High ch., 2 Mbps
2483.890	43.7	-3.8	1.0	163.9	0.0	10.0	Horz	PK	0.0	49.9	74.0	-24.1	EUT on side, High ch,. 2 Mbps
2484.150	43.6	-3.8	1.0	311.9	0.0	10.0	Horz	PK	0.0	49.8	74.0	-24.2	EUT vert, High ch., 2 Mbps
2389.100	43.4	-3.6	3.7	84.0	0.0	10.0	Vert	PK	0.0	49.8	74.0	-24.2	EUT on side, Low ch., 2 Mbps
2484.643	43.5	-3.8	1.0	149.9	0.0	10.0	Horz	PK	0.0	49.7	74.0	-24.3	EUT horz, High ch., 2 Mbps
2389.037	43.2	-3.6	3.1	185.9	0.0	10.0	Horz	PK	0.0	49.6	74.0	-24.4	EUT vert, Low ch., 2 Mbps
4884.683	42.5	4.7	1.0	160.9	0.0	0.0	Horz	PK	0.0	47.2	74.0	-26.8	EUT vert, Mid ch., 2 Mbps
4959.220	42.3	4.8	1.4	149.9	0.0	0.0	Vert	PK	0.0	47.1	74.0	-26.9	EUT vert, High ch., 2 Mbps
4803.413	41.8	4.6	1.0	186.9	0.0	0.0	Vert	PK	0.0	46.4	74.0	-27.6	EUT vert, Low ch., 2 Mbps
4804.143	41.4	4.6	1.0	214.0	0.0	0.0	Horz	PK	0.0	46.0	74.0	-28.0	EUT vert, Low ch., 2 Mbps
4884.003	41.2	4.7	1.0	92.9	0.0	0.0	Vert	PK	0.0	45.9	74.0	-28.1	EUT vert, Mid ch., 2 Mbps
4960.983	41.0	4.9	1.0	329.0	0.0	0.0	Horz	PK	0.0	45.9	74.0	-28.1	EUT vert, High ch., 2 Mbps
12401.920	40.2	5.4	1.0	337.9	0.0	0.0	Vert	PK	0.0	45.6	74.0	-28.4	EUT vert, High ch., 2 Mbps
12401.810	39.4	5.4	1.0	257.0	0.0	0.0	Horz	PK	0.0	44.8	74.0	-29.2	EUT vert, High ch., 2 Mbps
12397.500	42.5	-0.6	1.7	343.9	0.0	0.0	Vert	PK	0.0	41.9	74.0	-32.1	EUT vert, High ch., 2 Mbps
12399.900	41.5	-0.6	1.0	138.9	0.0	0.0	Horz	PK	0.0	40.9	74.0	-33.1	EUT vert, High ch., 2 Mbps
12209.130	41.1	-1.7	1.0	282.0	0.0	0.0	Horz	PK	0.0	39.4	74.0	-34.6	EUT vert, Mid ch., 2 Mbps
12210.200	41.1	-1.7	1.0	16.0	0.0	0.0	Vert	PK	0.0	39.4	74.0	-34.6	EUT vert, Mid ch., 2 Mbps
12009.840	41.0	-2.2	1.0	353.0	0.0	0.0	Vert	PK	0.0	38.8	74.0	-35.2	EUT vert, Low ch., 2 Mbps
12010.100	40.7	-2.2	1.0	141.0	0.0	0.0	Horz	PK	0.0	38.5	74.0	-35.5	EUT vert, Low ch., 2 Mbps

Report No. STAK0185 14/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

Report No. STAK0185 15/45



EUT: Livio	o micro RIC 312							Work Order:	STAK0185	
Serial Number: 1920	041403							Date:	3-Oct-19	
Customer: Star	rkey Laboratories, Inc.							Temperature:	20.9 °C	
Attendees: Cha	rlie Esch							Humidity:	44.6% RH	
Project: Non	ie							Barometric Pres.:	1026 mbar	
Tested by: Andrew Rogstad Power: 1.4 VDC								Job Site:	MN08	
TEST SPECIFICATIONS Test Method										
FCC 15.247:2019 ANSI C63.10:2013										
COMMENTS					•					
Jafaranaa laval affaat in	saludae Mascurament	Cable, DC Block, and	20 dR Attenua	tor						
Reference level offset in	iciuues measurement	oubic, Do Block, and	ZU UD Attenua	tor.						
Kererence level onset in	iciddes Measurement	oubic, Do Block, and	ZU UD Attellua	ioi.						
		ouble, Do Block, and	ZO UD Attenua	ioi.						
DEVIATIONS FROM TES		ouble, Do Block, und	20 db Attenda							
		ousic, so slook, and	ZO UD Attellua							
DEVIATIONS FROM TES		ousic, 50 sloon, ullu			, 4p					
DEVIATIONS FROM TES	ST STANDARD	Signature		To R	o galast					
DEVIATIONS FROM TES	ST STANDARD						Number of	Value	Limit	
DEVIATIONS FROM TES None Configuration #	ST STANDARD  3				Pulse Width	Period	Number of Pulses	(%)	(%)	Results
DEVIATIONS FROM TES None Configuration #	3 Channel, 2402 MHz				Pulse Width 197.9 us	625.2 us		(%) 31.7		Results N/A
DEVIATIONS FROM TES None Configuration # BLE/GFSK (2 Mbps) Low BLE/GFSK (2 Mbps) Low	3 ( Channel, 2402 MHz Channel, 2402 MHz				Pulse Width 197.9 us N/A			(%)	(%)	
DEVIATIONS FROM TES None Configuration # BLE/GFSK (2 Mbps) Low BLE/GFSK (2 Mbps) Mid BLE/GFSK (2 Mbps) Mid	3  ( Channel, 2402 MHz Channel, 2402 MHz Channel, 2404 MHz				Pulse Width 197.9 us N/A 198.2 us	625.2 us N/A 625.1 us		(%) 31.7	(%) N/A	N/A N/A N/A
DEVIATIONS FROM TES None Configuration # BLE/GFSK (2 Mbps) Low BLE/GFSK (2 Mbps) Low BLE/GFSK (2 Mbps) Mid BLE/GFSK (2 Mbps) Mid	3  Channel, 2402 MHz Channel, 2402 MHz Channel, 2442 MHz Channel, 2442 MHz Channel, 2442 MHz				Pulse Width 197.9 us N/A	625.2 us N/A		(%) 31.7 N/A	(%) N/A N/A	N/A N/A
DEVIATIONS FROM TES None Configuration # BLE/GFSK (2 Mbps) Low BLE/GFSK (2 Mbps) Low	3  Channel, 2402 MHz Channel, 2402 MHz Channel, 2442 MHz Channel, 2442 MHz Channel, 2442 MHz Channel, 2480 MHz				Pulse Width 197.9 us N/A 198.2 us	625.2 us N/A 625.1 us		(%) 31.7 N/A 31.7	(%) N/A N/A N/A	N/A N/A N/A

Report No. STAK0185




BLE/GFSK (2 Mbps) Low Channel, 2402 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

197.9 us 625.2 us 1 31.7 N/A N/A

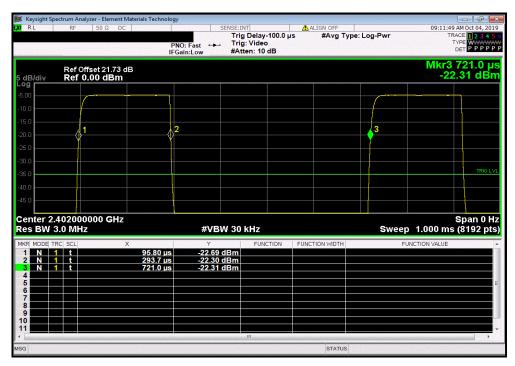


	BLE/GFSK (2 Mbps) Low Channel, 2402 MHz									
	Number of Value Limit									
		Pulse Width	Period	Pulses	(%)	(%)	Results			
i	N/A N/A 5 N/A N/A N/A									

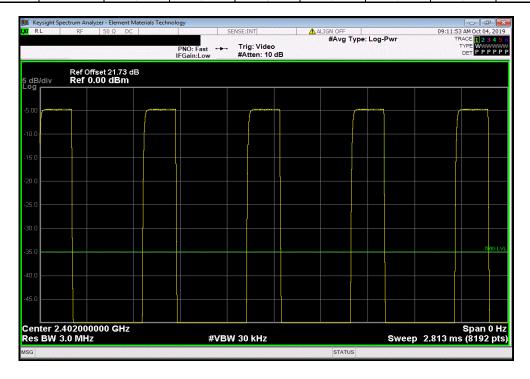


Report No. STAK0185 17/45



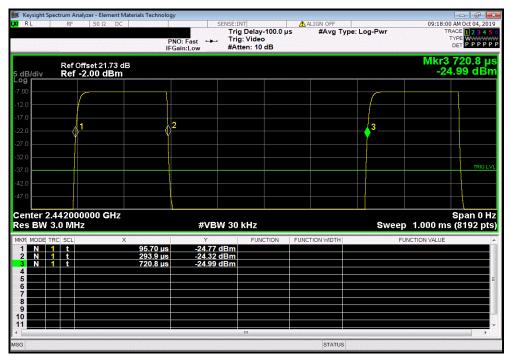

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz									
Number of Value Limit									
Pulse Width Period Pulses (%) (%) Results									
	N/A	N/A	5	N/A	N/A	N/A			

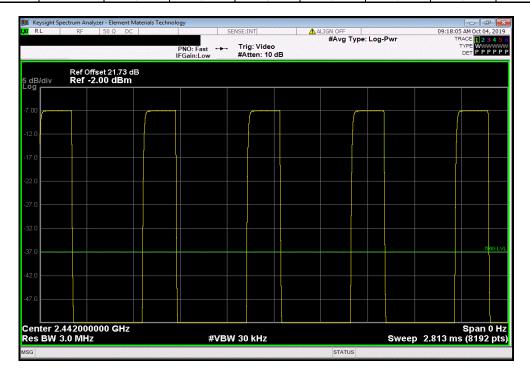

Report No. STAK0185 18/45




BLE/GFSK (2 Mbps) High Channel, 2480 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

198.1 us 625 us 1 31.7 N/A N/A

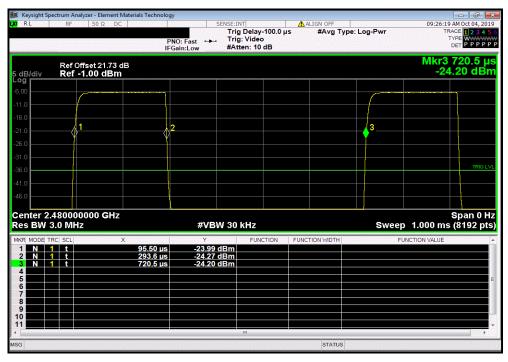

	BLE/GFSK (2 Mbps) High Channel, 2480 MHz									
	Number of Value Limit									
		Pulse Width	Period	Pulses	(%)	(%)	Results			
i	N/A N/A 5 N/A N/A N/A									

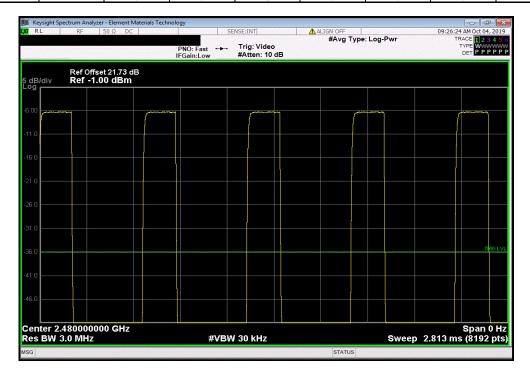

Report No. STAK0185 19/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

Report No. STAK0185 20/45



						TbtTx 2019.08.30.0	XMit 2019.09.05	
	Livio micro RIC 312				Work Order:	STAK0185		
Serial Number:	192041403				Date:	3-Oct-19		
Customer:	Starkey Laboratories, Inc	•			Temperature:	20.9 °C		
Attendees:	Charlie Esch					44.5% RH		
Project:	None	lone				1026 mbar		
Tested by:	Andrew Rogstad		Power:	1.4 VDC	Job Site:	Job Site: MN08		
TEST SPECIFICATI	ONS			Test Method				
FCC 15.247:2019				ANSI C63.10:2013				
COMMENTS								
Reference level off	set includes Measurement	Cable, DC Block, and 20 dB Attenuat	tor					
		. 000.0, 00 0.000, 0.10 20 00 7.1101100						
DEVIATIONS FROM	TEST STANDARD							
None								
110110								
Configuration #	3		3 / 6	10				
g	_	Signature	TO R	and all				
	l l	oignataro		10-09		Limit		
					Value	(≥)	Result	
BLE/GESK (2 Mbns)	Low Channel, 2402 MHz				1,277 MHz	500 kHz	Pass	
	Mid Channel, 2442 MHz				1.277 MHz	500 kHz	Pass	
	High Channel, 2480 MHz				1.281 MHz	500 kHz	Pass	
DLE/GFOR (2 NIDPS)	nigh Channel, 2460 MHZ				1.201 IVITZ	JUU KHZ	rass	

Report No. STAK0185 21/45





BLE/GFSK (2 Mbps) Low Channel, 2402 MHz


Limit

Value (2) Result

1.277 MHz 500 kHz Pass

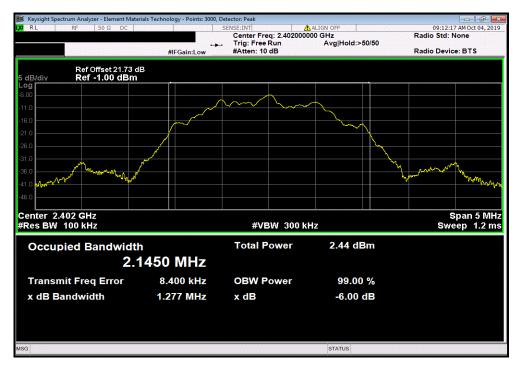




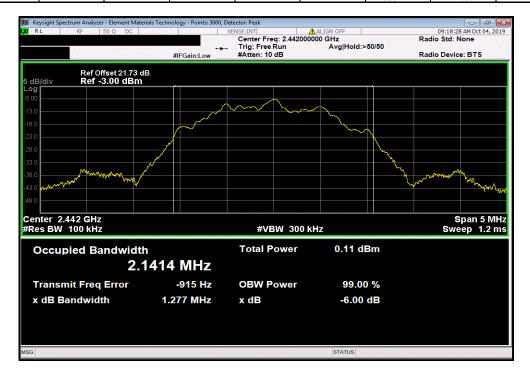

Report No. STAK0185 22/45



| BLE/GFSK (2 Mbps) High Channel, 2480 MHz | Limit | Value (2) | Result | | 1.281 MHz | 500 kHz | Pass |

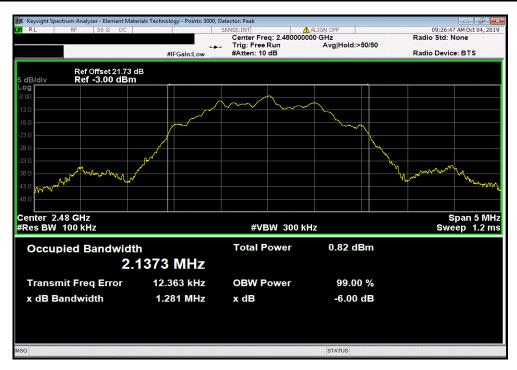

Report No. STAK0185 23/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

Report No. STAK0185 24/45



						TbtTx 2019.08.30.0	XMit 2019.09.05
EUT: Livi	io micro RIC 312				Work Order:	STAK0185	
Serial Number: 192	041403				Date:	3-Oct-19	
Customer: Sta	rkey Laboratories, Inc.				Temperature:	20.9 °C	
Attendees: Cha	arlie Esch				Humidity:	45% RH	
Project: Nor	ne				Barometric Pres.:	1026 mbar	
Tested by: And	Tested by: Andrew Rogstad Power: 1.4 VDC				Job Site:	MN08	
TEST SPECIFICATIONS	3			Test Method			
FCC 15.247:2019				ANSI C63.10:2013			
COMMENTS							
DEVIATIONS FROM TE		Cable, DC Block, and 20 dB Attenual	tor.				
None							
Configuration #	3	Signature	TOR	gstark			
		<u> </u>			Out Pwr	Limit	
					(dBm)	(dBm)	Result
BLE/GFSK (2 Mbps) Lov	v Channel, 2402 MHz				-4.299	30	Pass
BLE/GFSK (2 Mbps) Mid					-6.569	30	Pass
BLE/GFSK (2 Mbps) Hig					-5.833	30	Pass
	,						


Report No. STAK0185 25/45




BLE/GFSK (2 Mbps) Low Channel, 2402 MHz

Out Pwr Limit
(dBm) (dBm) Result

-4.299 30 Pass

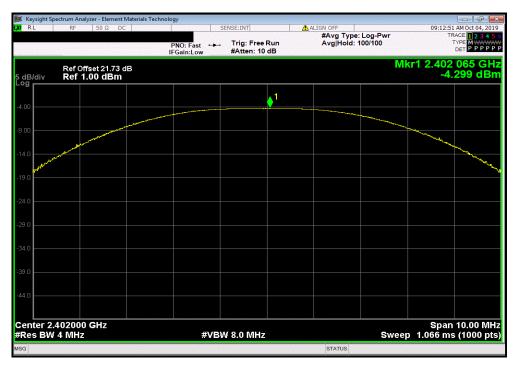

	BLE/GFSK (2	Mbps) Mid Chan	nel, 2442 MHz		
			Out Pwr	Limit	
			(dBm)	(dBm)	Result
			-6.569	30	Pass

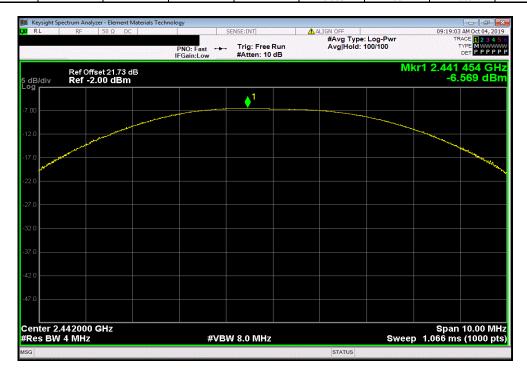


Report No. STAK0185 26/45



BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Out Pwr Limit
(dBm) (dBm) Result

-5.833 30 Pass

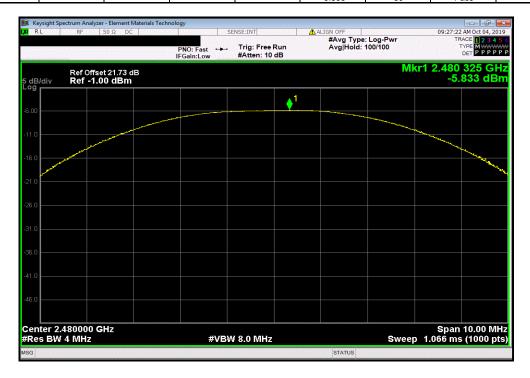

Report No. STAK0185 27/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

The antenna gain was added to the conducted output power value to calculate the EIRP.

Report No. STAK0185 28/45



				TbtTx 2019.08.30.0	XMit 2019.09.05
EUT: Livio micro RIC 312			Work Order:	STAK0185	
Serial Number: 192041403			Date:	3-Oct-19	
Customer: Starkey Laboratories, Inc.			Temperature:	20.9 °C	
Attendees: Charlie Esch	Attendees: Charlie Esch				
Project: None		Barometric Pres.:	1026 mbar		
Tested by: Andrew Rogstad		Job Site:	MN08		
TEST SPECIFICATIONS	Test Method				
FCC 15.247:2019	ANSI C63.10:2013				
COMMENTS	•				
Reference level offset includes Measurement Cable, DC Block, and 20 dB Atter  DEVIATIONS FROM TEST STANDARD	iluator.				
None					
Configuration # 3 Signature	The Royaland				
· · · · · · · · · · · · · · · · · · ·	Out Pwr	Antenna	EIRP	EIRP Limit	
	(dBm)	Gain (dBi)	(dBm)	(dBm)	Result
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz	(dBm) -4.299	Gain (dBi) -13.51	(dBm) -17.809	(dBm) 36	Result Pass
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz					


Report No. STAK0185 29/45




BLE/GFSK (2 Mbps) Low Channel, 2402 MHz

Out Pwr Antenna EIRP EIRP Limit
(dBm) Gain (dBi) (dBm) (dBm) Result

-4.299 -13.51 -17.809 36 Pass

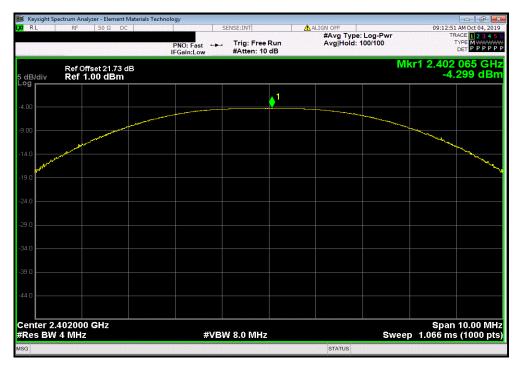

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz						
		Out Pwr	Antenna	EIRP	EIRP Limit	
		(dBm)	Gain (dBi)	(dBm)	(dBm)	Result
		-6.569	-13.51	-20.079	36	Pass

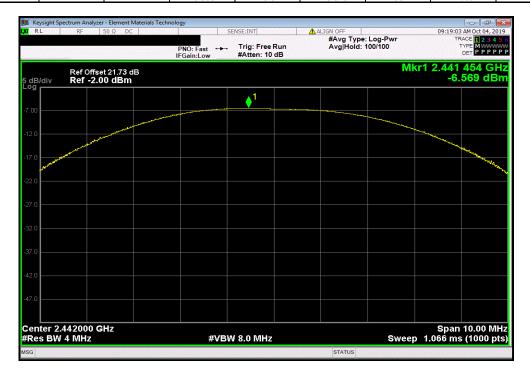


Report No. STAK0185 30/45



BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Out Pwr Antenna EIRP EIRP Limit
(dBm) Gain (dBi) (dBm) (dBm) Result

-5.833 -13.51 -19.343 36 Pass

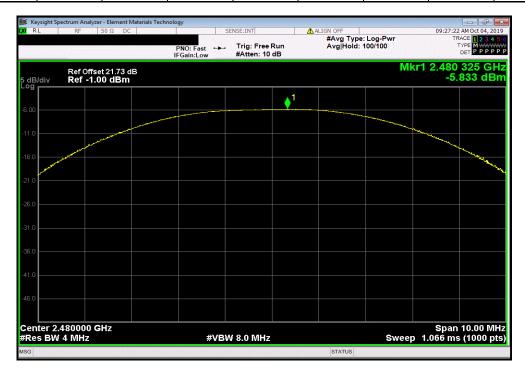

Report No. STAK0185 31/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Antenna - Standard Gain	OML, Inc.	M05HWAX	AIM	17-Sep-19	17-Sep-22
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

Report No. STAK0185 32/45



			TbtTx 2019.08.30.0	XMit 2019.09.05
EUT: Livio micro RIC 312		Work Order:		
Serial Number: 192041403			3-Oct-19	
Customer: Starkey Laboratories, Inc.		Temperature:		
Attendees: Charlie Esch			45.2% RH	
Project: None		Barometric Pres.:		
Tested by: Andrew Rogstad	Power: 1.4 VDC	Job Site:	MN08	
TEST SPECIFICATIONS	Test Method			
FCC 15.247:2019	ANSI C63.10:2013			
		<u> </u>		
COMMENTS				
Reference level offset includes Measurement Cable, DC Block, and 20 dB Attenue DEVIATIONS FROM TEST STANDARD	ator.			
None				
	to Royalan			
		Value dBm/3kHz	Limit < dBm/3kHz	Results
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz	·	-22.369	8	Pass
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz		-24.695	8	Pass
BLE/GFSK (2 Mbps) High Channel, 2480 MHz		-24.037	8	Pass

Report No. STAK0185 33/45





BLE/GFSK (2 Mbps) Low Channel, 2402 MHz


Value Limit

dBm/3kHz < dBm/3kHz Results

-22.369 8 Pass

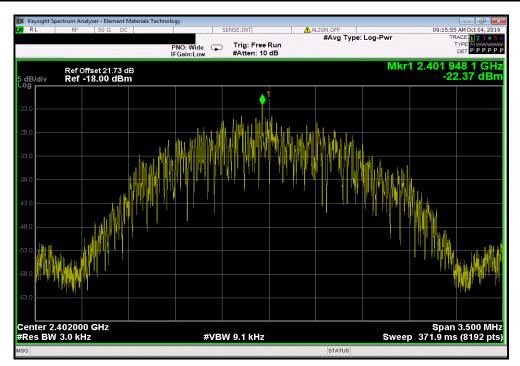



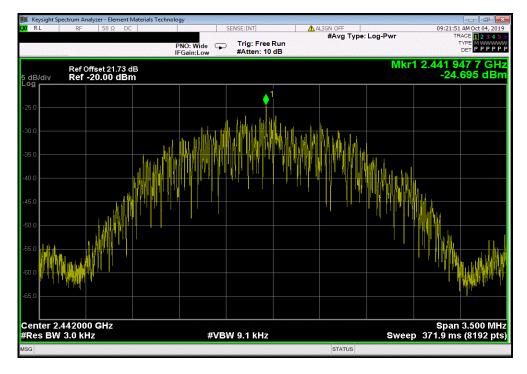

Report No. STAK0185 34/45




BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Value Limit

dBm/3kHz < dBm/3kHz Results

-24.037 8 Pass

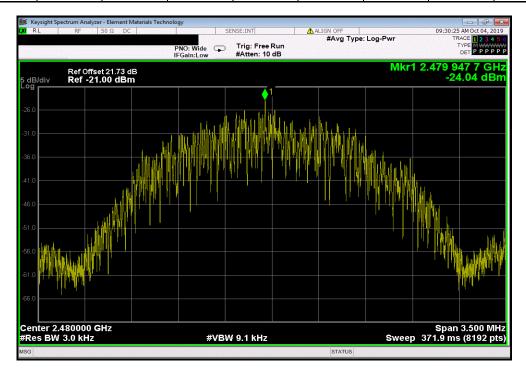

Report No. STAK0185 35/45

# **BAND EDGE COMPLIANCE**



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

Report No. STAK0185 36/45

# **BAND EDGE COMPLIANCE**



			TbtTx 2019.08.30.0	XMit 2019.09.05
EUT: Livio micro RIC 312		Work Order:	STAK0185	
Serial Number: 192041403		Date:	3-Oct-19	
Customer: Starkey Laboratories, Inc.		Temperature:	20.9 °C	
Attendees: Charlie Esch		Humidity:	44.4% RH	
Project: None		Barometric Pres.:	1026 mbar	
Tested by: Andrew Rogstad	Power: 1.4 VDC	Job Site:	MN08	
TEST SPECIFICATIONS	Test Method			
FCC 15.247:2019	ANSI C63.10:2013			
COMMENTS				
Reference level offset includes Measurement Cable, DC Block, and 20 dB Attenua	ator.			
DEVIATIONS FROM TEST STANDARD				
None				
Configuration # 3 Signature	Wo Rootal			
		Value (dBc)	Limit ≤ (dBc)	Result
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz		-26.24	-20	Pass
BLE/GFSK (2 Mbps) High Channel, 2480 MHz		-37.98	-20	Pass

Report No. STAK0185 37/45

# **BAND EDGE COMPLIANCE**




BLE/GFSK (2 Mbps) Low Channel, 2402 MHz


Value

(dBc) ≤ (dBc) Result

-26.24 -20 Pass





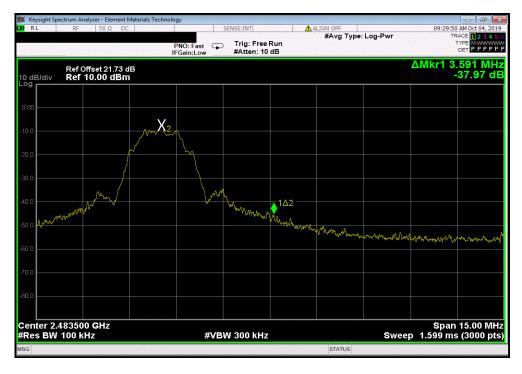

Report No. STAK0185 38/45



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

#### **TEST DESCRIPTION**

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

Report No. STAK0185 39/45



							TbtTx 2019.08.30.0	XMit 2019.09.05
	rio micro RIC 312					Work Order:		
Serial Number: 192							3-Oct-19	
	arkey Laboratories, Inc.					Temperature:	20.9 °C	
Attendees: Ch						Humidity:		
Project: No	ne					<b>Barometric Pres.:</b>	1026 mbar	
Tested by: An	drew Rogstad		P	Power: 1.4 VDC		Job Site:	MN08	
TEST SPECIFICATIONS	S			Test Method				
FCC 15.247:2019				ANSI C63.10:2013				
COMMENTS								
Reference level offset i	includes Measurement Cable	e DC Block and 20 di	B Attenuator					
received level offset	morades measurement out	c, Do Blook, and Lo a	D Attenuator.					
DEVIATIONS FROM TE	ST STANDARD							
None								
None								
None Configuration #	3		73	P. F.				
		Signature	an	Rogertan				
		Signature	Chy	Rogadark Frequency	Measured	Max Value	Limit	
		Signature	Cha		Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
	3	Signature	Chap	Frequency				Result N/A
Configuration #	w Channel, 2402 MHz	Signature	and	Frequency Range	Freq (MHz)	(dBc)	≤ (dBc)	
Configuration #  BLE/GFSK (2 Mbps) Lov	3 w Channel, 2402 MHz w Channel, 2402 MHz	Signature	Char	Frequency Range Fundamental	Freq (MHz) 2402.02	(dBc) N/A	≤ <b>(dBc)</b> N/A	N/A
Configuration #  BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov	w Channel, 2402 MHz w Channel, 2402 MHz w Channel, 2402 MHz	Signature	ar	Frequency Range Fundamental 30 MHz - 12.5 GHz	Freq (MHz) 2402.02 2397.34	(dBc) N/A -42.1	≤ (dBc) N/A -20	N/A Pass
Configuration #  BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov	w Channel, 2402 MHz w Channel, 2402 MHz w Channel, 2402 MHz d Channel, 2442 MHz	Signature	an	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	Freq (MHz) 2402.02 2397.34 24575.75	(dBc) N/A -42.1 -45.19	≤ (dBc) N/A -20 -20	N/A Pass Pass
Configuration #  BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) More	w Channel, 2402 MHz w Channel, 2402 MHz w Channel, 2402 MHz d Channel, 2442 MHz d Channel, 2442 MHz	Signature	Con	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental	Freq (MHz) 2402.02 2397.34 24575.75 2442.01	(dBc) N/A -42.1 -45.19 N/A	≤ (dBc)  N/A -20 -20 N/A	N/A Pass Pass N/A
BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Mic BLE/GFSK (2 Mbps) Mic BLE/GFSK (2 Mbps) Mic	w Channel, 2402 MHz w Channel, 2402 MHz w Channel, 2402 MHz d Channel, 2442 MHz d Channel, 2442 MHz d Channel, 2442 MHz	Signature	an	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental 30 MHz - 12.5 GHz	Freq (MHz) 2402.02 2397.34 24575.75 2442.01 3811.65	(dBc) N/A -42.1 -45.19 N/A -44.96	≤ (dBc) N/A -20 -20 N/A -20	N/A Pass Pass N/A Pass
Configuration #  BLE/GFSK (2 Mbps) Los BLE/GFSK (2 Mbps) Los BLE/GFSK (2 Mbps) Mic	w Channel, 2402 MHz w Channel, 2402 MHz w Channel, 2402 MHz d Channel, 2442 MHz d Channel, 2442 MHz d Channel, 2442 MHz gh Channel, 2480 MHz	Signature	an	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	Freq (MHz) 2402.02 2397.34 24575.75 2442.01 3811.65 23739.47 2480.01	(dBc) N/A -42.1 -45.19 N/A -44.96 -43.29 N/A	≤ (dBc)  N/A -20 -20 N/A -20 -20 N/A -20 -20 N/A	N/A Pass Pass N/A Pass Pass N/A
BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Lov BLE/GFSK (2 Mbps) Mic BLE/GFSK (2 Mbps) Mic BLE/GFSK (2 Mbps) Mic BLE/GFSK (2 Mbps) Mic	w Channel, 2402 MHz w Channel, 2402 MHz w Channel, 2402 MHz d Channel, 2442 MHz d Channel, 2442 MHz d Channel, 2442 MHz gh Channel, 2440 MHz gh Channel, 2480 MHz	Signature	Con	Frequency Range Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz Fundamental 30 MHz - 12.5 GHz Fundamental 12.5 GHz - 25 GHz Fundamental	Freq (MHz) 2402.02 2397.34 24575.75 2442.01 3811.65 23739.47	(dBc) N/A -42.1 -45.19 N/A -44.96 -43.29	≤ (dBc)  N/A -20 -20 N/A -20 -20 20	N/A Pass Pass N/A Pass Pass

Report No. STAK0185 40/45



BLE/GFSK (2 Mbps) Low Channel, 2402 MHz


Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

Fundamental 2402.02 N/A N/A N/A



	BLE/GFSK (	2 Mbps) Low Chan	nel, 2402 MHz		
	Frequency	Measured	Max Value	Limit	
_	Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
,	30 MHz - 12.5 GHz	2397.34	-42.1	-20	Pass

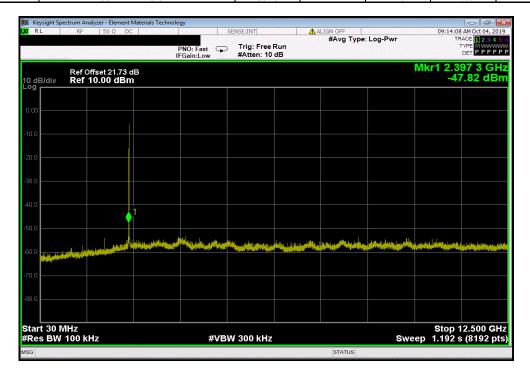

Report No. STAK0185 41/45




 BLE/GFSK (2 Mbps) Low Channel, 2402 MHz

 Frequency
 Measured
 Max Value
 Limit

 Range
 Freq (MHz)
 (dBc)
 ≤ (dBc)
 Result

 12.5 GHz - 25 GHz
 24575.75
 -45.19
 -20
 Pass

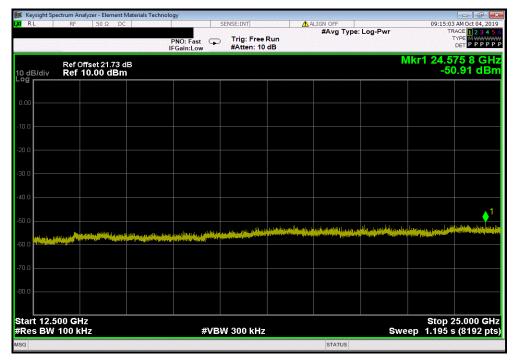

BLE/C	GFSK (2 Mbps) Mid Chani	nel, 2442 MHz		
Frequency	Measured	Max Value	Limit	
 Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
Fundamental	2442.01	N/A	N/A	N/A



Report No. STAK0185 42/45




BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz


Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

30 MHz - 12.5 GHz 3811.65 -44.96 -20 Pass

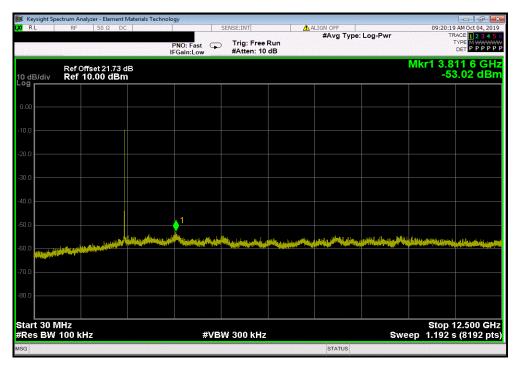

BLE/GFSK	(2 Mbps) Mid Chan	nel, 2442 MHz		
Frequency	Measured	Max Value	Limit	
Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
12.5 GHz - 25 GHz	23739.47	-43.29	-20	Pass

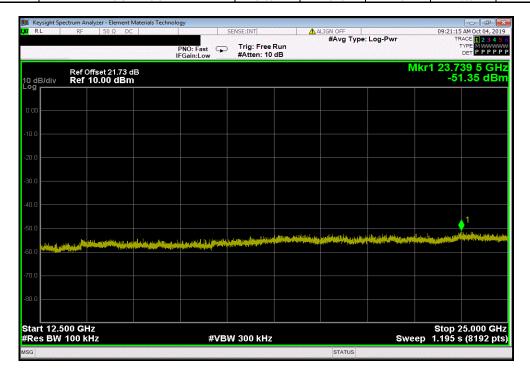

Report No. STAK0185 43/45



BLE/GFSK (2 Mbps) High Channel, 2480 MHz


Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

Fundamental 2480.01 N/A N/A N/A



	BLE/GFSK (	2 Mbps) High Char	nnel, 2480 MHz		
	Frequency	Measured	Max Value	Limit	
	Range	Freq (MHz)	(dBc)	≤ (dBc)	Result
1	30 MHz - 12.5 GHz	3805.56	-45.43	-20	Pass

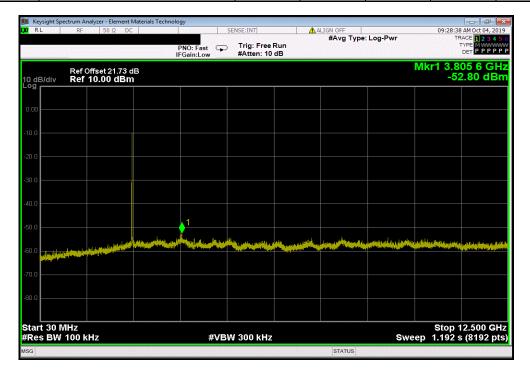

Report No. STAK0185 44/45



BLE/GFSK (2 Mbps) High Channel, 2480 MHz

Frequency Measured Max Value Limit

Range Freq (MHz) (dBc) ≤ (dBc) Result

12.5 GHz - 25 GHz 24519.29 -43.39 -20 Pass



Report No. STAK0185 45/45