



# FCC RF Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2231-1, XT2231-5  
FCC ID : IHDT56AC2  
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L)  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
TEST DATE(S) : Dec. 08, 2021 ~ Dec. 30, 2021

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



## TABLE OF CONTENTS

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>REVISION HISTORY</b>                                   | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT</b>                             | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION</b>                              | <b>5</b>  |
| 1.1 Applicant                                             | 5         |
| 1.2 Manufacturer                                          | 5         |
| 1.3 Product Feature of Equipment Under Test               | 5         |
| 1.4 Product Specification of Equipment Under Test         | 6         |
| 1.5 Modification of EUT                                   | 6         |
| 1.6 Specification of Accessory                            | 7         |
| 1.7 Maximum ERP/EIRP Power, and Emission Designator       | 8         |
| 1.8 Testing Location                                      | 9         |
| 1.9 Test Software                                         | 9         |
| 1.10 Applicable Standards                                 | 9         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>       | <b>10</b> |
| 2.1 Test Mode                                             | 10        |
| 2.2 Connection Diagram of Test System                     | 11        |
| 2.3 Support Unit used in test configuration               | 11        |
| 2.4 Measurement Results Explanation Example               | 12        |
| 2.5 Frequency List of Low/Middle/High Channels            | 12        |
| <b>3 CONDUCTED TEST RESULT</b>                            | <b>13</b> |
| 3.1 Measuring Instruments                                 | 13        |
| 3.2 Test Setup                                            | 13        |
| 3.3 Test Result of Conducted Test                         | 13        |
| 3.4 Conducted Output Power and ERP/EIRP                   | 14        |
| 3.5 Peak-to-Average Ratio                                 | 15        |
| 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement | 16        |
| 3.7 Conducted Band Edge                                   | 17        |
| 3.8 Conducted Spurious Emission                           | 18        |
| 3.9 Frequency Stability                                   | 19        |
| <b>4 RADIATED TEST ITEMS</b>                              | <b>20</b> |
| 4.1 Measuring Instruments                                 | 20        |
| 4.2 Test Setup                                            | 20        |
| 4.3 Test Result of Radiated Test                          | 21        |
| 4.4 Field Strength of Spurious Radiation Measurement      | 22        |
| <b>5 LIST OF MEASURING EQUIPMENT</b>                      | <b>23</b> |
| <b>6 UNCERTAINTY OF EVALUATION</b>                        | <b>24</b> |
| <b>APPENDIX A. TEST RESULTS OF CONDUCTED TEST</b>         |           |
| <b>APPENDIX B. TEST RESULTS OF RADIATED TEST</b>          |           |
| <b>APPENDIX C. TEST SETUP PHOTOGRAPHS</b>                 |           |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FG1N1011A  | Rev. 01 | Initial issue of report | Jan. 25, 2022 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule                                         | Description                                   | Limit                  | Result      | Remark                                    |
|----------------|--------------------------------------------------|-----------------------------------------------|------------------------|-------------|-------------------------------------------|
| 3.4            | §2.1046                                          | Conducted Output Power                        | -                      | Report Only | -                                         |
|                | §22.913(a)(5)                                    | Effective Radiated Power                      | < 7 Watts              | PASS        | -                                         |
|                | §24.232(c)                                       | Equivalent Isotropic Radiated Power           | < 2 Watts              | PASS        | -                                         |
|                | §27.50(d)(4)                                     | Equivalent Isotropic Radiated Power           | < 1 Watts              | PASS        | -                                         |
| 3.5            | §24.232(d)                                       | Peak-to-Average Ratio                         | < 13 dB                | PASS        | -                                         |
| 3.6            | §2.1049                                          | Occupied Bandwidth                            | Reporting Only         | PASS        | -                                         |
| 3.7            | §2.1051<br>§22.917(a)<br>§24.238(a)<br>§27.53(h) | Band Edge Measurement                         | < 43+10log10(P[Watts]) | PASS        | -                                         |
| 3.8            | §2.1051<br>§22.917(a)<br>§24.238(a)<br>§27.53(h) | Conducted Emission                            | < 43+10log10(P[Watts]) | PASS        | -                                         |
| 3.9            | §2.1055<br>§22.355                               | Frequency Stability for Temperature & Voltage | < 2.5 ppm for Part 22  | PASS        | -                                         |
|                | §2.1055<br>§24.235<br>§27.54                     |                                               | Within Authorized Band |             |                                           |
| 4.4            | §2.1053; §22.917(a);<br>§24.238(a); §27.53(h)    | Field Strength of Spurious Radiation          | < 43+10log10(P[Watts]) | PASS        | Under limit<br>33.24 dB at<br>3760.00 MHz |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**Motorola Mobility LLC**

222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

## 1.2 Manufacturer

**Motorola Mobility LLC**

222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

## 1.3 Product Feature of Equipment Under Test

| Product Feature |                                                                                            |
|-----------------|--------------------------------------------------------------------------------------------|
| Equipment       | Mobile Cellular Phone                                                                      |
| Brand Name      | Motorola                                                                                   |
| Model Name      | XT2231-1,XT2231-5                                                                          |
| IMEI Code       | Conducted : 359986690042590/359986690045114<br>Radiation : 359986690042764/359986690045288 |
| FCC ID          | IHDT56AC2                                                                                  |
| HW Version      | DVT2                                                                                       |
| SW Version      | STA32.48                                                                                   |
| EUT Stage       | Identical Prototype                                                                        |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification |                                                                                                                                                                                            |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                     | <b>GSM/GPRS/EDGE:</b><br>850: 824 MHz ~ 849 MHz<br>1900: 1850MHz ~ 1910MHz<br><b>WCDMA:</b><br>Band V: 824 MHz ~ 849 MHz<br>Band II: 1850 MHz ~ 1910 MHz<br>Band IV: 1710 MHz ~ 1755 MHz   |
| <b>Rx Frequency</b>                     | <b>GSM/GPRS/EDGE:</b><br>850: 869 MHz ~ 894 MHz<br>1900: 1930 MHz ~ 1990 MHz<br><b>WCDMA:</b><br>Band V: 869 MHz ~ 894 MHz<br>Band II: 1930 MHz ~ 1990 MHz<br>Band IV: 2110 MHz ~ 2155 MHz |
| <b>Maximum Output Power to Antenna</b>  | <b>GSM/GPRS/EDGE:</b><br>850: 32.61 dBm<br>1900: 29.50 dBm<br><b>WCDMA:</b><br>Band V: 22.82 dBm<br>Band II: 22.80 dBm<br>Band IV: 23.02 dBm                                               |
| <b>Antenna Type</b>                     | PIFA Antenna                                                                                                                                                                               |
| <b>Antenna Gain</b>                     | Cellular Band: -3.70 dBi<br>PCS Band: -2.80 dBi<br>AWS Band: -2.70 dBi                                                                                                                     |
| <b>Type of Modulation</b>               | GSM: GMSK<br>GPRS: GMSK<br>EDGE: GMSK / 8PSK<br>WCDMA : BPSK<br>HSPA : QPSK<br>HSPA+ : 16QAM (Downlink only)<br>DC-HSDPA : 64QAM                                                           |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Specification of Accessory

| Specification of Accessory |            |                       |            |                 |
|----------------------------|------------|-----------------------|------------|-----------------|
| AC Adapter 1(US)           | Brand Name | Motorola (Chenyang)   | Model Name | MC-201          |
| AC Adapter 1(EU)           | Brand Name | Motorola (Chenyang)   | Model Name | MC-202          |
| AC Adapter 1(AR)           | Brand Name | Motorola (Chenyang)   | Model Name | MC-206          |
| AC Adapter 2(US)           | Brand Name | Motorola (Acbel)      | Model Name | MC-201          |
| AC Adapter 2(EU)           | Brand Name | Motorola (Acbel)      | Model Name | MC-202          |
| AC Adapter 2(AR)           | Brand Name | Motorola (Acbel)      | Model Name | MC-206          |
| AC Adapter 2(CHILE)        | Brand Name | Motorola (Acbel)      | Model Name | MC-209          |
| AC Adapter 3(IN)           | Brand Name | Motorola (Chenyang)   | Model Name | MC-204          |
| AC Adapter 4(IN)           | Brand Name | Motorola (Aohai)      | Model Name | MC-204          |
| AC Adapter 5(BR)           | Brand Name | Motorola (Flex)       | Model Name | MC-207          |
| AC Adapter 6(BR)           | Brand Name | Motorola (Salcomp)    | Model Name | MC-207          |
| AC Adapter 7(US)           | Brand Name | Motorola (Chenyang)   | Model Name | MC-101          |
| AC Adapter 7(EU)           | Brand Name | Motorola (Chenyang)   | Model Name | MC-102          |
| AC Adapter 7(UK)           | Brand Name | Motorola (Chenyang)   | Model Name | MC-103          |
| AC Adapter 7(AU)           | Brand Name | Motorola (Chenyang)   | Model Name | MC-105          |
| AC Adapter 8(US)           | Brand Name | Motorola (Salcomp)    | Model Name | MC-101          |
| AC Adapter 8(EU)           | Brand Name | Motorola (Salcomp)    | Model Name | MC-102          |
| AC Adapter 8(UK)           | Brand Name | Motorola (Salcomp)    | Model Name | MC-103          |
| AC Adapter 8(AU)           | Brand Name | Motorola (Salcomp)    | Model Name | MC-105          |
| AC Adapter 9(US)           | Brand Name | Motorola (Aohai)      | Model Name | MC-101          |
| AC Adapter 9(EU)           | Brand Name | Motorola (Aohai)      | Model Name | MC-102          |
| AC Adapter 9(UK)           | Brand Name | Motorola (Aohai)      | Model Name | MC-103          |
| AC Adapter 10(IN)          | Brand Name | Motorola (Chenyang)   | Model Name | MC-104          |
| AC Adapter 11(IN)          | Brand Name | Motorola (Aohai)      | Model Name | MC-104          |
| AC Adapter 12(AU)          | Brand Name | Motorola (Aohai)      | Model Name | MC-105          |
| AC Adapter 13(EU)          | Brand Name | Motorola (Salom)      | Model Name | SC-42           |
| AC Adapter 14(UK)          | Brand Name | Motorola (Chenyang)   | Model Name | SC-43           |
| Earphone 1                 | Brand Name | Motorola (Iyand)      | Model Name | LYM239-76C-003  |
| Earphone 2                 | Brand Name | Motorola (LCHSE)      | Model Name | MEND1432B875000 |
| Earphone 3                 | Brand Name | Motorola (New Leader) | Model Name | MH202           |
| USB Cable 1                | Brand Name | Motorola(Yihuaxing)   | Model Name | T365-011B       |
| USB Cable 2                | Brand Name | Motorola(SUNTOPS)     | Model Name | 336258          |
| USB Cable 3                | Brand Name | Motorola(SUNTOPS)     | Model Name | 336281          |
| USB Cable 4                | Brand Name | Motorola(I SHENG)     | Model Name | SC18D33506      |
| USB Cable 5                | Brand Name | Motorola(Yihuaxing)   | Model Name | T365-012B       |
| Battery 1                  | Brand Name | Motorola(Sunwoda)     | Model Name | NH50            |
| Battery 2                  | Brand Name | Motorola(SCUD)        | Model Name | NH50            |

## 1.7 Maximum ERP/EIRP Power, and Emission Designator

| FCC Rule | Frequency Band | Frequency Range (MHz) | Type of Modulation | Maximum ERP/EIRP (W) | Emission Designator |
|----------|----------------|-----------------------|--------------------|----------------------|---------------------|
| Part 22  | GSM850 (GSM)   | 824.2 ~ 848.8         | GMSK               | 0.4742               | 240KGXW             |
| Part 22  | GSM850 (EDGE)  | 824.2 ~ 848.8         | 8PSK               | 0.1253               | 250KG7W             |
| Part 22  | WCDMA Band V   | 826.4 ~ 846.6         | BPSK               | 0.0498               | 4M19F9W             |
| Part 24  | GSM1900 (GSM)  | 1850.2 ~ 1909.8       | GMSK               | 0.4677               | 240KGXW             |
| Part 24  | GSM1900 (EDGE) | 1850.2 ~ 1909.8       | 8PSK               | 0.2000               | 250KG7W             |
| Part 24  | WCDMA Band II  | 1852.4 ~ 1907.6       | BPSK               | 0.1000               | 4M17F9W             |
| Part 27  | WCDMA Band IV  | 1712.4 ~ 1752.6       | BPSK               | 0.1076               | 4M17F9W             |



## 1.8 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

|                           |                                                                                                                                                                         |                            |                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (Shenzhen)                                                                                                                                   |                            |                                       |
| <b>Test Site Location</b> | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China<br>TEL: +86-755-86379589<br>FAX: +86-755-86379595 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                                 | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | TH01-SZ                                                                                                                                                                 | CN1256                     | 421272                                |

|                           |                                                                                                                                                                                           |                            |                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (Shenzhen)                                                                                                                                                     |                            |                                       |
| <b>Test Site Location</b> | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103<br>TEL: +86-755-33202398 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                                                   | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | 03CH01-SZ                                                                                                                                                                                 | CN1256                     | 421272                                |

## 1.9 Test Software

| Item | Site      | Manufacturer | Name | Version     |
|------|-----------|--------------|------|-------------|
| 1.   | 03CH01-SZ | AUDIX        | E3   | 6.2009-8-24 |

## 1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes    |                                   |                                   |
|---------------|-----------------------------------|-----------------------------------|
| Band          | Radiated TCs                      | Conducted TCs                     |
| GSM 850       | ■ GSM Link<br>■ EDGE class 8 Link | ■ GSM Link<br>■ EDGE class 8 Link |
| GSM 1900      | ■ GSM Link<br>■ EDGE class 8 Link | ■ GSM Link<br>■ EDGE class 8 Link |
| WCDMA Band V  | ■ RMC 12.2Kbps Link               | ■ RMC 12.2Kbps Link               |
| WCDMA Band II | ■ RMC 12.2Kbps Link               | ■ RMC 12.2Kbps Link               |
| WCDMA Band IV | ■ RMC 12.2Kbps Link               | ■ RMC 12.2Kbps Link               |

## 2.2 Connection Diagram of Test System

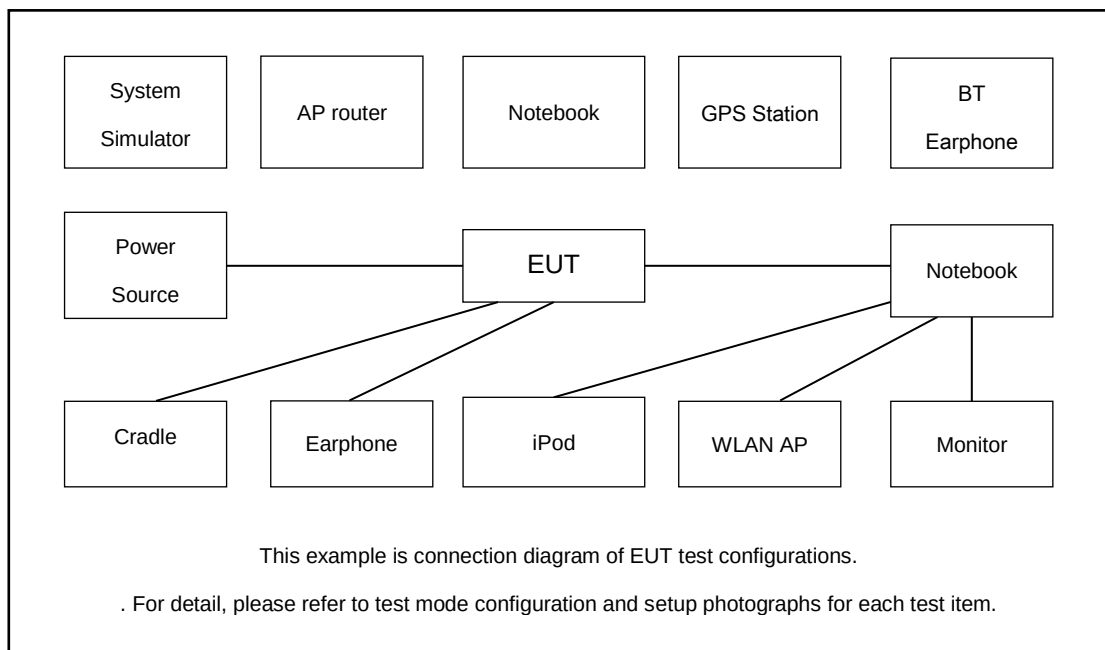

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

## 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A    | N/A        | Unshielded, 1.8 m |
| 2.   | System Simulator | Agilent    | E5515C    | N/A    | N/A        | Unshielded, 1.8 m |



## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.0 + 10 = 14.0 \text{ (dB)}\end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

| Frequency List   |                        |        |        |         |
|------------------|------------------------|--------|--------|---------|
| Band             | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| GSM850           | Channel                | 128    | 189    | 251     |
|                  | Frequency              | 824.2  | 836.4  | 848.8   |
| WCDMA<br>Band V  | Channel                | 4132   | 4182   | 4233    |
|                  | Frequency              | 826.4  | 836.4  | 846.6   |
| GSM1900          | Channel                | 512    | 661    | 810     |
|                  | Frequency              | 1850.2 | 1880.0 | 1909.8  |
| WCDMA<br>Band II | Channel                | 9262   | 9400   | 9538    |
|                  | Frequency              | 1852.4 | 1880.0 | 1907.6  |
| WCDMA<br>Band IV | Channel                | 1312   | 1413   | 1513    |
|                  | Frequency              | 1712.4 | 1732.6 | 1752.6  |


### 3 Conducted Test Result

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

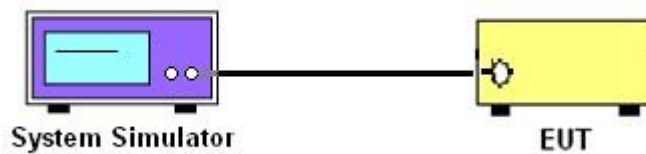

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

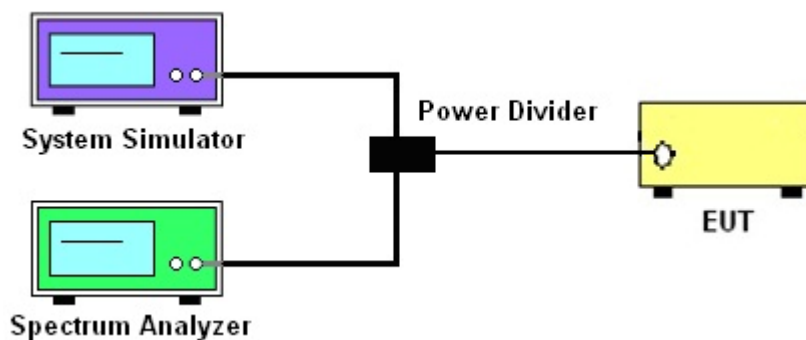

##### 3.2.3 Frequency Stability

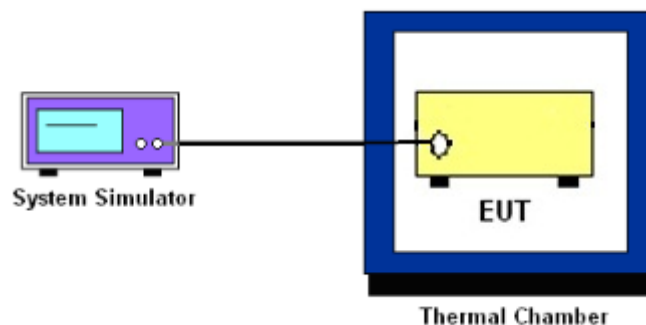

#### 3.3 Test Result of Conducted Test

Please refer to Appendix A.

### 3.4 Conducted Output Power and ERP/EIRP

#### 3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

## 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

### 3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.





## **3.7 Conducted Band Edge**

### **3.7.1 Description of Conducted Band Edge Measurement**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **3.7.2 Test Procedures**

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)

## 3.8 Conducted Spurious Emission

### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)

### 3.9 Frequency Stability

#### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

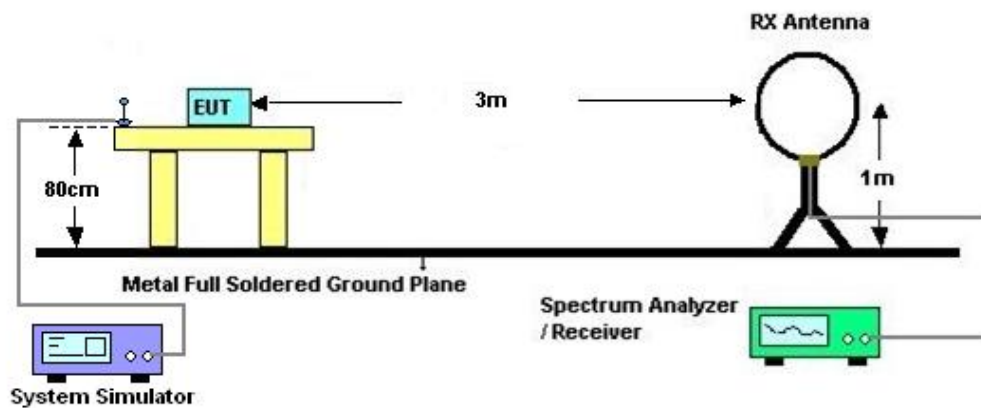

#### 4.2.2 For radiated test from 30MHz to 1GHz

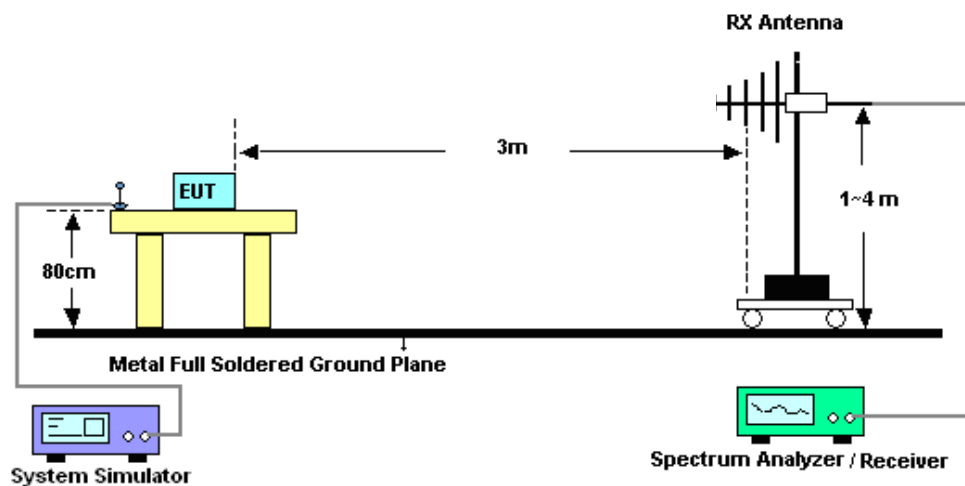

#### 4.2.3 For radiated test above 1GHz

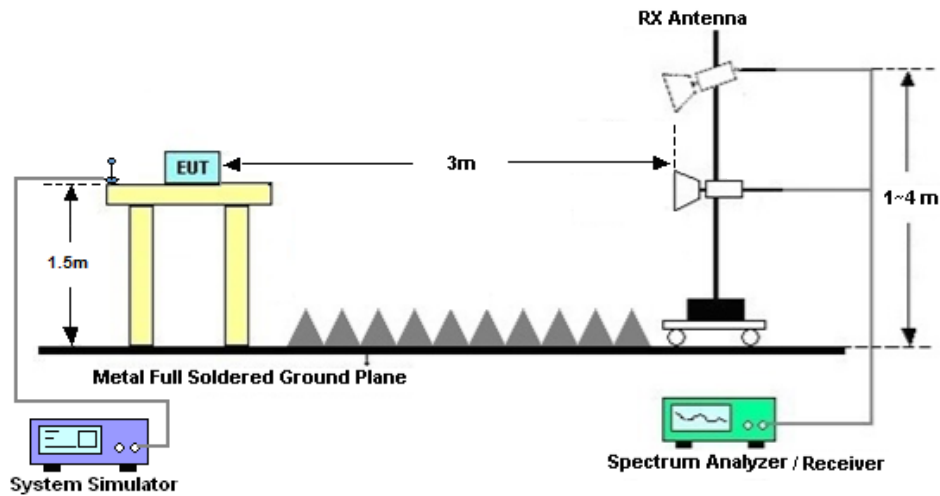

#### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Field Strength of Spurious Radiation Measurement

### 4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

| Instrument                | Manufacturer              | Model No.                   | Serial No.     | Characteristics | Calibration Date | Test Date                       | Due Date        | Remark                |
|---------------------------|---------------------------|-----------------------------|----------------|-----------------|------------------|---------------------------------|-----------------|-----------------------|
| Spectrum Analyzer         | R&S                       | FSV40                       | 101078         | 10Hz~40GHz      | Apr. 08, 2021    | Dec. 19, 2021<br>~Dec. 30, 2021 | Apr. 07, 2022   | Conducted (TH01-SZ)   |
| DC Power Supply           | TTI                       | PL330P                      | 290070         | Max 32V , 3A    | Oct. 25, 2021    | Dec. 19, 2021<br>~Dec. 30, 2021 | Oct. 24, 2022   | Conducted (TH01-SZ)   |
| Power Divider             | TOJOIN                    | PS-2SM-04265                | 60.06.020.0077 | 0.4GHz~26.5GHz  | Dec , 25 , 2021  | Dec. 19, 2021<br>~Dec. 30, 2021 | Dec , 24 , 2022 | Conducted (TH01-SZ)   |
| Thermal Chamber           | Ten Billion Hongzhangroup | LP-150U                     | H2014081803    | -40~+150°C      | Jul. 14, 2021    | Dec. 19, 2021<br>~Dec. 30, 2021 | Jul. 13, 2022   | Conducted (TH01-SZ)   |
| EXA Spectrum Analyzer     | KEYSIGHT                  | N9010A                      | MY55150213     | 10Hz~44GHz      | Jul. 21, 2021    | Dec. 08, 2021<br>~Dec. 23, 2021 | Jul. 20, 2022   | Radiation (03CH01-SZ) |
| Loop Antenna              | R&S                       | HFH2-Z2                     | 100354         | 9kHz~30MHz      | Jun. 22, 2020    | Dec. 08, 2021<br>~Dec. 23, 2021 | Jun. 21, 2022   | Radiation (03CH01-SZ) |
| Bilog Antenna             | TeseQ                     | CBL6112D                    | 35407          | 30MHz-2GHz      | Jul. 15, 2021    | Dec. 08, 2021<br>~Dec. 23, 2021 | Jul. 14, 2022   | Radiation (03CH01-SZ) |
| Double Ridge Horn Antenna | ETS-Lindgren              | 3117                        | 00119436       | 1GHz~18GHz      | Jul. 25, 2021    | Dec. 08, 2021<br>~Dec. 23, 2021 | Jul. 24, 2022   | Radiation (03CH01-SZ) |
| SHF-EHF Horn              | com-power                 | AH-840                      | 101071         | 18Ghz-40GHz     | Apr. 11, 2021    | Dec. 08, 2021<br>~Dec. 23, 2021 | Apr. 10, 2022   | Radiation (03CH01-SZ) |
| LF Amplifier              | Burgeon                   | BPA-530                     | 102209         | 0.01~3000Mhz    | Apr. 07, 2021    | Dec. 08, 2021<br>~Dec. 23, 2021 | Apr. 06, 2022   | Radiation (03CH01-SZ) |
| HF Amplifier              | MITEQ                     | AMF-7D-0010<br>1800-30-10P- | 1943528        | 1GHz~18GHz      | Oct. 15, 2021    | Dec. 08, 2021<br>~Dec. 23, 2021 | Oct. 14, 2022   | Radiation (03CH01-SZ) |
| HF Amplifier              | KEYSIGHT                  | 83017A                      | MY53270105     | 0.5GHz~26.5Ghz  | Oct. 16, 2021    | Dec. 08, 2021<br>~Dec. 23, 2021 | Oct. 15, 2022   | Radiation (03CH01-SZ) |
| HF Amplifier              | MITEQ                     | TTA1840-35-HG               | 1871923        | 18GHz~40GHz     | Jul. 21, 2021    | Dec. 08, 2021<br>~Dec. 23, 2021 | Jul. 20, 2022   | Radiation (03CH01-SZ) |
| AC Power Source           | Chroma                    | 61601                       | 616010001985   | N/A             | NCR              | Dec. 08, 2021<br>~Dec. 23, 2021 | NCR             | Radiation (03CH01-SZ) |
| Turn Table                | EM                        | EM1000                      | N/A            | 0~360 degree    | NCR              | Dec. 08, 2021<br>~Dec. 23, 2021 | NCR             | Radiation (03CH01-SZ) |
| Antenna Mast              | EM                        | EM1000                      | N/A            | 1 m~4 m         | NCR              | Dec. 08, 2021<br>~Dec. 23, 2021 | NCR             | Radiation (03CH01-SZ) |

## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage  $K=2$  to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.48dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 3.53dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.02dB |
|-------------------------------------------------------------------------|--------|

———— THE END ————





## Appendix A. Test Results of Conducted Test

|                 |             |                     |         |
|-----------------|-------------|---------------------|---------|
| Test Engineer : | Jason Zhang | Temperature :       | 24~26°C |
|                 |             | Relative Humidity : | 50~53%  |

### Conducted Output Power(Average power)

| GSM850          | Burst Average Power (dBm) |       |        |
|-----------------|---------------------------|-------|--------|
| TX Channel      | 128                       | 189   | 251    |
| Frequency (MHz) | 824.2                     | 836.4 | 848.8  |
| GSM 1 Tx slot   | 32.55                     | 32.56 | 32.61  |
| GPRS 1 Tx slot  | 32.53                     | 32.51 | 32.54  |
| GPRS 2 Tx slots | 30.93                     | 30.92 | 30.96  |
| GPRS 3 Tx slots | 29.64                     | 29.67 | 29.65  |
| GPRS 4 Tx slots | 27.61                     | 27.61 | 27.63  |
| EDGE 1 Tx slot  | 26.76                     | 26.73 | 26.83  |
| EDGE 2 Tx slots | 25.67                     | 25.68 | 25.72  |
| EDGE 3 Tx slots | 23.12                     | 23.11 | 23.26  |
| EDGE 4 Tx slots | 21.85                     | 21.72 | 21.75  |
| GSM1900         | Burst Average Power (dBm) |       |        |
| TX Channel      | 512                       | 661   | 810    |
| Frequency (MHz) | 1850.2                    | 1880  | 1909.8 |
| GSM 1 Tx slot   | 29.37                     | 29.48 | 29.43  |
| GPRS 1 Tx slot  | 29.37                     | 29.50 | 29.45  |
| GPRS 2 Tx slots | 27.83                     | 27.94 | 27.91  |
| GPRS 3 Tx slots | 26.87                     | 27.00 | 26.97  |
| GPRS 4 Tx slots | 24.86                     | 24.98 | 24.92  |
| EDGE 1 Tx slot  | 25.76                     | 25.80 | 25.81  |
| EDGE 2 Tx slots | 24.73                     | 24.75 | 24.65  |
| EDGE 3 Tx slots | 22.59                     | 22.73 | 22.78  |
| EDGE 4 Tx slots | 21.64                     | 21.74 | 21.60  |



| Band            |                    | WCDMA II |        |        |
|-----------------|--------------------|----------|--------|--------|
| TX Channel      |                    | 9262     | 9400   | 9538   |
| Rx Channel      |                    | 9662     | 9800   | 9938   |
| Frequency (MHz) |                    | 1852.4   | 1880   | 1907.6 |
| 3GPP Rel 99     | AMR 12.2Kbps       | 22.74    | 22.76  | 22.65  |
| 3GPP Rel 99     | RMC 12.2Kbps       | 22.74    | 22.80  | 22.63  |
| 3GPP Rel 6      | HSDPA Subtest-1    | 21.71    | 21.71  | 21.64  |
| 3GPP Rel 6      | HSDPA Subtest-2    | 21.60    | 21.58  | 21.49  |
| 3GPP Rel 6      | HSDPA Subtest-3    | 21.08    | 21.10  | 20.96  |
| 3GPP Rel 6      | HSDPA Subtest-4    | 21.07    | 21.14  | 20.97  |
| 3GPP Rel 8      | DC-HSDPA Subtest-1 | 21.76    | 21.78  | 21.72  |
| 3GPP Rel 8      | DC-HSDPA Subtest-2 | 21.58    | 21.65  | 21.60  |
| 3GPP Rel 8      | DC-HSDPA Subtest-3 | 21.11    | 21.15  | 21.13  |
| 3GPP Rel 8      | DC-HSDPA Subtest-4 | 21.09    | 21.11  | 21.10  |
| 3GPP Rel 6      | HSUPA Subtest-1    | 19.99    | 19.89  | 19.86  |
| 3GPP Rel 6      | HSUPA Subtest-2    | 19.76    | 19.73  | 19.59  |
| 3GPP Rel 6      | HSUPA Subtest-3    | 20.74    | 20.72  | 20.69  |
| 3GPP Rel 6      | HSUPA Subtest-4    | 19.29    | 19.22  | 19.15  |
| 3GPP Rel 6      | HSUPA Subtest-5    | 20.70    | 20.60  | 20.50  |
| Band            |                    | WCDMA IV |        |        |
| TX Channel      |                    | 1312     | 1413   | 1513   |
| Rx Channel      |                    | 1537     | 1638   | 1738   |
| Frequency (MHz) |                    | 1712.4   | 1732.6 | 1752.6 |
| 3GPP Rel 99     | AMR 12.2Kbps       | 22.94    | 22.95  | 22.86  |
| 3GPP Rel 99     | RMC 12.2Kbps       | 22.91    | 23.02  | 22.86  |
| 3GPP Rel 6      | HSDPA Subtest-1    | 21.95    | 21.90  | 21.86  |
| 3GPP Rel 6      | HSDPA Subtest-2    | 21.89    | 21.90  | 21.81  |
| 3GPP Rel 6      | HSDPA Subtest-3    | 21.38    | 21.42  | 21.31  |
| 3GPP Rel 6      | HSDPA Subtest-4    | 21.33    | 21.34  | 21.31  |
| 3GPP Rel 8      | DC-HSDPA Subtest-1 | 21.92    | 21.99  | 21.92  |
| 3GPP Rel 8      | DC-HSDPA Subtest-2 | 21.90    | 21.93  | 21.85  |
| 3GPP Rel 8      | DC-HSDPA Subtest-3 | 21.42    | 21.45  | 21.38  |
| 3GPP Rel 8      | DC-HSDPA Subtest-4 | 21.37    | 21.40  | 21.33  |
| 3GPP Rel 6      | HSUPA Subtest-1    | 19.80    | 20.05  | 19.99  |
| 3GPP Rel 6      | HSUPA Subtest-2    | 19.71    | 19.69  | 19.56  |
| 3GPP Rel 6      | HSUPA Subtest-3    | 20.73    | 20.61  | 20.63  |
| 3GPP Rel 6      | HSUPA Subtest-4    | 19.52    | 19.49  | 19.41  |
| 3GPP Rel 6      | HSUPA Subtest-5    | 21.00    | 20.90  | 20.80  |



| Band            |                    | WCDMA V |       |       |
|-----------------|--------------------|---------|-------|-------|
| TX Channel      |                    | 4132    | 4182  | 4233  |
| Rx Channel      |                    | 4357    | 4407  | 4458  |
| Frequency (MHz) |                    | 826.4   | 836.4 | 846.6 |
| 3GPP Rel 99     | AMR 12.2Kbps       | 22.67   | 22.75 | 22.71 |
| 3GPP Rel 99     | RMC 12.2Kbps       | 22.72   | 22.82 | 22.67 |
| 3GPP Rel 6      | HSDPA Subtest-1    | 21.77   | 21.82 | 21.74 |
| 3GPP Rel 6      | HSDPA Subtest-2    | 21.73   | 21.76 | 21.67 |
| 3GPP Rel 6      | HSDPA Subtest-3    | 21.32   | 21.21 | 21.17 |
| 3GPP Rel 6      | HSDPA Subtest-4    | 21.27   | 21.20 | 21.11 |
| 3GPP Rel 8      | DC-HSDPA Subtest-1 | 21.75   | 21.79 | 21.77 |
| 3GPP Rel 8      | DC-HSDPA Subtest-2 | 21.73   | 21.75 | 21.75 |
| 3GPP Rel 8      | DC-HSDPA Subtest-3 | 21.35   | 21.38 | 21.36 |
| 3GPP Rel 8      | DC-HSDPA Subtest-4 | 21.33   | 21.35 | 21.32 |
| 3GPP Rel 6      | HSUPA Subtest-1    | 19.94   | 19.88 | 19.87 |
| 3GPP Rel 6      | HSUPA Subtest-2    | 19.87   | 19.79 | 19.74 |
| 3GPP Rel 6      | HSUPA Subtest-3    | 20.85   | 20.82 | 20.78 |
| 3GPP Rel 6      | HSUPA Subtest-4    | 19.43   | 19.32 | 19.32 |
| 3GPP Rel 6      | HSUPA Subtest-5    | 20.70   | 20.70 | 20.60 |

**ERP/EIRP**

| GSM850 ( $G_T - L_C = -3.70$ dB) |        |        |        |
|----------------------------------|--------|--------|--------|
| Channel                          | 128    | 189    | 251    |
|                                  | (Low)  | (Mid)  | (High) |
| Frequency                        | 824.2  | 836.4  | 848.8  |
| (MHz)                            |        |        |        |
| Conducted Power (dBm)            | 32.55  | 32.56  | 32.61  |
| Conducted Power (Watts)          | 1.7989 | 1.8030 | 1.8239 |
| ERP(dBm)                         | 26.70  | 26.71  | 26.76  |
| ERP(Watts)                       | 0.4677 | 0.4688 | 0.4742 |

| EDGE850 ( $G_T - L_C = -3.70$ dB) |        |        |        |
|-----------------------------------|--------|--------|--------|
| Channel                           | 128    | 189    | 251    |
|                                   | (Low)  | (Mid)  | (High) |
| Frequency                         | 824.2  | 836.4  | 848.8  |
| (MHz)                             |        |        |        |
| Conducted Power (dBm)             | 26.76  | 26.73  | 26.83  |
| Conducted Power (Watts)           | 0.4742 | 0.4710 | 0.4819 |
| ERP(dBm)                          | 20.91  | 20.88  | 20.98  |
| ERP(Watts)                        | 0.1233 | 0.1225 | 0.1253 |



| <b>GSM1900 (<math>G_T - L_C = -2.80</math> dB)</b> |               |              |               |
|----------------------------------------------------|---------------|--------------|---------------|
| <b>Channel</b>                                     | <b>512</b>    | <b>661</b>   | <b>810</b>    |
|                                                    | <b>(Low)</b>  | <b>(Mid)</b> | <b>(High)</b> |
| <b>Frequency</b>                                   | <b>1850.2</b> | <b>1880</b>  | <b>1909.8</b> |
| <b>(MHz)</b>                                       |               |              |               |
| <b>Conducted Power (dBm)</b>                       | 29.37         | 29.50        | 29.45         |
| <b>Conducted Power (Watts)</b>                     | 0.8650        | 0.8913       | 0.8810        |
| <b>EIRP(dBm)</b>                                   | 26.57         | 26.70        | 26.65         |
| <b>EIRP(Watts)</b>                                 | 0.4539        | 0.4677       | 0.4624        |

| <b>EDGE1900 (<math>G_T - L_C = -2.80</math> dB)</b> |               |              |               |
|-----------------------------------------------------|---------------|--------------|---------------|
| <b>Channel</b>                                      | <b>512</b>    | <b>661</b>   | <b>810</b>    |
|                                                     | <b>(Low)</b>  | <b>(Mid)</b> | <b>(High)</b> |
| <b>Frequency</b>                                    | <b>1850.2</b> | <b>1880</b>  | <b>1909.8</b> |
| <b>(MHz)</b>                                        |               |              |               |
| <b>Conducted Power (dBm)</b>                        | 25.76         | 25.80        | 25.81         |
| <b>Conducted Power (Watts)</b>                      | 0.3767        | 0.3802       | 0.3811        |
| <b>EIRP(dBm)</b>                                    | 22.96         | 23.00        | 23.01         |
| <b>EIRP(Watts)</b>                                  | 0.1977        | 0.1995       | 0.2000        |



| WCDMA Band V ( $G_T - L_C = -3.70$ dB) |        |        |        |
|----------------------------------------|--------|--------|--------|
| Channel                                | 4132   | 4182   | 4233   |
|                                        | (Low)  | (Mid)  | (High) |
| Frequency                              | 826.4  | 836.4  | 846.6  |
| (MHz)                                  |        |        |        |
| Conducted Power (dBm)                  | 22.72  | 22.82  | 22.67  |
| Conducted Power (Watts)                | 0.1871 | 0.1914 | 0.1849 |
| ERP(dBm)                               | 16.87  | 16.97  | 16.82  |
| ERP(Watts)                             | 0.0486 | 0.0498 | 0.0481 |

| WCDMA Band II ( $G_T - L_C = -2.80$ dB) |        |        |        |
|-----------------------------------------|--------|--------|--------|
| Channel                                 | 9262   | 9400   | 9538   |
|                                         | (Low)  | (Mid)  | (High) |
| Frequency                               | 1852.4 | 1880   | 1907.6 |
| (MHz)                                   |        |        |        |
| Conducted Power (dBm)                   | 22.74  | 22.80  | 22.63  |
| Conducted Power (Watts)                 | 0.1879 | 0.1905 | 0.1832 |
| EIRP(dBm)                               | 19.94  | 20.00  | 19.83  |
| EIRP(Watts)                             | 0.0986 | 0.1000 | 0.0962 |

| WCDMA Band IV ( $G_T - L_C = -2.70$ dB) |        |        |        |
|-----------------------------------------|--------|--------|--------|
| Channel                                 | 1312   | 1413   | 1513   |
|                                         | (Low)  | (Mid)  | (High) |
| Frequency                               | 1712.4 | 1732.6 | 1752.6 |
| (MHz)                                   |        |        |        |
| Conducted Power (dBm)                   | 22.91  | 23.02  | 22.86  |
| Conducted Power (Watts)                 | 0.1954 | 0.2004 | 0.1932 |
| EIRP(dBm)                               | 20.21  | 20.32  | 20.16  |
| EIRP(Watts)                             | 0.1050 | 0.1076 | 0.1038 |



## GSM

### Peak-to-Average Ratio


| Mode       | GSM850(dB) |              | Limit: 13dB |
|------------|------------|--------------|-------------|
| Mod.       | GSM        | EDGE class 8 | Result      |
| Lowest CH  | 0.14       | 3.10         | PASS        |
| Middle CH  | 0.14       | 3.10         |             |
| Highest CH | 0.14       | 2.55         |             |

| Mode       | GSM1900(dB) |              | Limit: 13dB |
|------------|-------------|--------------|-------------|
| Mod.       | GSM         | EDGE class 8 | Result      |
| Lowest CH  | 0.14        | 2.99         | PASS        |
| Middle CH  | 0.14        | 3.10         |             |
| Highest CH | 0.12        | 2.67         |             |



## GSM850 (GSM)


## Lowest Channel

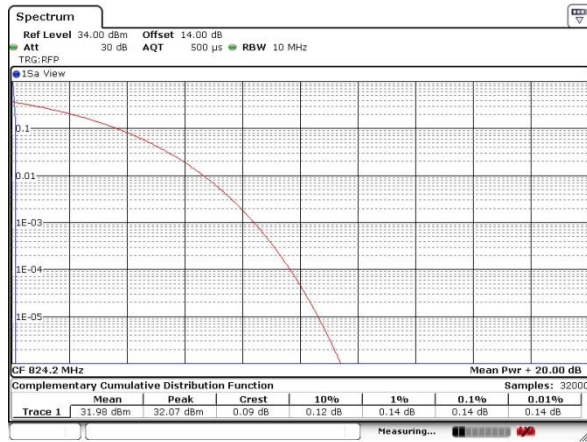

Date: 30.DEC.2021 15:45:22


## GSM850 (EDGE class 8)

## Lowest Channel

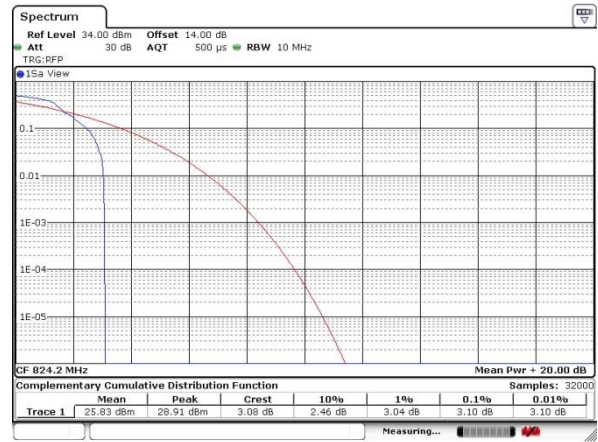


Date: 30.DEC.2021 15:54:57

## Middle Channel

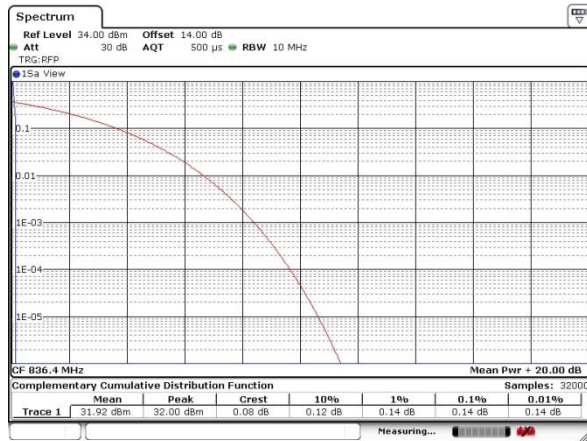


Date: 30.DEC.2021 15:46:48

## Middle Channel

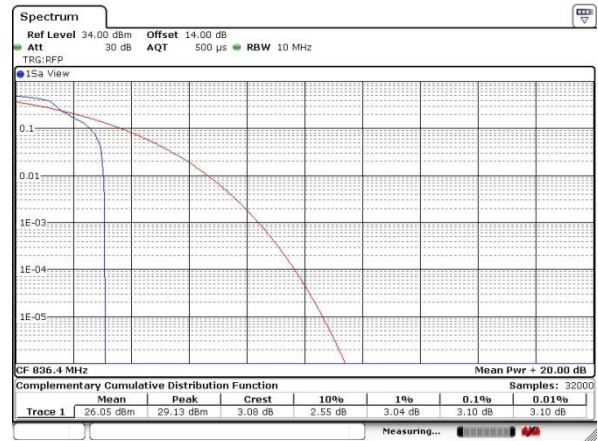


Date: 30.DEC.2021 15:55:26

## Highest Channel

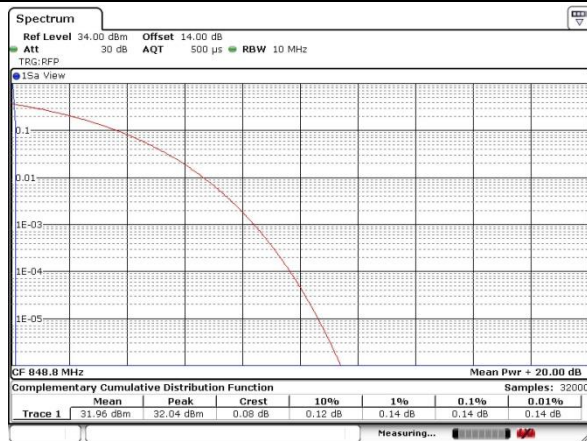

Date: 30.DEC.2021 15:47:19

## Highest Channel

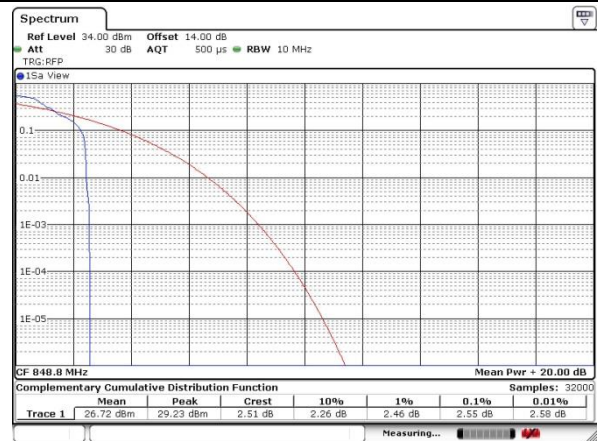


Date: 30.DEC.2021 15:55:46






## GSM1900 (GSM)

## Lowest Channel

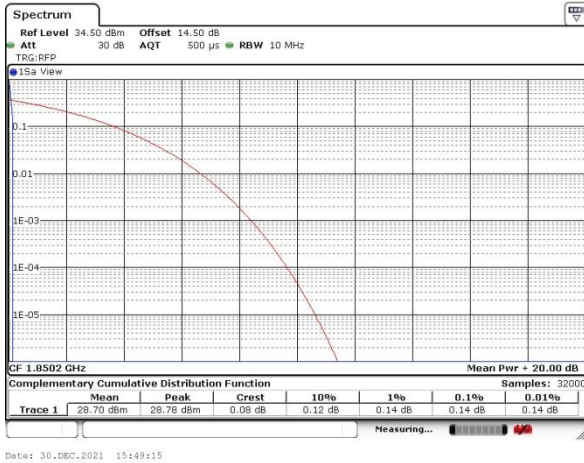


## GSM1900 (EDGE class 8)


## Lowest Channel

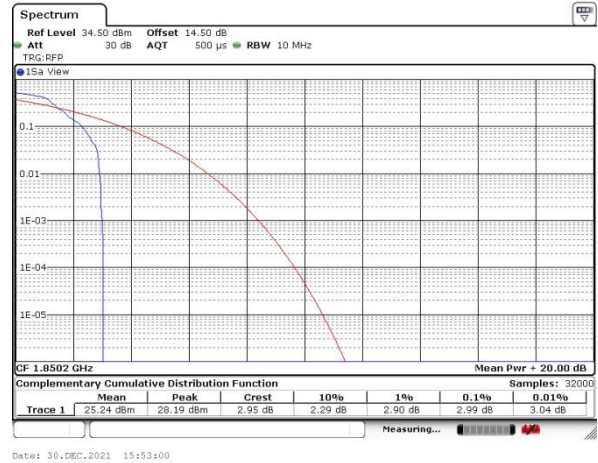


## Middle Channel

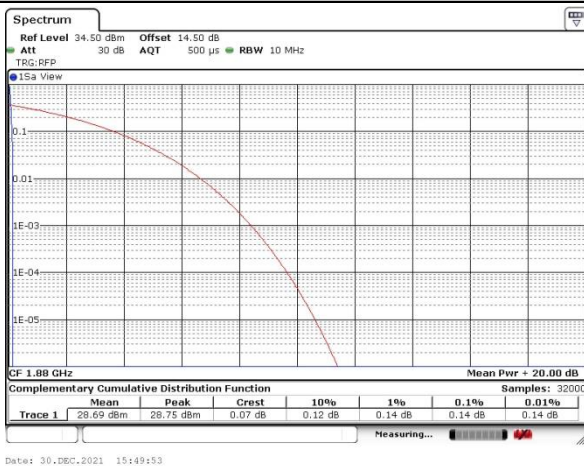


## Middle Channel

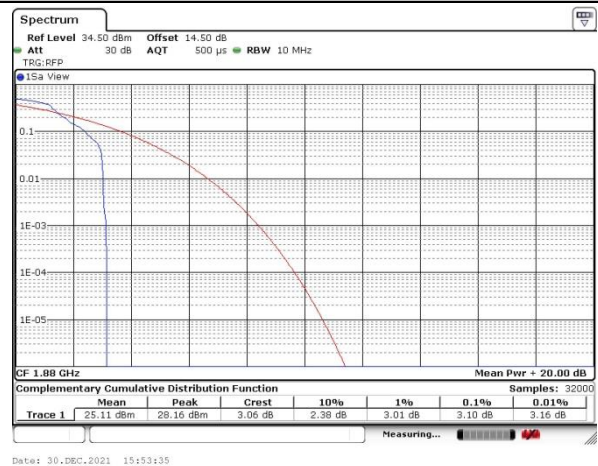

## Highest Channel

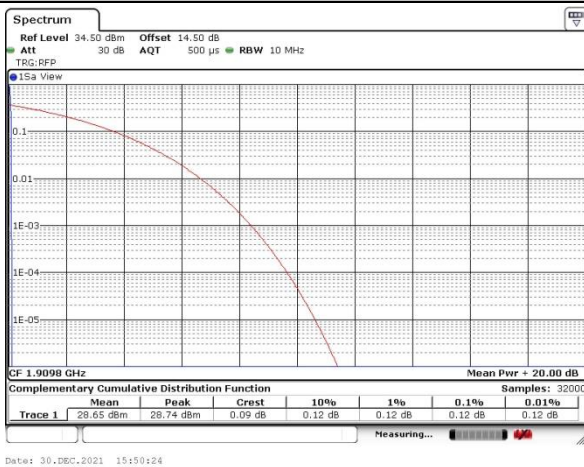

## Highest Channel

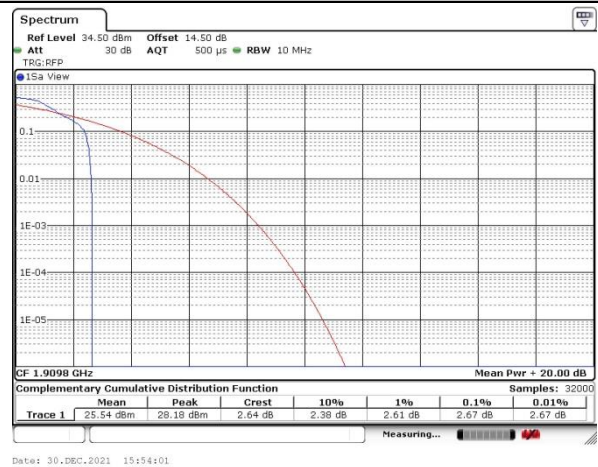

**26dB Bandwidth**


| Mode       | GSM850(MHz) |              |
|------------|-------------|--------------|
| Mod.       | GSM         | EDGE class 8 |
| Lowest CH  | 0.31        | 0.31         |
| Middle CH  | 0.31        | 0.31         |
| Highest CH | 0.32        | 0.31         |

| Mode       | GSM1900(MHz) |              |
|------------|--------------|--------------|
| Mod.       | GSM          | EDGE class 8 |
| Lowest CH  | 0.31         | 0.31         |
| Middle CH  | 0.31         | 0.32         |
| Highest CH | 0.31         | 0.32         |



## GSM850 (GSM)


## Lowest Channel

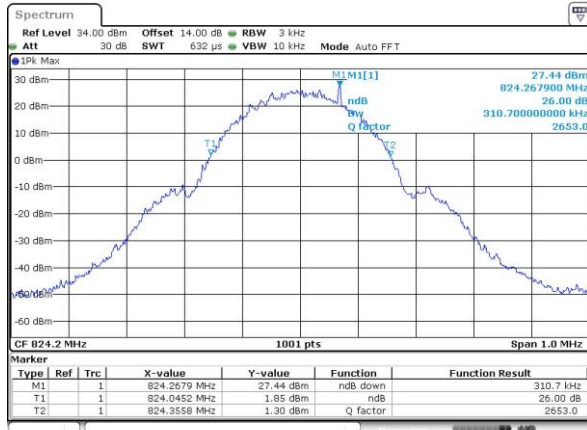

Date: 19.DEC.2021 03:05:34


## GSM850 (EDGE class 8)

## Lowest Channel

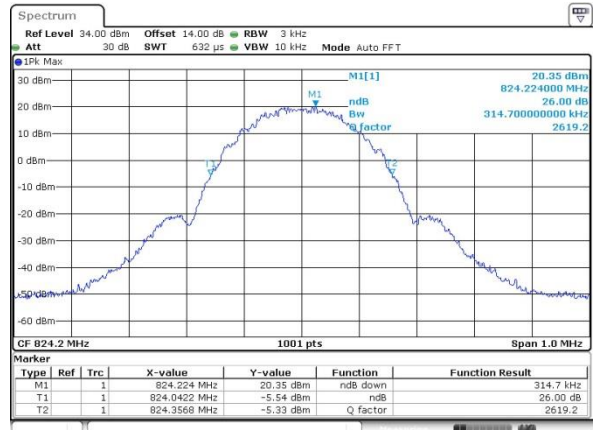


Date: 19.DEC.2021 03:38:47

## Middle Channel

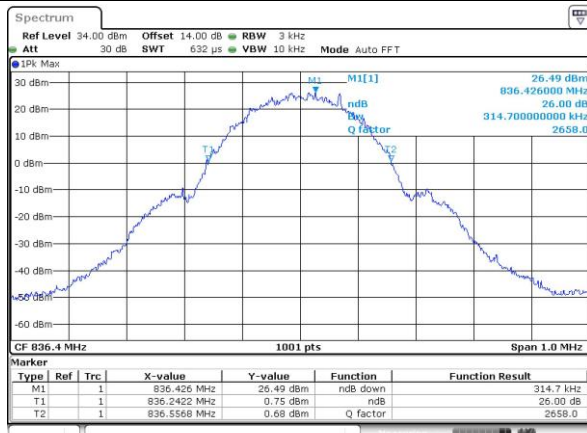


Date: 19.DEC.2021 03:06:04

## Middle Channel

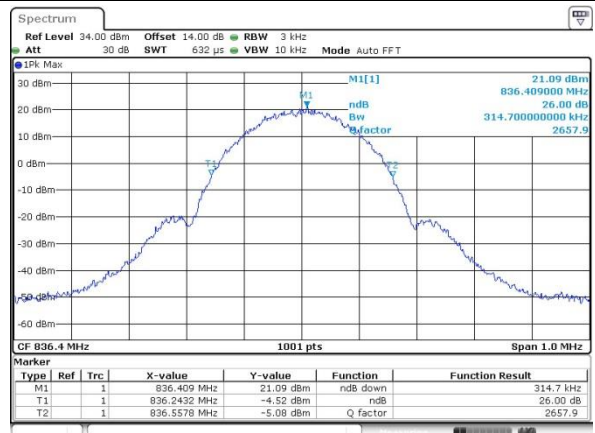


Date: 19.DEC.2021 03:39:04

## Highest Channel

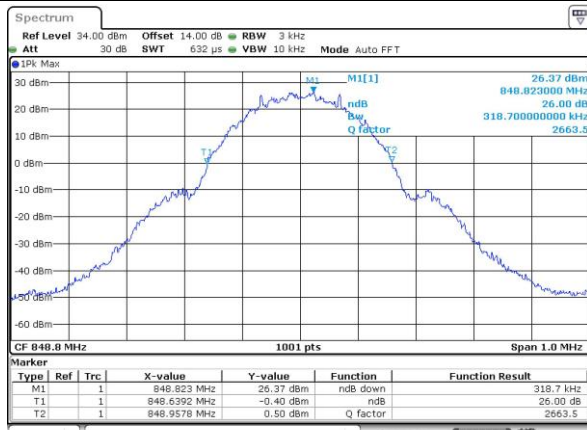

Date: 19.DEC.2021 03:06:28

## Highest Channel

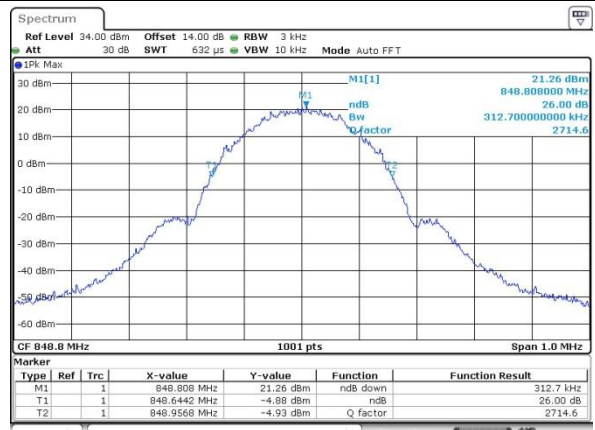


Date: 19.DEC.2021 03:39:27



## GSM1900 (GSM)


## Lowest Channel

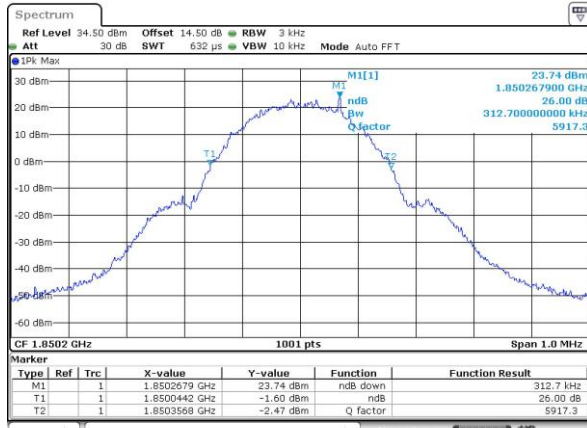

Date: 19.DEC.2021 03:17:47


## GSM1900 (EDGE class 8)

## Lowest Channel

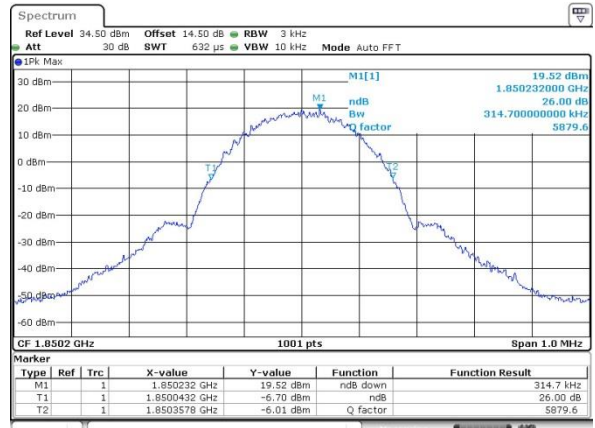


Date: 19.DEC.2021 03:53:45

## Middle Channel

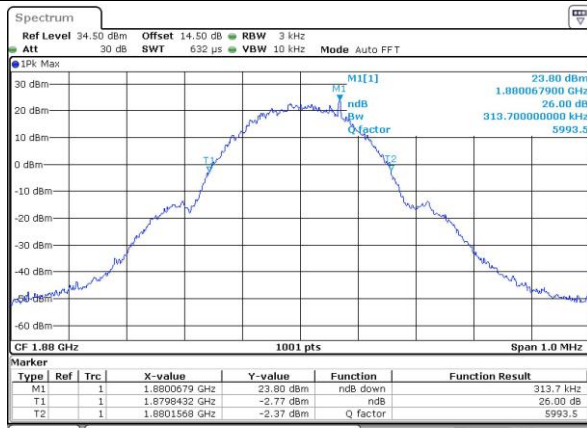


Date: 19.DEC.2021 03:18:08

## Middle Channel

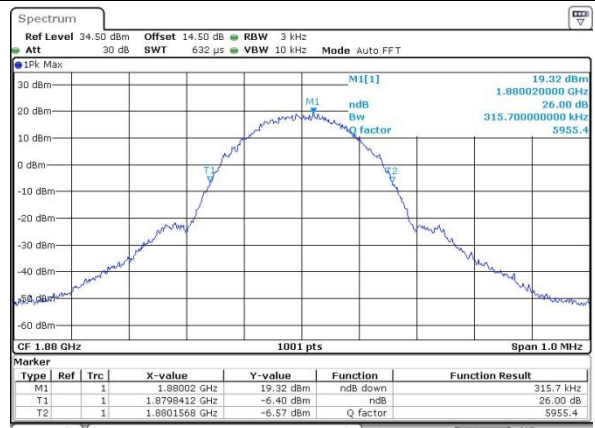


Date: 19.DEC.2021 03:54:25

## Highest Channel

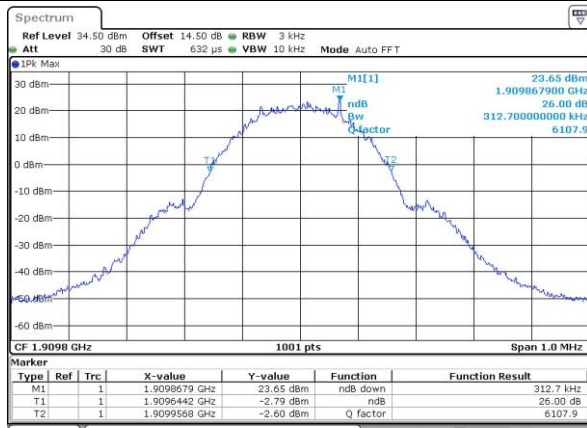

Date: 19.DEC.2021 03:19:04

## Highest Channel

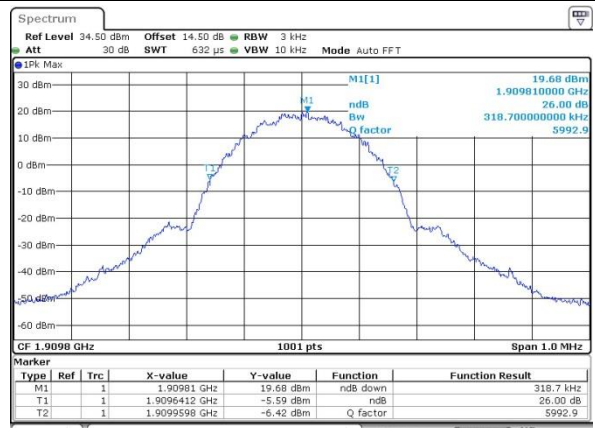

Date: 19.DEC.2021 03:54:46

**Occupied Bandwidth**

| Mode       | GSM850(MHz) |              |
|------------|-------------|--------------|
| Mod.       | GSM         | EDGE class 8 |
| Lowest CH  | 0.24        | 0.25         |
| Middle CH  | 0.24        | 0.25         |
| Highest CH | 0.24        | 0.25         |


| Mode       | GSM1900(MHz) |              |
|------------|--------------|--------------|
| Mod.       | GSM          | EDGE class 8 |
| Lowest CH  | 0.24         | 0.25         |
| Middle CH  | 0.24         | 0.25         |
| Highest CH | 0.24         | 0.25         |






## GSM850 (GSM)

## Lowest Channel

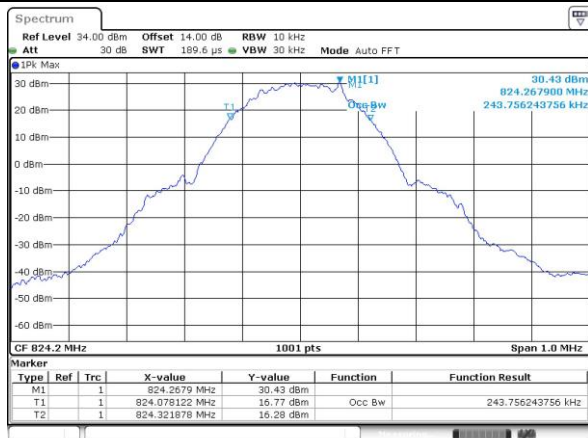


## GSM850 (EDGE class 8)


## Lowest Channel

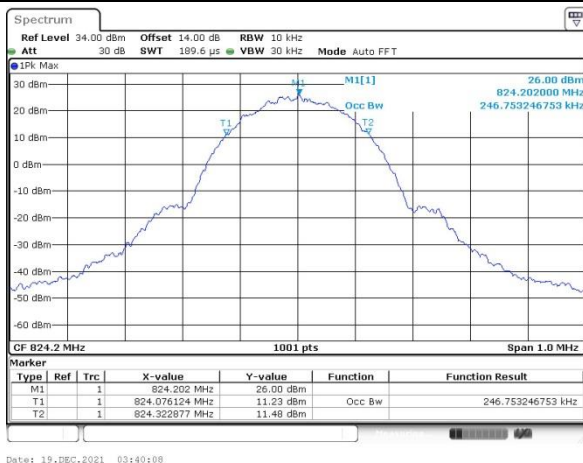

## Middle Channel

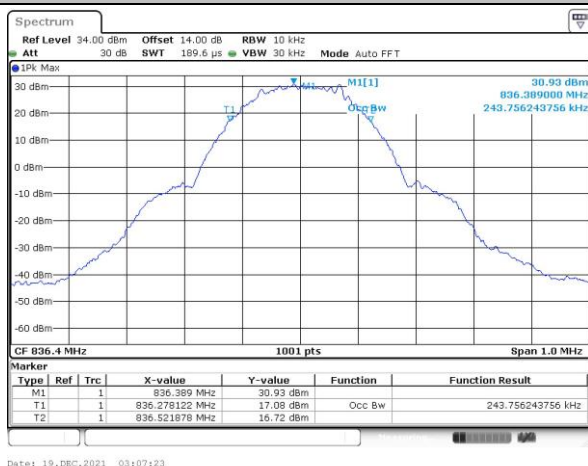


## Middle Channel

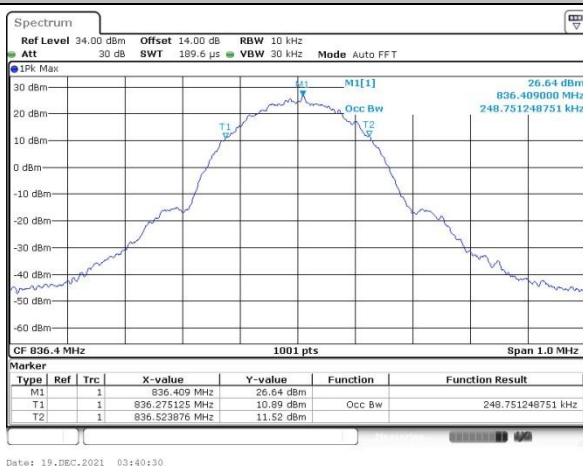

## Highest Channel




## Highest Channel

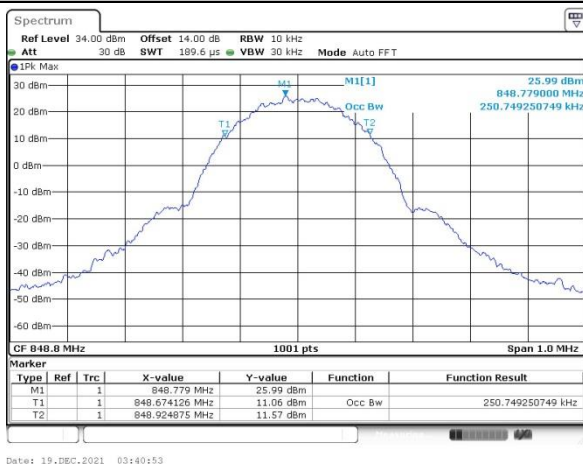



## GSM1900 (GSM)

## Lowest Channel

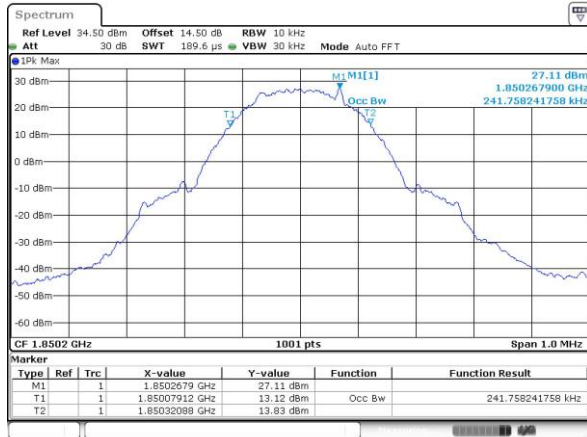

## GSM1900 (EDGE class 8)


## Lowest Channel



## Middle Channel




## Middle Channel




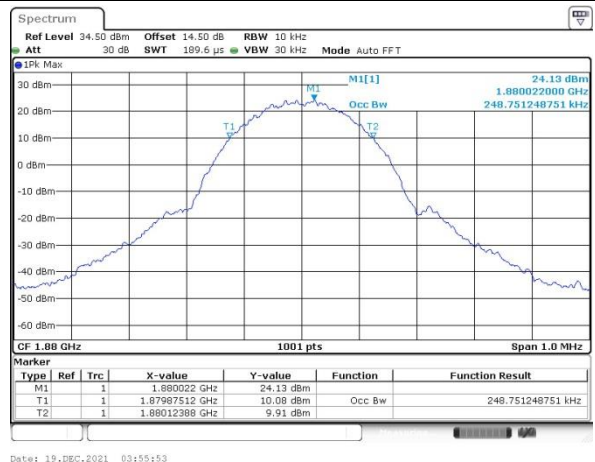


## Highest Channel



## Highest Channel

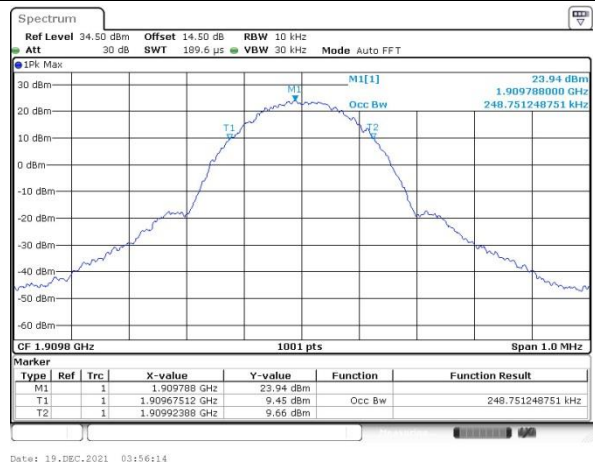

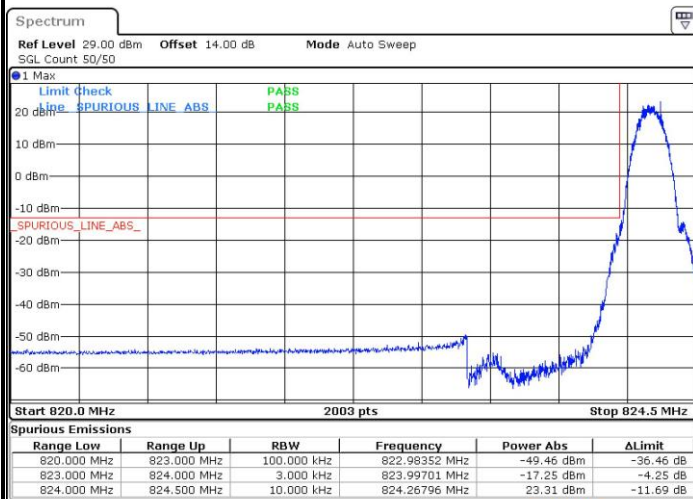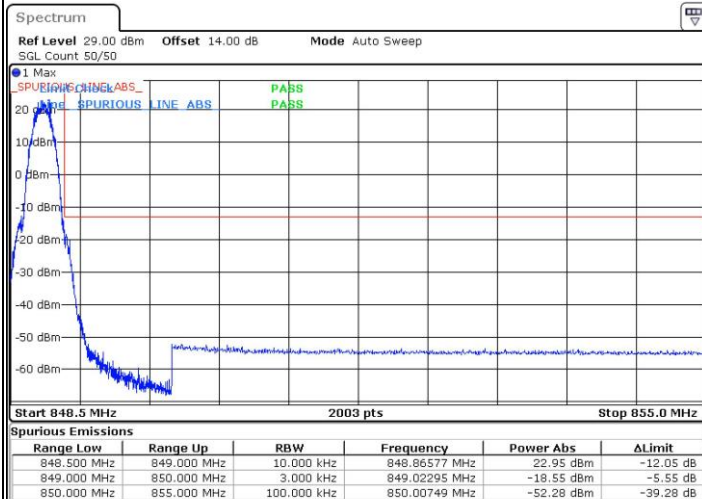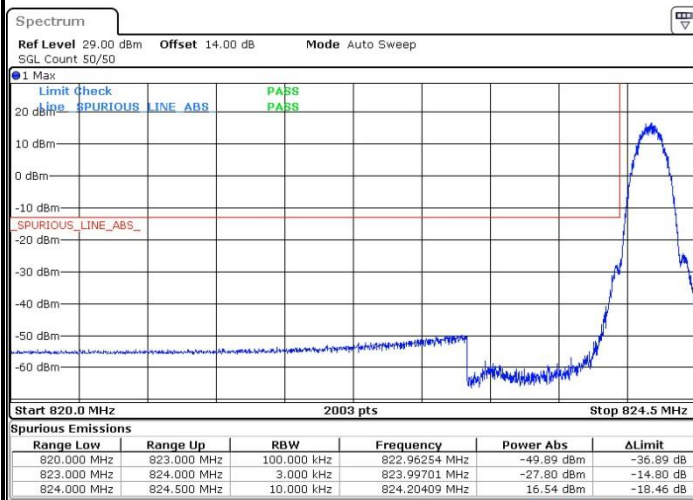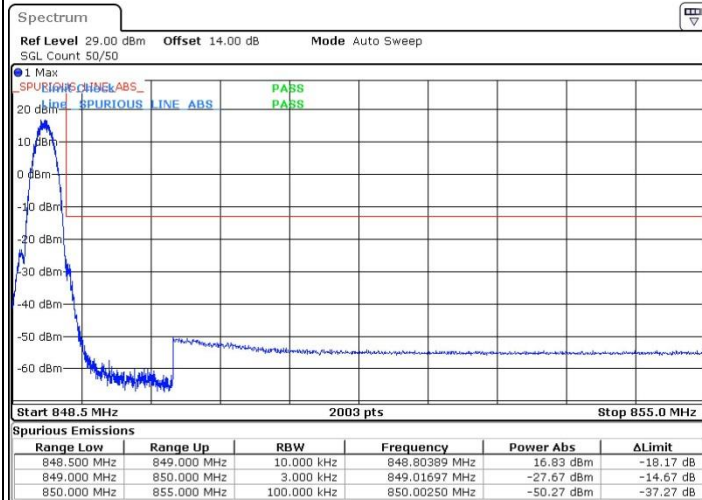
**Conducted Band Edge****GSM850 (GSM)****Lowest Band Edge****Highest Band Edge****GSM850 (EDGE class 8)****Lowest Band Edge****Highest Band Edge**






## GSM1900 (GSM)

## Lowest Band Edge

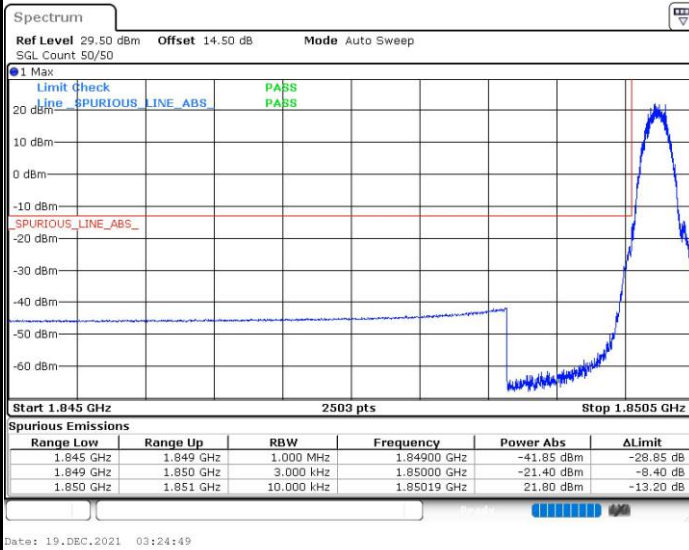


## Highest Band Edge

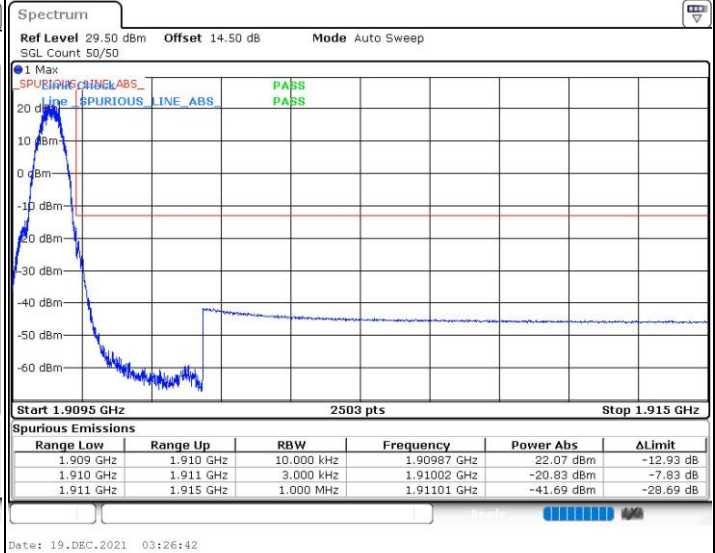


## GSM1900 (EDGE class 8)

## Lowest Band Edge

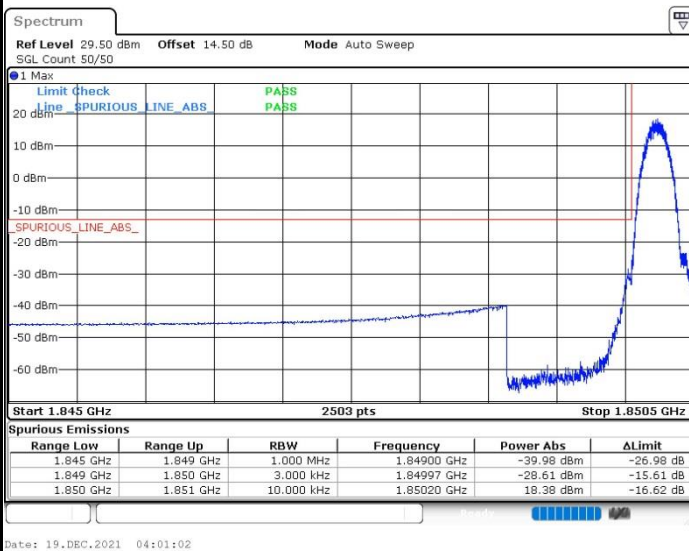

## Highest Band Edge

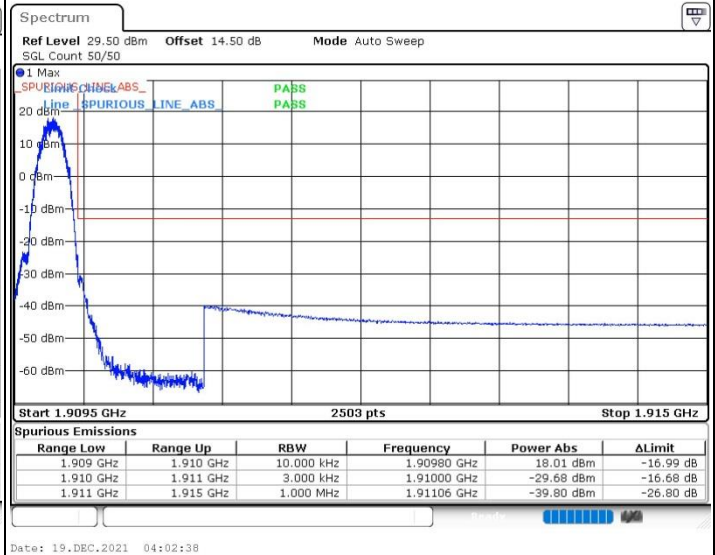




# Conducted Spurious Emission


## GSM850 (GSM)

### Lowest Channel

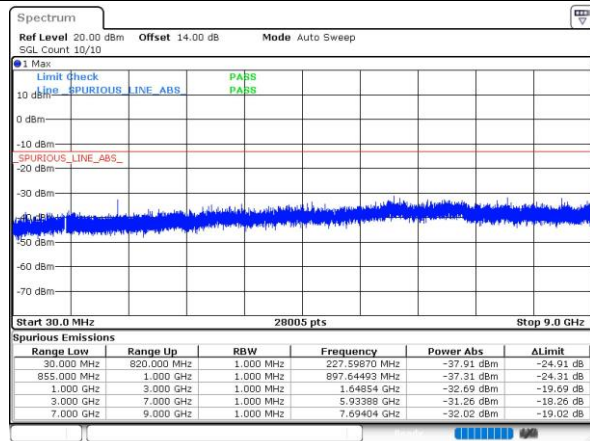


## GSM850 (EDGE class 8)


### Lowest Channel

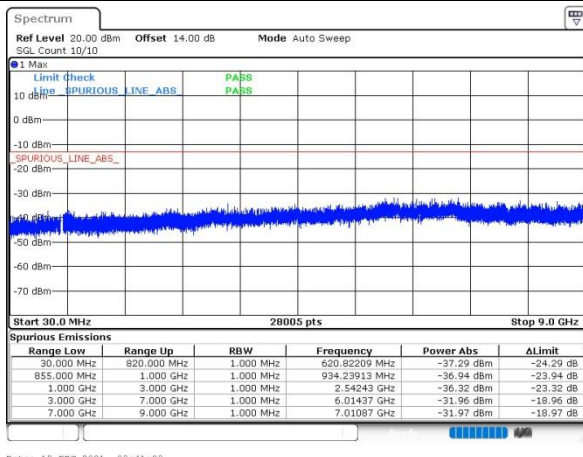


## Middle Channel

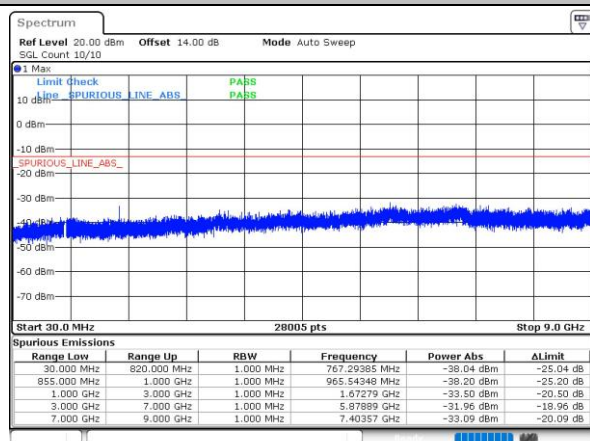


## Middle Channel

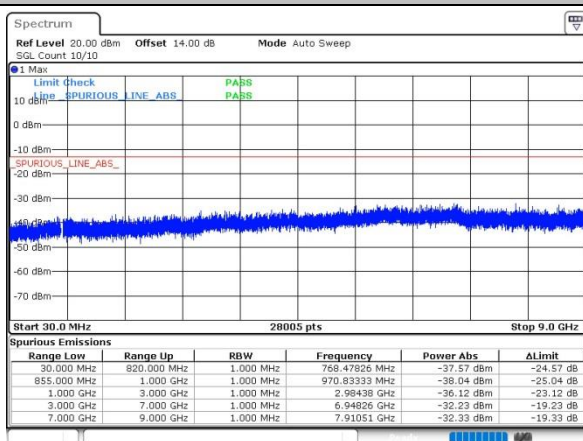

## Highest Channel

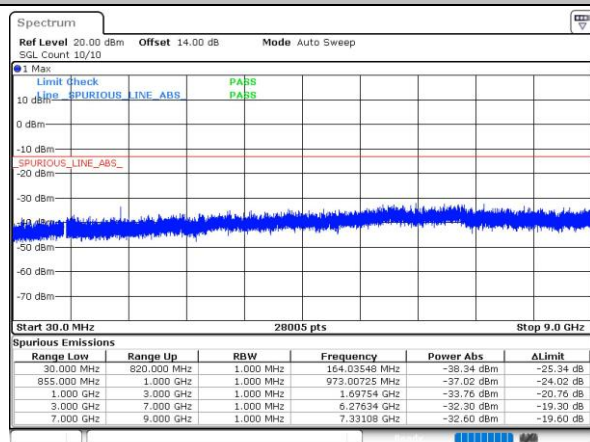


## Highest Channel

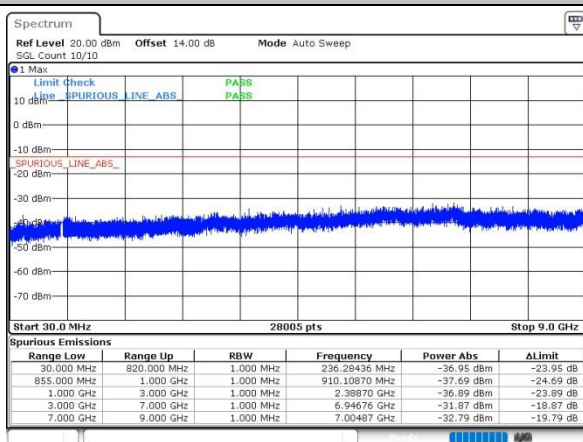



## GSM1900 (GSM)


## Lowest Channel

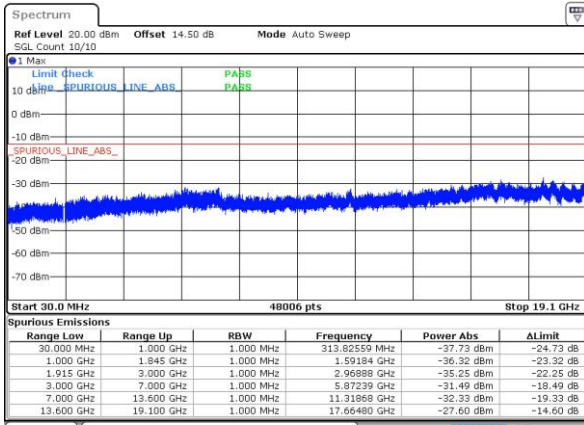

Date: 19\_DEC.2021 03:20:28


## GSM1900 (EDGE class 8)

## Lowest Channel

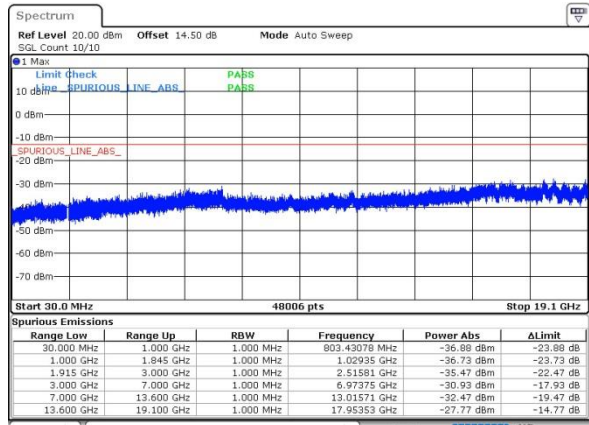


Date: 19\_DEC.2021 03:15:29

## Middle Channel

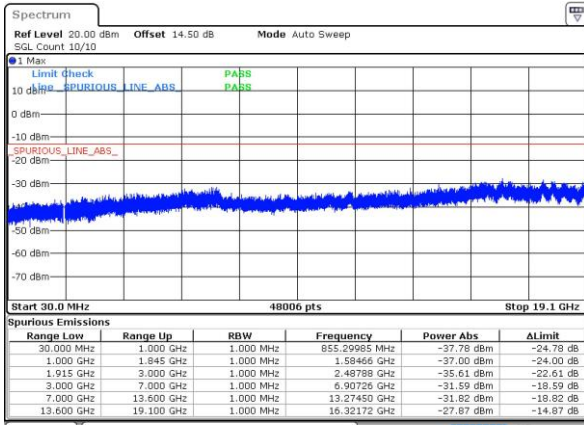


Date: 19\_DEC.2021 03:20:39

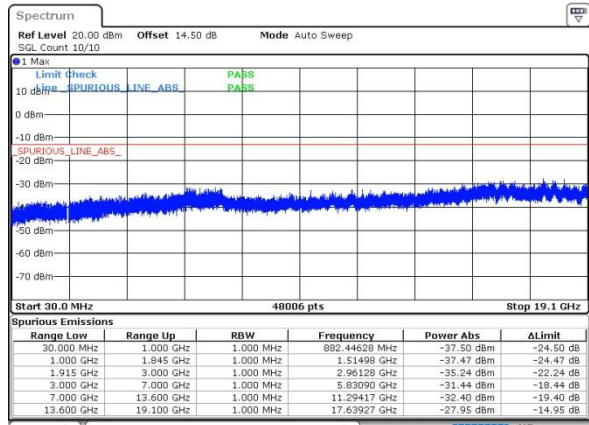


Date: 19\_DEC.2021 03:15:40

## Highest Channel

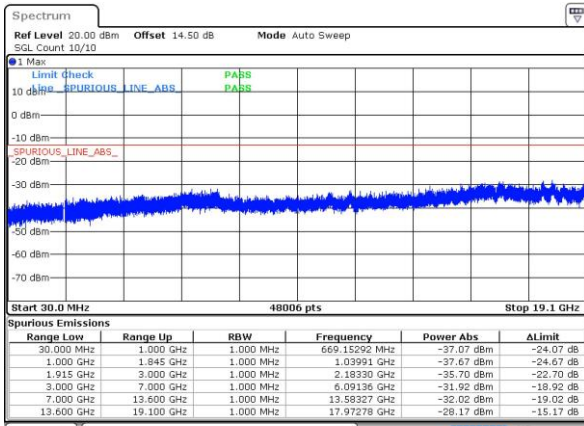

Date: 19\_DEC.2021 03:20:50

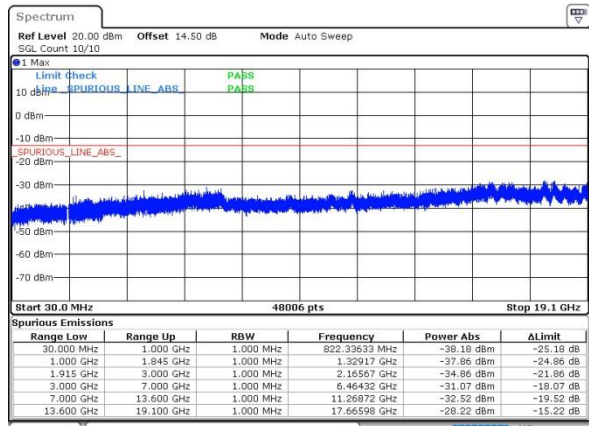

Date: 19\_DEC.2021 03:15:51

**Frequency Stability**

| Test Conditions  | Middle Channel    | GSM850<br>(GSM) | GSM850<br>(EDGE class 8) | Limit<br>2.5ppm |
|------------------|-------------------|-----------------|--------------------------|-----------------|
| Temperature (°C) | Voltage (Volt)    | Deviation (ppm) |                          | Result          |
| 50               | Normal Voltage    | 0.0016          | 0.0006                   | PASS            |
| 40               | Normal Voltage    | 0.0000          | 0.0010                   |                 |
| 30               | Normal Voltage    | 0.0006          | 0.0023                   |                 |
| 20(Ref.)         | Normal Voltage    | 0.0000          | 0.0000                   |                 |
| 10               | Normal Voltage    | 0.0002          | 0.0008                   |                 |
| 0                | Normal Voltage    | 0.0001          | 0.0007                   |                 |
| -10              | Normal Voltage    | 0.0006          | 0.0011                   |                 |
| -20              | Normal Voltage    | 0.0012          | 0.0005                   |                 |
| -30              | Normal Voltage    | 0.0008          | 0.0010                   |                 |
| 20               | Maximum Voltage   | 0.0002          | 0.0006                   |                 |
| 20               | Normal Voltage    | 0.0000          | 0.0000                   |                 |
| 20               | Battery End Point | 0.0004          | 0.0004                   |                 |

| Test Conditions  | Middle Channel    | GSM1900<br>(GSM) | GSM1900<br>(EDGE class 8) | Limit<br>Note 2. |
|------------------|-------------------|------------------|---------------------------|------------------|
| Temperature (°C) | Voltage (Volt)    | Deviation (ppm)  |                           | Result           |
| 50               | Normal Voltage    | 0.0015           | 0.0003                    | PASS             |
| 40               | Normal Voltage    | 0.0027           | 0.0003                    |                  |
| 30               | Normal Voltage    | 0.0022           | 0.0011                    |                  |
| 20(Ref.)         | Normal Voltage    | 0.0000           | 0.0000                    |                  |
| 10               | Normal Voltage    | 0.0007           | 0.0012                    |                  |
| 0                | Normal Voltage    | 0.0011           | 0.0012                    |                  |
| -10              | Normal Voltage    | 0.0018           | 0.0001                    |                  |
| -20              | Normal Voltage    | 0.0026           | 0.0002                    |                  |
| -30              | Normal Voltage    | 0.0021           | 0.0002                    |                  |
| 20               | Maximum Voltage   | 0.0015           | 0.0006                    |                  |
| 20               | Normal Voltage    | 0.0000           | 0.0000                    |                  |
| 20               | Battery End Point | 0.0031           | 0.0007                    |                  |

**Note:**

1. Normal Voltage = 3.87V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.45 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## WCDMA

### Peak-to-Average Ratio


| Mode       | WCDMA Band V(dB) | WCDMA Band II(dB) | WCDMA Band IV(dB) | Limit: 13dB |
|------------|------------------|-------------------|-------------------|-------------|
| Mod.       | RMC 12.2Kbps     | RMC 12.2Kbps      | RMC 12.2Kbps      | Result      |
| Lowest CH  | 2.90             | 3.01              | 3.10              | PASS        |
| Middle CH  | 2.93             | 2.99              | 3.01              |             |
| Highest CH | 2.96             | 2.93              | 3.04              |             |






## WCDMA Band V (RMC 12.2Kbps)

## Lowest Channel

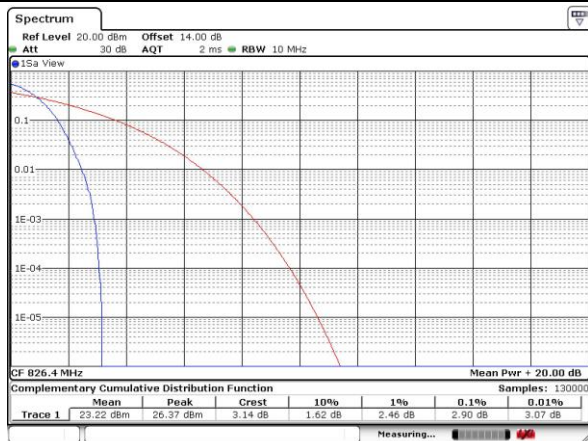


## WCDMA Band II (RMC 12.2Kbps)


## Lowest Channel

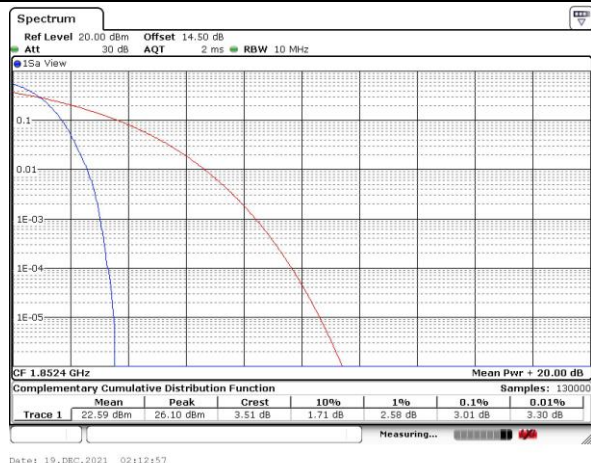


## Middle Channel

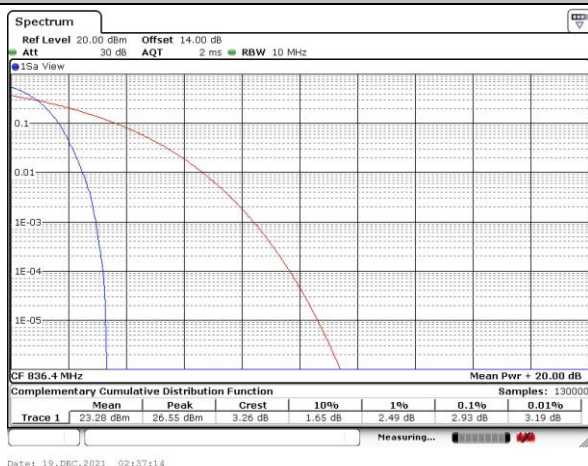

## Middle Channel

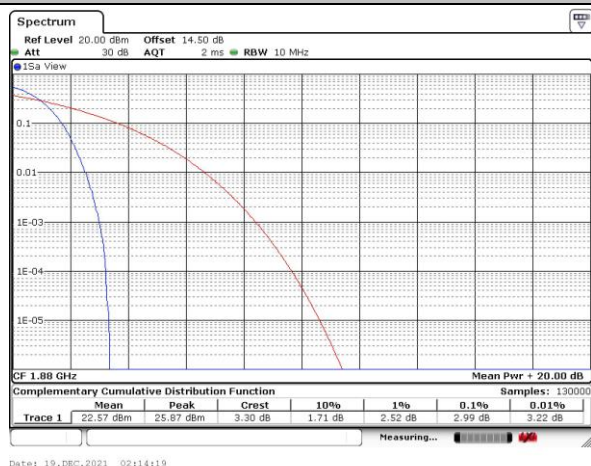

## Highest Channel

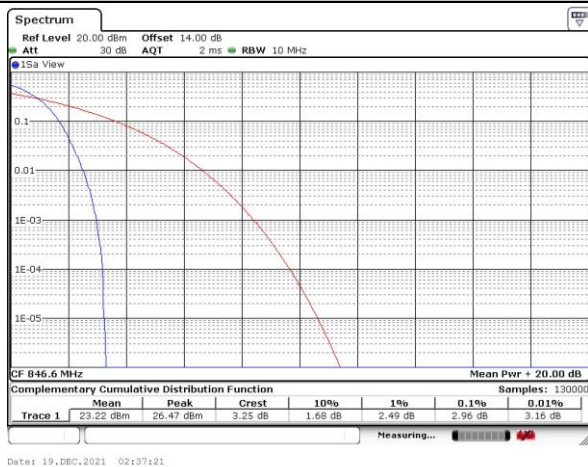


## Highest Channel





WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

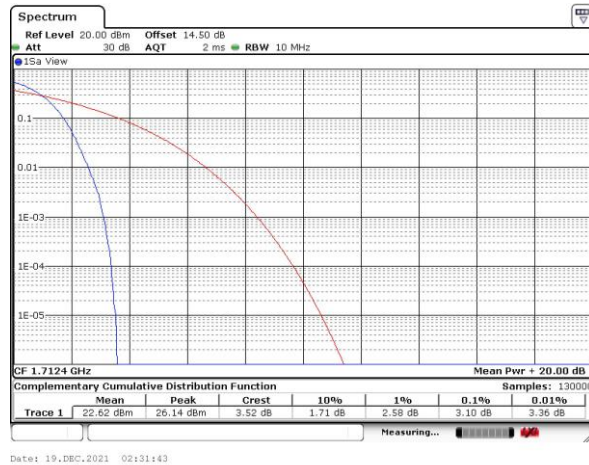

Middle Channel



Highest Channel





## 26dB Bandwidth


| Mode       | WCDMA Band V(MHz) | WCDMA Band II(MHz) | WCDMA Band IV(MHz) |
|------------|-------------------|--------------------|--------------------|
| Mod.       | RMC 12.2Kbps      | RMC 12.2Kbps       | RMC 12.2Kbps       |
| Lowest CH  | 4.72              | 4.72               | 4.72               |
| Middle CH  | 4.80              | 4.71               | 4.71               |
| Highest CH | 4.71              | 4.71               | 4.72               |






## WCDMA Band V (RMC 12.2Kbps)

## Lowest Channel

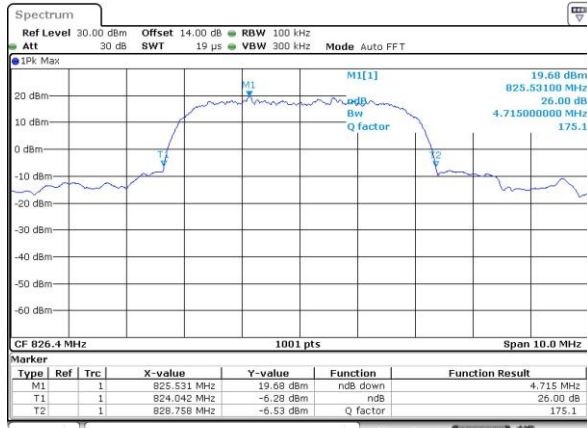


## WCDMA Band II (RMC 12.2Kbps)


## Lowest Channel

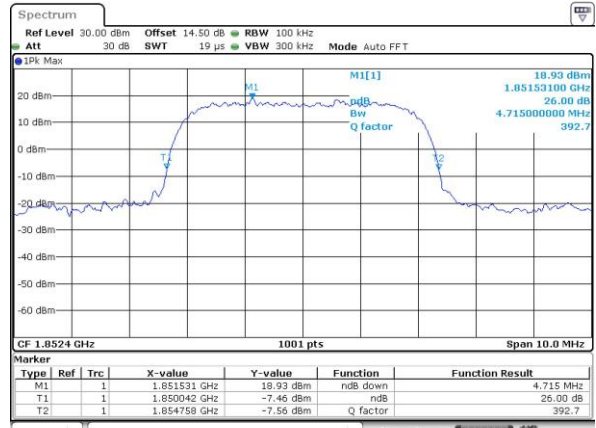


## Middle Channel

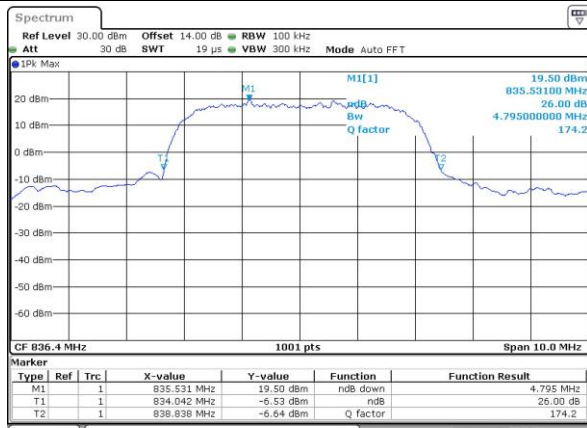


## Middle Channel

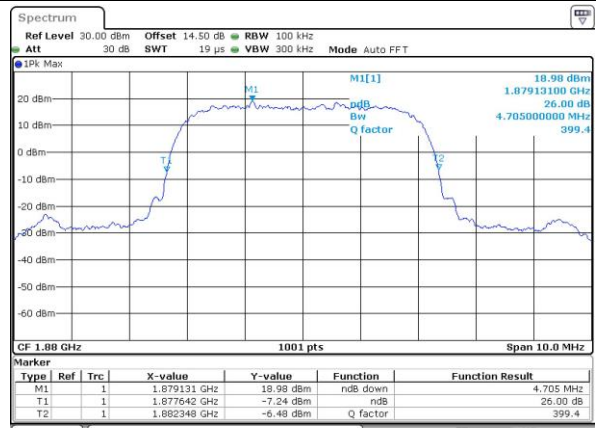

## Highest Channel

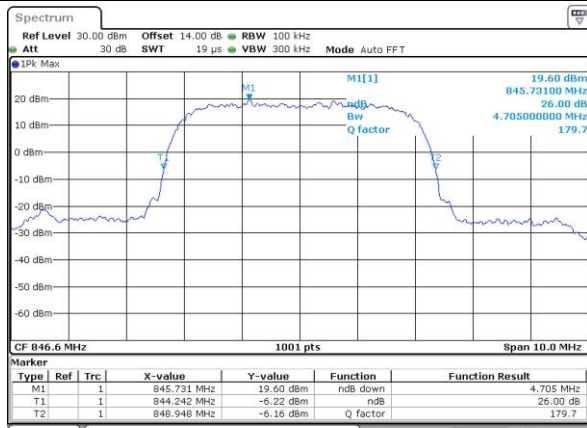


## Highest Channel

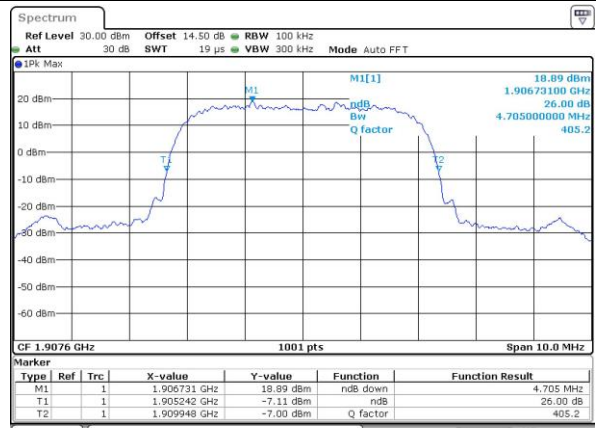




## WCDMA Band IV (RMC 12.2Kbps)


## Lowest Channel

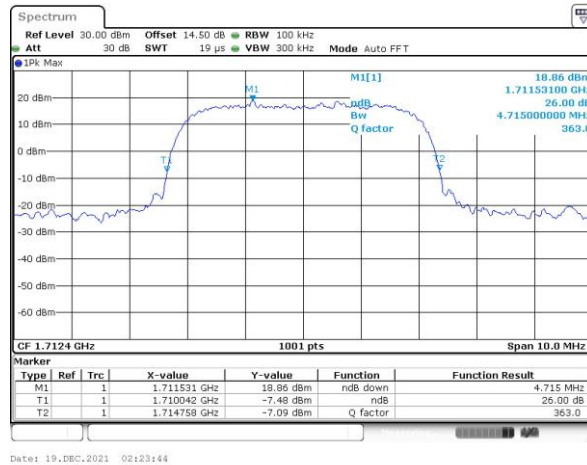

## Middle Channel

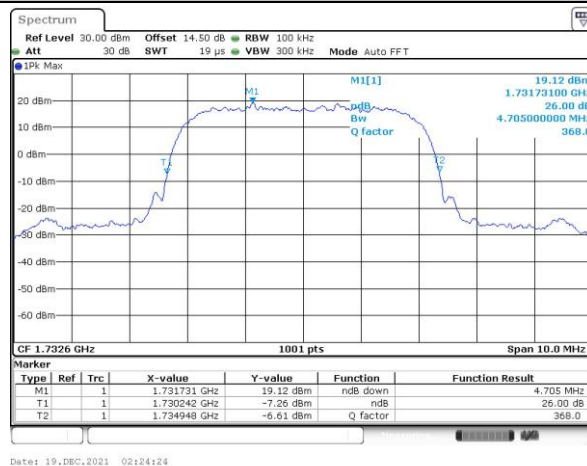

## Highest Channel

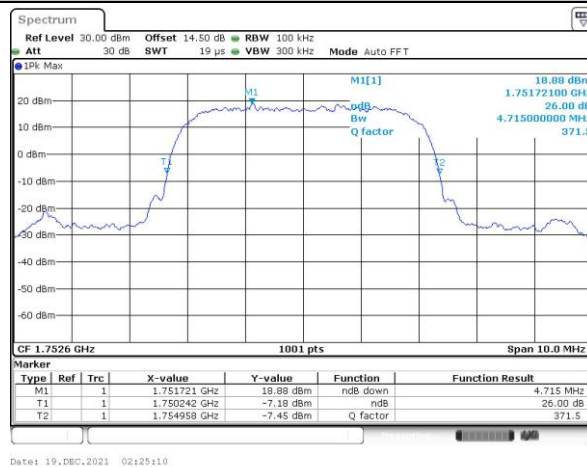



## Occupied Bandwidth

| Mode       | WCDMA Band V(MHz) | WCDMA Band II(MHz) | WCDMA Band IV(MHz) |
|------------|-------------------|--------------------|--------------------|
| Mod.       | RMC 12.2Kbps      | RMC 12.2Kbps       | RMC 12.2Kbps       |
| Lowest CH  | 4.19              | 4.16               | 4.16               |
| Middle CH  | 4.19              | 4.17               | 4.17               |
| Highest CH | 4.16              | 4.17               | 4.16               |