

# **FCC Test Report**

## Report No.: AGC04138210304FE03

FCC ID	: 2AAXO-ISM2040
APPLICATION PURPOSE	: Original Equipment
PRODUCT DESIGNATION	: MIC STAND KARAOKE SYSTEM
BRAND NAME	: Singing Machine
MODEL NAME	<ul> <li>iSM2040, iSM2030, iSM2045, iSM2030XX, iSM2040XX,</li> <li>iSM2045XX (XX means unit color, it can be A to Z or N/A)</li> </ul>
APPLICANT	: The Singing Machine Company Inc.
DATE OF ISSUE	: May 11, 2021
STANDARD(S)	: FCC Part 15.247
REPORT VERSION	: V1.0



mplian



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated Pestua/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d we after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



## **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	. /	May 11, 2021	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festiva/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approximation of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com

Web: http://cn.agc-cert.com/



## TABLE OF CONTENTS

	1. VERIFICATION OF CONFORMITY	5
	2. GENERAL INFORMATION	6
	2.1. PRODUCT DESCRIPTION	
	2.2. TABLE OF CARRIER FREQUENCYS	6
	2.3. RECEIVER INPUT BANDWIDTH	
	2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
	2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
	2.6. RELATED SUBMITTAL(S) / GRANT (S)	
	2.7. TEST METHODOLOGY	
	2.8. SPECIAL ACCESSORIES	
	2.9. EQUIPMENT MODIFICATIONS	
	2.10. ANTENNA REQUIREMENT	
	3. MEASUREMENT UNCERTAINTY	9
	4. DESCRIPTION OF TEST MODES	
	5. SYSTEM TEST CONFIGURATION	11
	5.1. CONFIGURATION OF EUT SYSTEM	
	5.2. EQUIPMENT USED IN TESTED SYSTEM	11
	5.3. SUMMARY OF TEST RESULTS	11
	6. TEST FACILITY	
	7. PEAK OUTPUT POWER	
	7.1. MEASUREMENT PROCEDURE	
	7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	7.3. LIMITS AND MEASUREMENT RESULT	
	8. 20DB BANDWIDTH	
	8.1. MEASUREMENT PROCEDURE	
	8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	8.3. LIMITS AND MEASUREMENT RESULTS	21
	9. CONDUCTED SPURIOUS EMISSION	
St pr	9.1. MEASUREMENT PROCEDURE my report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the obdicated restructure tamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGE resented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of urther enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.	The test results



9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	27
10. RADIATED EMISSION	40
10.1. MEASUREMENT PROCEDURE	40
10.2. TEST SETUP	
10.3. LIMITS AND MEASUREMENT RESULT	
10.4. TEST RESULT	
11. NUMBER OF HOPPING FREQUENCY	
11.1. MEASUREMENT PROCEDURE	53
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	53
11.3. MEASUREMENT EQUIPMENT USED	53
11.4. LIMITS AND MEASUREMENT RESULT	53
12. TIME OF OCCUPANCY (DWELL TIME)	54
12.1. MEASUREMENT PROCEDURE	
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
12.3. MEASUREMENT EQUIPMENT USED	
12.4. LIMITS AND MEASUREMENT RESULT	
13. FREQUENCY SEPARATION	
13.1. MEASUREMENT PROCEDURE	
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	58
13.3. MEASUREMENT EQUIPMENT USED	
13.4. LIMITS AND MEASUREMENT RESULT	
14. FCC LINE CONDUCTED EMISSION TEST	59
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	59
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	60
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	61
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	63
APPENDIX B: PHOTOGRAPHS OF EUT	65

## **1. VERIFICATION OF CONFORMITY**

The Singing Machine Company Inc.
6301 NW 5th Way, Suite 2900 Fort Lauderdale, FL, 33309, U.S.A.
The Singing Machine Company Inc.
6301 NW 5th Way, Suite 2900 Fort Lauderdale, FL, 33309, U.S.A.
ZHUHAI FULLWING ELECTRONIC CO., LTD ZHONGSHAN BRANCH
4/F & 5/F, No 10, Xingye Road, Xinxu, San Xiang, Zhongshan, Guangdong, China
MIC STAND KARAOKE SYSTEM
Singing Machine
iSM2040
iSM2030, iSM2045, iSM2030XX, iSM2040XX, iSM2045XX (XX means unit color, it can be A to Z or N/A)
All the same except for the model name and color.
Mar. 23, 2021 to May 11, 2021
No any deviation from the test method
Normal
Pass
AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Prepared By

Eddy · Liu

Eddy Liu (Project Engineer)

May 11, 2021

**Reviewed By** 

Max Zhang

Max Zhang (Reviewer)

May 11, 2021

Approved By


Forrest Un

Forrest Lei (Authorized Officer)

May 11, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





## 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as "MIC STAND KARAOKE SYSTEM". It is designed by way of utilizing the GFSK,  $\pi$  /4-DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

2.402 GHz to 2.480 GHz
-2.419dBm (Max)
V5.0
BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps
79
V1.0
V1.0
PCB Antenna (Comply with requirements of the FCC part 15.203)
-0.5dBi
DC 7.4V by battery or DC 9V by adapter
BLE.

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
0	61	2403 MHz
30 .0		
	38	2440 MHz
2402~2480MHz	39	2441 MHz
	40	2442 MHz
	G : O F	
	77	2479 MHz
	78	2480 MHz



## 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode: 40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55, 36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63, 42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14, 51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49, 20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37, 65, 32, 70, 52, 27, 59, 22, 62, 39

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.



The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

## 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AAXO-ISM2040** filing to comply with the FCC PART 15.247 requirements.

## 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

## 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

## 2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



## **3. MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted,  $Uc = \pm 0.8$ dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %
- Uncertainty of Dwell Time:  $Uc = \pm 2\%$
- Uncertainty of Frequency:  $Uc = \pm 2 \%$

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand resting in section of a stamp. Is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day affective for the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



## **4. DESCRIPTION OF TEST MODES**

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π/4-DQPSK
5	Middle channel π/4-DQPSK
6	High channel π/4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode π/4-DQPSK
12	Hopping mode 8DPSK

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

#### Software Setting

Connect Select          Conse       Connect Select         NonConnect_BT       Connect         Generate and Send CMD       Node Select in NonConnect         1. Hopping Type       Node Select in NonConnect         Single Frequency       0         2. Frequency       Nofr         3. Package Type       OdBm         DH5       OdBm         State       Frequency (BLE Tester)         START	X
Generate and Send CMD 1. Hopping Type Single Frequency × 2. Frequency 2480 NHir 3. Package Type DH5 × Connect_BLE_Tester BLE Mode Prequency (BLE Tester)	
1. Hopping Type       Mode Select in NonConnect         Single Frequency       •         2. Frequency       •         2480       •         Mbr       •         3. Package Type       •         DH5       •         Connect_BLE_Tester         BLE Mode       Frequency (BLE Tester)	
Single Frequency       2. Frequency       2480       MHz       3. Package Type       DH5       Connect_BLE_Tester       BLE_Mode       Frequency (BLE Tester)	
2. Frequency 2480 V Mir: 3. Package Type DH5 V Connect_BLE_Tester BLE Mode Frequency (BLE Tester) START	
3. Package Type     OdBm       DH5     OdBm       Connect_BLE_Tester     Frequency (BLE Tester)	
DH5 V Connect_BLE_Tester BLE Mode Frequency (BLE Tester)	
Connect_BLE_Tester  BLE_Mode  Frequency (BLE_Tester)  CTADT	
ELE Mode Frequency (BLE Tester)	
START	
BLE-TX     BLE-EX     Received Packet Number:	
Send Data:Successful! FCC Ver:1.2.1	
COM3 Opened Received: 87 Sent: 22 2021-03-26 11:24	11

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stead of the test results of the test results are apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day affective is not permitted without the written authorization of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



## **5. SYSTEM TEST CONFIGURATION**

**5.1. CONFIGURATION OF EUT SYSTEM** 

Radiated Emission Configure:





Conducted Emission Configure:

EUT	AE	

## 5.2. EQUIPMENT USED IN TESTED SYSTEM

ltem	Equipment	Model No.	ID or Specification	Remark
1	MIC STAND KARAOKE SYSTEM	iSM2040	2AAXO-ISM2040	EUT
2	Control Box	USB-TTL	N/A	AE
3	Charger line	N/A	N/A	Accessory

**5.3. SUMMARY OF TEST RESULTS** 

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Compliant

Note: The EUT is powered by battery.



## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd					
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China					
Designation Number	CN1259					
FCC Test Firm Registration Number	975832					
A2LA Cert. No.	5054.02					
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA					

#### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2021
LISN	R&S	ESH2-Z5	100086	Jul. 03, 2020	Jul. 02, 2021
Test software	Test software R&S		N/A	N/A	N/A

## TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021	
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec.06, 2021	
2.4GHz Filter EM Electronic		2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022	
Attenuator ZHINAN		E-002	N/A	Sep. 03, 2020	Sep. 02, 2022	
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021	
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022	
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021	
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022	
ANTENNA SCHWARZBECK		VULB9168	494	Jan. 08,2021	Jan. 07,2023	
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A	



## 7. PEAK OUTPUT POWER

## 7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$ RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.


Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

## 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

## PEAK POWER TEST SETUP



## Spectrum Analyzer



**RF** Cable

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in the stand of the stand in the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT							
FOR GFSK MOUDULATIONFrequency (GHz)Peak Power (dBm)Applicable Limits (dBm)Pass or Fail							
2.402	-2.419	30	Pass				
2.441	-2.986	30	Pass				
2.480	-4.289	30	Pass				

#### CH0



#### Report No.: AGC04138210304FE03 Page 15 of 79





CH78



PEAK OUTPUT POWER MEASUREMENT RESULT FOR Π/4-DQPSK MODULATION							
Frequency (GHz)Peak Power (dBm)Applicable Limits (dBm)Pass or I							
2.402	-2.425	21	Pass				
2.441	-3.043	21	Pass				
2.480	-4.332	21	Pass				

CH0



#### Report No.: AGC04138210304FE03 Page 17 of 79





CH78



PEAK OUTPUT POWER MEASUREMENT RESULT								
FOR 8-DPSK MODULATION								
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail					
2.402	-2.454	21	Pass					
2.441	-3.053	21	Pass					
2.480	-4.335	21	Pass					





#### Report No.: AGC04138210304FE03 Page 19 of 79





CH78






## 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

## 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

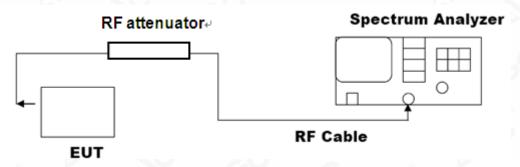


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand of the report is not permitted without the written authorization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day and a test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 8.3. LIMITS AND MEASUREMENT RESULTS

MEASUREMENT RESULT FOR GFSK MOUDULATION						
Applicable Limite		Measurement Result				
Applicable Limits	Test Data	Criteria				
	Low Channel	0.908	PASS			
N/A	Middle Channel	0.907	PASS			
	High Channel	0.868	PASS			

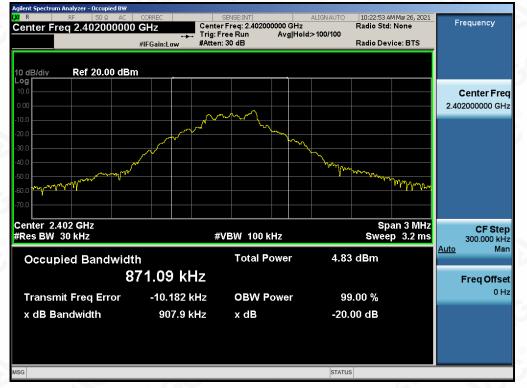

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the test results of the report is not permitted without the written authorization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





MEASUREMENT RESULT FOR II /4-DQPSK MODULATION						
Measurement Result						
Applicable Limits	Test Data	Test Data (MHz)				
N/A	Low Channel	1.293	PASS			
	Middle Channel	1.299	PASS			
	High Channel	1.296	PASS			

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL


#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





MEASUREMENT RESULT FOR 8-DPSK MODULATION							
Applicable Limite Measurement Result							
Applicable Limits	Test Da	Test Data (MHz)					
	Low Channel	1.281	PASS				
N/A	Middle Channel	1.279	PASS				
	High Channel	1.280	PASS				


#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

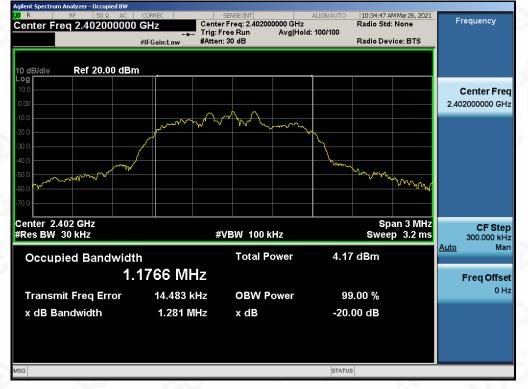



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

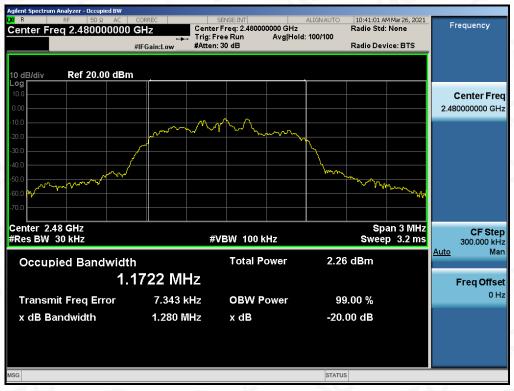



## 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
   RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


#### 9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT								
	Measurement Resu	ult						
Applicable Limits	Test Data	Criteria						
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS						
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS						





## TEST RESULT FOR ENTIRE FREQUENCY RANGE TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

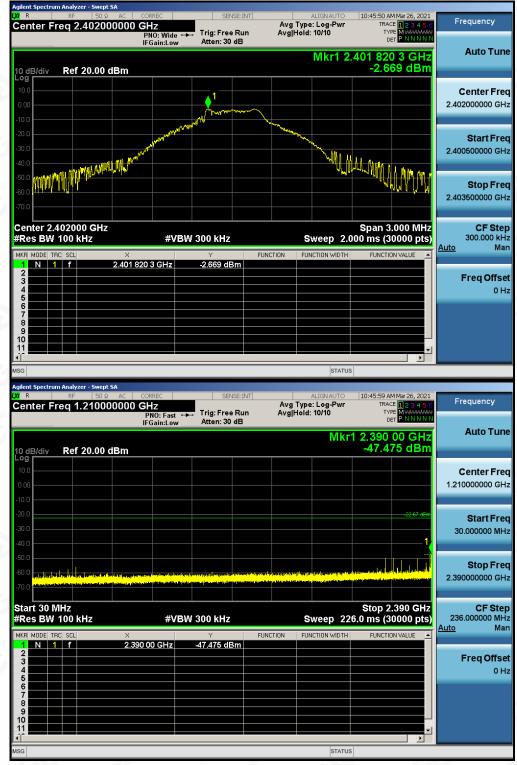





	ım Analyzer - Swep	ot SA								
LXI R	RF 50 9		RREC	SENSE			ALIGN AUTO		M Mar 26, 2021	Frequency
Center F	req 13.741	/50000 0	SHZ 'N0: Fast ↔	, Trig: Free F		Avg iype Avg Hold:	: Log-Pwr 10/10	TY	<sup>2E</sup> 123456 MWWWWWW	
			'NU: Fast 🕶 Gain:Low	Atten: 30 d		in ghiona.		DI		
							Mkr	1 22 65	7 2 GHz	Auto Tune
							IVINI	_49.25	11 dBm	
10 dB/div Log	Ref 20.00	dBm						-49.2	TT UBIII	
10.0										Center Freq
										•
0.00										13.741750000 GHz
-10.0										
-20.0									-22.67 dBm	Otort From
-30.0										Start Freq
										2.483500000 GHz
-40.0										
-50.0						N	W	the second s	and the second second	Otan Farm
-60.0	and a state of the	ومشاوسا الأفروقا وا	A dealers	n. din ini antar	in a state of the st			The second second	and the second secon	Stop Freq
-70.0	hard a start of the		Contraction of the second							25.00000000 GHz
-70.0										
Start 2.48								Stop 2	5.00 GHz	CF Step
#Res BW			#VBW	/ 300 kHz			Sween 3		0000 pts)	2.251650000 GHz
										<u>Auto</u> Man
MKR MODE T	RC SCL	× 23.657	0.011-	۲ -49.211 dBn	FUNCTIO	ON FUN	ICTION WIDTH	FUNCTIO	IN VALUE	
2 N		23.057	ZGHZ	-49.211 aBn	1					
3										Freq Offset
4										0 Hz
6										
7										
8										
10										
11									•	
MSG							STATUS	3		


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festive/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter explorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



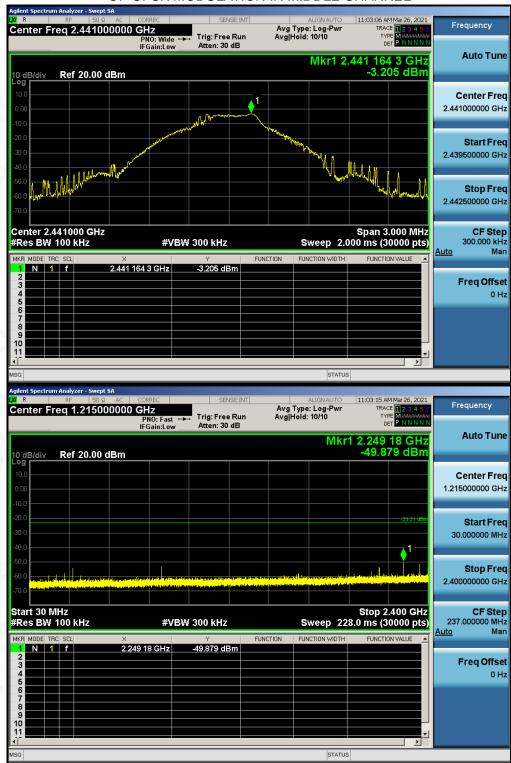

## TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL





Agilent Spectrum Analyzer - Swept SA					
RF 50 Ω AC     Center Freq 13.74175000			ALIGNAUTO Type: Log-Pwr	11:03:40 AM Mar 26, 2021 TRACE 2 3 4 5 6	Frequency
10 dB/div Ref 20.00 dBm		:FreeRun Avg n:30 dB	Hold: 10/10 Mkr	TYPE MUNICUP DET P N N N N N 1 24.825 9 GHz -48.990 dBm	Auto Tune
Log 10.0 0.00 -10.0					<b>Center Freq</b> 13.741750000 GHz
-20.0				-23.21 dBm	<b>Start Freq</b> 2.483500000 GHz
-50.0 -60.0 <mark>Handraka and Albertan Andreasana</mark> -70.0					<b>Stop Freq</b> 25.000000000 GHz
Start 2.48 GHz           #Res BW 100 kHz           MKR MODE TRC SCL           1         N           1         N	#VBW 300   825 9 GHz -48.99	KHZ FUNCTION	Sweep 2	Stop 25.00 GHz 2.152 s (30000 pts) FUNCTION VALUE	<b>CF Step</b> 2.251650000 GHz <u>Auto</u> Man
2 3 4 5					<b>Freq Offset</b> 0 Hz
6 7 8 9 10					
MSG			STATUS		


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festive/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter explorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



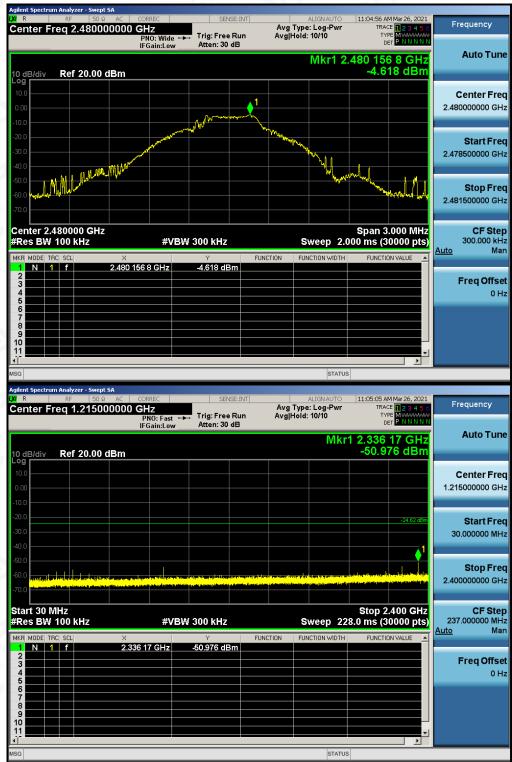

## TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL





	ectrum	Analy	zer - Swepl	t SA										
l <b>XI</b> R		RF	50 Ω		CORREC		SEN	VSE:INT		ALIGN AUTO		M Mar 26, 2021	Frequency	
Center Freq 13.750000000 GHz							Trig: Free Run		Avg Type: Log-Pwr Avg Hold: 10/10		TY	CE 123456	ricquency	
					PNO: Fast IFGain:Low		Atten: 30		Cr.all IV		D	PE MUMANANA ET PNNNNN		
1	Mkr1 24.144 2 GHz											Auto Tune		
10 dB/c	10 dB/div Ref 20.00 dBm -48.874 dBm													
10.0													Contor From	
													Center Freq	
0.00													13.750000000 GHz	
-10.0														
-20.0														
												-24.62 dBm	Start Freq	
-30.0													2.50000000 GHz	
-40.0												1-		
-50.0 —									L		Concernent Plans sector			
-60.0	4			ور والمرام و	والمرجانين والعام			June III Kell			Contraction of the second		Stop Freq	
- Ar-			يى <u>مەمەللەر بىلەر</u>				and a state of the second s						25.00000000 GHz	
-70.0														
											<b>0</b> 4 0		05.01.0	
Start :					-40.0	-				•	Stop 2	5.00 GHz	CF Step 2.25000000 GHz	
#Res	BW	UU	KHZ		#V	300 3	300 kHz			sweep	2.192 S (J	0000 pts)	Auto Man	
MKR MO				×			Y		CTION	FUNCTION WIDTH	FUNCTI	ON VALUE	<u>Auto</u> man	
	1	f		24.1	44 2 GHz	_	48.874 dE	3m						
2								_					Freq Offset	
4													0 Hz	
5								_						
6								_						
8														
9 10														
11														
MSG	_	_				_				STATU	s			

Note: The GFSK modulation is the worst case and only those data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com




#### TEST RESULT FOR BAND EDGE

#### GFSK MODULATION IN LOW CHANNEL

Hopping off

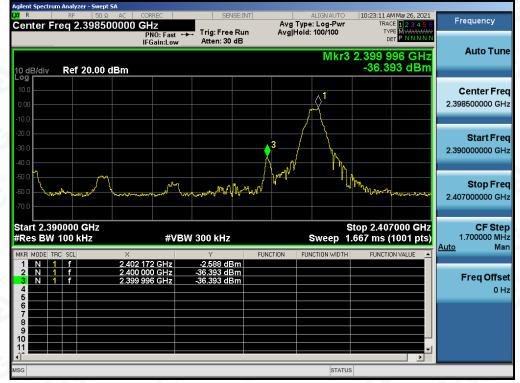


Hopping on

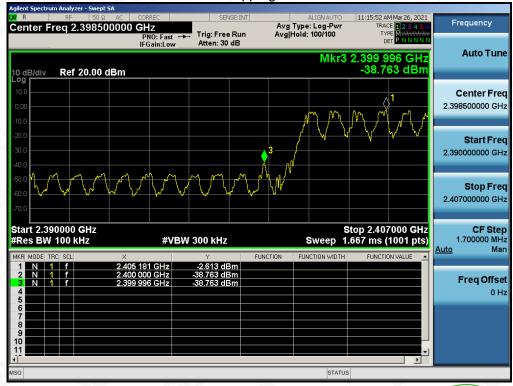


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the second argument of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day argument is test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



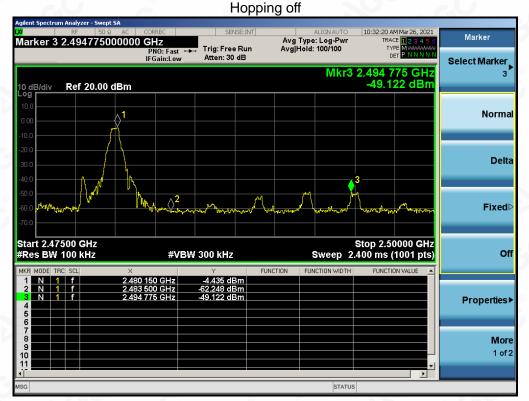


## GFSK MODULATION IN HIGH CHANNEL

Hopping on

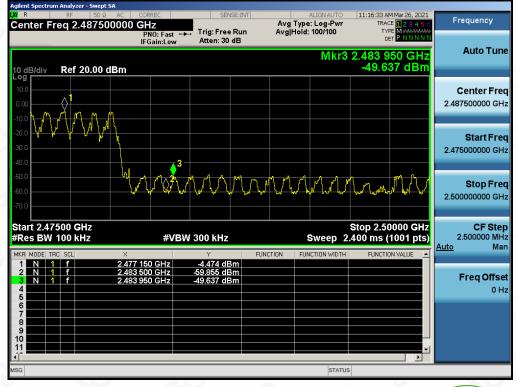




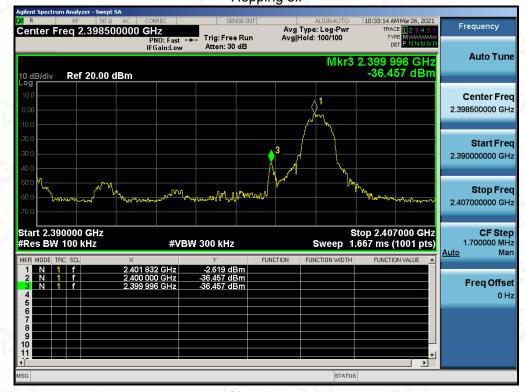


## $\pi$ /4-DQPSK MODULATION IN LOW CHANNEL Hopping off

Hopping on

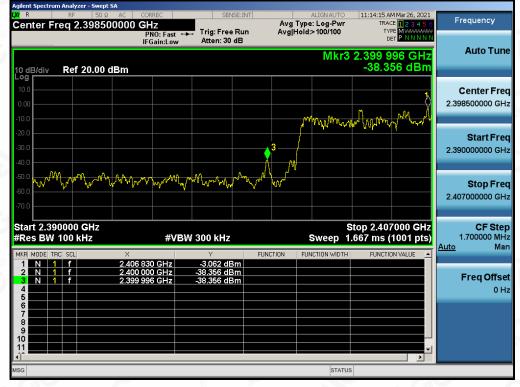




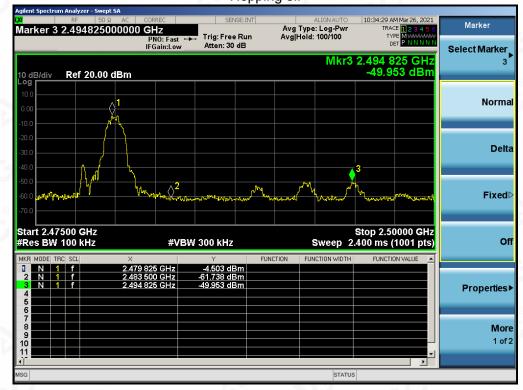


# $\pi$ /4-DQPSK MODULATION IN HIGH CHANNEL Hopping off

Hopping on

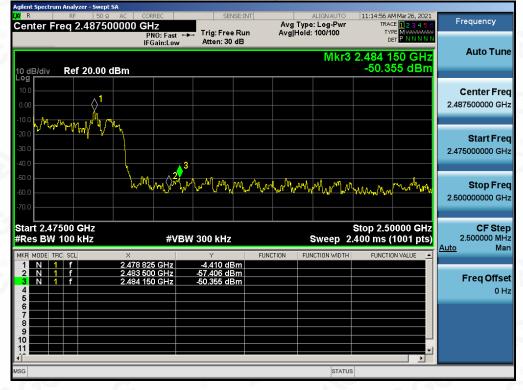

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, be test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




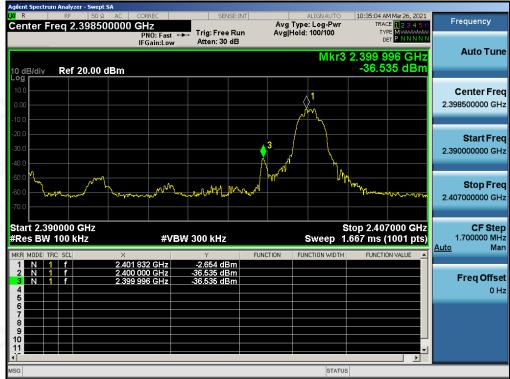

# 8-DPSK MODULATION IN LOW CHANNEL


Hopping off

Hopping on

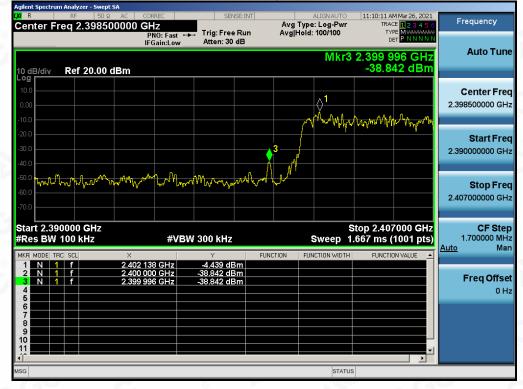


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, be test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



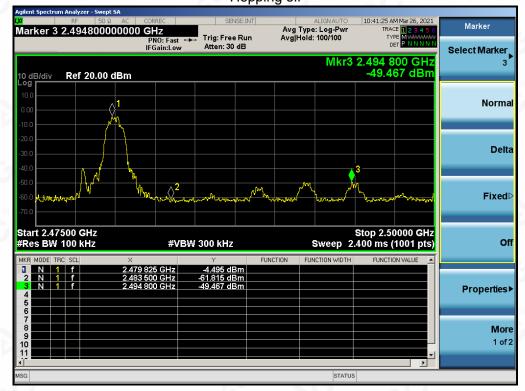

### 8-DPSK MODULATION IN HIGH CHANNEL Hopping off

Hopping on

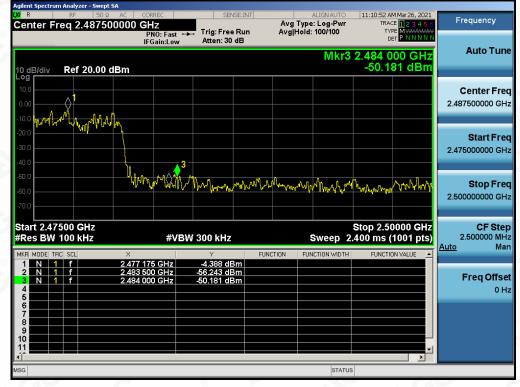

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, between the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# **10. RADIATED EMISSION**

#### **10.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




### 10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

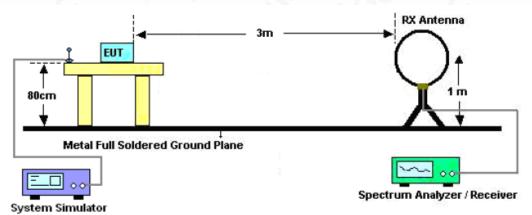

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

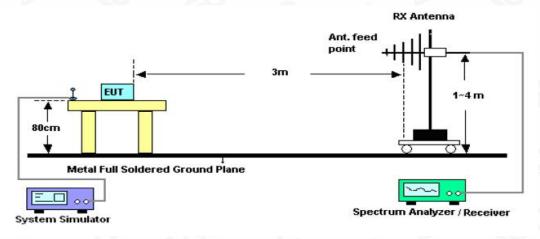

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

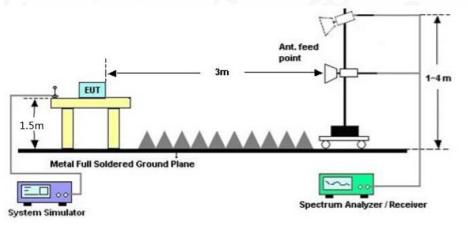

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test estimates and the test estimates and the test estimates are presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

#### **10.3. LIMITS AND MEASUREMENT RESULT**

#### 15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

### **10.4. TEST RESULT**

### **RADIATED EMISSION BELOW 30MHz**


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day authorize for the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



### **RADIATED EMISSION BELOW 1GHz**

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

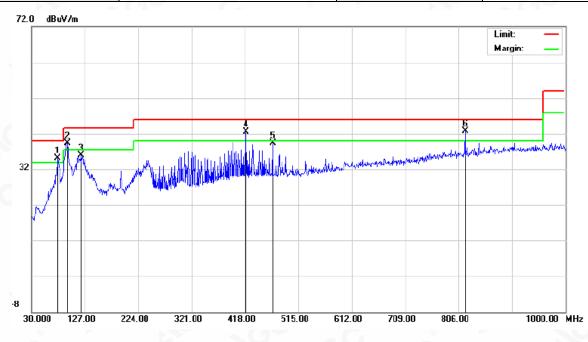


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	İ	77.5300	19.56	15.48	35.04	40.00	-4.96	peak
2	İ	94.9900	23.84	15.49	39.33	43.50	-4.17	peak
3		120.2100	17.88	18.00	35.88	43.50	-7.62	peak
4	İ	419.9399	17.57	24.98	42.55	46.00	-3.45	peak
5		468.4400	14.23	24.99	39.22	46.00	-6.78	peak
6	*	817.6399	12.16	30.64	42.80	46.00	-3.20	peak

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated for the formation of the stamp. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

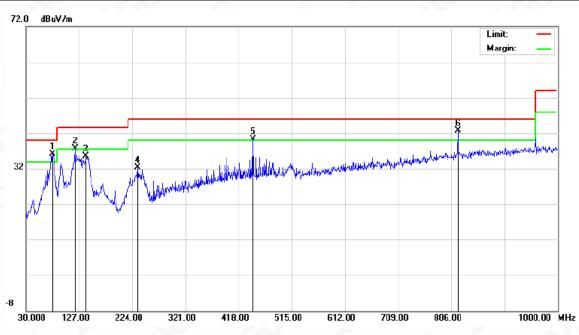

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	İ	78.5000	20.84	15.27	36.11	40.00	-3.89	peak
2	İ	119.2400	19.82	17.90	37.72	43.50	-5.78	peak
3		139.6100	14.30	21.17	35.47	43.50	-8.03	peak
4		233.7000	14.15	18.21	32.36	46.00	-13.64	peak
5	İ	444.1900	15.26	24.98	40.24	46.00	-5.76	peak
6	*	817.6399	12.03	30.64	42.67	46.00	-3.33	peak

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Over= Measurement -Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

# **RADIATED EMISSION ABOVE 1GHz**

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
45.53	0.08	45.61	74	-28.39	peak
37.32	0.08	37.4	54	-16.6	AVG
40.46	2.21	42.67	74	-31.33	peak
32.47	2.21	34.68	54	-19.32	AVG
.C	8			-6	3
		0			- GG
	(dBµV) 45.53 37.32 40.46	(dBµV)         (dB)           45.53         0.08           37.32         0.08           40.46         2.21	(dBµV)         (dB)         (dBµV/m)           45.53         0.08         45.61           37.32         0.08         37.4           40.46         2.21         42.67	(dBµV)         (dB)         (dBµV/m)         (dBµV/m)           45.53         0.08         45.61         74           37.32         0.08         37.4         54           40.46         2.21         42.67         74	(dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)           45.53         0.08         45.61         74         -28.39           37.32         0.08         37.4         54         -16.6           40.46         2.21         42.67         74         -31.33

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.86	0.08	44.94	74	-29.06	peak
4804.000	36.59	0.08	36.67	54	-17.33	AVG
7206.000	39.42	2.21	41.63	74	-32.37	peak
7206.000	30.36	2.21	32.57	54	-21.43	AVG
60	2.0	®		2	<u>C</u>	0
emark:		-0				
actor - Antor	na Eactor + Cabl	aloss Pro a	molifior			

Antenna Factor able Loss amplifier ⊢actor

Compliance Bedicated Fe Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "bedicated Past Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. g/Inspection he test results Šf the test report.



#### Report No.: AGC04138210304FE03 Page 47 of 79

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.000	45.79	0.14	45.93	74	-28.07	peak
4882.000	38.63	0.14	38.77	54	-15.23	AVG
7323.000	41.54	2.36	© 43.9	74	-30.1	peak
7323.000	34.43	2.36	36.79	54	-17.21	AVG
8			1 - 0	8	(?)	
emark:	G	0		- CU		0

MIC STAND KARAOKE EUT **Model Name** iSM2040 SYSTEM **Temperature** 25°C **Relative Humidity** 55.4% 960hPa **Test Voltage** Normal Voltage Pressure **Test Mode** Mode 2 Antenna Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.53	0.14	45.67	74	-28.33	peak
4882.000	37.36	0.14	37.5	54	-16.5	AVG
7323.000	40.22	2.36	42.58	74	-31.42	peak
7323.000	31.41	2.36	33.77	54	-20.23	AVG
	0		G	C .	6	8
mark:	00					G

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC04138210304FE03 Page 48 of 79

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.86	0.22	47.08	74	-26.92	peak
4960.000	38.39	0.22	38.61	54	-15.39	AVG
7440.000	41.57	2.64	6 44.21	74	-29.79	peak
7440.000	32.41	2.64	35.05	54	-18.95	AVG
				- C	8	
emark:						
	nna Factor + Cable	e Loss – Pre-	amplifier.		<b>S</b>	

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

						6
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	45.89	0.22	46.11	74 💿	-27.89	peak
4960.000	38.63	0.22	38.85	54	-15.15	AVG
7440.000	41.35	2.64	43.99	74	-30.01	peak
7440.000	33.42	2.64	36.06	54	-17.94	AVG
8			2.0			
emark:	8			-,C		8
	na Factor + Cab	le Loss – Pre-	amplifier.	2		0

RESULT: PASS

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated Pestua/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 1	Antenna	Horizontal	

#### TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

ΡK

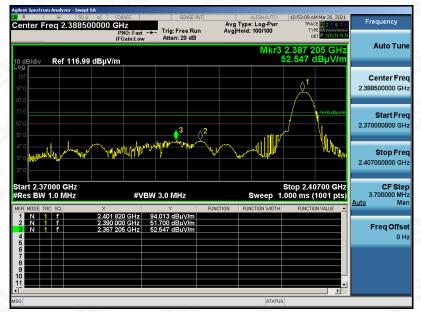

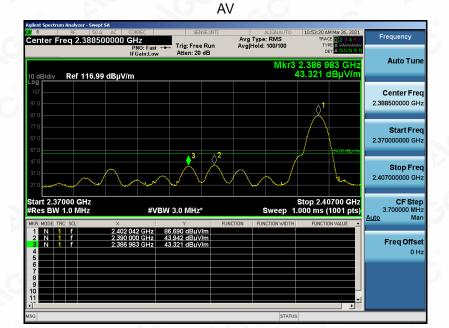

### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphroization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




#### Report No.: AGC04138210304FE03 Page 50 of 79

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical



AV

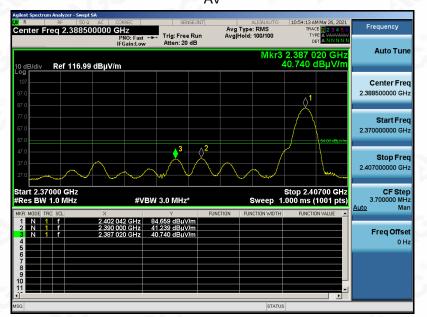

**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the test report in the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC04138210304FE03 Page 51 of 79

Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal



AV

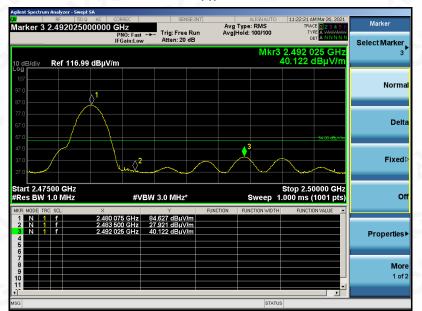

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the test report in the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC04138210304FE03 Page 52 of 79

EUT	MIC STAND KARAOKE SYSTEM	Model Name	iSM2040
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical




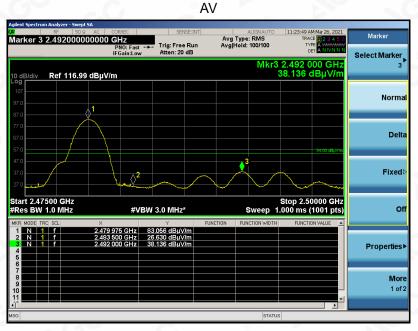

#### **RESULT: PASS**

**Note**: The factor had been edited in the "Input Correction" of the Spectrum Analyzer. The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in spectral definition of the stand in the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





# **11. NUMBER OF HOPPING FREQUENCY**

#### **11.1. MEASUREMENT PROCEDURE**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.

2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

3. VBW  $\geq$  RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.

4. Allow the trace to stabilize.

#### **11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)**


Same as described in section 8.2

#### **11.3. MEASUREMENT EQUIPMENT USED**

The same as described in section 6

#### **11.4. LIMITS AND MEASUREMENT RESULT**

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT	
HOPPING CHANNEL	>=15	79	PASS	

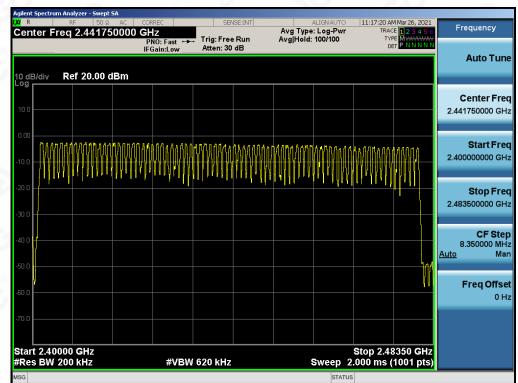

TEST PLOT FOR NO. OF TOTAL CHANNELS

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# 12. TIME OF OCCUPANCY (DWELL TIME)

### **12.1. MEASUREMENT PROCEDURE**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Zero span, centered on a hopping channel.

2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.

3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.

4. Detector function: Peak. Trace: Max hold.

5. Use the marker-delta function to determine the transmit time per hop.

6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer)  $\times$  (period specified in the requirements / analyzer sweep time)

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

# 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

# 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


#### **12.4. LIMITS AND MEASUREMENT RESULT**

Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)
Low	2.881	27*4	311.148	400
Middle	2.881	28*4	322.672	400
High	2.881	27*4	322.672	400

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



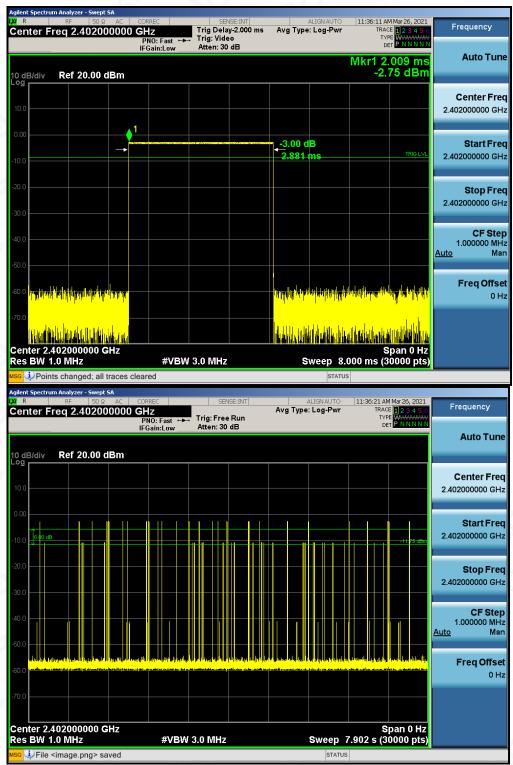

### TEST PLOT OF LOW CHANNEL


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



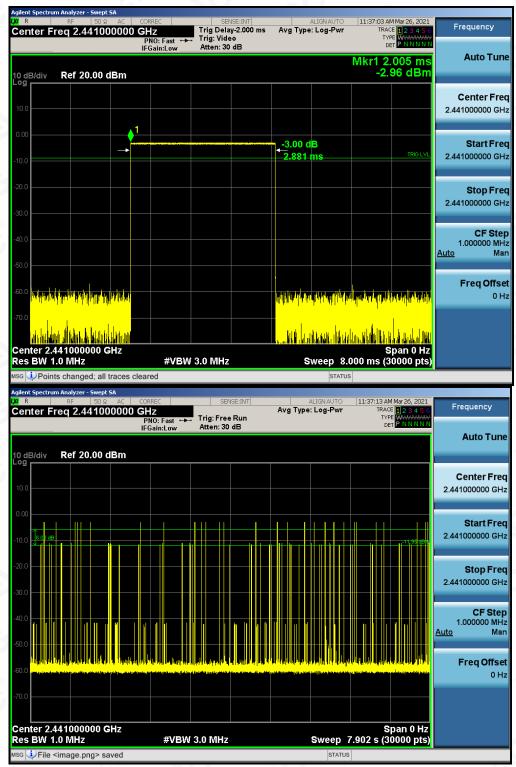

### TEST PLOT OF MIDDLE CHANNEL

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com