

Test report no.: <i>Prüfbericht-Nr.:</i>	CN23GWPE 001	Order No.: <i>Auftragsnr.:</i>	168374226	Page 1 of 24 <i>Seite 1 von 24</i>
Client reference no.: <i>Kunden-Referenz-Nr.:</i>	N/A	Order date: <i>Auftragsdatum:</i>	2022-05-06	
Client: <i>Auftraggeber:</i>	Honeywell International Inc. 12 Clintonville Road, Northford, CT 06472, USA			
Test item: <i>Prüfgegenstand:</i>	Plant controller			
Identification / Type no.: <i>Bezeichnung / Typ-Nr.:</i>	HON-GW00-B-W, HON-GW00-B-W-C, HON-GW00-B-W-D, IQ5-00-BW-24, IQ5P00-BW-24, CPO-PC600-BW, N-ADV-133-H-B-W, N-ADV-133-H-B-W-C, N-ADV-133-H-B-W-D			
Order content: <i>Auftrags-Inhalt:</i>	Test Report			
Test specification <i>Prüfgrundlage:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 3 August 2023			
Date of sample receipt: <i>Wareneingangsdatum:</i>	2022-05-27	Please refer to Photo Document		
Test sample no: <i>Prüfmuster-Nr.:</i>	A003262749-001,003, 004, 007			
Testing period: <i>Prüfzeitraum:</i>	2023-06-01 - 2023-11-08			
Place of testing: <i>Ort der Prüfung:</i>	Refer to section 2.1			
Testing laboratory: <i>Prüflaboratorium:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Test result*: <i>Prüfergebnis*:</i>	Pass			
tested by: <i>geprüft von:</i>	authorized by: <i>genehmigt von:</i>			
Date: 2024-02-06 <i>Datum:</i>	Issue date: 2024-02-06 <i>Ausstellungsdatum:</i>			
Position / Stellung:	Expert/Sachverständige(r)	Position / Stellung:	Expert/Sachverständige(r)	
Other: <i>Sonstiges:</i>	FCC ID: 2A8LT-ADVBLEWIFI IC: 1609A-ADVBLEWIFI HVIN: 501004 PMN: HON-GW00-B-W, HON-GW00-B-W-C, HON-GW00-B-W-D, IQ5-00-BW-24, IQ5P00-BW-24, CPO-PC600-BW, N-ADV-133-H-B-W, N-ADV-133-H-B-W-C, N-ADV-133-H-B-W-D			
Condition of the test item at delivery: <i>Zustand des Prüfgegenstandes bei Anlieferung:</i>	Test item complete and undamaged Prüfmuster vollständig und unbeschädigt			
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. <i>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</i>				

V05

Test report no.: CN23GWPE 001
Prüfbericht-Nr.:

Page 2 of 24
Seite 2 von 24

Remarks
Anmerkungen

- | | |
|---|--|
| 1 | <p>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</p> <p><i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</i></p> <p><i>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i></p> |
| 2 | <p>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</p> <p><i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i></p> |
| 3 | <p>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</p> <p><i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i></p> |
| 4 | <p>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</p> <p><i>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</i></p> |

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	11
3.5	SUBMITTED DOCUMENTS.....	11
4	TEST SET-UP AND OPERATION MODES	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION	12
4.2	TEST OPERATION AND TEST SOFTWARE.....	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
4.5	TEST SETUP DIAGRAM	13
5	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1	<i>Antenna Requirement</i>	<i>15</i>
5.1.2	<i>Maximum peak conducted output power</i>	<i>16</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>18</i>
5.1.4	<i>6dB Bandwidth</i>	<i>19</i>
5.1.5	<i>99% Bandwidth</i>	<i>20</i>
5.1.6	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>21</i>
5.1.7	<i>Radiated Spurious Emission</i>	<i>22</i>
5.1.8	<i>Conducted Emission on AC Mains.....</i>	<i>23</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	24
7	LIST OF TABLES.....	24

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of Wi-Fi 802.11 b/g/n

Appendix C: Test Results of BLE

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	21.09.2024
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	21.09.2024
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	21.09.2024
DC Power Supply	Keysight	E3642A	MY61276100	21.09.2024
Wireless Connectivity Tester	R&S	CMW270	102505	21.09.2024
Power Control Unit	Tonscend	JS0806-4ADC	N/A	21.09.2024
Automation Control Unit	Tonscend	JS0806-2	21C8060396	21.09.2024
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	25.07.2024
Signal Analyzer	R&S	FSV 40	101439	25.07.2024
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	25.07.2024
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	25.07.2024
Amplifier	R&S	SCU-18F	180070	25.07.2024
Amplifier	R&S	SCU40A	100475	25.07.2024
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	06.08.2024
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	06.08.2024
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	27.08.2024
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	06.08.2024
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	23.02.2024
Artificial Mains Network	R&S	ENV216	101445	23.02.2024
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The Product is plant controller which supports BT and Wi-Fi technology.

This report is for Wi-Fi 2.4GHz and BLE operation only.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Plant controller
Type Designation:	HON-GW00-B-W, HON-GW00-B-W-C, HON-GW00-B-W-D, IQ5-00-BW-24, IQ5P00-BW-24, CPO-PC600-BW, N-ADV-133-H-B-W, N-ADV-133-H-B-W-C, N-ADV-133-H-B-W-D
FCC ID:	2A8LT-ADVBLEWIFI
IC:	1609A-ADVBLEWIFI
HVIN:	501004
PMN:	HON-GW00-B-W, HON-GW00-B-W-C, HON-GW00-B-W-D, IQ5-00-BW-24, IQ5P00-BW-24, CPO-PC600-BW, N-ADV-133-H-B-W, N-ADV-133-H-B-W-C, N-ADV-133-H-B-W-D
Operating Voltage:	DC 20V-30V or AC 19.2V-30V
Testing Voltage:	AC 24V or DC 24V (via AC/DC or AC/AC adapter)
Operating Temperature Range:	-25°C ~ 60°C
Technical Specification of Wi-Fi 802.11 b/g/n	
Operating Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20) 2422 - 2452 MHz for 802.11n(HT40)
Type of Modulation:	802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM
Data Rate:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0-MCS7 for 802.11n(HT20/40) (All data rates considered, only the Worst-cases reported)
Channel Number:	11 channels for 802.11b/g/n(HT20) 7 channels for 802.11n(HT40)
Channel Separation:	5 MHz
Antenna Type:	External Antenna
Number of Antenna:	2, only SISO supported.
Antenna Gain:	2.94 dBi Max
Technical Specification of BLE	
Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Channel Number:	40 channels

Data Rate:	2Mbps, 1Mbps, 500kbps, 125kbps
Channel Separation:	2 MHz
Antenna Type:	Integral antenna
Antenna Gain:	3.11 dBi
Technical Specification of Wi-Fi 802.11 a/n/ac	
Operating Frequency:	5180-5320MHz, 5500-5700MHz, 5745-5825MHz
Type of Modulation:	802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Operating Frequency / Protocol:	802.11 a/n20/n40/ac20/ac40/ac80
Data Rate:	6/9/12/18/24/36/48/54 Mbps for 802.11a MCS0 ~ MCS7 for 802.11n MCS0-MCS9 for 802.11ac (All data rates considered, only the Worst-cases reported)
Channel Separation	5 MHz
Antenna Type:	External Antenna
Number of Antenna:	2, only SISO supported.
Antenna Gain:	U-NII-1 Band: 2.65dBi, U-NII-2A Band: 2.65dBi, U-NII-2C Band:1.7dBi, U-NII-3 Band:1.62dBi

This device has 9 models, all of them share the RF circuits and the main boards. The only differences among them are mainly in the digital output ports, FRAM and Brand for market purpose. Details listed as below:

Module No.	Brand	Ethernet Isolated Port	Ethernet Switched Port	FRAM	RS485 Serial pt (TOP)	Touch Flake	HMI Side Port	Build option Port
HON-GW00-B-W	Honeywell	1	2	0	1	T1L Only	Not Used	N.A
HON-GW00-B-W-C	Honeywell	1	2	0	1			
HON-GW00-B-W-D	Honeywell	1	2	0	1			
IQ5-00-BW-24	Trend	1	3	512kB	3			
IQ5P00-BW-24	Trend	1	3	512kB	3	T1L & Serial	RJ11	CAN (4 pin)
CPO-PC600-BW	Honeywell	1	3	768kB	3			
N-ADV-133-H-B-W	Honeywell	1	3	768kB	3			
N-ADV-133-H-B-W-C	Honeywell	1	3	768kB	3			
N-ADV-133-H-B-W-D	Honeywell	1	3	768kB	3			

As above differences, IQ5-00-BW-24 is assessed as the typical one. Only the worst result is showed in this report.

Table 3: RF Channel and Frequency of Wi-Fi 802.11 b/g/n

RF Channel	b/g/n(HT20)	n(HT40)
	Frequency (MHz)	Frequency (MHz)
01	2412	/
02	2417	/
03	2422	2422
04	2427	2427
05	2432	2432
06	2437	2437
07	2442	2442
08	2447	2447
09	2452	2452
10	2457	/
11	2462	/

Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 20MHz Bandwidth mode.

Test frequencies are lowest channel: 2422 MHz, middle channel: 2437 MHz and highest channel: 2452 MHz for 40MHz Bandwidth mode.

Table 4: RF Channel and Frequency of Bluetooth (Low Energy)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi 802.11 b/g/n wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, BLE wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- C. On, Normal operation (Wi-Fi & BLE Link)
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|-----------------|
| - Application Form | - User Manual |
| - Operation Description | - Block Diagram |
| - Schematics | - Rating Label |
| - PCB Layout | - Parts List |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model IQ5-00-BW-24 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Model	Manufacturer	S/N
Laptop	X240	LENOVO	SL 10F31638JS
Laptop	X260	LENOVO	PC0FF78S
Transformer	MOD_EL_66	Emperor Ling	N/A
Portable Laptop	E5440	DELL	N/A
AC-AC Adapter	BK-100	DELIXI	N/A
Wiring Adapter	IQ5-IO-ADPT	Honeywell	N/A
plant controller	IQ5-00-24	Honeywell	N/A
Router	RAX50	NETGEAR	N/A
Router	RT-AC66U	Asus	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

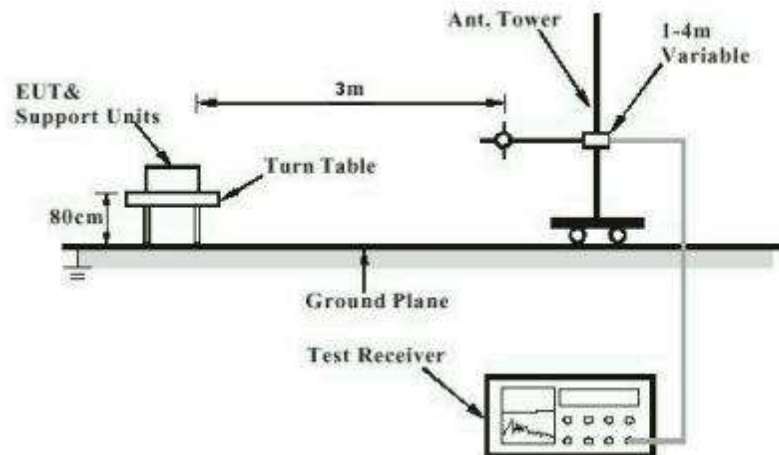


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

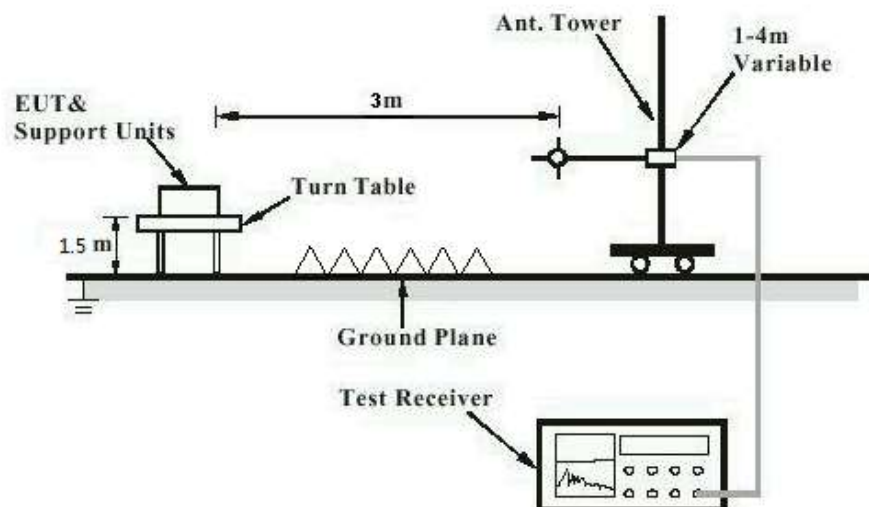


Diagram of Measurement Configuration for Mains Conduction Measurement


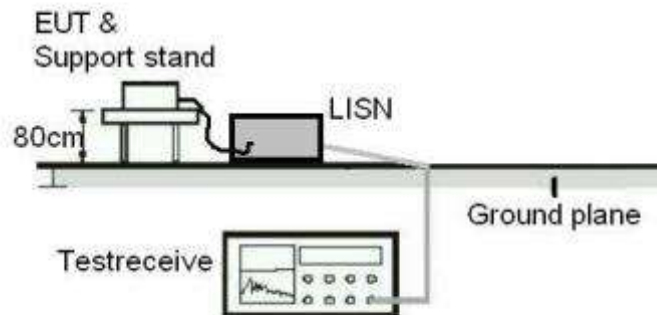


Diagram of Measurement Configuration for Conducted Transmitter Measurement

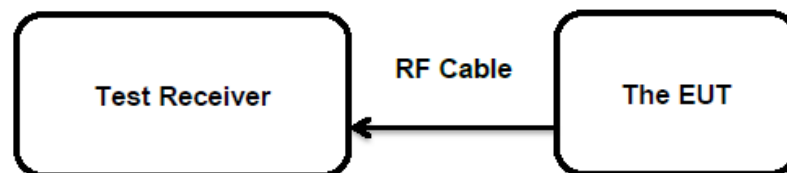

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

The EUT have 2 External antennas with SMA connector for Wi-Fi and 1 Integral antenna for BLE. Antenna gain as listed in section 3.2 table 2.

Only professional installation will be permitted. The installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. The EUT complies with the requirement of § 15.203.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum peak conducted output power

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(b)(3)
: RSS-247 Clause 5.4(d)
Basic standard : ANSI C63.10: 2013
Limits : 1.0 Watts
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-06-01 to 2022-06-17
Input voltage : AC 24V
Operation mode : A,B
Test channel : Low / Middle / High
Ambient temperature : 24.8 °C
Relative humidity : 55 %
Atmospheric pressure : 101 kPa

Table 6: Test Result of Maximum Peak Conducted Output Power, Wi-Fi

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Conducted Power(dBm)		Measured average Conducted Power(dBm)		Limit (dBm)
			Ant 0	Ant 1	Ant 0	Ant 1	
802.11b	1 Mbps	2412	15.68	15.78	14.96	14.96	30
		2437	15.62	15.64	14.90	15.07	
		2462	15.47	15.70	14.83	14.80	
802.11g	6 Mbps	2412	18.34	18.29	12.67	12.70	
		2437	18.42	18.19	12.72	12.62	
		2462	18.51	18.35	12.55	12.69	
802.11n (HT20)	MCS0	2412	17.76	17.66	12.20	12.33	
		2437	17.90	17.76	12.25	12.32	
		2462	17.58	17.46	12.11	12.24	
802.11n (HT40)	MCS0	2422	19.42	19.34	13.52	13.55	
		2437	19.33	19.21	13.53	13.48	
		2452	19.40	19.40	13.52	13.51	

Note:

- The cable loss is taken into account in results.
- Antenna gain(G): 2.94dBi,
 $e.i.r.p. = P_{(Peak\ power)} + G$, which is far below the 4 W

Table 7: Test Result of Maximum Peak Conducted Output Power, BLE

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Power		Limit (W)
			(dBm)	(W)	
Bluetooth (Low Energy)	2Mbps	2402	4.89	0.0031	< 1.0
		2440	4.54	0.0028	
		2480	4.23	0.0026	
	1Mbps	2402	5.11	0.0032	
		2440	4.85	0.0031	
		2480	5.49	0.0035	
	500kbps	2402	5.71	0.0037	
		2440	5.3	0.0034	
		2480	6.4	0.0044	
	125kbps	2402	4.21	0.0026	
		2440	4.15	0.0026	
		2480	4.43	0.0028	
Maximum Measured Value			6.40	0.0044	

Note:

- 3) The cable loss is taken into account in results.
- 4) Antenna gain(G): 3.11 dBi,
 e.i.r.p.= $P_{(\text{Peak power})} + G$, which is far below the 4 W

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(e) RSS-247 Clause 5.2(b)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-06-01 to 2022-06-17
Input voltage	: AC 24V
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendixes B, C.

5.1.4 6dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(2)
	: RSS-247 Clause 5.2(a)
Basic standard	: ANSI C63.10: 2013
Limits	: > 500 kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-06-01 to 2022-06-17
Input voltage	: AC 24V
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendixes B, C.

Prüfbericht - Nr.: CN23GWPE 001
Test Report No.:Seite 20 von 24
Page 20 of 24

5.1.5 99% Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)
	:	RSS-Gen Clause 6.7
Basic standard	:	ANSI C63.10: 2013
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2022-06-01 to 2022-06-17
Input voltage	:	AC 24V
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendixes B, C.

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) : RSS-247 Clause 5.1(b)
Basic standard	: ANSI C63.10: 2013
Limits	: If the tested output power based on peak test: At least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the tested output power based on RMS averaging over a time interval: At least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-06-01 to 2022-06-17
Input voltage	: AC 24V
Operation mode	: A,B
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendixes B, C.

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 5
Kind of test site	:	3m Semi-anechoic Chamber & 3m Full-anechoic Chamber

Test Setup

Date of testing	:	2023-05-01 to 2023-05-23
Input voltage	:	AC 24V
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. All configurations, only the worst-case mode reported.

For the measurement records, refer to the appendixes B, C.

5.1.8 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
	: RSS-GEN clause 8.8
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-11-08
Input voltage	: AC 120V, 60Hz
Operation mode	: C
Earthing	: Not connected
Ambient temperature	: 23.1 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendixes B, C.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Specification of EUT.....	8
Table 3: RF Channel and Frequency of Wi-Fi 802.11 b/g/n.....	10
Table 4: RF Channel and Frequency of Bluetooth (Low Energy)	10
Table 5: Auxiliary Equipment Used during Test	12
Table 6: Test Result of Maximum Peak Conducted Output Power, Wi-Fi	16
Table 7: Test Result of Maximum Peak Conducted Output Power, BLE	17