

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Guangdong Joy Intelligent Technology Co., Ltd

Robot vacuum cleaner

Model Number: L2050

Additional Model: L3050,L900,L-VCL0L1,Lxxxx, P1, P1+, L2090,Q6, L2080,
S31,S30, L2180, L900X,L930, L3150,L20, L30, N3,L21, L31, L2450, L3250,
L2150, V980 Plus, L2350,L2380, MI WHOLE M7 PRO,L3350, G500, L3080

(x=A-Z, number or blank, indicate different color)

FCC ID: 2AV2K-L2050



Prepared for:	Guangdong Joy Intelligent Technology Co., Ltd
	Room 1201, No. 58, Second Street, Mawu New Village, Changping Town,
	Dongguan, 523586 Guangdong, P.R. China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2002081-2
Date of Test:	Dec. 03, 2020~Feb. 26, 2021
Date of Report:	Mar. 01, 2021

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT)	4
1.2. Antenna Information	4
1.3. Difference between Model Numbers.....	5
2. SUMMARY OF TEST	7
2.1. Summary of test result.....	7
2.2. Test Facilities.....	8
2.3. Measurement uncertainty	9
2.4. Assistant equipment used for test	9
2.5. Block Diagram.....	9
2.6. Test Mode.....	10
2.7. Power Setting of Test Software	11
2.8. Test Equipment List	12
3. RADIATED SPURIOUS EMISSIONS	13
3.1. Limit	13
3.2. Test setup.....	14
3.3. Spectrum Analyzer Setting.....	15
3.4. Test Procedure	15
3.5. Test Result	16
4. AC POWER LINE CONDUCTED EMISSIONS	32
4.1. Limit	32
4.2. Test Setup	32
4.3. Spectrum Analyzer Setting.....	32
4.4. Test Procedure	32
4.5. Test Result	33
5. TEST SETUP PHOTO.....	53
6. EUT PHOTO	55

EST Technology Co., Ltd.

Applicant:	Guangdong Joy Intelligent Technology Co., Ltd		
Address:	Room 1201, No. 58, Second Street, Mawu New Village, Changping Town, Dongguan, 523586 Guangdong, P.R. China		
Manufacturer:	Guangdong Joy Intelligent Technology Co., Ltd		
Address:	Room 1201, No. 58, Second Street, Mawu New Village, Changping Town, Dongguan, 523586 Guangdong, P.R. China		
E.U.T:	Robot vacuum cleaner		
Model Number:	L2050		
Additional Model:	L3050,L900,L-VCL0L1,Lxxxx, P1, P1+, L2090,Q6, L2080, S31,S30, L2180, L900X,L930, L3150,L20, L30, N3,L21, L31, L2450, L3250, L2150, V980 Plus, L2350,L2380, MI WHOLE M7 PRO, L3350, G500,L3080, (x=A-Z, number or blank, indicate different color)		
Power Supply:	DC 24V From Adapter Input AC 100-240V,50/60Hz; DC 24V From Automatic Dirt Disposal Input AC 100-130V,50/60Hz		
Trade Name:	-----	Serial No.:	-----
Date of Receipt:	Dec. 03, 2020	Date of Test:	Dec. 03, 2020~Feb. 26, 2021
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	Reviewed by:	Date: Mar. 04, 2021 Approved by:  Authorizer:	
 Ring Yang / Assistant	 Seven Wang / Engineer	 Iceman Hu / Manager	
Other Aspects:	This report base on the previous report with report number: ESTE-R2005081-1, Because only the add motor and battery, so just re-tested spurious emissions (30-1000MHz) and Conducted Emissions, other test item needn't re-tested.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Robot vacuum cleaner
Model Number	:	L2050
Software Version	:	V1
Hardware Version	:	V1
Operation frequency	:	2412MHz~2462MHz 2422MHz~2452MHz
Number of channel	:	IEEE 802.11b: 11 Channels IEEE 802.11g: 11 Channels IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Max Output Power (PEAK)	:	IEEE 802.11b: 16.48dBm IEEE 802.11g: 18.41dBm IEEE 802.11n HT20: 16.39dBm IEEE 802.11n HT40: 16.46dBm
Modulation Type	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Sample Type	:	Prototype production

Note:


For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	4

1.3. Difference between Model Numbers

Note:

Model	L3050,L900	L2050,L-VCL0 L1,Lxxxx, P1,P1+	L2090,Q6	L2080,S31,S30	L2180, L900X,L930	L3150,L20, L30, N3,L21, L31
Appearance						
Appearance (back)						
Switch button						
mainboard model	L1050	L1050	L1050	L1050	L1050	L1050
Whether to collect dust treasure	without	Optional	Optional	Optional	Optional	without
water tank	Electric control tank	external tank	external tank	external tank	external tank	Electric control tank
Battery	5200mAh or 3200mAh	5200mAh or 3200mAh	5200mAh or 3200mAh	5200mAh or 3200mAh	5200mAh or 3200mAh	5200mAh or 3200mAh
Adapter	24V 1.2A					

L2150, V980 Plus,	L2350,L2380, MI WHOLE M7 PRO	L3350,G500	L3080	L2450	L3250
					
					
					
L1050	L1050	L1050	L1050	L1050	L1050
Optional	Optional	without	without	Optional	without
external tank	external tank	Electric control tank	Electric control tank	external tank	Electric control tank
5200mAh or 3200mAh	5200mAh or 3200mAh	5200mAh or 3200mAh	5200mAh or 3200mAh	5200mAh or 3200mAh	5200mAh or 3200mAh
Adapter	24V 1.2A				

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Radiated Spurious Emissions	15.205 15.209 15.247(d)	PASS
4	AC Power Line Conducted Emissions	15.207	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 25GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter	KA	KA3601A-2401200US	-	-
	Adapter	DB	DBS036A-2401200U	-	-
B	Automatic Dirt Disposal	LS	MS1	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	DC Cable
2	NO	NO	1.2m	AC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.1 meter high above ground. EUT was beset into 2.4G WIFI test mode by software before test.



(EUT: Robot vacuum cleaner)

2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
Radiated Spurious Emissions(Below 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
AC Power Line Conducted Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High

Note:

1. In radiated measurement,the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Power Setting of Test Software

Software Name	WifiTool_cn		
Frequency(MHz)	2412	2437	2462
IEEE 802.11b Setting	Default	Default	Default
IEEE 802.11g Setting	Default	Default	Default
IEEE 802.11n HT20 Setting	Default	Default	Default
Frequency(MHz)	2422	2437	2452
IEEE 802.11n HT40 Setting	Default	Default	Default

2.8. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,20	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,20	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Active Loop Antenna	SCHWABE ECK	FMZB 1519B	EST-E054	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

3. RADIATED SPURIOUS EMISSIONS

3.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2. Test setup

9kHz~30MHz

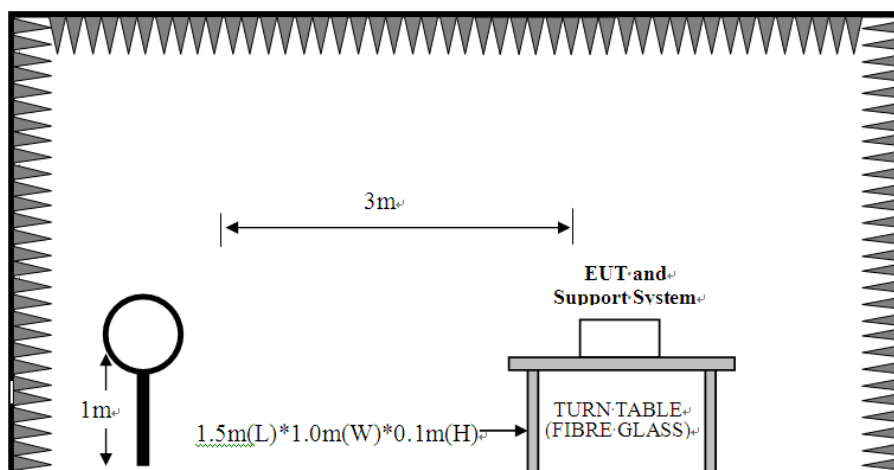

30~1000MHz

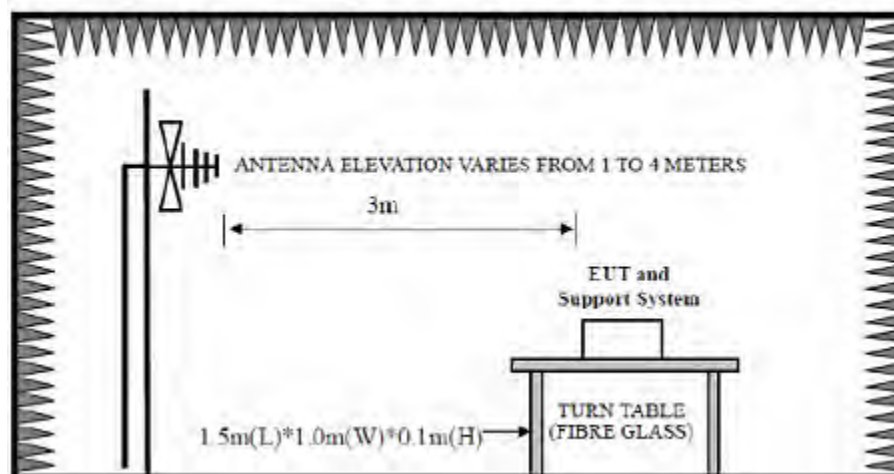

3.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

3.4. Test Procedure


- EUT was placed on a turn table, which is 0.1 meter high above ground for below 1GHz test.
- EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- Set the EUT transmit continuously with maximum output power.
- The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Repeat above procedures until all channels were measured.
- Record the results in the test report.

3.5. Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

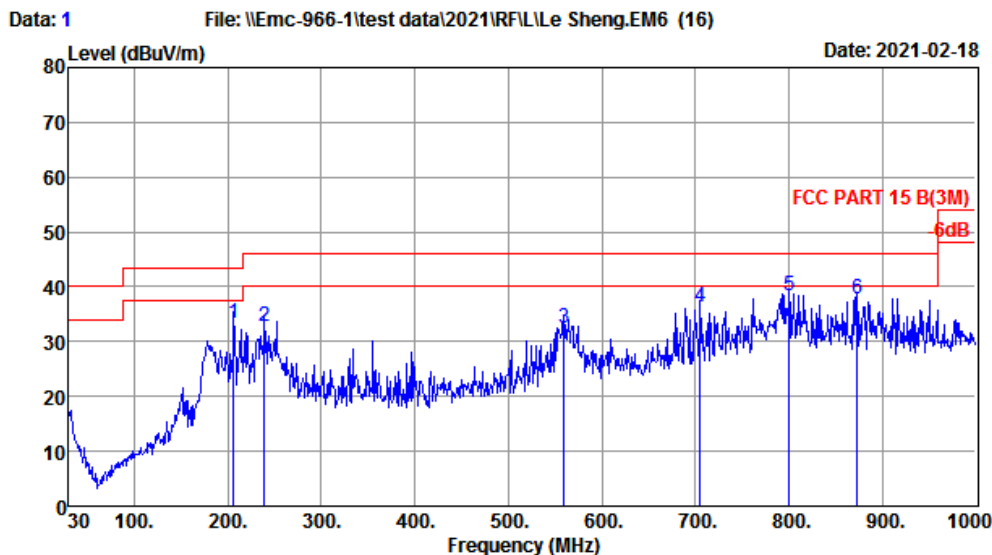

Site no. : 1# 966 Chamber Data no. : 1
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 14.4V From Battery
 M/N : L2050
 Test Mode : TX Mode
 H18650CH-4S2P+RC500-KN-11630

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	206.54	8.63	1.32	23.47	33.42	43.50	10.08	QP
2	239.52	11.30	1.58	19.80	32.68	46.00	13.32	QP
3	559.62	19.80	2.87	9.79	32.46	46.00	13.54	QP
4	705.12	21.70	3.30	11.37	36.37	46.00	9.63	QP
5	800.18	22.90	3.58	11.86	38.34	46.00	7.66	QP
6	872.93	23.87	3.84	10.02	37.73	46.00	8.27	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 2

File: \\Emc-966-1\\test data\\2021\\RFIL\\Le Sheng.EM6 (16)

Date: 2021-02-18

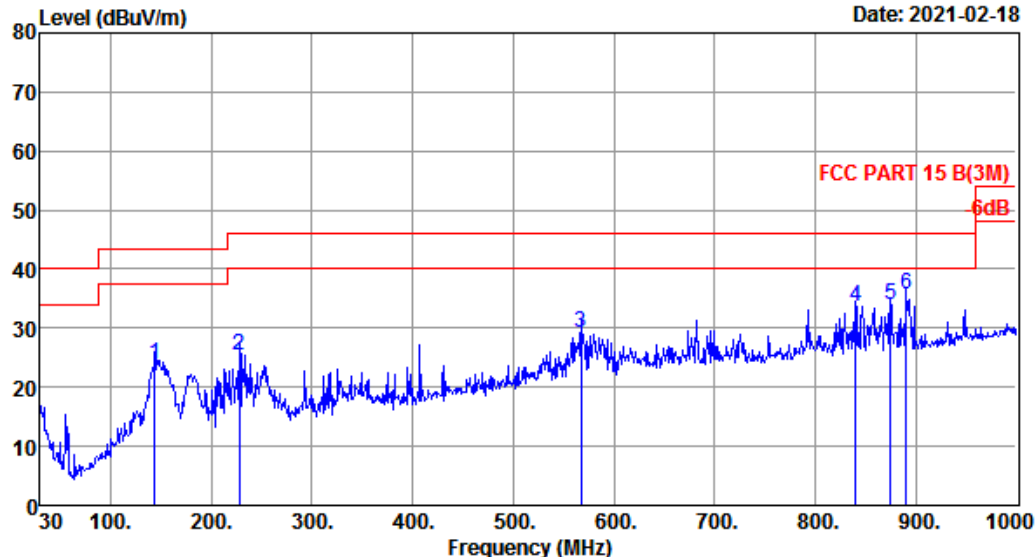

Site no. : 1# 966 Chamber Data no. : 2
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 14.4V From Battery
 M/N : L2050
 Test Mode : TX Mode
 H18650CH-4S2P+RC500-KN-11630

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	143.49	11.97	1.06	10.99	24.02	43.50	19.48	QP
2	227.88	10.30	1.50	13.70	25.50	46.00	20.50	QP
3	567.38	19.87	2.87	6.59	29.33	46.00	16.67	QP
4	839.95	23.50	3.71	6.38	33.59	46.00	12.41	QP
5	874.87	23.85	3.85	6.28	33.98	46.00	12.02	QP
6	890.39	23.90	3.87	7.88	35.65	46.00	10.35	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 3

File: \\Emc-966-1\test data\2021\RFIL\Le Sheng.EM6 (16)

Date: 2021-02-18

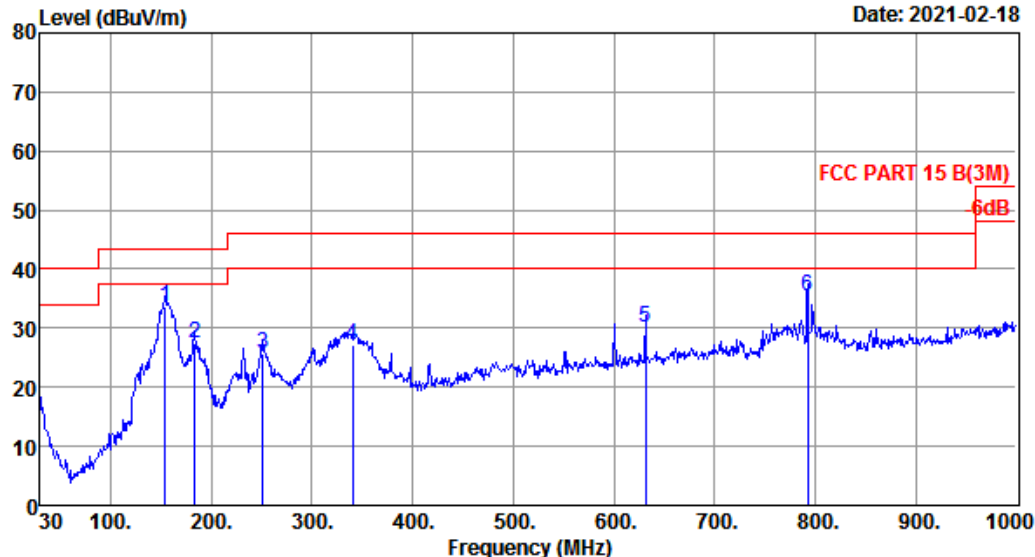

Site no. : 1# 966 Chamber Data no. : 3
Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
Engineer : Zzb
EUT : Robot Vacuum cleaner
Power : AC 120V/60Hz
M/N : L2050
Test Mode : TX Mode
H18650CH-4S2P+RC500-KN-11630
MS1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	154.16	11.36	1.11	21.09	33.56	43.50	9.94	QP
2	183.26	9.32	1.22	17.00	27.54	43.50	15.96	QP
3	251.16	12.62	1.63	11.58	25.83	46.00	20.17	QP
4	340.40	14.70	2.05	10.43	27.18	46.00	18.82	QP
5	631.40	21.03	3.13	5.93	30.09	46.00	15.91	QP
6	792.42	22.74	3.55	9.19	35.48	46.00	10.52	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 4

File: \\Emc-966-1\test data\2021\RFIL\Le Sheng.EM6 (16)

Date: 2021-02-18

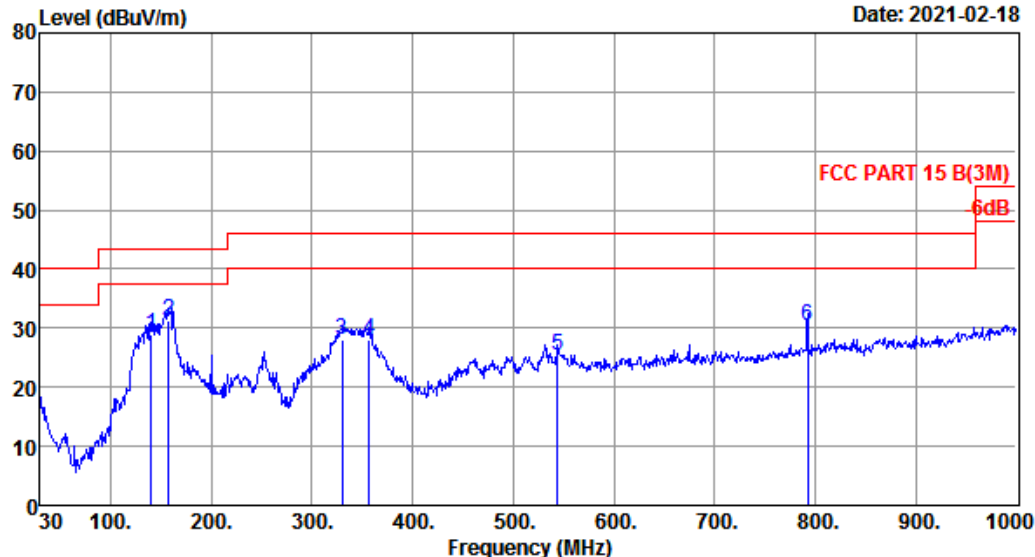

Site no. : 1# 966 Chamber Data no. : 4
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 H18650CH-4S2P+RC500-KN-11630
 MS1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	140.58	12.37	1.04	15.58	28.99	43.50	14.51	QP
2	158.04	11.30	1.13	18.89	31.32	43.50	12.18	QP
3	329.73	14.60	1.98	11.38	27.96	46.00	18.04	QP
4	356.89	15.26	2.15	10.61	28.02	46.00	17.98	QP
5	544.10	19.06	2.81	3.43	25.30	46.00	20.70	QP
6	792.42	22.74	3.55	4.07	30.36	46.00	15.64	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 5

File: \\Emc-966-1\test data\2021\RFIL\Le Sheng.EM6 (16)

Date: 2021-02-18

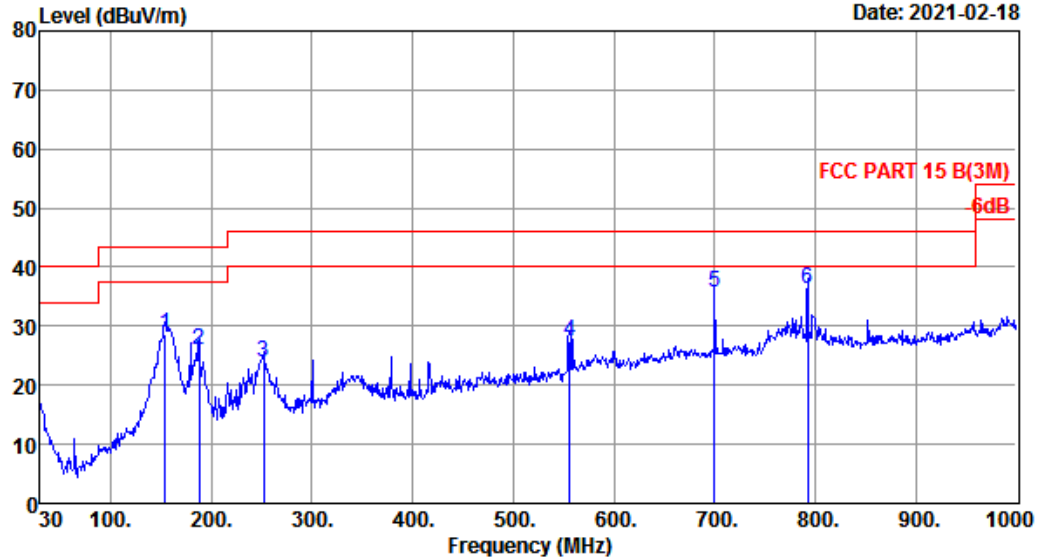

Site no. : 1# 966 Chamber Data no. : 5
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 H18650CH-4S2P+RC500-KN-11630
 DBS036A-2401200U

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	154.16	11.36	1.11	16.14	28.61	43.50	14.89	QP
2	188.11	9.02	1.24	15.62	25.88	43.50	17.62	QP
3	252.13	12.84	1.64	9.33	23.81	46.00	22.19	QP
4	555.74	19.48	2.86	5.02	27.36	46.00	18.64	QP
5	700.27	21.70	3.28	10.86	35.84	46.00	10.16	QP
6	792.42	22.74	3.55	9.91	36.20	46.00	9.80	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 6

File: \\Emc-966-1\\test data\\2021\\RFIL\\Le Sheng.EM6 (16)

Date: 2021-02-18

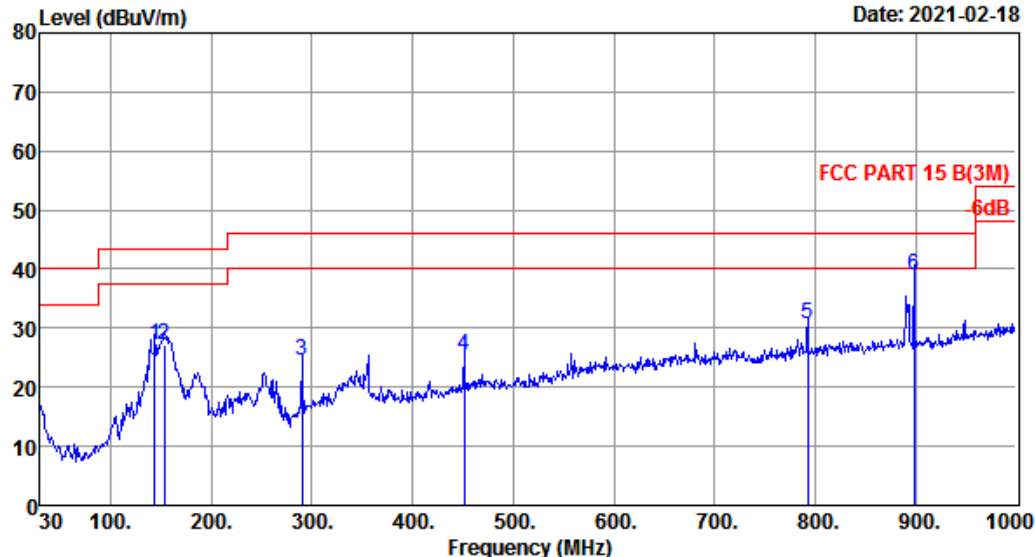

Site no. : 1# 966 Chamber Data no. : 6
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 H18650CH-4S2P+RC500-KN-11630
 DBS036A-2401200U

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	143.49	11.97	1.06	14.05	27.08	43.50	16.42	QP
2	153.19	11.42	1.10	14.66	27.18	43.50	16.32	QP
3	289.96	13.20	1.82	9.56	24.58	46.00	21.42	QP
4	450.98	17.32	2.55	5.43	25.30	46.00	20.70	QP
5	792.42	22.74	3.55	4.46	30.75	46.00	15.25	QP
6	898.15	23.90	3.88	11.05	38.83	46.00	7.17	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 7

File: \\Emc-966-1\\test data\\2021\\RFIL\\Le Sheng.EM6 (16)

Date: 2021-02-18

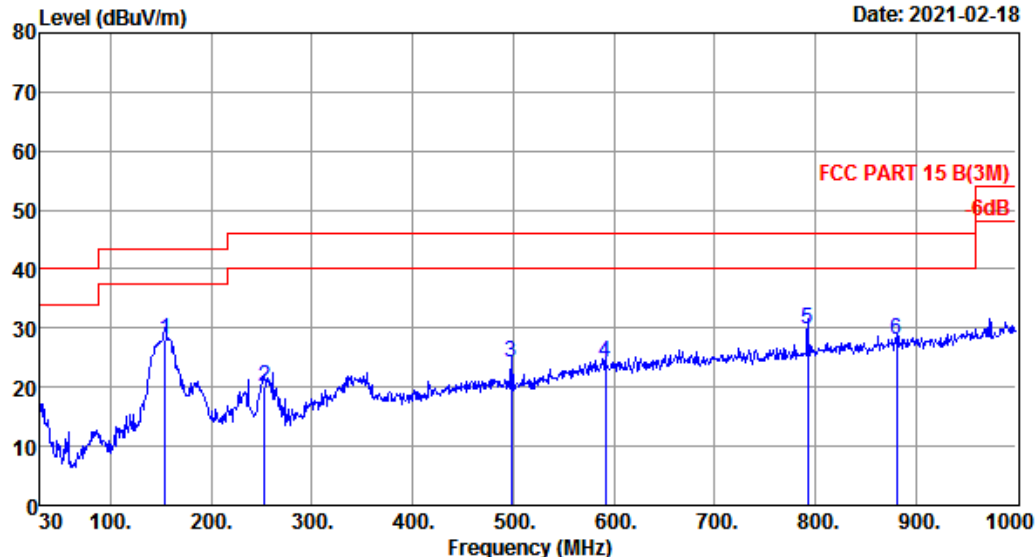

Site no. : 1# 966 Chamber Data no. : 7
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 H18650CH-4S2P+RC500-KN-11630
 KA3601A-2401200US

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	154.16	11.36	1.11	15.57	28.04	43.50	15.46	QP
2	253.10	13.06	1.65	5.29	20.00	46.00	26.00	QP
3	498.51	18.26	2.66	3.42	24.34	46.00	21.66	QP
4	591.63	20.32	2.95	0.90	24.17	46.00	21.83	QP
5	792.42	22.74	3.55	3.41	29.70	46.00	16.30	QP
6	880.69	23.81	3.88	0.42	28.11	46.00	17.89	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 8

File: \\Emc-966-1\\test data\\2021\\RFIL\\Le Sheng.EM6 (16)

Date: 2021-02-18

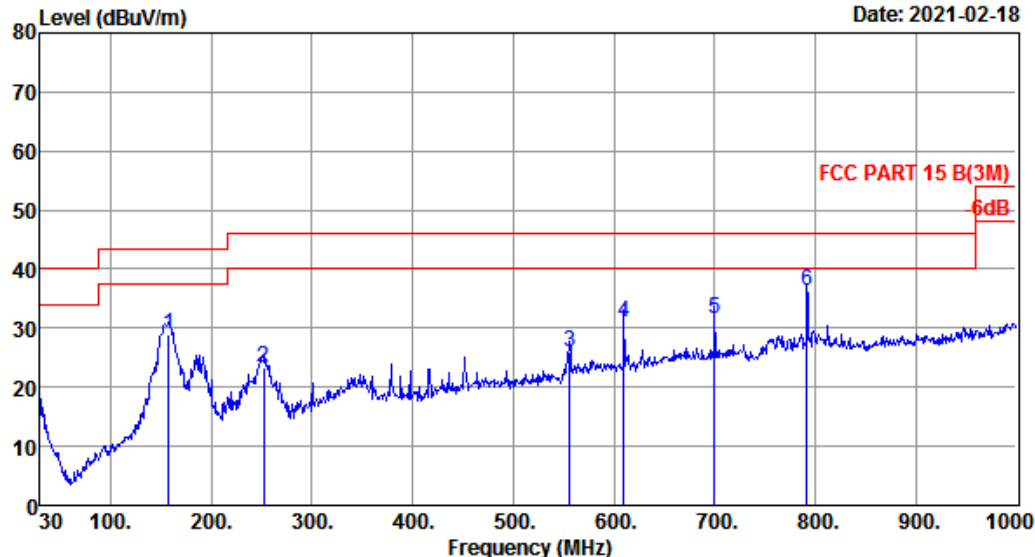

Site no. : 1# 966 Chamber Data no. : 8
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 H18650CH-4S2P+RC500-KN-11630
 KA3601A-2401200US

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	158.04	11.30	1.13	16.63	29.06	43.50	14.44	QP
2	252.13	12.84	1.64	8.85	23.33	46.00	22.67	QP
3	555.74	19.48	2.86	3.53	25.87	46.00	20.13	QP
4	610.06	20.60	3.03	7.32	30.95	46.00	15.05	QP
5	700.27	21.70	3.28	6.68	31.66	46.00	14.34	QP
6	791.45	22.72	3.56	9.90	36.18	46.00	9.82	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 9

File: \\Emc-966-1\\test data\\2021\\RFIL\\Le Sheng.EM6 (16)

Date: 2021-02-18

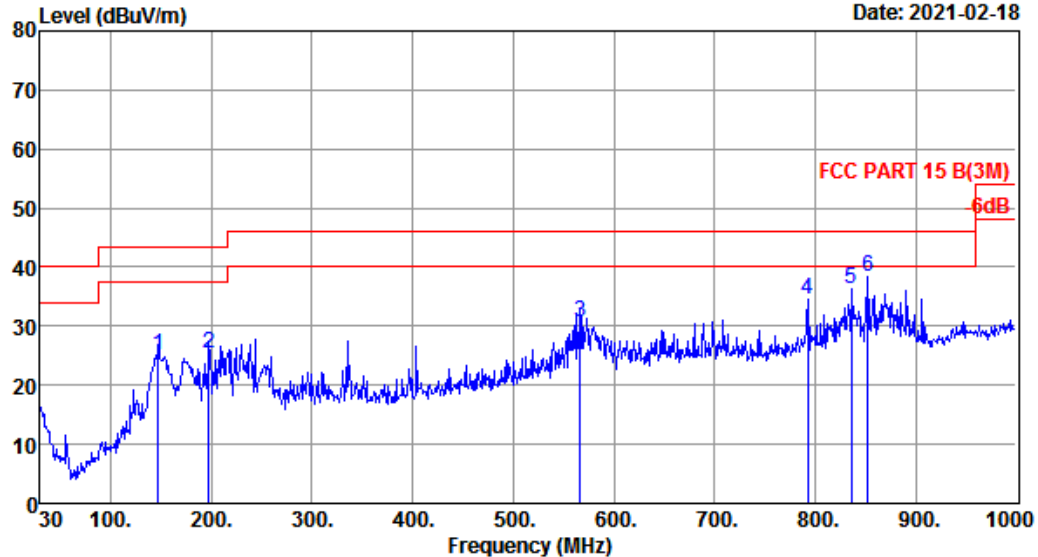

Site no. : 1# 966 Chamber Data no. : 9
Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
Engineer : Zzb
EUT : Robot Vacuum cleaner
Power : DC 14.52V From Battery
M/N : L2050
Test Mode : TX Mode
ICR-26J-4S2P-V3+RC500-KN-11630

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	147.37	11.66	1.07	12.24	24.97	43.50	18.53	QP
2	197.81	8.56	1.26	15.55	25.37	43.50	18.13	QP
3	566.41	19.86	2.87	8.03	30.76	46.00	15.24	QP
4	792.42	22.74	3.55	8.14	34.43	46.00	11.57	QP
5	836.07	23.46	3.71	9.11	36.28	46.00	9.72	QP
6	852.56	23.35	3.72	11.20	38.27	46.00	7.73	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 10

File: \\Emc-966-1\\test data\\2021\\RFIL\\Le Sheng.EM6 (16)

Date: 2021-02-18

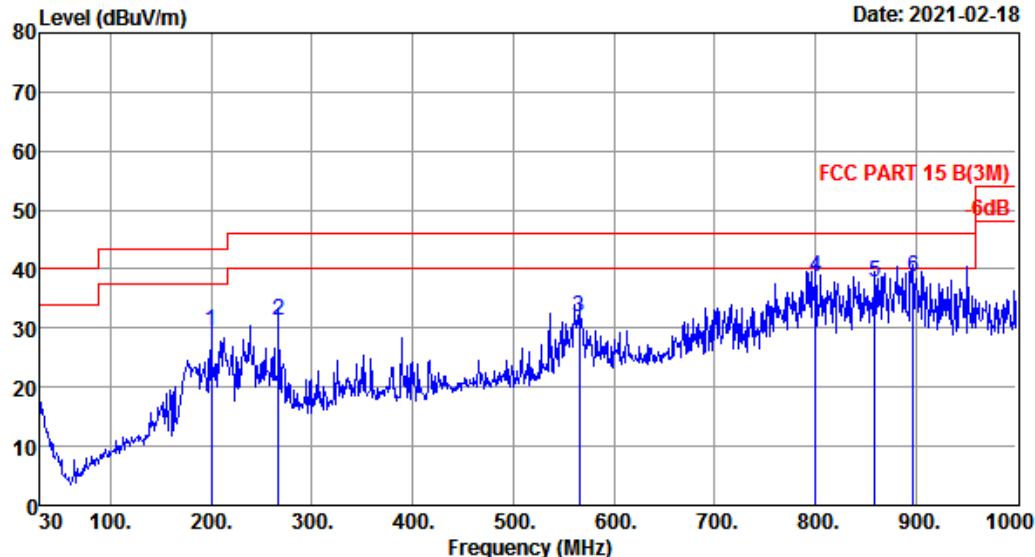

Site no. : 1# 966 Chamber Data no. : 10
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 14.52V From Battery
 M/N : L2050
 Test Mode : TX Mode
 ICR-26J-4S2P-V3+RC500-KN-11630

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	199.75	8.40	1.28	19.82	29.50	43.50	14.00	QP
2	266.68	13.30	1.72	16.21	31.23	46.00	14.77	QP
3	565.44	19.85	2.87	9.23	31.95	46.00	14.05	QP
4	800.18	22.90	3.58	12.26	38.74	46.00	7.26	QP
5	859.35	23.92	3.76	9.97	37.65	46.00	8.35	QP
6	897.18	23.90	3.88	10.89	38.67	46.00	7.33	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 11

File: \\Emc-966-1\test data\2021\RFIL\Le Sheng.EM6 (16)

Date: 2021-02-18

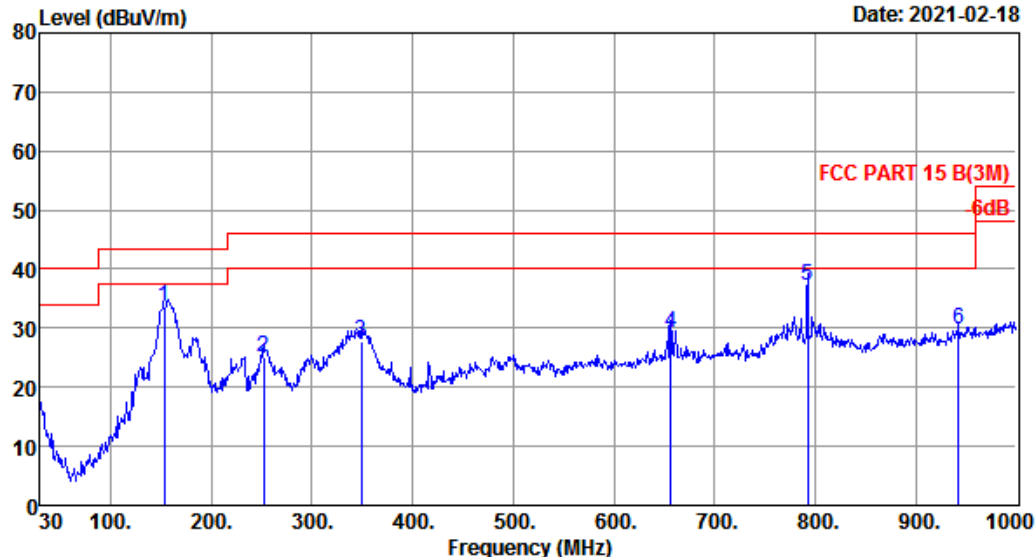

Site no. : 1# 966 Chamber Data no. : 11
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 ICR-26J-4S2P-V3+RC500-KN-11630
 MS1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	153.19	11.42	1.10	21.10	33.62	43.50	9.88	QP
2	252.13	12.84	1.64	10.65	25.13	46.00	20.87	QP
3	349.13	15.33	2.10	10.25	27.68	46.00	18.32	QP
4	656.62	21.54	3.23	4.50	29.27	46.00	16.73	QP
5	792.42	22.74	3.55	10.91	37.20	46.00	8.80	QP
6	942.77	24.46	4.42	0.93	29.81	46.00	16.19	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 12

File: \\Emc-966-1\\test data\\2021\\RFIL\\Le Sheng.EM6 (16)

Date: 2021-02-18

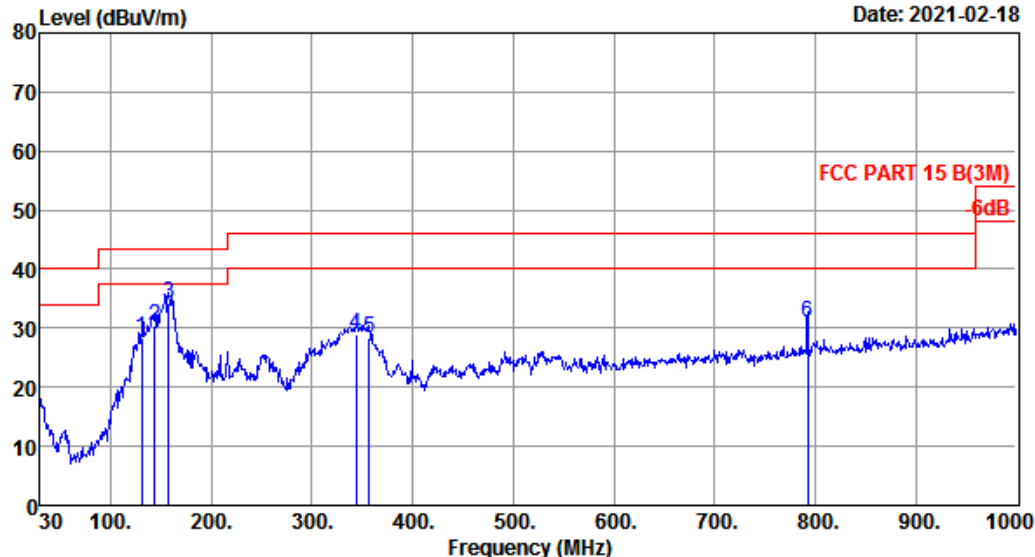

Site no. : 1# 966 Chamber Data no. : 12
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 ICR-26J-4S2P-V3+RC500-KN-11630
 MS1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	130.88	11.68	0.98	15.78	28.44	43.50	15.06	QP
2	143.49	11.97	1.06	17.33	30.36	43.50	13.14	QP
3	158.04	11.30	1.13	21.67	34.10	43.50	9.40	QP
4	344.28	14.98	2.07	11.79	28.84	46.00	17.16	QP
5	356.89	15.26	2.15	10.89	28.30	46.00	17.70	QP
6	792.42	22.74	3.55	4.57	30.86	46.00	15.14	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 13

File: \\Emc-966-1\test data\2021\RFIL\Le Sheng.EM6 (16)

Date: 2021-02-18

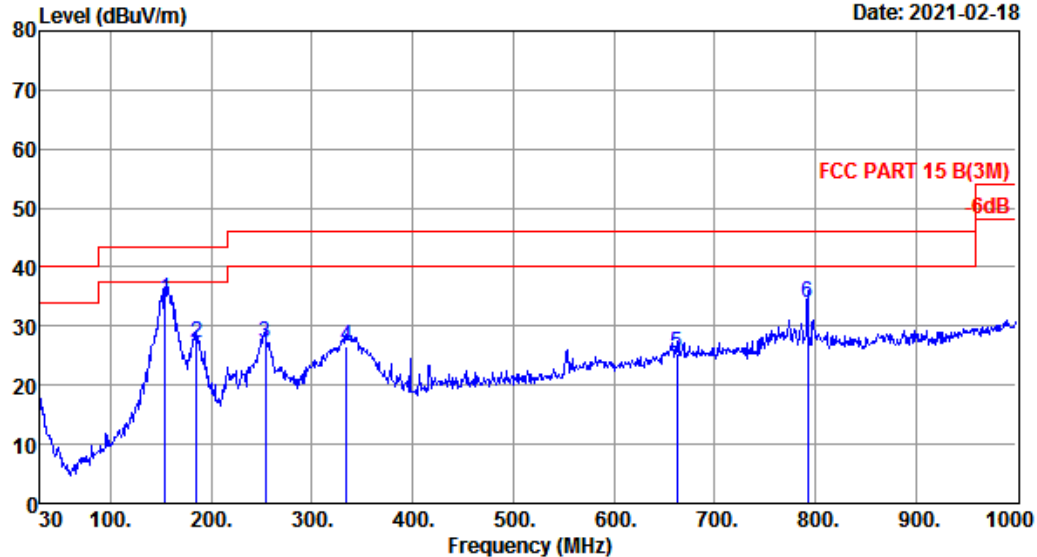

Site no. : 1# 966 Chamber Data no. : 13
Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
Engineer : Zzb
EUT : Robot Vacuum cleaner
Power : DC 24V From Adapter Input AC 120V/60Hz
M/N : L2050
Test Mode : TX Mode
ICR-26J-4S2P-V3+RC500-KN-11630
KA3601A-2401200US

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	154.16	11.36	1.11	22.04	34.51	43.50	8.99	QP
2	185.20	9.20	1.23	16.75	27.18	43.50	16.32	QP
3	254.07	13.28	1.65	12.16	27.09	46.00	18.91	QP
4	334.58	14.65	2.02	10.04	26.71	46.00	19.29	QP
5	662.44	21.63	3.23	0.50	25.36	46.00	20.64	QP
6	792.42	22.74	3.55	7.65	33.94	46.00	12.06	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 14

File: \\Emc-966-1\\test data\\2021\\RFIL\\Le Sheng.EM6 (16)

Date: 2021-02-18

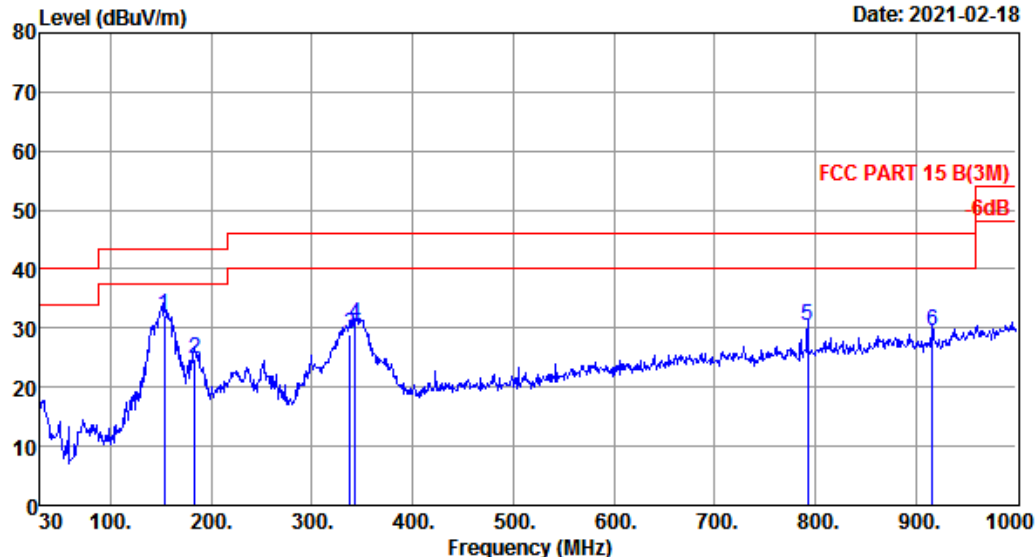

Site no. : 1# 966 Chamber Data no. : 14
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 ICR-26J-4S2P-V3+RC500-KN-11630
 KA3601A-2401200US

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	153.19	11.42	1.10	19.72	32.24	43.50	11.26	QP
2	183.26	9.32	1.22	14.31	24.85	43.50	18.65	QP
3	337.49	14.67	2.04	12.24	28.95	46.00	17.05	QP
4	343.31	14.91	2.07	13.74	30.72	46.00	15.28	QP
5	792.42	22.74	3.55	4.11	30.40	46.00	15.60	QP
6	916.58	24.00	3.99	1.64	29.63	46.00	16.37	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 15

File: \\Emc-966-1\test data\2021\RFIL\Le Sheng.EM6 (16)

Date: 2021-02-18

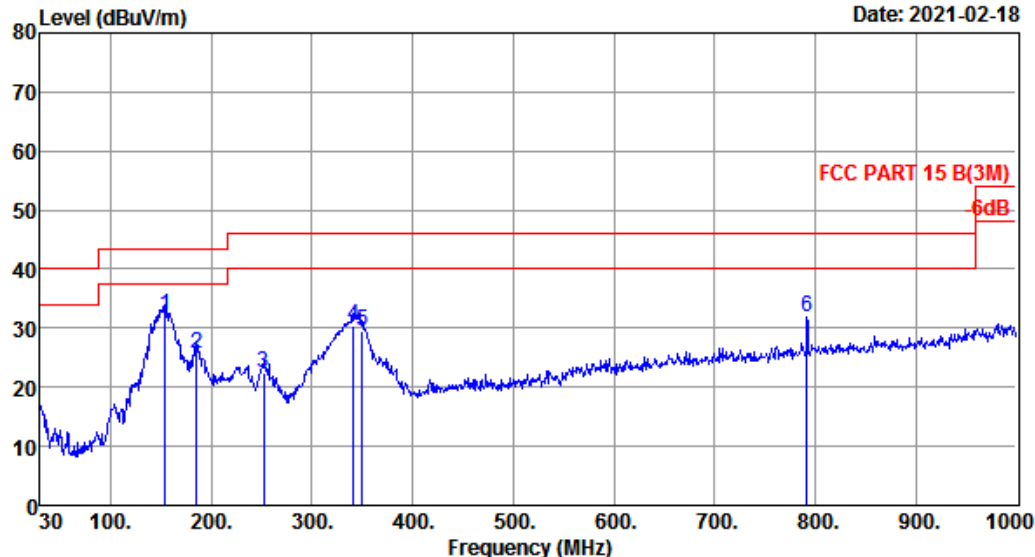

Site no. : 1# 966 Chamber Data no. : 15
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 ICR-26J-4S2P-V3+RC500-KN-11630
 DBS036A-2401200U

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	154.16	11.36	1.11	19.61	32.08	43.50	11.42	QP
2	185.20	9.20	1.23	15.18	25.61	43.50	17.89	QP
3	252.13	12.84	1.64	8.04	22.52	46.00	23.48	QP
4	341.37	14.77	2.06	13.54	30.37	46.00	15.63	QP
5	350.10	15.40	2.11	11.90	29.41	46.00	16.59	QP
6	791.45	22.72	3.56	5.61	31.89	46.00	14.11	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 16

File: \\Emc-966-1\test data\2021\RFIL\Le Sheng.EM6 (16)

Date: 2021-02-18

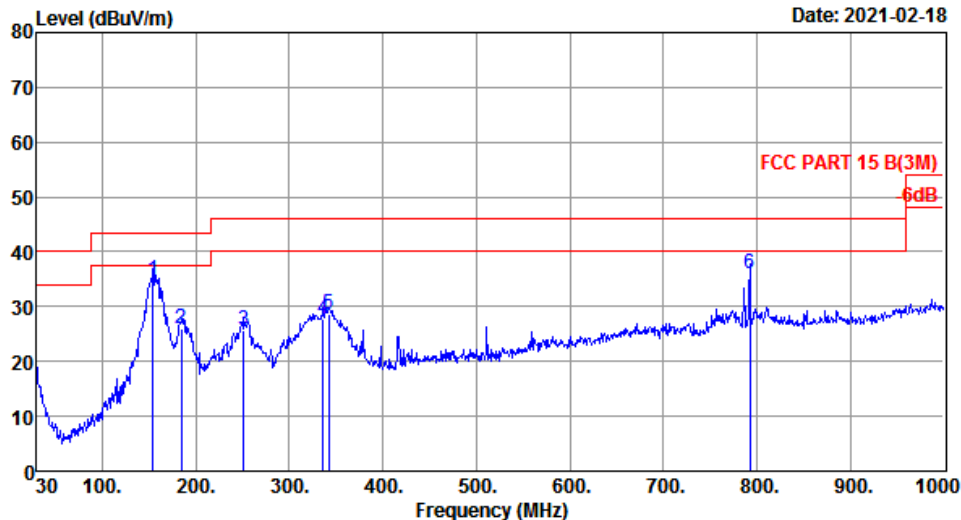

Site no. : 1# 966 Chamber Data no. : 16
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:27.1';Humi:50%;Press:101.52kPa
 Engineer : Zzb
 EUT : Robot Vacuum cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : TX Mode
 ICR-26J-4S2P-V3+RC500-KN-11630
 DBS036A-2401200U

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	154.16	11.36	1.11	22.41	34.88	43.50	8.62	QP
2	184.23	9.26	1.22	15.41	25.89	43.50	17.61	QP
3	251.16	12.62	1.63	11.51	25.76	46.00	20.24	QP
4	336.52	14.66	2.04	11.16	27.86	46.00	18.14	QP
5	342.34	14.84	2.06	11.81	28.71	46.00	17.29	QP
6	792.42	22.74	3.55	9.58	35.87	46.00	10.13	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test, only the worst case was reported.

4. AC POWER LINE CONDUCTED EMISSIONS


4.1. Limit

Frequency			Maximum RF Line Voltage	
			Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz	~	500kHz	66 ~ 56*	56 ~ 46*
500kHz	~	5MHz	56	46
5MHz	~	30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.2. Test Setup

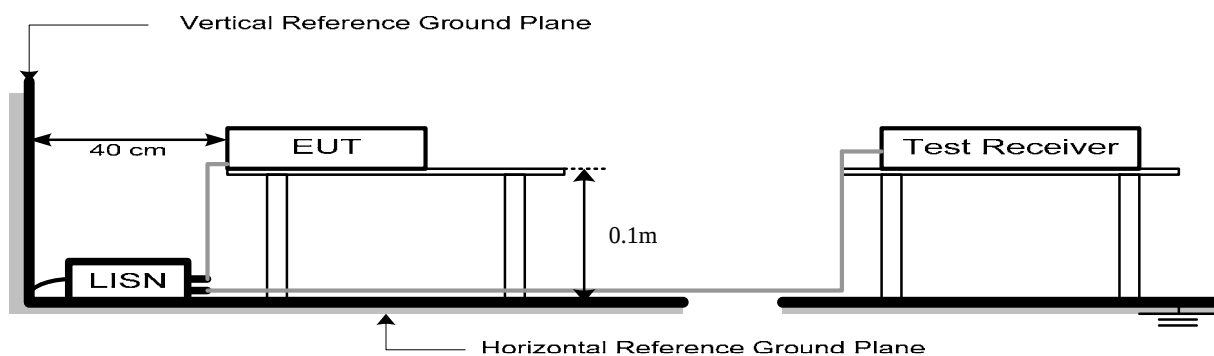

4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold


4.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 10cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 9.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

4.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

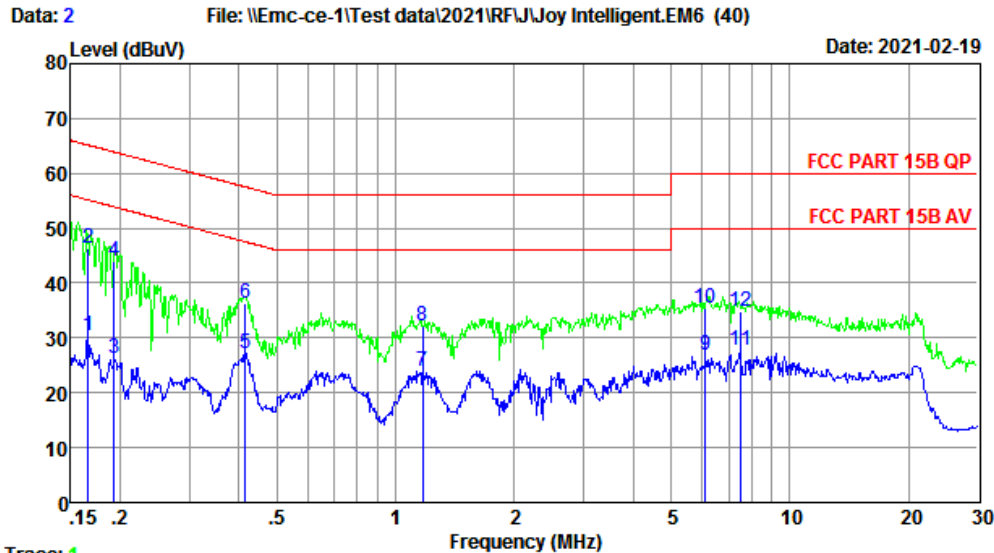

Trace: 1

Site no : 844 Shield Room Data no. : 2

Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : LINE

Limit : FCC PART 15B QP

Engineer : MRS

EUT : Robot Vacuum Cleaner

Power : DC 24V From Adapter Input AC 240V/60Hz

M/N : L2050

Test Mode : Charging

H18650CH-4S2P+RC500-KN-11630

KA3601A-2401200US

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1659	9.79	9.69	10.80	30.28	55.16	24.88	Average
2	0.1659	9.79	9.69	26.73	46.21	65.16	18.95	QP
3	0.1934	9.80	9.77	6.64	26.21	53.89	27.68	Average
4	0.1934	9.80	9.77	24.33	43.90	63.89	19.99	QP
5	0.4148	9.88	9.92	7.47	27.27	47.55	20.28	Average
6	0.4148	9.88	9.92	16.41	36.21	57.55	21.34	QP
7	1.1719	9.79	9.94	4.31	24.04	46.00	21.96	Average
8	1.1719	9.79	9.94	12.34	32.07	56.00	23.93	QP
9	6.1209	9.86	10.03	6.98	26.87	50.00	23.13	Average
10	6.1209	9.86	10.03	15.50	35.39	60.00	24.61	QP
11	7.4860	9.86	10.04	7.81	27.71	50.00	22.29	Average
12	7.4860	9.86	10.04	14.95	34.85	60.00	25.15	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 4

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

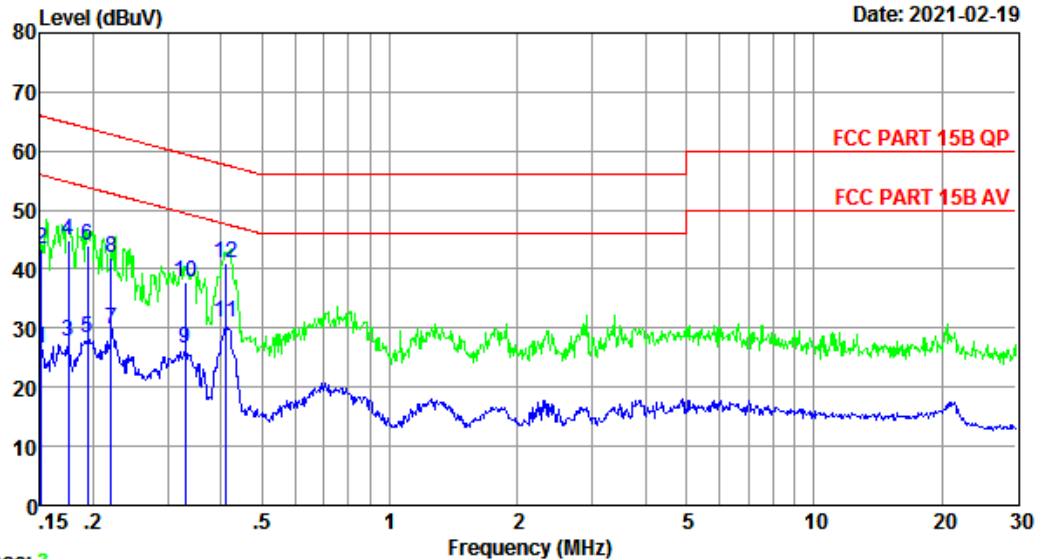

Trace: 3

Site no : 844 Shield Room Data no. : 4
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : L2050
 Test Mode : Charging
 H18650CH-4S2P+RC500-KN-11630
 KA3601A-2401200US


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1508	9.62	9.69	7.27	26.58	55.96	29.38	Average
2	0.1508	9.62	9.69	24.20	43.51	65.96	22.45	QP
3	0.1749	9.69	9.77	8.41	27.87	54.72	26.85	Average
4	0.1749	9.69	9.77	25.33	44.79	64.72	19.93	QP
5	0.1945	9.69	9.77	8.96	28.42	53.84	25.42	Average
6	0.1945	9.69	9.77	24.43	43.89	63.84	19.95	QP
7	0.2208	9.70	9.84	10.33	29.87	52.79	22.92	Average
8	0.2208	9.70	9.84	22.27	41.81	62.79	20.98	QP
9	0.3303	9.74	9.92	6.80	26.46	49.44	22.98	Average
10	0.3303	9.74	9.92	18.20	37.86	59.44	21.58	QP
11	0.4127	9.76	9.92	11.25	30.93	47.59	16.66	Average
12	0.4127	9.76	9.92	21.29	40.97	57.59	16.62	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 6

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

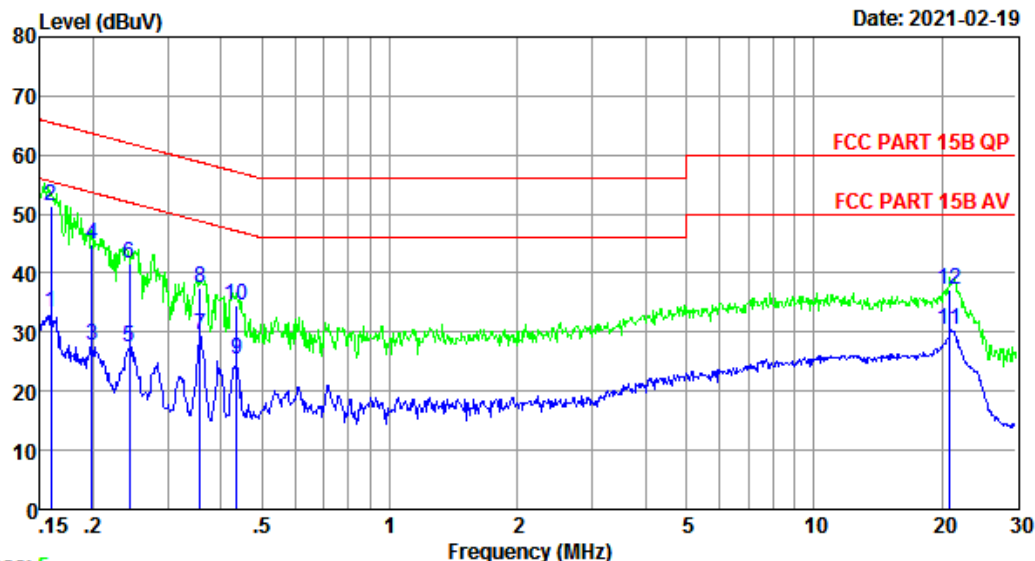

Trace: 5

Site no : 844 Shield Room Data no. : 6
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : Charging
 H18650CH-4S2P+RC500-KN-11630
 KA3601A-2401200US

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1590	9.79	9.69	13.95	33.43	55.52	22.09	Average
2	0.1590	9.79	9.69	31.99	51.47	65.52	14.05	QP
3	0.1986	9.80	9.77	8.21	27.78	53.67	25.89	Average
4	0.1986	9.80	9.77	25.33	44.90	63.67	18.77	QP
5	0.2429	9.70	9.92	7.81	27.43	52.00	24.57	Average
6	0.2429	9.70	9.92	22.00	41.62	62.00	20.38	QP
7	0.3577	9.76	9.92	9.75	29.43	48.78	19.35	Average
8	0.3577	9.76	9.92	17.79	37.47	58.78	21.31	QP
9	0.4351	9.88	9.92	5.61	25.41	47.15	21.74	Average
10	0.4351	9.88	9.92	14.67	34.47	57.15	22.68	QP
11	20.9243	9.87	10.16	10.43	30.46	50.00	19.54	Average
12	20.9243	9.87	10.16	17.19	37.22	60.00	22.78	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 8

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

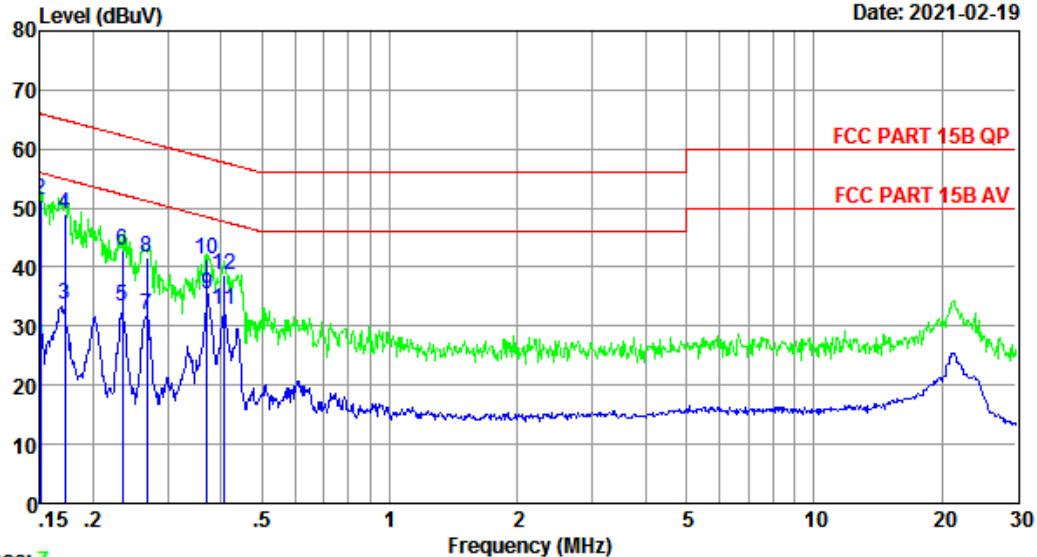

Trace: 7

Site no : 844 Shield Room Data no. : 8
Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
Limit : FCC PART 15B QP
Engineer : MRS
EUT : Robot Vacuum Cleaner
Power : DC 24V From Adapter Input AC 120V/60Hz
M/N : L2050
Test Mode : Charging
H18650CH-4S2P+RC500-KN-11630
KA3601A-2401200US

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.62	9.69	7.28	26.59	56.00	29.41	Average
2	0.1500	9.62	9.69	32.20	51.51	66.00	14.49	QP
3	0.1712	9.62	9.69	14.26	33.57	54.90	21.33	Average
4	0.1712	9.62	9.69	29.62	48.93	64.90	15.97	QP
5	0.2341	9.71	9.92	13.63	33.26	52.30	19.04	Average
6	0.2341	9.71	9.92	23.29	42.92	62.30	19.38	QP
7	0.2672	9.72	9.92	12.14	31.78	51.20	19.42	Average
8	0.2672	9.72	9.92	22.01	41.65	61.20	19.55	QP
9	0.3712	9.75	9.92	15.79	35.46	48.47	13.01	Average
10	0.3712	9.75	9.92	21.74	41.41	58.47	17.06	QP
11	0.4061	9.76	9.92	13.11	32.79	47.73	14.94	Average
12	0.4061	9.76	9.92	19.03	38.71	57.73	19.02	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 10

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

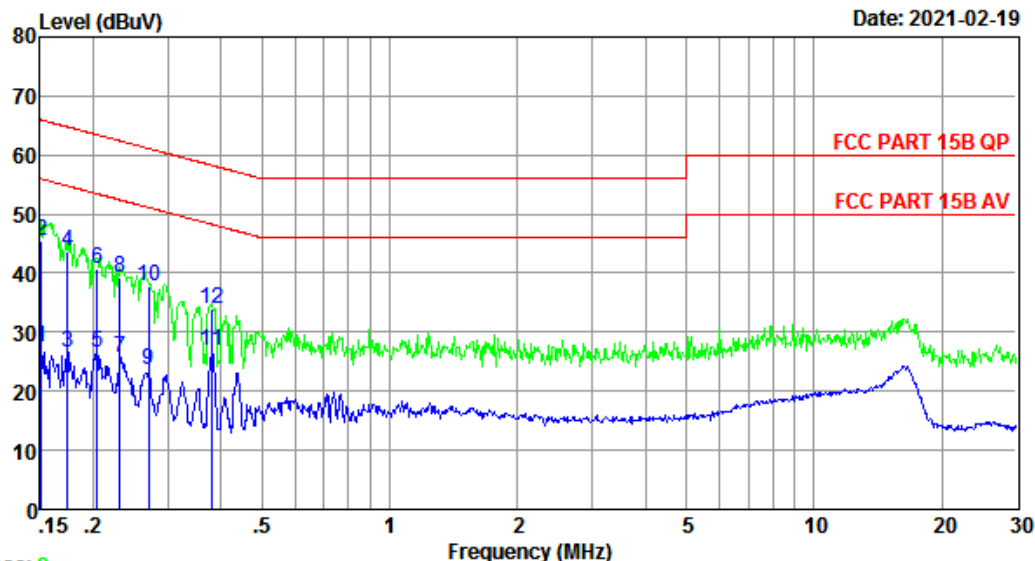

Trace: 9

Site no : 844 Shield Room Data no. : 10
Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
Limit : FCC PART 15B QP
Engineer : MRS
EUT : Robot Vacuum Cleaner
Power : DC 24V From Adapter Input AC 120V/60Hz
M/N : L2050
Test Mode : Charging
H18650CH-4S2P+RC500-KN-11630
DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1508	9.62	9.69	8.28	27.59	55.96	28.37	Average
2	0.1508	9.62	9.69	26.20	45.51	65.96	20.45	QP
3	0.1740	9.69	9.77	7.07	26.53	54.77	28.24	Average
4	0.1740	9.69	9.77	24.33	43.79	64.77	20.98	QP
5	0.2040	9.70	9.84	7.07	26.61	53.45	26.84	Average
6	0.2040	9.70	9.84	21.13	40.67	63.45	22.78	QP
7	0.2316	9.70	9.84	6.29	25.83	52.39	26.56	Average
8	0.2316	9.70	9.84	19.67	39.21	62.39	23.18	QP
9	0.2701	9.72	9.92	3.93	23.57	51.12	27.55	Average
10	0.2701	9.72	9.92	18.01	37.65	61.12	23.47	QP
11	0.3811	9.75	9.92	7.24	26.91	48.25	21.34	Average
12	0.3811	9.75	9.92	14.30	33.97	58.25	24.28	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 12

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

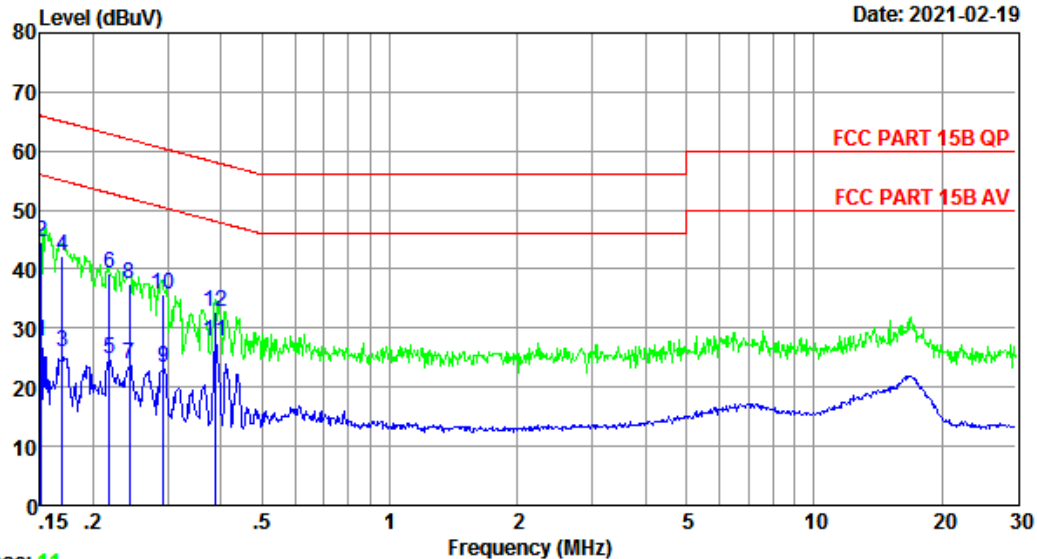

Trace: 11

Site no : 844 Shield Room Data no. : 12
Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
Limit : FCC PART 15B QP
Engineer : MRS
EUT : Robot Vacuum Cleaner
Power : DC 24V From Adapter Input AC 120V/60Hz
M/N : L2050
Test Mode : Charging
H18650CH-4S2P+RC500-KN-11630
DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1508	9.79	9.69	8.13	27.61	55.96	28.35	Average
2	0.1508	9.79	9.69	25.19	44.67	65.96	21.29	QP
3	0.1694	9.79	9.69	6.64	26.12	54.99	28.87	Average
4	0.1694	9.79	9.69	22.69	42.17	64.99	22.82	QP
5	0.2185	9.75	9.84	5.31	24.90	52.88	27.98	Average
6	0.2185	9.75	9.84	19.69	39.28	62.88	23.60	QP
7	0.2429	9.70	9.92	4.34	23.96	52.00	28.04	Average
8	0.2429	9.70	9.92	17.90	37.52	62.00	24.48	QP
9	0.2924	9.65	9.92	3.64	23.21	50.46	27.25	Average
10	0.2924	9.65	9.92	16.10	35.67	60.46	24.79	QP
11	0.3893	9.84	9.92	7.99	27.75	48.08	20.33	Average
12	0.3893	9.84	9.92	12.95	32.71	58.08	25.37	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 14

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

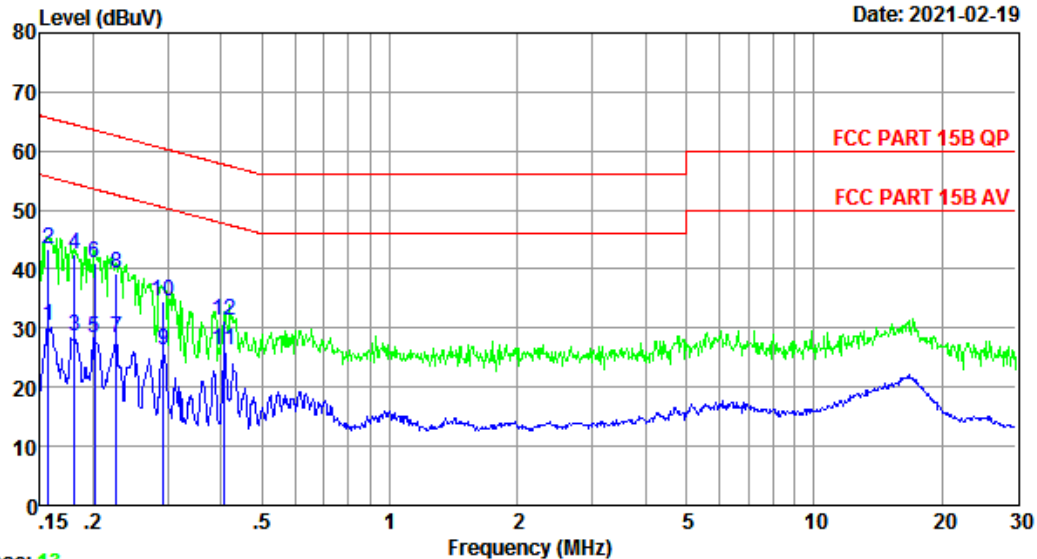

Trace: 13

Site no : 844 Shield Room Data no. : 14
Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
Limit : FCC PART 15B QP
Engineer : MRS
EUT : Robot Vacuum Cleaner
Power : DC 24V From Adapter Input AC 240V/60Hz
M/N : L2050
Test Mode : Charging
H18650CH-4S2P+RC500-KN-11630
DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.1565	9.79	9.69	10.92	30.40	55.65	25.25	Average
2	0.1565	9.79	9.69	23.99	43.47	65.65	22.18	QP
3	0.1806	9.80	9.77	8.95	28.52	54.46	25.94	Average
4	0.1806	9.80	9.77	23.00	42.57	64.46	21.89	QP
5	0.2018	9.80	9.77	8.72	28.29	53.54	25.25	Average
6	0.2018	9.80	9.77	21.43	41.00	63.54	22.54	QP
7	0.2268	9.75	9.84	8.78	28.37	52.57	24.20	Average
8	0.2268	9.75	9.84	19.67	39.26	62.57	23.31	QP
9	0.2924	9.65	9.92	6.63	26.20	50.46	24.26	Average
10	0.2924	9.65	9.92	15.01	34.58	60.46	25.88	QP
11	0.4083	9.84	9.92	6.56	26.32	47.68	21.36	Average
12	0.4083	9.84	9.92	11.61	31.37	57.68	26.31	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 16

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

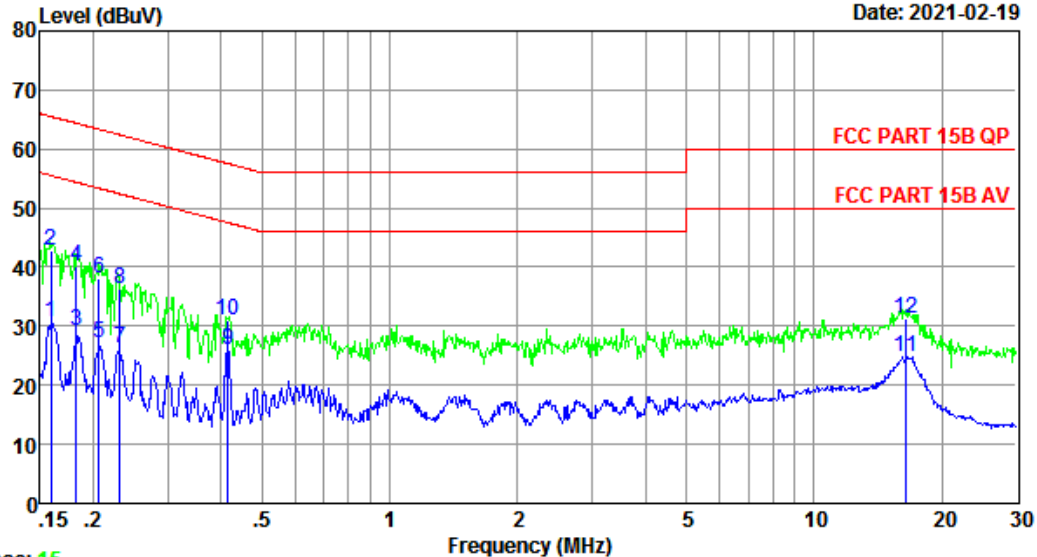

Trace: 15

Site no : 844 Shield Room Data no. : 16
Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
Limit : FCC PART 15B QP
Engineer : MRS
EUT : Robot Vacuum Cleaner
Power : DC 24V From Adapter Input AC 240V/60Hz
M/N : L2050
Test Mode : Charging
H18650CH-4S2P+RC500-KN-11630
DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1590	9.62	9.69	11.40	30.71	55.52	24.81	Average
2	0.1590	9.62	9.69	23.46	42.77	65.52	22.75	QP
3	0.1825	9.69	9.77	9.65	29.11	54.37	25.26	Average
4	0.1825	9.69	9.77	20.71	40.17	64.37	24.20	QP
5	0.2061	9.70	9.84	7.69	27.23	53.36	26.13	Average
6	0.2061	9.70	9.84	18.67	38.21	63.36	25.15	QP
7	0.2316	9.70	9.84	6.76	26.30	52.39	26.09	Average
8	0.2316	9.70	9.84	16.67	36.21	62.39	26.18	QP
9	0.4148	9.77	9.92	6.30	25.99	47.55	21.56	Average
10	0.4148	9.77	9.92	11.22	30.91	57.55	26.64	QP
11	16.4856	9.78	10.14	4.92	24.84	50.00	25.16	Average
12	16.4856	9.78	10.14	11.29	31.21	60.00	28.79	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 18

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

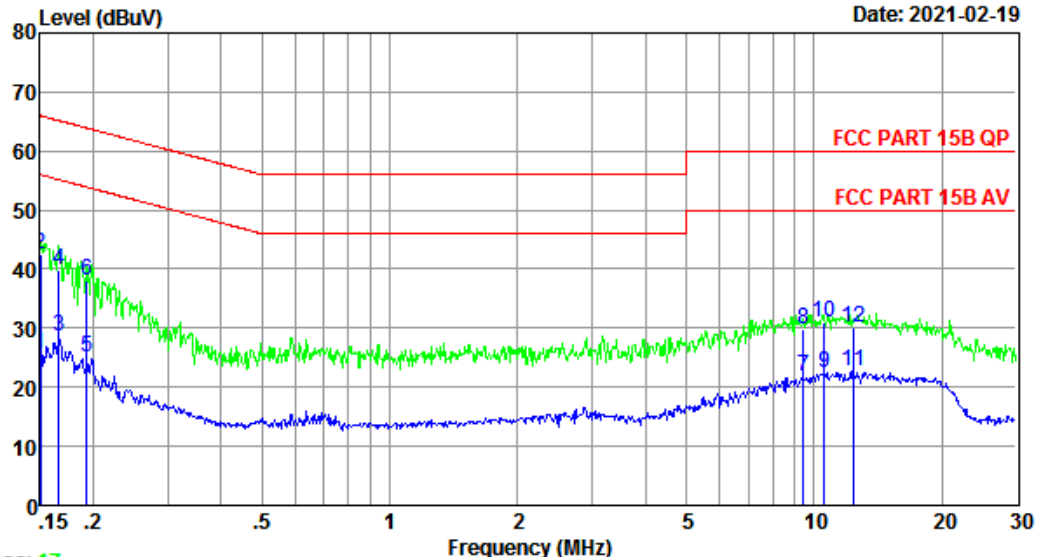

Trace: 17

Site no : 844 Shield Room Data no. : 18
Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
Limit : FCC PART 15B QP
Engineer : MRS
EUT : Robot Vacuum Cleaner
Power : AC 120V/60Hz
M/N : L2050
Test Mode : Charging
H18650CH-4S2P+RC500-KN-11630
MS1

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.79	9.69	6.06	25.54	56.00	30.46	Average
2	0.1500	9.79	9.69	23.03	42.51	66.00	23.49	QP
3	0.1659	9.79	9.69	9.30	28.78	55.16	26.38	Average
4	0.1659	9.79	9.69	20.23	39.71	65.16	25.45	QP
5	0.1934	9.80	9.77	5.58	25.15	53.89	28.74	Average
6	0.1934	9.80	9.77	18.54	38.11	63.89	25.78	QP
7	9.4514	9.86	10.07	1.78	21.71	50.00	28.29	Average
8	9.4514	9.86	10.07	10.00	29.93	60.00	30.07	QP
9	10.5638	9.86	10.08	2.56	22.50	50.00	27.50	Average
10	10.5638	9.86	10.08	11.09	31.03	60.00	28.97	QP
11	12.3837	9.86	10.10	2.77	22.73	50.00	27.27	Average
12	12.3837	9.86	10.10	10.20	30.16	60.00	29.84	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 20

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

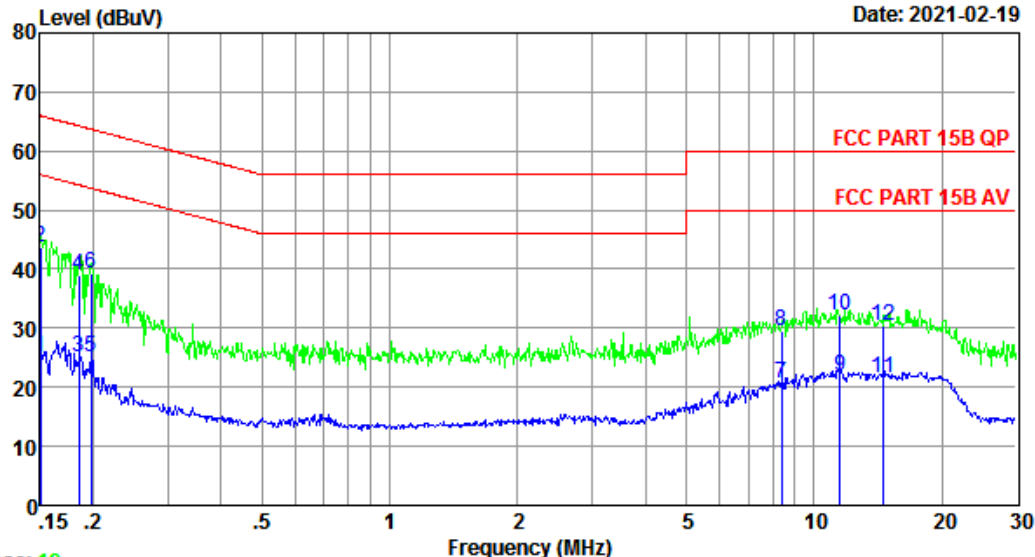

Trace: 19

Site no : 844 Shield Room Data no. : 20
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : L2050
 Test Mode : Charging
 H18650CH-4S2P+RC500-KN-11630
 MS1

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.62	9.69	5.79	25.10	56.00	30.90	Average
2	0.1500	9.62	9.69	24.39	43.70	66.00	22.30	QP
3	0.1854	9.69	9.77	5.71	25.17	54.24	29.07	Average
4	0.1854	9.69	9.77	19.65	39.11	64.24	25.13	QP
5	0.1976	9.69	9.77	5.54	25.00	53.71	28.71	Average
6	0.1976	9.69	9.77	19.71	39.17	63.71	24.54	QP
7	8.3671	9.86	10.05	0.67	20.58	50.00	29.42	Average
8	8.3671	9.86	10.05	9.49	29.40	60.00	30.60	QP
9	11.4983	9.86	10.08	1.76	21.70	50.00	28.30	Average
10	11.4983	9.86	10.08	12.33	32.27	60.00	27.73	QP
11	14.5942	9.86	10.12	1.63	21.61	50.00	28.39	Average
12	14.5942	9.86	10.12	10.33	30.31	60.00	29.69	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 22

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

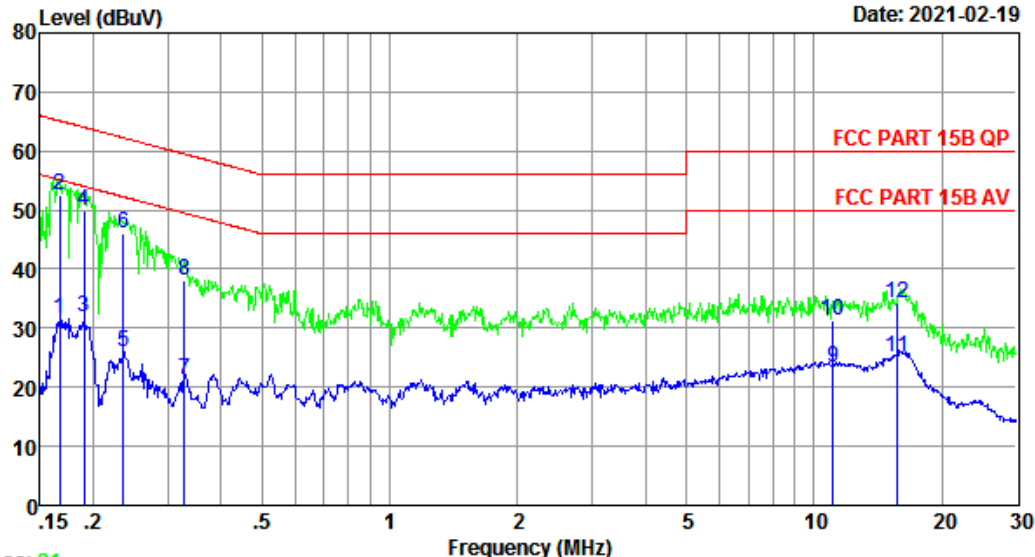

Trace: 21

Site no : 844 Shield Room Data no. : 22
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1668	9.62	9.69	12.28	31.59	55.12	23.53	Average
2	0.1668	9.62	9.69	33.20	52.51	65.12	12.61	QP
3	0.1904	9.69	9.77	12.47	31.93	54.02	22.09	Average
4	0.1904	9.69	9.77	30.51	49.97	64.02	14.05	QP
5	0.2353	9.71	9.92	6.32	25.95	52.26	26.31	Average
6	0.2353	9.71	9.92	26.28	45.91	62.26	16.35	QP
7	0.3286	9.74	9.92	1.58	21.24	49.49	28.25	Average
8	0.3286	9.74	9.92	18.50	38.16	59.49	21.33	QP
9	11.0797	9.86	10.08	3.39	23.33	50.00	26.67	Average
10	11.0797	9.86	10.08	11.33	31.27	60.00	28.73	QP
11	15.7179	9.82	10.13	5.21	25.16	50.00	24.84	Average
12	15.7179	9.82	10.13	14.20	34.15	60.00	25.85	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 24

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

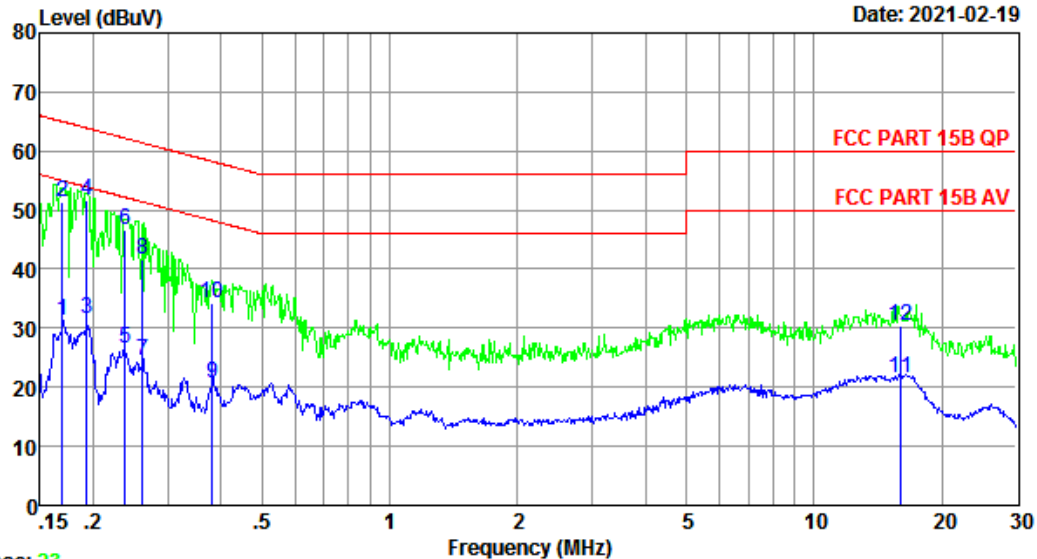

Site no : 844 Shield Room Data no. : 24
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1694	9.79	9.69	11.95	31.43	54.99	23.56	Average
2	0.1694	9.79	9.69	31.99	51.47	64.99	13.52	QP
3	0.1934	9.80	9.77	12.10	31.67	53.89	22.22	Average
4	0.1934	9.80	9.77	32.04	51.61	63.89	12.28	QP
5	0.2378	9.70	9.92	7.08	26.70	52.17	25.47	Average
6	0.2378	9.70	9.92	27.15	46.77	62.17	15.40	QP
7	0.2616	9.70	9.92	4.92	24.54	51.38	26.84	Average
8	0.2616	9.70	9.92	22.10	41.72	61.38	19.66	QP
9	0.3811	9.76	9.92	0.88	20.56	48.25	27.69	Average
10	0.3811	9.76	9.92	14.51	34.19	58.25	24.06	QP
11	15.9698	9.87	10.13	1.44	21.44	50.00	28.56	Average
12	15.9698	9.87	10.13	10.40	30.40	60.00	29.60	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 26

File: \\Emc-ce-1\Test data\2021\RF\Joy Intelligent.EM6 (40)

Date: 2021-02-19

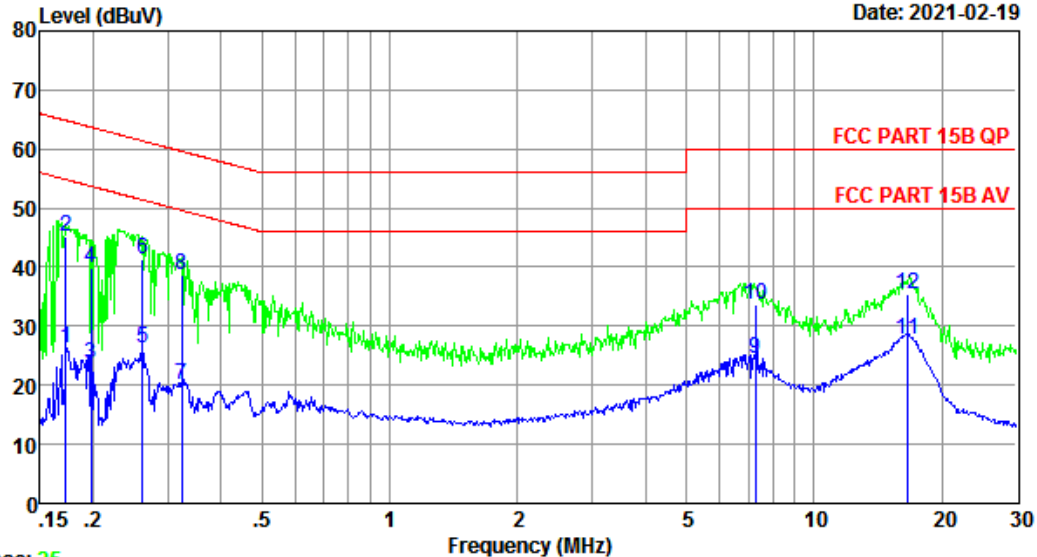

Trace: 25

Site no : 844 Shield Room Data no. : 26
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 DBS036A-2401200U


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1722	9.79	9.69	6.69	26.17	54.86	28.69	Average
2	0.1722	9.79	9.69	25.63	45.11	64.86	19.75	QP
3	0.1976	9.80	9.77	3.97	23.54	53.71	30.17	Average
4	0.1976	9.80	9.77	20.43	40.00	63.71	23.71	QP
5	0.2616	9.70	9.92	6.68	26.30	51.38	25.08	Average
6	0.2616	9.70	9.92	21.75	41.37	61.38	20.01	QP
7	0.3234	9.60	9.92	0.48	20.00	49.62	29.62	Average
8	0.3234	9.60	9.92	19.18	38.70	59.62	20.92	QP
9	7.2903	9.86	10.04	4.69	24.59	50.00	25.41	Average
10	7.2903	9.86	10.04	13.64	33.54	60.00	26.46	QP
11	16.6612	9.87	10.13	7.85	27.85	50.00	22.15	Average
12	16.6612	9.87	10.13	15.46	35.46	60.00	24.54	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 28

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

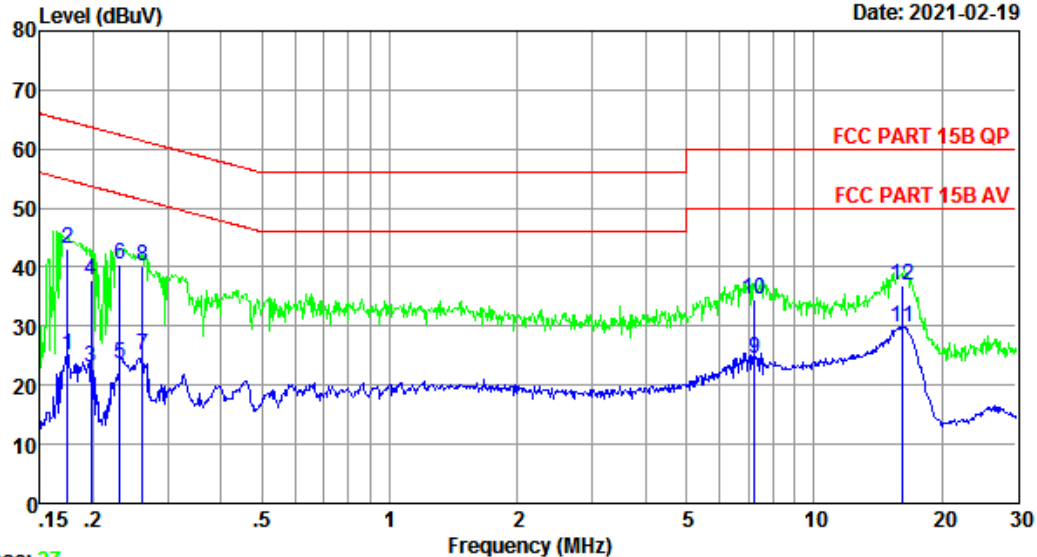

Trace: 27

Site no : 844 Shield Room Data no. : 28
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1740	9.69	9.77	5.59	25.05	54.77	29.72	Average
2	0.1740	9.69	9.77	23.55	43.01	64.77	21.76	QP
3	0.1976	9.69	9.77	3.42	22.88	53.71	30.83	Average
4	0.1976	9.69	9.77	18.43	37.89	63.71	25.82	QP
5	0.2316	9.70	9.84	4.01	23.55	52.39	28.84	Average
6	0.2316	9.70	9.84	21.01	40.55	62.39	21.84	QP
7	0.2616	9.71	9.92	5.43	25.06	51.38	26.32	Average
8	0.2616	9.71	9.92	20.38	40.01	61.38	21.37	QP
9	7.2518	9.86	10.04	4.67	24.57	50.00	25.43	Average
10	7.2518	9.86	10.04	14.60	34.50	60.00	25.50	QP
11	16.2256	9.80	10.13	9.94	29.87	50.00	20.13	Average
12	16.2256	9.80	10.13	16.88	36.81	60.00	23.19	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 30

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

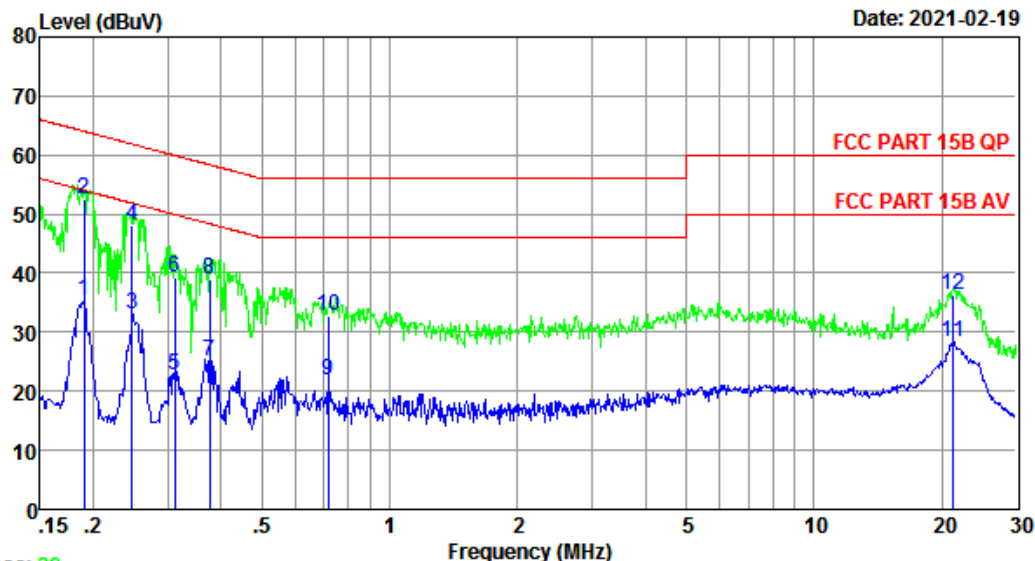

Trace: 29

Site no : 844 Shield Room Data no. : 30
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 KA3601A-2401200US

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1904	9.69	9.77	16.04	35.50	54.02	18.52	Average
2	0.1904	9.69	9.77	33.11	52.57	64.02	11.45	QP
3	0.2468	9.71	9.92	13.53	33.16	51.86	18.70	Average
4	0.2468	9.71	9.92	28.48	48.11	61.86	13.75	QP
5	0.3116	9.73	9.92	2.97	22.62	49.93	27.31	Average
6	0.3116	9.73	9.92	19.50	39.15	59.93	20.78	QP
7	0.3771	9.75	9.92	5.48	25.15	48.34	23.19	Average
8	0.3771	9.75	9.92	19.41	39.08	58.34	19.26	QP
9	0.7160	9.74	9.93	2.05	21.72	46.00	24.28	Average
10	0.7160	9.74	9.93	13.05	32.72	56.00	23.28	QP
11	21.2596	9.69	10.16	8.37	28.22	50.00	21.78	Average
12	21.2596	9.69	10.16	16.42	36.27	60.00	23.73	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 32

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

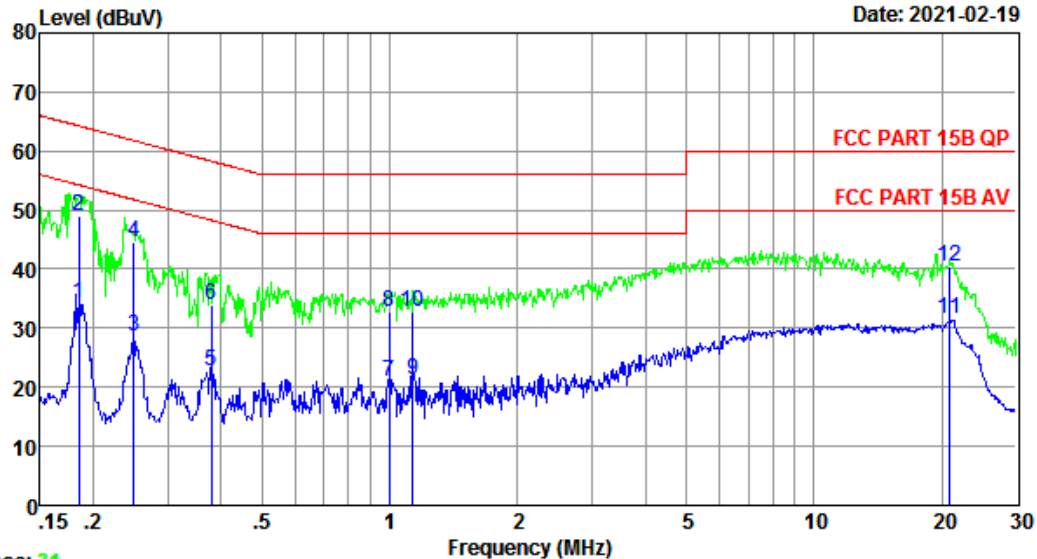

Trace: 31

Site no : 844 Shield Room Data no. : 32
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 KA3601A-2401200US

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1854	9.80	9.77	14.58	34.15	54.24	20.09	Average
2	0.1854	9.80	9.77	29.54	49.11	64.24	15.13	QP
3	0.2495	9.70	9.92	9.14	28.76	51.78	23.02	Average
4	0.2495	9.70	9.92	25.09	44.71	61.78	17.07	QP
5	0.3791	9.76	9.92	3.00	22.68	48.30	25.62	Average
6	0.3791	9.76	9.92	14.21	33.89	58.30	24.41	QP
7	0.9997	9.79	9.94	1.31	21.04	46.00	24.96	Average
8	0.9997	9.79	9.94	13.12	32.85	56.00	23.15	QP
9	1.1352	9.79	9.94	1.51	21.24	46.00	24.76	Average
10	1.1352	9.79	9.94	13.12	32.85	56.00	23.15	QP
11	20.9243	9.87	10.16	11.53	31.56	50.00	18.44	Average
12	20.9243	9.87	10.16	20.48	40.51	60.00	19.49	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 34

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

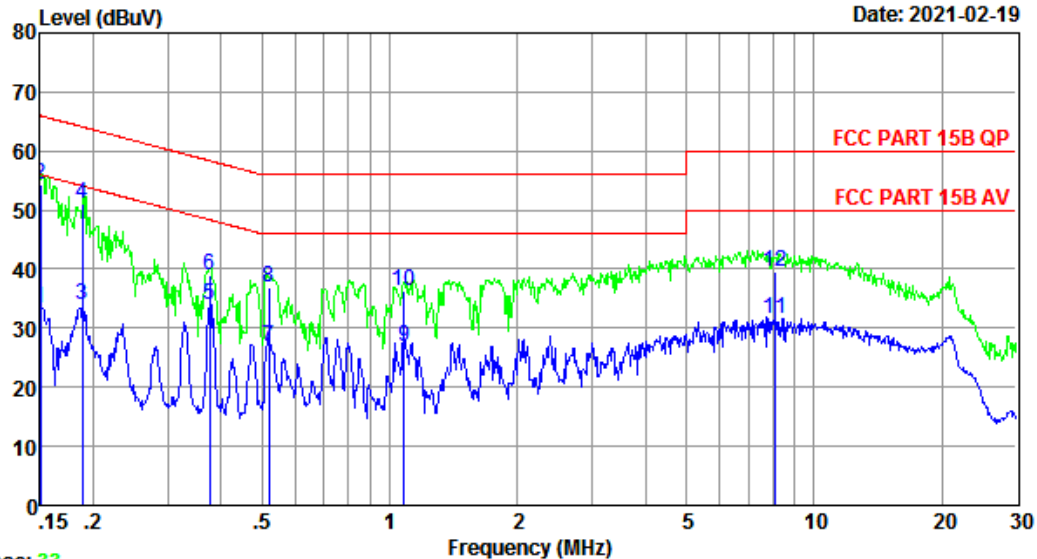

Trace: 33

Site no : 844 Shield Room Data no. : 34
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 KA3601A-2401200US


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.79	9.69	13.90	33.38	56.00	22.62	Average
2	0.1500	9.79	9.69	34.83	54.31	66.00	11.69	QP
3	0.1884	9.80	9.77	14.35	33.92	54.11	20.19	Average
4	0.1884	9.80	9.77	31.40	50.97	64.11	13.14	QP
5	0.3771	9.76	9.92	14.29	33.97	48.34	14.37	Average
6	0.3771	9.76	9.92	19.23	38.91	58.34	19.43	QP
7	0.5182	9.93	9.92	7.05	26.90	46.00	19.10	Average
8	0.5182	9.93	9.92	17.06	36.91	56.00	19.09	QP
9	1.0824	9.79	9.94	7.13	26.86	46.00	19.14	Average
10	1.0824	9.79	9.94	16.64	36.37	56.00	19.63	QP
11	8.1053	9.86	10.04	11.69	31.59	50.00	18.41	Average
12	8.1053	9.86	10.04	19.75	39.65	60.00	20.35	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 36

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

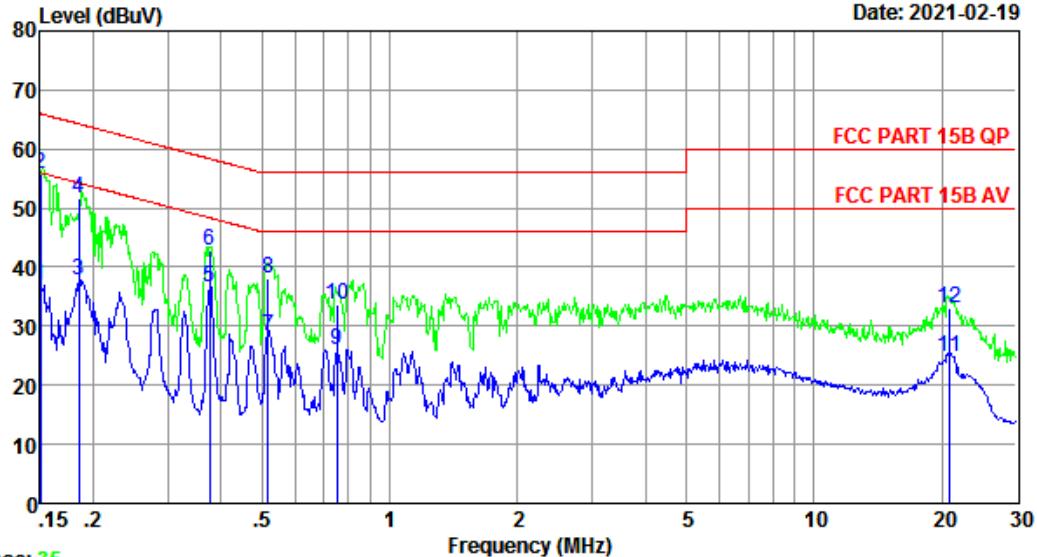

Trace: 35

Site no : 844 Shield Room Data no. : 36
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 KA3601A-2401200US

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.62	9.69	17.47	36.78	56.00	19.22	Average
2	0.1500	9.62	9.69	36.40	55.71	66.00	10.29	QP
3	0.1854	9.69	9.77	18.21	37.67	54.24	16.57	Average
4	0.1854	9.69	9.77	32.15	51.61	64.24	12.63	QP
5	0.3771	9.75	9.92	17.06	36.73	48.34	11.61	Average
6	0.3771	9.75	9.92	23.10	42.77	58.34	15.57	QP
7	0.5155	9.78	9.92	8.57	28.27	46.00	17.73	Average
8	0.5155	9.78	9.92	18.36	38.06	56.00	17.94	QP
9	0.7509	9.73	9.93	6.18	25.84	46.00	20.16	Average
10	0.7509	9.73	9.93	14.14	33.80	56.00	22.20	QP
11	20.8137	9.66	10.16	4.93	24.75	50.00	25.25	Average
12	20.8137	9.66	10.16	13.30	33.12	60.00	26.88	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 38

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

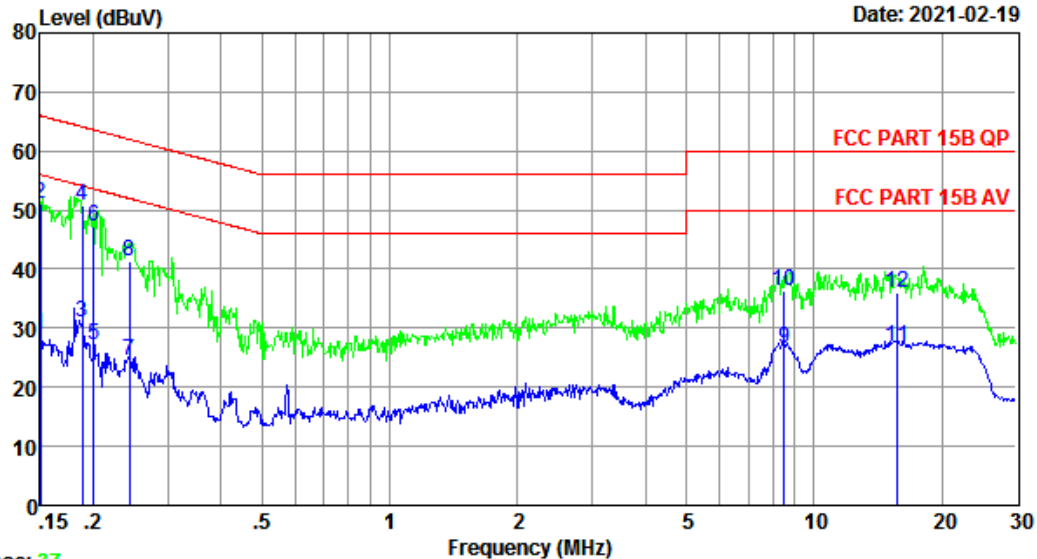

Trace: 37

Site no : 844 Shield Room Data no. : 38
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 MS1

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.62	9.69	9.62	28.93	56.00	27.07	Average
2	0.1500	9.62	9.69	31.66	50.97	66.00	15.03	QP
3	0.1884	9.69	9.77	11.53	30.99	54.11	23.12	Average
4	0.1884	9.69	9.77	31.45	50.91	64.11	13.20	QP
5	0.2007	9.69	9.77	7.79	27.25	53.58	26.33	Average
6	0.2007	9.69	9.77	27.75	47.21	63.58	16.37	QP
7	0.2429	9.71	9.92	4.76	24.39	52.00	27.61	Average
8	0.2429	9.71	9.92	21.70	41.33	62.00	20.67	QP
9	8.5011	9.86	10.06	6.64	26.56	50.00	23.44	Average
10	8.5011	9.86	10.06	16.46	36.38	60.00	23.62	QP
11	15.6349	9.83	10.13	6.91	26.87	50.00	23.13	Average
12	15.6349	9.83	10.13	16.16	36.12	60.00	23.88	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 40

File: \\Emc-ce-1\Test data\2021\RF\J\Joy Intelligent.EM6 (40)

Date: 2021-02-19

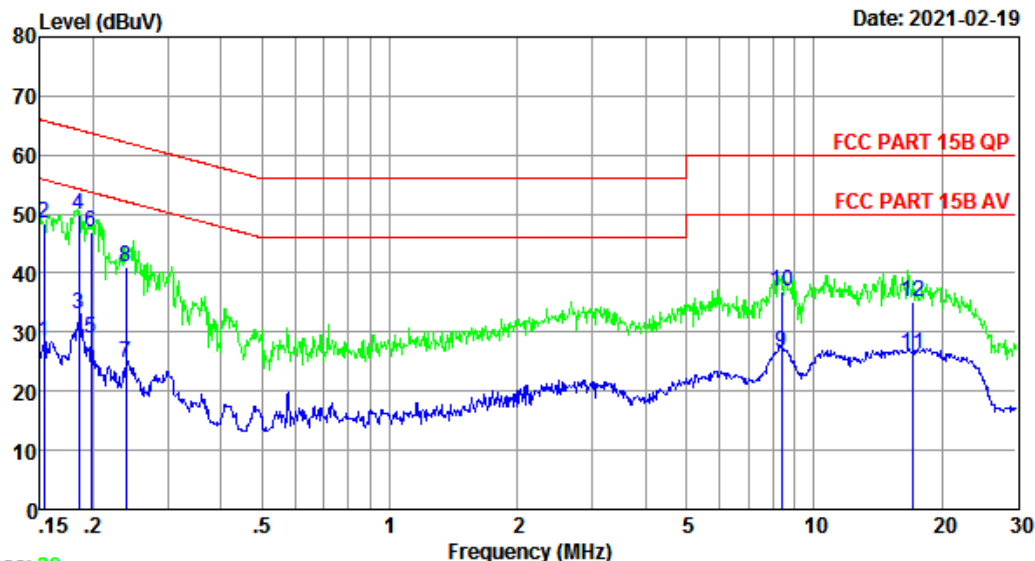

Trace: 39


Site no : 844 Shield Room Data no. : 40
 Env. / Ins. : Temp:25.5°C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : MRS
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : L2050
 Test Mode : Charging
 ICR-26J-4S2P-V3+RC500-KN-11630
 MS1

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1532	9.79	9.69	8.88	28.36	55.82	27.46	Average
2	0.1532	9.79	9.69	28.83	48.31	65.82	17.51	QP
3	0.1854	9.80	9.77	13.48	33.05	54.24	21.19	Average
4	0.1854	9.80	9.77	30.44	50.01	64.24	14.23	QP
5	0.1976	9.80	9.77	9.45	29.02	53.71	24.69	Average
6	0.1976	9.80	9.77	27.50	47.07	63.71	16.64	QP
7	0.2391	9.70	9.92	5.13	24.75	52.13	27.38	Average
8	0.2391	9.70	9.92	21.36	40.98	62.13	21.15	QP
9	8.3671	9.86	10.05	6.63	26.54	50.00	23.46	Average
10	8.3671	9.86	10.05	17.14	37.05	60.00	22.95	QP
11	17.1085	9.87	10.13	6.28	26.28	50.00	23.72	Average
12	17.1085	9.87	10.13	15.28	35.28	60.00	24.72	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

5. TEST SETUP PHOTO

Conducted Test

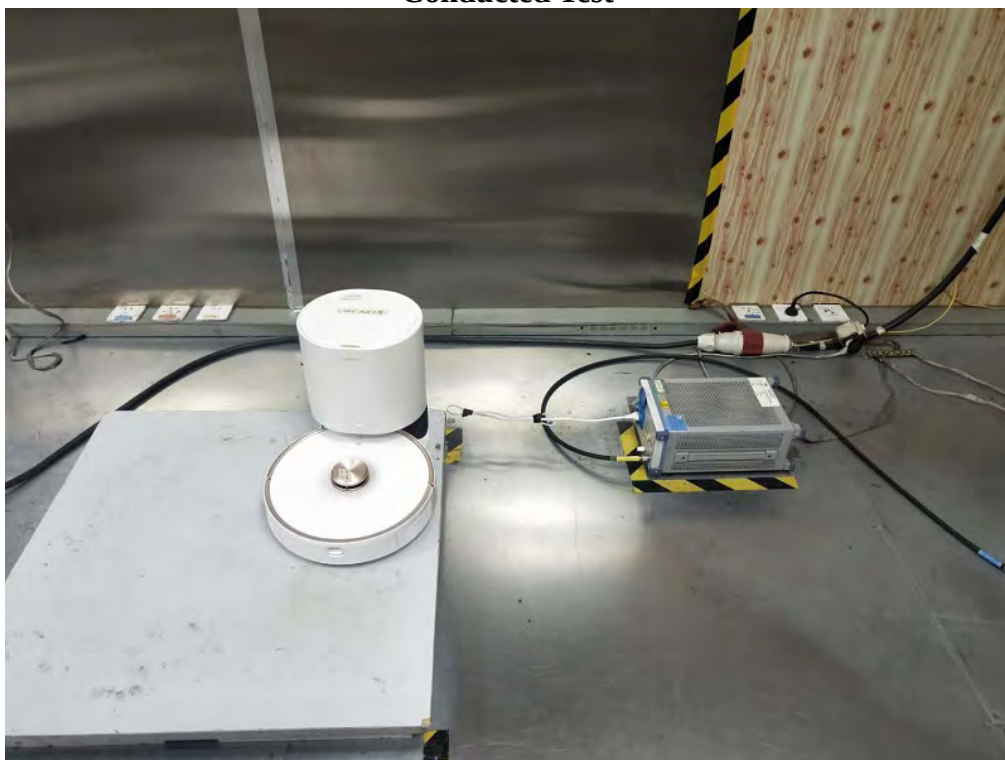

Radiated Test (Below 1GHz)

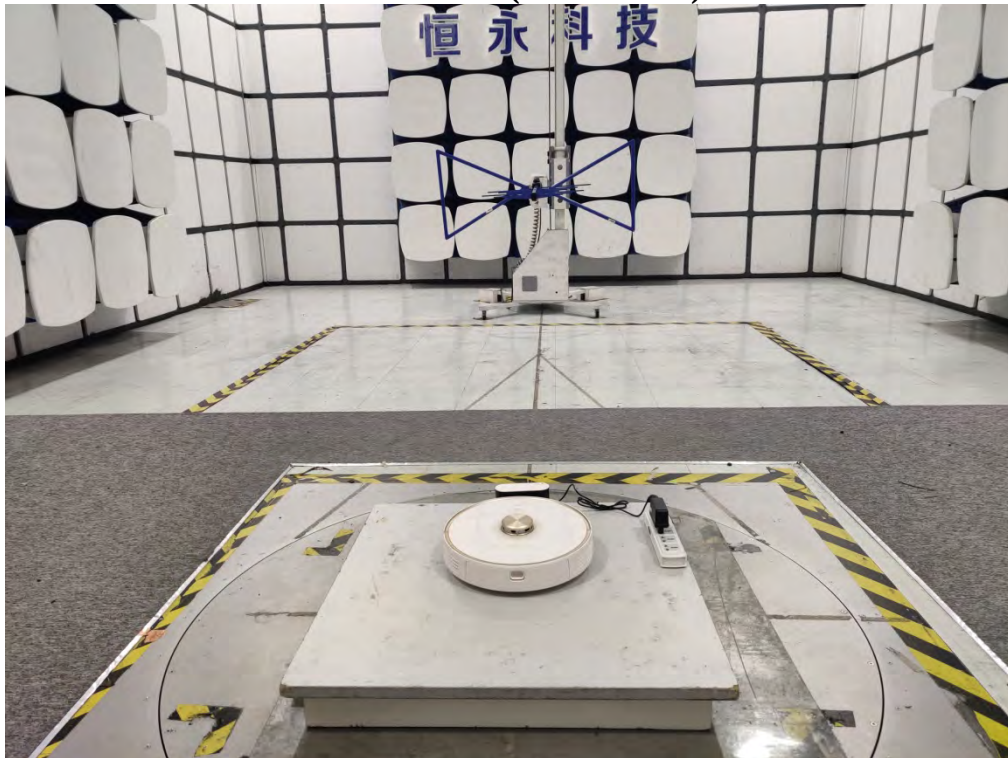

6. EUT PHOTO

External Photos
M/N: L2050




External Photos



M/N: L2050




External Photos
M/N: L2050

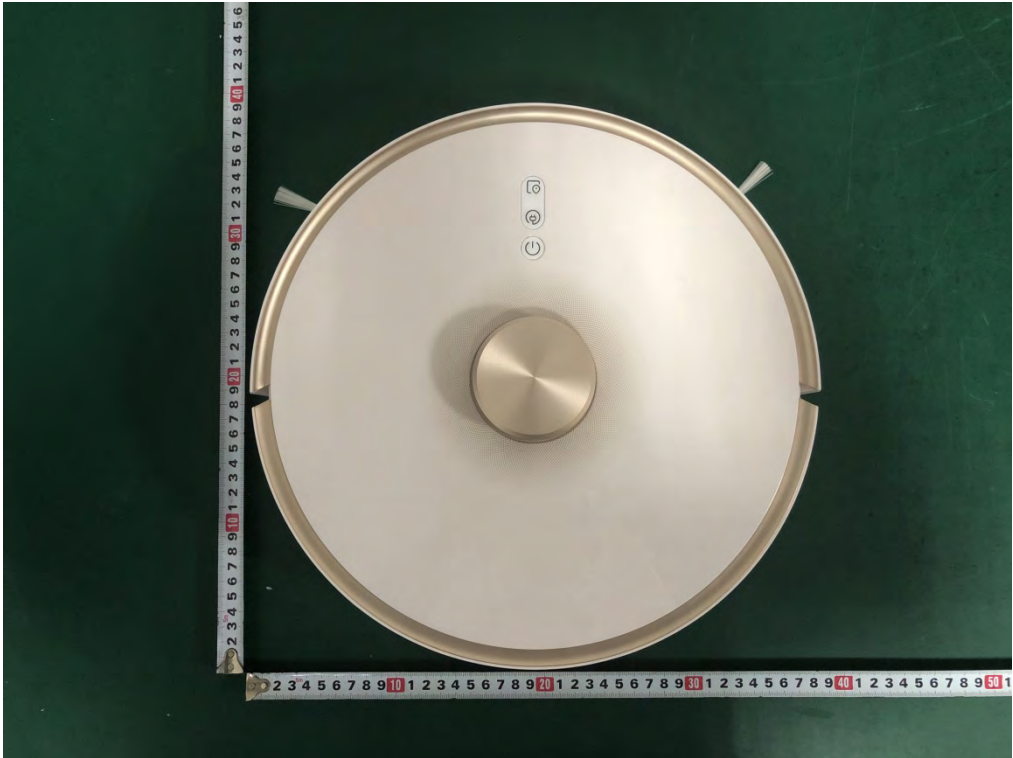

External Photos
M/N: L2050

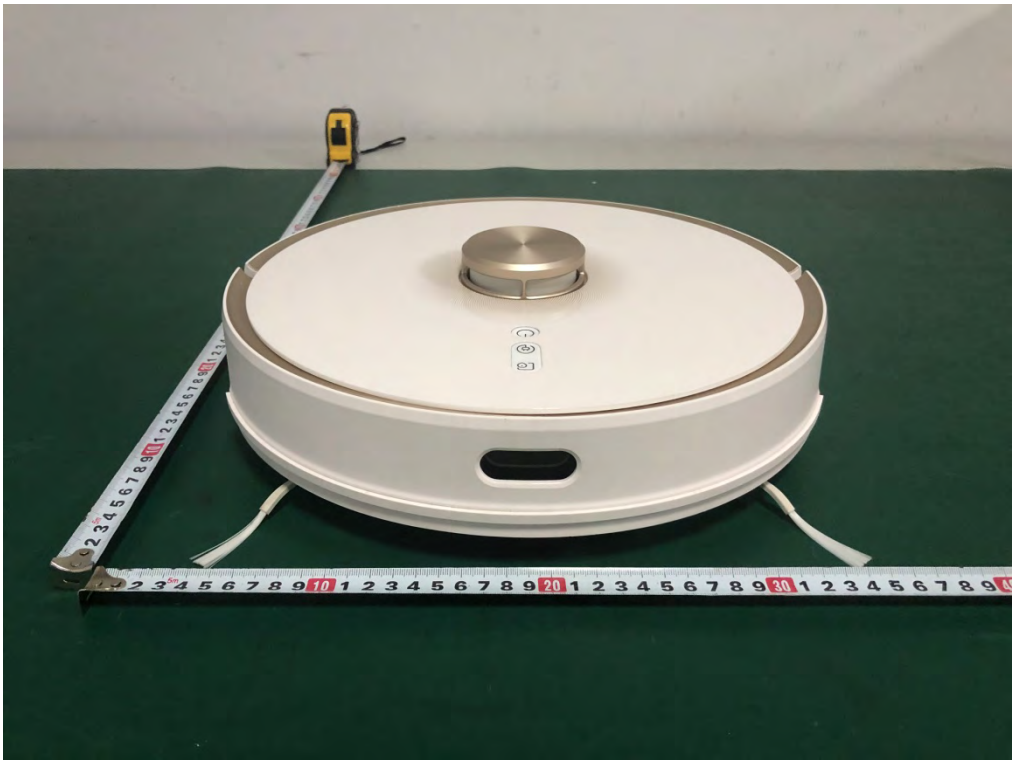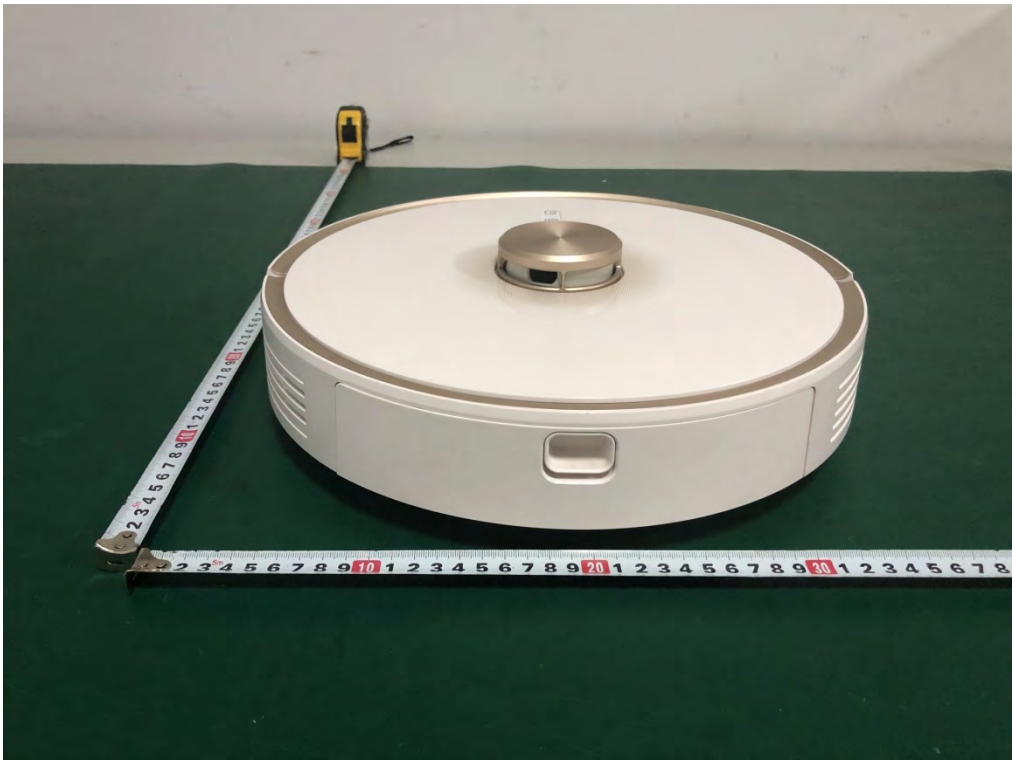

External Photos
M/N: L2050

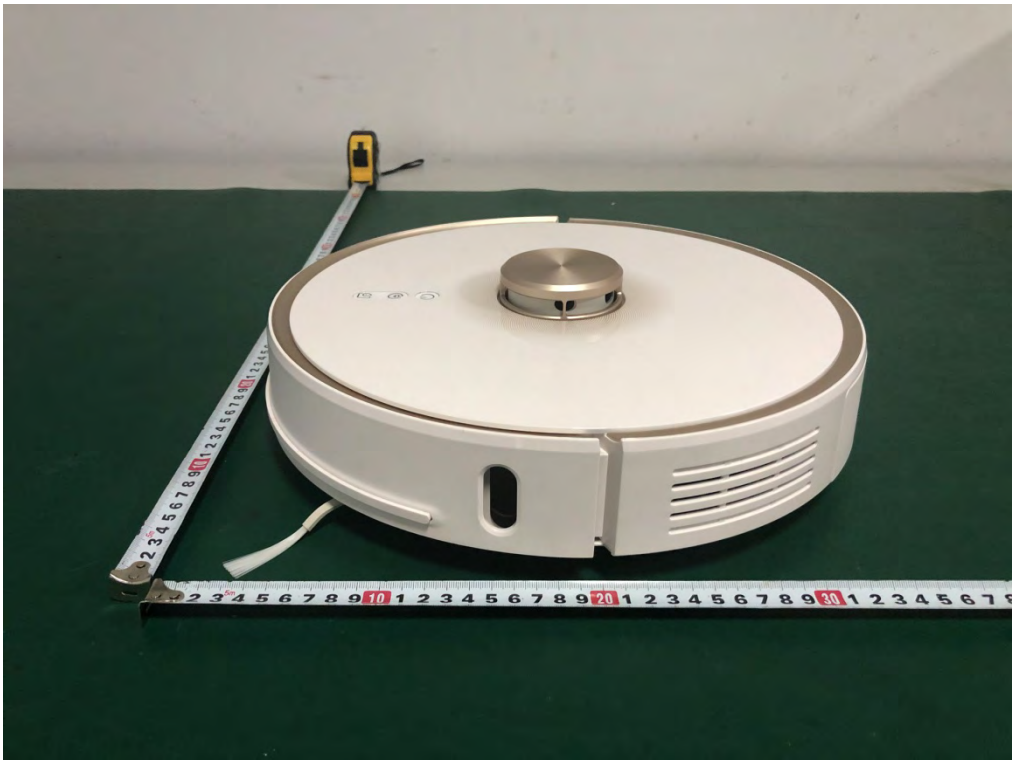


Power Supply

External Photos









Internal Photos
M/N: L2050

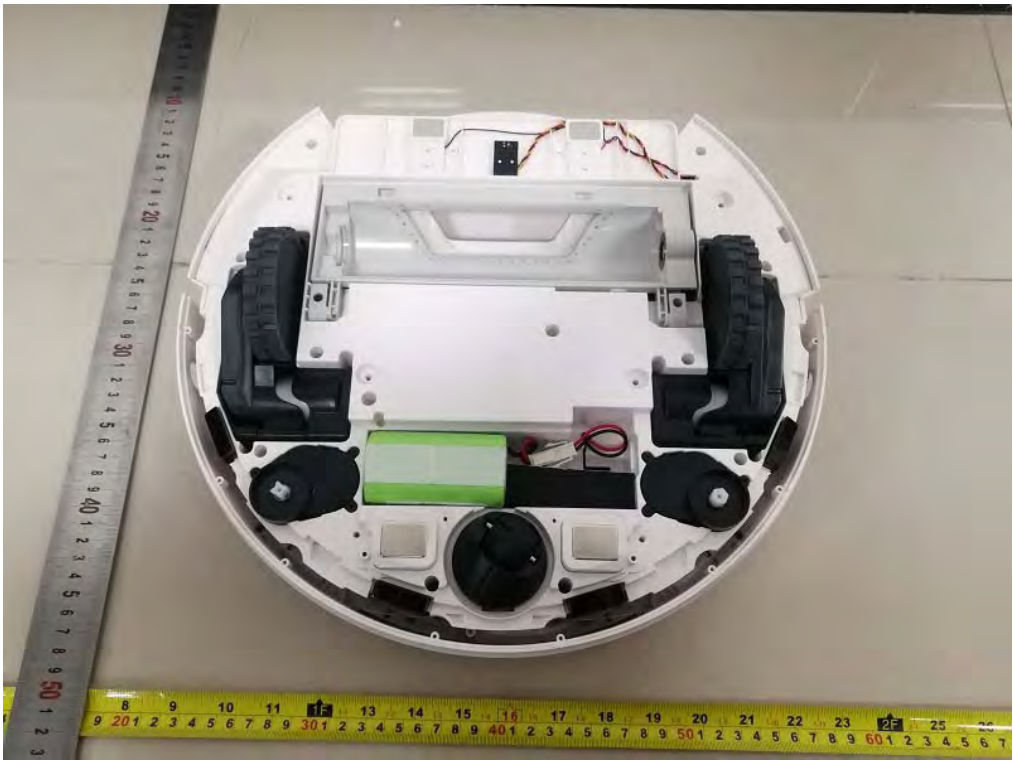


Internal Photos
M/N: L2050

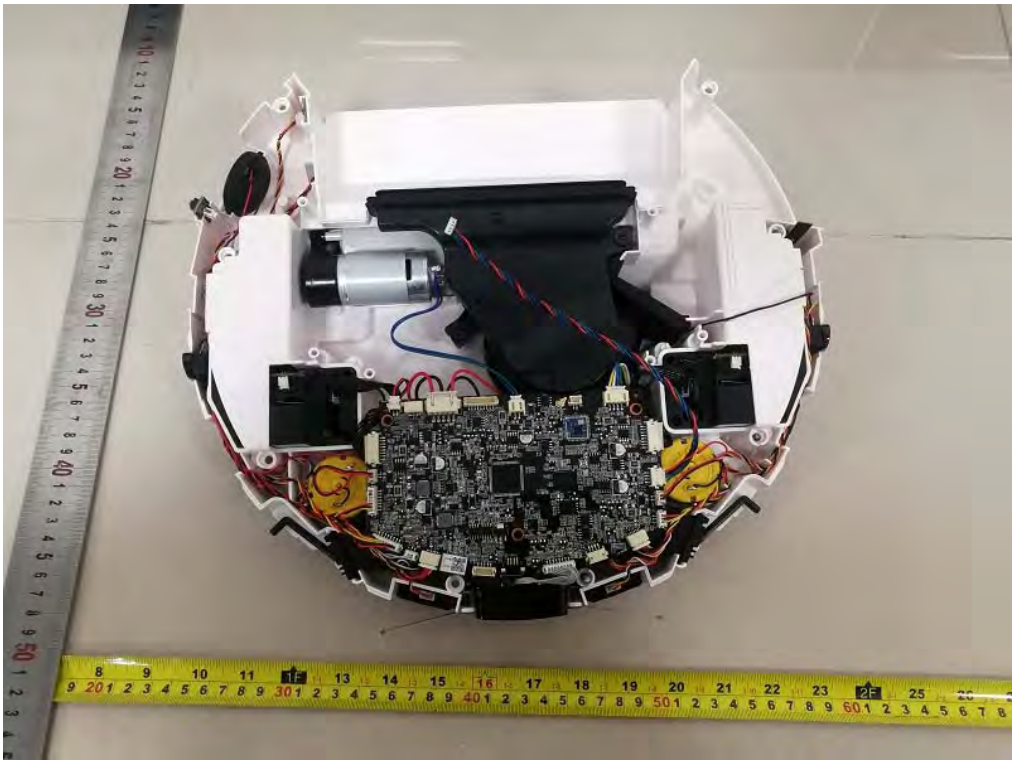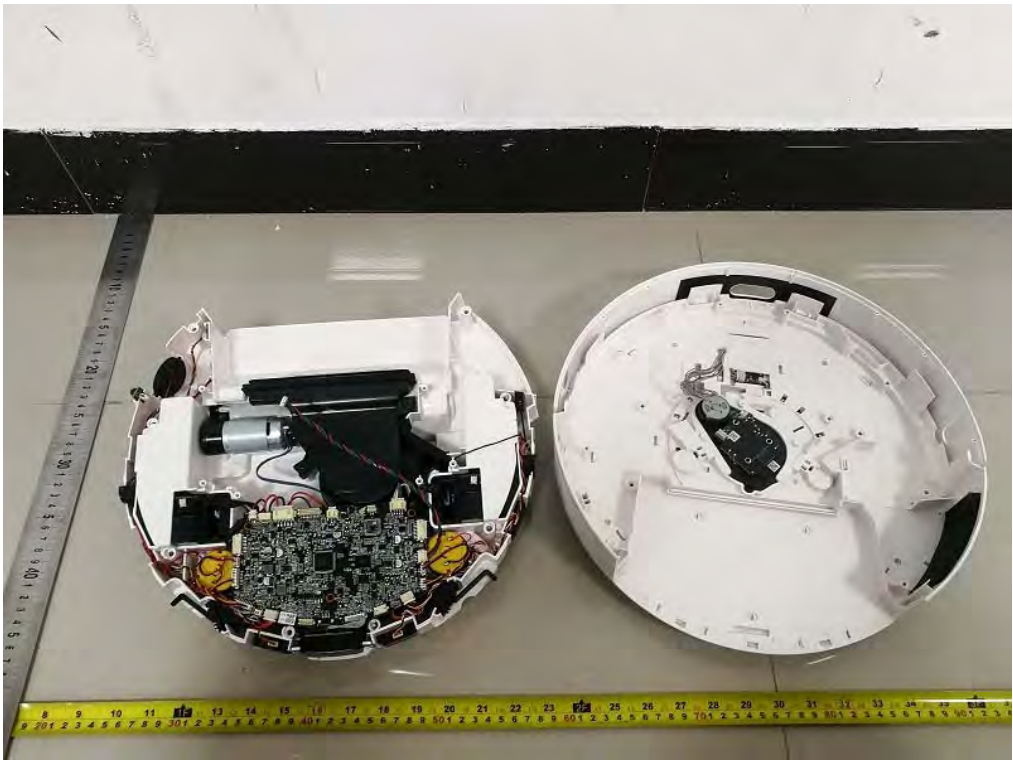

Internal Photos
M/N: L2050

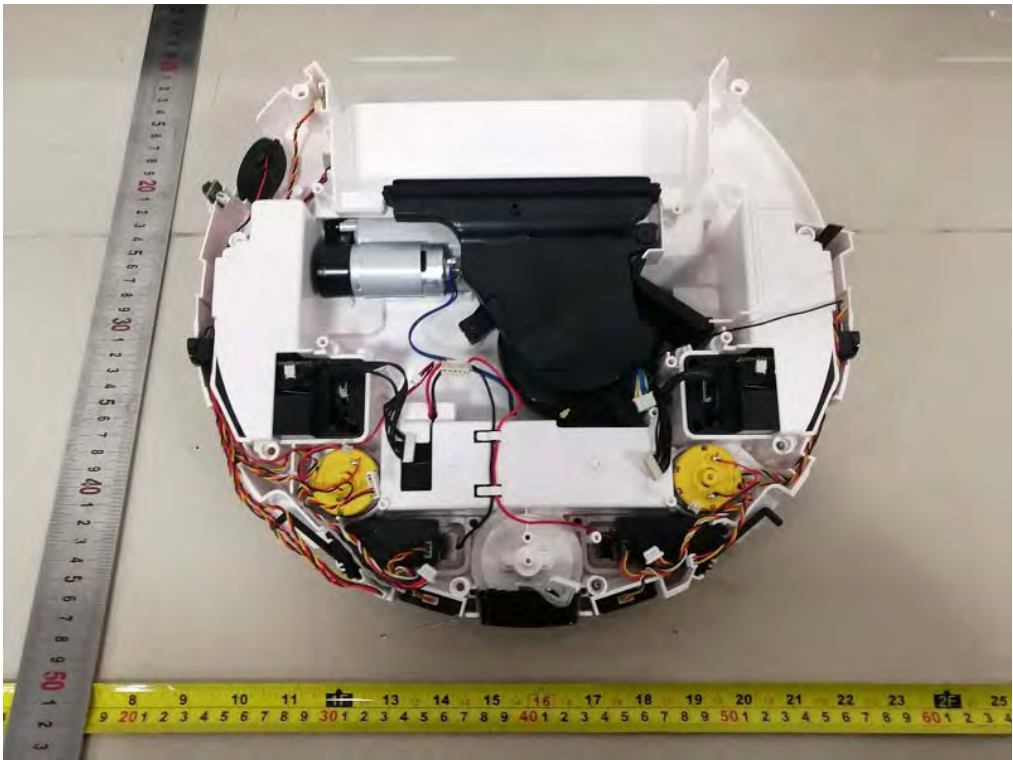
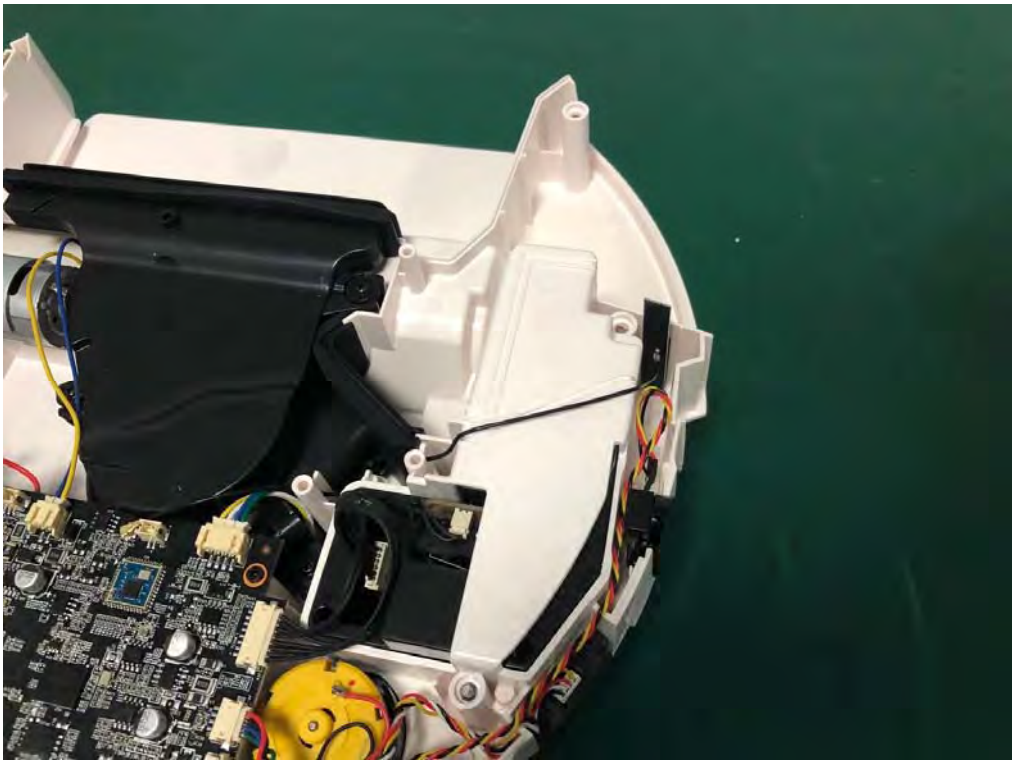


Internal Photos
M/N: L2050

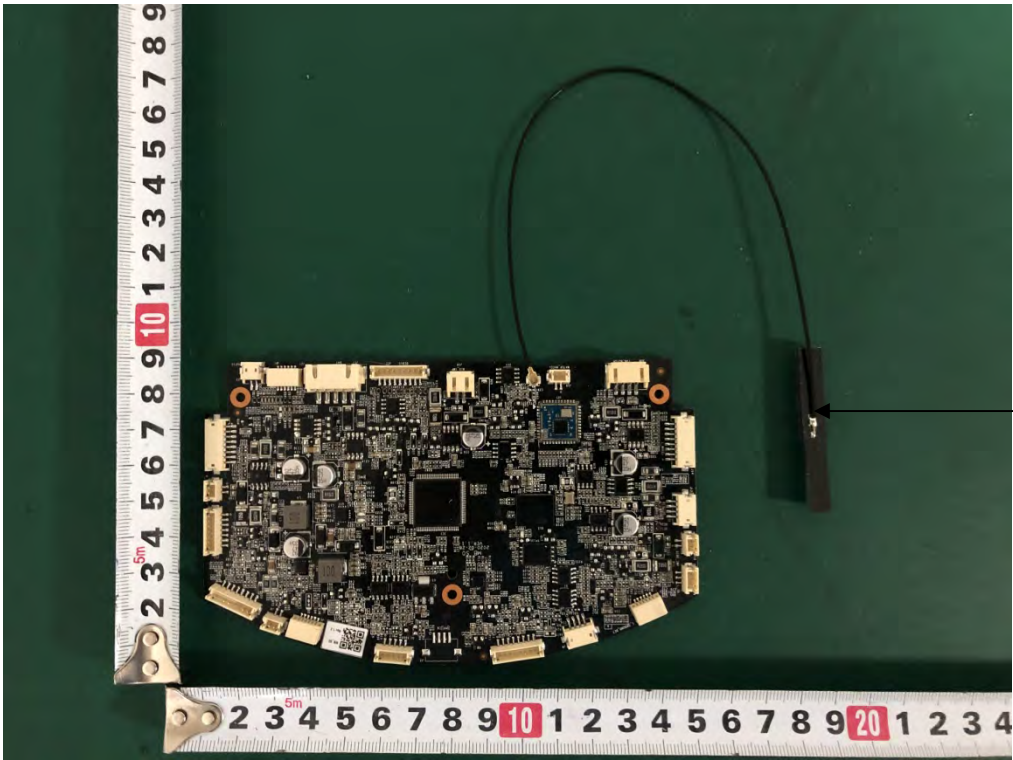


Wi-Fi
Antenna


Internal Photos
M/N: L2050

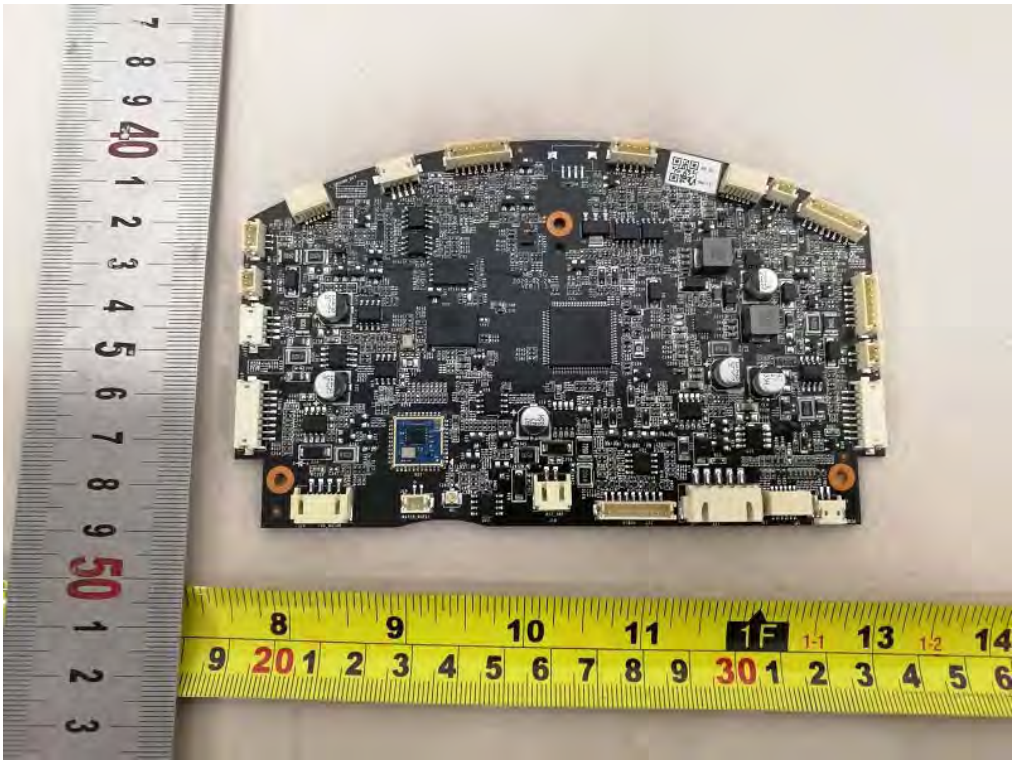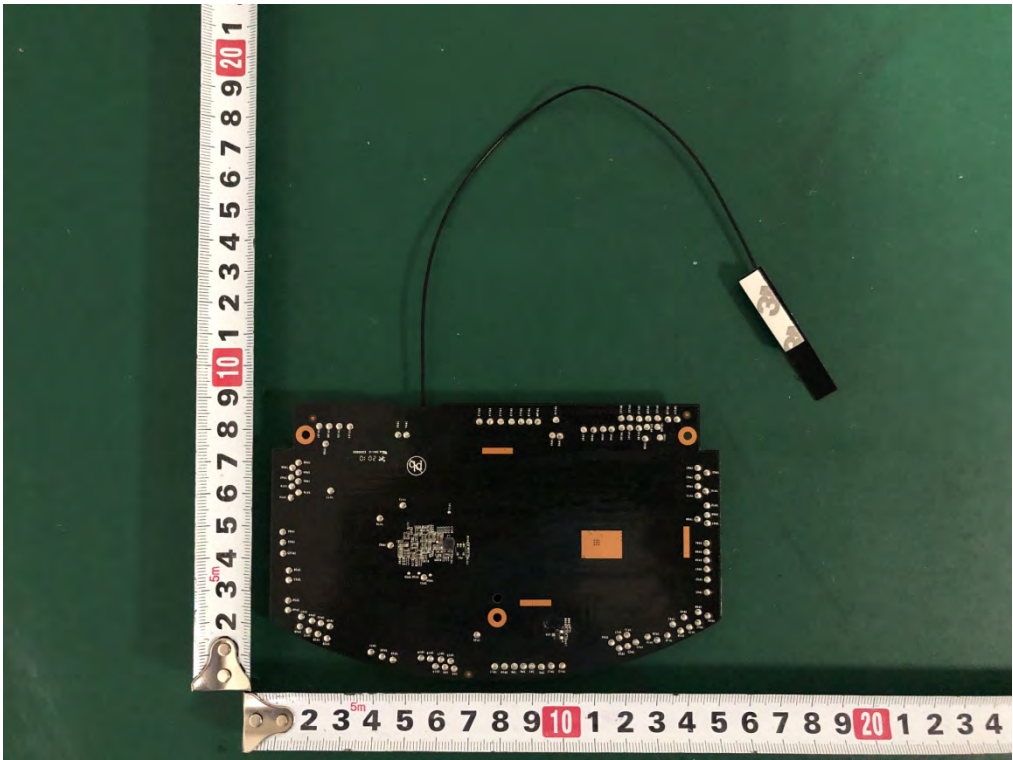


Internal Photos
M/N: L2050

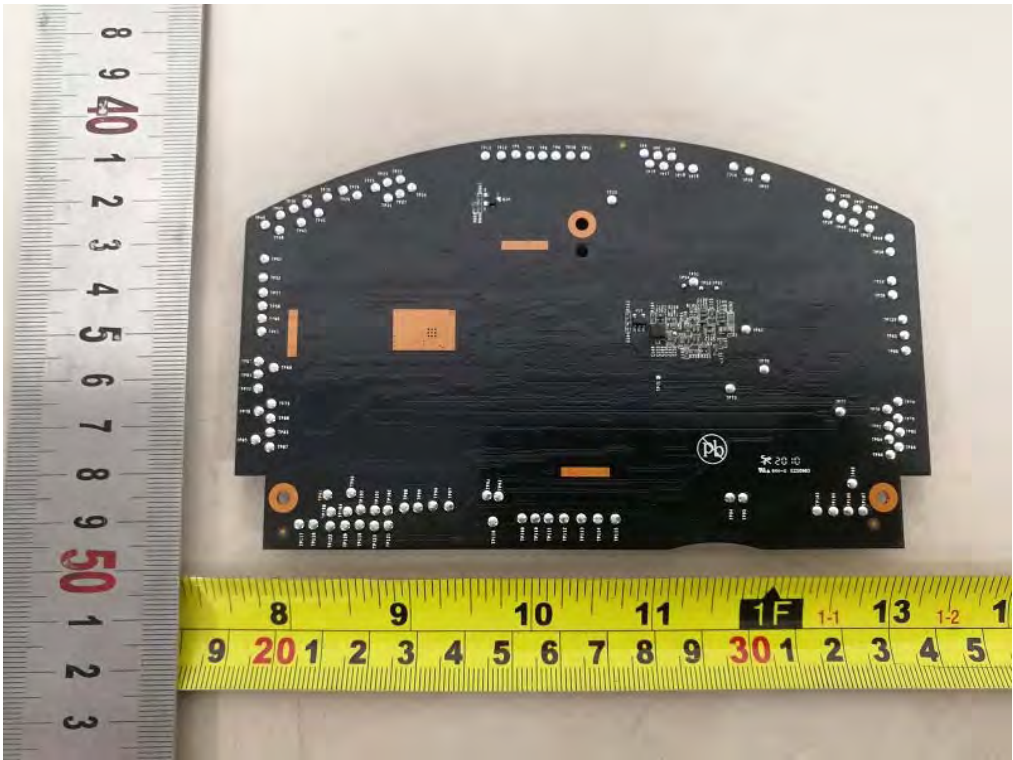

Wi-Fi
Antenna
Connector

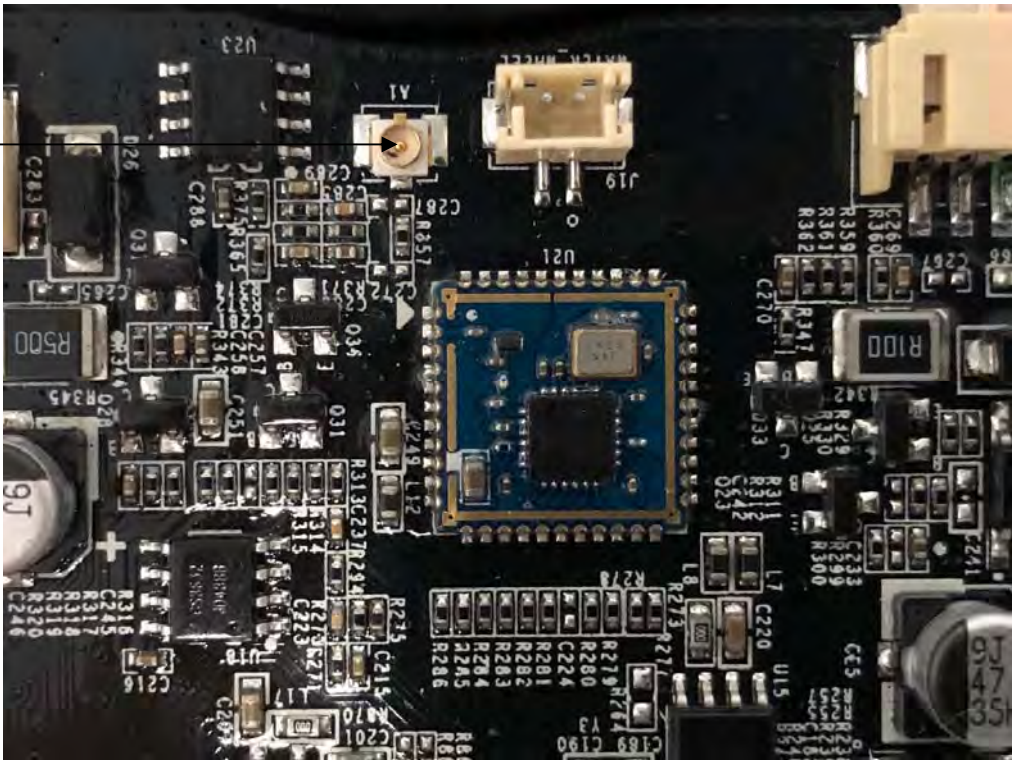

Internal Photos
M/N: L2050

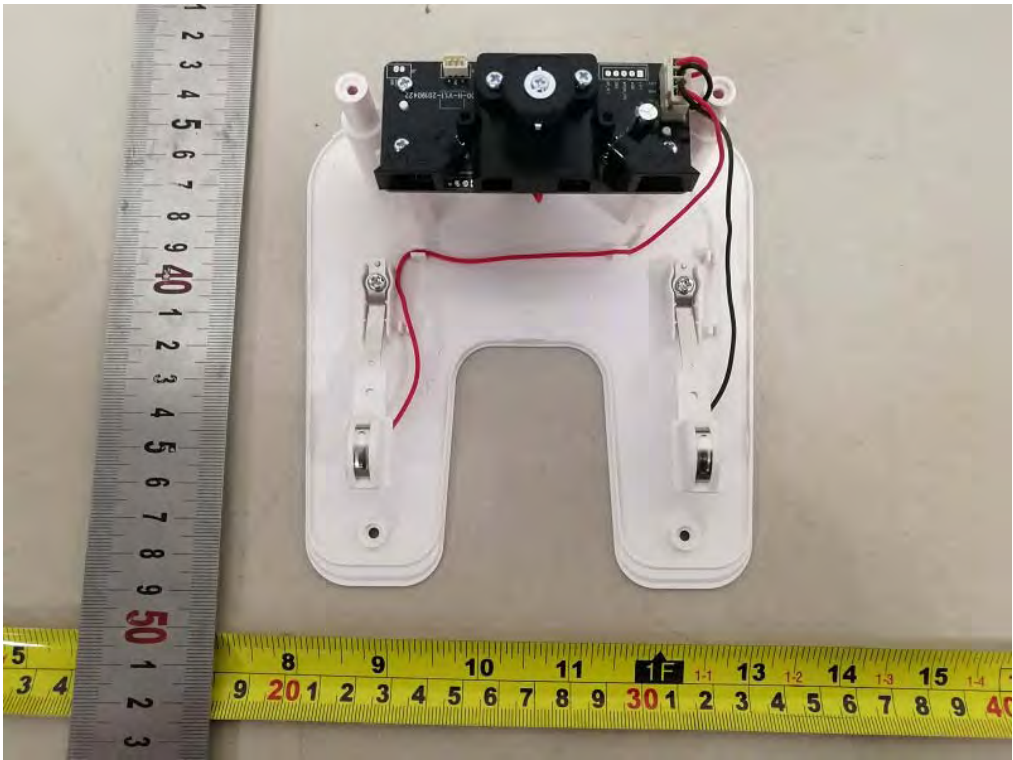

Battery

Internal Photos




Internal Photos




Motor


Internal Photos

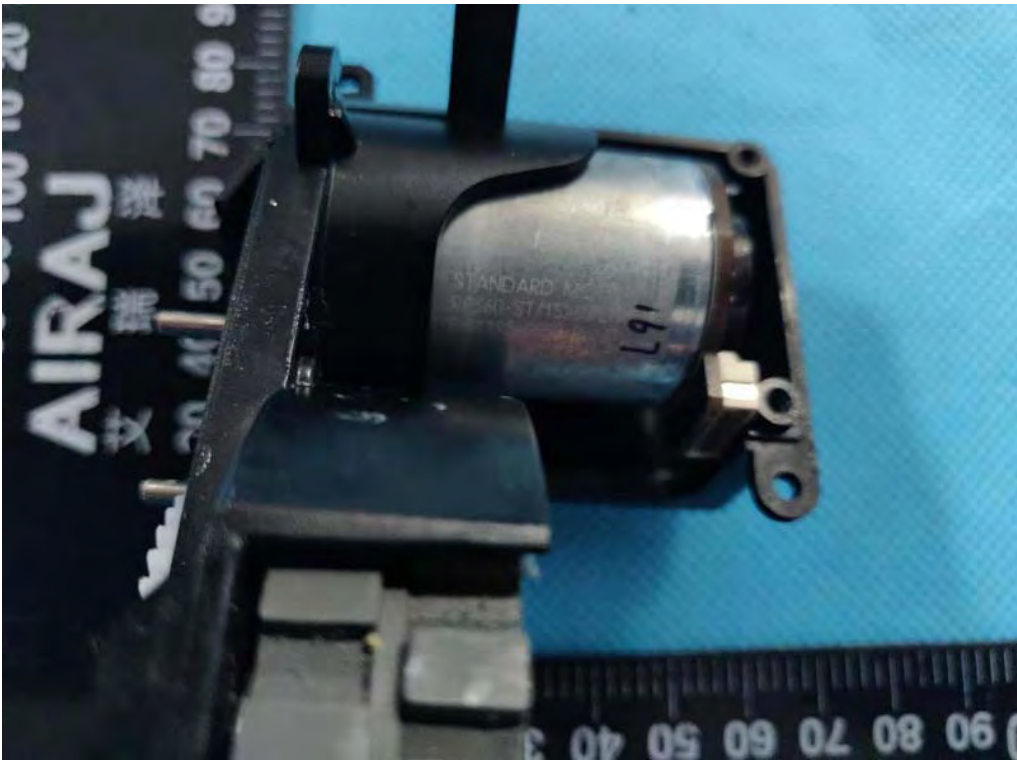



Internal Photos

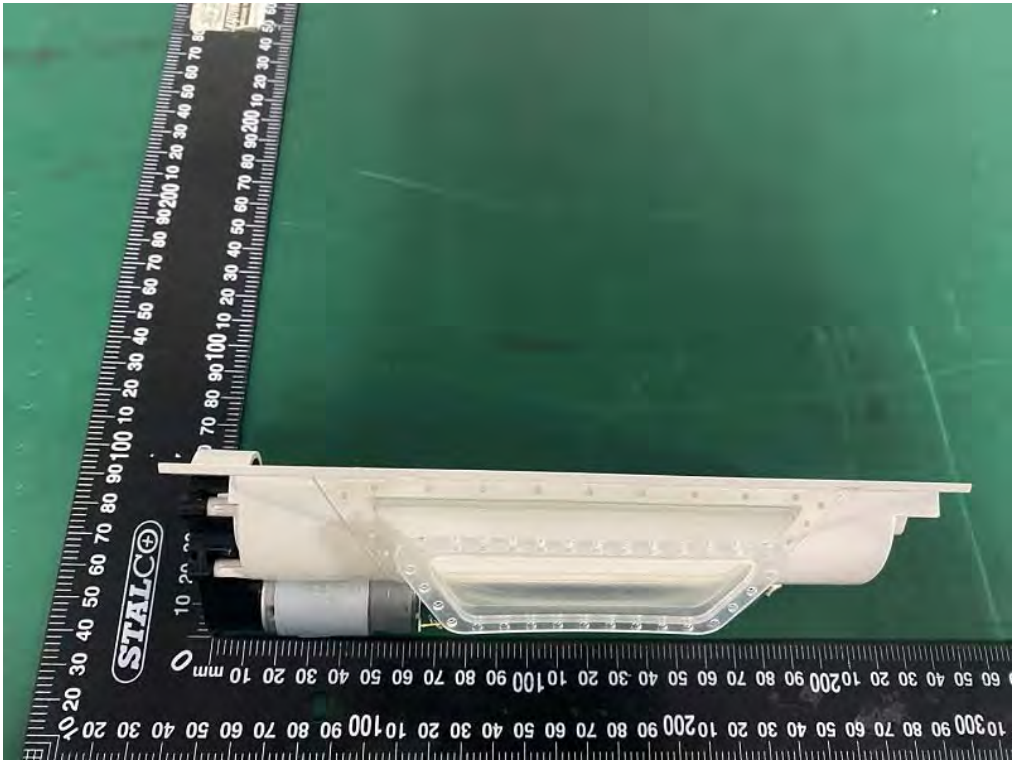


Internal Photos

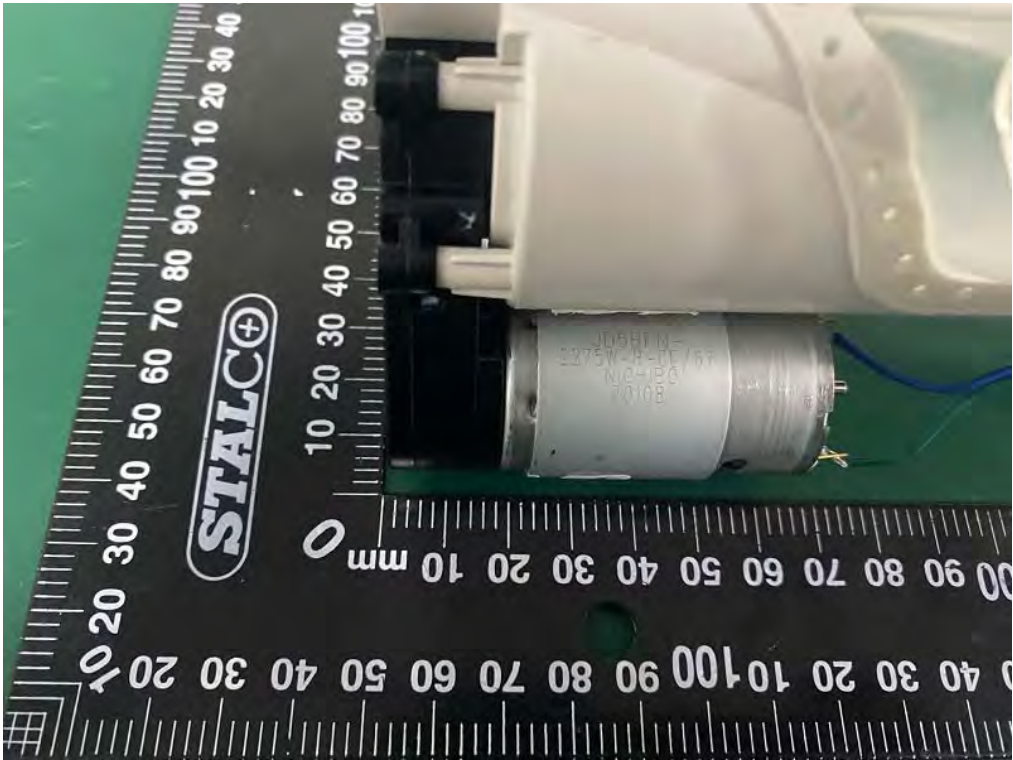


Internal Photos

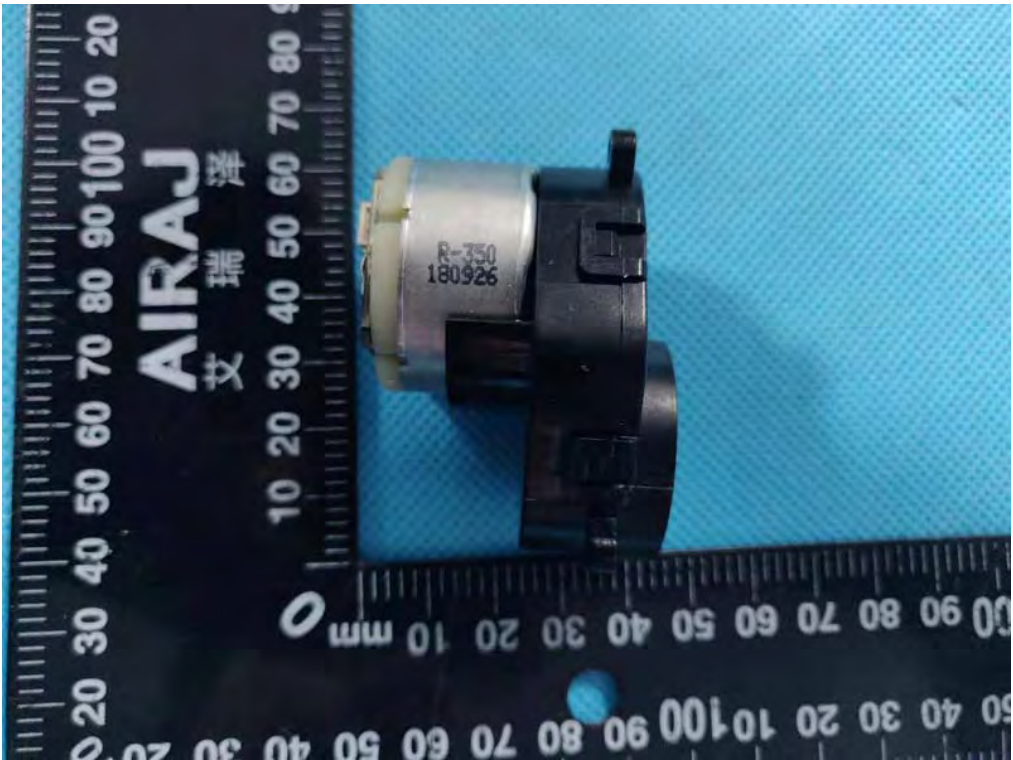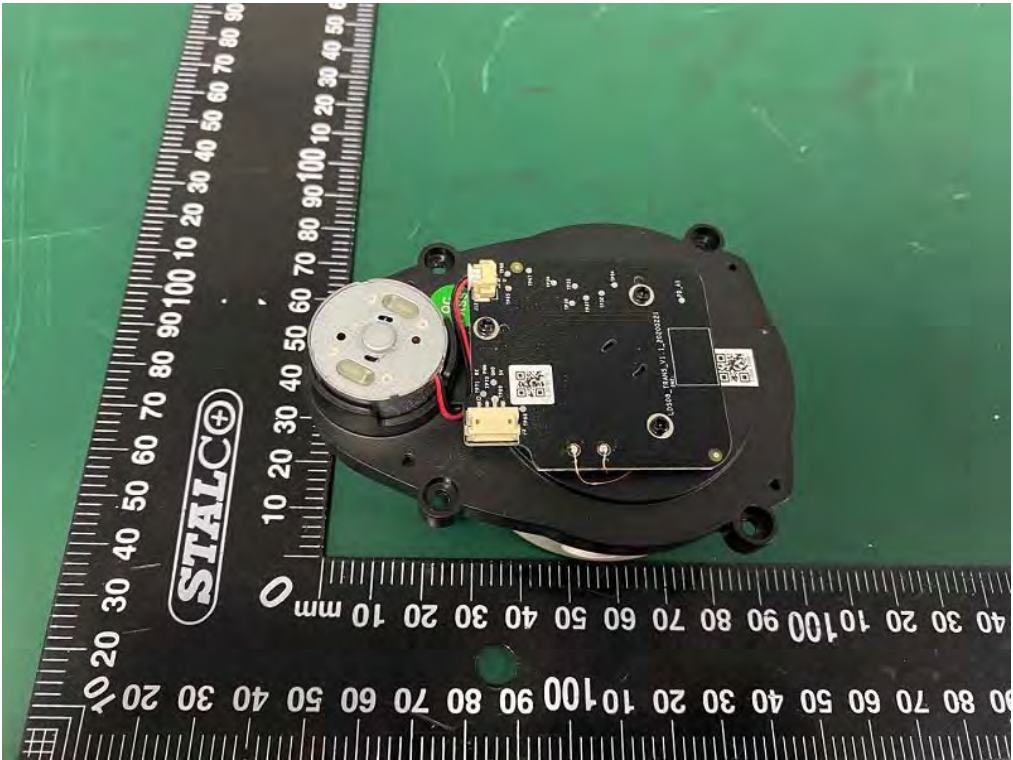

Internal Photos

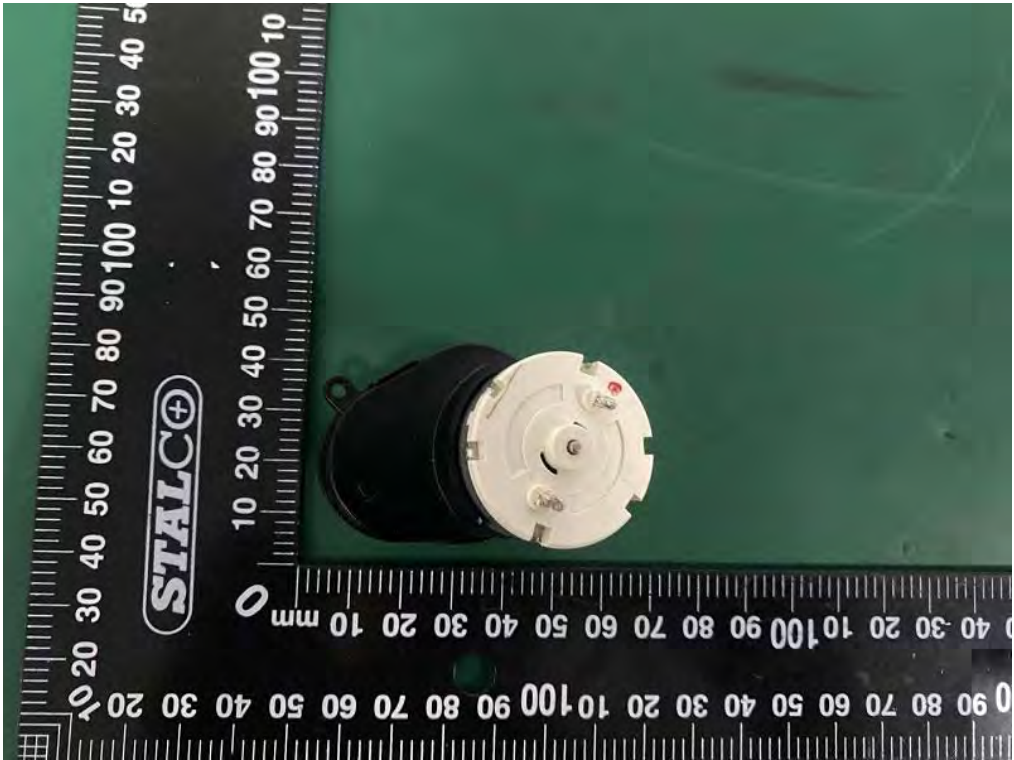


Internal Photos

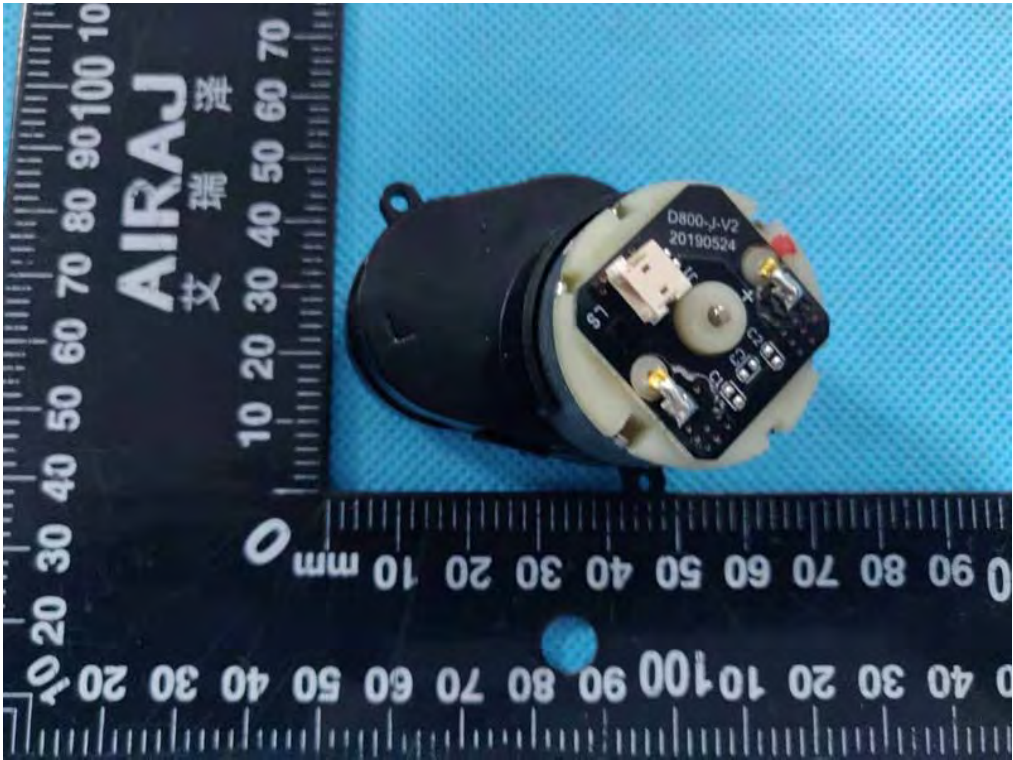

Internal Photos



Internal Photos

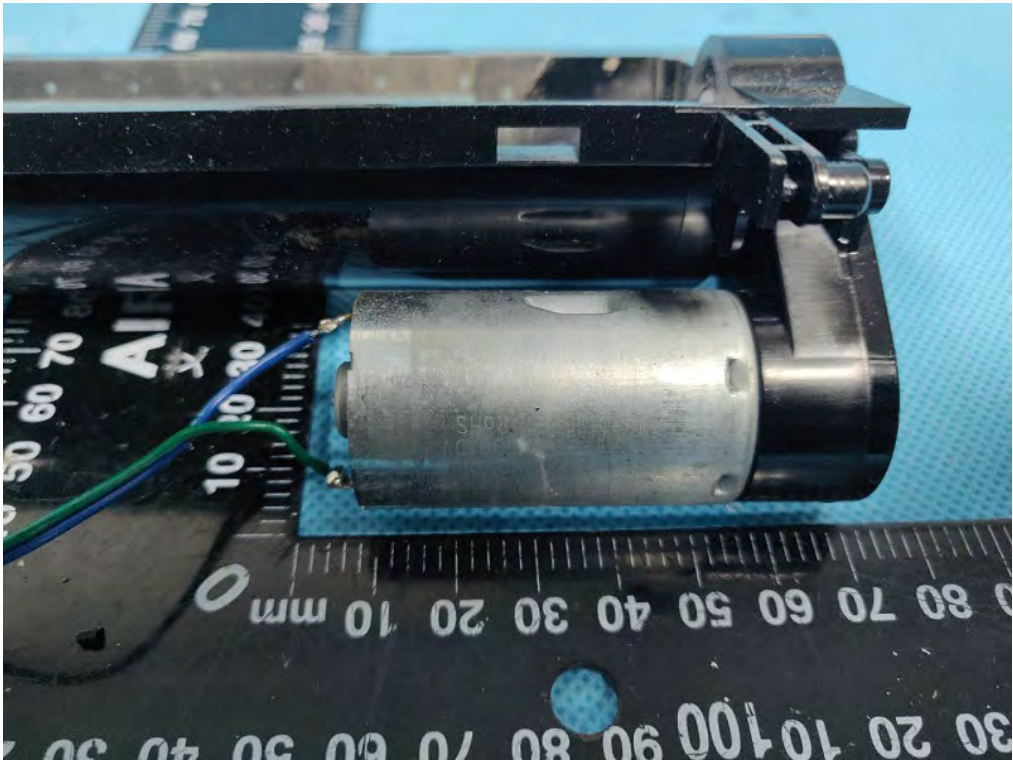


New accessories

Internal Photos



Internal Photos

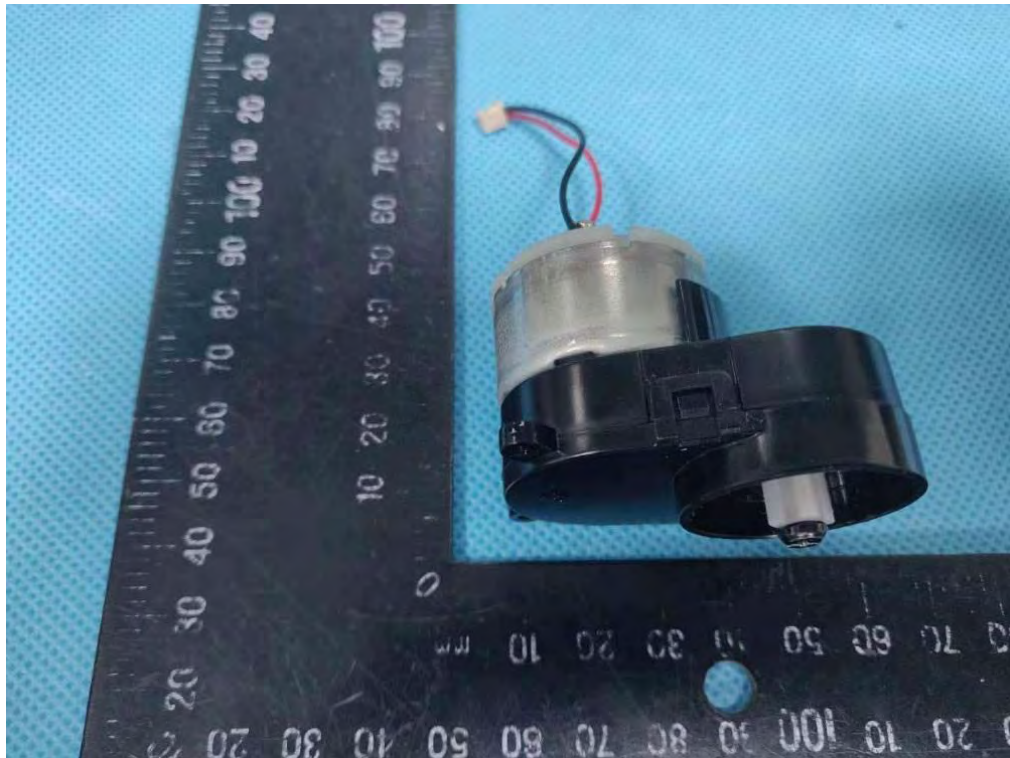

End of Test Report