

TEST REPORT

Report Number: 15314553-E1V3

Applicant : LEVITON MANUFACTURING CO., INC.
10385 SW AVERY
TUALATIN, OR 97062-2210
USA

Models : LRF3-C3648-1, LRF3-C3648-2, LRF3-C3648-3, LRF3-C3648-4,
LRF3-C3648-5, LRF3-C3648-6, LRF3-C3648-7, LRF3-C3648-8

Brand : Leviton

FCC ID : 2ASLN-C3648

IC : 25037-C3648

EUT Description : Logic Board C3648 – BLE and Zigbee

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2024-09-09

Prepared by:
UL VERIFICATION SERVICES INC.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2024-06-28	Initial Issue	---
V2	2024-08-22	Updated Model Numbers on Cover Page, Section 1 and Section 6.1	Tina Chu
V3	2024-09-09	Updated antenna gain on Section 6.3	Tina Chu

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS.....	5
2. TEST RESULTS SUMMARY	7
3. TEST METHODOLOGY	8
4. FACILITIES AND ACCREDITATION.....	8
5. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	9
5.1. METROLOGICAL TRACEABILITY	9
5.2. DECISION RULES.....	9
5.3. MEASUREMENT UNCERTAINTY.....	9
5.4. SAMPLE CALCULATION.....	10
6. EQUIPMENT UNDER TEST	11
6.1. EUT DESCRIPTION.....	11
6.2. MAXIMUM OUTPUT POWER.....	12
6.3. DESCRIPTION OF AVAILABLE ANTENNAS AND CABLE LOSS.....	12
6.4. SOFTWARE AND FIRMWARE.....	12
6.5. WORST-CASE CONFIGURATION AND MODE	12
6.6. DESCRIPTION OF TEST SETUP.....	13
7. MEASUREMENT METHOD	15
8. TEST AND MEASUREMENT EQUIPMENT	16
9. ANTENNA PORT TEST RESULTS	17
9.1. ON TIME AND DUTY CYCLE	17
9.2. 99% BANDWIDTH	18
9.3. 6 dB BANDWIDTH	19
9.4. OUTPUT POWER.....	20
9.5. AVERAGE POWER	21
9.6. POWER SPECTRAL DENSITY	22
9.7. CONDUCTED SPURIOUS EMISSIONS.....	23
10. RADIATED TEST RESULTS.....	25
10.1. LIMITS AND PROCEDURE	25

10.2.	TRANSMITTER ABOVE 1 GHz	27
10.2.1.	HOST MODEL NUMBER: ZBM00-10z.....	27
10.2.2.	HOST MODEL NUMBER: ZKM00-10z.....	37
10.3.	WORST CASE BELOW 30MHZ	47
10.4.	WORST CASE BELOW 1 GHZ.....	49
10.5.	WORST CASE 18-26 GHz.....	51
11.	AC POWER LINE CONDUCTED EMISSIONS	53
12.	SETUP PHOTOS	56

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LEVITON MANUFACTURING CO., INC.
10385 SW AVERY
TUALATIN, OR 97062-2210
USA

EUT DESCRIPTION: Logic Board C3648 – BLE and Zigbee

MODELS: LRF3-C3648-1, LRF3-C3648-2, LRF3-C3648-3, LRF3-C3648-4,
LRF3-C3648-5, LRF3-C3648-6, LRF3-C3648-7, LRF3-C3648-8

BRAND: Leviton

SERIAL NUMBER: ZBM00-10z: 1MR (Radiated)
ZKM00-10z: 2MR(Radiated)
ZKM00-10z: 2MC (Conducted)

SAMPLE RECEIPT DATE: 2024-06-10

DATE TESTED: 2024-06-10 TO 2024-06-25


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 3	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.

Approved & Released For
UL Verification Services Inc. By:



Francisco de Anda
Staff Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Jordan Bailey
Lab Engineer
Consumer Technology Division
UL Verification Services Inc.

Reviewed By:



Tina Chu
Senior Project Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULTS SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for correctly integrating customer-provided data with measurements performed by UL Verification Services Inc.

Below is a list of the data provided by the customer:

- 1) Antenna gain and type (see section 6.3)
- 2) Cable loss (see section 6.3)

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Complies	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance, KDB 414788 D01 Radiated Test Site, RSS-GEN Issue 5 + A1 + A2, and RSS-247 Issue 3.

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, Certificate Number 0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
RF Power Measurement Direct Method Using Power Meter	1.3 dB (PK) / 0.45 dB (AV)
Unwanted Emissions, Conducted	1.94 dB
Power Spectral Density	2.466 dB
Worst Case Conducted Disturbance, 9kHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9kHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB
Time Domain Measurements	3.39%
Temperature	0.57°C
Relative Humidity	3.39%
DC Supply Voltages	0.57%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Final Voltage (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \\ &\text{LISN Insertion Loss.} \\ 36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} &= 46.6 \text{ dBuV} \end{aligned}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a logic board module that supports both BLE and Zigbee technologies or BLE only technology. It is a limited module and tested inside host models.

Listed module's model numbers that support both BLE and Zigbee technologies with different flash, ram size and security features. All model numbers have same architecture, RF power and setting. Model numbers:

- LRF3-C3648-1
- LRF3-C3648-2
- LRF3-C3648-3
- LRF3-C3648-4
- LRF3-C3648-5
- LRF3-C3648-6

Listed module's model numbers that support BLE only technology with different flash, ram size and security features. Both model numbers have same architecture, RF power and setting. The Zigbee radio is disabled in firmware set by the manufacturer. Model numbers:

- LRF3-C3648-7
- LRF3-C3648-8

This application will cover 14 hosts, model numbers:

BLE/Zigbee hosts (with EUT model number: LRF-C3648-1, chosen as worst-case for testing):

- ZBM00-10z
- ZKM00-10z
- ZB700-D0z
- ZB700-30z
- ZK700-D0z
- ZBS00-D0z
- ZKS00-D0z

BLE only hosts (with EUT model number: LRF-C3648-7, chosen as worst-case for spot check testing):

- SBM00-10z
- SKM00-10z
- SB700-D0z
- SB700-30z
- SK700-D0z
- SBS00-D0z
- SKS00-D0z

Both BLE/Zigbee hosts and BLE only hosts are identical in terms of enclosure and PCB board, the only difference is that in BLE only hosts, the Zigbee radio is disabled in firmware set by the manufacturer.

This report covers BLE radio.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	9.46	8.83

6.3. DESCRIPTION OF AVAILABLE ANTENNAS AND CABLE LOSS

The antenna(s) gain, type and cable loss, as provided by the manufacturer' are as follows:

The radio utilizes a PCB antenna, with a maximum gain of 1.6 dBi.

Cable loss: 0.5dB

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was RailTest", version 1.0

The test utility software used during testing was RealTerm version 2.0.0.70

6.5. WORST-CASE CONFIGURATION AND MODE

Host model number: ZBM00-10z and model number: ZKM00-10z with both BLE/Zigbee protocol were tested for full bandedge and radiated emissions 1G to 18G testing. Radiated emissions below 30MHz, 30MHz to 1GHz , 18G to 26G and AC powerline conducted emissions were tested on the model number: ZKM00-10z as worst case.

Host model number: ZKM00-10z was set for full conducted test since there is only single power level available for BLE.

Radiated harmonic spurious spot check verification has been done on all of the rest of the BLE/Zigbee 5 hosts and BLE only 7 hosts.

Radiated emissions below 1GHz, above 18GHz, and AC powerline conducted emissions were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y orientation (Landscape orientation) was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation (Landscape orientation).

BLE only supports 1Mbps data rate.

6.6. DESCRIPTION OF TEST SETUP


SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Toshiba	PSCMLU-09G0KU	8F022903P		PPD-QCNFA335
Isolation Transformer		Hammond Manufacturing	167G120	N/A		DoC
I/O CABLES (CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna Port	1	SMA	Unshielded	0.15	EUT to Analyzer
2	FTDI cable	1	Type A USB	Unshielded	2	EUT to Laptop (maintenance cable)
3	AC	1	2-wires	Unshielded	0.6	Isolation Transformer to EUT
4	AC	1	3-prong	Unshielded	1	AC Main to Isolation Transformer
I/O CABLES (RADIATED EMISSIONS/ AC LINE CONDUCTED)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	3-prong	Unshielded	2.5	AC Main to EUT (floating ground)
2	FTDI cable	1	Type A USB	Unshielded	2	EUT to Laptop (maintenance cable)

TEST SETUP


The EUT is powered by AC. Test software exercised the radio card. The laptop was used for setup and removed during radiated emissions/AC powerline emissions testing.

SETUP DIAGRAMS

CONDUCTED TEST

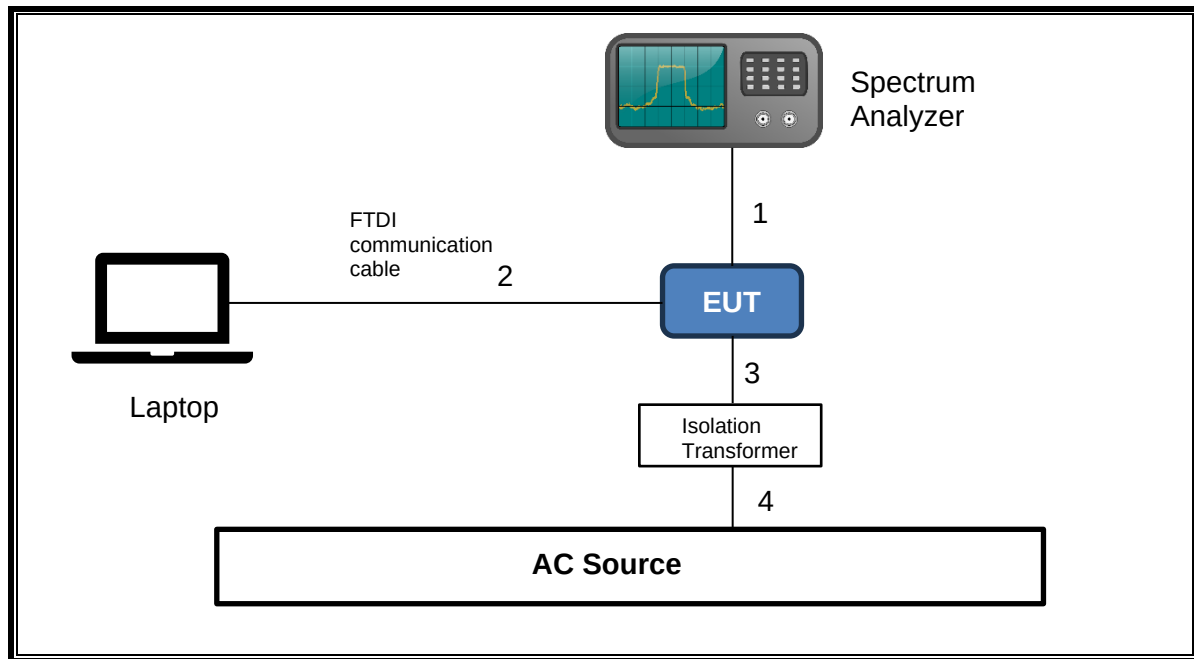

RADIATED EMISSIONS/AC POWERLINE EMISSIONS

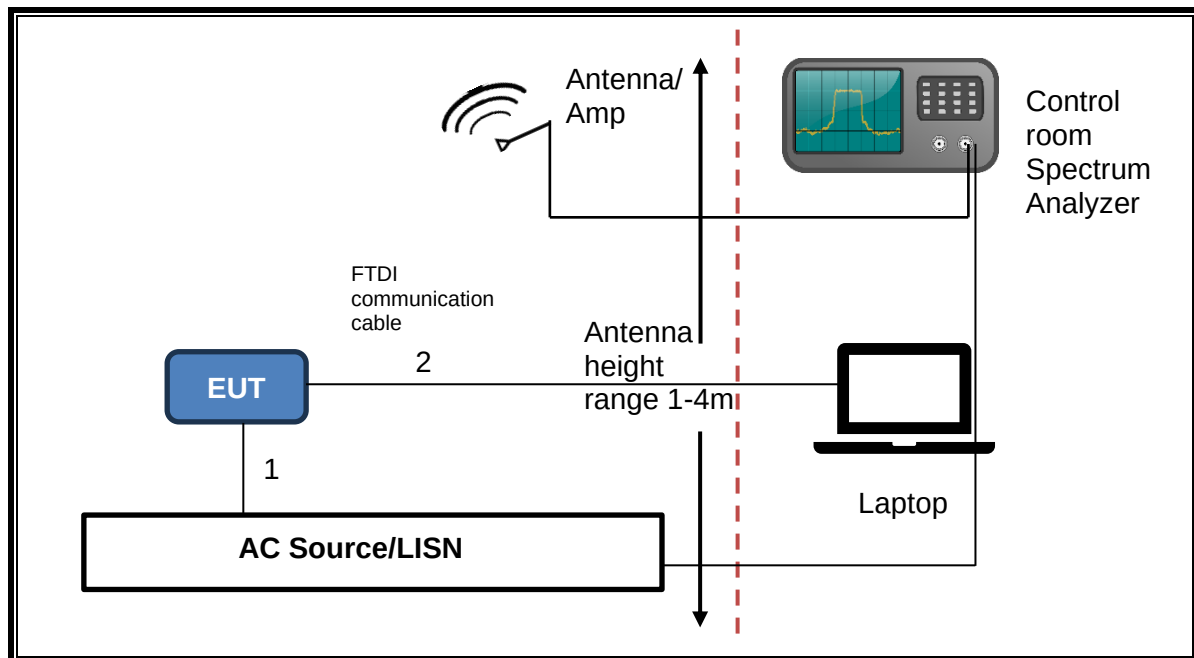

7. MEASUREMENT METHOD

Test Item	Test Method
On Time and Duty Cycle	ANSI C63.10 Section 11.6
6 dB BW	ANSI C63.10 Subclause -11.8.1 RBW $\geq$ DTS BW
99% BW	ANSI C63.10-2013, Subclause 6.9.3.
Output Power	ANSI C63.10 Section 11.9.1.3 Method PKPM1 Peak-reading power meter ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)
PSD	ANSI C63.10 Section 11.10.2. Method PKPSD (peak PSD)
Radiated emissions non-restricted frequency bands	ANSI C63.10 Subclause -11.11
Radiated emissions restricted frequency bands	ANSI C63.10 Subclause -11.12.1
Conducted emissions in restricted frequency bands	ANSI C63.10 Section -11.12.2 and KDB558074 Section 11, Question 3 (a)
Band-edge	ANSI C63.10 Subclause -11.13.3.2: Integration method - Peak detection
Band-edge	ANSI C63.10 Subclause -11.13.3.4: Integration method - Trace averaging across ON and OFF times DC correction
Radiated Spurious Emissions Below 30MHz	ANSI C63.10-2013 Subclause 6.4
AC Power Line Conducted Emissions	ANSI C63.10-2013, Subclause 6.2

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO METRICS	EM-6871	219909	2024-06-30	2023-06-20
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO METRICS	EM-6872	219911	2024-12-31	2023-12-05
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	203089	2025-04-30	2024-04-09
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	175953	2025-03-31	2024-04-04
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	80404	2024-08-31	2022-08-22
RF Filter Box, 1-18GHz	UL-FR1	SAC 8 port rf box 1	197920	2025-03-31	2024-03-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	225688	2025-02-29	2024-02-11
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	199659	2024-12-31	2022-12-06
Amplifier 18-26.5GHz, +5Vdc, -54dBm P1dB	AMPLICAL	AMP18G26.5-60	234683	2025-05-31	2024-05-13
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	85201	2025-02-29	2023-02-02
10dB Fixed Attenuator, up to 26GHz	Pasternack Enterprises	PE7087-10	236189	Verified/characterized before use	
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90719	2025-01-31	2024-01-25
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90389	2025-01-31	2024-01-25
AC Line Conducted					
LISN	Fischer Custom Communications, Inc	FCC-LISN-50/250-25-2-01-480V	175765	2025-01-31	2024-01-26
EMI TEST RECEIVER	Rohde & Schwarz	ESR	171646	2025-02-28	2024-02-27
Transient Limiter	TE	TBFL1	207996	2024-08-31	2023-08-10
UL TEST SOFTWARE LIST					
Radiated Software	UL	UL EMC	Ver 2023-05-01		
Antenna Port Software	UL	UL RF	Ver 2022-08-16		
AC Line Conducted Software	UL	UL EMC	Rev 9.5 2023-03-03		

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time T (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
2.4GHz Band						
BLE (1Mbps):ZBM00-10z	1.000	1.000	1.000	100.00	0.00	0.010
BLE (1Mbps) :ZKM00-10z	1.000	1.000	1.000	100.00	0.00	0.010

Note: For testing purposes, the EUT is transmitting continuously
For DCCF used for radiated harmonic average measurements, DCCF is based on
manufacturer's declared operational duty cycle of 28%
 $DCCF = 20 \cdot \log(0.28) = -11.06 \text{ dB}$

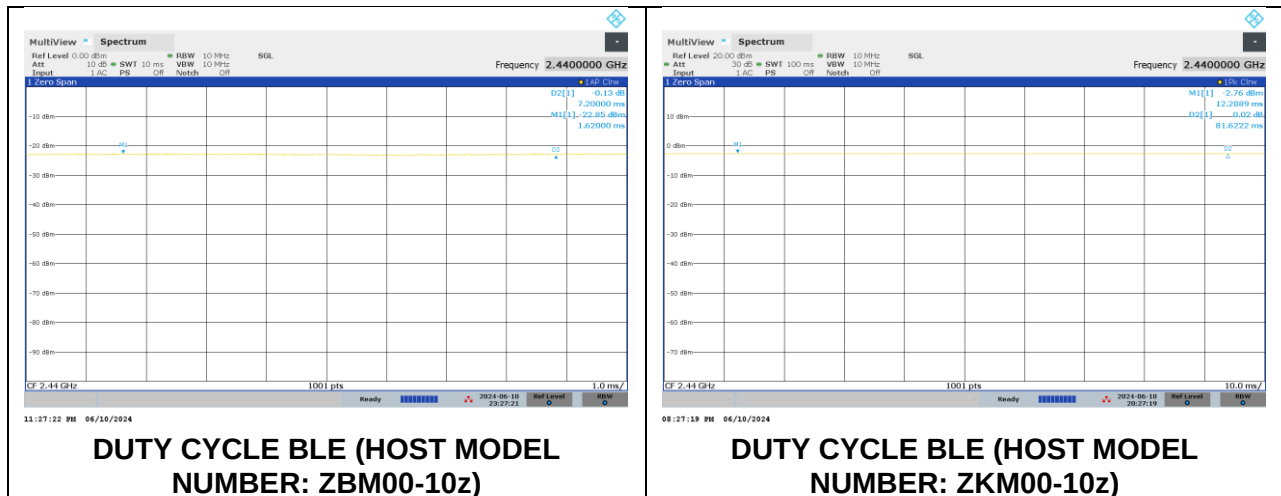

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0318
Middle	2440	1.0303
High	2480	1.0317



9.3. 6 dB BANDWIDTH

LIMITS


FCC §15.247 (a) (2)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.7200	0.5
Middle	2440	0.7230	0.5
High	2480	0.7050	0.5

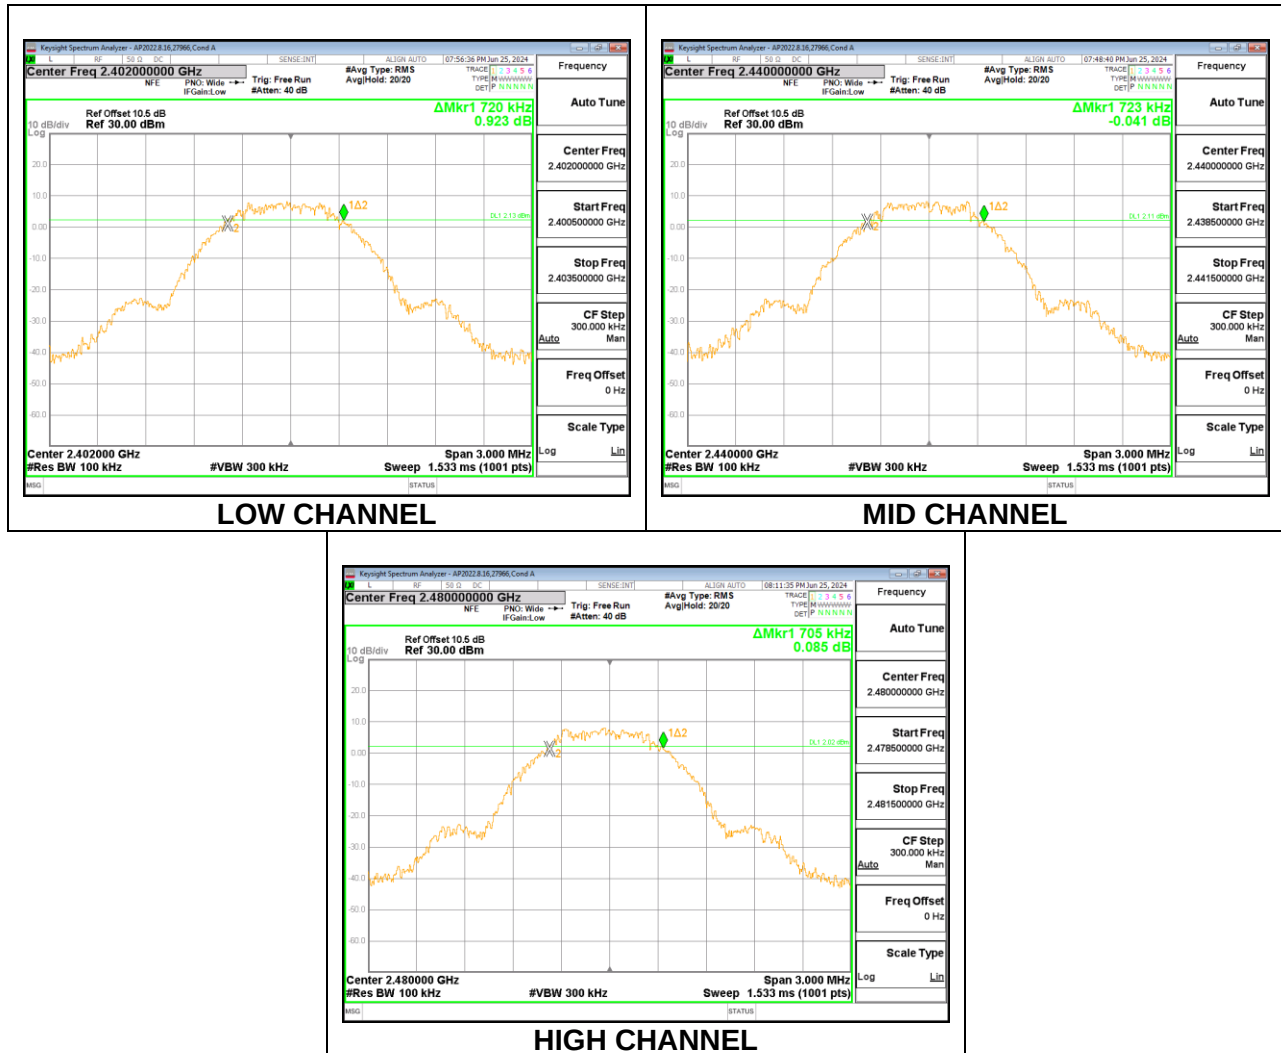

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband power sensor. Peak output power was read directly from power meter.

RESULTS

Tested By:	27966 PV
Date:	2024-06-25

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.460	30	-20.540
Middle	2440	9.370	30	-20.630
High	2480	9.280	30	-20.720

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband power sensor. Gated average output power was read directly from power meter.

RESULTS

Tested By:	27966 PV
Date:	2024-06-25

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	9.39
Middle	2440	9.31
High	2480	9.21

9.6. POWER SPECTRAL DENSITY

LIMITS


FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-7.68	8	-15.68
Middle	2440	-7.52	8	-15.52
High	2480	-7.83	8	-15.83

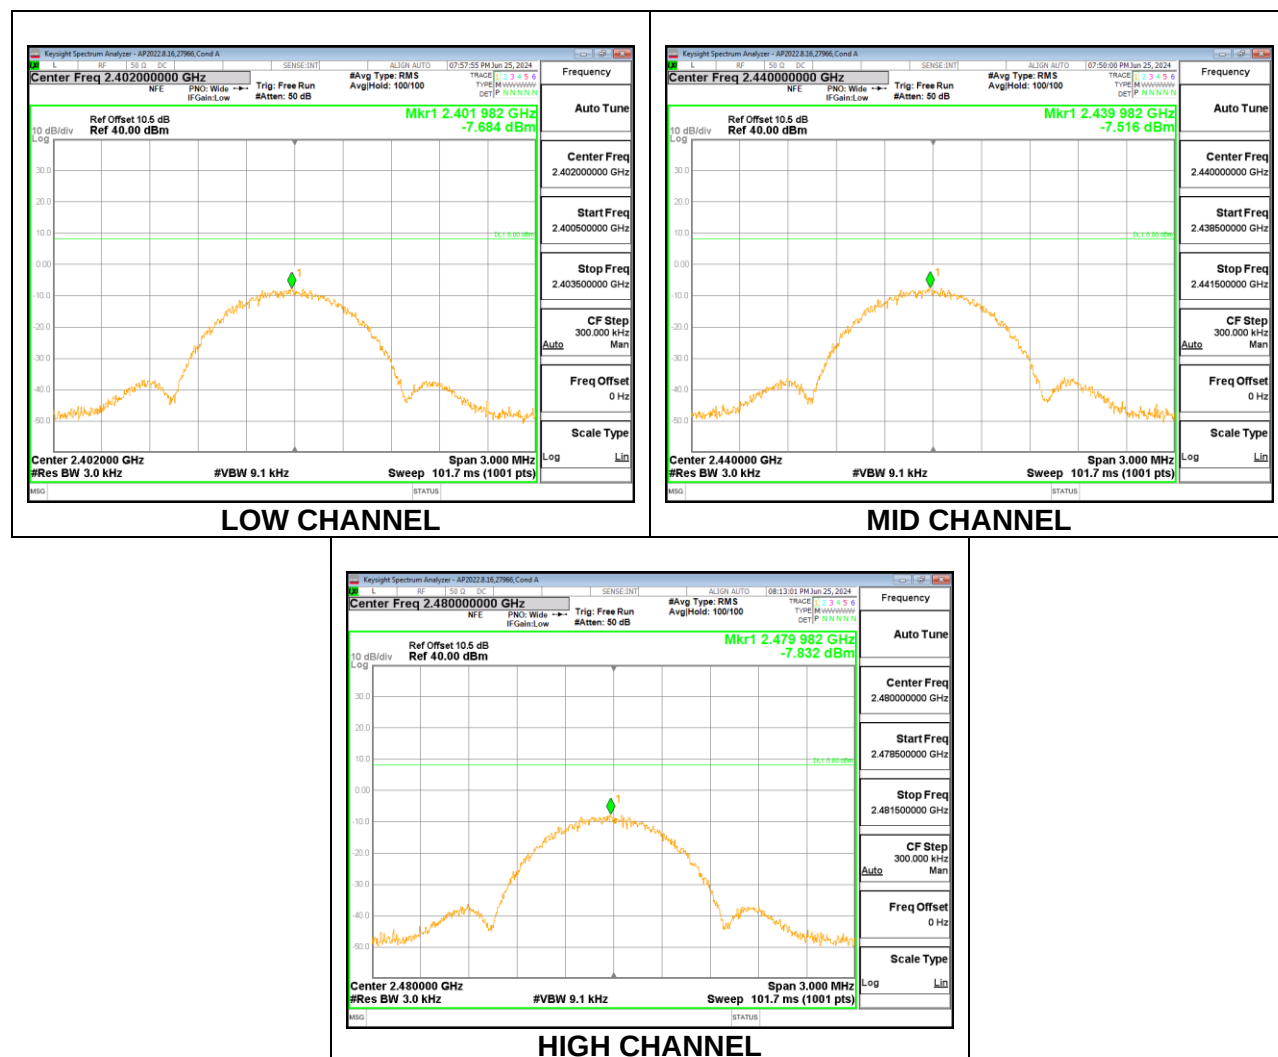

9.7. CONDUCTED SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dBc.


RESULTS

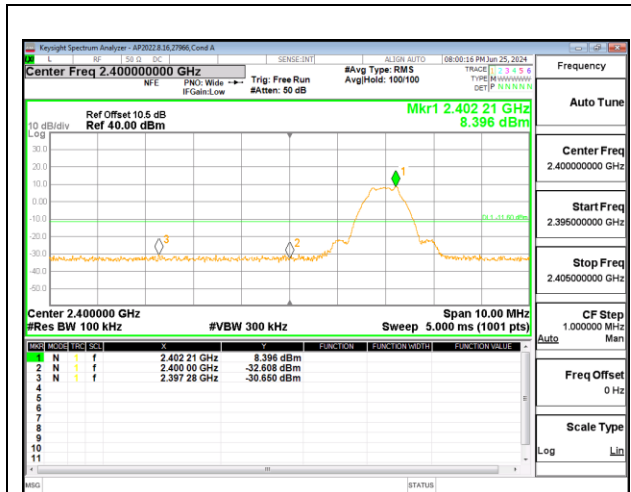


LOW CHANNEL BANDEDGE

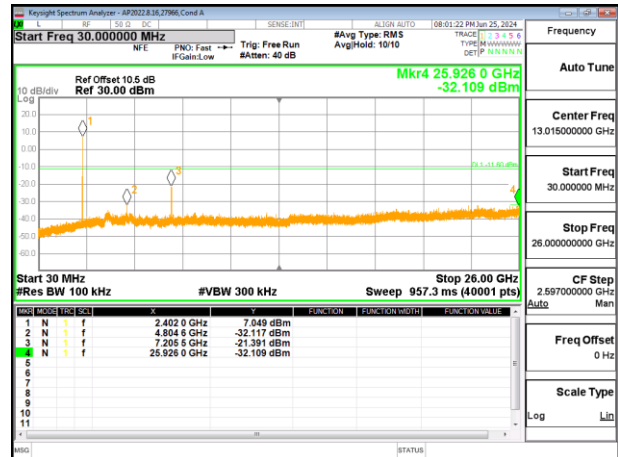


OUT-OF-BAND LOW CHANNEL

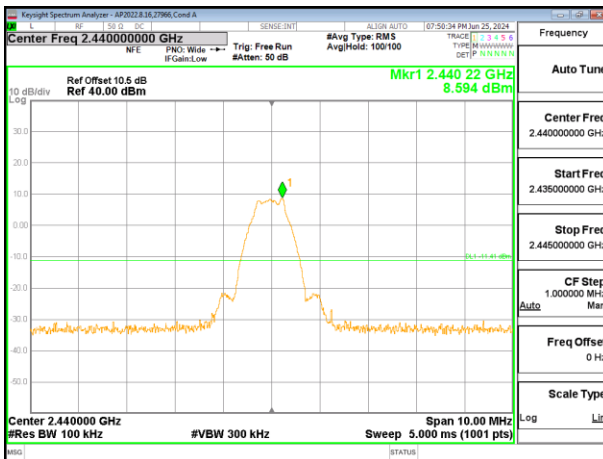


IN-BAND REFERENCE LEVEL

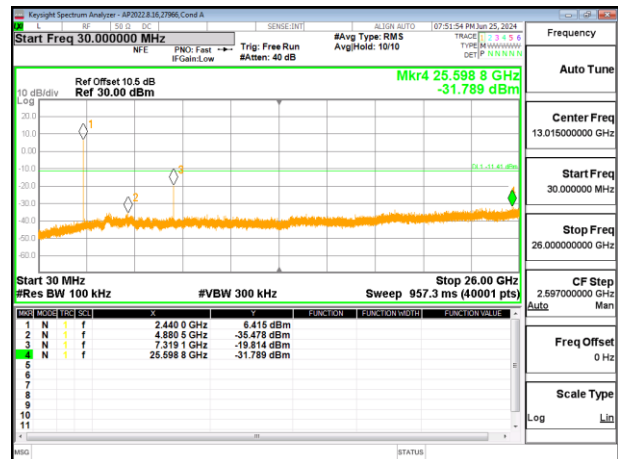

OUT-OF-BAND MID CHANNEL

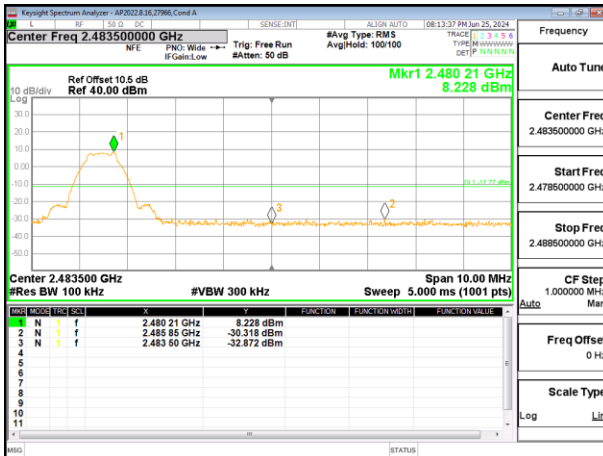

HIGH CHANNEL BANDEDGE

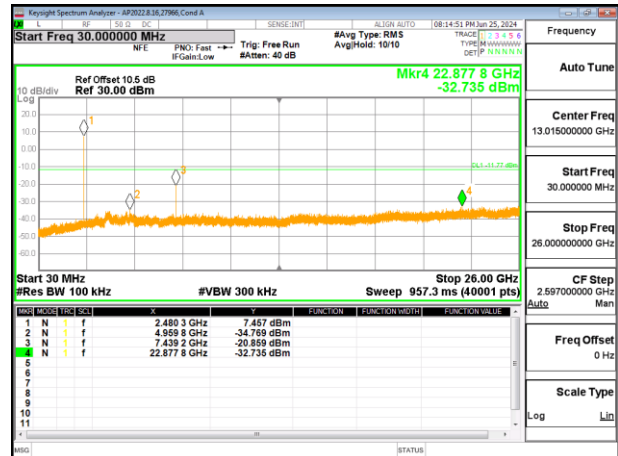

OUT-OF-BAND HIGH CHANNEL

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the resolution bandwidth 9kHz to 150kHz is set to 300Hz, video bandwidth is set to 1kHz. 150kHz to 30MHz, the resolution bandwidth is set to 10kHz, video bandwidth is set to 30kHz.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned

from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only. Blue color trace on plots: Parallel orientation (face on). Green color trace on plots: Perpendicular orientation (face off).

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


NOTE: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table), using the free space impedance of 377 Ohms. For example the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. HOST MODEL NUMBER: ZBM00-10z

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

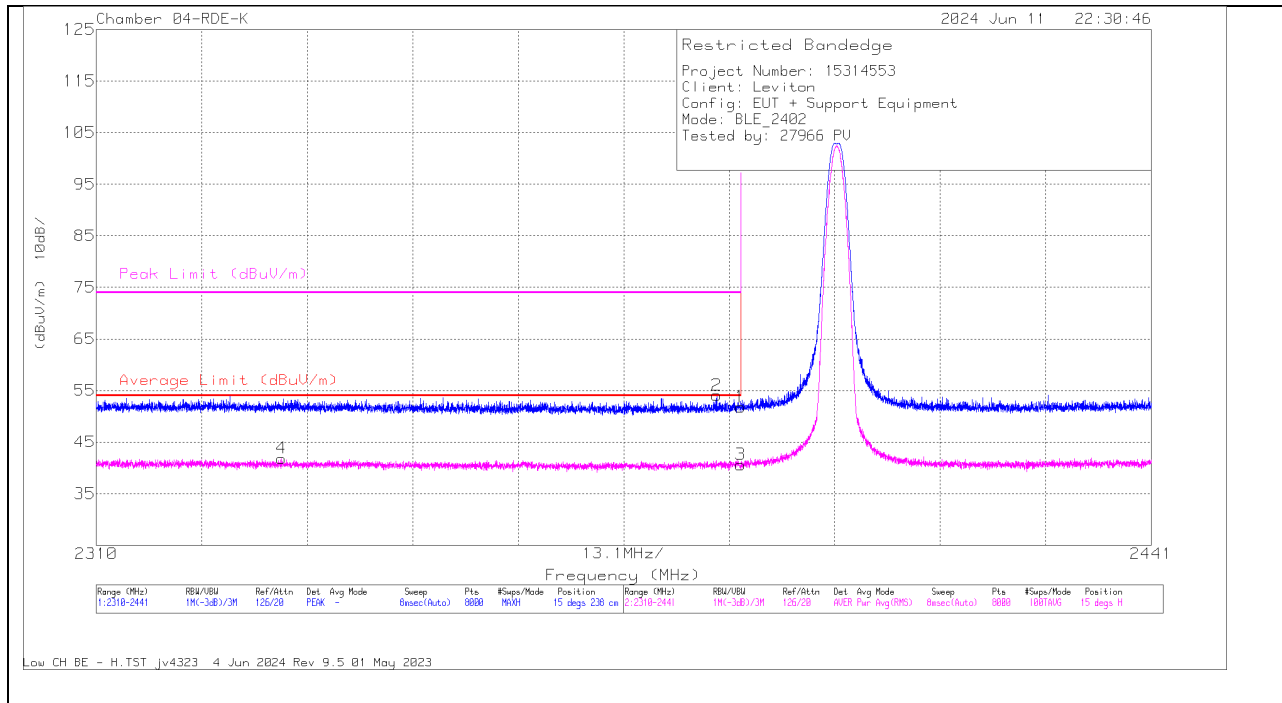


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	54.81	Pk	32.2	-35.2	51.81	-	-	74	-22.19	15	238	H
2	* 2387.037	56.98	Pk	32.2	-35.1	54.08	-	-	74	-19.92	15	238	H
3	* 2390	43.63	RMS	32.2	-35.2	40.63	54	-13.37	-	-	15	238	H
4	* 2333.026	44.65	RMS	32.6	-35.4	41.85	54	-12.15	-	-	15	238	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

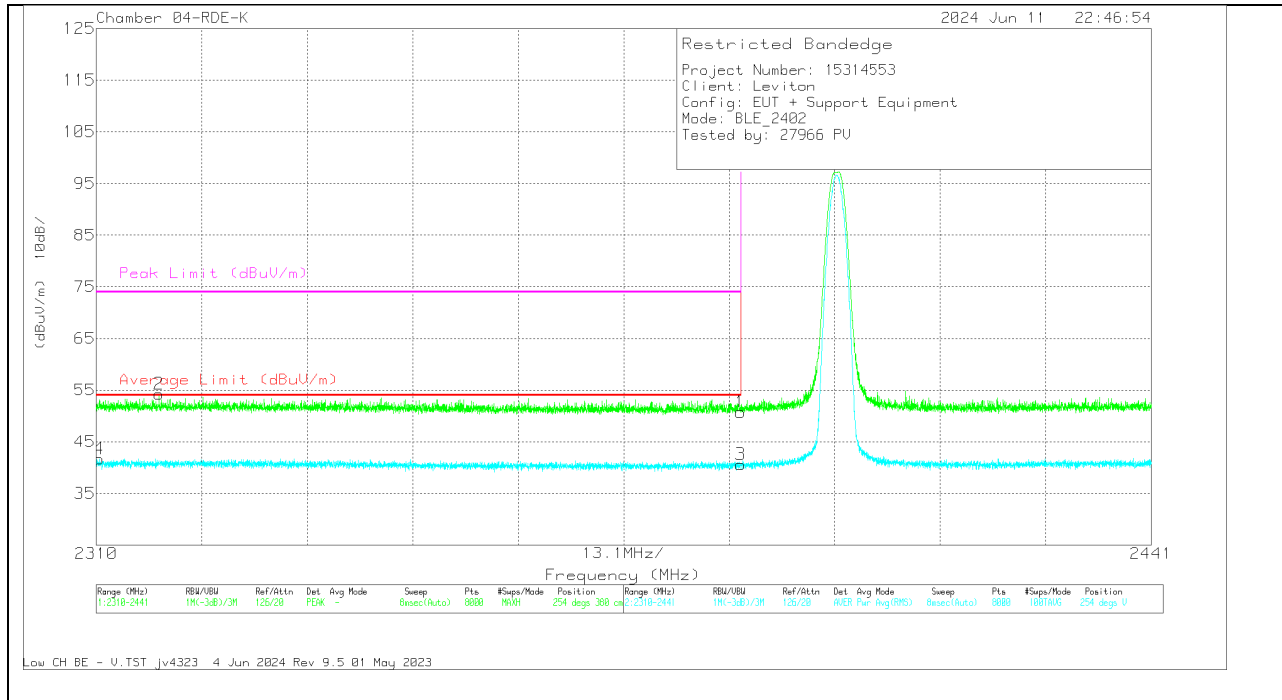


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	53.75	Pk	32.2	-35.2	50.75	-	-	74	-23.25	254	380	V
2	* 2317.795	56.95	Pk	32.7	-35.4	54.25	-	-	74	-19.75	254	380	V
3	* 2390	43.61	RMS	32.2	-35.2	40.61	54	-13.39	-	-	254	380	V
4	* 2310.36	44.5	RMS	32.6	-35.4	41.7	54	-12.3	-	-	254	380	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

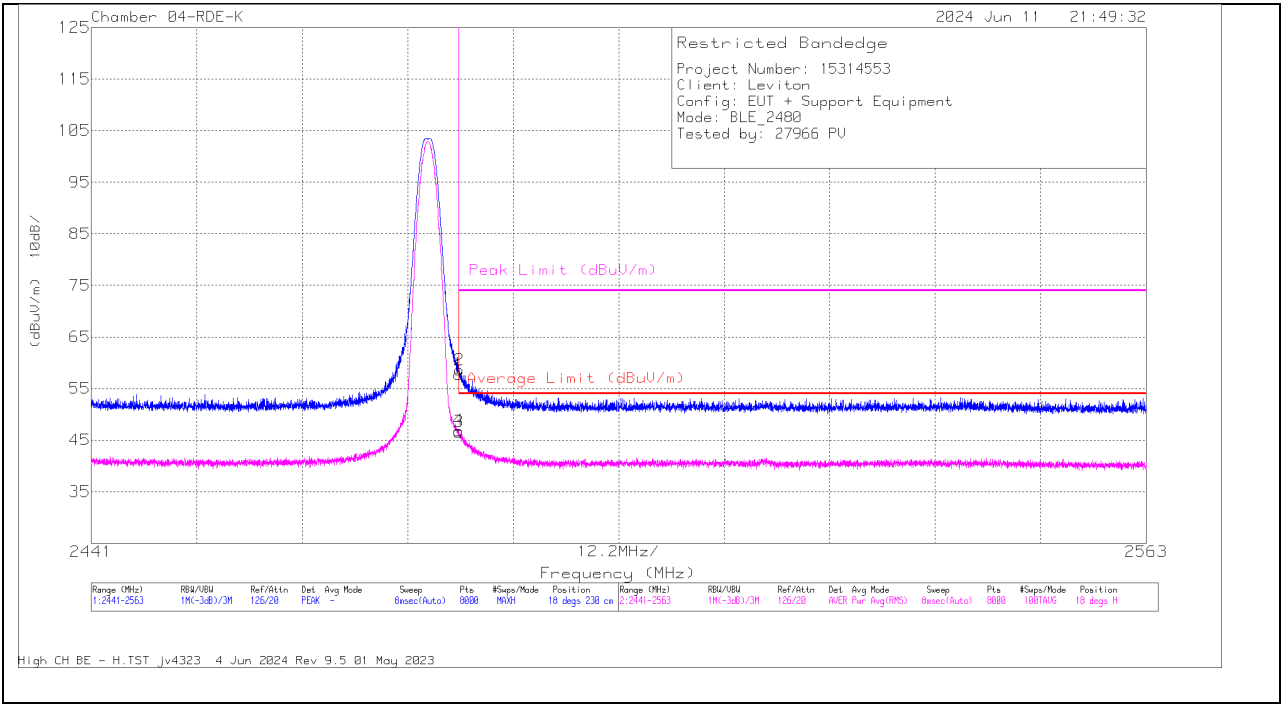

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Ampl/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	60.35	PK	32.2	-34.8	57.75	-	-	74	-16.25	18	230	H
2	* 2483.568	61.19	PK	32.2	-34.8	58.59	-	-	74	-15.41	18	230	H
3	* 2483.5	49.23	RMS	32.2	-34.8	46.63	54	-7.37	-	-	18	230	H
4	* 2483.507	49.45	RMS	32.2	-34.8	46.85	54	-7.15	-	-	18	230	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT


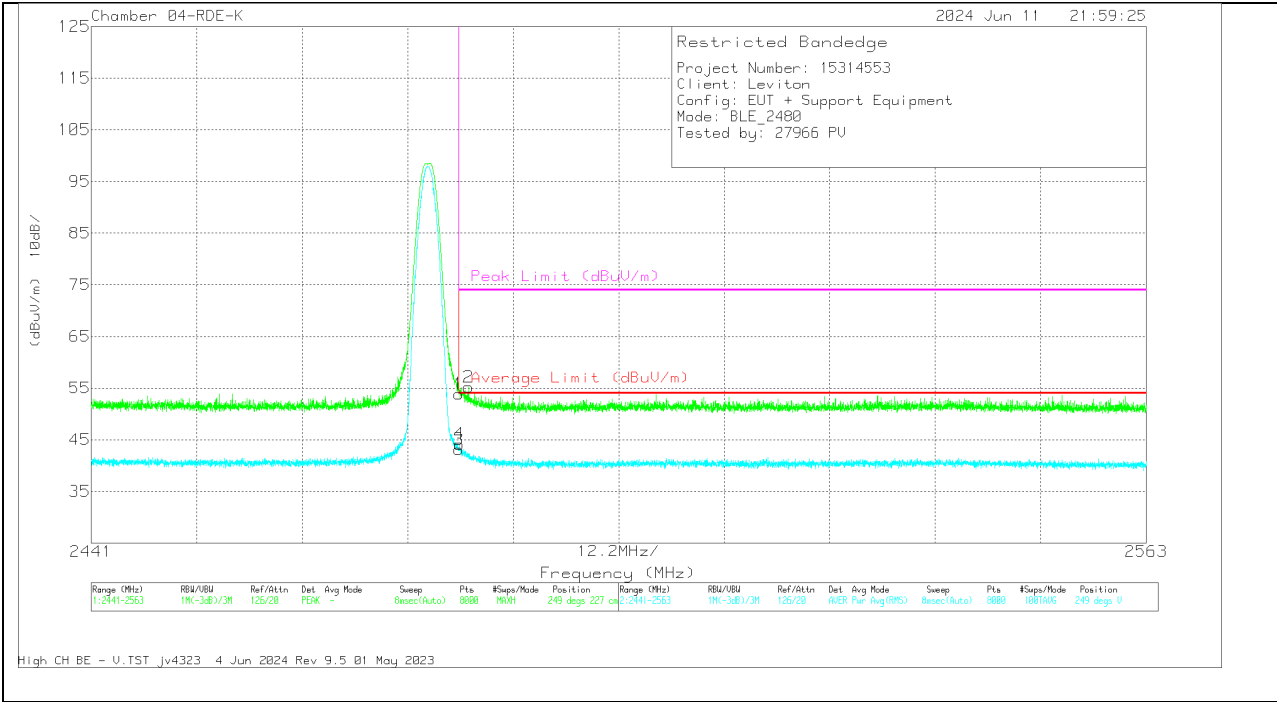


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	56.46	Pk	32.2	-34.8	53.86	-	-	74	-20.14	249	227	V
2	* 2484.621	57.86	Pk	32.1	-34.8	55.16	-	-	74	-18.84	249	227	V
3	* 2483.5	45.74	RMS	32.2	-34.8	43.14	54	-10.86	-	-	249	227	V
4	* 2483.553	46.75	RMS	32.2	-34.8	44.15	54	-9.85	-	-	249	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

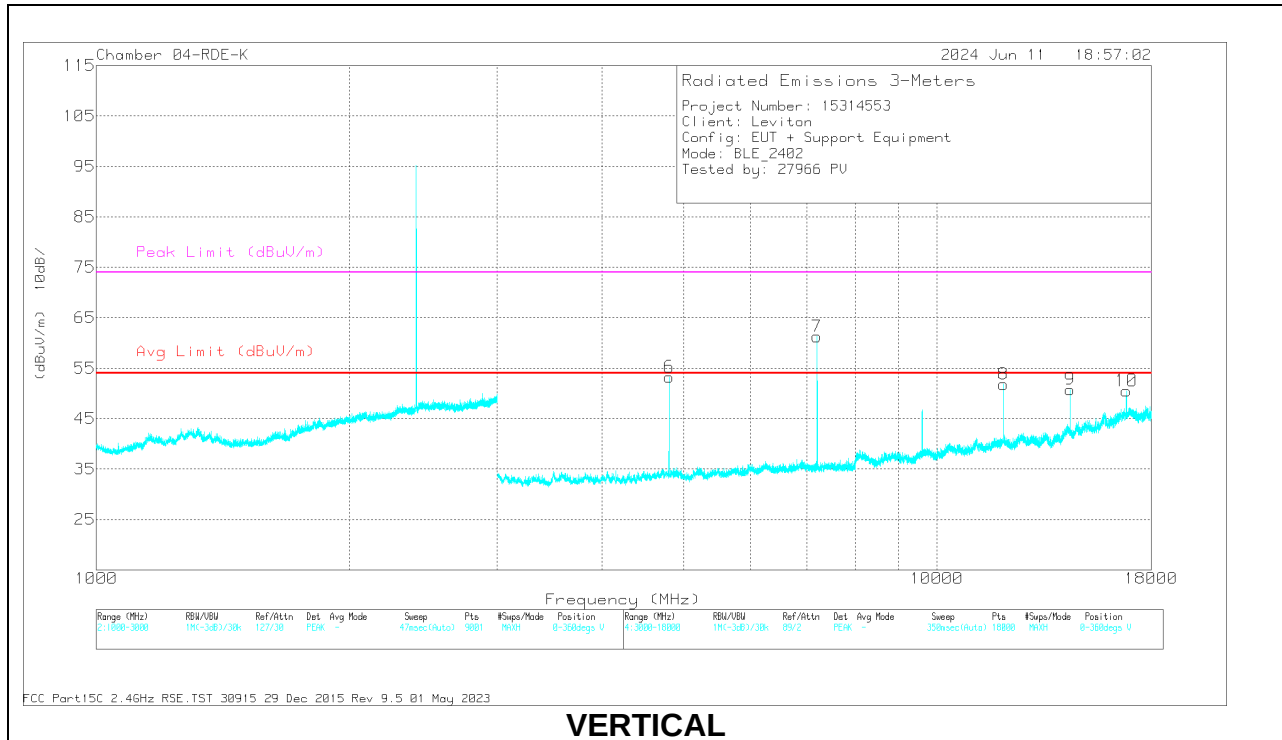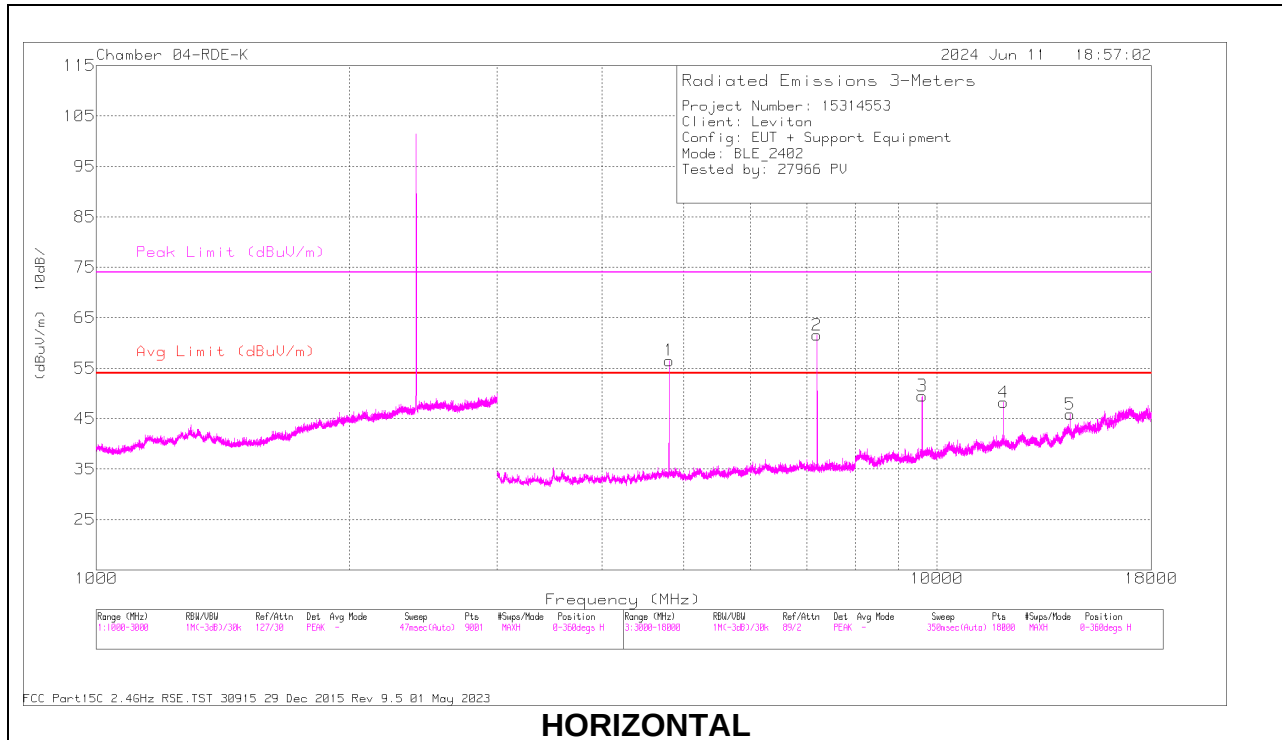

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4803.434	62.62	PK	34.9	-41	56.52	-	-	74	-17.48	0-360	101	H
2	7206.069	64.44	PK	36	-38.9	61.54	-	-	-	-	0-360	101	H
3	9608.703	49.89	PK	36.9	-37.3	49.49	-	-	-	-	0-360	101	H
4	* 12008.838	44.84	PK	38.6	-35.2	48.24	-	-	74	-25.76	0-360	101	H
5	14413.139	41.56	PK	39.5	-35.2	45.86	-	-	-	-	0-360	101	H
6	* 4803.434	59.36	PK	34.9	-41	53.26	-	-	74	-20.74	0-360	199	V
7	7206.069	64.18	PK	36	-38.9	61.28	-	-	-	-	0-360	101	V
8	* 12008.838	48.4	PK	38.6	-35.2	51.8	-	-	74	-22.2	0-360	101	V
9	14413.139	46.48	PK	39.5	-35.2	50.78	-	-	-	-	0-360	101	V
10	16814.94	41.32	PK	42.9	-33.7	50.52	-	-	-	-	0-360	101	V

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4804.378	64.78	PK2	34.9	-41	0	58.68	-	-	74	-15.32	0	101	H
	* 4804.378	-	AV	-	-	-11.06	47.62	54	-6.38	-	-	0	101	H
2	7205.103	66.96	PK2	36.1	-38.9	0	64.16	-	-	-	-	291	115	H
	7205.103	-	AV	-	-	-11.06	53.1	-	-	-	-	291	115	H
4	* 12008.366	51.13	PK2	38.7	-35.2	0	54.63	-	-	74	-19.37	198	108	H
	* 12008.366	-	AV	-	-	-11.06	43.57	54	-10.43	-	-	198	108	H
6	* 4803.409	63.21	PK2	34.9	-41	0	57.11	-	-	74	-16.89	34	220	V
	* 4803.409	-	AV	-	-	-11.06	46.05	54	-7.95	-	-	34	220	V
7	7206.543	67.42	PK2	36	-38.9	0	64.52	-	-	-	-	73	121	V
	7206.543	-	AV	-	-	-11.06	53.46	-	-	-	-	73	121	V
8	* 12008.344	53.91	PK2	38.7	-35.2	0	57.41	-	-	74	-16.59	343	153	V
	* 12008.344	-	AV	-	-	-11.06	46.35	54	-7.65	-	-	343	153	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

AV = Peak reading + Duty Cycle Correction Factor (KDB558074 Section 11, Question 3 (a))

Duty Cycle Correction Factor = -11.06 dB. (28%)

MID CHANNEL RESULTS

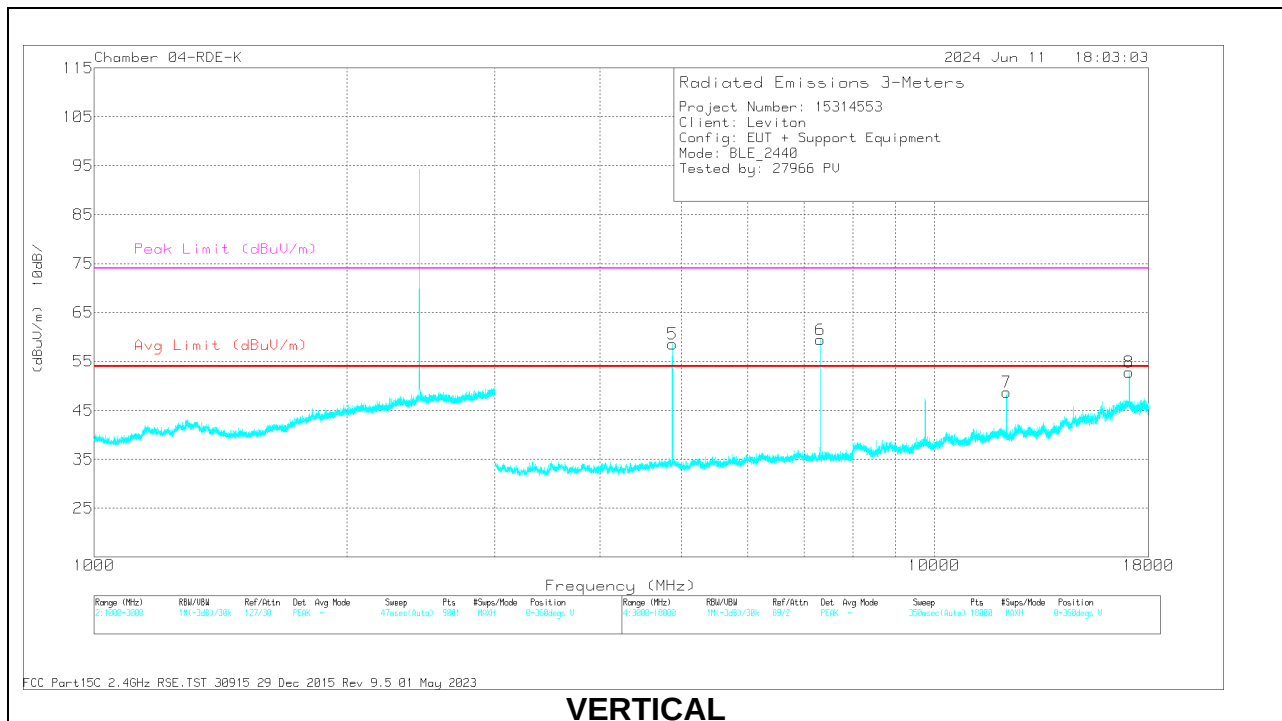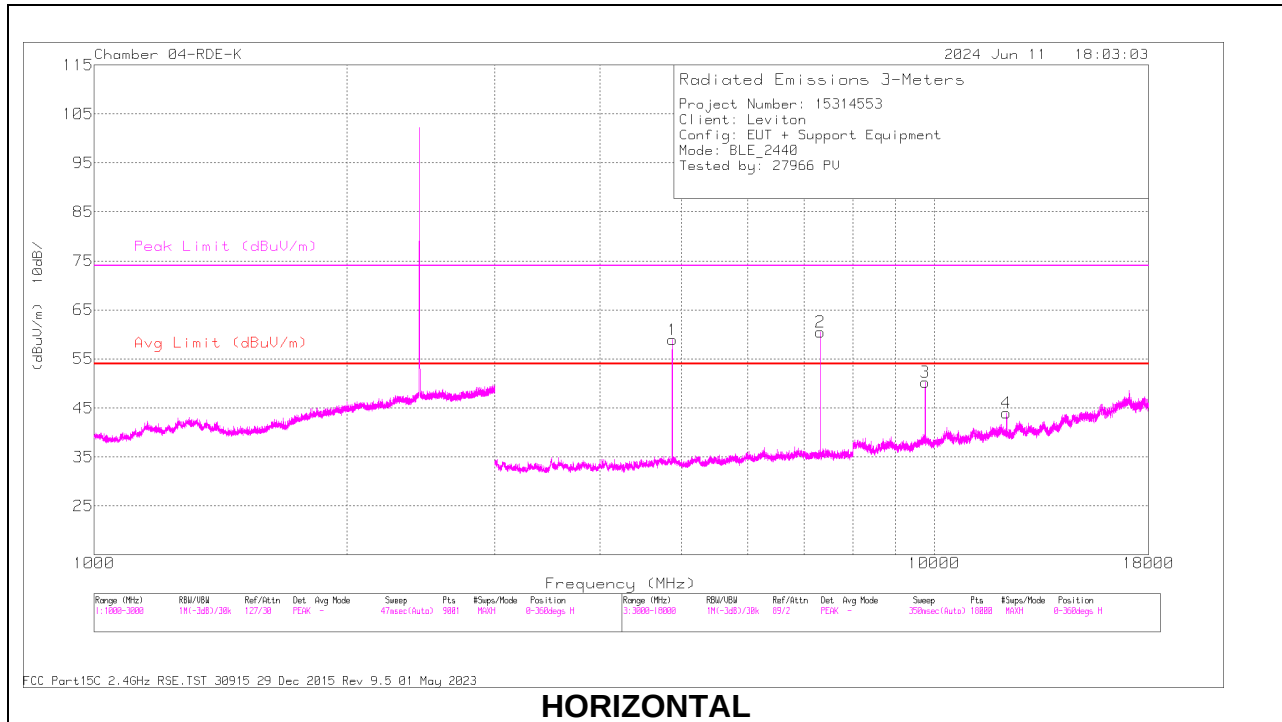

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/CbllFitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4880.105	65.49	PK	34.4	-41	58.89	-	-	74	-15.11	0-360	101	H
2	* 7320.242	62.86	PK	36.1	-38.5	60.46	-	-	74	-13.54	0-360	101	H
3	9760.379	50.4	PK	37	-37.2	50.2	-	-	-	-	0-360	101	H
4	* 12198.848	40.46	PK	38.9	-35.4	43.96	-	-	74	-30.04	0-360	199	H
5	* 4880.105	65.14	PK	34.4	-41	58.54	-	-	74	-15.46	0-360	200	V
6	* 7320.242	61.81	PK	36.1	-38.5	59.41	-	-	74	-14.59	0-360	101	V
7	* 12200.515	45.1	PK	38.9	-35.3	48.7	-	-	74	-25.3	0-360	101	V
8	17078.288	43.19	PK	42.9	-33.3	52.79	-	-	-	-	0-360	200	V

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/CbllFitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4880.259	66.65	PK2	34.4	-41	0	60.05	-	-	74	-13.95	360	113	H
	* 4880.259	-	AV	-	-	-11.06	48.99	54	-5.01	-	-	360	113	H
2	* 7319.051	65.9	PK2	36	-38.5	0	63.4	-	-	74	-10.6	304	103	H
	* 7319.051	-	AV	-	-	-11.06	52.34	54	-1.66	-	-	304	103	H
4	* 12198.106	49.84	PK2	38.9	-35.4	0	53.34	-	-	74	-20.66	99	171	H
	* 12198.106	-	AV	-	-	-11.06	42.28	54	-11.72	-	-	99	171	H
5	* 4880.326	66.7	PK2	34.4	-41	0	60.1	-	-	74	-13.9	160	189	V
	* 4880.326	-	AV	-	-	-11.06	49.04	54	-4.96	-	-	160	189	V
6	* 7319.079	63.49	PK2	36	-38.5	0	60.99	-	-	74	-13.01	267	348	V
	* 7319.079	-	AV	-	-	-11.06	49.93	54	-4.07	-	-	267	348	V
7	* 12198.437	52.35	PK2	38.9	-35.4	0	55.85	-	-	74	-18.15	1	114	V
	* 12198.437	-	AV	-	-	-11.06	44.79	54	-9.21	-	-	1	114	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

AV = Peak reading + Duty Cycle Correction Factor (KDB558074 Section 11, Question 3 (a))

Duty Cycle Correction Factor = -11.06 dB.

HIGH CHANNEL RESULTS

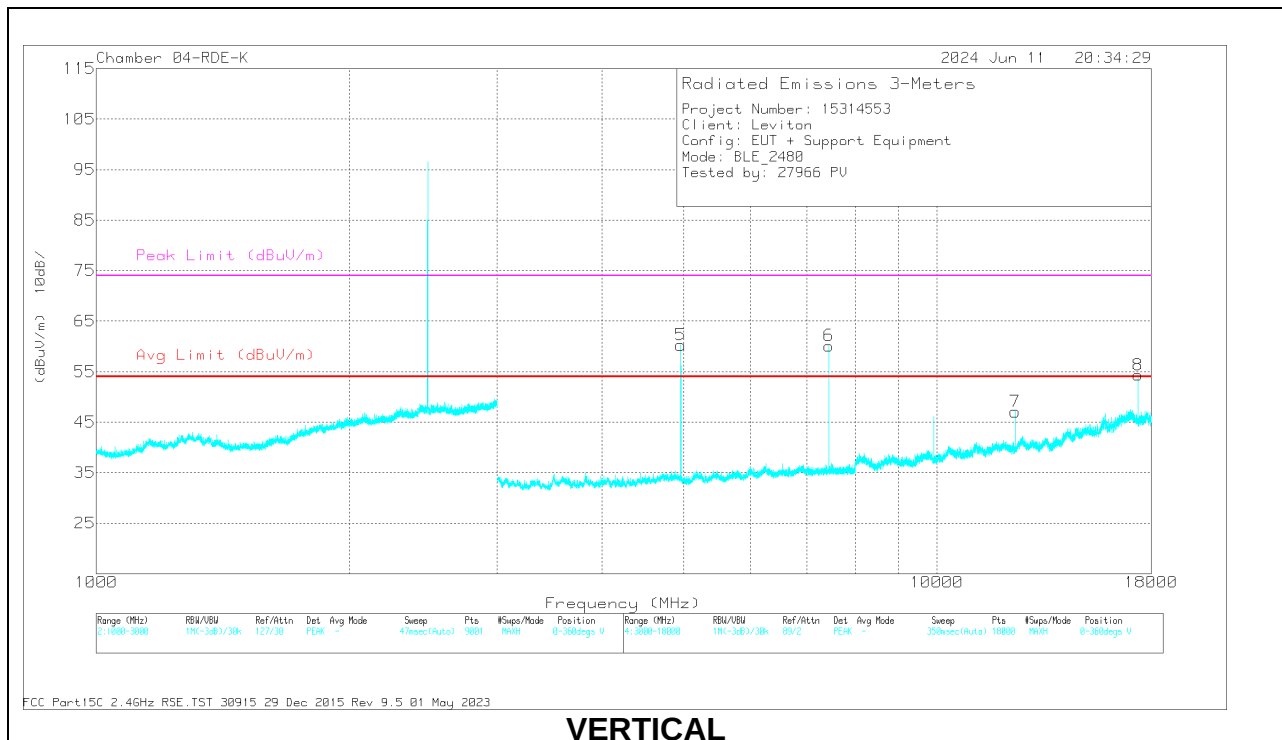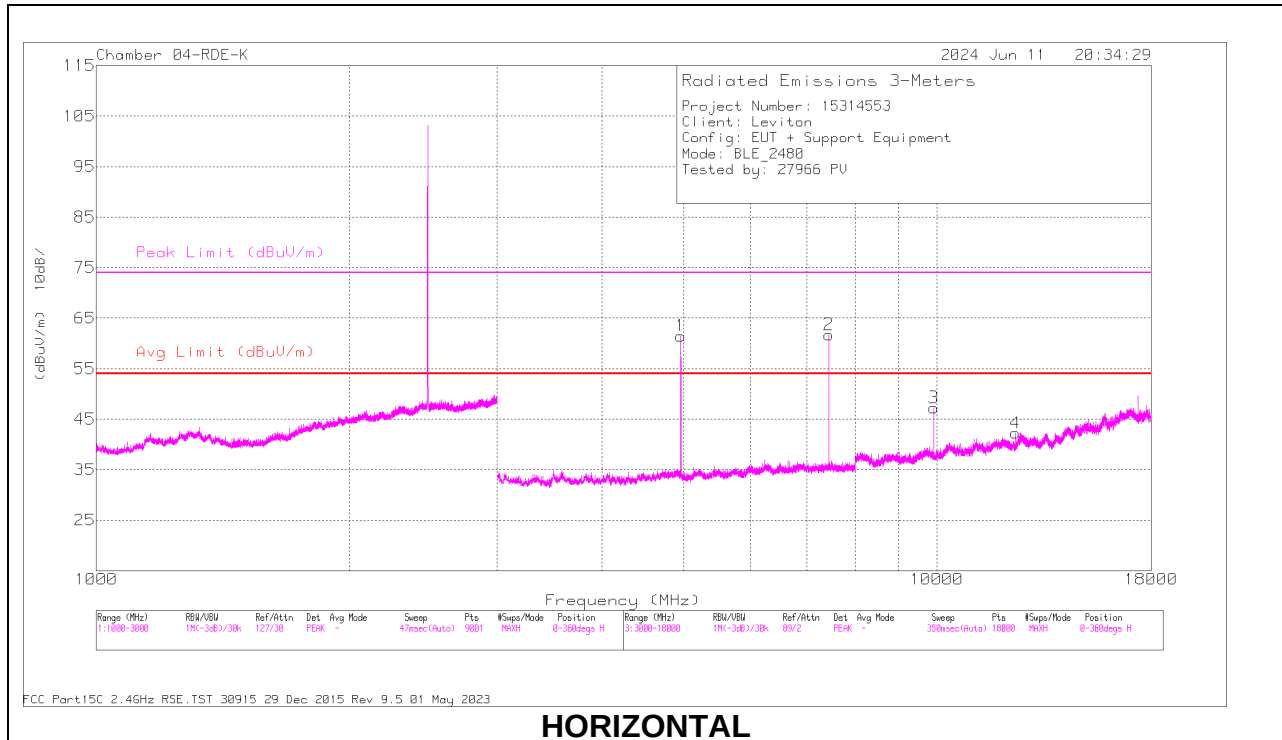

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4960.11	68.39	Pk	34.1	-41	0	61.49	-	-	74	-12.51	0-360	101	H
2	* 7440.249	64.22	Pk	35.8	-38.3	0	61.72	-	-	74	-12.28	0-360	101	H
3	9920.388	47.26	Pk	37.1	-37.1	0	47.26	-	-	-	-	0-360	101	H
4	* 12400.526	38.15	Pk	38.9	-34.8	0	42.25	-	-	74	-31.75	0-360	200	H
5	* 4960.11	67.17	Pk	34.1	-41	0	60.27	-	-	74	-13.73	0-360	200	V
6	* 7440.249	62.62	Pk	35.8	-38.3	0	60.12	-	-	74	-13.88	0-360	101	V
7	* 12398.86	42.88	Pk	39	-34.8	0	47.08	-	-	74	-26.92	0-360	101	V
8	17361.638	44.71	Pk	42.2	-32.6	0	54.31	-	-	-	-	0-360	101	V

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4959.35	68.84	PK2	34.1	-41	0	61.94	-	-	74	-12.06	360	102	H
	* 4959.35	-	AV	-	-	-11.06	50.88	54	-3.12	-	-	360	102	H
2	* 7440.482	65.6	PK2	35.8	-38.3	0	63.1	-	-	74	-10.9	288	112	H
	* 7440.482	-	AV	-	-	-11.06	52.04	54	-1.96	-	-	288	112	H
4	* 12400.628	47.3	PK2	38.9	-34.8	0	51.4	-	-	74	-22.6	89	149	H
	* 12400.628	-	AV	-	-	-11.06	40.34	54	-13.66	-	-	89	149	H
5	* 4960.378	69.37	PK2	34.1	-41	0	62.47	-	-	74	-11.53	160	148	V
	* 4960.378	-	AV	-	-	-11.06	51.41	54	-2.59	-	-	160	148	V
6	* 7438.987	66.16	PK2	35.8	-38.3	0	63.66	-	-	74	-10.34	123	107	V
	* 7438.987	-	AV	-	-	-11.06	52.6	54	-1.4	-	-	123	107	V
7	* 12398.514	49.27	PK2	39	-34.8	0	53.47	-	-	74	-20.53	8	124	V
	* 12398.514	-	AV	-	-	-11.06	42.41	54	-11.59	-	-	8	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


AV = Peak reading + Duty Cycle Correction Factor (KDB558074 Section 11, Question 3 (a))

Duty Cycle Correction Factor = -11.06 dB. (28%)

10.2.2. HOST MODEL NUMBER: ZKM00-10z

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

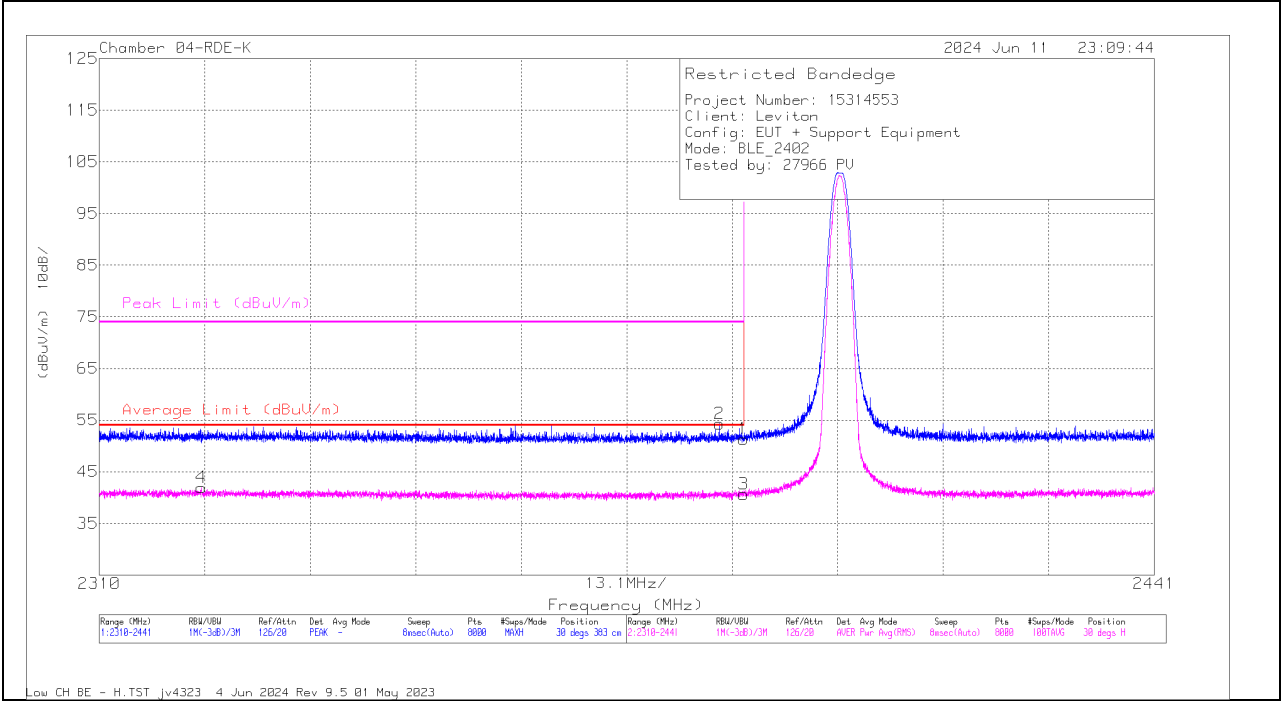

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	54.36	Pk	32.2	-35.2	51.36	-	-	74	-22.64	30	383	H
2	* 2386.988	57.2	Pk	32.2	-35.1	54.3	-	-	74	-19.7	30	383	H
3	* 2390	43.65	RMS	32.2	-35.2	40.65	54	-13.35	-	-	30	383	H
4	* 2322.676	44.65	RMS	32.7	-35.4	41.95	54	-12.05	-	-	30	383	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

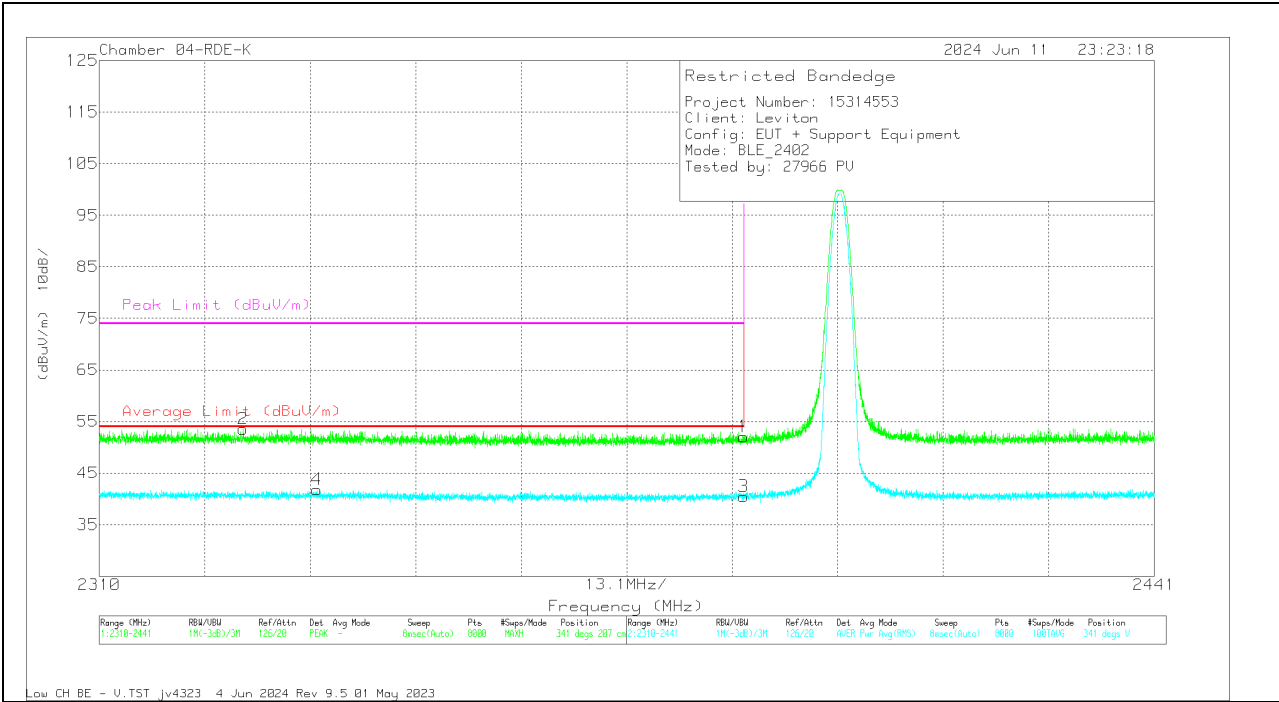


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	55.05	Pk	32.2	-35.2	52.05	-	-	74	-21.95	341	207	V
2	* 2327.884	56.26	Pk	32.7	-35.4	53.56	-	-	74	-20.44	341	207	V
3	* 2390	43.46	RMS	32.2	-35.2	40.46	54	-13.54	-	-	341	207	V
4	* 2337.022	44.7	RMS	32.5	-35.4	41.8	54	-12.2	-	-	341	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

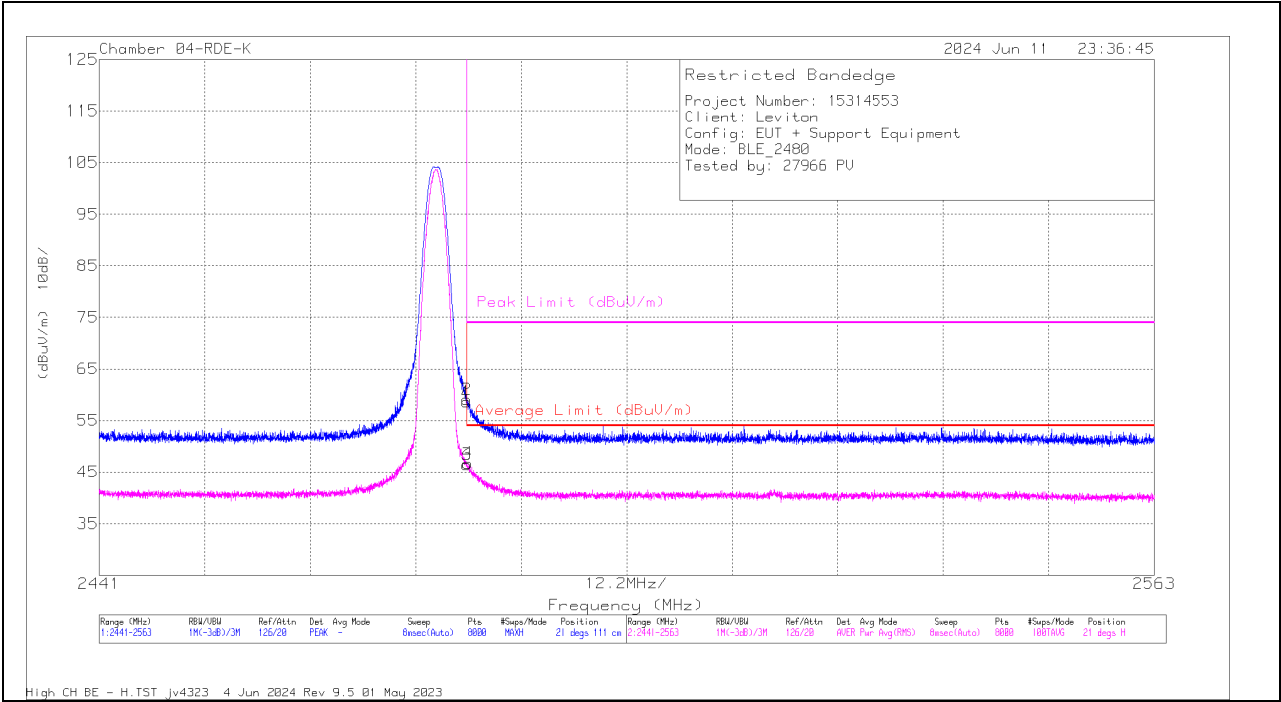

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Ampl/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	61.21	PK	32.2	-34.8	58.61	-	-	74	-15.39	21	111	H
2	* 2483.523	61.66	PK	32.2	-34.8	59.06	-	-	74	-14.94	21	111	H
3	* 2483.5	49.07	RMS	32.2	-34.8	46.47	54	-7.53	-	-	21	111	H
4	* 2483.614	49.3	RMS	32.2	-34.8	46.7	54	-7.3	-	-	21	111	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

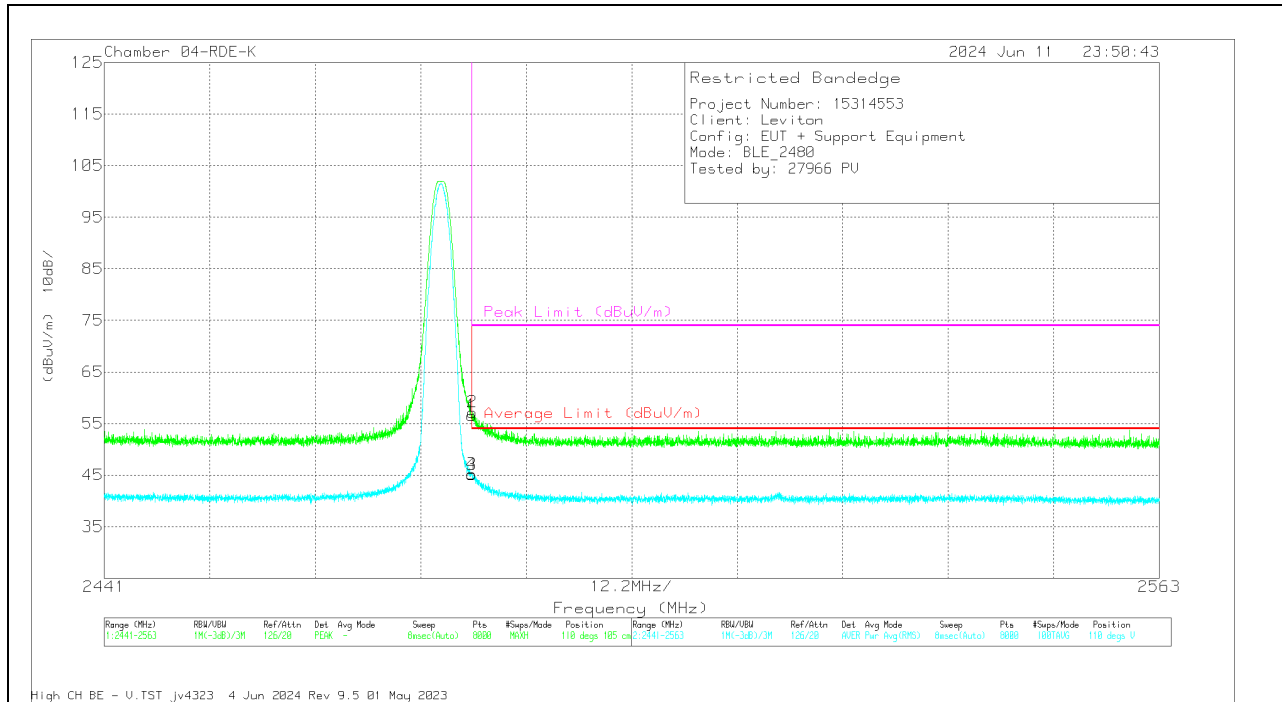

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	59.18	Pk	32.2	-34.8	56.58	-	-	74	-17.42	110	105	V
2	* 2483.568	59.79	Pk	32.2	-34.8	57.19	-	-	74	-16.81	110	105	V
3	* 2483.5	47.7	RMS	32.2	-34.8	45.1	54	-8.9	-	-	110	105	V
4	* 2483.523	47.8	RMS	32.2	-34.8	45.2	54	-8.8	-	-	110	105	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

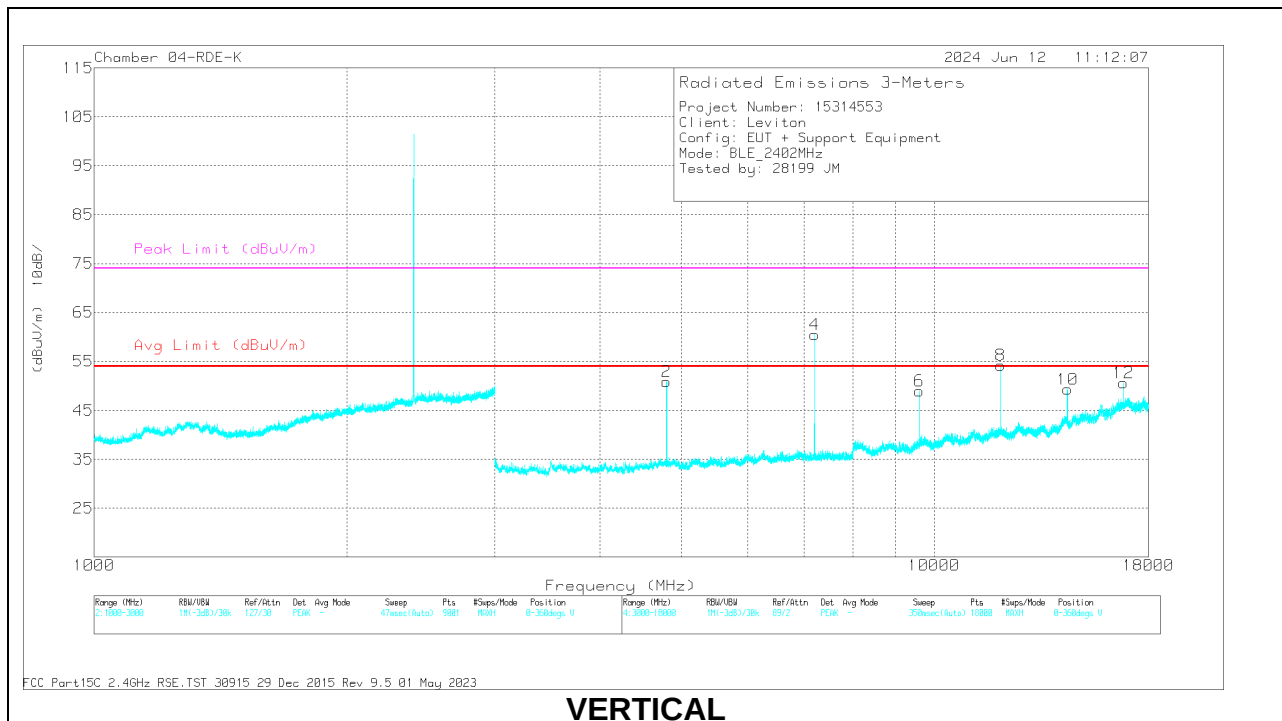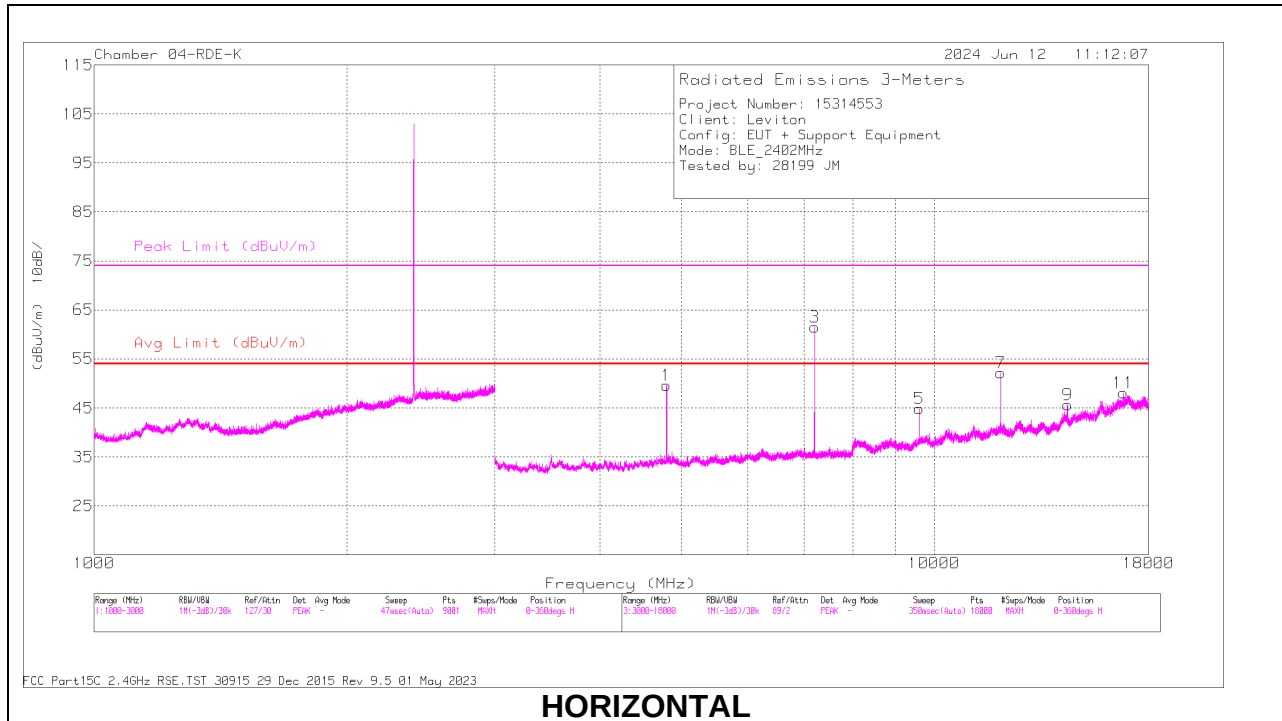

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4803.434	55.72	Pk	34.9	-41	49.62	-	-	74	-24.38	0-360	101	H
2	* 4803.434	56.94	Pk	34.9	-41	50.84	-	-	74	-23.16	0-360	200	V
3	7206.069	64.4	Pk	36	-38.9	61.5	-	-	-	-	0-360	200	H
4	7206.069	63.34	Pk	36	-38.9	60.44	-	-	-	-	0-360	101	V
5	9608.703	45.23	Pk	36.9	-37.3	44.83	-	-	-	-	0-360	101	H
6	9608.703	49.4	Pk	36.9	-37.3	49	-	-	-	-	0-360	200	V
7	* 12010.505	48.47	Pk	38.8	-35.1	52.17	-	-	74	-21.83	0-360	101	H
8	* 12011.338	50.62	Pk	38.8	-35.2	54.22	-	-	74	-19.78	0-360	101	V
9	14413.139	41.39	Pk	39.5	-35.2	45.69	-	-	-	-	0-360	101	H
10	14413.139	45	Pk	39.5	-35.2	49.3	-	-	-	-	0-360	101	V
11	16815.774	38.87	Pk	42.9	-33.7	48.07	-	-	-	-	0-360	101	H
12	16815.774	41.47	Pk	42.9	-33.7	50.67	-	-	-	-	0-360	101	V

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4803.604	58.97	PK2	34.9	-41	0	52.87	-	-	74	-21.13	0	142	H
	* 4803.604	58.97	AV	-	-	-11.06	41.81	54	-12.19	-	-	0	142	H
2	* 4804.352	61.17	PK2	34.9	-41	0	55.07	-	-	74	-18.93	10	235	V
	* 4804.352	61.17	AV	-	-	-11.06	44.01	54	-9.99	-	-	10	235	V
4	7204.994	68.09	PK2	36.1	-38.9	0	65.29	-	-	-	-	17	299	H
	7204.994	68.09	AV	-	-	-11.06	54.23	-	-	-	-	17	299	H
6	7204.964	65.99	PK2	36.1	-38.9	0	63.19	-	-	-	-	23	115	V
	7204.964	65.99	AV	-	-	-11.06	52.13	-	-	-	-	23	115	V
7	* 12010.887	52.93	PK2	38.8	-35.2	0	56.53	-	-	74	-17.47	55	110	H
	* 12010.887	52.93	AV	-	-	-11.06	45.47	54	-8.53	-	-	55	110	H
8	* 12011	55.68	PK2	38.8	-35.2	0	59.28	-	-	74	-14.72	279	130	V
	* 12011	55.68	AV	-	-	-11.06	48.22	54	-5.78	-	-	279	130	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

AV = Peak reading + Duty Cycle Correction Factor (KDB558074 Section 11, Question 3 (a))

Duty Cycle Correction Factor = -11.06 dB. (28%)

MID CHANNEL RESULTS

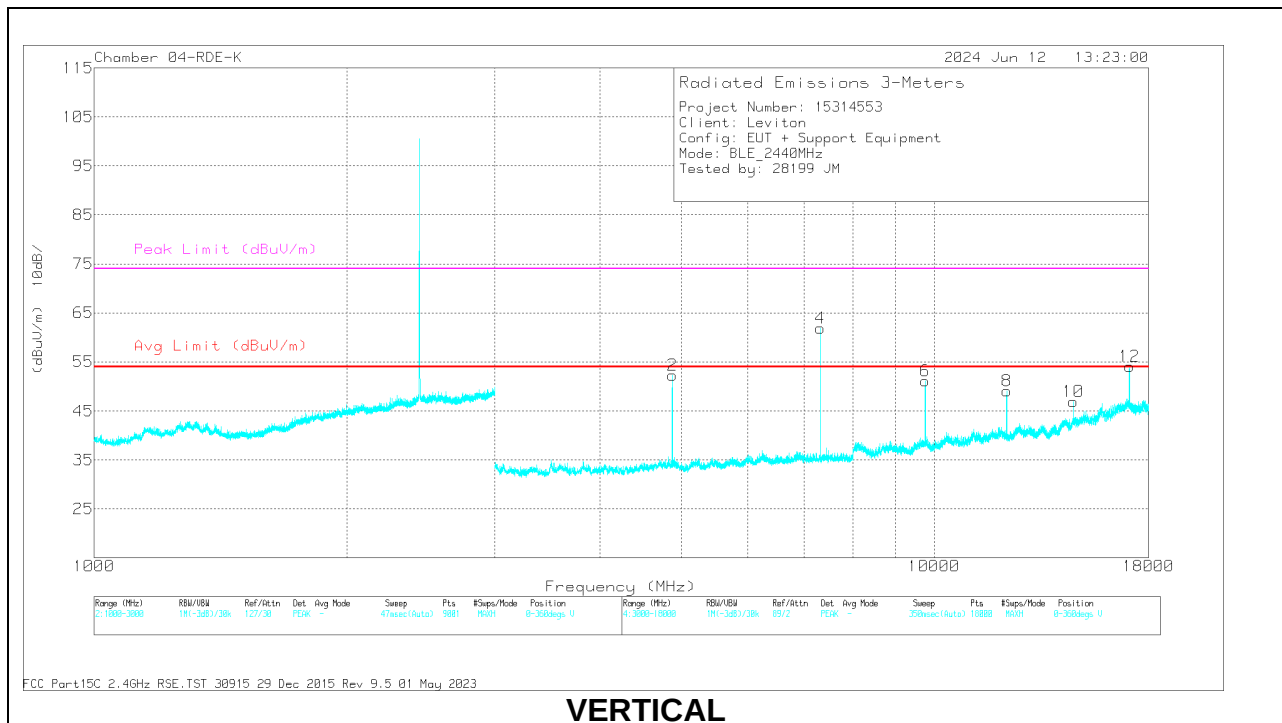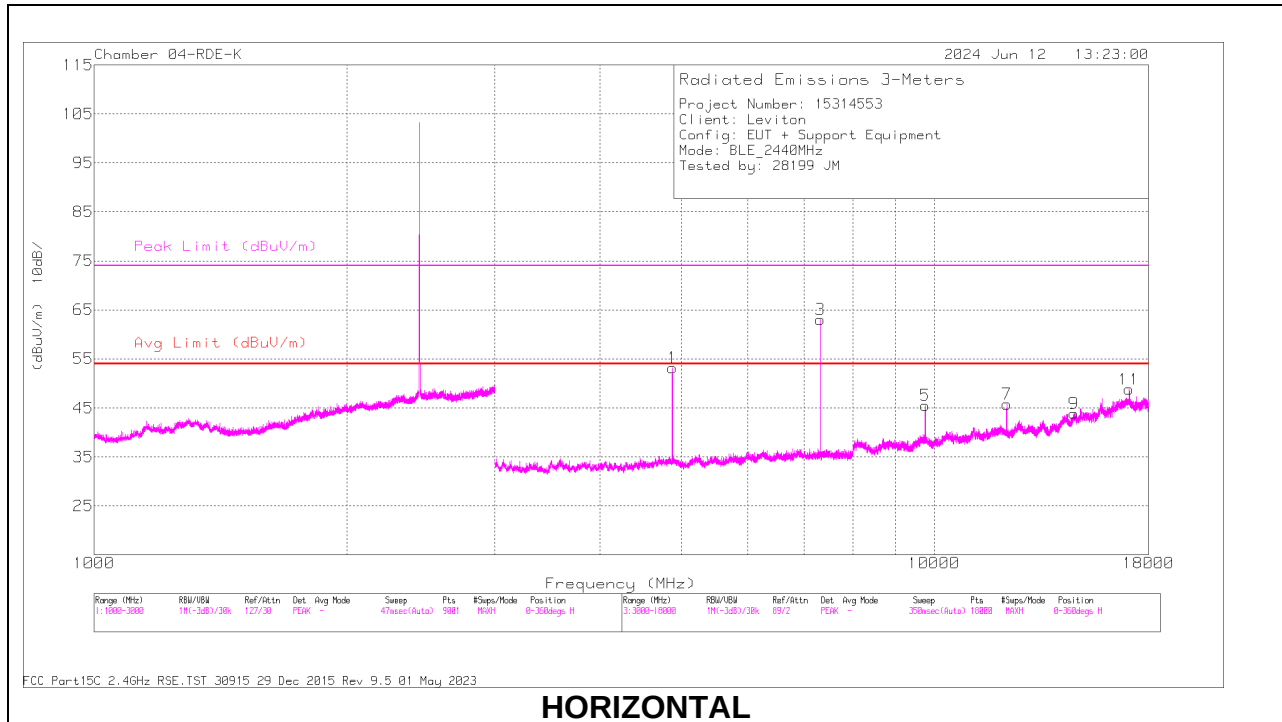

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4880.105	59.76	Pk	34.4	-41	53.16	-	-	74	-20.84	0-360	200	H
2	* 4880.105	58.89	Pk	34.4	-41	52.29	-	-	74	-21.71	0-360	200	V
3	* 7320.242	65.48	Pk	36.1	-38.5	63.08	-	-	74	-10.92	0-360	200	H
4	* 7319.409	64.39	Pk	36	-38.5	61.89	-	-	74	-12.11	0-360	101	V
5	9760.379	45.75	Pk	37	-37.2	45.55	-	-	-	-	0-360	101	H
6	9760.379	51.32	Pk	37	-37.2	51.12	-	-	-	-	0-360	101	V
7	* 12201.349	42.14	Pk	38.9	-35.3	45.74	-	-	74	-28.26	0-360	101	H
8	* 12201.349	45.45	Pk	38.9	-35.3	49.05	-	-	74	-24.95	0-360	101	V
9	14663.153	38.01	Pk	39.7	-33.8	43.91	-	-	-	-	0-360	200	H
10	14641.485	41.16	Pk	39.7	-33.9	46.96	-	-	-	-	0-360	101	V
11	17078.288	39.18	Pk	42.9	-33.3	48.78	-	-	-	-	0-360	101	H
12	17081.622	44.46	Pk	42.9	-33.3	54.06	-	-	-	-	0-360	101	V

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4879.28	62.49	PK2	34.4	-41	0	55.89	-	-	74	-18.11	71	257	H
	* 4879.28	-	AV	-	-	-11.06	44.83	54	-9.17	-	-	71	257	H
2	* 4879.414	62.45	PK2	34.4	-41	0	55.85	-	-	74	-18.15	40	258	V
	* 4879.414	-	AV	-	-	-11.06	44.79	54	-9.21	-	-	40	258	V
3	* 7318.991	66.28	PK2	36	-38.5	0	63.78	-	-	74	-6.83	29	277	H
	* 7318.991	-	AV	-	-	-11.06	52.72	54	-1.28	-	-	29	277	H
4	* 7320.5	63.76	PK2	36	-38.5	0	61.26	-	-	74	-9.21	34	116	V
	* 7320.5	-	AV	-	-	-11.06	50.2	54	-3.8	-	-	34	116	V
7	* 12198.227	50.24	PK2	38.9	-35.4	0	53.74	-	-	74	-20.26	92	111	H
	* 12198.227	-	AV	-	-	-11.06	42.68	54	-11.32	-	-	92	111	H
8	* 12198.363	51.99	PK2	38.9	-35.4	0	55.49	-	-	74	-18.51	348	128	V
	* 12198.363	-	AV	-	-	-11.06	44.43	54	-9.57	-	-	348	128	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

AV = Peak reading + Duty Cycle Correction Factor (KDB558074 Section 11, Question 3 (a))

Duty Cycle Correction Factor = -11.06 dB. (28%)

HIGH CHANNEL RESULTS

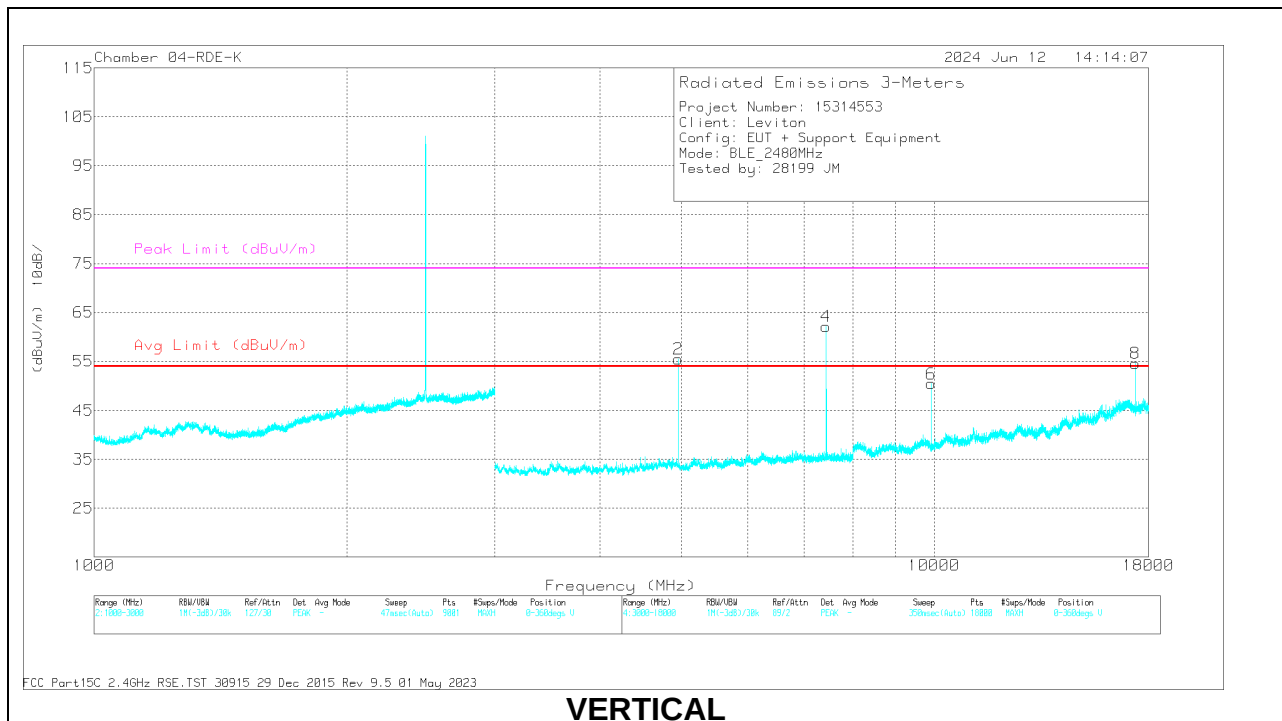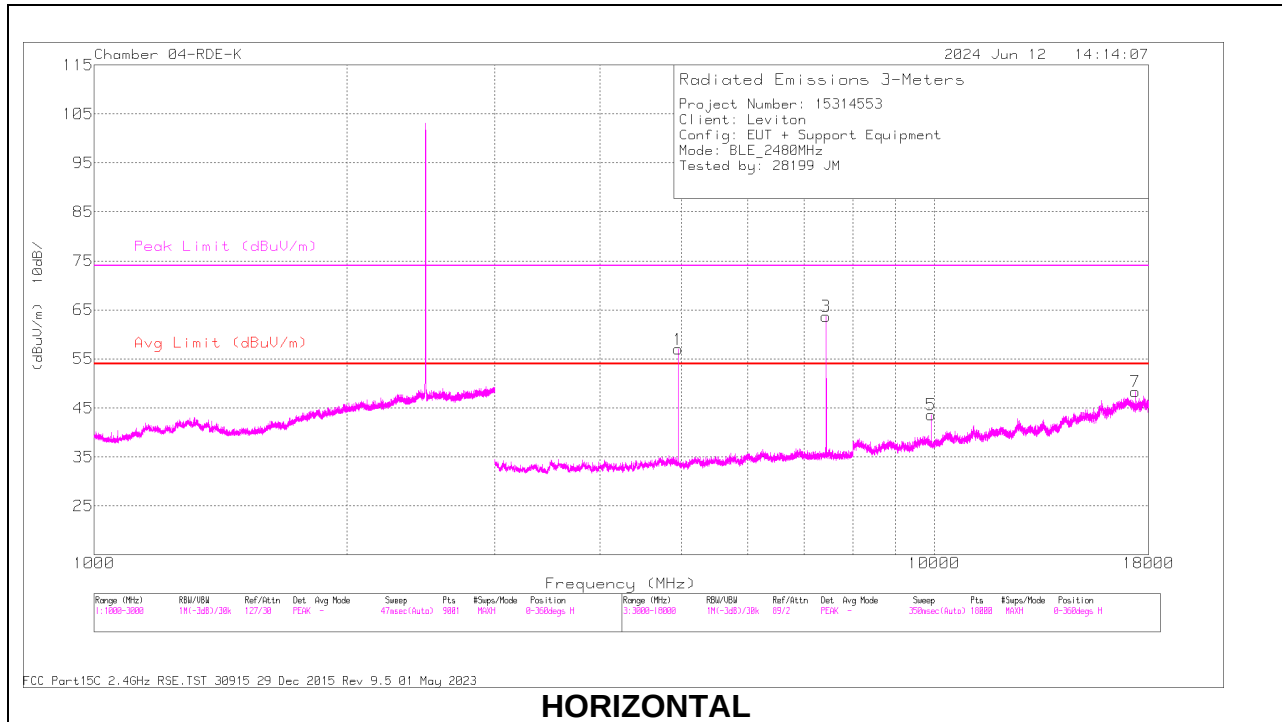

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4959.276	63.87	Pk	34.1	-41	56.97	-	-	74	-17.03	0-360	200	H
2	* 4959.276	62.38	Pk	34.1	-41	55.48	-	-	74	-18.52	0-360	200	V
3	* 7440.249	66.14	Pk	35.8	-38.3	63.64	-	-	74	-10.36	0-360	200	H
4	* 7440.249	64.65	Pk	35.8	-38.3	62.15	-	-	74	-11.85	0-360	101	V
5	9920.388	43.59	Pk	37.1	-37.1	43.59	-	-	-	-	0-360	101	H
6	9918.721	50.44	Pk	37.1	-37.1	50.44	-	-	-	-	0-360	200	V
7	17358.304	38.66	Pk	42.3	-32.6	48.36	-	-	-	-	0-360	200	H
8	17361.638	44.97	Pk	42.2	-32.6	54.57	-	-	-	-	0-360	101	V

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80404 3m ACF(dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4960.288	65.62	PK2	34.1	-41	0	58.72	-	-	74	-15.28	54	279	H
	* 4960.288	-	AV	-	-	-11.06	47.66	54	-6.34	-	-	54	279	H
2	* 4960.45	65.46	PK2	34.1	-41	0	58.56	-	-	74	-15.44	38	292	V
	* 4960.45	-	AV	-	-	-11.06	47.5	54	-6.5	-	-	38	292	V
3	* 7438.968	67.19	PK2	35.8	-38.3	0	64.69	-	-	74	-9.31	35	262	H
	* 7438.968	-	AV	-	-	-11.06	53.63	54	-0.37	-	-	35	262	H
4	* 7440.576	65.35	PK2	35.8	-38.3	0	62.85	-	-	74	-11.15	35	117	V
	* 7440.576	-	AV	-	-	-11.06	51.79	54	-2.21	-	-	35	117	V
7	9918.912	52.52	PK2	37.1	-37.1	0	52.52	-	-	-	-	27	117	H
	9918.912	-	AV	-	-	-11.06	41.46	-	-	-	-	27	117	H
8	9920.601	56.24	PK2	37.1	-37.1	0	56.24	-	-	-	-	333	119	V
	9920.601	-	AV	-	-	-11.06	45.18	-	-	-	-	333	119	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

AV = Peak reading + Duty Cycle Correction Factor (KDB558074 Section 11, Question 3 (a))

Duty Cycle Correction Factor = -11.06 dB. (28%)

10.3. WORST CASE BELOW 30MHZ

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

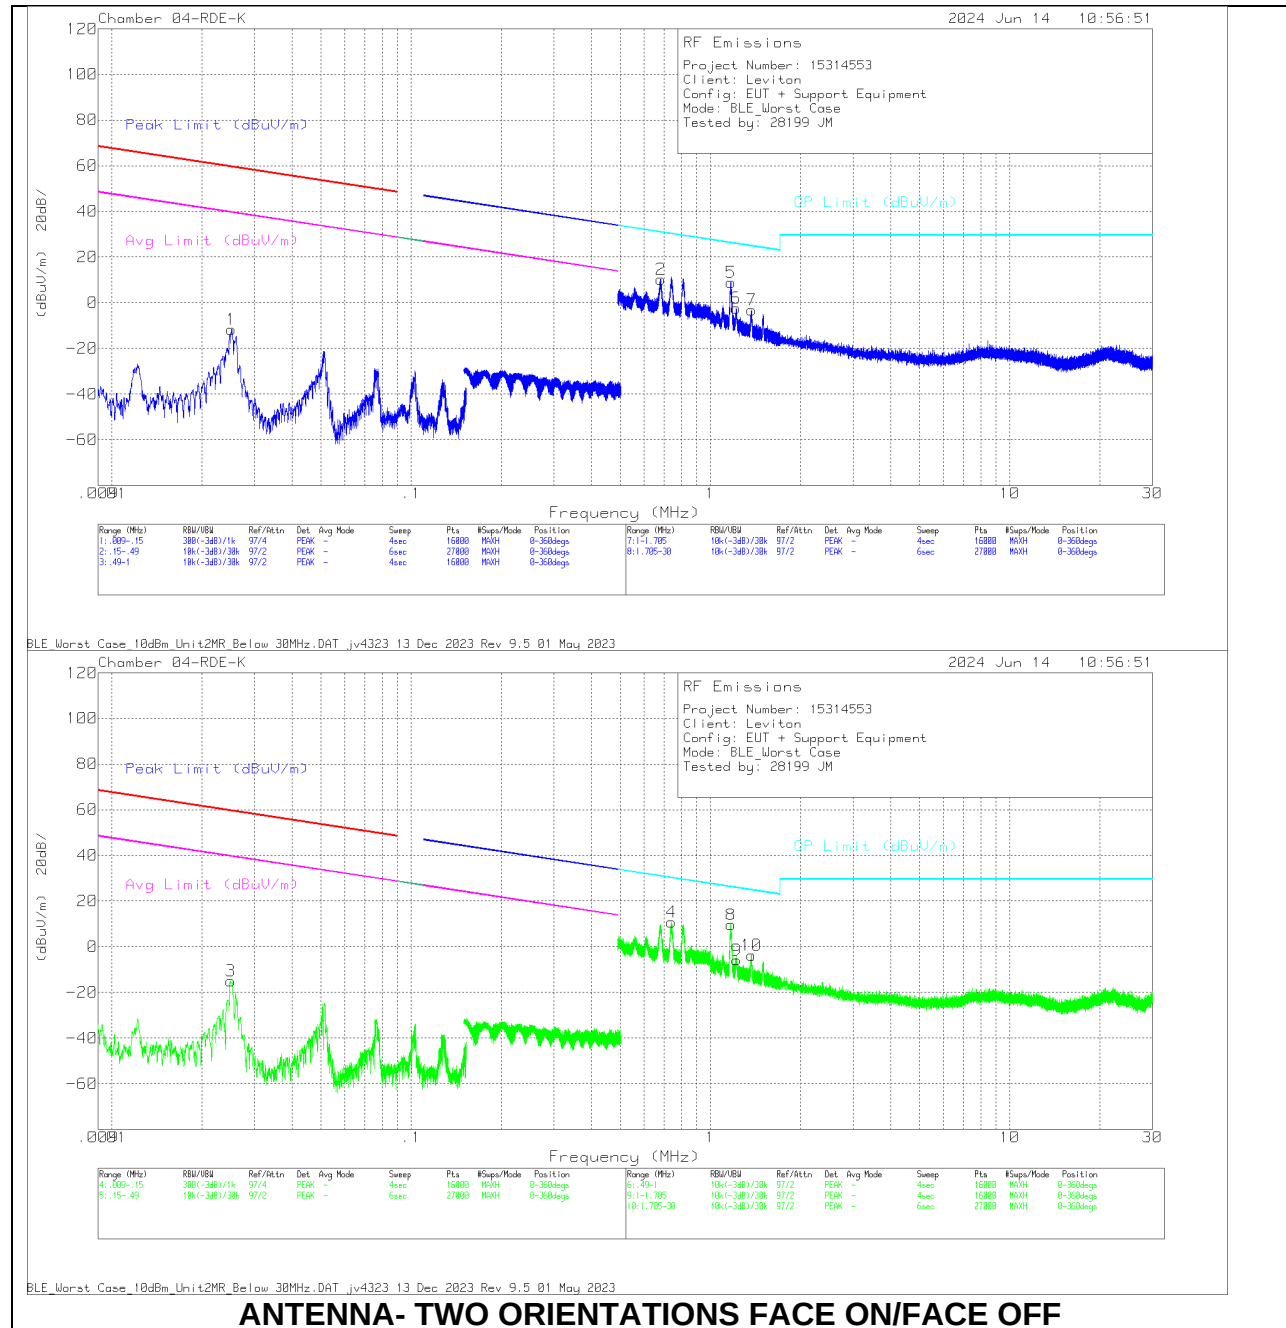

Below 30MHz Data



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(dB/m)	Amp/Cbl (dB)	Dist Corr 300m (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna orientation
3	.0249	38.34	Pk	58.5	-31.8	-80	-14.96	59.65	-74.61	39.65	-54.61	0-360	Face off
1	.0251	41.78	Pk	58.4	-31.8	-80	-11.62	59.58	-71.2	39.58	-51.2	0-360	Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(dB/m)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna orientation
2	.6823	26.33	Pk	56.2	-32.2	-40	10.33	30.93	-20.6	0-360	Face on
4	.7412	26.73	Pk	56.2	-32.1	-40	10.83	30.22	-19.39	0-360	Face off
8	1.171	35.7	Pk	46	-32.1	-40	9.6	26.25	-16.65	0-360	Face off
5	1.1714	34.95	Pk	46	-32.1	-40	8.85	26.25	-17.4	0-360	Face on
6	1.2207	23.95	Pk	45.8	-32.1	-40	-2.35	25.89	-28.24	0-360	Face on
9	1.2246	20.6	Pk	45.7	-32.1	-40	-5.8	25.87	-31.67	0-360	Face off
10	1.3708	23.23	Pk	45	-32	-40	-3.77	24.89	-28.66	0-360	Face off
7	1.3722	23.72	Pk	45	-32	-40	-3.28	24.88	-28.16	0-360	Face on

Pk - Peak detector

10.4. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

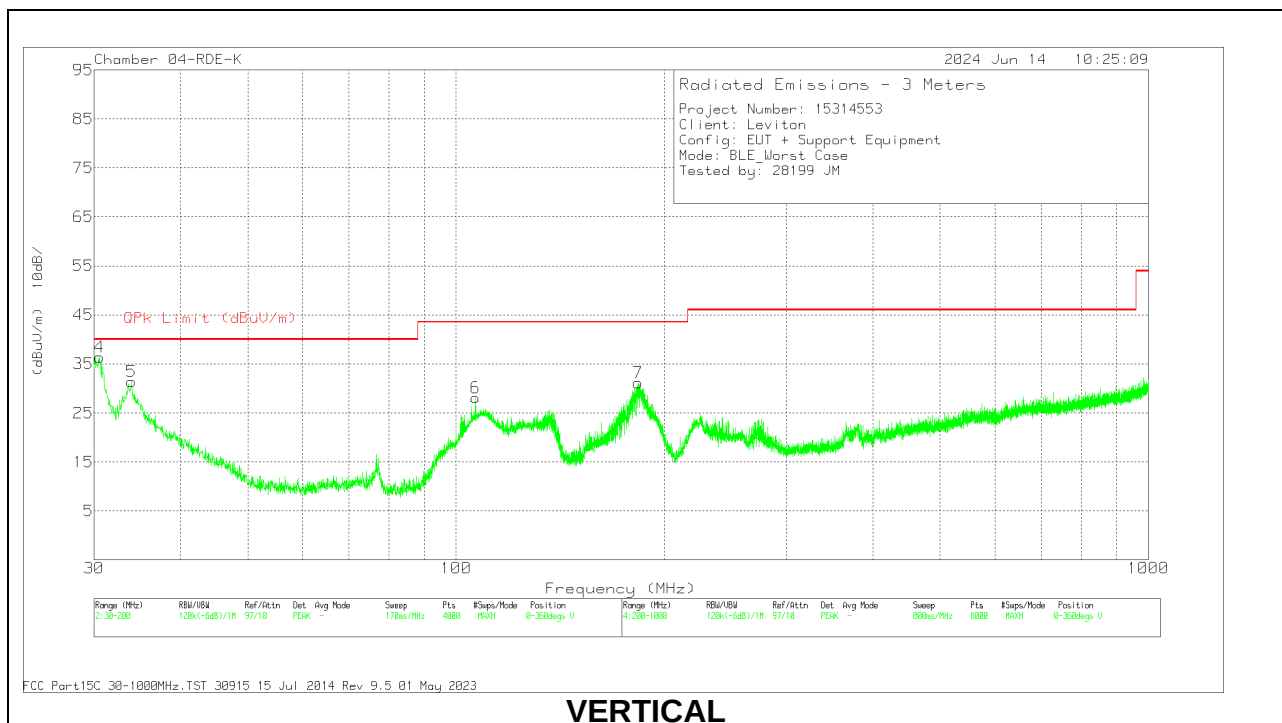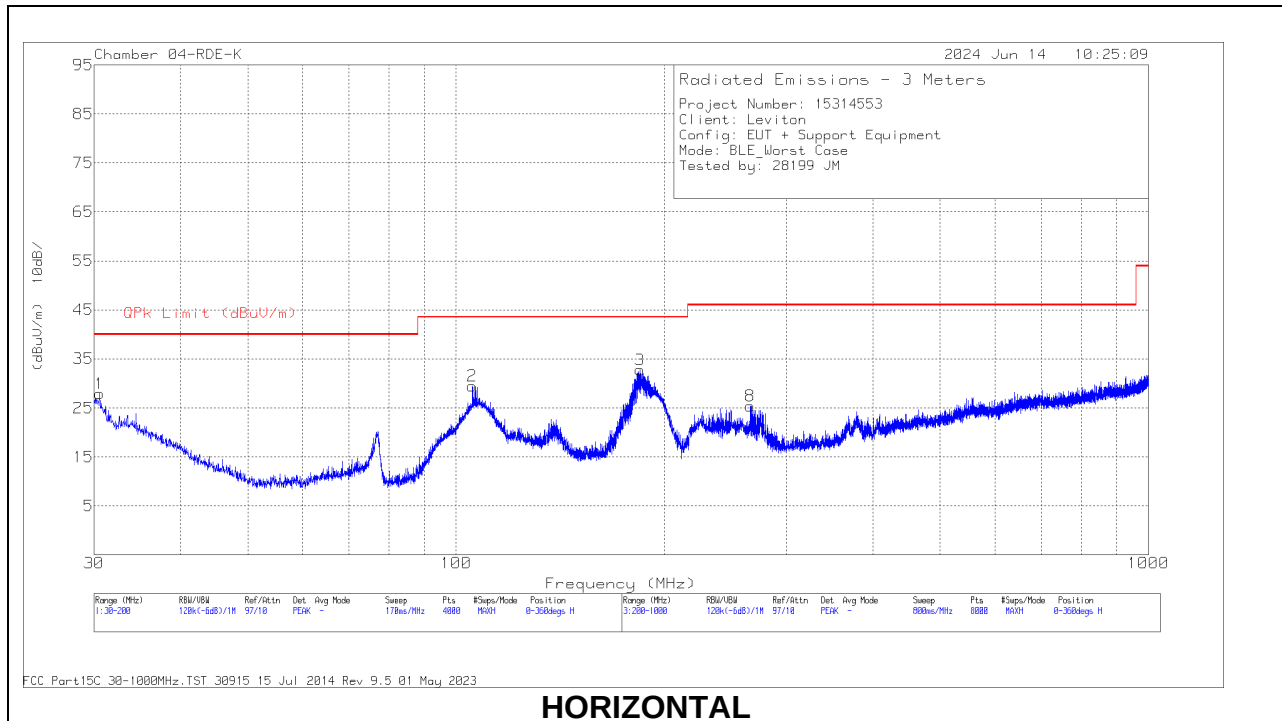

Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	203089 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.5526	32.19	Pk	26.7	-31	27.89	40	-12.11	0-360	199	H
2	105.542	42.06	Pk	17.9	-30.5	29.46	43.52	-14.06	0-360	399	H
3	184.357	45.75	Pk	17	-30	32.75	43.52	-10.77	0-360	101	H
4	30.4848	42.59	Pk	26.8	-31.1	38.29	40	-1.71	272	101	V
	30.4848	37.05	Qp	26.8	-31.1	32.75	40	-7.25	272	101	V
5	33.996	38.43	Pk	24.3	-31.3	31.43	40	-8.57	0-360	100	V
6	106.69	40.53	Pk	18.1	-30.5	28.13	43.52	-15.39	0-360	100	V
7	182.997	43.93	Pk	17	-29.8	31.13	43.52	-12.39	0-360	100	V
8	* 266.009	36.18	Pk	18.7	-29.5	25.38	46.02	-20.64	0-360	99	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10.5. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

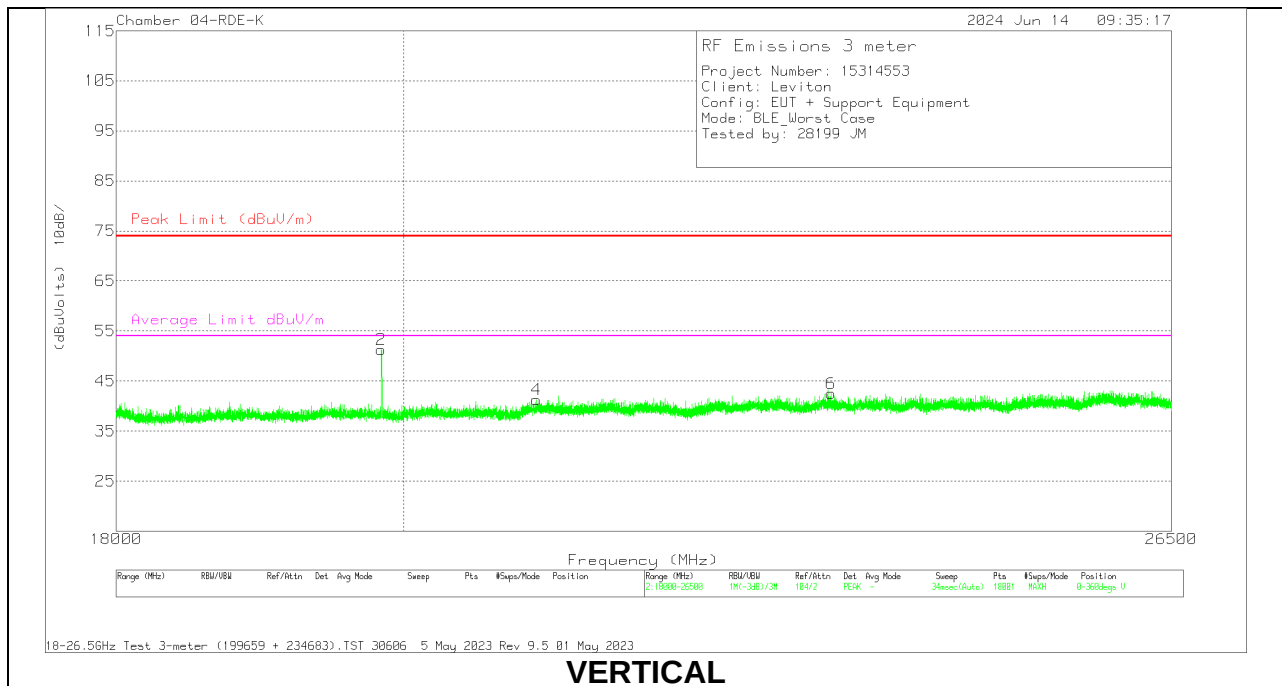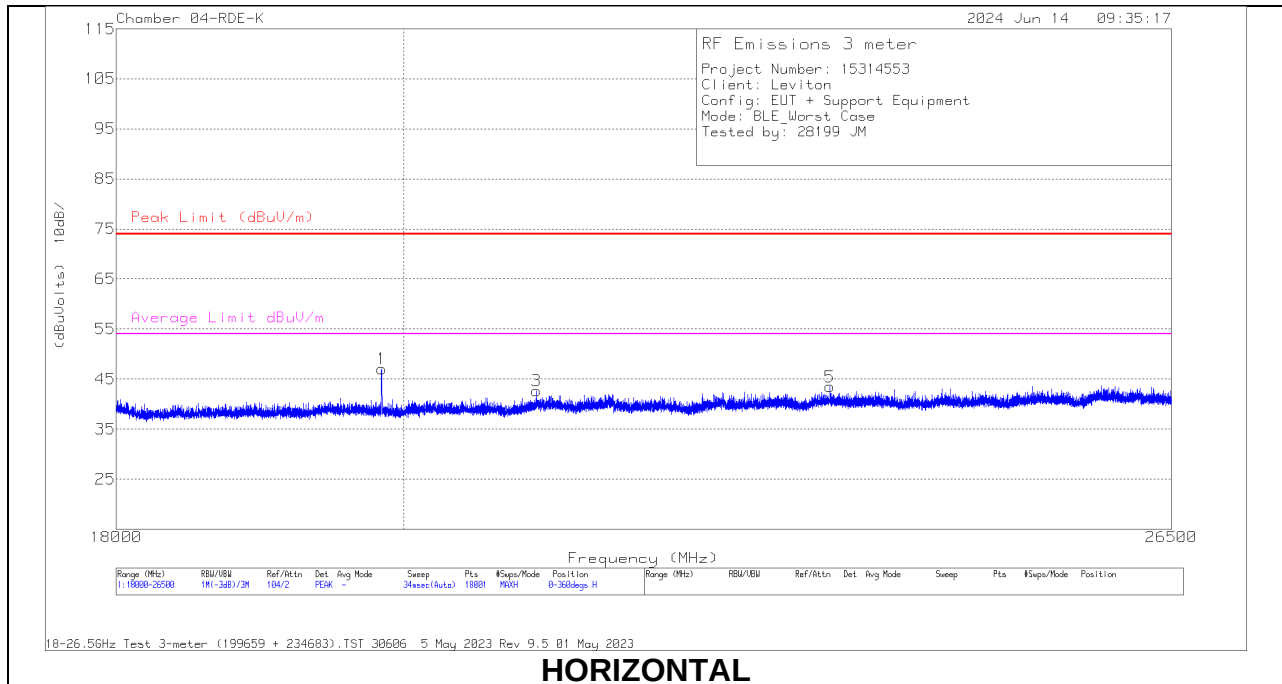

18 – 26GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Horn ACF (dB/m)	234683 Amp/Cbl (dB)	Cable (dB)	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 19837.513	59.37	PK2	32.7	-62.6	19	-48.47	74	-25.53	-	-	34	204	H
2	* 19837.492	63.29	PK2	32.7	-62.6	19	-52.39	74	-21.61	-	-	227	102	V
3	* 20997.193	51.29	Pk	33	-61	19.4	-42.69	74	-31.31	-	-	0-360	101	H
4	* 21000.499	49.93	Pk	33	-61	19.4	-41.33	74	-32.67	-	-	0-360	199	V
5	23381.442	51.77	Pk	33.6	-62.4	20.5	-43.47	74	-30.53	-	-	0-360	199	H
6	23392.303	50.68	Pk	33.6	-62.3	20.5	-42.48	74	-31.52	-	-	0-360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak

NOTE: According to ANSI C63.10 Section 6.6.4.3 NOTE 1— Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


LINE 1 RESULTS

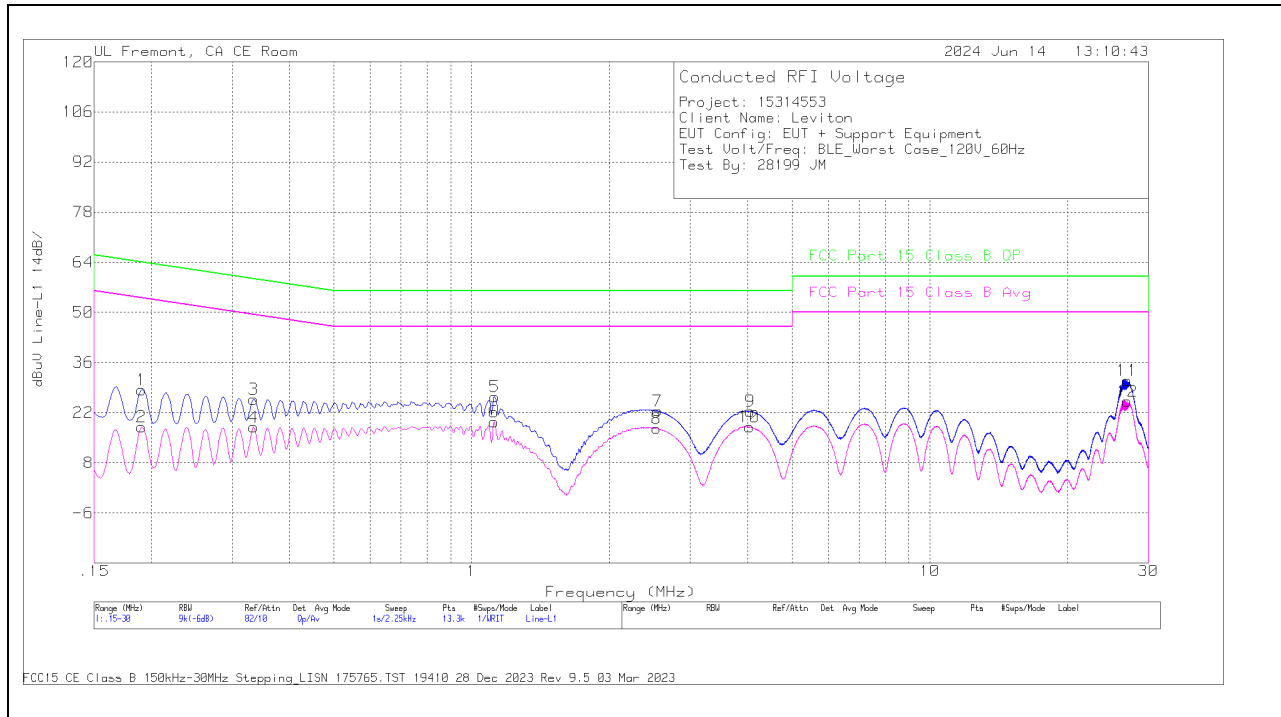

Range 1: Line-L1 15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Cbl (dB)	Trns Limiter (dB)	Corrected Reading (dBuV)	FCC Part 15C Limit QP (dBuV)	QP Margin (dB)	FCC Part 15C Avg Limit (dBuV)	Av Margin (dB)
2	.1905	8.42	Av	.1	.1	9.4	18.02	-	-	54.01	-35.99
4	.3345	8.53	Av	0	0	9.4	17.93	-	-	49.34	-31.41
6	1.1198	9.96	Av	0	.1	9.4	19.46	-	-	46	-26.54
8	2.5328	8.07	Av	0	.1	9.4	17.57	-	-	46	-28.43
10	4.0358	8.6	Av	0	.1	9.3	18	-	-	46	-28
12	26.925	15.12	Av	.2	.3	9.5	25.12	-	-	50	-24.88
1	.1905	18.82	Qp	.1	.1	9.4	28.42	64.01	-35.59	-	-
3	.3345	16.35	Qp	0	0	9.4	25.75	59.34	-33.59	-	-
5	1.122	16.87	Qp	0	.1	9.4	26.37	56	-29.63	-	-
7	2.5485	12.98	Qp	0	.1	9.4	22.48	56	-33.52	-	-
9	4.0583	12.96	Qp	0	.2	9.3	22.46	56	-33.54	-	-
11	26.925	20.93	Qp	.2	.3	9.5	30.93	60	-29.07	-	-

Qp - Quasi-Peak detector
Av - Average detection

LINE 2 RESULTS

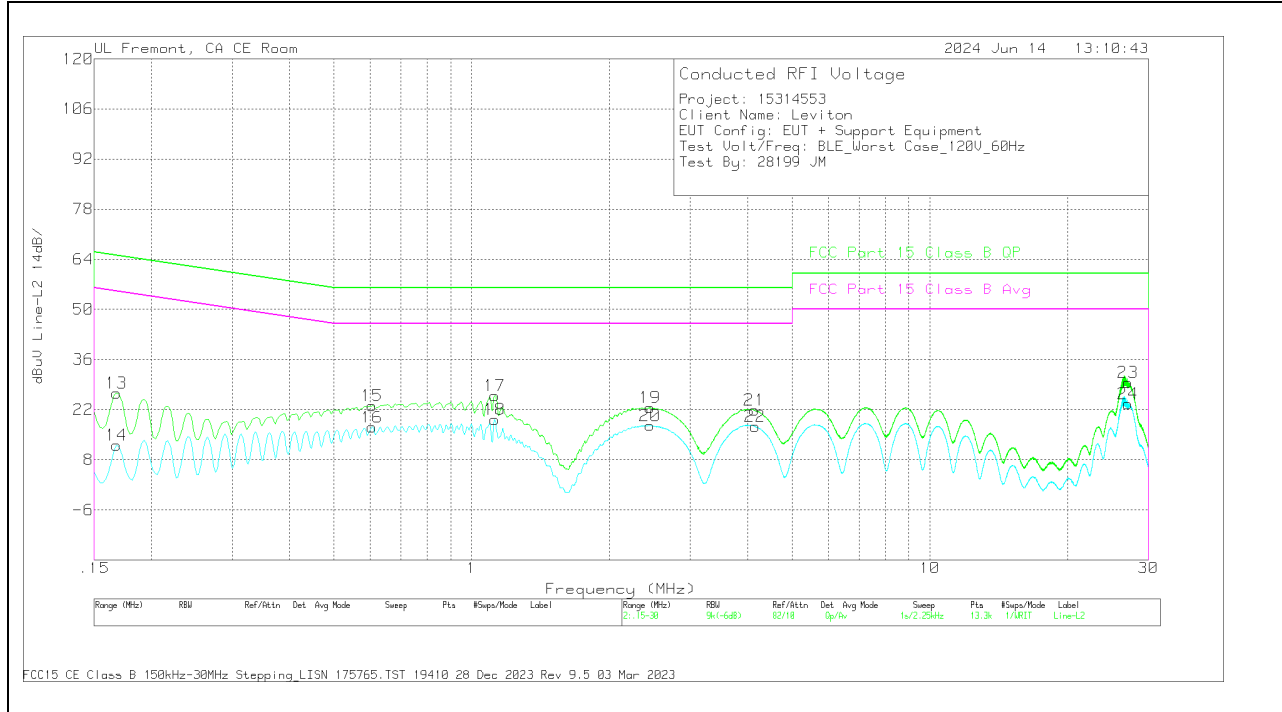

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Cbl (dB)	Trns Limiter (dB)	Corrected Reading (dBuV)	FCC Part 15C Limit QP (dBuV)	QP Margin (dB)	FCC Part 15C Avg Limit (dBuV)	Av Margin (dB)
14	.168	2.48	Av	.1	0	9.5	12.08	-	-	55.06	-42.98
16	.6068	7.56	Av	0	.1	9.4	17.06	-	-	46	-28.94
18	1.1243	9.81	Av	0	.1	9.4	19.31	-	-	46	-26.69
20	2.4506	8.07	Av	0	.1	9.4	17.57	-	-	46	-28.43
22	4.1516	7.88	Av	0	.1	9.3	17.28	-	-	46	-28.72
24	27.0758	13.78	Av	.2	.3	9.4	23.68	-	-	50	-26.32
13	.168	17.05	Qp	.1	0	9.5	26.65	65.06	-38.41	-	-
15	.6068	13.6	Qp	0	.1	9.4	23.1	56	-32.9	-	-
17	1.1243	16.46	Qp	0	.1	9.4	25.96	56	-30.04	-	-
19	2.4529	13.04	Qp	0	.1	9.4	22.54	56	-33.46	-	-
21	4.1415	12.41	Qp	0	.1	9.3	21.81	56	-34.19	-	-
23	27.0758	19.73	Qp	.2	.3	9.4	29.63	60	-30.37	-	-

Qp - Quasi-Peak detector

Av - Average detection

12. SETUP PHOTOS

Please refer to 15314553-EP1 for setup photos

END OF TEST REPORT