

FCC TEST REPORT

For

Guangzhou Havit Technology Co.,LTD

Wireless Vertical Ergonomic Mouse

Model No.: HV-MS56GT

Prepared For : Guangzhou Havit Technology Co.,LTD
ROOM 1307, 13F, PHASE 2 B, C BUILDING OF POLY WORLD
Address : TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU
DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217110013W
Date of Test : Nov. 06~10, 2017
Date of Report : Nov. 10, 2017

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiated Emission and Band Edge.....	11
4.1. Test Standard and Limit.....	11
4.2. Test Setup.....	11
4.3. Test Procedure.....	13
4.4. Test Data.....	13
5. 20dB Bandwidth Test.....	23
5.1. Test Standard and Limit.....	23
5.2. Test Setup.....	23
5.3. Test Procedure.....	23
5.4. Test Data.....	23
6. Antenna Requirement.....	26
6.1. Test Standard and Requirement.....	26
6.2. Antenna Connected Construction.....	26
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	27
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	28
APPENDIX III -- INTERNAL PHOTOGRAPH.....	32

TEST REPORT

Applicant : Guangzhou Havit Technology Co.,LTD
Manufacturer : Guangzhou Havit Technology Co.,LTD
Product Name : Wireless Vertical Ergonomic Mouse
Model No. : HV-MS56GT
Trade Mark : HAVIT
Rating(s) : Input DC 1.5V 10mA by "AA" Battery*1

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Nov. 06~10, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Guangzhou Havit Technology Co.,LTD
Address	:	ROOM 1307, 13F, PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE
Manufacturer	:	Guangzhou Havit Technology Co.,LTD
Address	:	ROOM 1307, 13F, PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE

1.2. Description of Device (EUT)

Product Name	:	Wireless Vertical Ergonomic Mouse	
Model No.	:	HV-MS56GT	
Trade Mark	:	HAVIT	
Test Power Supply	:	DC 1.5V By Battery	
Product Description	:	Operation Frequency:	2402.85-2480.85MHz
		Number of Channel:	16 Channels
		Modulation Type:	GFSK
		Antenna Type:	PCB Antenna
		Antenna Gain(Peak):	2.34 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	N/A
---------	---	-----

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Keeping TX mode
Mode 2	CH01
Mode 3	CH09
Mode 4	CH16

For Conducted Emission	
Final Test Mode	Description
Mode 1	Keeping TX mode

For Radiated Emission	
Final Test Mode	Description
Mode 2	CH01
Mode 3	CH09
Mode 4	CH16

Note:


1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.5. List of Channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2402.85	10	2445.85
2	2407.85	11	2453.85
3	2414.85	12	2459.85
4	2419.85	13	2463.85
5	2422.85	14	2466.85
6	2426.85	15	2473.85
7	2436.85	16	2480.85
8	2439.85	/	/
9	2441.85	/	/

1.6. Description of Test Setup

RE

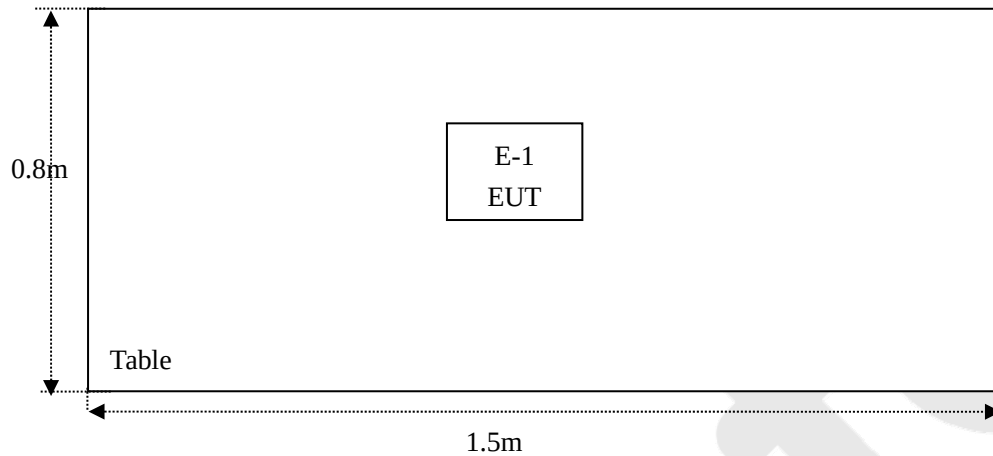

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	May 27, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	May 27, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
13.	Pre-amplifier	SKET Electronic	BK1G40G50 A	KD25352	May 27, 2017	1 Year
14.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
20.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
21.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited.

at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
Remark: “N/A” is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

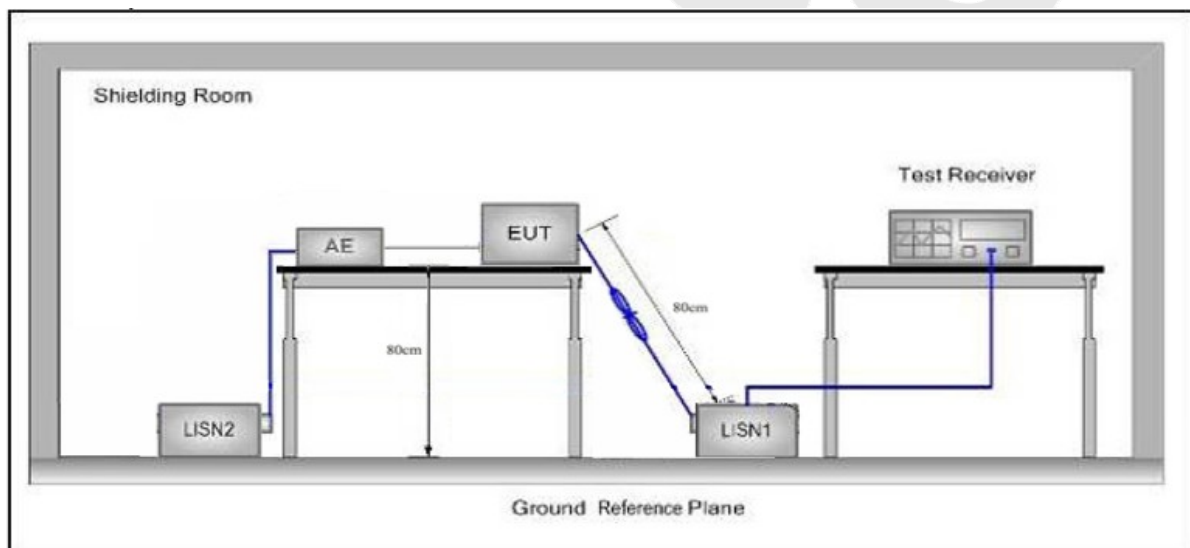

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

There is DC 1.5V Battery inside, So there is no test

4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

Figure 1. Below 30MHz

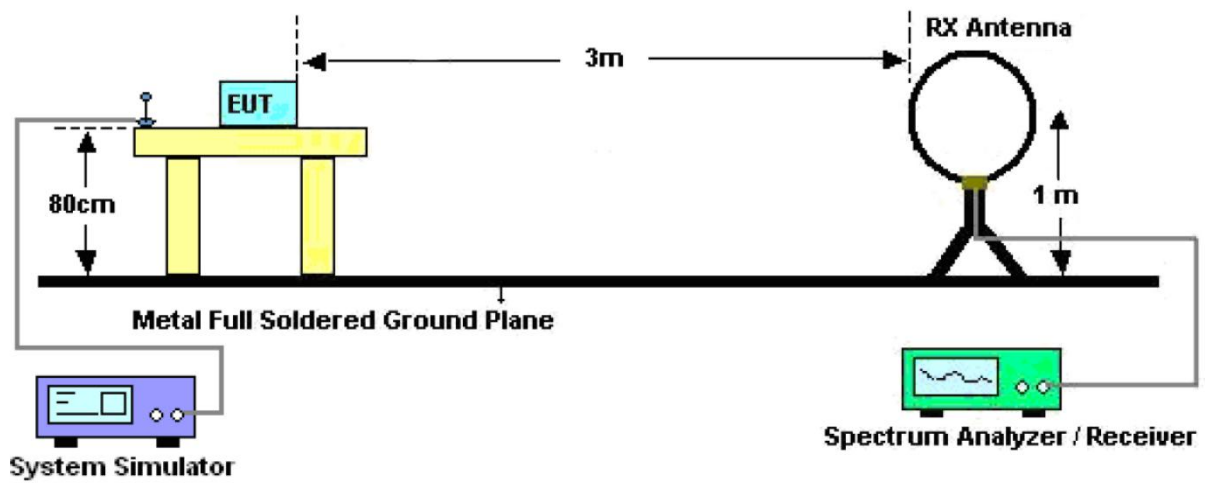


Figure 2. 30MHz to 1GHz


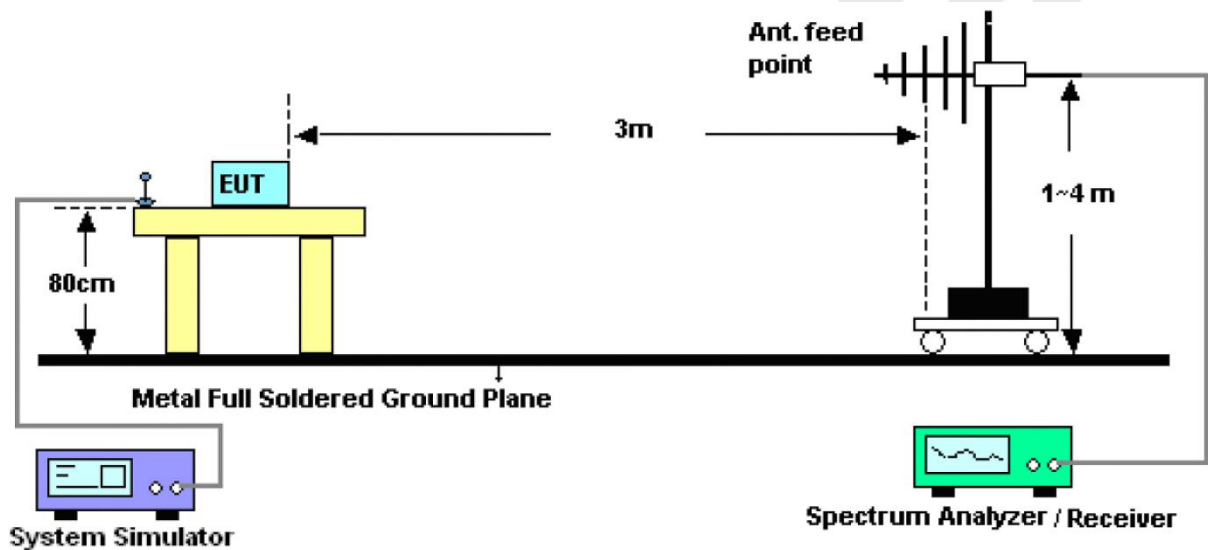


Figure 3. Above 1 GHz

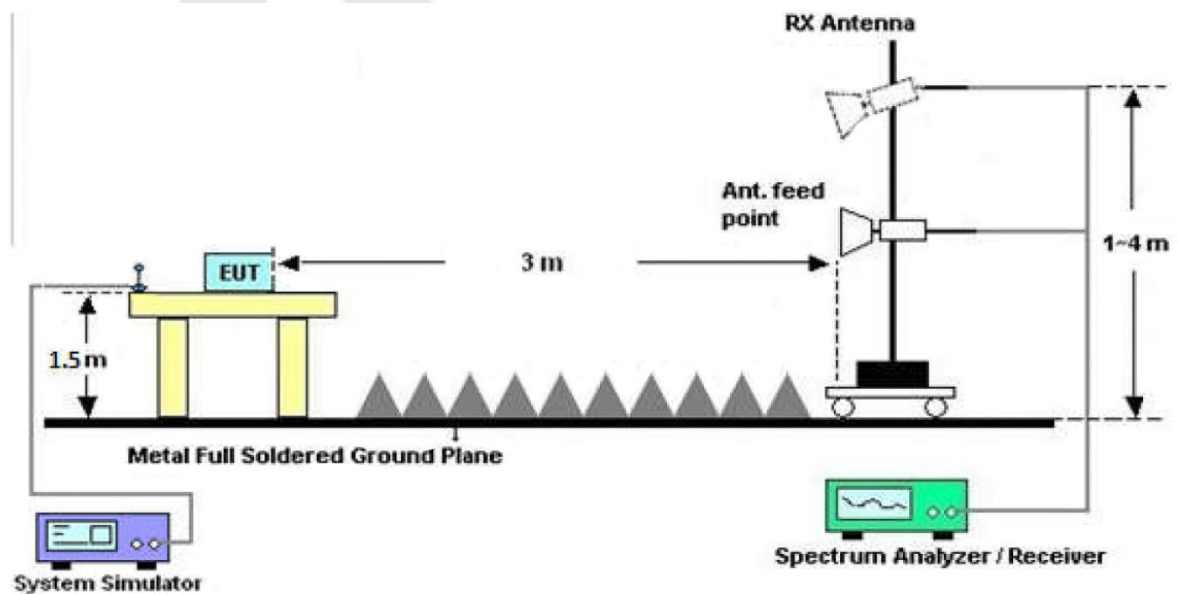

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Job No.: 0217110013W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 1.5V
Test Mode: TX Mode Lowest CH Polarization: Horizontal

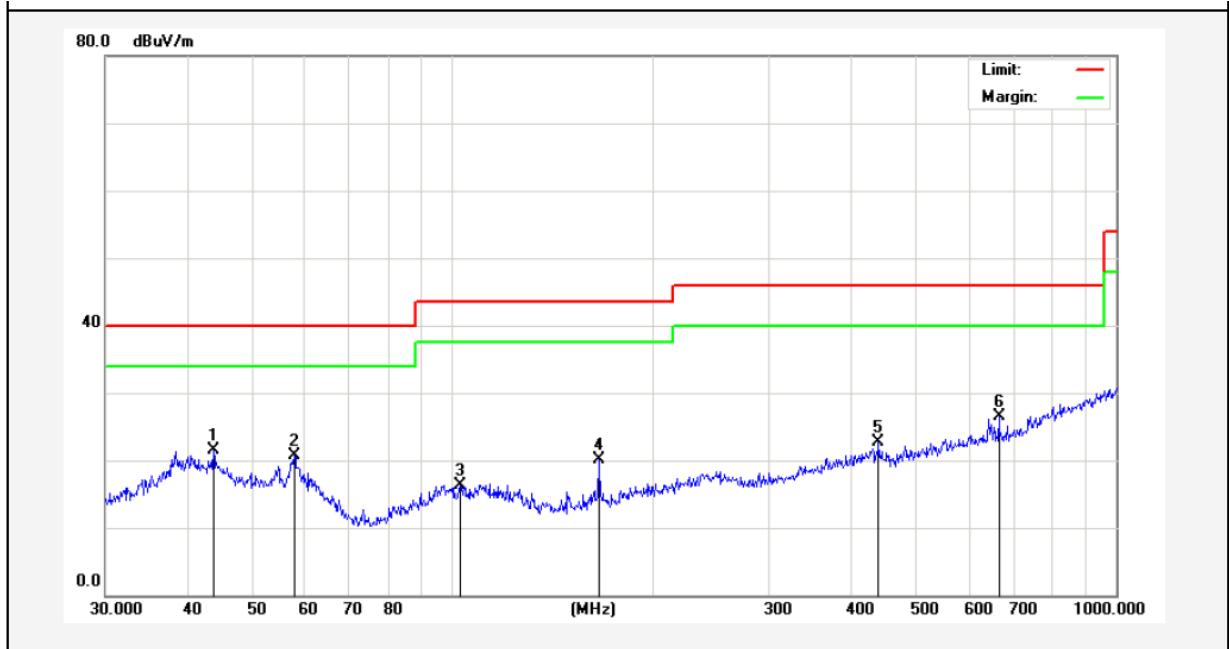

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	43.6584	33.71	-12.12	21.59	40.00	-18.41	QP	300	16	
2	57.7962	35.88	-15.19	20.69	40.00	-19.31	QP	300	74	
3	102.7192	37.09	-20.73	16.36	43.50	-27.14	QP	300	101	
4	166.0680	42.70	-22.68	20.02	43.50	-23.48	QP	300	196	
5	438.6554	34.89	-12.22	22.67	46.00	-23.33	QP	300	214	
6	665.8035	35.99	-9.42	26.57	46.00	-19.43	QP	300	262	

Test Results (30~1000MHz)

Job No.: 0217110013W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 1.5V
Test Mode: TX Mode Lowest CH Polarization: Vertical

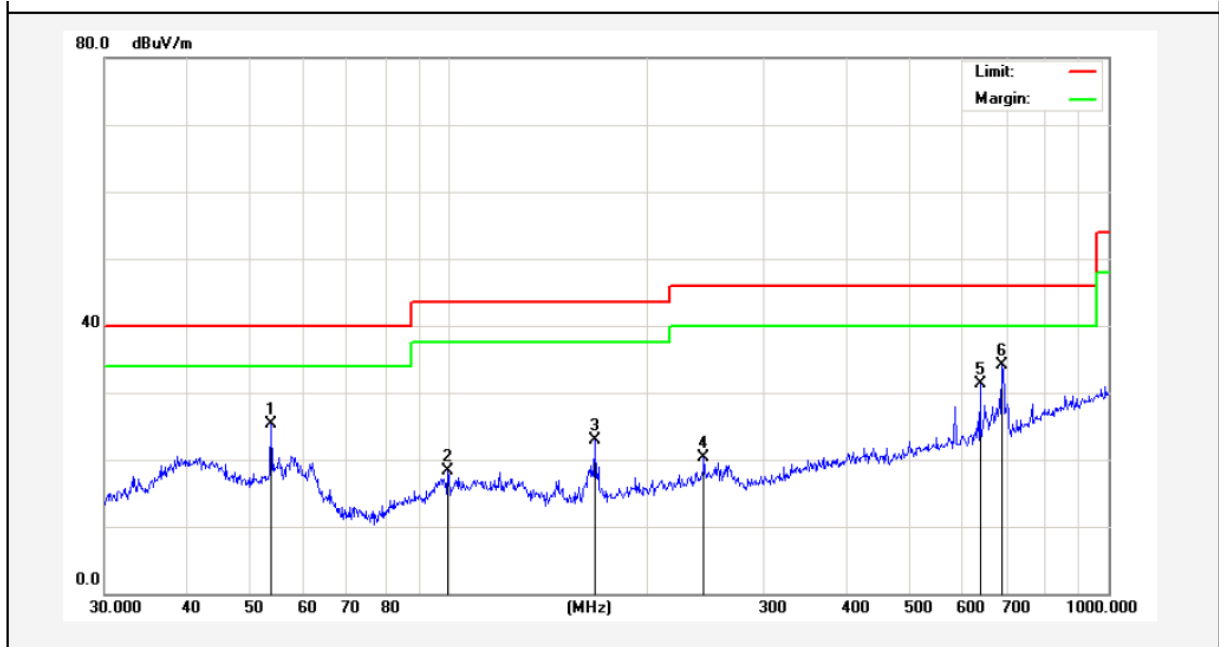

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	53.6932	40.05	-14.84	25.21	40.00	-14.79	QP	300	17	
2	99.5281	34.08	-15.79	18.29	43.50	-25.21	QP	300	63	
3	166.0680	40.62	-17.68	22.94	43.50	-20.56	QP	300	114	
4	243.3772	34.32	-14.07	20.25	46.00	-25.75	QP	300	165	
5	638.3686	40.32	-8.94	31.38	46.00	-14.62	QP	300	214	
6	689.5644	42.75	-8.56	34.19	46.00	-11.81	QP	300	274	

Test Results (1GHz-25GHz)

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2402.8500	96.55	31.09	2.10	35.23	94.51	114.00	-19.49	V	Peak
2402.8500	84.21	31.09	2.10	35.23	82.17	94.00	-11.83	V	AVG
4805.7000	45.32	33.98	2.49	34.54	47.25	74.00	-26.75	V	Peak
4805.7000	38.56	33.98	2.49	34.54	40.49	54.00	-13.51	V	AVG
7208.5500	43.89	36.01	2.78	34.89	47.79	74.00	-26.21	V	Peak
7208.5500	35.84	36.01	2.78	34.89	39.74	54.00	-14.26	V	AVG
9611.4000	*								
12014.2500	*								
14417.1000	*								
16819.9500	*								
2402.8500	95.77	31.09	2.10	35.23	93.73	114.00	-20.27	H	Peak
2402.8500	83.25	31.09	2.10	35.23	81.21	94.00	-12.79	H	AVG
4805.7000	44.65	33.98	2.49	34.54	46.58	74.00	-27.42	H	Peak
4805.7000	36.93	33.98	2.49	34.54	38.86	54.00	-15.14	H	AVG
7208.5500	42.58	36.01	2.78	34.89	46.48	74.00	-27.52	H	Peak
7208.5500	34.17	36.01	2.78	34.89	38.07	54.00	-15.93	H	AVG
9611.4000	*								
12014.2500	*								
14417.1000	*								
16819.9500	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH09 (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2441.8500	94.22	31.12	2.20	34.51	93.03	114.00	-20.97	V	Peak
2441.8500	86.58	31.22	2.20	34.51	85.49	94.00	-8.51	V	AVG
4883.7000	45.36	34.98	2.49	34.14	48.69	74.00	-25.31	V	Peak
4883.7000	40.08	34.98	2.49	34.14	43.41	54.00	-10.59	V	AVG
7325.5500	43.26	36.01	3.01	34.56	47.72	74.00	-26.28	V	Peak
7325.5500	37.98	36.01	3.01	34.56	42.44	54.00	-11.56	V	AVG
9767.4000	*								
12209.2500	*								
14651.1000	*								
17092.9500	*								
2441.8500	93.68	31.12	2.20	34.51	92.49	114.00	-21.51	H	Peak
2441.8500	80.74	31.12	2.20	34.51	79.55	94.00	-14.45	H	AVG
4883.7000	41.69	34.98	2.49	34.14	45.02	74.00	-28.98	H	Peak
4883.7000	37.85	34.98	2.49	34.14	41.18	54.00	-12.82	H	AVG
7325.5500	38.96	36.01	3.01	34.56	43.42	74.00	-30.58	H	Peak
7325.5500	33.04	36.01	3.01	34.56	37.50	54.00	-16.50	H	AVG
9767.4000	*								
12209.2500	*								
14651.1000	*								
17092.9500	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH16 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2480.8500	95.87	31.66	2.23	36.08	93.68	114.00	-20.32	V	Peak
2480.8500	87.24	31.66	2.23	36.08	85.05	94.00	-8.95	V	AVG
4961.7000	50.22	35.06	2.61	34.94	52.95	74.00	-21.05	V	Peak
4961.7000	41.69	35.06	2.61	34.94	44.42	54.00	-9.58	V	AVG
7442.5500	43.77	36.20	3.12	35.12	47.97	74.00	-26.03	V	Peak
7442.5500	34.19	36.20	3.12	35.12	38.39	54.00	-15.61	V	AVG
9923.4000	*								
12404.2500	*								
14885.1000	*								
17365.9500	*								
2480.8500	94.36	31.66	2.23	36.08	92.17	114.00	-21.83	H	Peak
2480.8500	81.05	31.66	2.23	36.08	78.86	94.00	-15.14	H	AVG
4961.7000	45.08	35.06	2.61	34.94	47.81	74.00	-26.19	H	Peak
4961.7000	38.74	35.06	2.61	34.94	41.47	54.00	-12.53	H	AVG
7442.5500	40.17	36.20	3.12	35.12	44.37	74.00	-29.63	H	Peak
7442.5500	33.02	36.20	3.12	35.12	37.22	54.00	-16.78	H	AVG
9923.4000	*								
12404.2500	*								
14885.1000	*								
17365.9500	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

Test Mode:					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	55.88	29.15	3.41	34.01	54.43	74.00	-19.57	V
2400.00	61.07	29.16	3.43	34.01	59.65	74.00	-14.35	V
2390.00	56.71	29.15	3.41	34.01	55.26	74.00	-18.74	H
2400.00	62.79	29.16	3.43	34.01	61.37	74.00	-12.63	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	49.36	29.15	3.41	34.01	47.91	54.00	-6.09	V
2400.00	51.36	29.16	3.43	34.01	49.94	54.00	-4.06	V
2390.00	45.17	29.15	3.41	34.01	43.72	54.00	-10.28	H
2400.00	53.66	29.16	3.43	34.01	52.24	54.00	-1.76	H


Test Mode:					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	57.66	29.28	3.53	34.03	56.44	74.00	-17.56	V
2500.00	53.28	29.30	3.56	34.03	52.11	74.00	-21.89	V
2483.50	58.33	29.28	3.53	34.03	57.11	74.00	-16.89	H
2500.00	56.74	29.30	3.56	34.03	55.57	74.00	-18.43	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	45.01	29.28	3.53	34.03	43.79	54.00	-10.21	V
2500.00	43.69	29.30	3.56	34.03	42.52	54.00	-11.48	V
2483.50	42.77	29.28	3.53	34.03	41.55	54.00	-12.45	H
2500.00	39.18	29.30	3.56	34.03	38.01	54.00	-15.99	H

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Conducted band edge

Frequency Band (MHz)	Delta Peak toBand Emission (dBc)	Limit (dBc)	Results
2402.85	57.274	>20	PASS
2480.85	61.781	>20	PASS

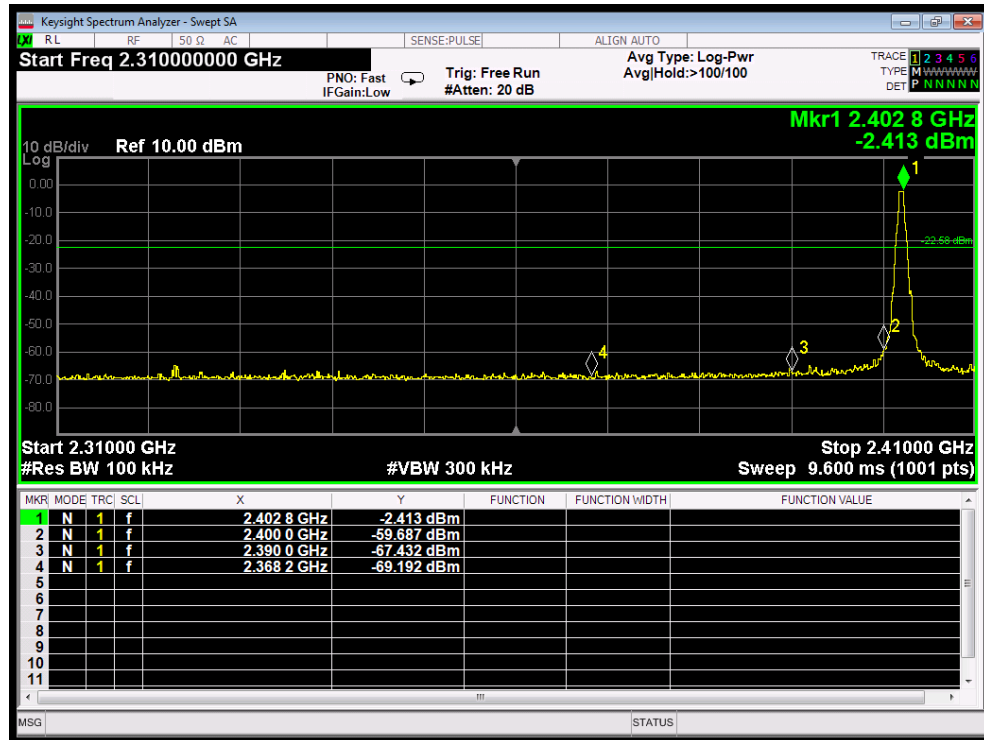


Lowest

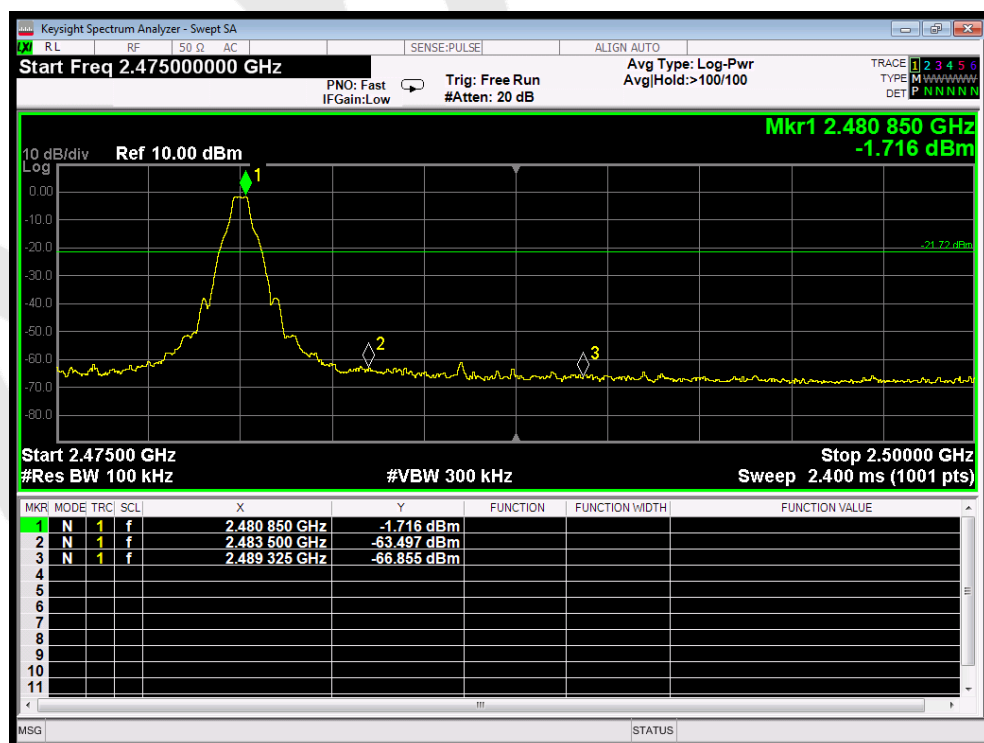

Highest


Conducted Emission Method

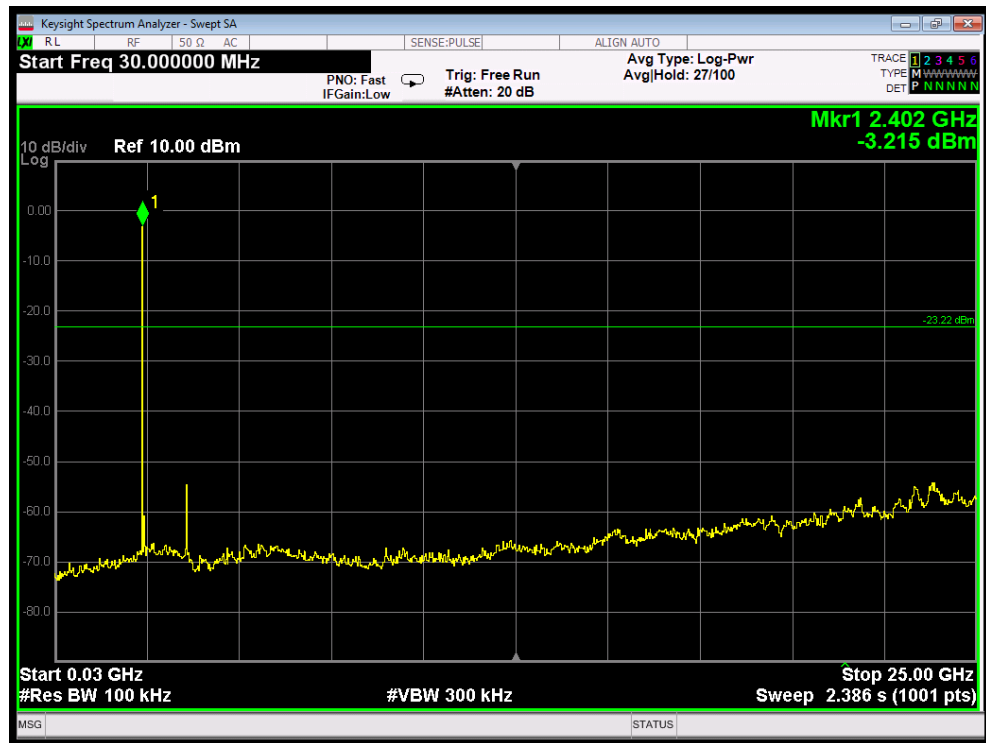

CH: Low



CH: Middle

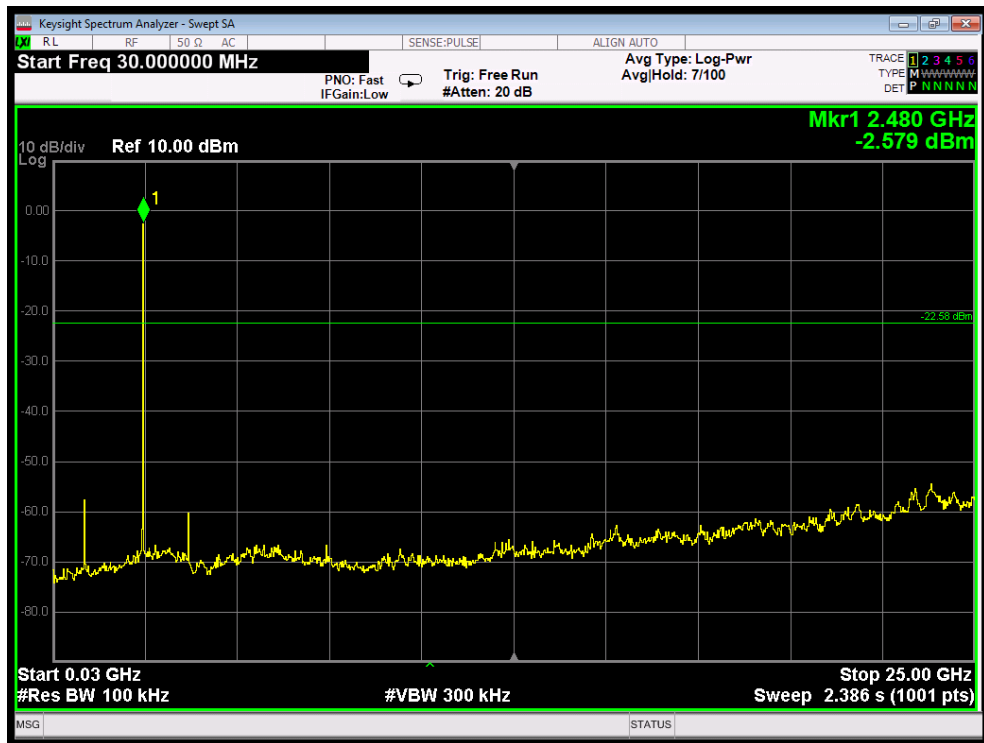


CH: High

5. 20dB Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

5.2. Test Setup




5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 30kHz, VBW $\geq$ 3*RBW = 100kHz,
Detector= Average
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


5.4. Test Data

Test Item	: 20dB Bandwidth	Test Mode	: TX Mode
Test Voltage	: DC 1.5V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Frequency (MHz)	Bandwidth (kHz)	Result
2402.85MHZ	2047.0	PASS
2441.85MHZ	2069.0	PASS
2480.85MHZ	2162.0	PASS

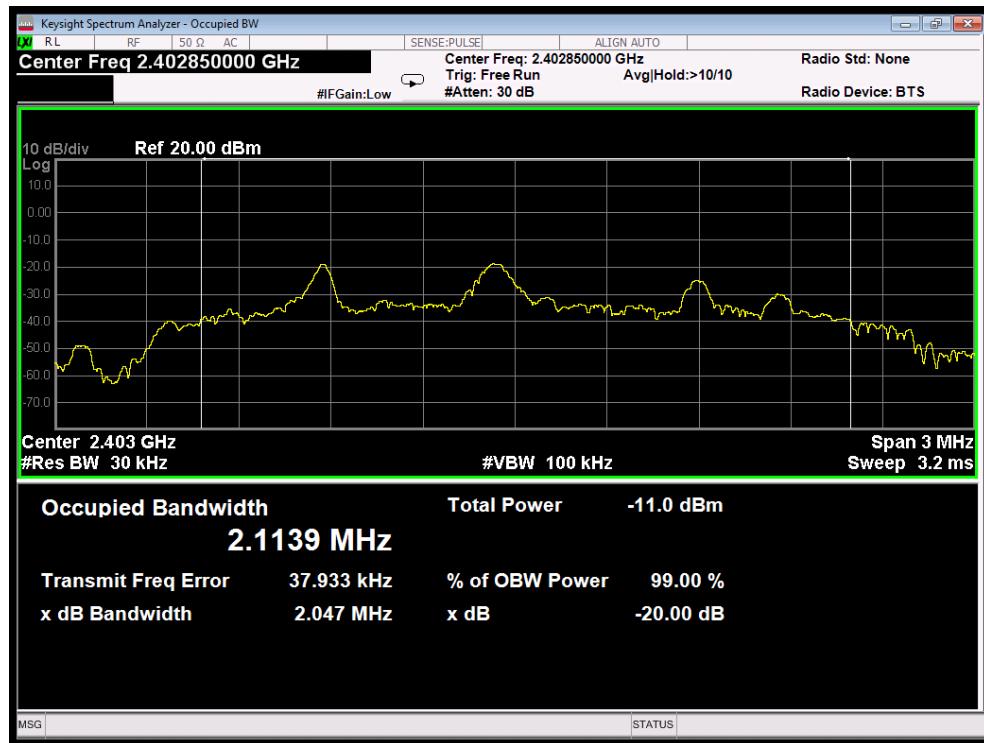

Test Mode: Low

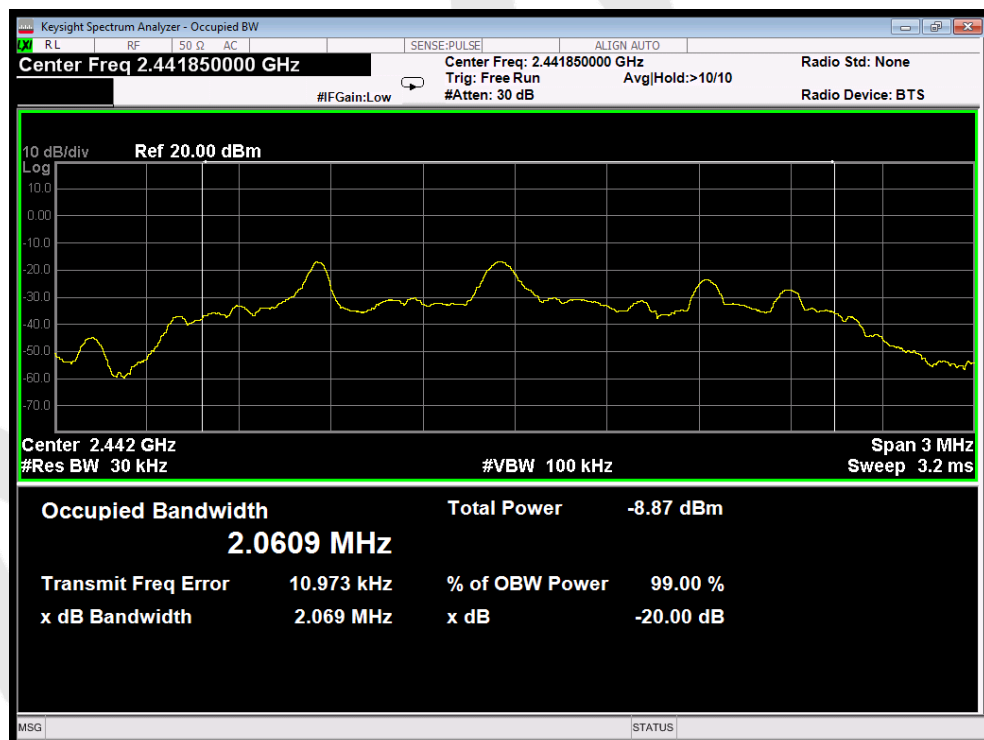

Test Mode: Middle

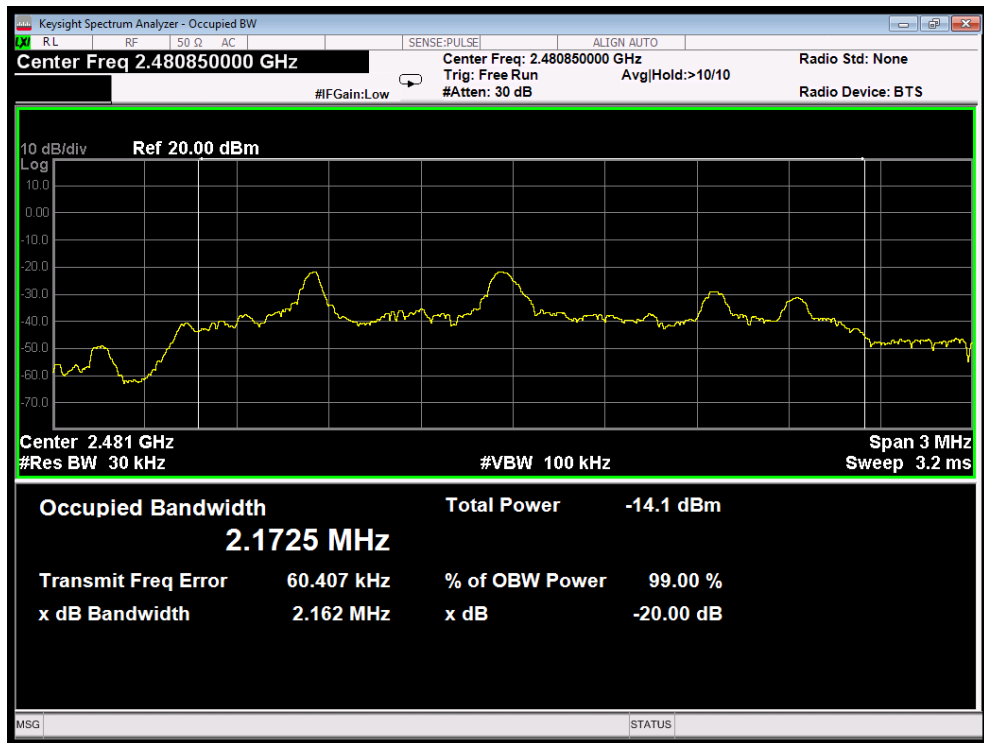

Test Mode: High


6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.



6.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 2.34 dBi. It complies with the standard requirement.

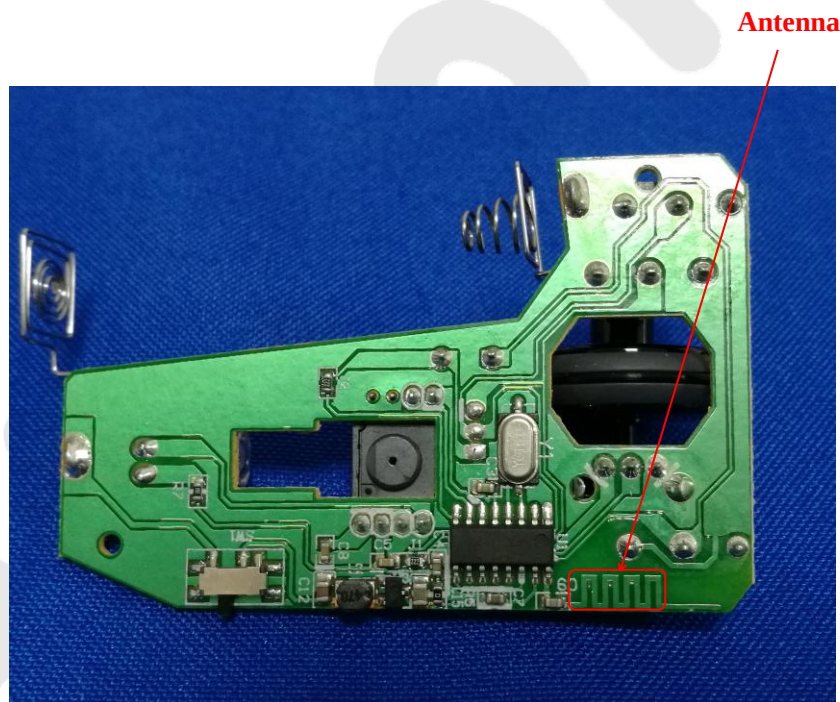


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test

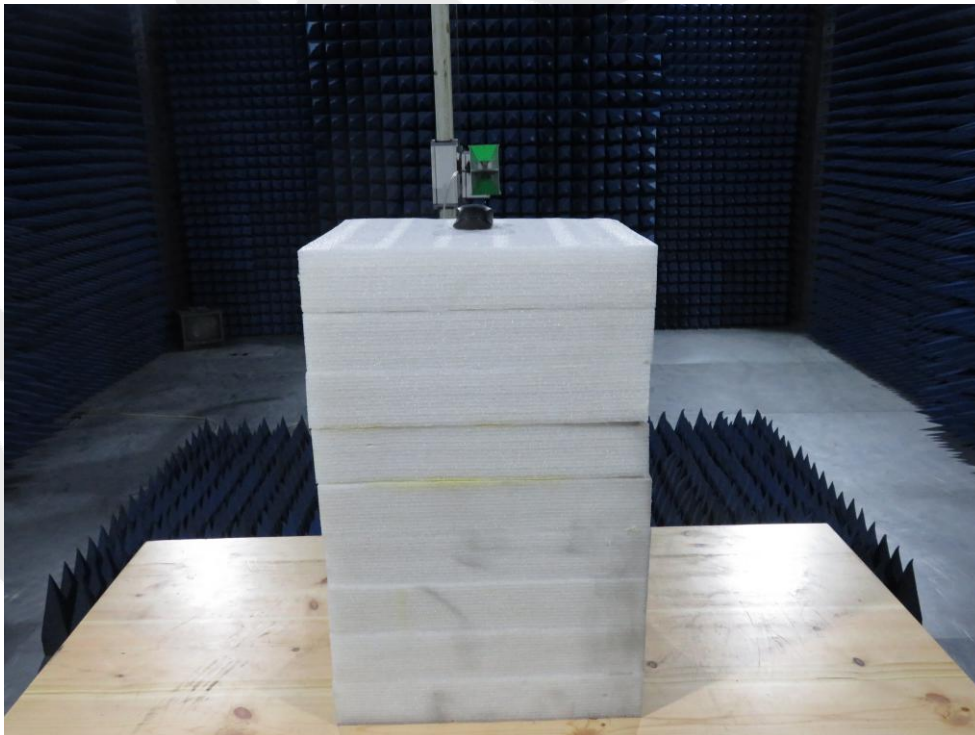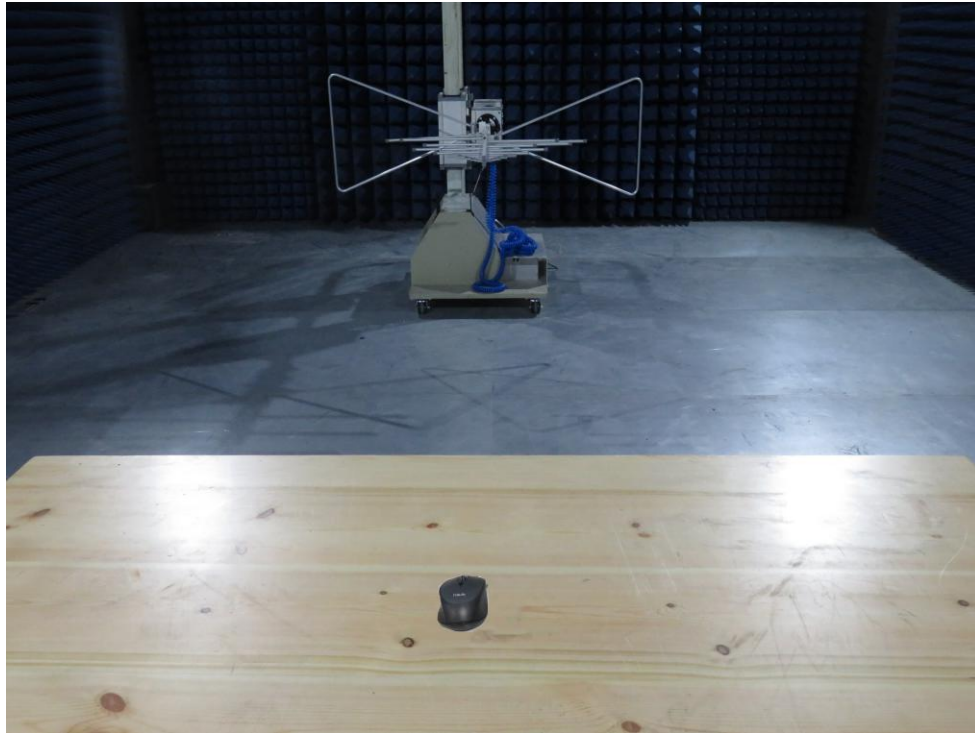


APPENDIX II -- EXTERNAL PHOTOGRAPH

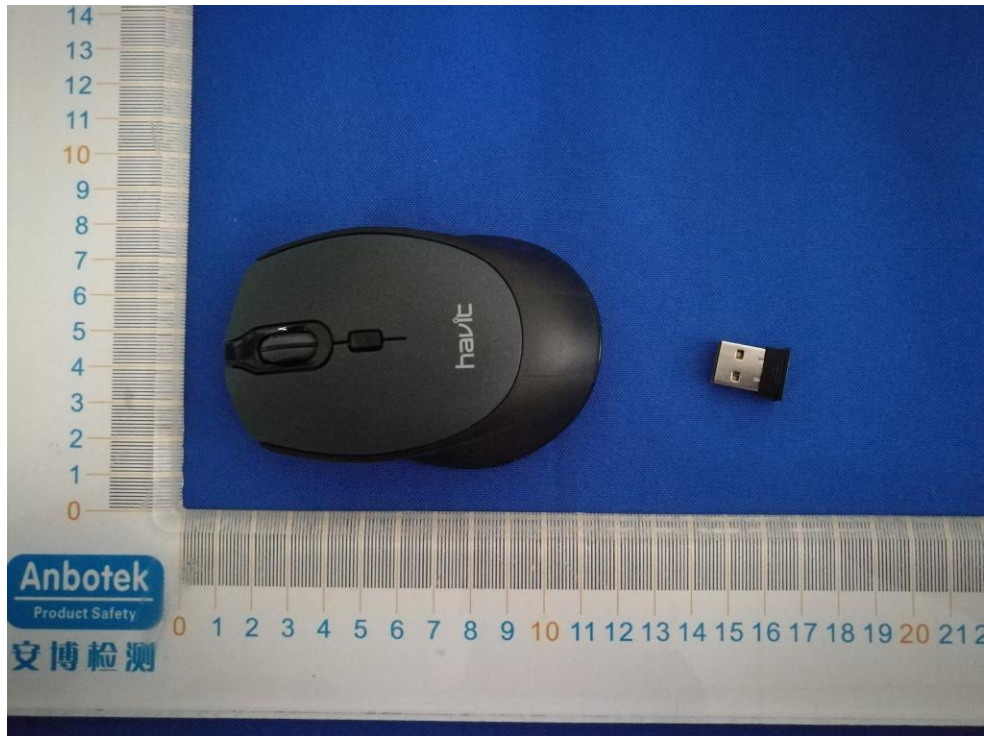









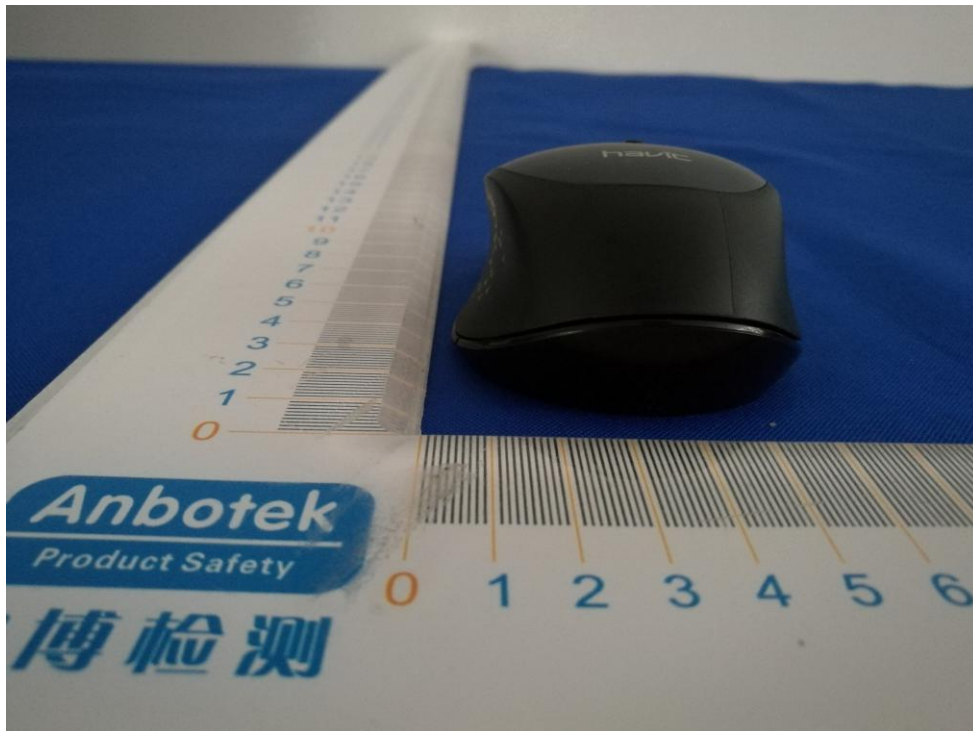

APPENDIX III -- INTERNAL PHOTOGRAPH



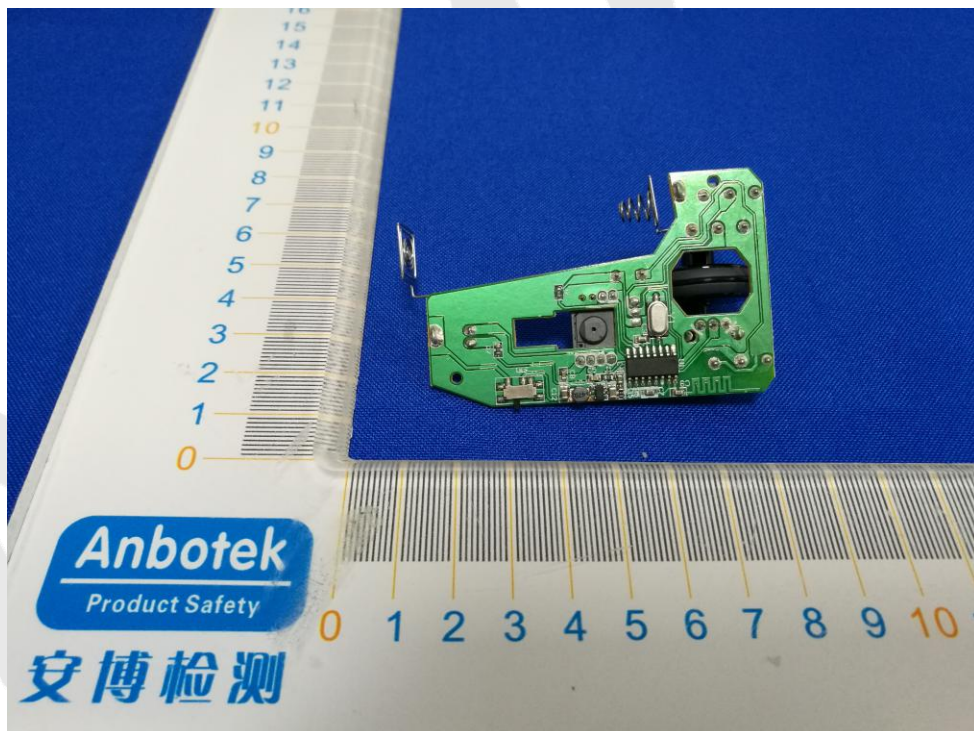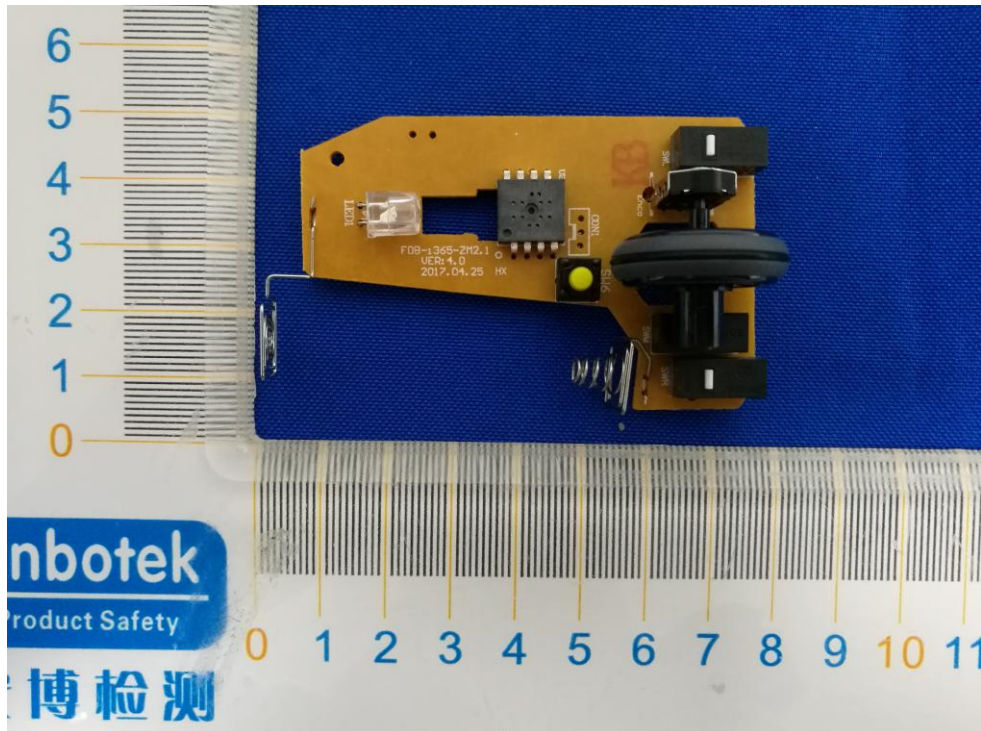

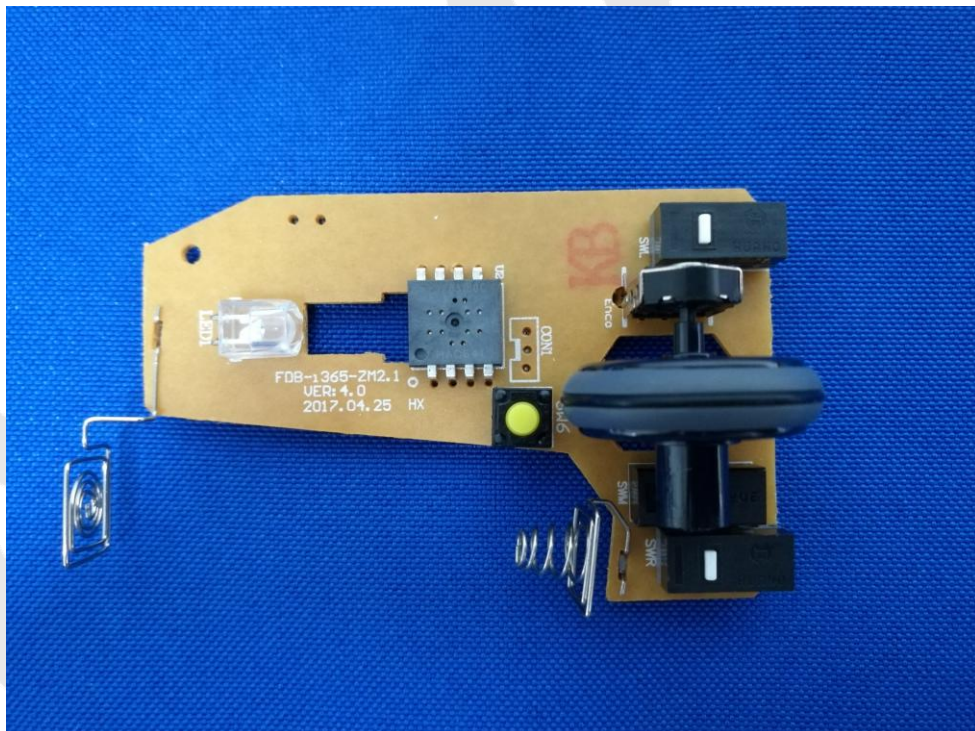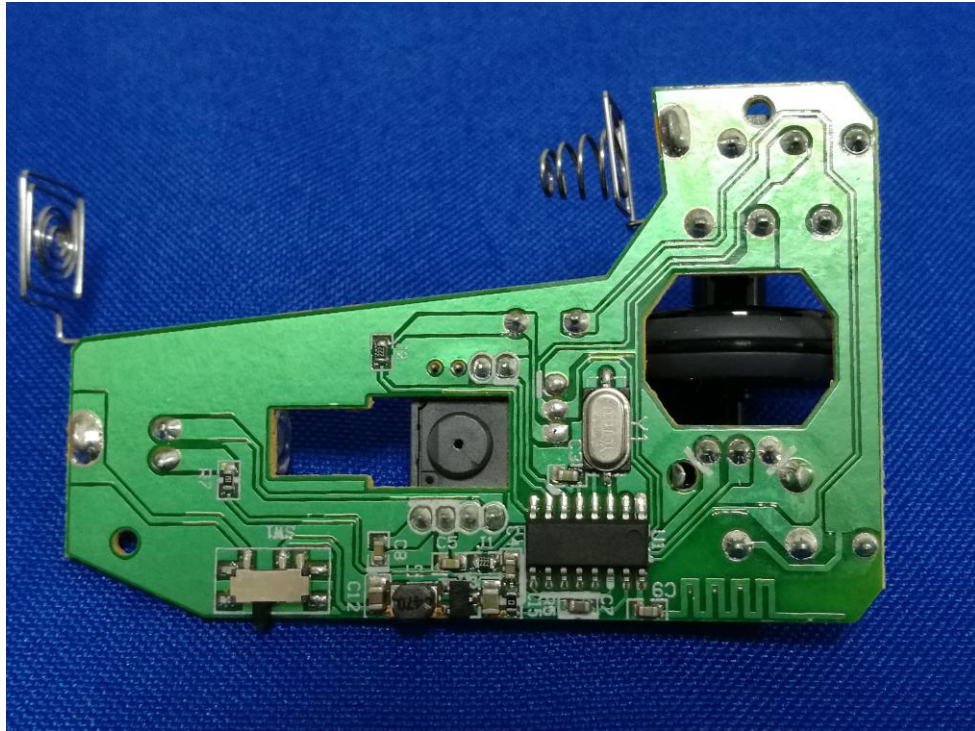

----- End of Report -----