

FCC REPORT

Applicant: Shenzhen LINGDU Auto Electronics Co., Ltd.

Address of Applicant: 1801-1808 Haiyun Building, No. 468 Minzhi Avenue, Longhua, Shenzhen, China

Equipment Under Test (EUT)

Product Name: CAR DVR

Model No.: A68X, M05

FCC ID: 2ASWV-A68X

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: 04 Sep., 2019

Date of Test: 04 Sep., to 20 Sep., 2019

Date of report issued: 23 Sep., 2019

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	23 Sep., 2019	Original

Tested by:

Mike.ou

Date:

23 Sep., 2019

Test Engineer

Reviewed by:

Winner Zhang

Date:

23 Sep., 2019

Project Engineer

3 Contents

Page

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION.....	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF E.U.T.	5
5.3	TEST MODE.....	5
5.4	MEASUREMENT UNCERTAINTY	5
5.5	DESCRIPTION OF SUPPORT UNITS	6
5.6	RELATED SUBMITTAL(S) / GRANT (S).....	6
5.7	DESCRIPTION OF CABLE USED	6
5.8	ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	6
5.9	LABORATORY FACILITY	6
5.10	LABORATORY LOCATION.....	6
5.11	TEST INSTRUMENTS LIST	7
6	TEST RESULTS AND MEASUREMENT DATA	8
6.1	CONDUCTED EMISSION.....	8
6.2	RADIATED EMISSION	13
7	TEST SETUP PHOTO	23
8	EUT CONSTRUCTIONAL DETAILS	26

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part 15.107	Pass
Radiated Emission	Part 15.109	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: The EUT not applicable of the test item.		
Test Method:	ANSI C63.4:2014	

5 General Information

5.1 Client Information

Applicant:	Shenzhen LINGDU Auto Electronics Co., Ltd.
Address:	1801-1808 Haiyun Building, No. 468 Minzhi Avenue, Longhua, Shenzhen, China
Manufacturer:	Shenzhen LINGDU Auto Electronics Co., Ltd.
Address:	1801-1808 Haiyun Building, No. 468 Minzhi Avenue, Longhua, Shenzhen, China
Factory:	Dongguan KAKA Electronic Technology Co., Ltd
Address:	No.395, Huanshi East Road, Shitanpu, TangxiaTown, Dongguan, Guangdong, China

5.2 General Description of E.U.T.

Product Name:	CAR DVR
Model No.:	A68X, M05
Car adapter :	Model No.:HC-801 Input: DC12-24V, 50/60Hz 1.5 A Output: DC 5.0V, 2.5A
Remark:	Model No.: A68X, M05 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name for different client.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

5.3 Test Mode

Operating mode	Detail description
Charging+Recording mode	Keep the EUT in Charging+Recording mode
Charging+Playing mode	Keep the EUT in Charging+Playing mode
GPS mode	Keep the EUT in GPS receiver mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.5 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Apple	Smart Phone	A1687	N/A	N/A
GS Japan	Lead-acid battery	55D26R-MFZ	8362810610	N/A

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Description of Cable Used

Cable Type	Description	Length	From	To
Car adapter	Unshielded	3.5m	EUT	Adapter

5.8 Additions to, deviations, or exclusions from the method

No

5.9 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.10 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>


5.11 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-18-2019	03-17-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2018	11-20-2019
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2018	11-20-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-18-2019	03-17-2020
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-18-2019	03-17-2020
LISN	CHASE	MN2050D	1447	03-18-2019	03-17-2020
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2019	07-20-2021
Cable	HP	10503A	N/A	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		


6 Test results and Measurement Data

6.1 Conducted Emission

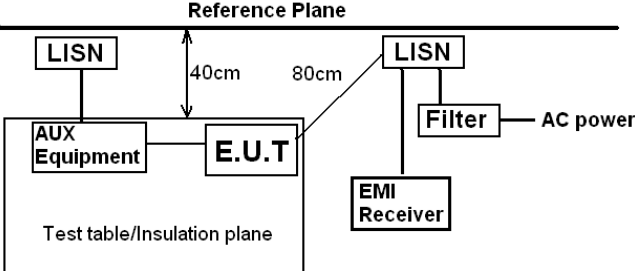Test Requirement:	FCC Part 15 B Section 15.107		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	0.5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.		
Test Instruments:	Refer to section 5.11 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement data:

Product name:	CAR DVR	Product model:	A68X
Test by:	Mike	Test mode:	Charging+Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	DC 12V	Environment:	Temp: 22.5℃ Humi: 55%

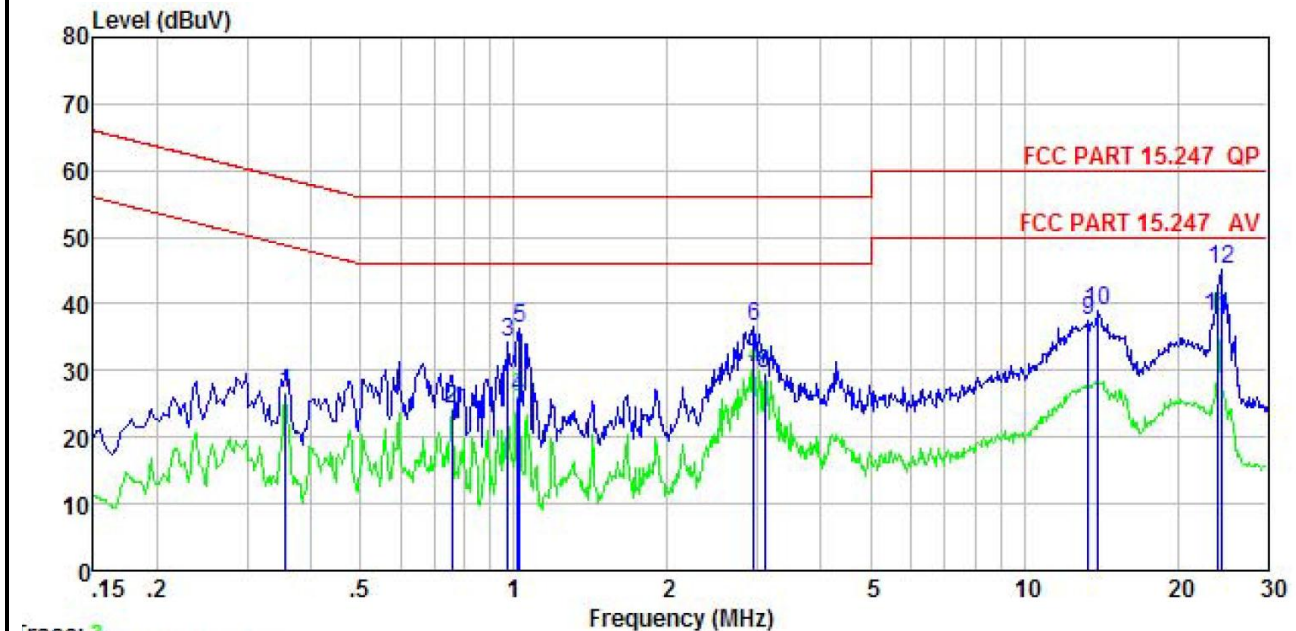


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.358	16.36	-0.38	10.73	26.71	48.78	-22.07	Average
2	0.755	13.82	-0.38	10.79	24.23	46.00	-21.77	Average
3	0.974	23.80	-0.38	10.86	34.28	56.00	-21.72	QP
4	1.016	15.38	-0.38	10.87	25.87	46.00	-20.13	Average
5	1.027	25.77	-0.38	10.87	36.26	56.00	-19.74	QP
6	2.946	26.15	-0.44	10.92	36.63	56.00	-19.37	QP
7	2.946	19.80	-0.44	10.92	30.28	46.00	-15.72	Average
8	3.107	19.03	-0.44	10.92	29.51	46.00	-16.49	Average
9	13.337	27.37	-0.66	10.91	37.62	60.00	-22.38	QP
10	13.915	28.67	-0.67	10.91	38.91	60.00	-21.09	QP
11	24.015	28.38	-1.04	10.88	38.22	50.00	-11.78	Average
12	24.271	35.36	-1.04	10.88	45.20	60.00	-14.80	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	CAR DVR	Product model:	A68X
Test by:	Mike	Test mode:	Charging+Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	DC 12V	Environment:	Temp: 22.5℃ Humi: 55%

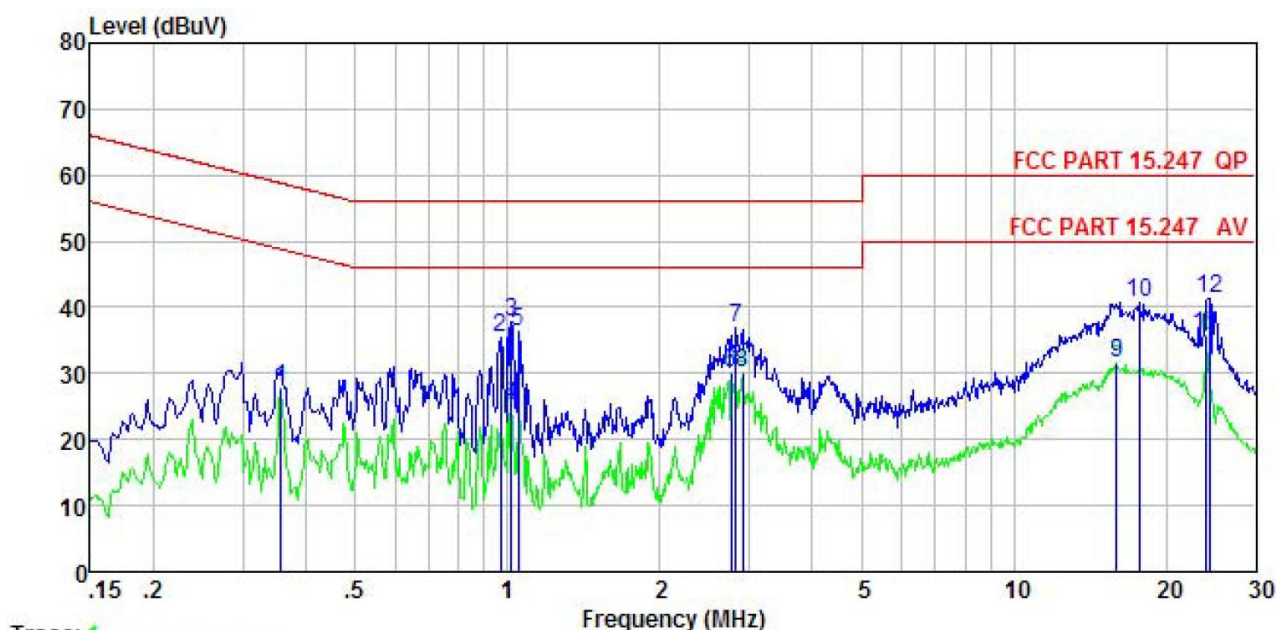


Trace: 1

	Freq	Read	LISN	Cable	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Level	Line	Limit	
		dBuV	dB	dB	dBuV	dBuV	dB	
1	0.358	17.78	-0.64	10.73	27.87	48.78	-20.91	Average
2	0.968	25.14	-0.63	10.86	35.37	56.00	-20.63	QP
3	1.016	27.48	-0.63	10.87	37.72	56.00	-18.28	QP
4	1.016	14.86	-0.63	10.87	25.10	46.00	-20.90	Average
5	1.049	26.19	-0.63	10.88	36.44	56.00	-19.56	QP
6	2.765	19.96	-0.67	10.93	30.22	46.00	-15.78	Average
7	2.824	26.68	-0.67	10.93	36.94	56.00	-19.06	QP
8	2.915	19.98	-0.67	10.92	30.23	46.00	-15.77	Average
9	15.970	21.64	-0.94	10.91	31.61	50.00	-18.39	Average
10	17.661	31.01	-1.15	10.92	40.78	60.00	-19.22	QP
11	24.015	26.42	-1.44	10.88	35.86	50.00	-14.14	Average
12	24.271	31.98	-1.44	10.88	41.42	60.00	-18.58	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	CAR DVR	Product model:	A68X
Test by:	Mike	Test mode:	Charging+Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	DC 24V	Environment:	Temp: 22.5℃ Humi: 55%

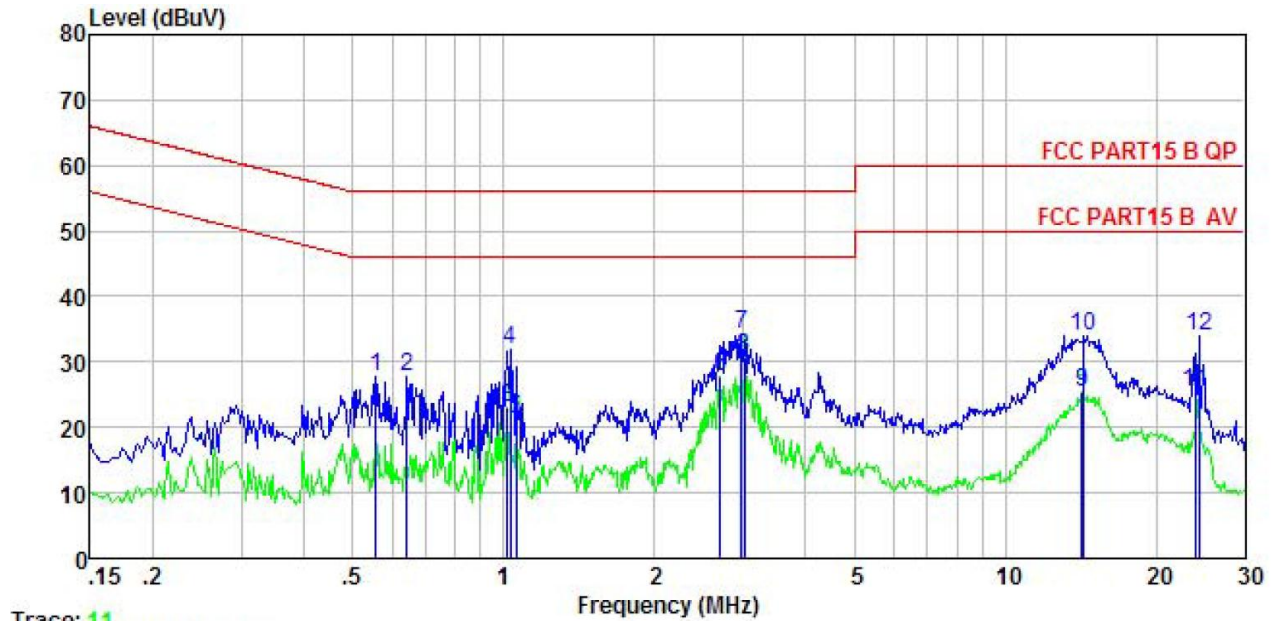


Trace: 11

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	dBuV	Line	Limit	Remark
		dBuV	dB	dB	dBuV	dBuV	dB	
1	0.555	17.46	-0.39	10.76	27.83	56.00	-28.17	QP
2	0.641	17.24	-0.38	10.77	27.63	56.00	-28.37	QP
3	1.016	12.42	-0.38	10.87	22.91	46.00	-23.09	Average
4	1.032	21.38	-0.38	10.87	31.87	56.00	-24.13	QP
5	1.060	10.68	-0.38	10.88	21.18	46.00	-24.82	Average
6	2.707	17.25	-0.43	10.93	27.75	46.00	-18.25	Average
7	2.978	23.91	-0.44	10.92	34.39	56.00	-21.61	QP
8	3.025	20.22	-0.44	10.92	30.70	46.00	-15.30	Average
9	14.213	15.15	-0.67	10.91	25.39	50.00	-24.61	Average
10	14.364	23.78	-0.67	10.90	34.01	60.00	-25.99	QP
11	24.015	15.58	-1.04	10.88	25.42	50.00	-24.58	Average
12	24.271	24.22	-1.04	10.88	34.06	60.00	-25.94	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	CAR DVR	Product model:	A68X
Test by:	Mike	Test mode:	Charging+Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	DC 24V	Environment:	Temp: 22.5℃ Humi: 55%


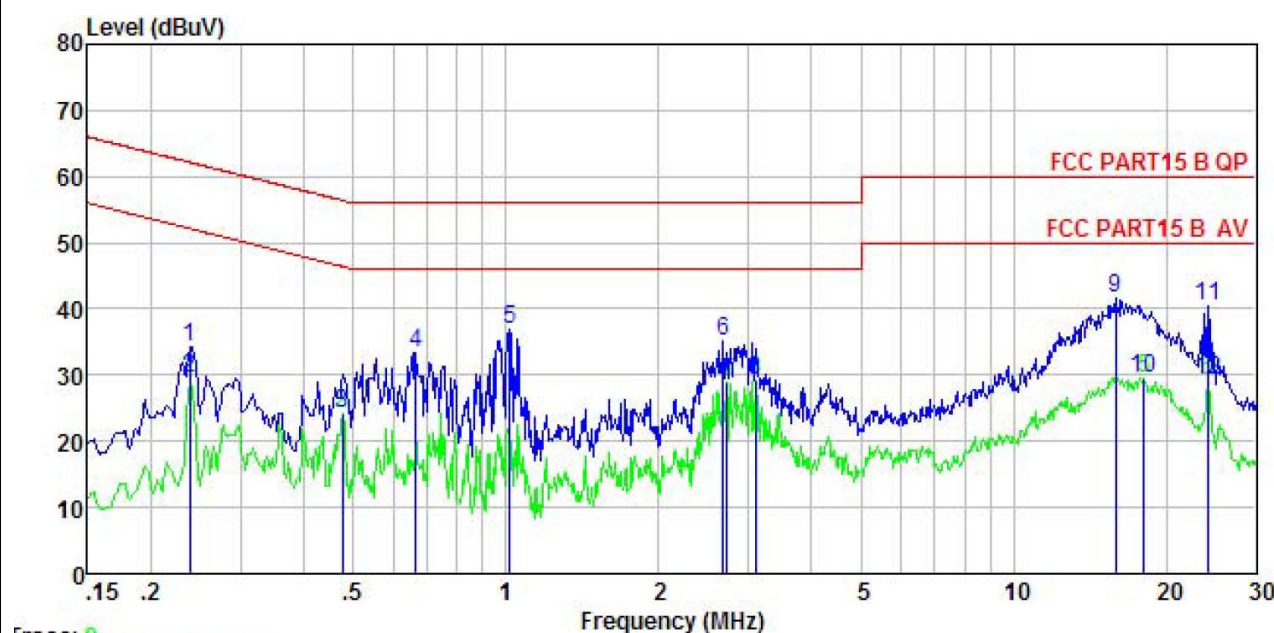


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.238	24.17	-0.66	10.75	34.26	62.17	-27.91	QP
2	0.238	19.37	-0.66	10.75	29.46	52.17	-22.71	Average
3	0.476	13.98	-0.65	10.75	24.08	46.41	-22.33	Average
4	0.665	23.25	-0.64	10.77	33.38	56.00	-22.62	QP
5	1.016	26.56	-0.63	10.87	36.80	56.00	-19.20	QP
6	2.678	24.83	-0.67	10.93	35.09	56.00	-20.91	QP
7	2.721	18.73	-0.67	10.93	28.99	46.00	-17.01	Average
8	3.107	18.98	-0.67	10.92	29.23	46.00	-16.77	Average
9	15.885	31.61	-0.93	10.91	41.59	60.00	-18.41	QP
10	18.039	19.85	-1.19	10.92	29.58	50.00	-20.42	Average
11	24.142	31.11	-1.44	10.88	40.55	60.00	-19.45	QP
12	24.142	19.72	-1.44	10.88	29.16	50.00	-20.84	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.2 Radiated Emission

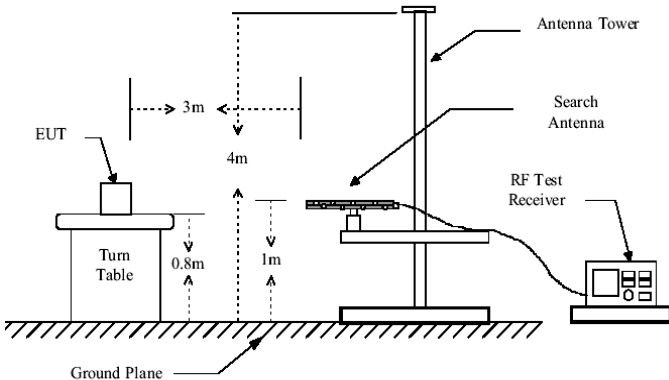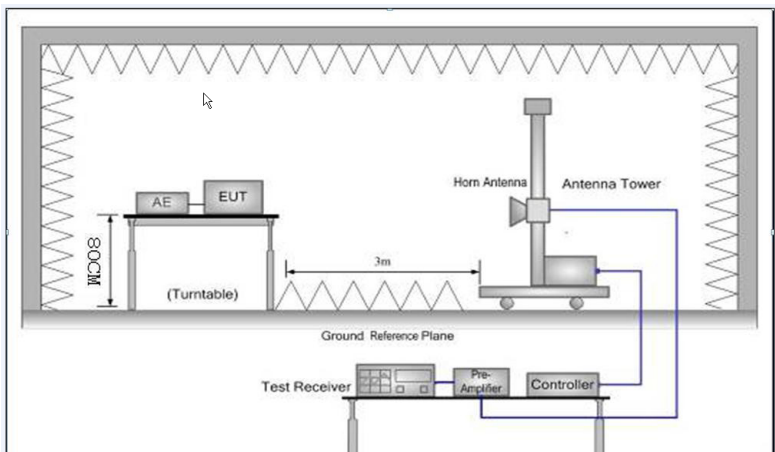
Test Requirement:	FCC Part 15 B Section 15.109				
Test Frequency Range:	30MHz to 6000MHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak RMS	1MHz 1MHz	3MHz 3MHz	Peak Value Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			74.0		Peak Value
Test setup:	Below 1GHz				
					
	Above 1GHz				
					
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.				

	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.11 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All of the observed value above 6GHz were the noise floor , which were no recorded

Measurement Data:

Below 1GHz:

Product Name:	CAR DVR	Product model:	A68X
Test By:	Mike	Test mode:	Charging+Recording mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 12V	Environment:	Temp: 24℃ Humi: 57%

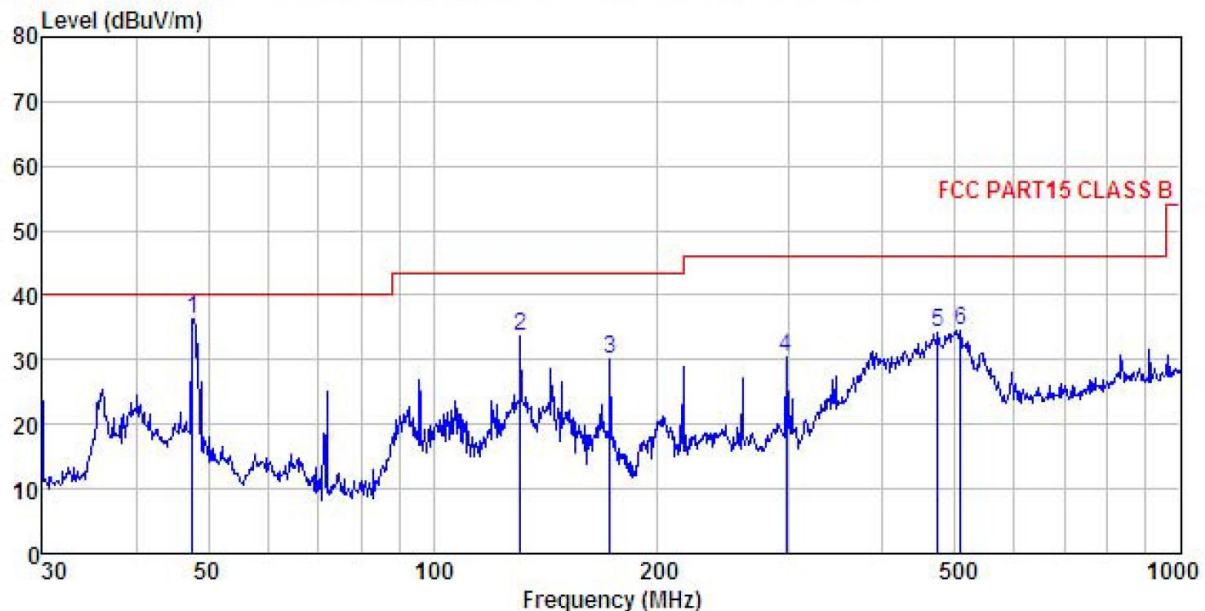


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBm/m	Line	Limit	Remark
		dBm	dB/m	dB	dB		dBm/m	dB	
1	47.659	52.79	12.20	1.27	29.84	36.42	40.00	-3.58	QP
2	130.837	50.62	10.10	2.29	29.32	33.69	43.50	-9.81	QP
3	172.599	46.73	9.74	2.68	29.03	30.12	43.50	-13.38	QP
4	297.224	42.41	13.56	2.93	28.46	30.44	46.00	-15.56	QP
5	473.835	42.40	17.32	3.40	28.91	34.21	46.00	-11.79	QP
6	508.258	41.65	18.23	3.66	28.98	34.56	46.00	-11.44	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	CAR DVR	Product model:	A68X
Test By:	Mike	Test mode:	Charging+Recording mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 12V	Environment:	Temp: 24℃ Humi: 57%

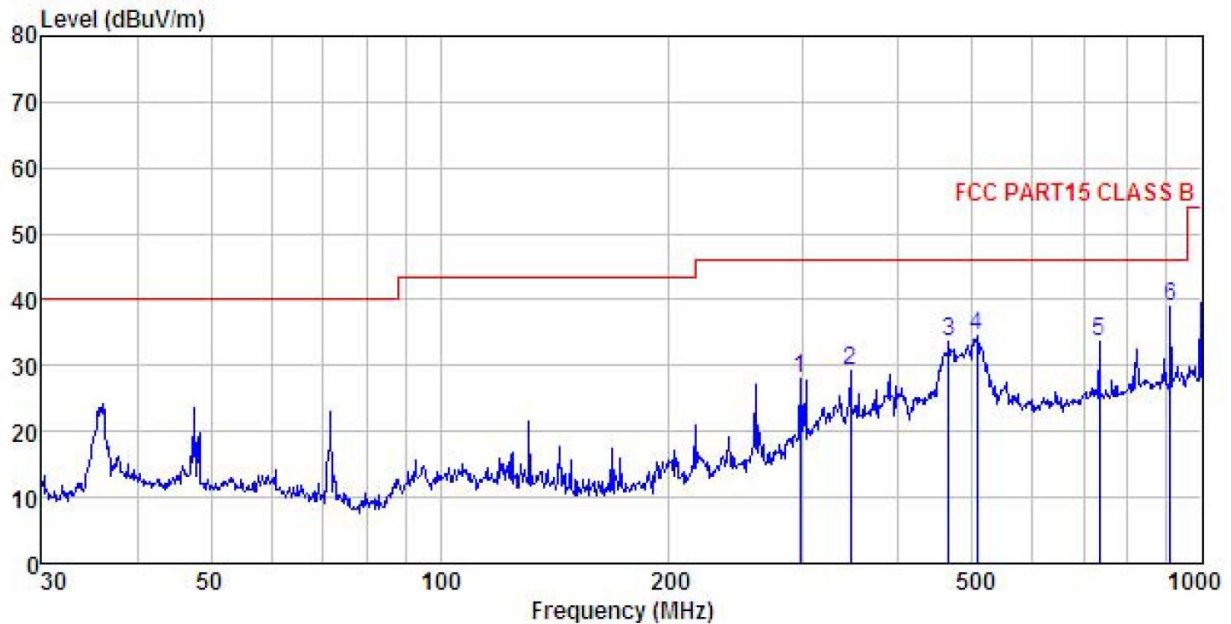


	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	297.224	39.93	13.56	2.93	28.46	27.96	46.00	-18.04 QP
2	345.595	40.14	14.52	3.08	28.55	29.19	46.00	-16.81 QP
3	465.599	42.09	17.04	3.33	28.90	33.56	46.00	-12.44 QP
4	506.479	41.65	18.23	3.65	28.97	34.56	46.00	-11.44 QP
5	734.491	37.47	20.54	4.30	28.54	33.77	46.00	-12.23 QP
6	909.667	40.37	22.53	3.81	27.85	38.86	46.00	-7.14 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:

Product Name:	CAR DVR	Product model:	A68X
Test By:	Mike	Test mode:	Charging+Recording mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Vertical
Test Voltage:	DC 12V	Environment:	Temp: 24℃ Humi: 57%

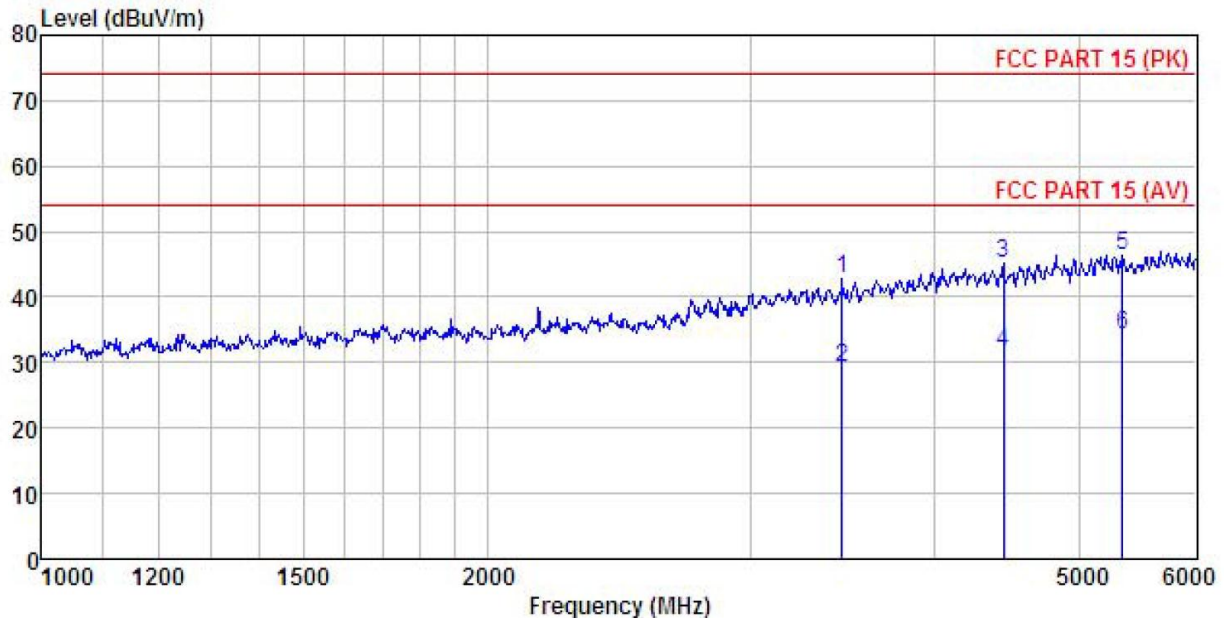


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3461.456	49.88	28.59	5.71	41.42	42.76	74.00	-31.24	Peak
2	3461.456	36.33	28.59	5.71	41.42	29.21	54.00	-24.79	Average
3	4448.361	49.91	30.39	6.75	42.00	45.05	74.00	-28.95	Peak
4	4448.361	36.41	30.39	6.75	42.00	31.55	54.00	-22.45	Average
5	5349.948	48.98	32.24	7.11	41.89	46.44	74.00	-27.56	Peak
6	5349.948	36.73	32.24	7.11	41.89	34.19	54.00	-19.81	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	CAR DVR	Product model:	A68X
Test By:	Mike	Test mode:	Charging+Recording mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Horizontal
Test Voltage:	DC 12V	Environment:	Temp: 24℃ Humi: 57%

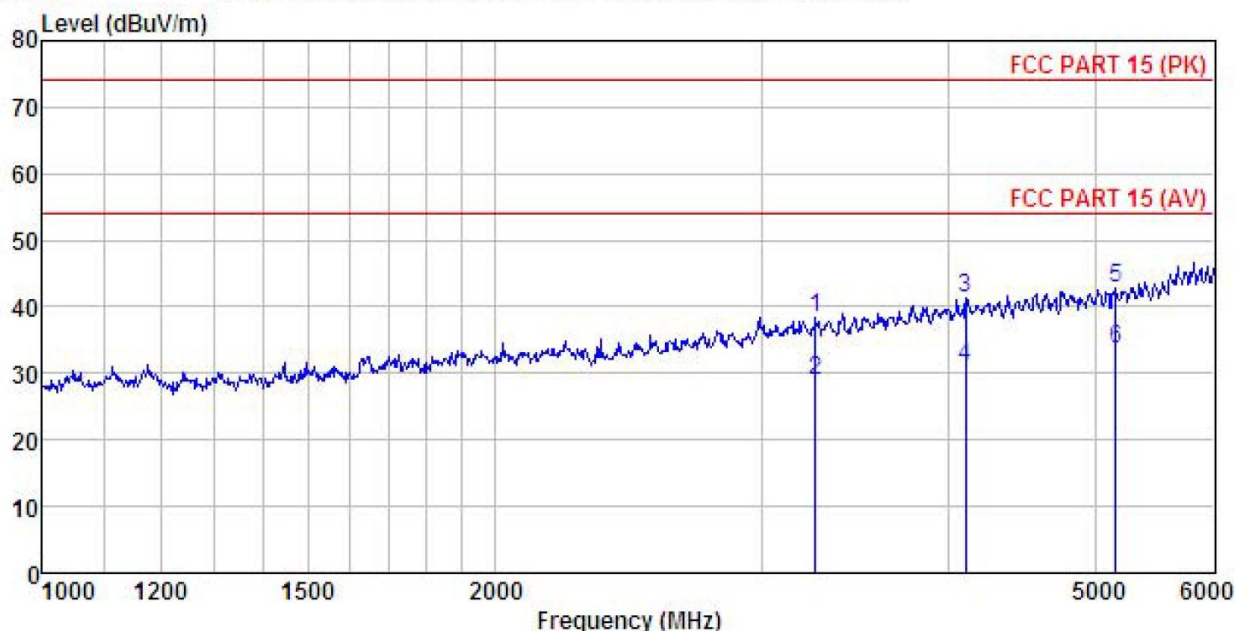


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
		Level	Loss	Factor		Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	3262.720	45.85	28.55	5.49	41.39	38.50	74.00	-35.50 Peak
2	3262.720	36.41	28.55	5.49	41.39	29.06	54.00	-24.94 Average
3	4103.771	46.57	30.32	6.25	41.81	41.33	74.00	-32.67 Peak
4	4103.771	36.18	30.32	6.25	41.81	30.94	54.00	-23.06 Average
5	5161.626	45.74	31.80	7.06	41.94	42.66	74.00	-31.34 Peak
6	5161.626	36.59	31.80	7.06	41.94	33.51	54.00	-20.49 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Below 1GHz:

Product Name:	CAR DVR	Product model:	A68X
Test By:	Mike	Test mode:	Charging+Recording mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 24V	Environment:	Temp: 24℃ Humi: 57%

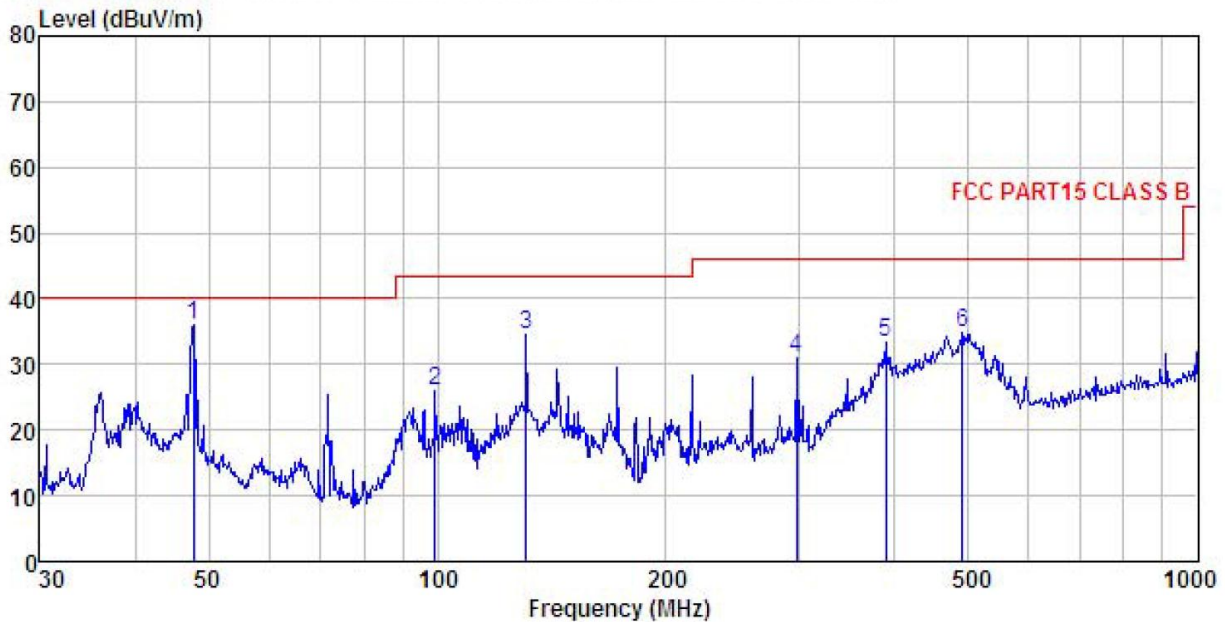


	ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	47.826	52.45	12.19	1.27	29.84	36.07	40.00
2	99.180	41.32	12.32	1.95	29.53	26.06	43.50
3	130.837	51.33	10.10	2.29	29.32	34.40	43.50
4	297.224	42.89	13.56	2.93	28.46	30.92	46.00
5	389.355	43.94	15.15	3.08	28.73	33.44	46.00
6	490.745	42.26	17.86	3.54	28.94	34.72	46.00

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	CAR DVR	Product model:	A68X
Test By:	Mike	Test mode:	Charging+Recording mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 24V	Environment:	Temp: 24℃ Humi: 57%

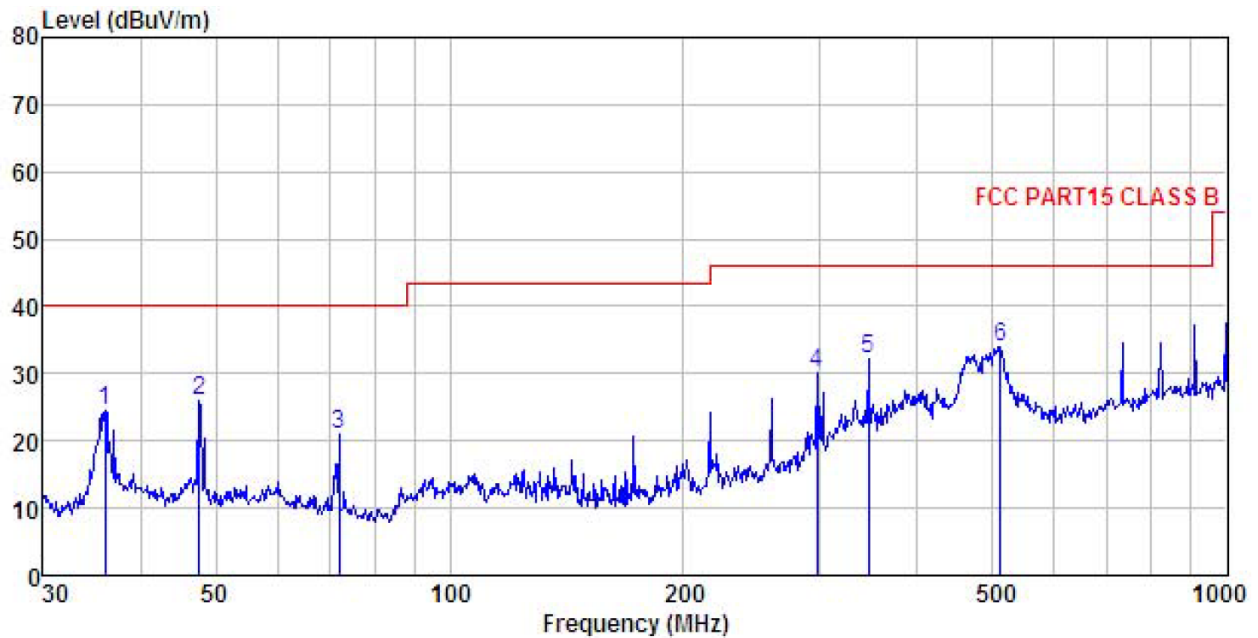


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit	
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	36.001	42.02	11.43	1.07	29.94	24.58	40.00	-15.42 QP
2	47.659	42.37	12.20	1.27	29.84	26.00	40.00	-14.00 QP
3	72.084	41.02	8.19	1.56	29.70	21.07	40.00	-18.93 QP
4	297.224	41.94	13.56	2.93	28.46	29.97	46.00	-16.03 QP
5	345.595	43.15	14.52	3.08	28.55	32.20	46.00	-13.80 QP
6	511.835	41.12	18.24	3.68	28.99	34.05	46.00	-11.95 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:

Product Name:	CAR DVR	Product model:	A68X
Test By:	Mike	Test mode:	Charging+Recording mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Vertical
Test Voltage:	DC 24V	Environment:	Temp: 24℃ Humi: 57%

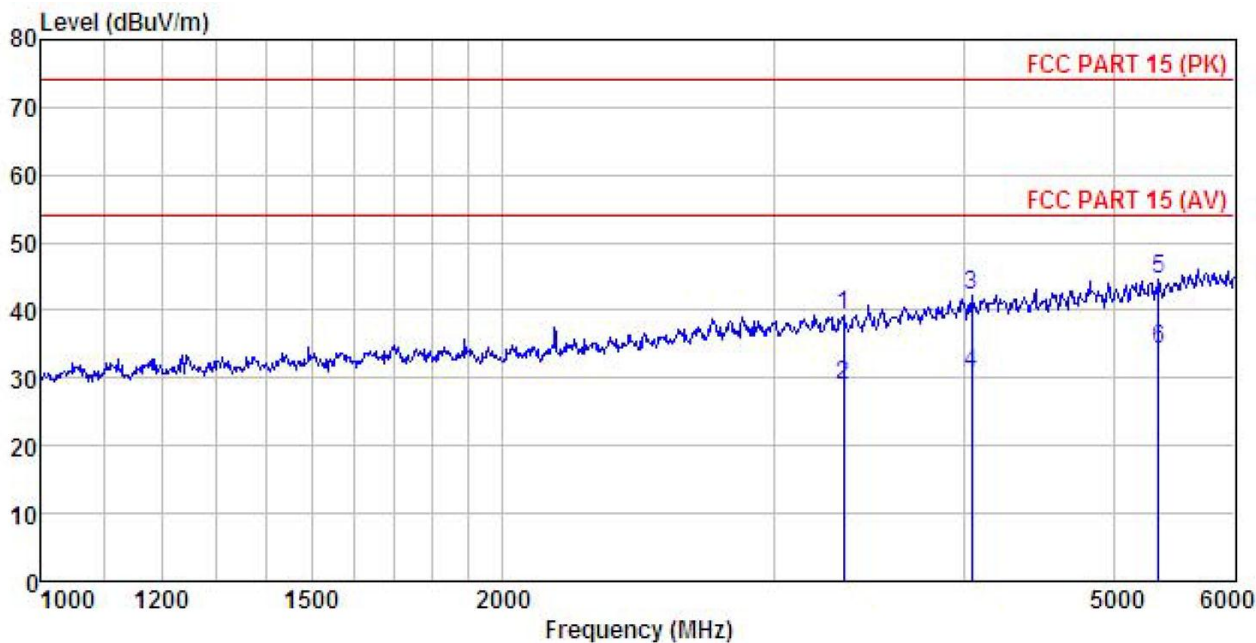


	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
		Level	Factor	Loss	Factor	Level	Line
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	3333.632	46.43	28.57	5.56	41.37	39.19	74.00
2	3333.632	36.14	28.57	5.56	41.37	28.90	54.00
3	4038.126	47.62	30.31	6.16	41.81	42.28	74.00
4	4038.126	36.09	30.31	6.16	41.81	30.75	54.00
5	5349.948	46.98	32.24	7.11	41.89	44.44	74.00
6	5349.948	36.73	32.24	7.11	41.89	34.19	54.00

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	CAR DVR	Product model:	A68X
Test By:	Mike	Test mode:	Charging+Recording mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Horizontal
Test Voltage:	DC 24V	Environment:	Temp: 24℃ Humi: 57%

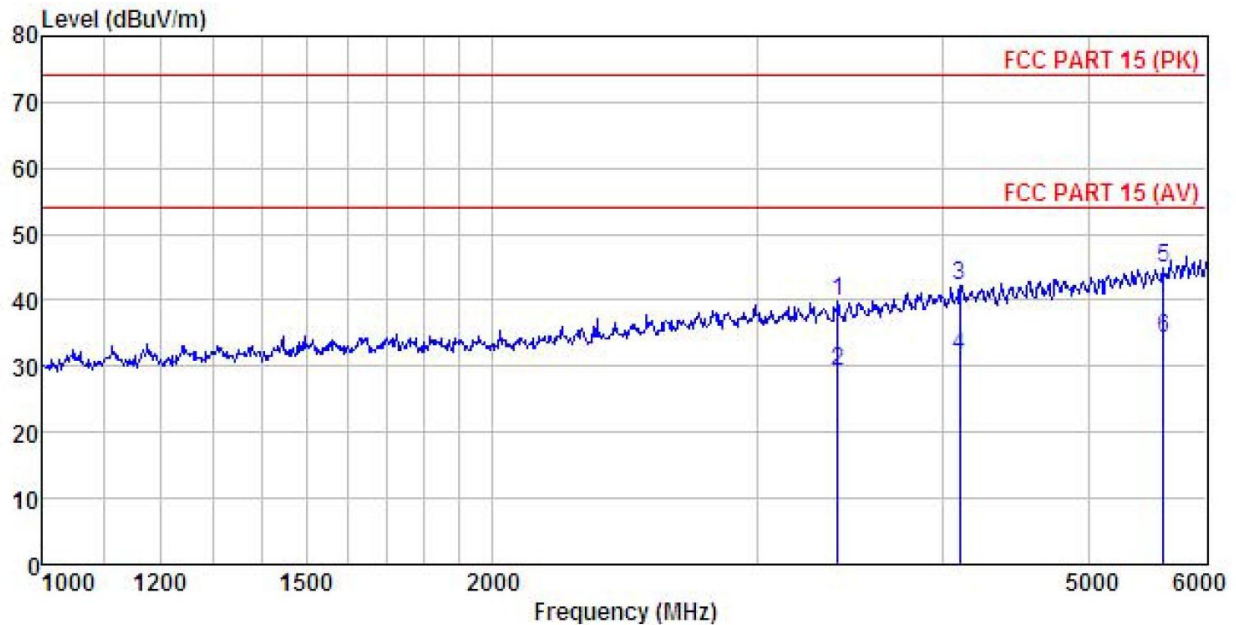

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3399.987	47.03	28.58	5.62	41.35	39.88	74.00	-34.12	Peak
2	3399.987	36.24	28.58	5.62	41.35	29.09	54.00	-24.91	Average
3	4103.771	47.57	30.32	6.25	41.81	42.33	74.00	-31.67	Peak
4	4103.771	36.76	30.32	6.25	41.81	31.52	54.00	-22.48	Average
5	5615.128	46.79	32.62	7.35	41.81	44.95	74.00	-29.05	Peak
6	5615.128	36.02	32.62	7.35	41.81	34.18	54.00	-19.82	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.