

# FCC PART 15 SUBPART C TEST REPORT

Issued By: Dongguan New Testing Centre Co., Ltd

Add: 3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China, 523808.

A2LA Number:5426.01

Tel: 86-769-22212079

<http://www.ntc-cert.com>



## Marking:

1. The test report is invalid without the official stamp of test center.
2. Nobody is allowed to photocopy or partly photocopy this test report without written permission of test center.
3. The test report is invalid without the signatures of approver, reviewer and testing engineer.
4. The test report is invalid if altered.
5. Objections to the test report must be submitted to NTC within 15 days.
6. The test report is valid for the tested samples only.
7. As for test verdict, "—" means is "no need for judgment" "N/A" means is "not applicable", "P" means "pass", "F" means "fail".

## TABLE OF CONTENTS

|                                                           |          |
|-----------------------------------------------------------|----------|
| <b>Test Report Declare .....</b>                          | <b>3</b> |
| 1. Summary of test results .....                          | 4        |
| 2. General test information .....                         | 4        |
| 2.1. Description of EUT .....                             | 4        |
| 2.2. Detail models.....                                   | 5        |
| 2.3. Block diagram EUT configuration for test .....       | 5        |
| 2.4. Test environment conditions .....                    | 6        |
| 2.5. Measurement uncertainty .....                        | 7        |
| 2.6. Test Peripheral List.....                            | 7        |
| 3. Power Line Conducted Emission Test .....               | 8        |
| 3.1. Test equipment .....                                 | 8        |
| 3.2. Block diagram of test setup.....                     | 8        |
| 3.3. Power Line Conducted Emission Limits (Class B) ..... | 8        |
| 3.4. Test Procedure.....                                  | 9        |
| 3.5. Test Result.....                                     | 9        |
| 4. Radiated emission test.....                            | 12       |
| 4.1. Test equipment .....                                 | 12       |
| 4.2. Block diagram of test setup.....                     | 13       |
| 4.3. Limit .....                                          | 15       |
| 4.4. Test Procedure.....                                  | 16       |
| 4.5. Test result .....                                    | 16       |
| 5. Maximum Peak Output Power .....                        | 22       |
| 5.1. Applied procedures / Limit.....                      | 22       |
| 5.2. Test procedure .....                                 | 22       |
| 5.3. Deviation from standard.....                         | 22       |
| 5.4. Test setup .....                                     | 22       |
| 5.5. TEST RESULTS .....                                   | 22       |
| 6. BANDWIDTH TEST .....                                   | 28       |
| 6.1. Applied procedures / Limit.....                      | 28       |
| 6.2. Test procedure .....                                 | 28       |
| 6.3. Deviation from standard.....                         | 28       |
| 6.4. Test setup .....                                     | 28       |
| 6.5. Test results .....                                   | 28       |

|       |                                     |     |
|-------|-------------------------------------|-----|
| 7.    | Carrier Frequencies Separated ..... | 34  |
| 7.1.  | Applied procedures / Limit.....     | 34  |
| 7.2.  | Test procedure .....                | 34  |
| 7.3.  | Deviation from standard.....        | 34  |
| 7.4.  | Test setup .....                    | 34  |
| 7.5.  | Test results .....                  | 34  |
| 8.    | Hopping Channel Number .....        | 40  |
| 8.1.  | Applied procedures / Limit.....     | 40  |
| 8.2.  | Test procedure .....                | 40  |
| 8.3.  | Deviation from standard.....        | 40  |
| 8.4.  | Test setup .....                    | 40  |
| 8.5.  | Test result .....                   | 40  |
| 9.    | Dwell time .....                    | 44  |
| 9.1.  | Applied procedures / Limit.....     | 44  |
| 9.2.  | Test procedure .....                | 44  |
| 9.3.  | Deviation from standard.....        | 44  |
| 9.4.  | Test setup .....                    | 44  |
| 9.5.  | Test result .....                   | 44  |
| 10.   | Band edge.....                      | 59  |
| 10.1. | Applied procedures / Limit.....     | 59  |
| 10.2. | Test procedure .....                | 59  |
| 10.3. | Deviation from standard.....        | 59  |
| 10.4. | Test setup .....                    | 59  |
| 10.5. | Test results .....                  | 59  |
| 11.   | Conducted Spurious Emissions.....   | 87  |
| 11.1. | Applied procedures / Limit.....     | 87  |
| 11.2. | Test procedure .....                | 87  |
| 11.3. | Deviation from standard.....        | 87  |
| 11.4. | Test setup .....                    | 87  |
| 11.5. | Test results .....                  | 87  |
| 12.   | Antenna Requirement .....           | 97  |
| 12.1. | Standard requirement .....          | 97  |
| 12.2. | EUT Antenna.....                    | 97  |
| 13.   | Test setup photograph.....          | 98  |
| 14.   | Photos of the EUT .....             | 100 |

## TEST REPORT DECLARE

|                             |   |                                                                                                                                   |
|-----------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>FCC ID</b>               | : | 2AFHW-ITSBL547                                                                                                                    |
| <b>Applicant</b>            | : | INNOVATIVE TECHNOLOGY ELECTRONICS LLC                                                                                             |
| <b>Address</b>              | : | 1 CHANNEL DRIVE, PORT WASHINGTON, New York 11050, United States.                                                                  |
| <b>Equipment under Test</b> | : | Groovy/ Glitter lamp with Bluetooth Speaker                                                                                       |
| <b>Model No</b>             | : | ITSBL-547XXXX where X can be 0-9, A-Z , " -" or blank means color of unit/liquid color inside bottle and light bulb power 15-30W. |
| <b>Trade Mark</b>           | : | Innovative Technology, Victrola                                                                                                   |
| <b>Manufacturer</b>         | : | DONGGUAN QIAOTOU KIT SHING LIGHTING LTD                                                                                           |
| <b>Address</b>              | : | He Keng Qiao Tou Town Dongguan,Guangdong 523527 CHINA                                                                             |

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C: 2017, ANSI C63.10:2013.


### We Declare:

The equipment described above is tested by Dongguan New Testing Centre Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan New Testing Centre Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.**

|                      |                           |                        |             |
|----------------------|---------------------------|------------------------|-------------|
| <b>Report No.:</b>   | NTCER1909009              |                        |             |
| <b>Date of Test:</b> | Sep.2,2019 to Sep.21,2019 | <b>Date of Report:</b> | Sep.21,2019 |

### Prepared By:



**Jack Zhang/Engineer**



**Neil Zhong/LAB Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan New Testing Centre Co., Ltd

## 1. Summary of test results

| Description of Test Item      | Standard                   | Results |
|-------------------------------|----------------------------|---------|
| Antenna Requirement           | Section 15.247(c)          | PASS    |
| Conduction Emissions          | Section 15.207(a)          | PASS    |
| Radiated Emissions            | Section 15.247(d)          | PASS    |
| Carrier Frequencies Separated | Section 15.247(a)(1)       | PASS    |
| Hopping Channel Number        | Section 15.247(a)(1) (iii) | PASS    |
| Dwell Time                    | Section 15.247(a)(1) (iii) | PASS    |
| Maximum Peak Output Power     | Section 15.247(b)          | PASS    |
| Band edge                     | Section 15.247(d)          | PASS    |
| Conducted Spurious Emissions  | Section 15.247(d)          | PASS    |

## 2. General test information

### 2.1. Description of EUT

|                          |                                               |
|--------------------------|-----------------------------------------------|
| EUT* Name                | : Groovy/ Glitter lamp with Bluetooth Speaker |
| Test model               | : ITSBL-547-KBG                               |
| EUT function description | : Please reference user manual of this device |
| Power supply             | : AC 120V 60Hz 35W                            |
| Trade mark               | : Innovative Technology, Victrola             |
| Operation frequency      | : 2402-2480MHz                                |
| Number of channel        | : 79                                          |
| Modulation Technology    | : GFSK, $\pi/4$ -DQPSK, 8DPSK(1/2/3Mbps)      |
| Bluetooth version        | : 3.0                                         |
| H/W No.                  | : V 2.0                                       |
| S/W No.                  | : V1.0                                        |
| Antenna Type             | : PCB antenna                                 |
| Antenna Gain             | : 1.9 dBi                                     |
| Sample Type              | : Series production                           |


Note: 1,EUT is the ab. of equipment under test.

## 2.2. Detail models

| Model         | Rating           | Note                                                                                                                            |
|---------------|------------------|---------------------------------------------------------------------------------------------------------------------------------|
| ITSBL-547XXXX | AC 120V 60Hz 35W | ITSBL-547XXXX where X can be 0-9, A-Z, “-” or blank means color of unit/liquid color inside bottle and light bulb power 15-30W. |

Note: The light bulb power is 30W for model “ITSBL-547-KBG”.

## 2.3. Block diagram EUT configuration for test

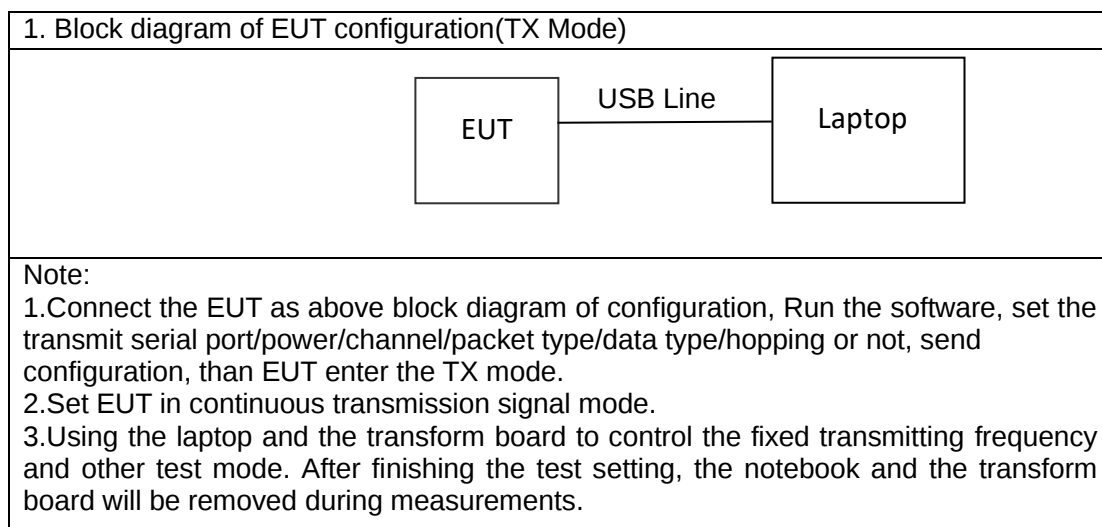

## 2.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

(1) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(2) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

| Frequency range over which device operates | Number of frequencies | Location in the range of operation          |
|--------------------------------------------|-----------------------|---------------------------------------------|
| 1 MHz or less                              | 1                     | Middle                                      |
| 1 to 10 MHz                                | 2                     | 1 near top and 1 near bottom                |
| More than 10 MHz                           | 3                     | 1 near top, 1 near middle and 1 near bottom |

(3) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.

(4) Pre-test the EUT in all transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode,

The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

## 2.5. Measurement uncertainty

| Test Item                                                 | Uncertainty            |
|-----------------------------------------------------------|------------------------|
| Uncertainty for Conduction emission test                  | 2.44dB                 |
| Uncertainty for Radiation Emission test<br>(30MHz – 1GHz) | 3.14 dB (Polarize: V)  |
|                                                           | 3.16 dB (Polarize: H)  |
| Uncertainty for Radiation Emission test<br>(1GHz – 18GHz) | 4.27 dB (Polarize: V)  |
|                                                           | 4.51 dB (Polarize: H)  |
| Uncertainty for conducted RF Power                        | 0.63dB                 |
| Stop Transmitting Time Test                               | ±0.5%                  |
| Uncertainty for frequency error                           | 5.8 x 10 <sup>-8</sup> |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2.6. Test Peripheral List


| No. | Equipment | Manufacturer | FCC approved | Model No. | Serial No. | signal cable |
|-----|-----------|--------------|--------------|-----------|------------|--------------|
| 1   | Lap top   | lenovo       | DOC          | 7457      | 7457A82    | N/A          |

### 3. Power Line Conducted Emission Test

#### 3.1. Test equipment

| Item | Equipment            | Manufacturer | Model No.           | Serial No.   | Last Cal.  | Cal. Interval |
|------|----------------------|--------------|---------------------|--------------|------------|---------------|
| 1    | Test Receiver        | R&S          | ESCS30              | 8341151006   | 2019-05-23 | 1 Year        |
| 2    | LISN                 | R&S          | ENV216              | 3650.6550.06 | 2019-05-13 | 1 Year        |
| 3    | Pulse Limiter        | R&S          | ESH3-Z2             | 0357-8810.54 | 2019-05-13 | 1 Year        |
| 4    | RF Cable             | HUBER        | SUCOFLEX100         | 30722/4E     | 2019-05-13 | 1 Year        |
| 5    | MEASUREMENT SOFTWARE | FARAD        | EZ-EMC(VER:1.1.4.2) | N/A          | N/A        | N/A           |

#### 3.2. BLOCK DIAGRAM OF TEST SETUP

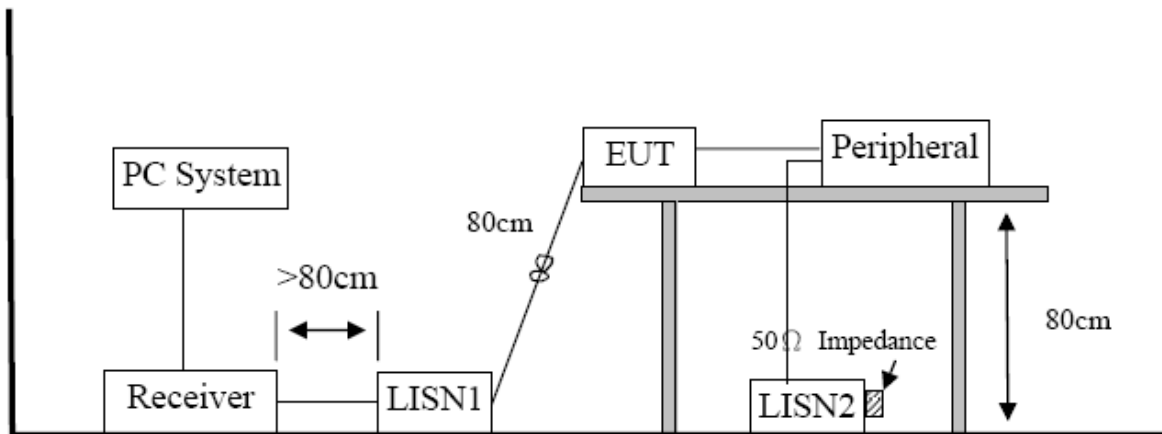

#### 3.3. Power Line Conducted Emission Limits (Class B)

| Frequency       | Quasi-Peak Level<br>dB(μV) | Average Level<br>dB(μV) |
|-----------------|----------------------------|-------------------------|
| 150kHz ~ 500kHz | 66 ~ 56*                   | 56 ~ 46*                |
| 500kHz ~ 5MHz   | 56                         | 46                      |
| 5MHz ~ 30MHz    | 60                         | 50                      |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 3.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 3.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

### 3.5. Test Result


**PASS. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "-----" means Peak detection; "-----" means Average detection


Note3: Measurement = Reading Level + Factor, Margin= Measurement-Limit

## Conducted Emission Test Result

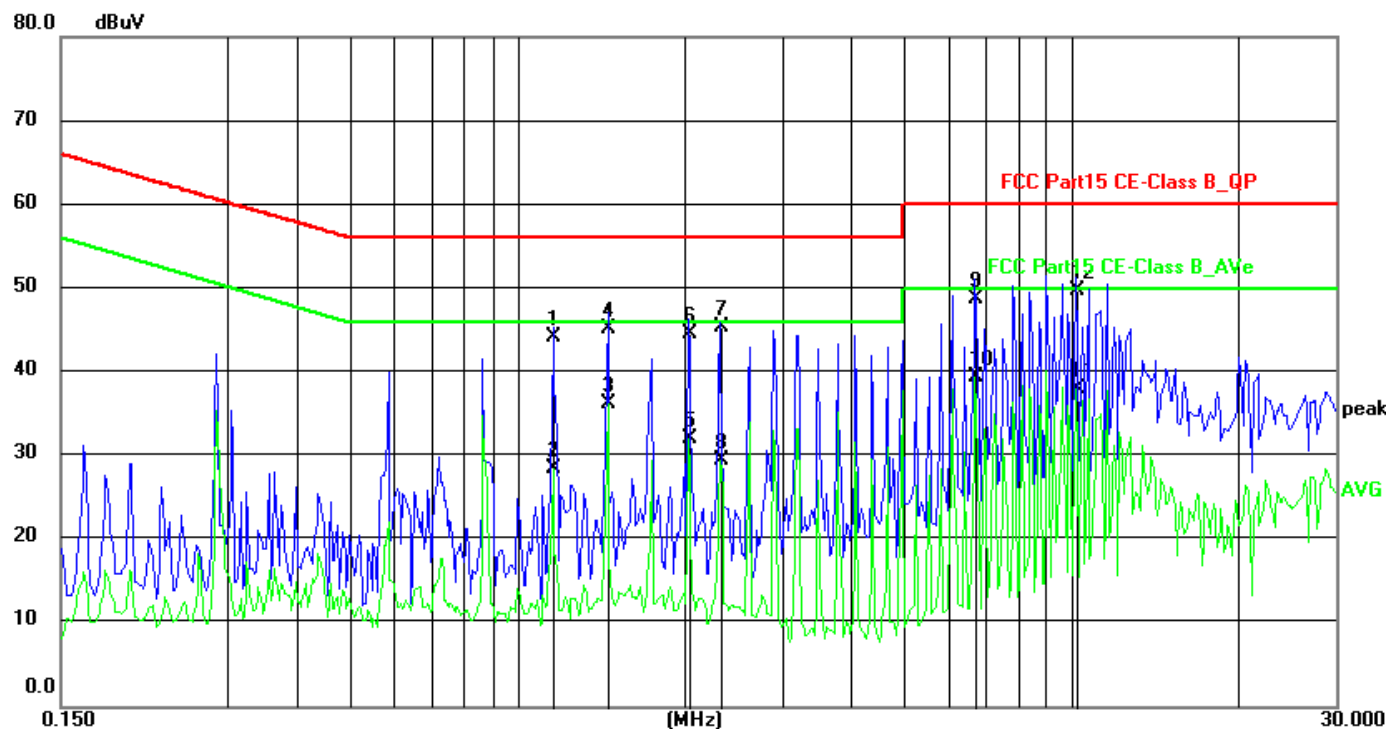

|        |                                             |                |                      |
|--------|---------------------------------------------|----------------|----------------------|
| Site:  | 844LAB                                      | Phase:L1       | Temperature(C):24(C) |
| Limit: | FCC Part15 CE-Class B_QP                    |                | Humidity(%):63%      |
| EUT:   | Groovy/ Glitter lamp with Bluetooth Speaker | Test Time:     | 2019/9/10 13:41:21   |
| M/N.:  | ITSBL-547-KBG                               | Power Rating:  | AC120/60Hz           |
| Mode:  | Tx mode                                     | Test Engineer: |                      |
| Note:  |                                             |                |                      |

| No. | Frequency (MHz) | Reading Level(dBuV) | Factor (dB) | Measure-ment(dBuV) | Limit (dBuV) | Margin (dB) | Detector | Comment |
|-----|-----------------|---------------------|-------------|--------------------|--------------|-------------|----------|---------|
| 1   | 1.1635          | 34.39               | 9.74        | 44.13              | 56.00        | -11.87      | QP       |         |
| 2   | 1.1635          | 18.73               | 9.74        | 28.47              | 46.00        | -17.53      | AVG      |         |
| 3 * | 1.4559          | 26.38               | 9.85        | 36.23              | 46.00        | -9.77       | AVG      |         |
| 4   | 1.4565          | 35.35               | 9.85        | 45.20              | 56.00        | -10.80      | QP       |         |
| 5   | 2.0375          | 22.02               | 10.05       | 32.07              | 46.00        | -13.93      | AVG      |         |
| 6   | 2.0376          | 34.58               | 10.05       | 44.63              | 56.00        | -11.37      | QP       |         |
| 7   | 2.3262          | 35.27               | 10.05       | 45.32              | 56.00        | -10.68      | QP       |         |
| 8   | 2.3262          | 19.37               | 10.05       | 29.42              | 46.00        | -16.58      | AVG      |         |
| 9   | 6.7167          | 38.61               | 10.07       | 48.68              | 60.00        | -11.32      | QP       |         |
| 10  | 6.7167          | 29.26               | 10.07       | 39.33              | 50.00        | -10.67      | AVG      |         |
| 11  | 10.1951         | 27.92               | 10.08       | 38.00              | 50.00        | -12.00      | AVG      |         |
| 12  | 10.1955         | 39.74               | 10.08       | 49.82              | 60.00        | -10.18      | QP       |         |

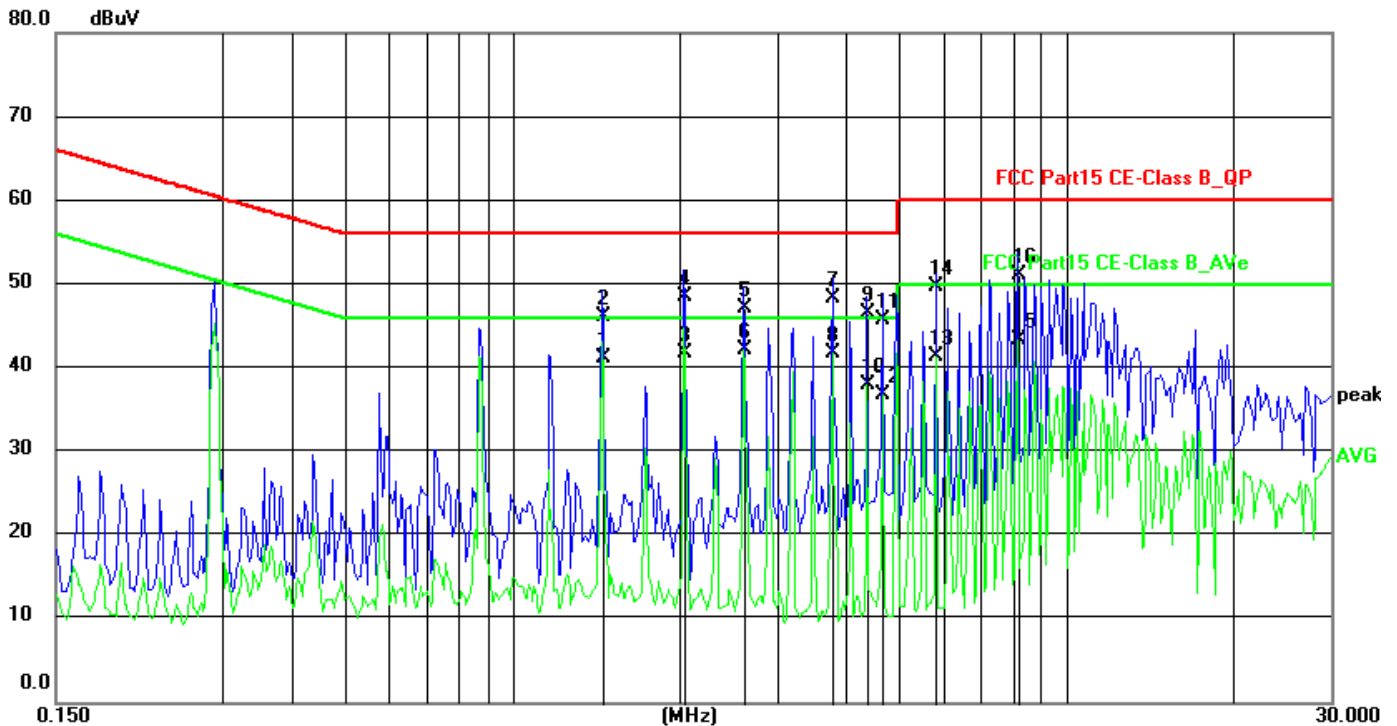

|        |                                             |                |            |                 |       |
|--------|---------------------------------------------|----------------|------------|-----------------|-------|
| Site:  | 844LAB                                      | Phase:         | N          | Temperature(C): | 24(C) |
| Limit: | FCC Part15 CE-Class B_QP                    | Test Time:     |            | Humidity(%):    | 63%   |
| EUT:   | Groovy/ Glitter lamp with Bluetooth Speaker | Power Rating:  | AC120/60Hz |                 |       |
| M/N.:  | ITSBL-547-KBG                               | Test Engineer: |            |                 |       |
| Mode:  | Tx mode                                     |                |            |                 |       |
| Note:  |                                             |                |            |                 |       |

| No. | Frequency (MHz) | Reading Level(dBuV) | Factor (dB) | Measure-ment(dBuV) | Limit (dBuV) | Margin (dB) | Detector | Comment |
|-----|-----------------|---------------------|-------------|--------------------|--------------|-------------|----------|---------|
| 1   | 1.4522          | 31.42               | 9.85        | 41.27              | 46.00        | -4.73       | AVG      |         |
| 2   | 1.4526          | 36.40               | 9.85        | 46.25              | 56.00        | -9.75       | QP       |         |
| 3   | 2.0375          | 31.65               | 10.05       | 41.70              | 46.00        | -4.30       | AVG      |         |
| 4   | 2.0376          | 38.40               | 10.05       | 48.45              | 56.00        | -7.55       | QP       |         |
| 5   | 2.6187          | 37.07               | 10.05       | 47.12              | 56.00        | -8.88       | QP       |         |
| 6 * | 2.6187          | 32.17               | 10.05       | 42.22              | 46.00        | -3.78       | AVG      |         |
| 7   | 3.7839          | 38.36               | 10.05       | 48.41              | 56.00        | -7.59       | QP       |         |
| 8   | 3.7839          | 31.73               | 10.05       | 41.78              | 46.00        | -4.22       | AVG      |         |
| 9   | 4.3727          | 36.47               | 10.05       | 46.52              | 56.00        | -9.48       | QP       |         |
| 10  | 4.3727          | 27.99               | 10.05       | 38.04              | 46.00        | -7.96       | AVG      |         |
| 11  | 4.6614          | 35.62               | 10.05       | 45.67              | 56.00        | -10.33      | QP       |         |
| 12  | 4.6614          | 26.70               | 10.05       | 36.75              | 46.00        | -9.25       | AVG      |         |
| 13  | 5.8234          | 31.24               | 10.06       | 41.30              | 50.00        | -8.70       | AVG      |         |
| 14  | 5.8236          | 39.76               | 10.06       | 49.82              | 60.00        | -10.18      | QP       |         |
| 15  | 8.1516          | 33.31               | 10.07       | 43.38              | 50.00        | -6.62       | AVG      |         |
| 16  | 8.1519          | 40.95               | 10.07       | 51.02              | 60.00        | -8.98       | QP       |         |


## 4. Radiated emission test

### 4.1. Test equipment


| Item | Equipment                  | Manufacturer | Model No.               | Serial No.                     | Last Cal.  | Cal. Interval |
|------|----------------------------|--------------|-------------------------|--------------------------------|------------|---------------|
| 1    | EMI Test Receiver          | R&S          | ESR                     | 7250-30406<br>7528             | 2019-04-30 | 1Year         |
| 2    | Trilog Broadband Antenna   | Schwarzbeck  | VULB9168                | 00969                          | 2019-06-14 | 2 Year        |
| 3    | Pre-amplifier              | R&S          | 8447F                   | 3113A04553                     | 2019-05-13 | 1Year         |
| 4    | Active Loop antenna        | Schwarzbeck  | FMZB-1519               | 1519-038                       | 2019-05-23 | 1Year         |
| 5    | Horn antenna               | Schwarzbeck  | BBHA9120D               | 453                            | 2019-05-23 | 2Year         |
| 6    | Double Ridged Horn Antenna | A.H. System  | SAS-574                 | 584                            | 2019-05-23 | 1Year         |
| 7    | Pre-amplifier              | R&S          | SCU18                   | 105326                         | 2019-05-23 | 1Year         |
| 8    | RF Cable                   | GORE         | OSQ01Q010<br>78.7       | SN1545847<br>3                 | 2019-05-23 | 1Year         |
| 9    | RF Cable                   | GORE         | OSQ01Q010<br>78.7       | SN1545847<br>4                 | 2019/5/14  | 1Year         |
| 10   | RF Cable                   | ESCO         | ETS-LINGR<br>EN         | RFC-SMS-1<br>00-SMS-340<br>-IN | 2019-05-23 | 1Year         |
| 11   | Measurement software       | Farad        | EZ-EMC(VE<br>R:1.1.4.2) | N/A                            | N/A        | N/A           |

## 4.2. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz to 30MHz:

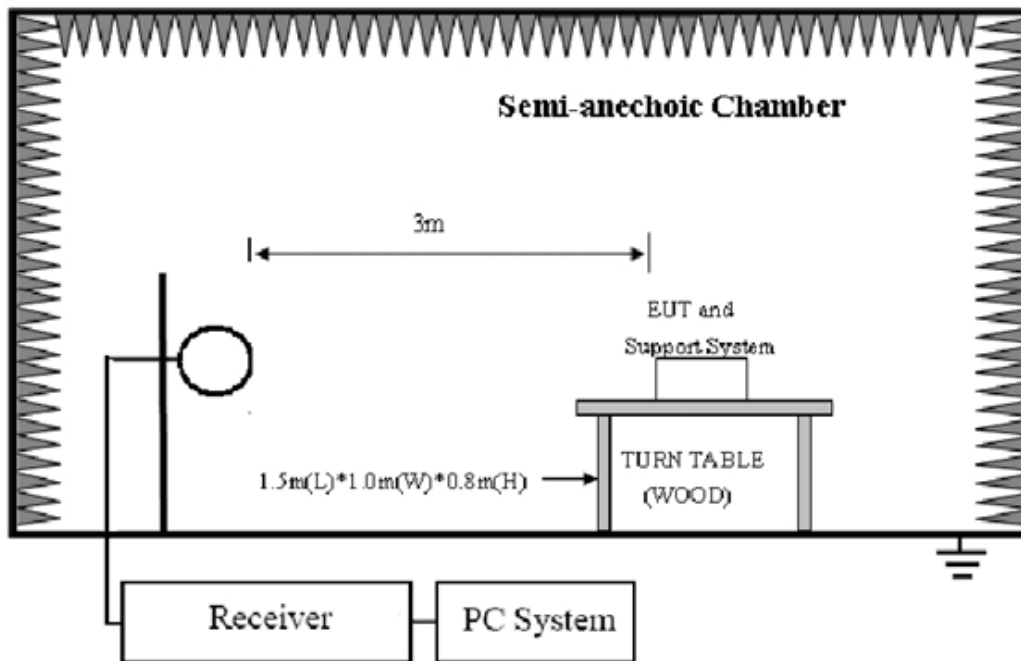

In 3m Anechoic Chamber Test Setup Diagram for 30MHz to 1GHz:

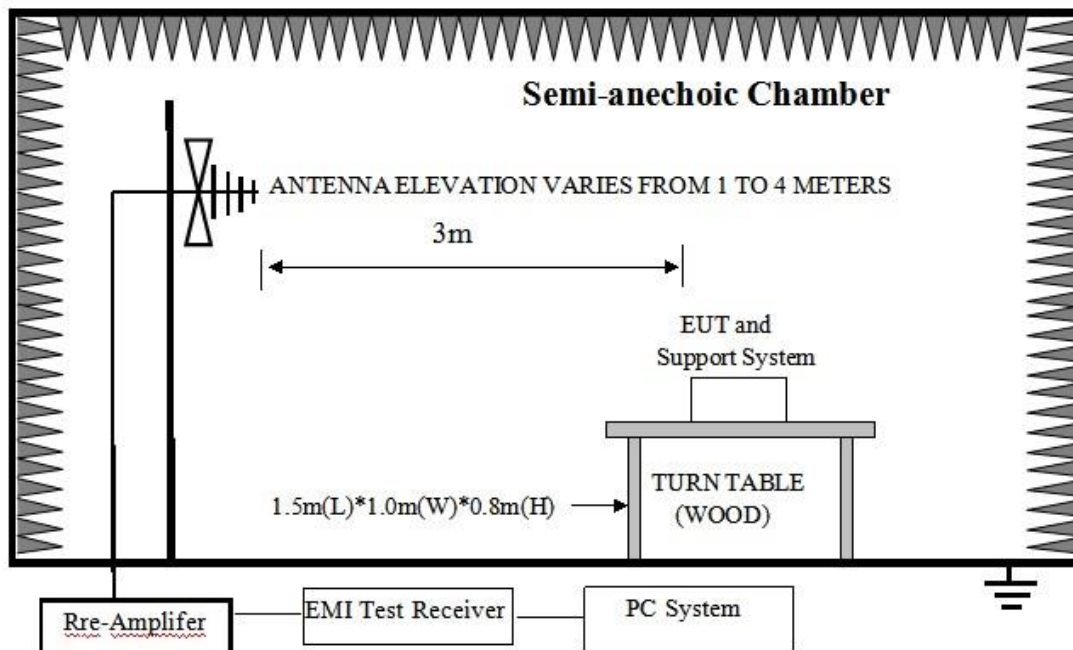

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz:

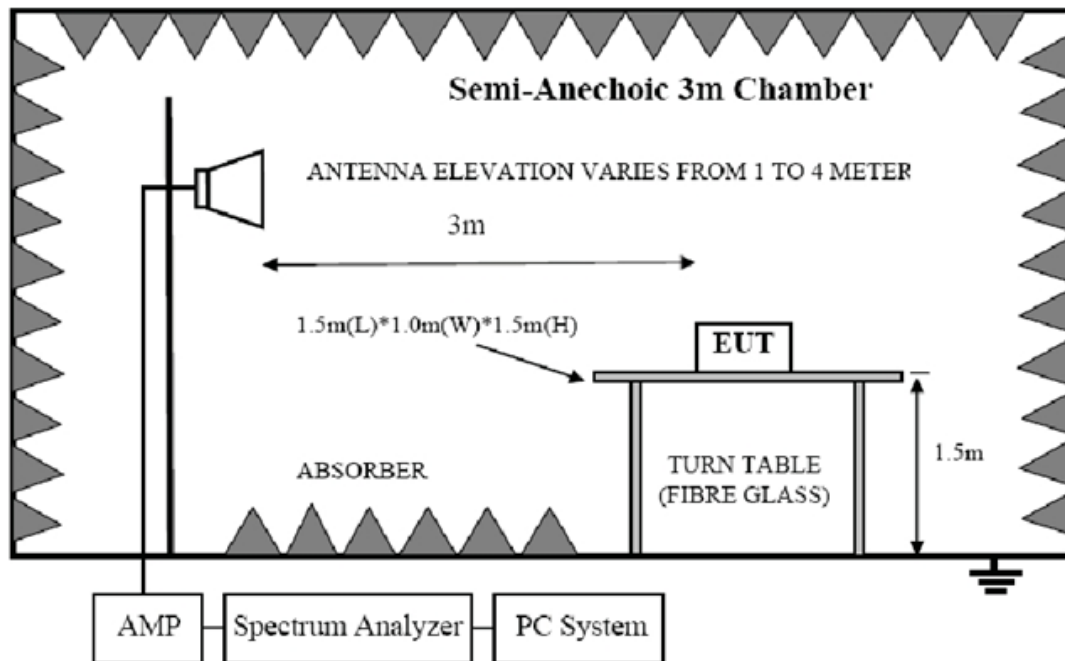

### 4.3. Limit

FCC 15.205 Restricted frequency band:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |

FCC 15.109 Limit

| Frequency (MHz) | Distance (Meters) | Field Strengths Limits dB(μV)/m |
|-----------------|-------------------|---------------------------------|
| 30--88          | 3                 | 40.0                            |
| 88--216         | 3                 | 43.5                            |
| 216--960        | 3                 | 46.0                            |
| 960--1000       | 3                 | 54.0                            |
| Above 1GHz      | 3                 | Peak: 74.0                      |
|                 | 3                 | Average: 54.0                   |

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

(3) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(4) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\log(30\text{m}/3\text{m})$$

(5) All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.109, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.109 limits.

#### 4.4. Test Procedure

##### Procedure of Preliminary Test

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 4.2 of this report.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

EUT height should be 0.8m for below 1GHz and 1.5m for above 1GHz at ground with absorbers.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 18GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The X, Y, Z three axial are tested and the report only the worst case.

The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW:

| Frequency band | RBW    |
|----------------|--------|
| 9KHz-150KHz    | 200Hz  |
| 150KHz-30MHz   | 9KHz   |
| 30MHz-1GHz     | 120KHz |

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure.

#### 4.5. Test result

##### **PASS. (See below detailed test result)**

All the emissions except fundamental emission from 9 KHz to 40GHz were comply with FCC PART 15.109 limits limit.


Note1: According exploratory test no any obvious emission were detected from 9KHz to 30MHz and

18GHz to 40GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.


Note3: Level = Reading Level + Factor, Margin= Level-Limit

## Radiated Emission Test Result

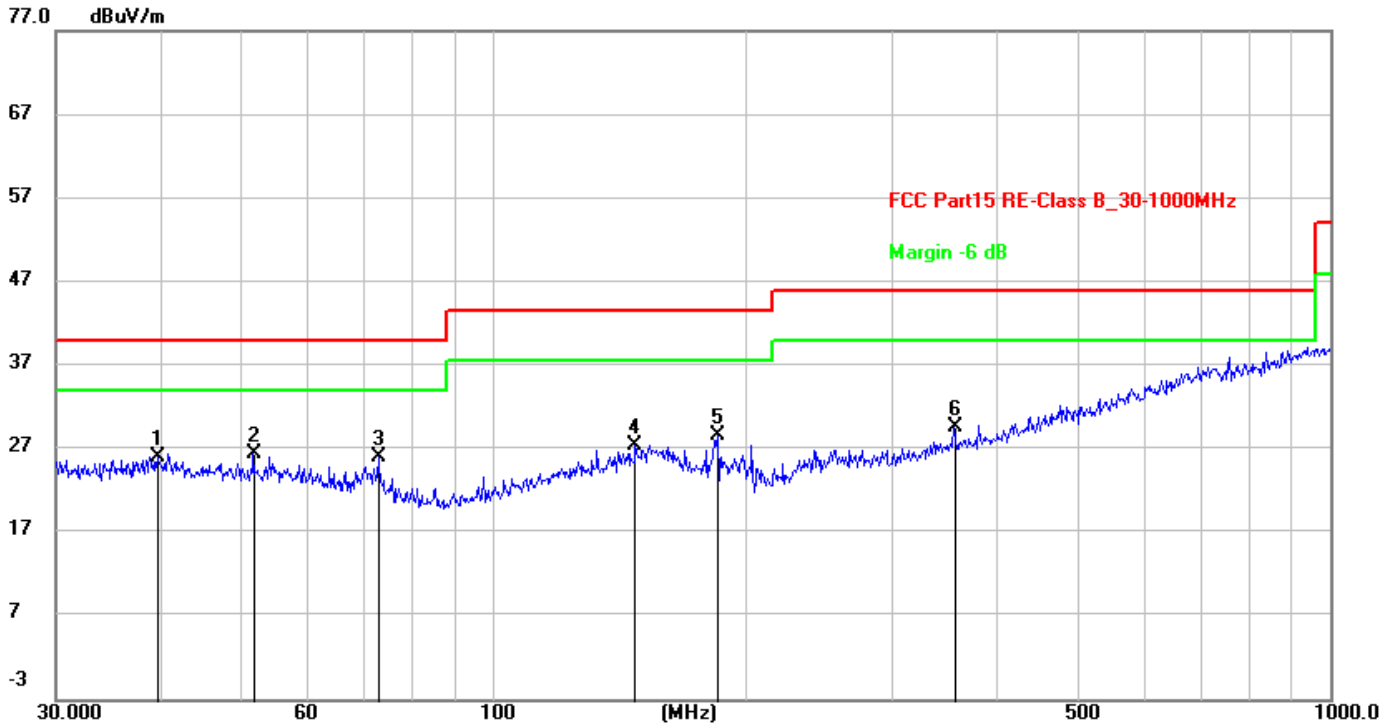

|        |                                             |                     |                      |
|--------|---------------------------------------------|---------------------|----------------------|
| Site:  | 966LAB                                      | Antenna::Horizontal | Temperature(C):24(C) |
| Limit: | FCC Part15 RE _30~1000MHz                   |                     | Humidity(%):60%      |
| EUT:   | Groovy/ Glitter lamp with Bluetooth Speaker | Test Time:          | 2019/9/10 13:55:35   |
| M/N.:  | ITSBL-547-KBG                               | Power Rating:       | AC 120V/60Hz         |
| Mode:  | Tx mode                                     | Test Engineer:      |                      |
| Note:  |                                             |                     |                      |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|--------|
| 1   | 39.7146         | 11.37          | 14.79         | 26.16          | 40.00          | -13.84      | peak | 100         | 45            |        |
| 2   | 51.6616         | 12.27          | 14.22         | 26.49          | 40.00          | -13.51      | peak | 200         | 356           |        |
| *   |                 |                |               |                |                |             |      |             |               |        |
| 3   | 72.8466         | 14.79          | 11.34         | 26.13          | 40.00          | -13.87      | peak | 100         | 54            |        |
| 4   | 147.9214        | 12.22          | 15.30         | 27.52          | 43.50          | -15.98      | peak | 200         | 246           |        |
| 5   | 185.7882        | 16.33          | 12.38         | 28.71          | 43.50          | -14.79      | peak | 100         | 104           |        |
| 6   | 355.4273        | 13.96          | 15.77         | 29.73          | 46.00          | -16.27      | peak | 100         | 356           |        |

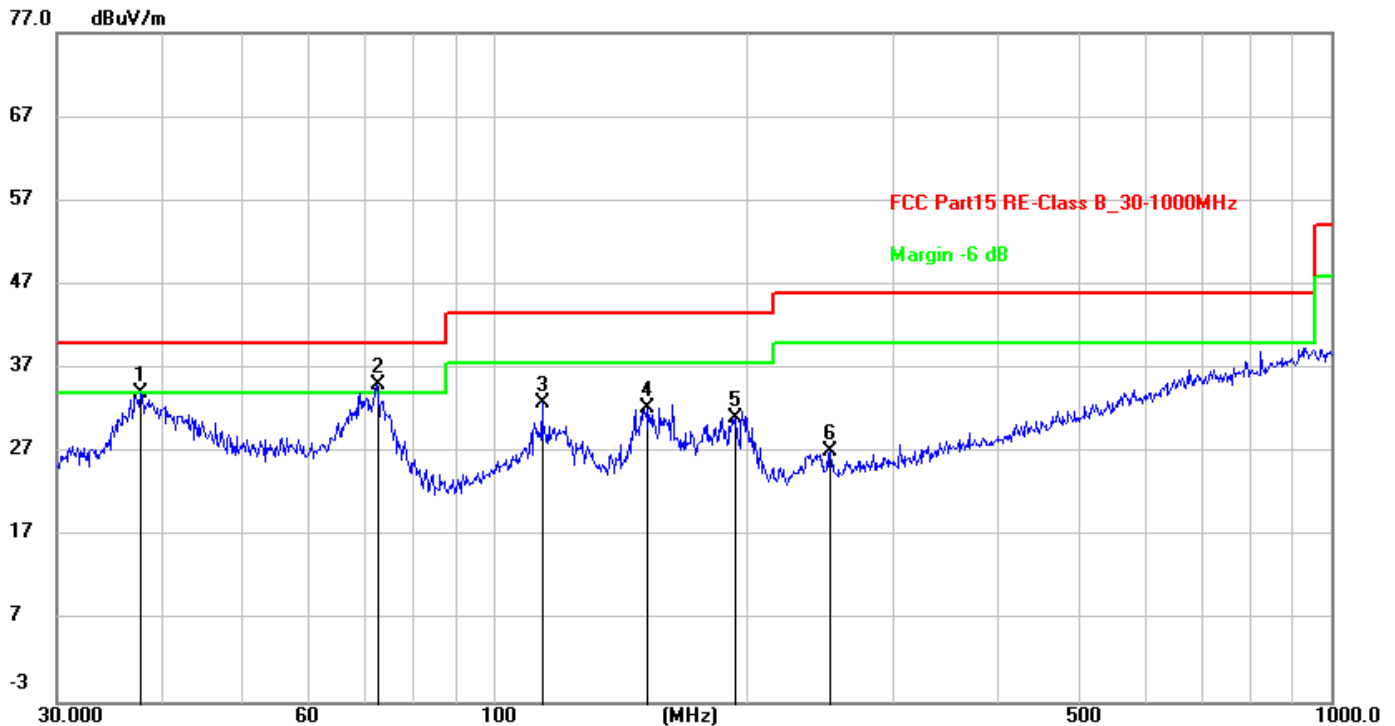

|        |                                             |                   |                      |
|--------|---------------------------------------------|-------------------|----------------------|
| Site:  | 966LAB                                      | Antenna::Vertical | Temperature(C):24(C) |
| Limit: | FCC Part15 RE_30-1000MHz                    |                   | Humidity(%):60%      |
| EUT:   | Groovy/ Glitter lamp with Bluetooth Speaker | Test Time:        | 2019/9/10 13:58:36   |
| M/N.:  | ITSBL-547-KBG                               | Power Rating:     | AC 120V/60Hz         |
| Mode:  | Tx mode                                     | Test Engineer:    |                      |
| Note:  |                                             |                   |                      |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|--------|
| 1   | 37.8121         | 19.41          | 14.52         | 33.93          | 40.00          | -6.07       | peak | 200         | 278           |        |
| 2   | 72.3376         | 23.57          | 11.41         | 34.98          | 40.00          | -5.02       | peak | 100         | 4             |        |
| *   |                 |                |               |                |                |             |      |             |               |        |
| 3   | 114.1138        | 20.05          | 12.74         | 32.79          | 43.50          | -10.71      | peak | 100         | 294           |        |
| 4   | 152.1297        | 16.68          | 15.46         | 32.14          | 43.50          | -11.36      | peak | 100         | 89            |        |
| 5   | 194.4534        | 19.33          | 11.64         | 30.97          | 43.50          | -12.53      | peak | 100         | 140           |        |
| 6   | 252.0627        | 13.82          | 13.23         | 27.05          | 46.00          | -18.95      | peak | 100         | 205           |        |

|                      |                                                                                            |                    |               |
|----------------------|--------------------------------------------------------------------------------------------|--------------------|---------------|
| EUT:                 | Groovy/ Glitter lamp with Bluetooth Speaker                                                | Model Name :       | ITSBL-547-KBG |
| Temperature:         | 25 °C                                                                                      | Test Engineer      | Jack          |
| Pressure:            | 1010 hPa                                                                                   | Relative Humidity: | 60%           |
| Test Mode :          | 3Mbps (worst)                                                                              | Test Voltage :     | AC 120V, 60Hz |
| Measurement Distance | 3 m                                                                                        | Frequency Range    | 1GHz to 25GHz |
| RBW/VBW              | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average, PK detector is for them all. |                    |               |

(a) Antenna polarization: Horizontal

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-----------|---------------|
| 2390.00         | 51.42                | 4.68                | 56.10                  | 74.00          | -17.90    | peak          |
| 2390.00         | 35.74                | 4.68                | 40.42                  | 54.00          | -13.58    | AVG           |
| 4804.00         | 50.01                | 5.06                | 55.07                  | 74.00          | -18.93    | peak          |
| 4804.00         | 38.82                | 5.06                | 43.88                  | 54.00          | -10.12    | AVG           |
| 7206.00         | 44.67                | 7.03                | 51.70                  | 74.00          | -22.30    | peak          |
| 7206.00         | 33.17                | 7.03                | 40.20                  | 54.00          | -13.80    | AVG           |

(b) Antenna polarization: Vertical

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-----------|---------------|
| 2390.00         | 48.82                | 4.68                | 53.50                  | 74.00          | -20.50    | peak          |
| 2390.00         | 36.04                | 4.68                | 40.72                  | 54.00          | -13.28    | AVG           |
| 4804.00         | 50.05                | 5.06                | 55.11                  | 74.00          | -18.89    | peak          |
| 4804.00         | 39.77                | 5.06                | 44.83                  | 54.00          | -9.17     | AVG           |
| 7206.00         | 45.15                | 7.03                | 52.18                  | 74.00          | -21.82    | peak          |
| 7206.00         | 33.29                | 7.03                | 40.32                  | 54.00          | -13.68    | AVG           |

Note:

**8~25GHz at least have 20dB margin. No recording in the test report.**

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Lowest Channel: 2402 MHz

Data rate: 3Mbps

## (a) Antenna polarization: Horizontal

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-----------|---------------|
| 4882.00         | 51.20                | 5.14                | 56.34                  | 74.00          | -17.66    | peak          |
| 4882.00         | 40.90                | 5.14                | 46.04                  | 54.00          | -7.96     | AVG           |
| 7323.00         | 43.76                | 7.54                | 51.30                  | 74.00          | -22.70    | peak          |
| 7323.00         | 31.96                | 7.54                | 39.50                  | 54.00          | -14.50    | AVG           |

## (b) Antenna polarization: Vertical

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-----------|---------------|
| 4882.00         | 50.02                | 5.14                | 55.16                  | 74.00          | -18.84    | peak          |
| 4882.00         | 39.61                | 5.14                | 44.75                  | 54.00          | -9.25     | AVG           |
| 7323.00         | 44.63                | 7.54                | 52.17                  | 74.00          | -21.83    | peak          |
| 7323.00         | 33.03                | 7.54                | 40.57                  | 54.00          | -13.43    | AVG           |

## Note:

**8~25GHz at least have 20dB margin. No recording in the test report.**

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Middle Channel: 2441 MHz

Data rate: 3Mbps

## (a) Antenna polarization: Horizontal

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-----------|---------------|
| 2483.50         | 50.39                | 4.71                | 55.10                  | 74.00          | -18.90    | peak          |
| 2483.50         | 38.27                | 4.71                | 42.98                  | 54.00          | -11.02    | AVG           |
| 4960.00         | 49.67                | 5.22                | 54.89                  | 74.00          | -19.11    | peak          |
| 4960.00         | 38.50                | 5.22                | 43.72                  | 54.00          | -10.28    | AVG           |
| 7440.00         | 43.55                | 8.06                | 51.61                  | 74.00          | -22.39    | peak          |
| 7440.00         | 32.54                | 8.06                | 40.60                  | 54.00          | -13.40    | AVG           |

## (b) Antenna polarization: Vertical

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-----------|---------------|
| 2483.50         | 51.49                | 4.71                | 56.20                  | 74.00          | -17.80    | peak          |
| 2483.50         | 40.82                | 4.71                | 45.53                  | 54.00          | -8.47     | AVG           |
| 4960.00         | 49.76                | 5.22                | 54.98                  | 74.00          | -19.02    | peak          |
| 4960.00         | 38.48                | 5.22                | 43.70                  | 54.00          | -10.30    | AVG           |
| 7440.00         | 43.56                | 8.06                | 51.62                  | 74.00          | -22.38    | peak          |
| 7440.00         | 32.66                | 8.06                | 40.72                  | 54.00          | -13.28    | AVG           |

Note:

**8~25GHz at least have 20dB margin. No recording in the test report.**

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Highest channel: 2480 MHz

Data rate: 3Mbps

## 5. Maximum Peak Output Power

### 5.1. Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

15.247(b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 5.2. Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW, Sweep = auto  
Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. Also shall be performed at different modes of operation.

### 5.3. Deviation from standard

No deviation.


### 5.4. Test setup




## 5.5. TEST RESULTS

| Condition | Mode  | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | 1-DH1 | 2402            | Ant 1   | -6.403                | 0                | -6.403            | 21          | Pass    |
| NVNT      | 1-DH1 | 2441            | Ant 1   | -6.605                | 0                | -6.605            | 21          | Pass    |
| NVNT      | 1-DH1 | 2480            | Ant 1   | -5.737                | 0                | -5.737            | 21          | Pass    |


Power NVNT 1-DH1 2402MHz Ant1

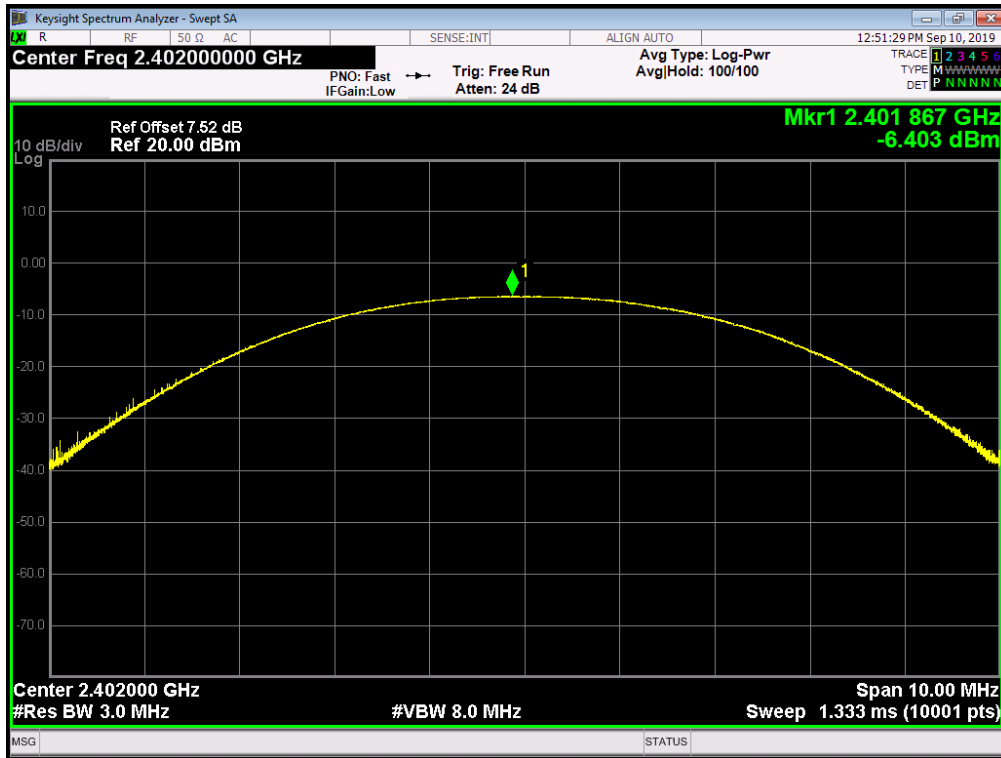

Power NVNT 1-DH1 2441MHz Ant1

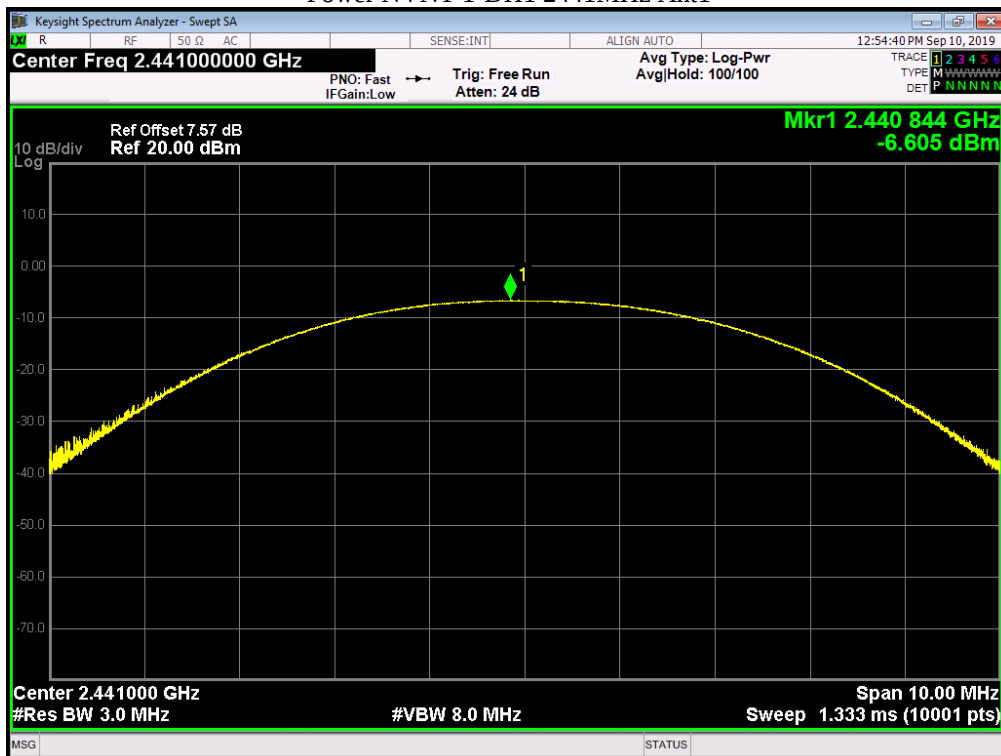


Power NVNT 1-DH1 2480MHz Ant1

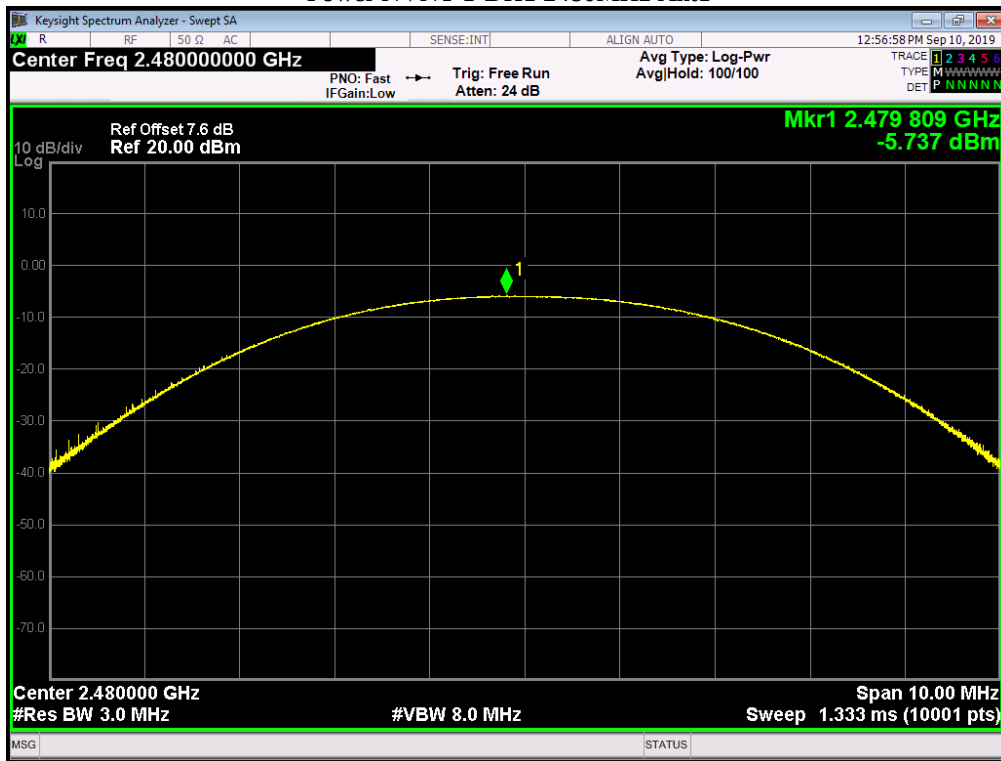


| Condition | Mode  | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | 2-DH3 | 2402            | Ant 1   | -5.49                 | 0                | -5.49             | 21          | Pass    |
| NVNT      | 2-DH3 | 2441            | Ant 1   | -5.963                | 0                | -5.963            | 21          | Pass    |
| NVNT      | 2-DH3 | 2480            | Ant 1   | -5.152                | 0                | -5.152            | 21          | Pass    |


Power NVNT 2-DH3 2402MHz Ant1

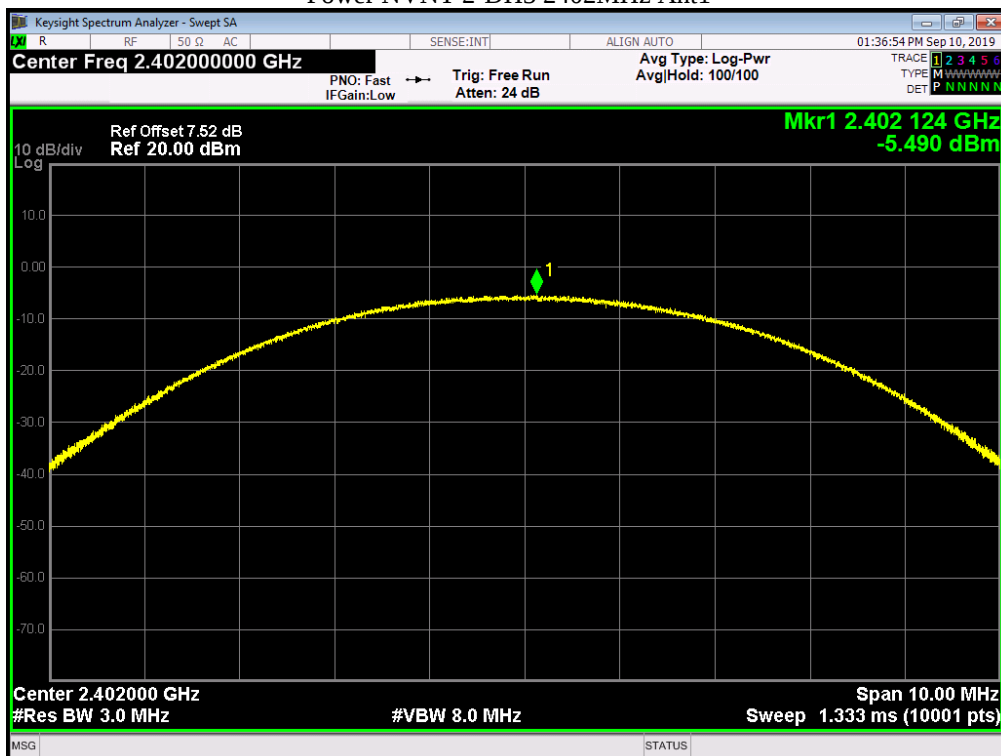

Power NVNT 2-DH3 2441MHz Ant1

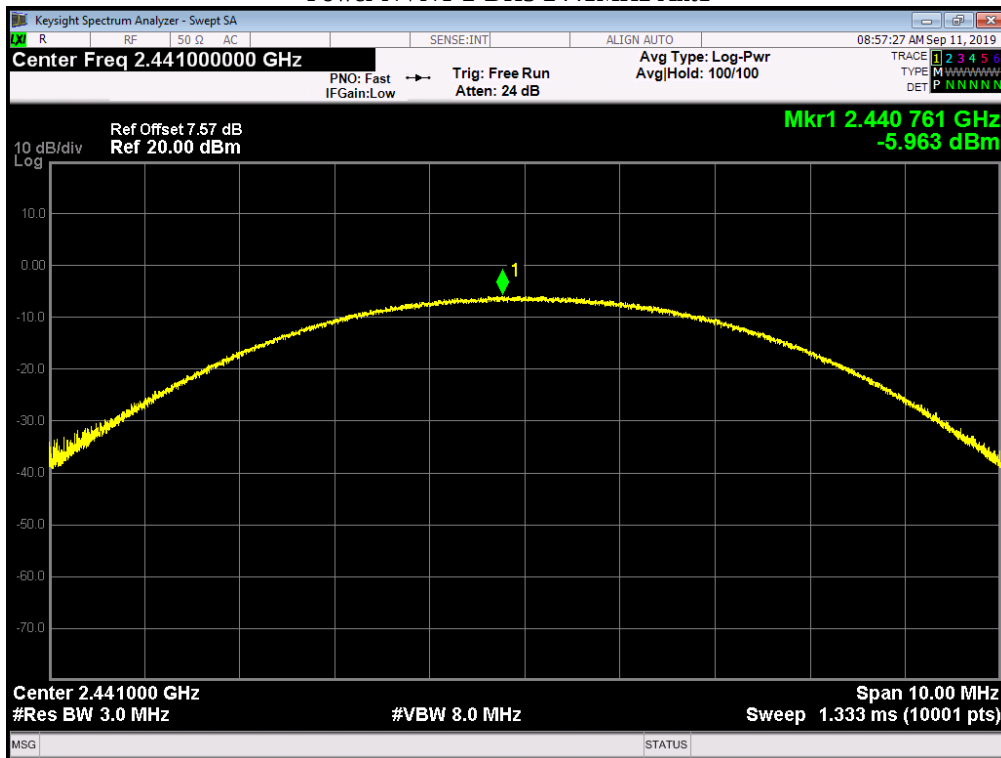


Power NVNT 2-DH3 2480MHz Ant1

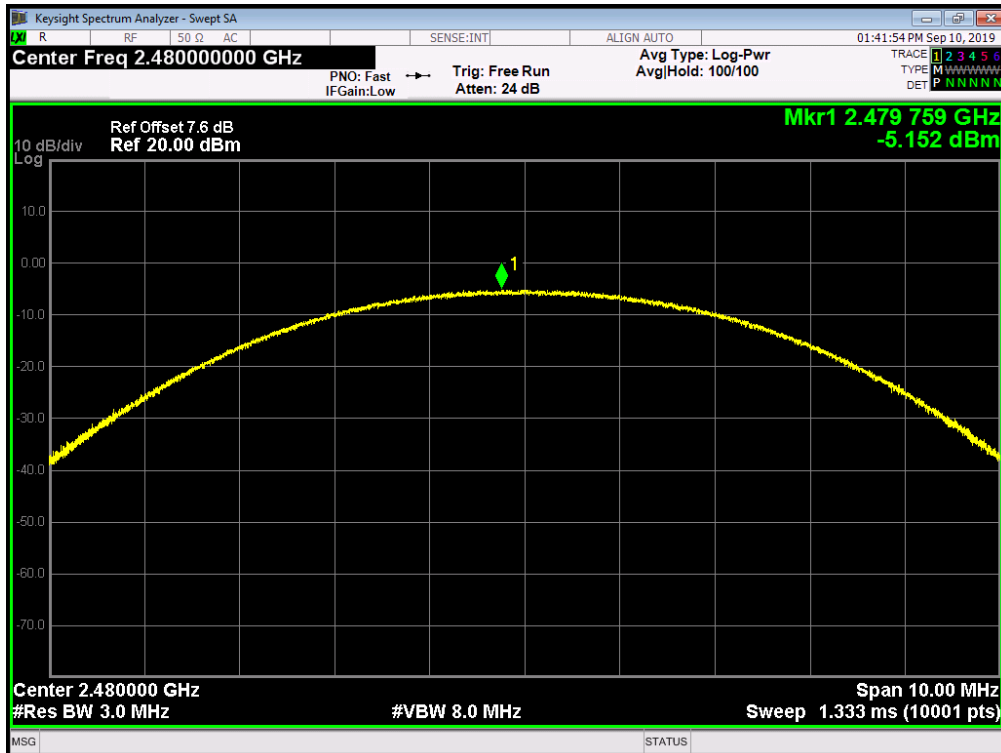


| Condition | Mode  | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|-------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | 3-DH5 | 2402            | Ant 1   | -4.789                | 0                | -4.789            | 21          | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant 1   | -5.211                | 0                | -5.211            | 21          | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant 1   | -4.559                | 0                | -4.559            | 21          | Pass    |


Power NVNT 3-DH5 2402MHz Ant1

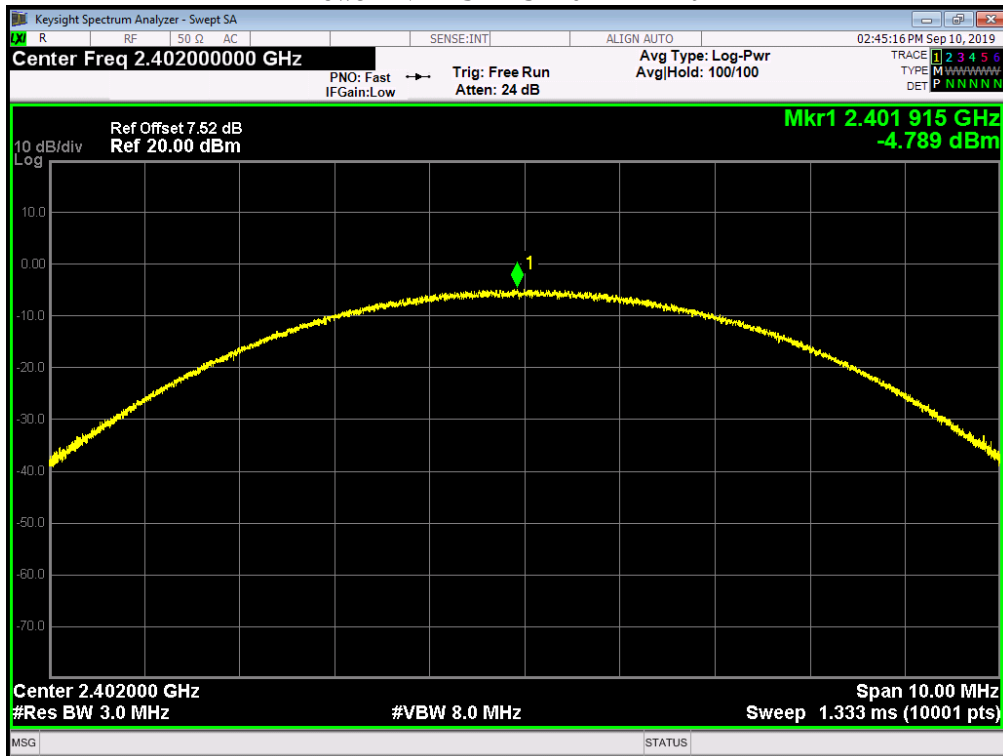

Power NVNT 3-DH5 2441MHz Ant1

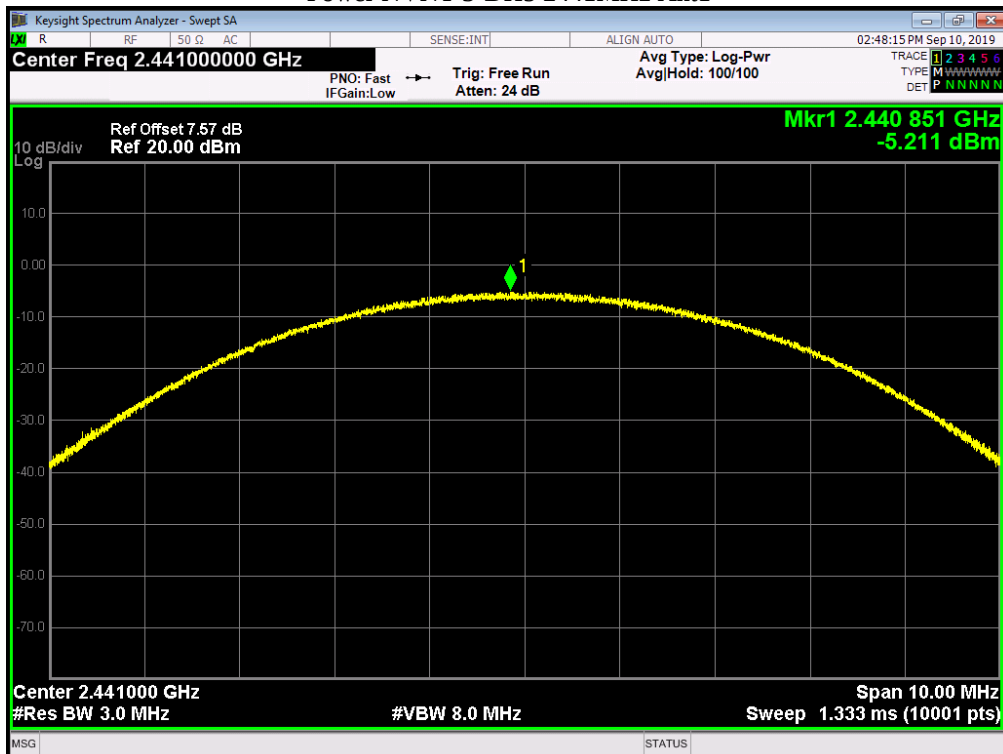

Power NVNT 3-DH5 2480MHz Ant1

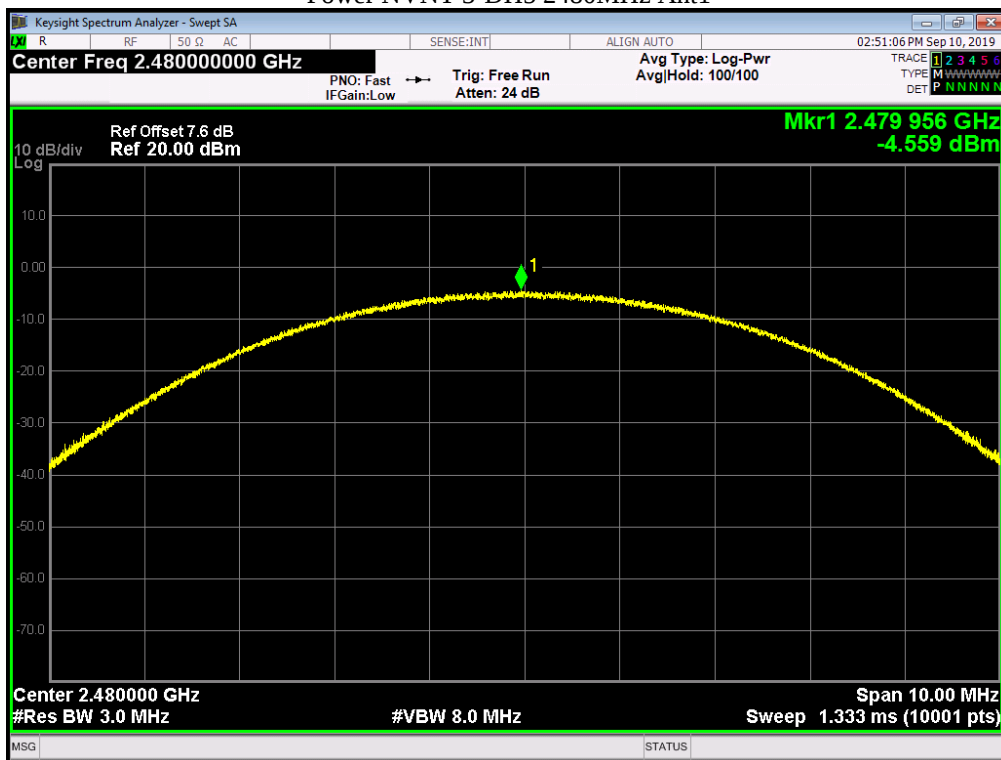

Note: All the modes (1-DH1, 1-DH3,1-DH5,2-DH1,2-DH3,2-DH5,3-DH1,3-DH3,3-DH5) had been test, but only the worst data (1-DH1,2-DH3,3-DH5) record in the report.

## 6. BANDWIDTH TEST

### 6.1. Applied procedures / Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.


### 6.2. Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak  
Trace = max hold

### 6.3. Deviation from standard

No deviation.


### 6.4. Test setup

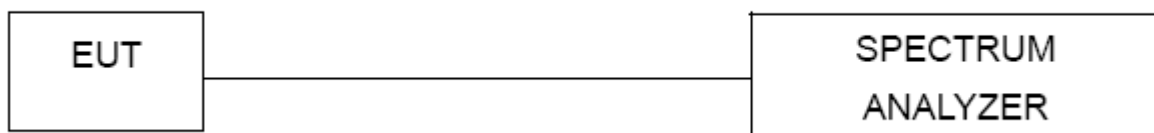


### 6.5. Test results

| Condition | Mode  | Frequency (MHz) | Antenna | 99% OBW (MHz) | -20 dB Bandwidth (MHz) | Limit -20 dB Bandwidth (MHz) | Verdict |
|-----------|-------|-----------------|---------|---------------|------------------------|------------------------------|---------|
| NVNT      | 1-DH1 | 2402            | Ant 1   | 0.8076        | 0.8667                 | 0                            | Pass    |
| NVNT      | 1-DH1 | 2441            | Ant 1   | 0.819         | 0.8684                 | 0                            | Pass    |
| NVNT      | 1-DH1 | 2480            | Ant 1   | 0.8108        | 0.8554                 | 0                            | Pass    |


OBW NVNT 1-DH1 2402MHz Ant1

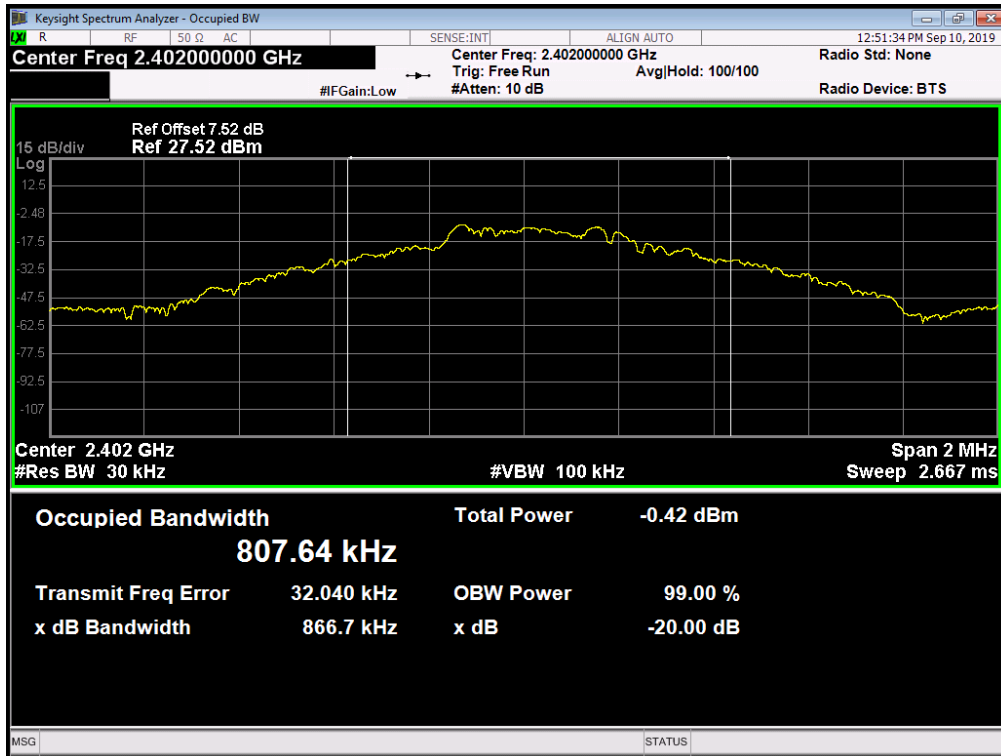

OBW NVNT 1-DH1 2441MHz Ant1

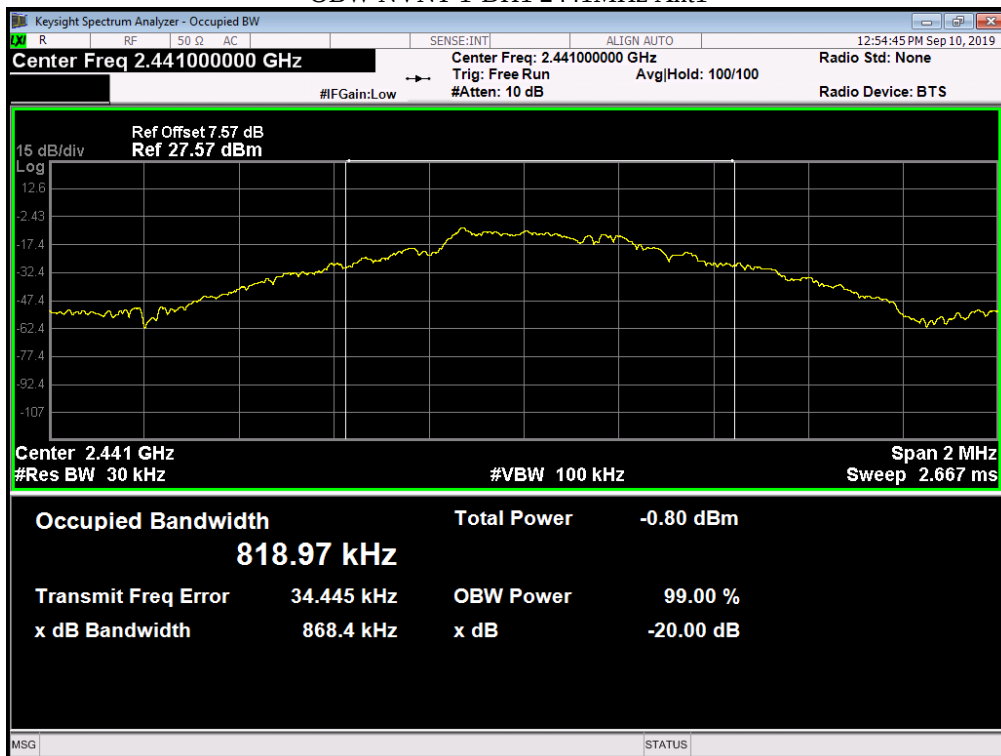


OBW NVNT 1-DH1 2480MHz Ant1

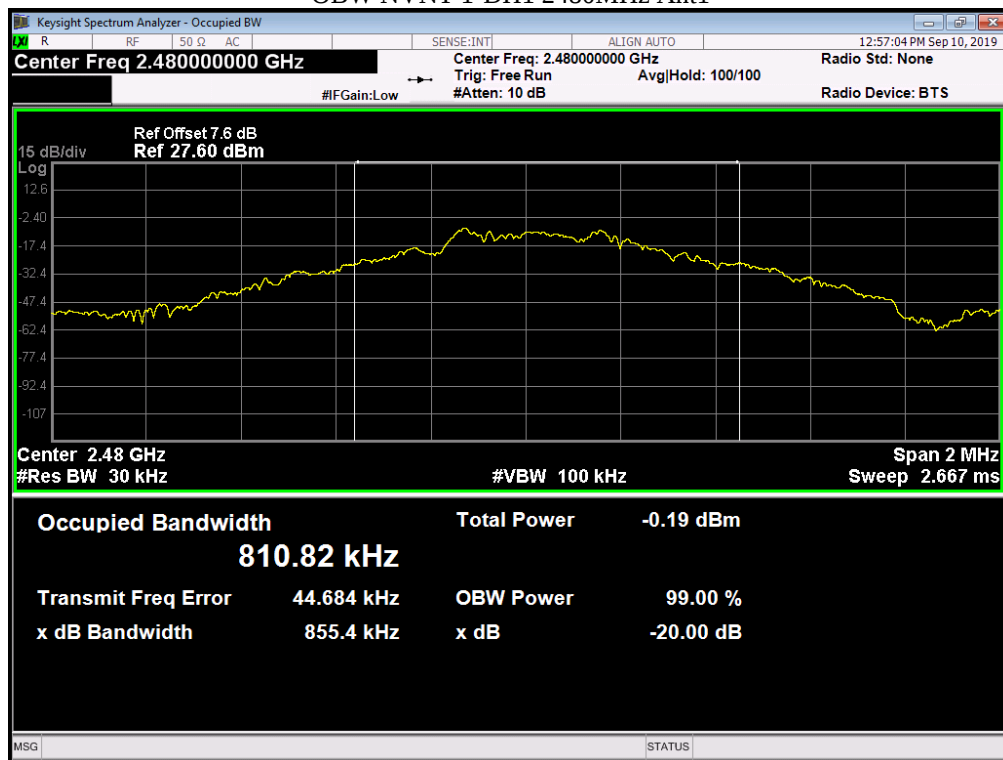


| Condition | Mode  | Frequency (MHz) | Antenna | 99% OBW (MHz) | -20 dB Bandwidth (MHz) | Limit -20 dB Bandwidth (MHz) | Verdict |
|-----------|-------|-----------------|---------|---------------|------------------------|------------------------------|---------|
| NVNT      | 2-DH3 | 2402            | Ant 1   | 1.1612        | 1.273                  | 0                            | Pass    |
| NVNT      | 2-DH3 | 2441            | Ant 1   | 1.1682        | 1.275                  | 0                            | Pass    |
| NVNT      | 2-DH3 | 2480            | Ant 1   | 1.1626        | 1.2725                 | 0                            | Pass    |


OBW NVNT 2-DH3 2402MHz Ant1

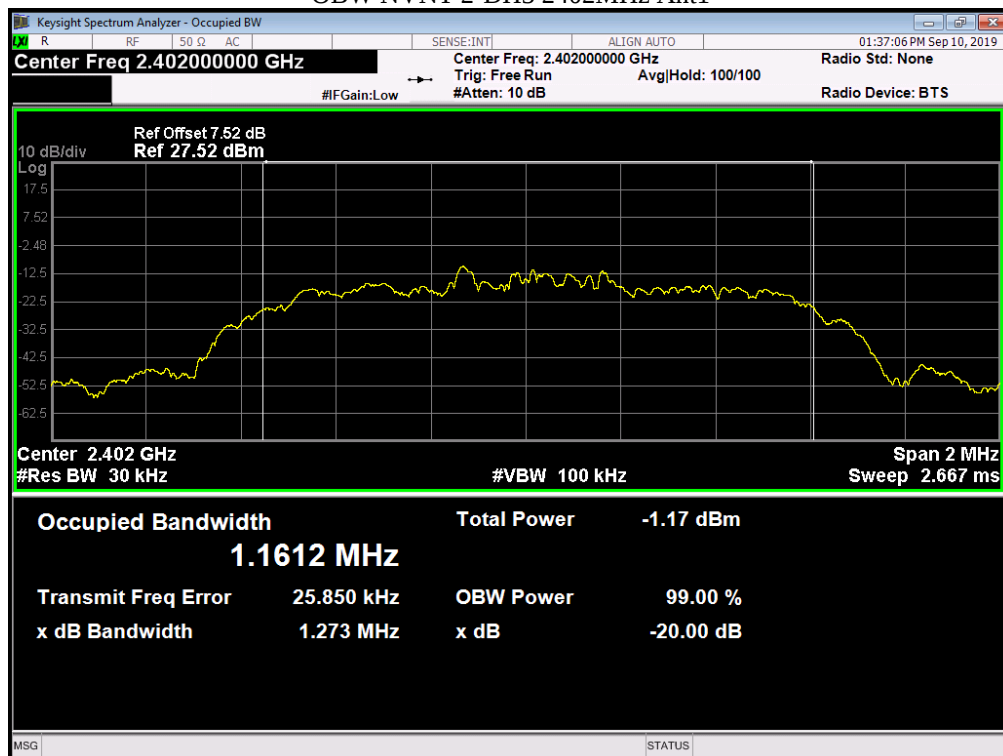

OBW NVNT 2-DH3 2441MHz Ant1

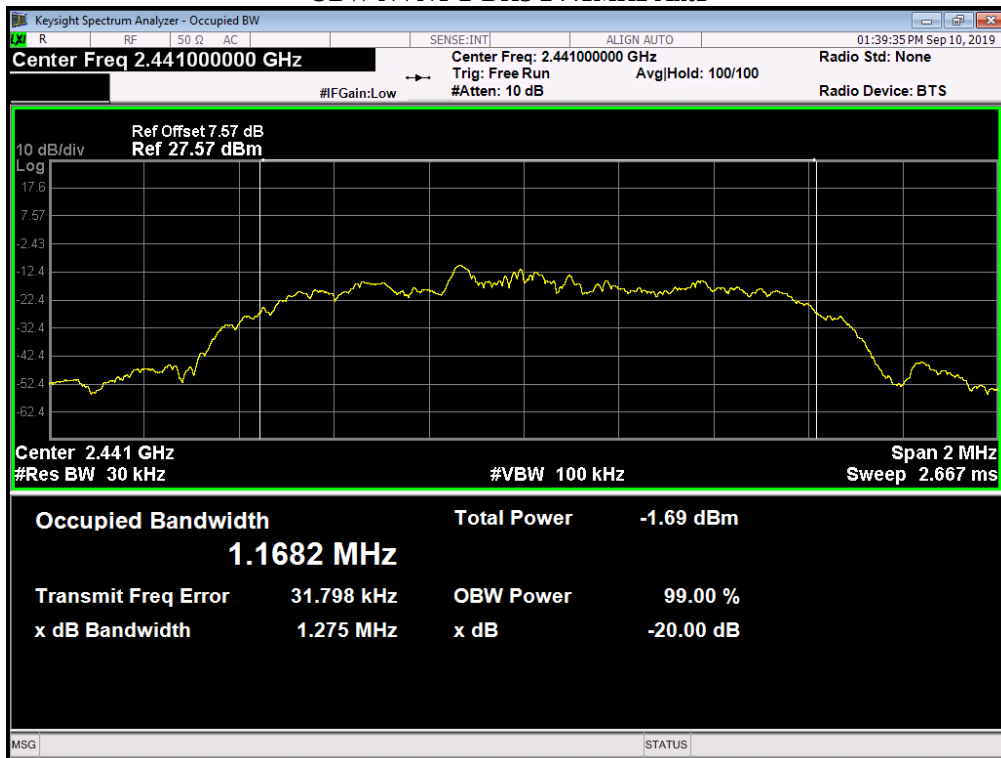


OBW NVNT 2-DH3 2480MHz Ant1

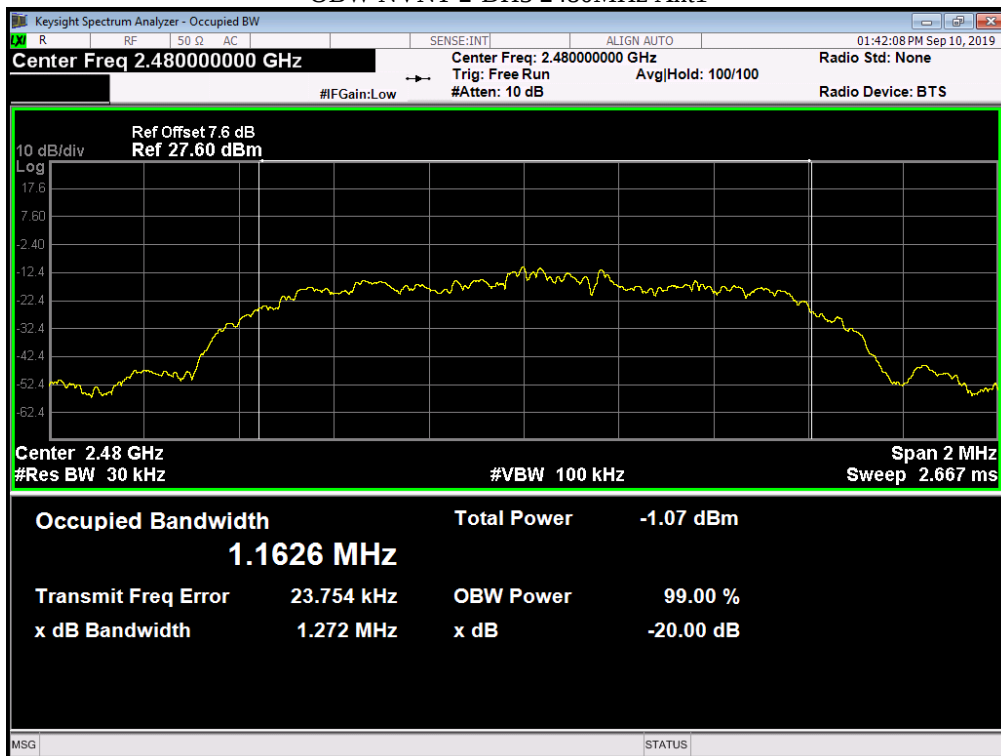


| Condition | Mode  | Frequency (MHz) | Antenna | 99% OBW (MHz) | -20 dB Bandwidth (MHz) | Limit -20 dB Bandwidth (MHz) | Verdict |
|-----------|-------|-----------------|---------|---------------|------------------------|------------------------------|---------|
| NVNT      | 3-DH5 | 2402            | Ant 1   | 1.1668        | 1.2811                 | 0                            | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant 1   | 1.1658        | 1.2791                 | 0                            | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant 1   | 1.1599        | 1.2857                 | 0                            | Pass    |


OBW NVNT 3-DH5 2402MHz Ant1

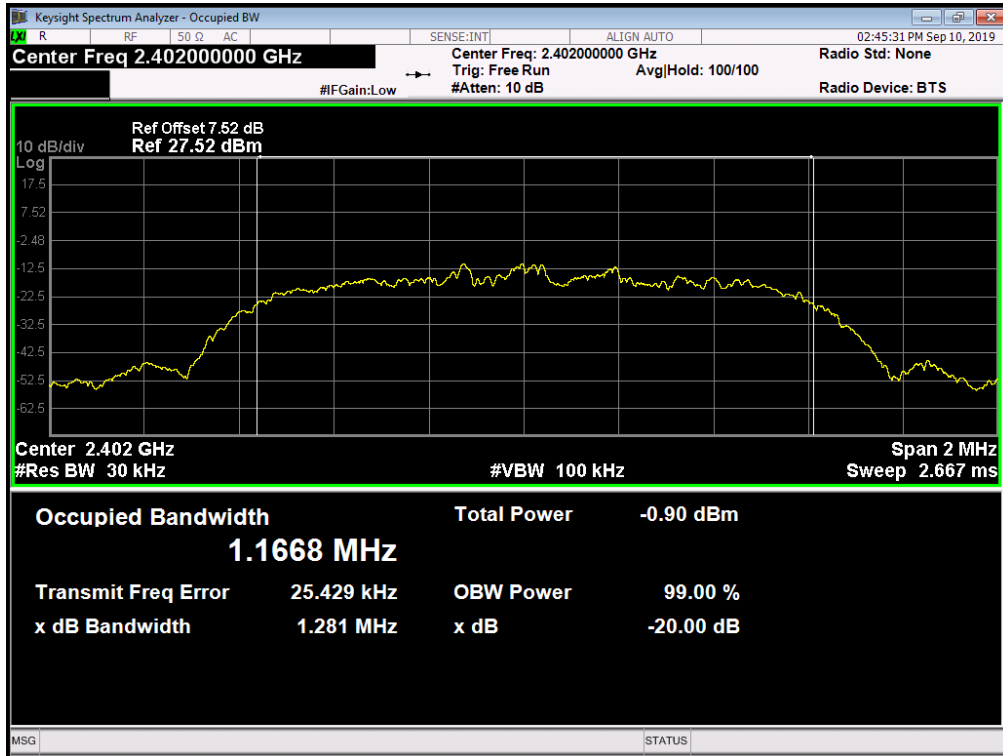

OBW NVNT 3-DH5 2441MHz Ant1

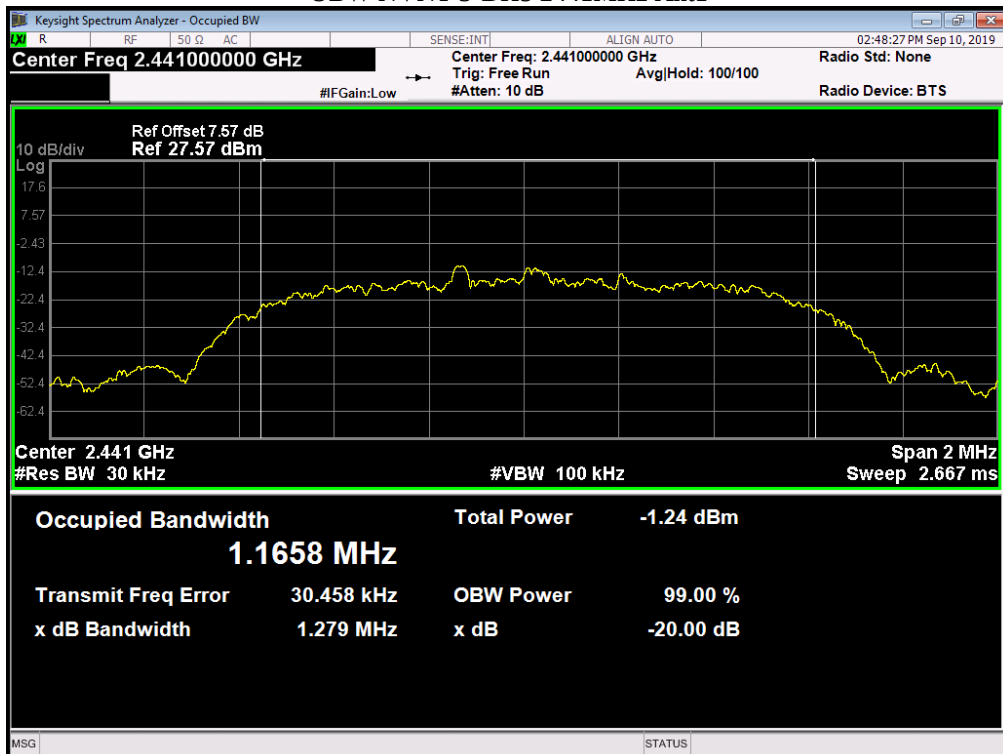

OBW NVNT 3-DH5 2480MHz Ant1

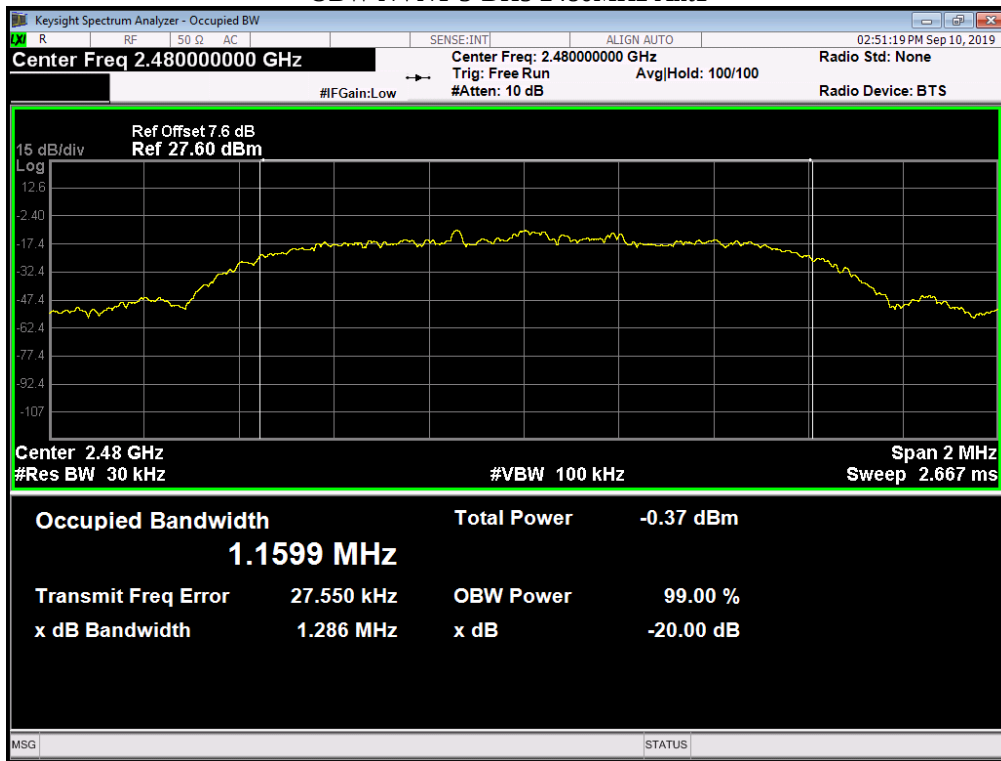

## 7. Carrier Frequencies Separated

### 7.1. Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.2. Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as  
Span = wide enough to capture the peaks of two adjacent channels, Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span, Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
Sweep = auto, Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

### 7.3. Deviation from standard

No deviation.

### 7.4. Test setup



### 7.5. Test results

| Condition | Mode  | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 1-DH1 | 2401.873            | 2402.863            | 0.99      | 0.578       | Pass    |
| NVNT      | 1-DH1 | 2440.876            | 2442.109            | 1.233     | 0.579       | Pass    |
| NVNT      | 1-DH1 | 2479.038            | 2479.86             | 0.822     | 0.57        | Pass    |

CFS NVNT 1-DH1 2402MHz



CFS NVNT 1-DH1 2441MHz




CFS NVNT 1-DH1 2480MHz




| Condition | Mode  | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 2-DH3 | 2401.867            | 2402.875            | 1.008     | 0.849       | Pass    |
| NVNT      | 2-DH3 | 2440.864            | 2441.893            | 1.029     | 0.85        | Pass    |
| NVNT      | 2-DH3 | 2479.047            | 2480.007            | 0.96      | 0.848       | Pass    |


CFS NVNT 2-DH3 2402MHz

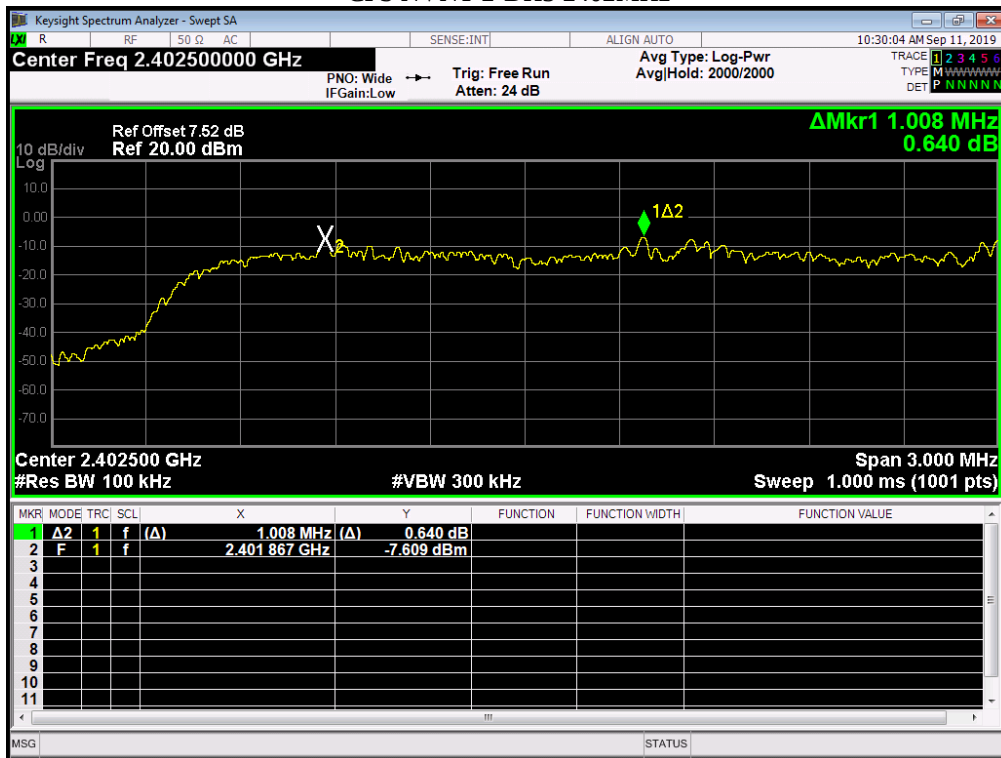

CFS NVNT 2-DH3 2441MHz

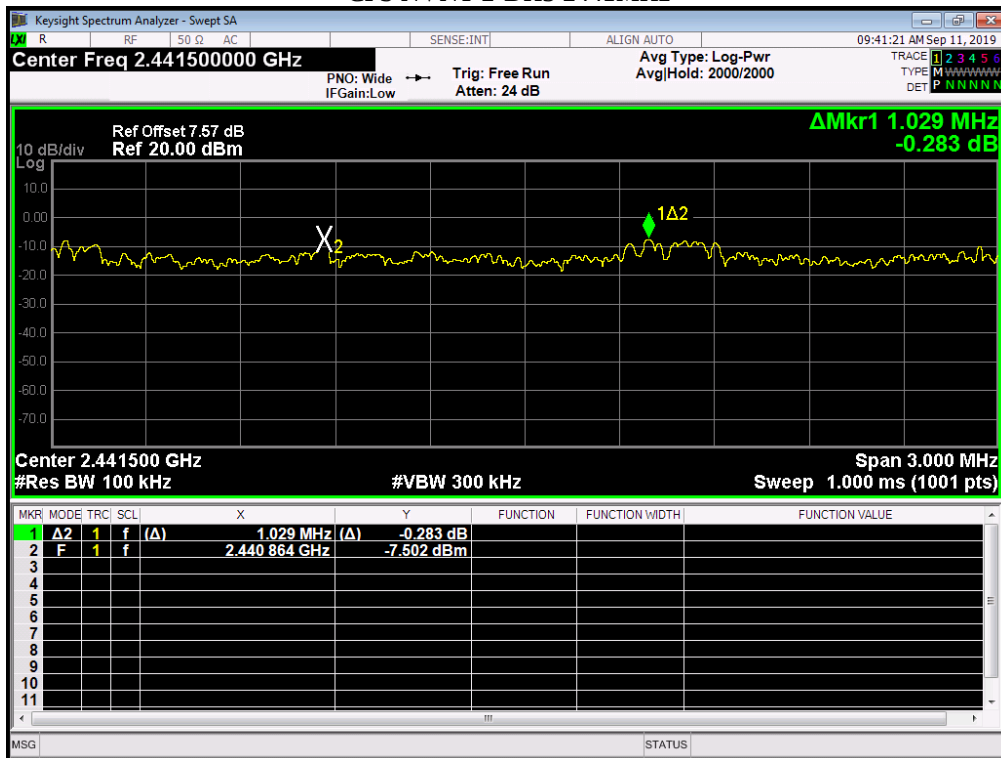


CFS NVNT 2-DH3 2480MHz

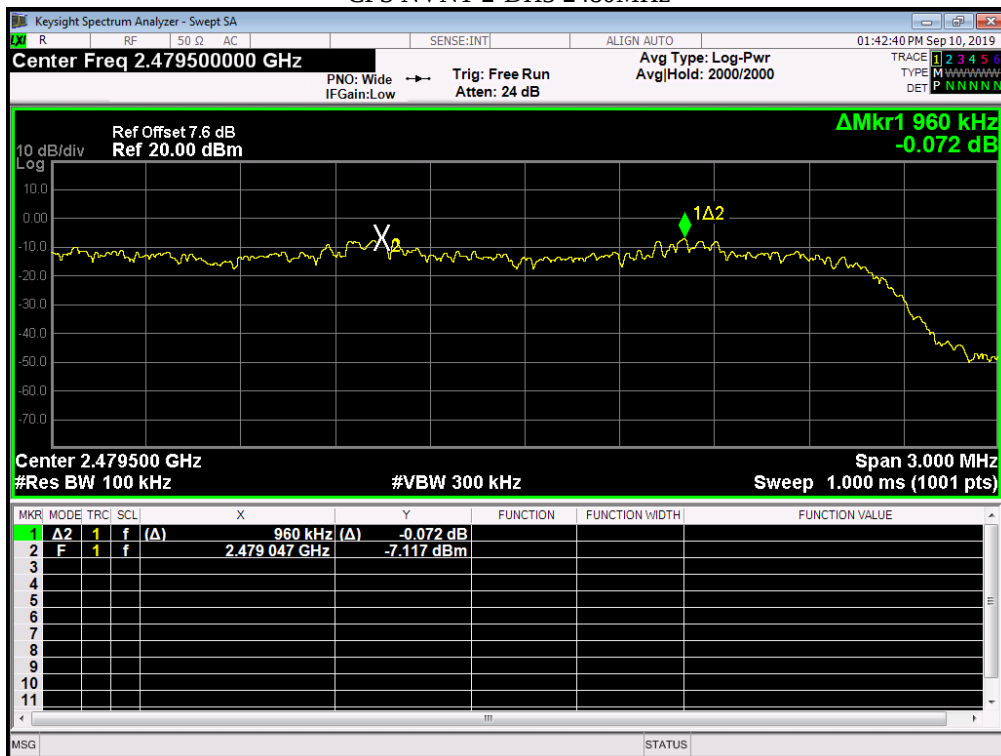


| Condition | Mode  | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 3-DH5 | 2401.873            | 2403.04             | 1.167     | 0.854       | Pass    |
| NVNT      | 3-DH5 | 2440.996            | 2442.028            | 1.032     | 0.857       | Pass    |
| NVNT      | 3-DH5 | 2479.122            | 2480.334            | 1.212     | 0.857       | Pass    |


CFS NVNT 3-DH5 2402MHz

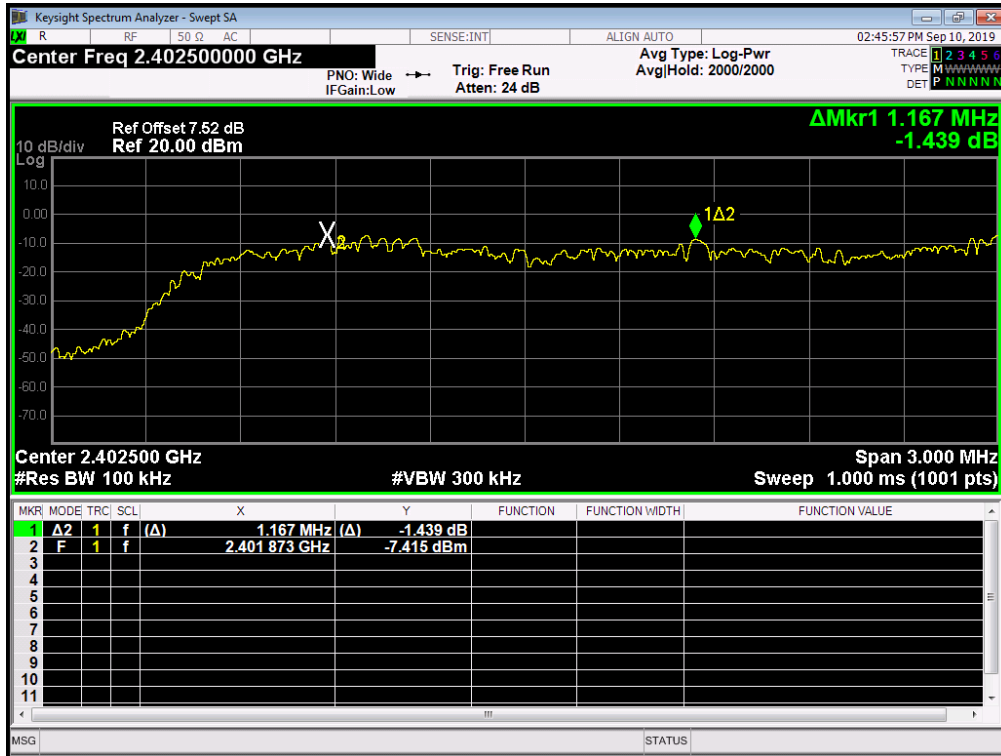

CFS NVNT 3-DH5 2441MHz

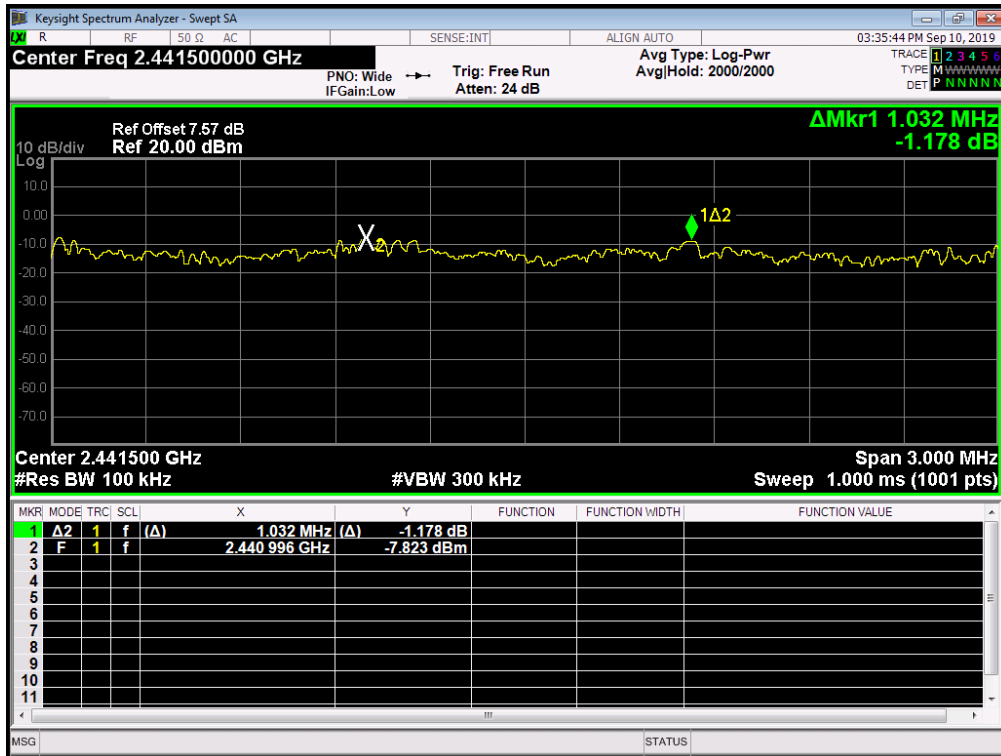

CFS NVNT 3-DH5 2480MHz

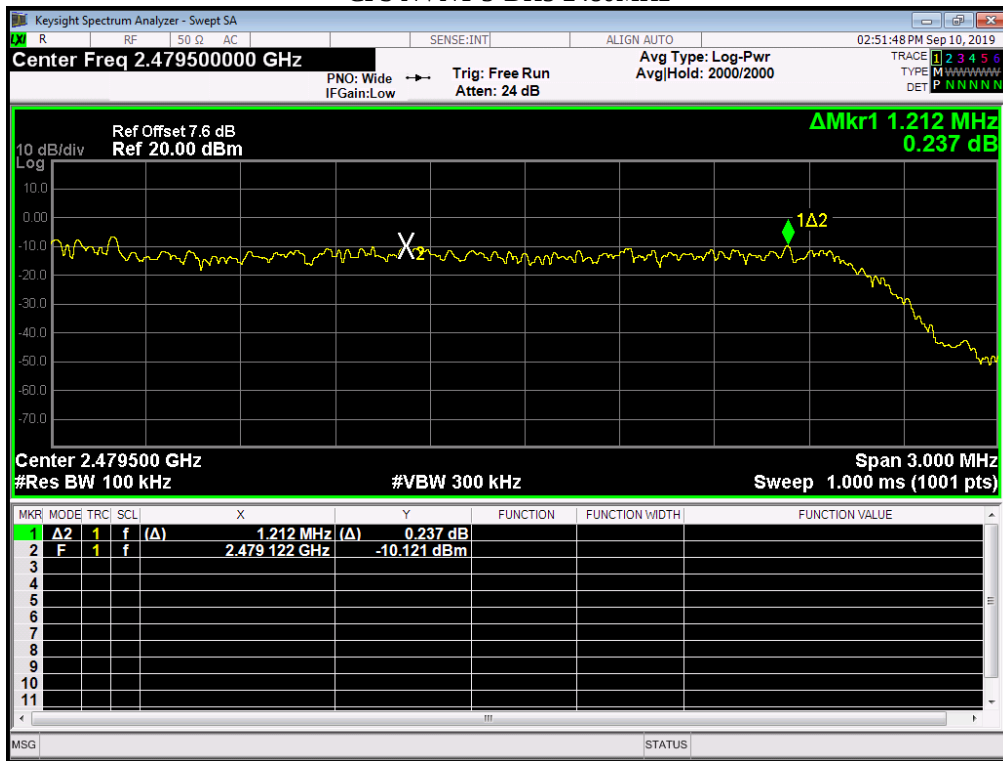

## 8. Hopping Channel Number

### 8.1. Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


### 8.2. Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer , set the Spectrum Analyzer as  
Span = the frequency band of operation,  $RBW \geq 1\%$  of the span,  $VBW \geq RBW$  Sweep = auto  
Detector function = peak, Trace = max hold
- (2) The EUT should be have its hopping function enabled. Maxhold and record hopping channels  
It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

### 8.3. Deviation from standard

No deviation.

### 8.4. Test setup

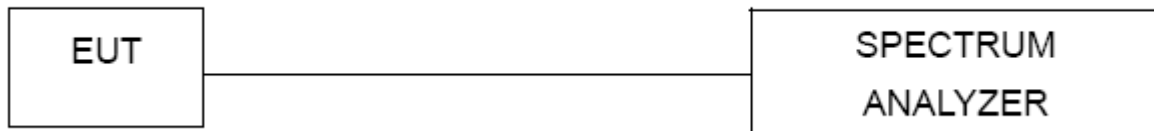


### 8.5. Test result

## Number of Hopping Channel

| Description of Channel: |                 |         |                 |         |                 |
|-------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                 | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00                      | 2402            | 27      | 2429            | 54      | 2456            |
| 01                      | 2403            | 28      | 2430            | 55      | 2457            |
| 02                      | 2404            | 29      | 2431            | 56      | 2458            |
| 03                      | 2405            | 30      | 2432            | 57      | 2459            |
| 04                      | 2406            | 31      | 2433            | 58      | 2460            |
| 05                      | 2407            | 32      | 2434            | 59      | 2461            |
| 06                      | 2408            | 33      | 2435            | 60      | 2462            |
| 07                      | 2409            | 34      | 2436            | 61      | 2463            |
| 08                      | 2410            | 35      | 2437            | 62      | 2464            |
| 09                      | 2411            | 36      | 2438            | 63      | 2465            |
| 10                      | 2412            | 37      | 2439            | 64      | 2466            |
| 11                      | 2413            | 38      | 2440            | 65      | 2467            |
| 12                      | 2414            | 39      | 2441            | 66      | 2468            |
| 13                      | 2415            | 40      | 2442            | 67      | 2469            |
| 14                      | 2416            | 41      | 2443            | 68      | 2470            |
| 15                      | 2417            | 42      | 2444            | 69      | 2471            |
| 16                      | 2418            | 43      | 2445            | 70      | 2472            |
| 17                      | 2419            | 44      | 2446            | 71      | 2473            |
| 18                      | 2420            | 45      | 2447            | 72      | 2474            |
| 19                      | 2421            | 46      | 2448            | 73      | 2475            |
| 20                      | 2422            | 47      | 2449            | 74      | 2476            |
| 21                      | 2423            | 48      | 2450            | 75      | 2477            |
| 22                      | 2424            | 49      | 2451            | 76      | 2478            |
| 23                      | 2425            | 50      | 2452            | 77      | 2479            |
| 24                      | 2426            | 51      | 2453            | 78      | 2480            |
| 25                      | 2427            | 52      | 2454            |         |                 |
| 26                      | 2428            | 53      | 2455            |         |                 |


| Condition | Mode  | Hopping Number | Limit | Verdict |
|-----------|-------|----------------|-------|---------|
| NVNT      | 1-DH1 | 79             | 15    | Pass    |

Hopping No. NVNT 1-DH1 2402MHz

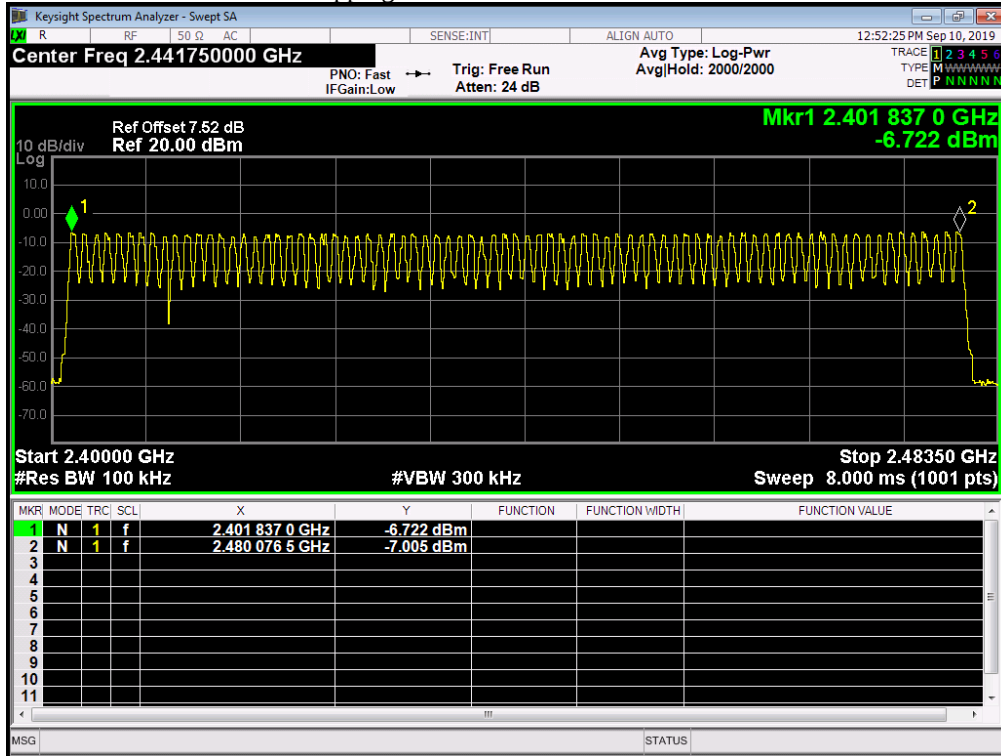


| Condition | Mode  | Hopping Number | Limit | Verdict |
|-----------|-------|----------------|-------|---------|
| NVNT      | 2-DH3 | 79             | 15    | Pass    |

Hopping No. NVNT 2-DH5 2402MHz

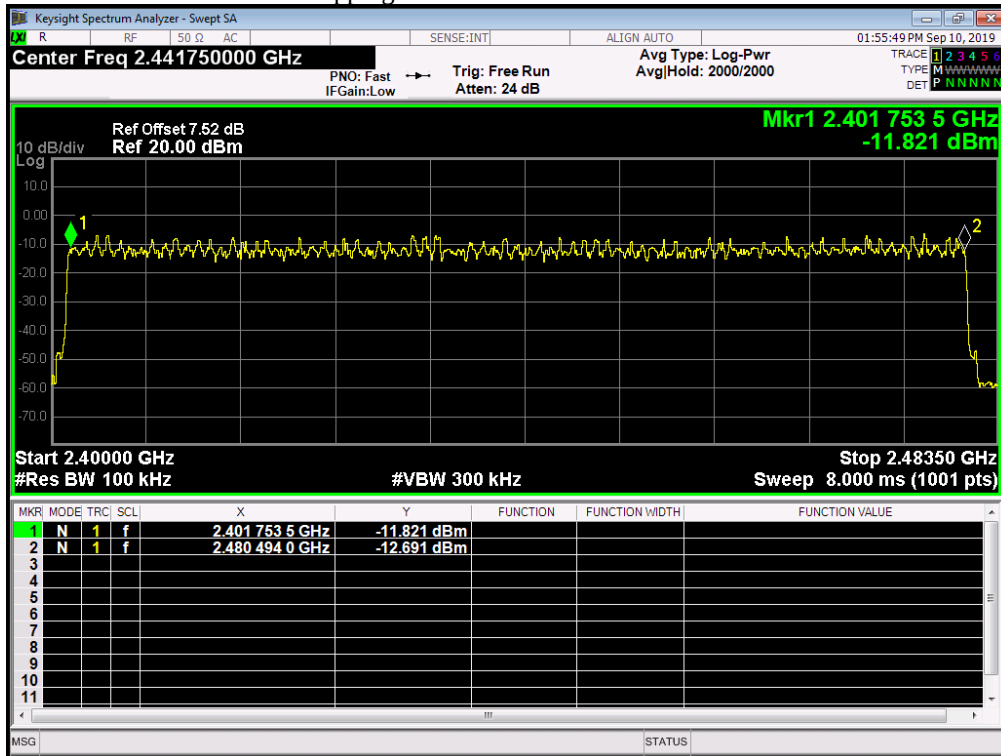

| Condition | Mode  | Hopping Number | Limit | Verdict |
|-----------|-------|----------------|-------|---------|
| NVNT      | 3-DH5 | 79             | 15    | Pass    |

Hopping No. NVNT 3-DH5 2402MHz

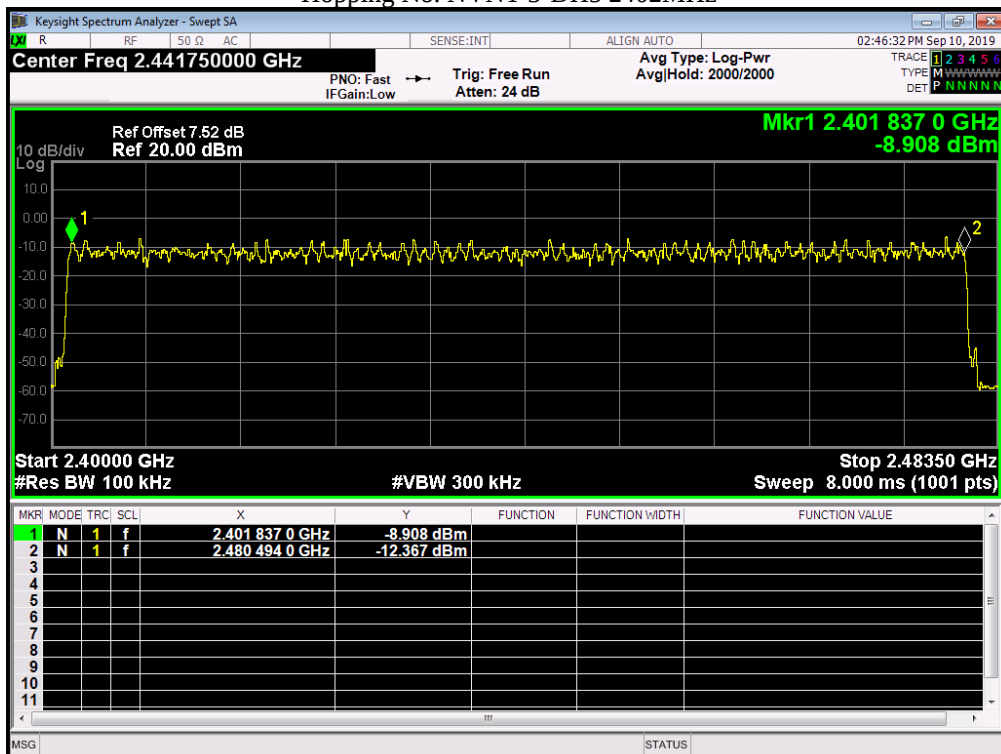

## 9. Dwell time

### 9.1. Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 9.2. Test procedure

- (1) Place the EUT on the table in the chamber or connect the antenna port of the EUT to spectrum analyzer and set it in transmitting mode.
- (2) Set RBW of spectrum analyzer to 1MHz, VBW  $\geq$  RBW
- (3) Use a video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for DH5, DH3 and DH1 packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) A Period Time =  $79 \times 0.4 = 31.6$  S  
DH1 Time Slot: Reading \*  $(1600/2) \times 31.6/79$   
DH3 Time Slot: Reading \*  $(1600/4) \times 31.6/79$   
DH5 Time Slot: Reading \*  $(1600/6) \times 31.6/79$

### 9.3. Deviation from standard

No deviation.


### 9.4. Test setup




### 9.5. Test result


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 1-DH1 | 2402            | 0.387           | 122.292               | 31600            | 400        | Pass    |
| NVNT      | 1-DH1 | 2441            | 0.387           | 122.292               | 31600            | 400        | Pass    |
| NVNT      | 1-DH1 | 2480            | 0.387           | 122.292               | 31600            | 400        | Pass    |

Dwell NVNT 1-DH1 2402MHz

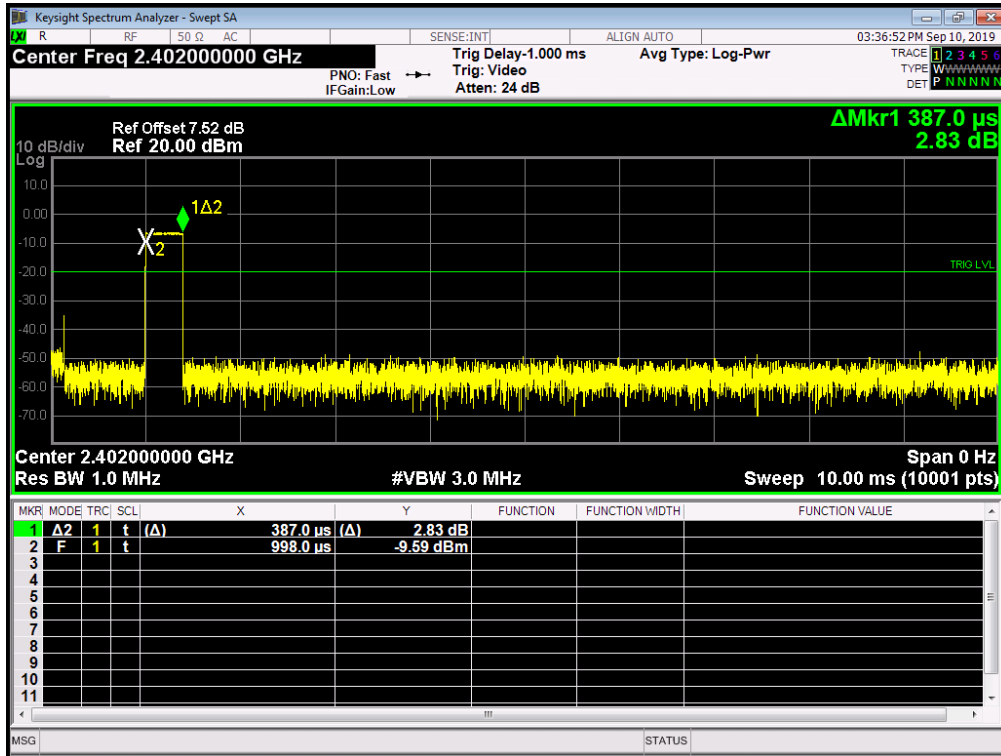


Dwell NVNT 1-DH1 2441MHz

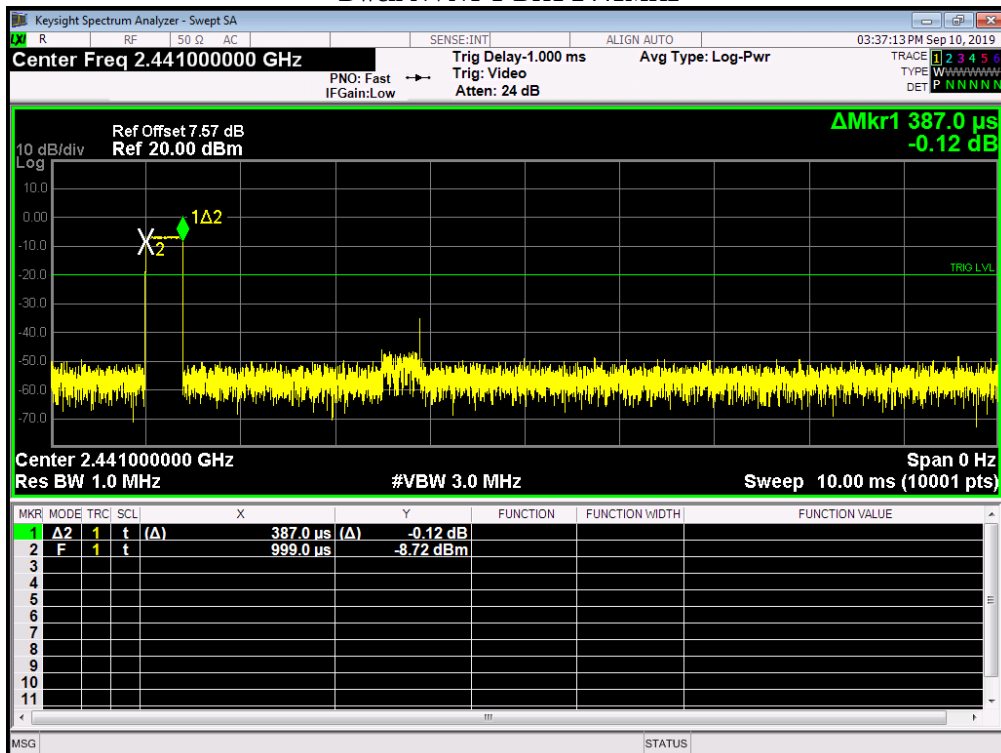


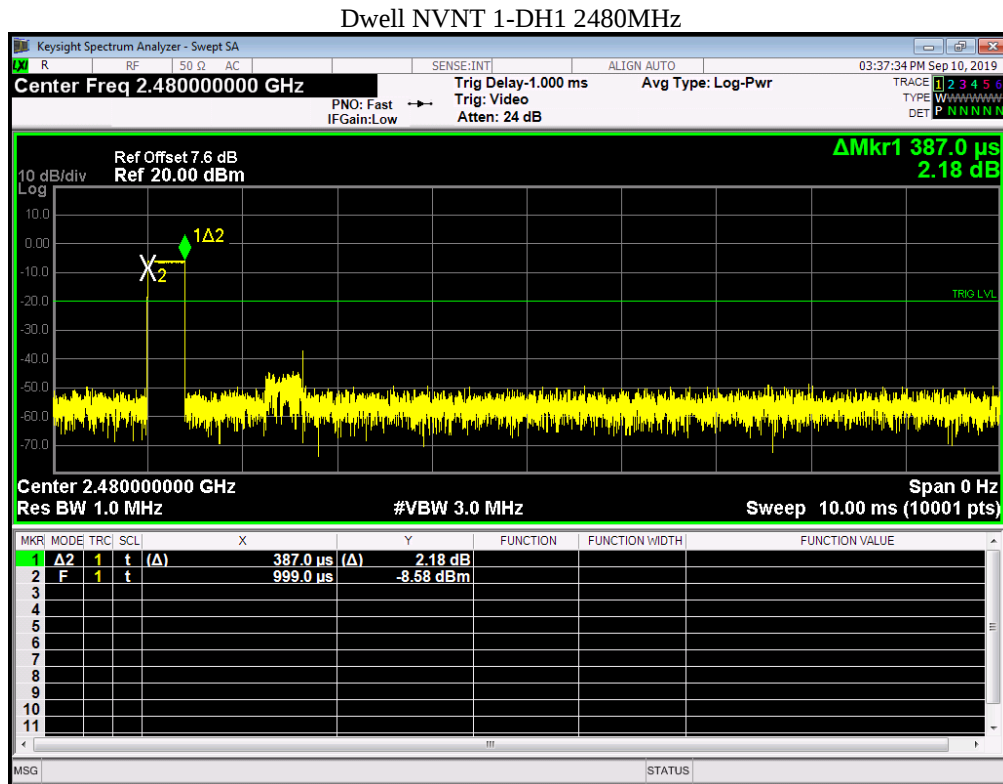


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 1-DH3 | 2402            | 1.643           | 259.594               | 31600            | 400        | Pass    |
| NVNT      | 1-DH3 | 2441            | 1.643           | 259.594               | 31600            | 400        | Pass    |
| NVNT      | 1-DH3 | 2480            | 1.643           | 259.594               | 31600            | 400        | Pass    |

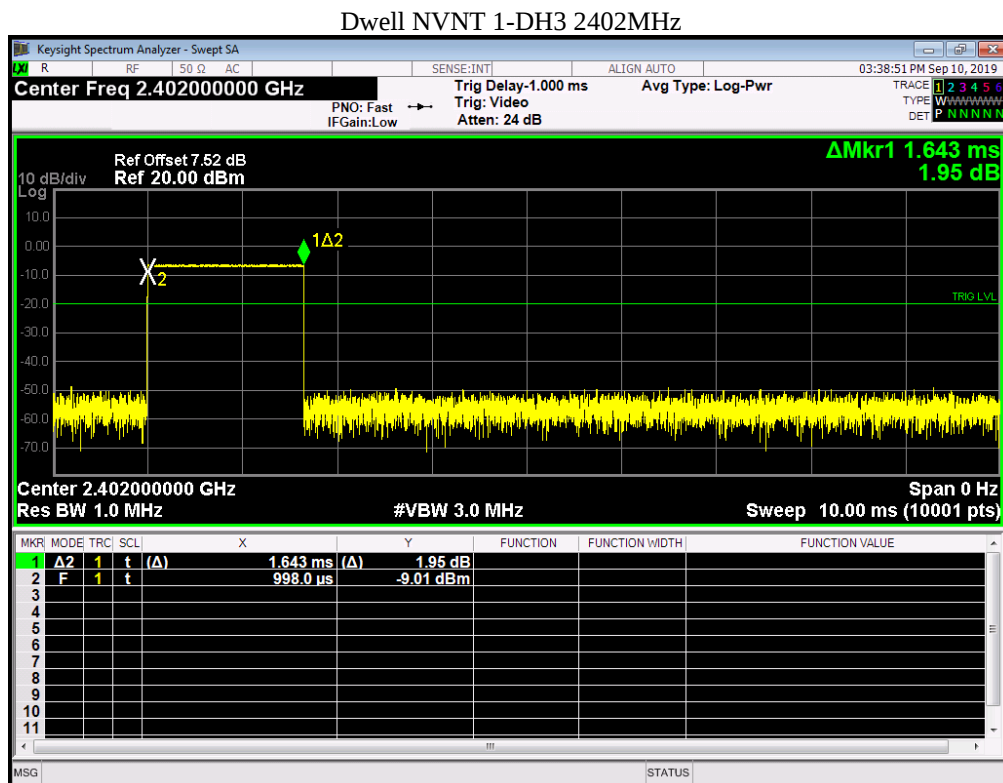

Dwell NVNT 1-DH3 2441MHz

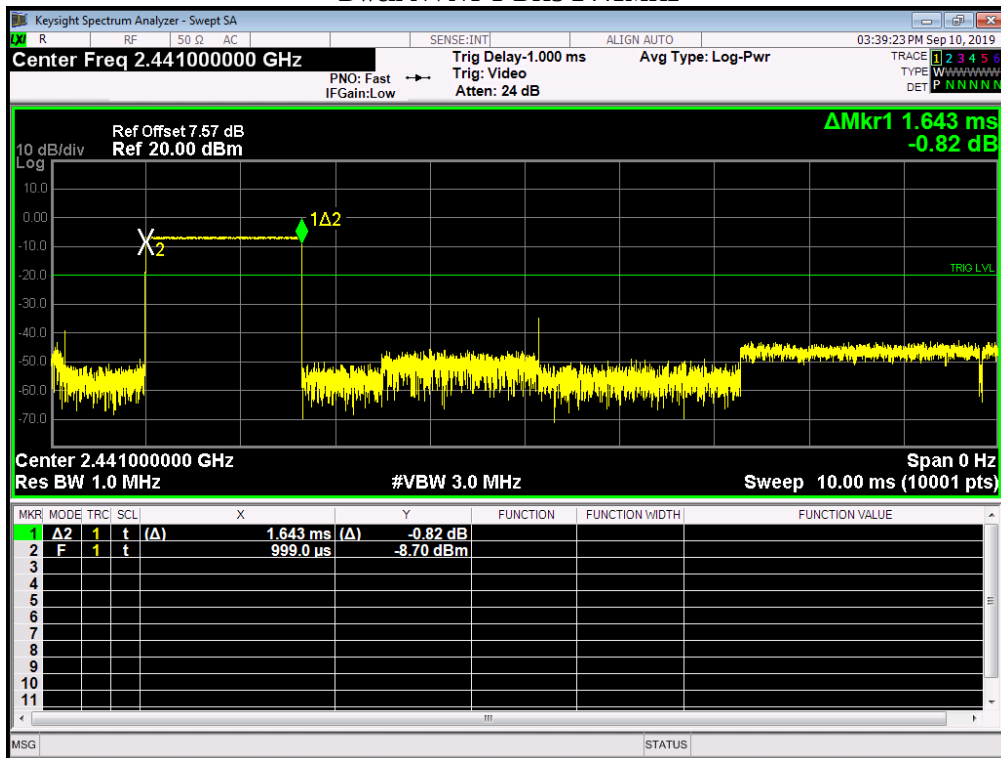


Dwell NVNT 1-DH3 2480MHz

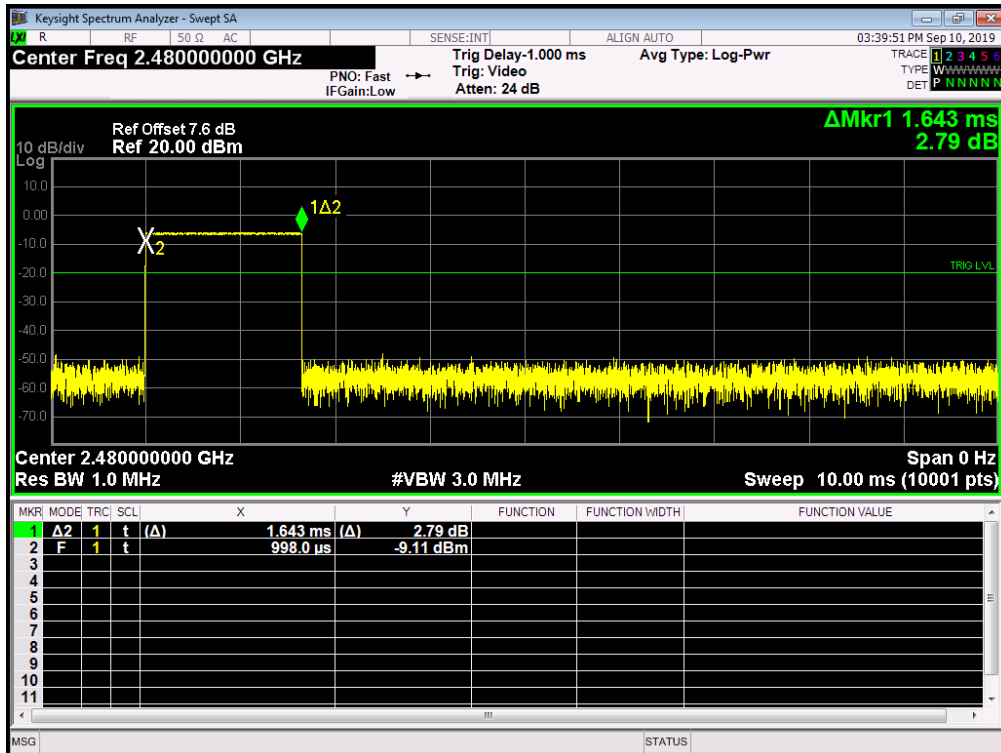


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 1-DH5 | 2402            | 2.891           | 274.067               | 31600            | 400        | Pass    |
| NVNT      | 1-DH5 | 2441            | 2.891           | 274.067               | 31600            | 400        | Pass    |
| NVNT      | 1-DH5 | 2480            | 2.891           | 274.067               | 31600            | 400        | Pass    |


Dwell NVNT 1-DH5 2402MHz

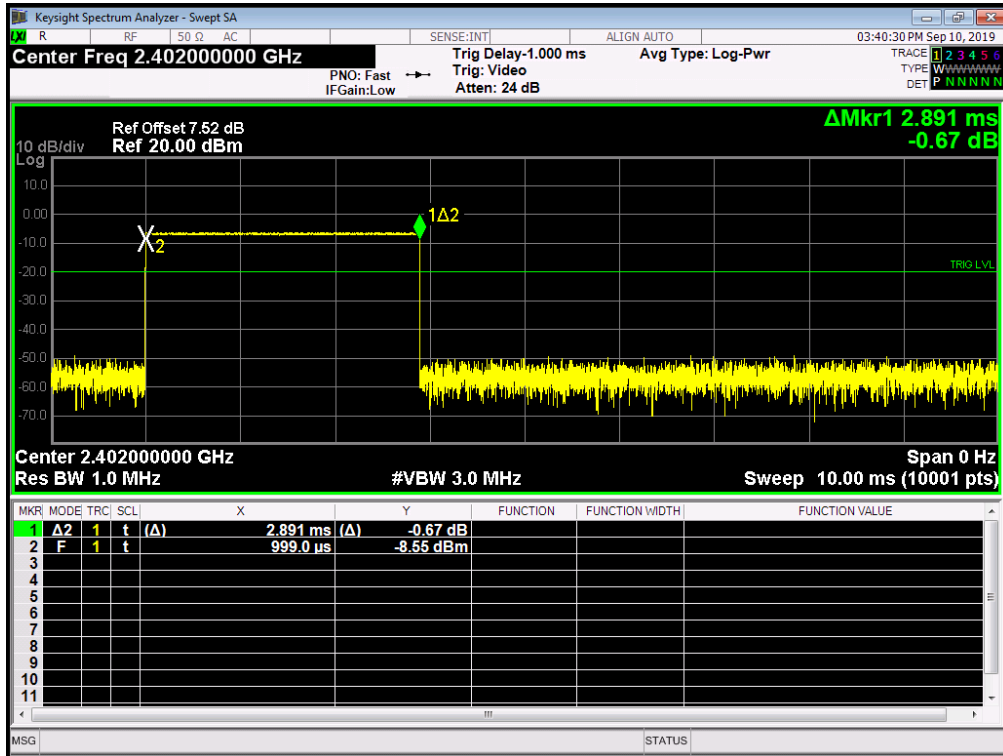

Dwell NVNT 1-DH5 2441MHz

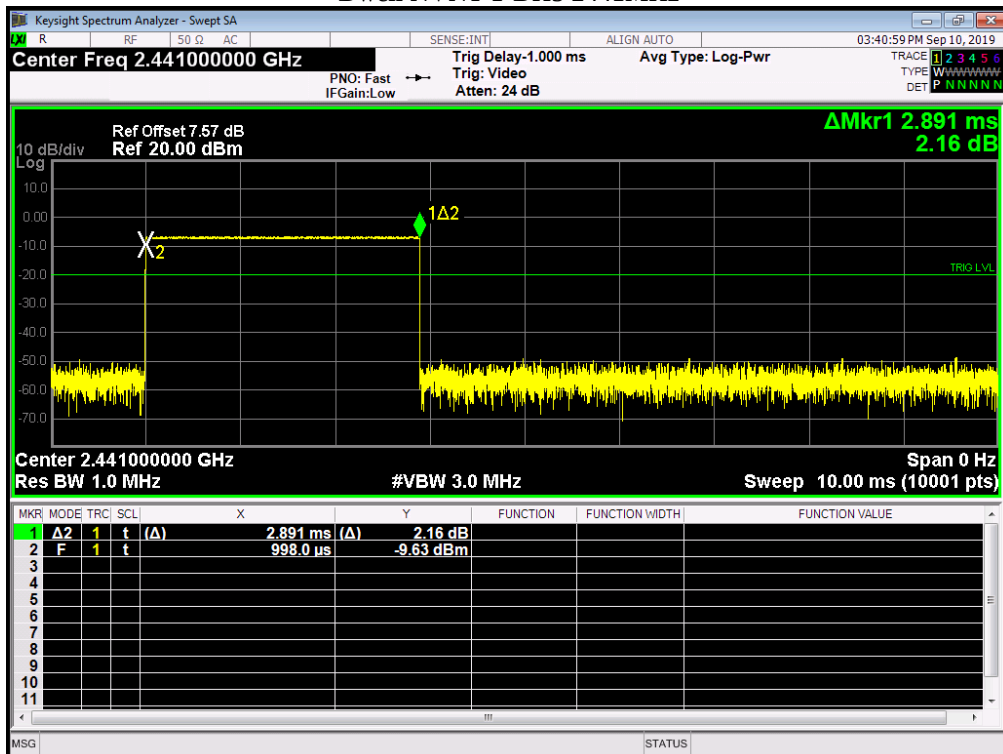


## Dwell NVNT 1-DH5 2480MHz

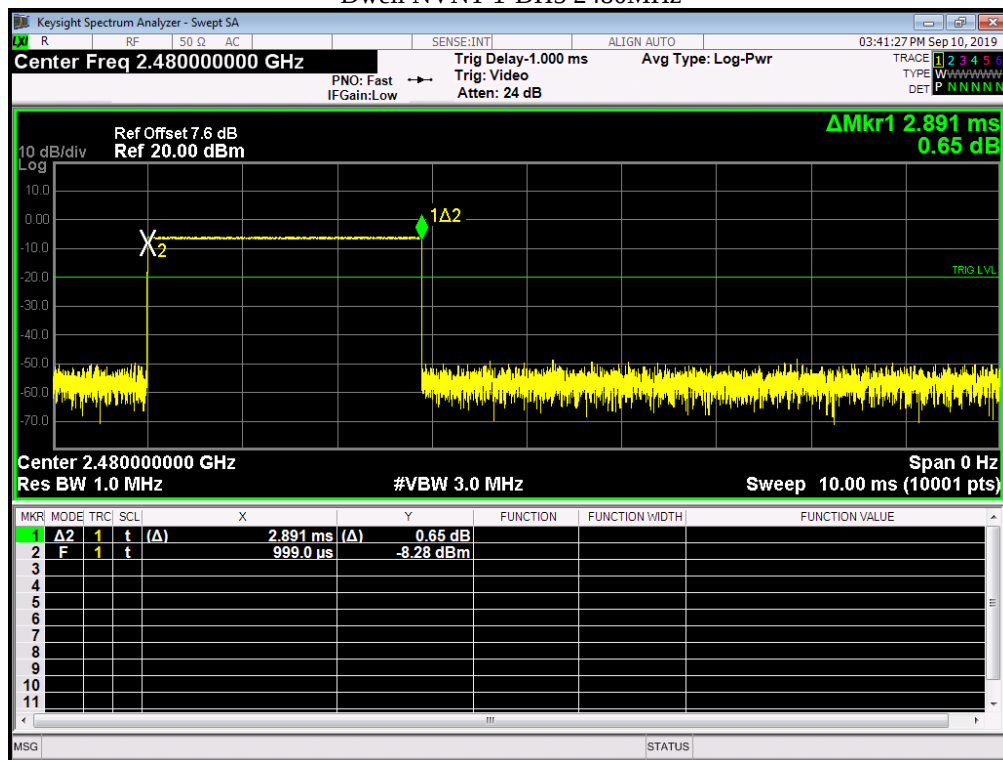


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 2-DH1 | 2402            | 0.397           | 125.452               | 31600            | 400        | Pass    |
| NVNT      | 2-DH1 | 2441            | 0.397           | 125.452               | 31600            | 400        | Pass    |
| NVNT      | 2-DH1 | 2480            | 0.397           | 125.452               | 31600            | 400        | Pass    |


## Dwell NVNT 2-DH1 2402MHz

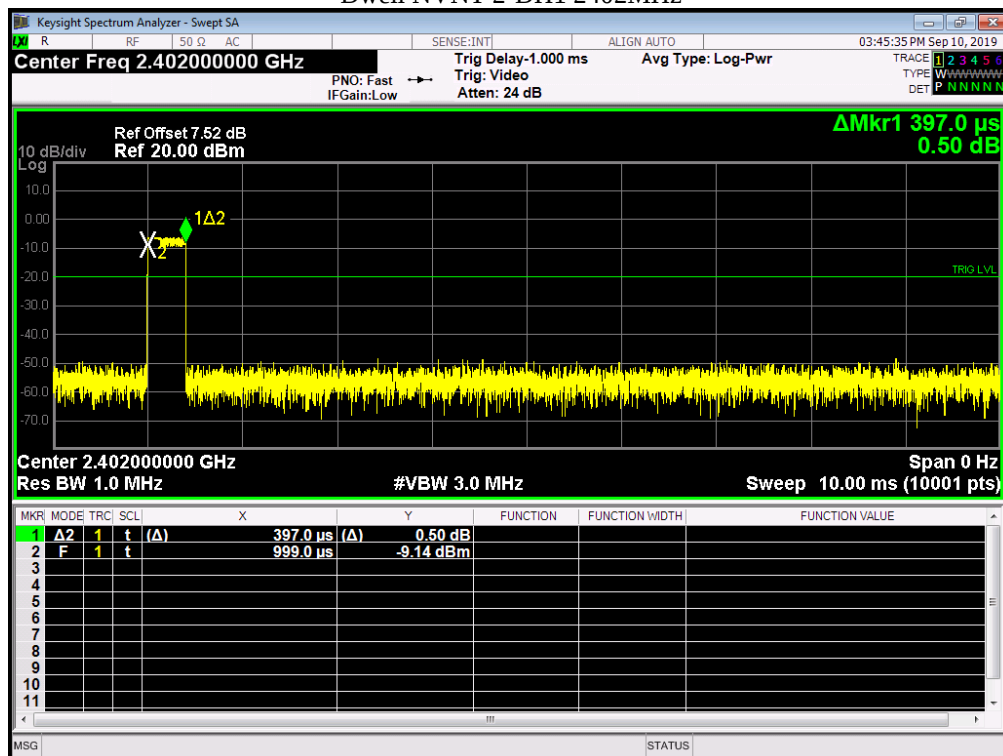

Dwell NVNT 2-DH1 2441MHz

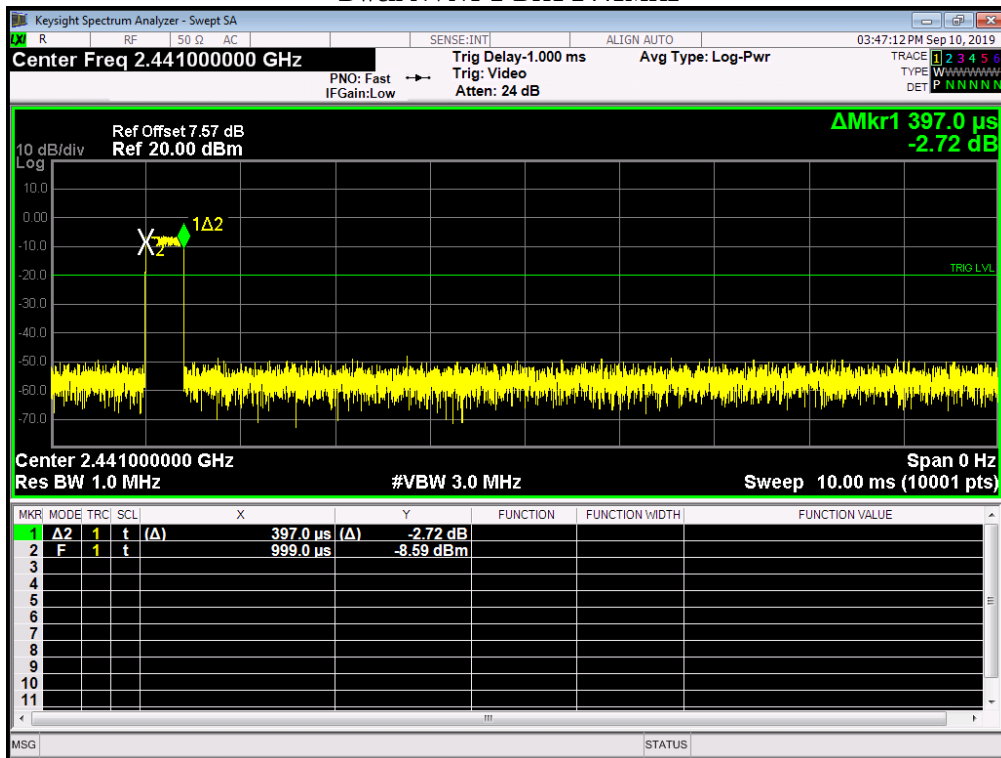


Dwell NVNT 2-DH1 2480MHz

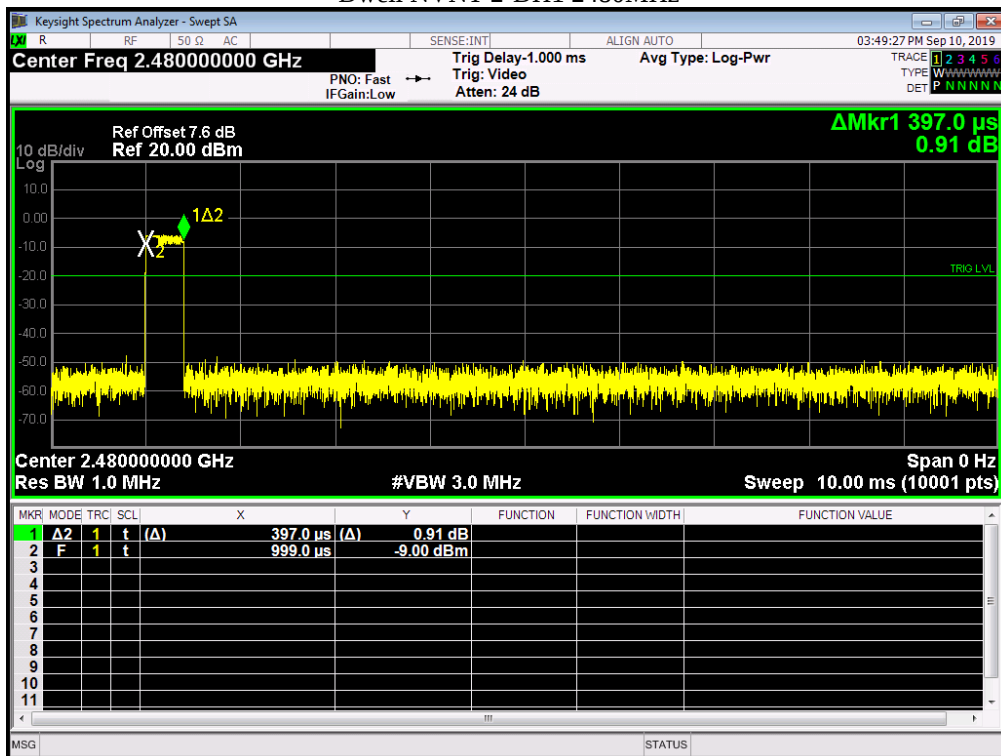


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 2-DH3 | 2402            | 1.648           | 260.384               | 31600            | 400        | Pass    |
| NVNT      | 2-DH3 | 2441            | 1.649           | 260.542               | 31600            | 400        | Pass    |
| NVNT      | 2-DH3 | 2480            | 1.644           | 259.752               | 31600            | 400        | Pass    |


Dwell NVNT 2-DH3 2402MHz

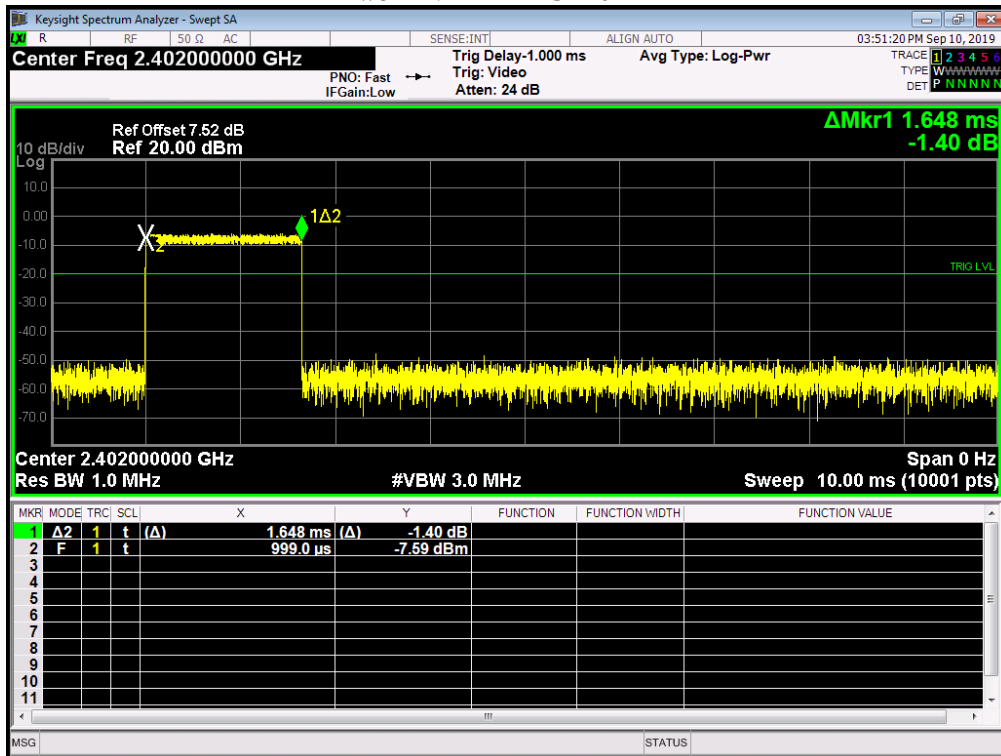

Dwell NVNT 2-DH3 2441MHz

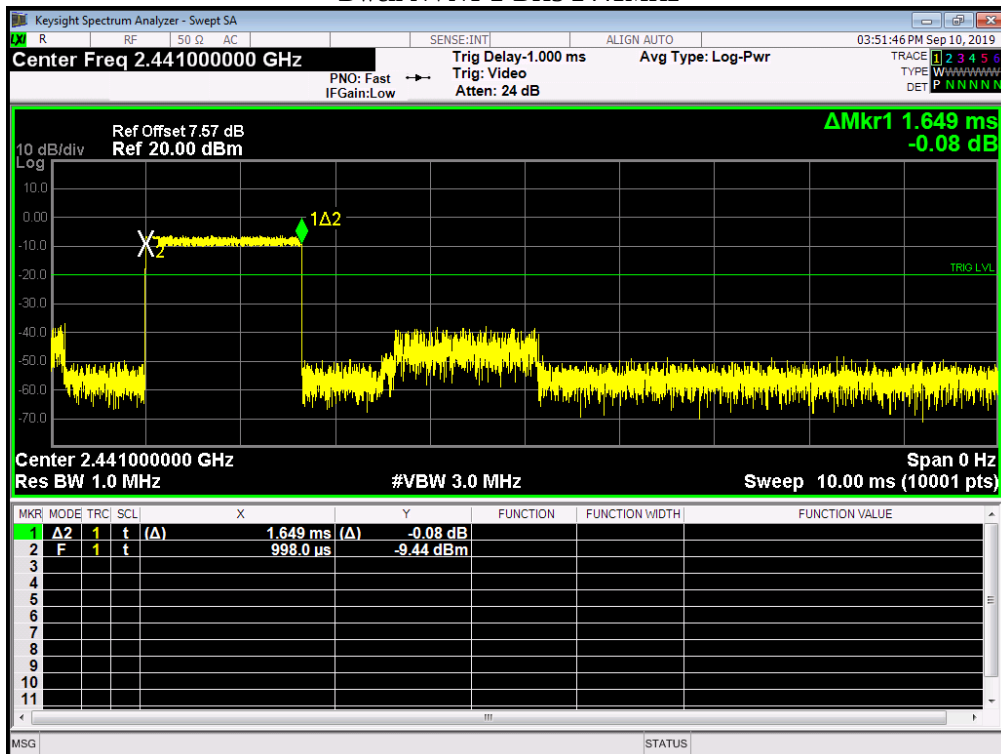


Dwell NVNT 2-DH3 2480MHz

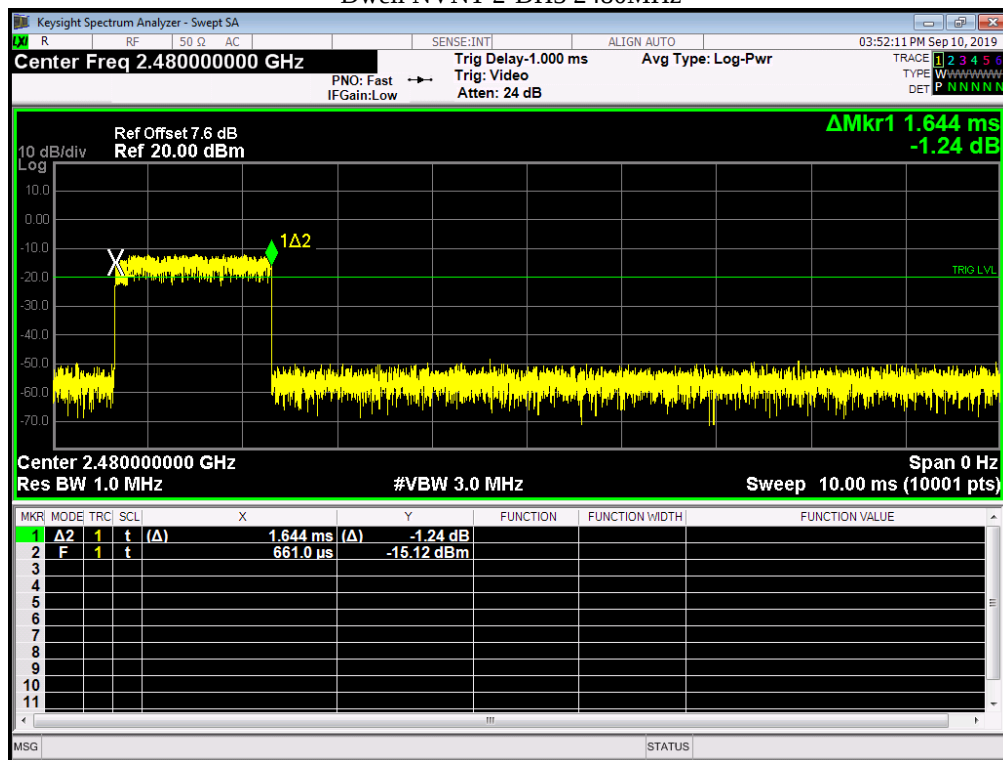


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 2-DH5 | 2402            | 2.89            | 273.972               | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2441            | 2.891           | 274.067               | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2480            | 2.891           | 274.067               | 31600            | 400        | Pass    |


Dwell NVNT 2-DH5 2402MHz

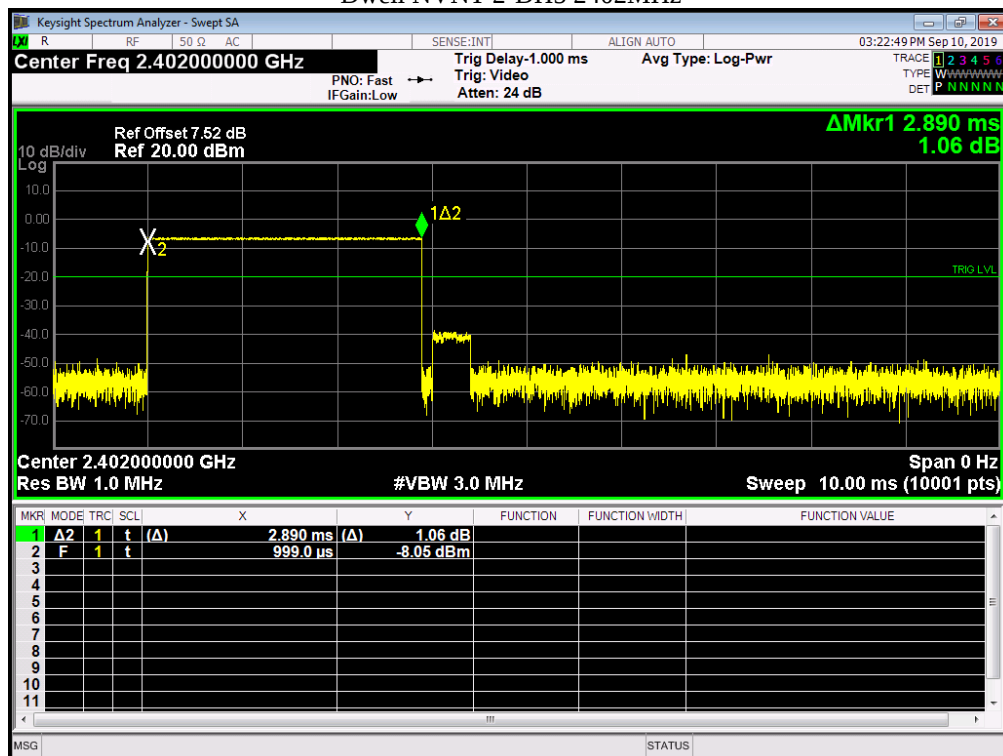

Dwell NVNT 2-DH5 2441MHz

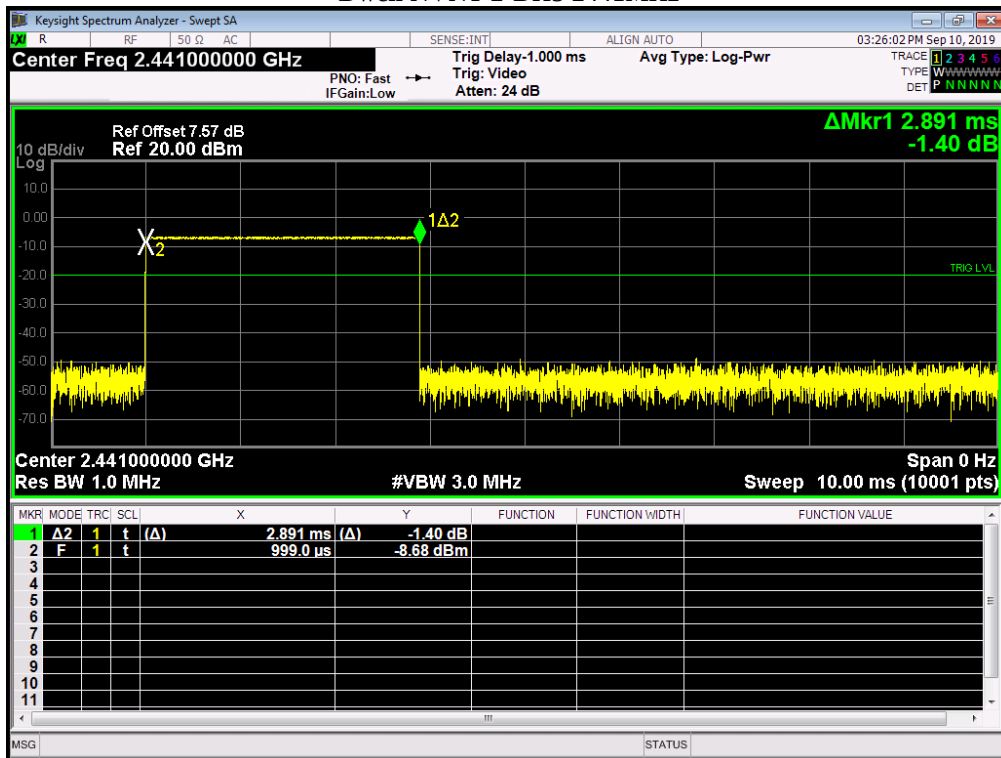


Dwell NVNT 2-DH5 2480MHz

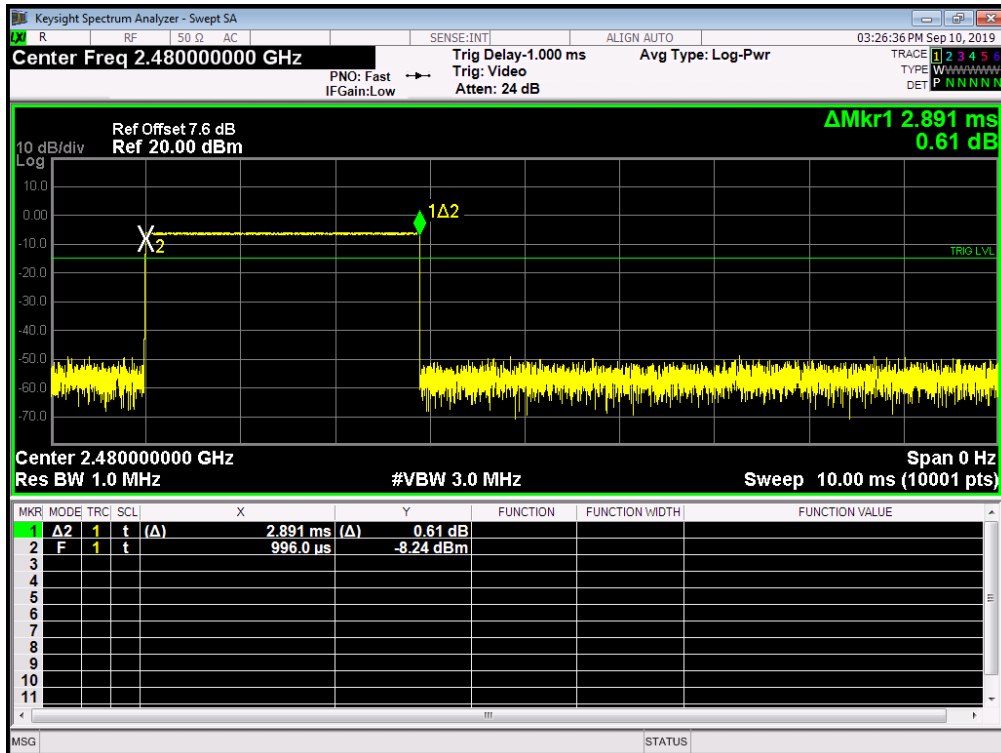


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 3-DH1 | 2402            | 0.398           | 125.768               | 31600            | 400        | Pass    |
| NVNT      | 3-DH1 | 2441            | 0.398           | 125.768               | 31600            | 400        | Pass    |
| NVNT      | 3-DH1 | 2480            | 0.373           | 117.868               | 31600            | 400        | Pass    |


Dwell NVNT 3-DH1 2402MHz

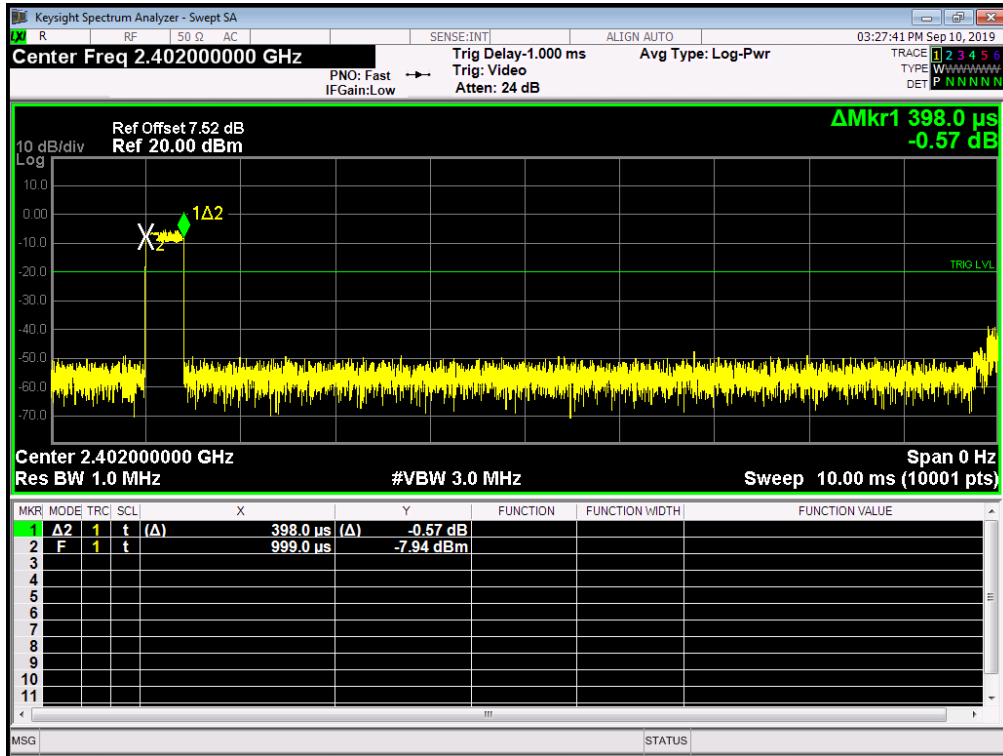

Dwell NVNT 3-DH1 2441MHz

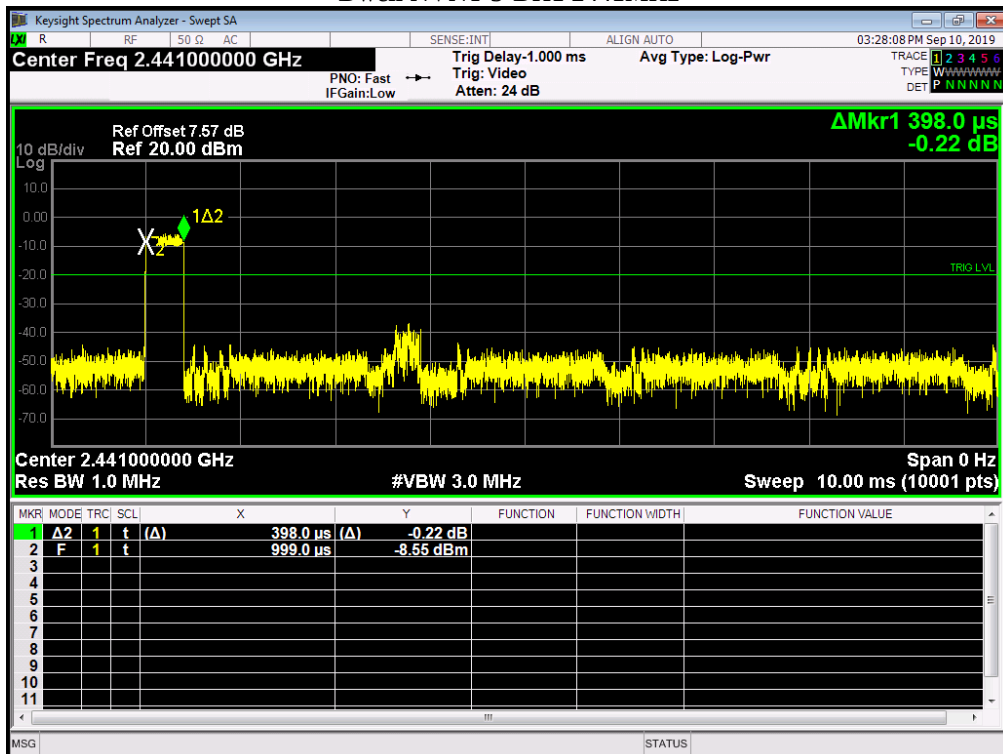


Dwell NVNT 3-DH1 2480MHz

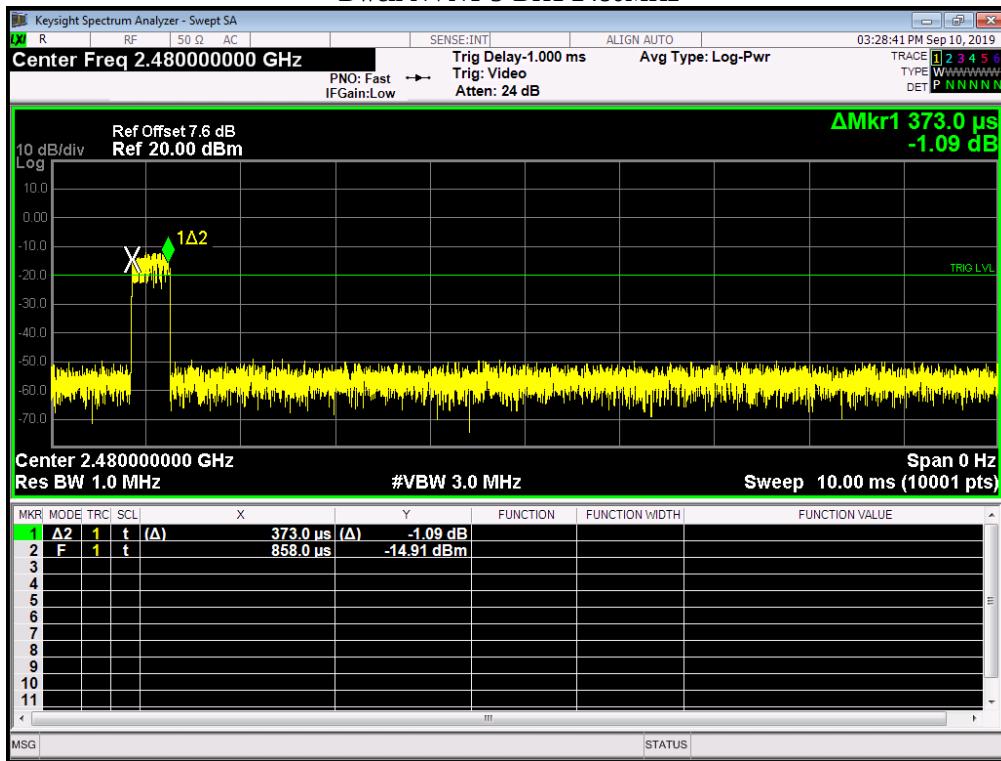


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 3-DH3 | 2402            | 1.649           | 260.542               | 31600            | 400        | Pass    |
| NVNT      | 3-DH3 | 2441            | 1.648           | 260.384               | 31600            | 400        | Pass    |
| NVNT      | 3-DH3 | 2480            | 1.649           | 260.542               | 31600            | 400        | Pass    |


Dwell NVNT 3-DH3 2402MHz

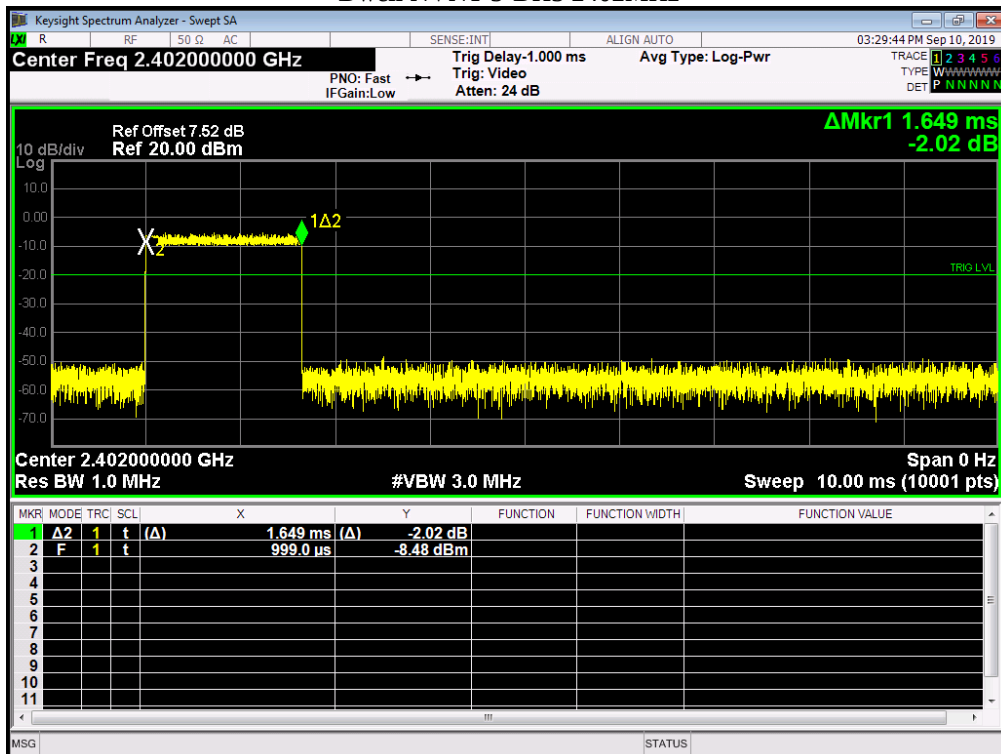

Dwell NVNT 3-DH3 2441MHz

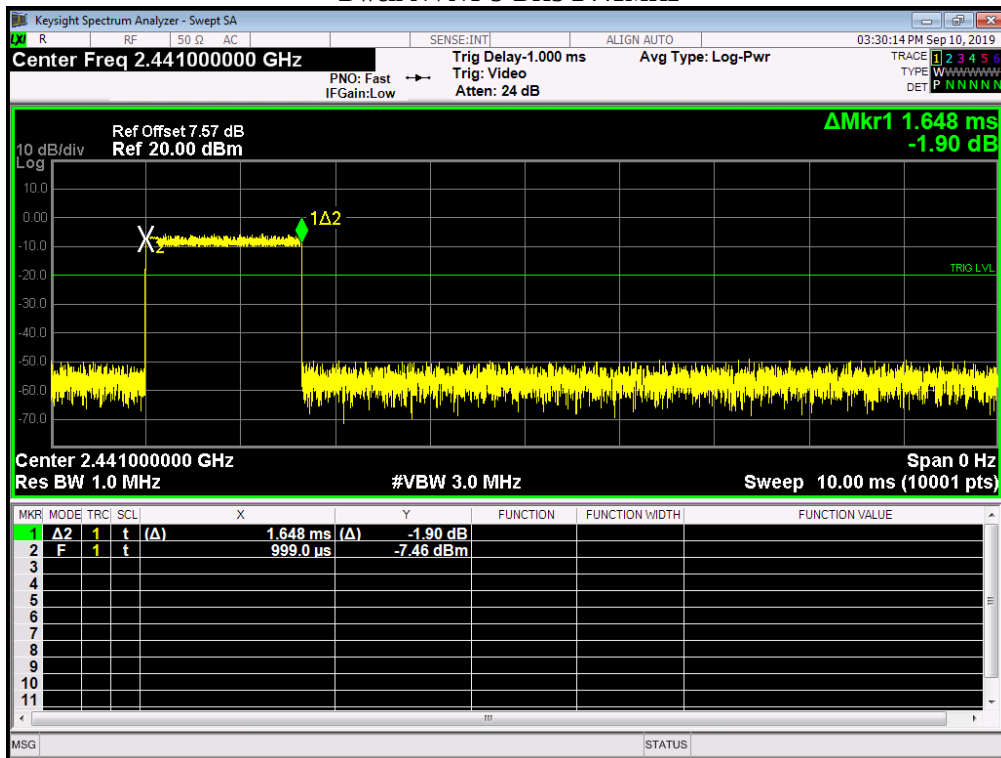


Dwell NVNT 3-DH3 2480MHz

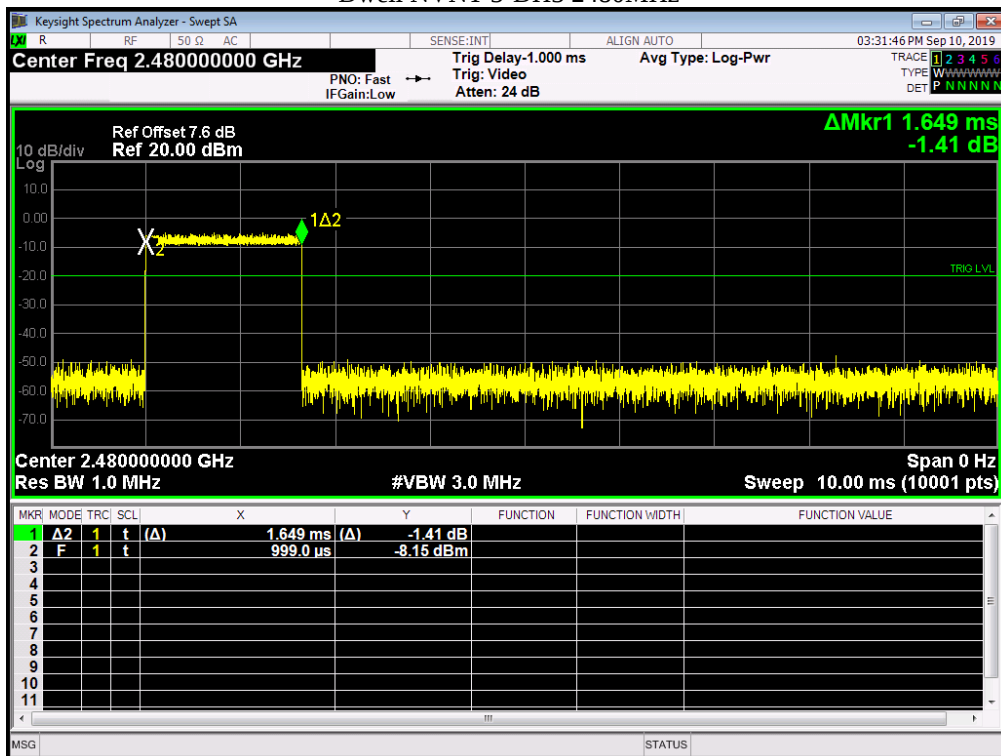


| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 3-DH5 | 2402            | 2.899           | 274.825               | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2441            | 2.899           | 274.825               | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2480            | 2.871           | 272.171               | 31600            | 400        | Pass    |


Dwell NVNT 3-DH5 2402MHz

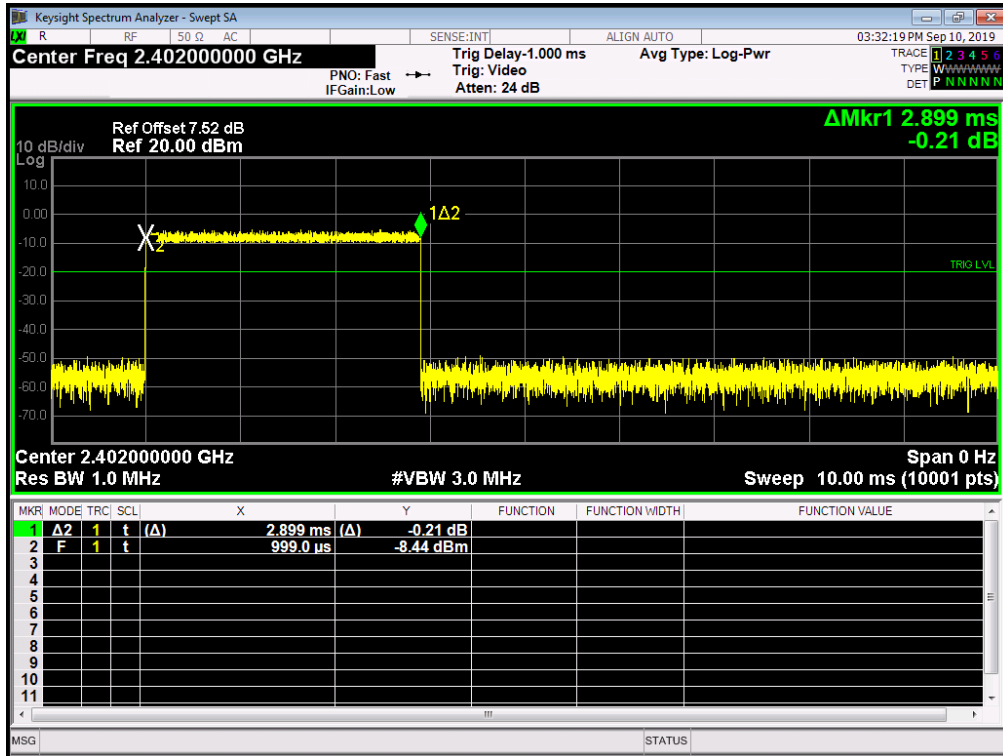

Dwell NVNT 3-DH5 2441MHz

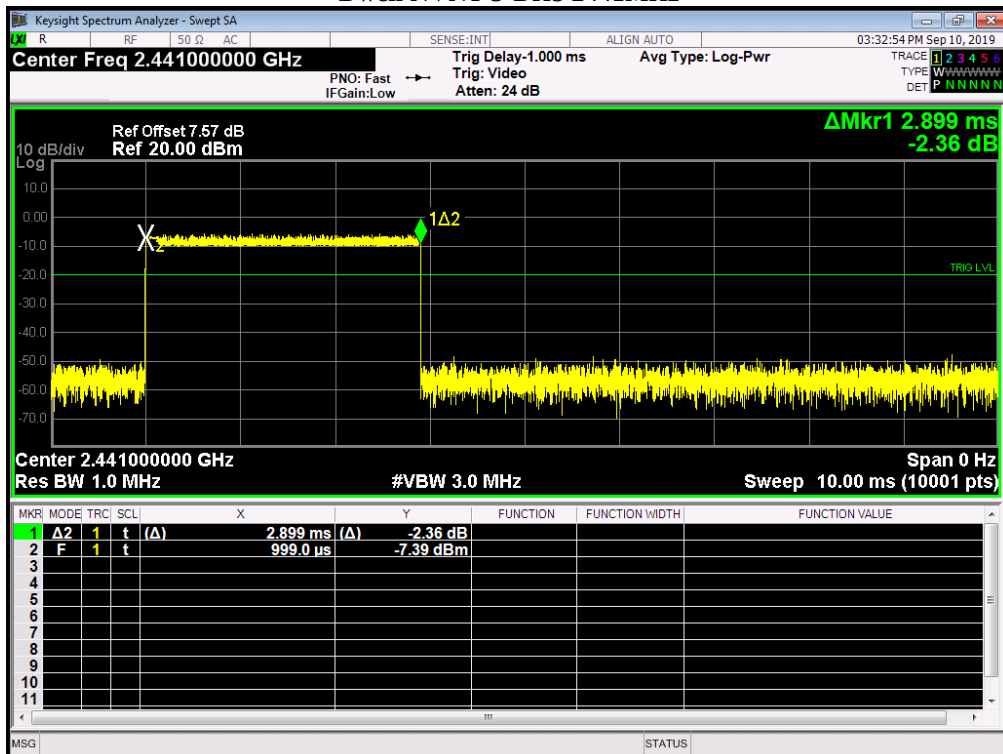

Dwell NVNT 3-DH5 2480MHz

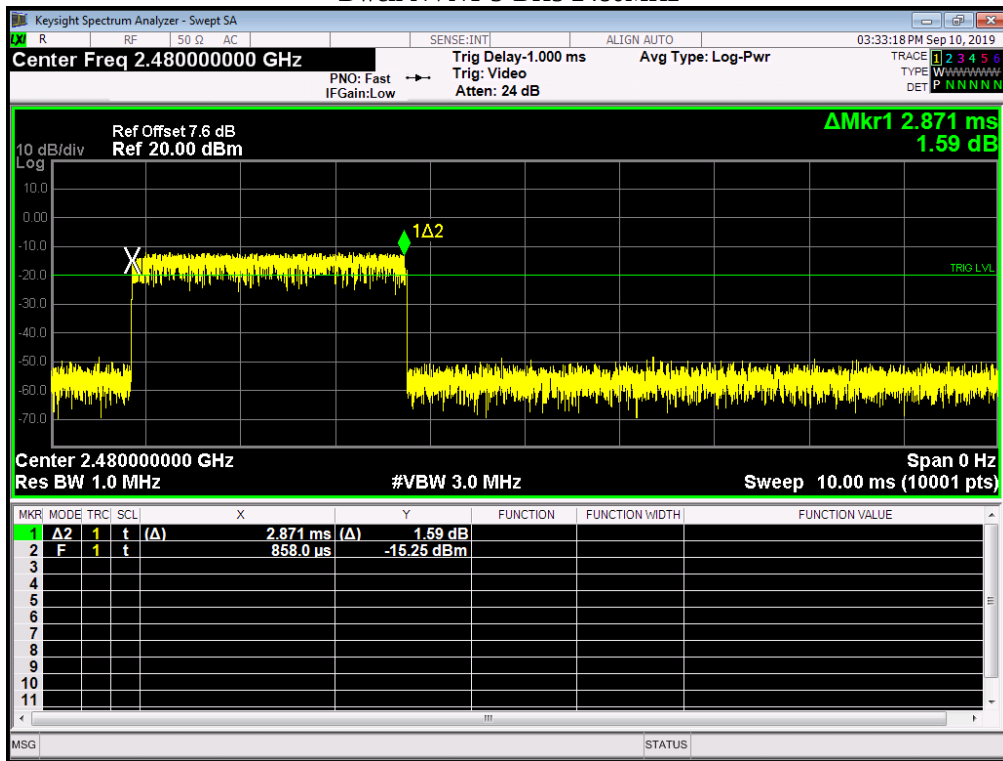

## 10. Band edge

### 10.1. Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 10.2. Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation, RBW  $\geq$  1% of the span, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold

### 10.3. Deviation from standard

No deviation.

### 10.4. Test setup



### 10.5. Test results