

Measurement Results

1-0397/20-02-13_log1_conducted

[Test logging](#)

This addendum is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Michael Dorongovski
Lab Manager
Radio Communications

Table of Content

EUT Summary	3
1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msp	4
2. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msp	11
3. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msp	15
4. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msp	19
5. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msp	26

EUT Summary

IUT DEFINITION & Common settings	
Manufacturer	Digi International Inc.
Type	ConnectCore 8M Nano
Serial No. Setup No.	BT Address: 00048E015603 1.0
SW Version HW Version	NI NI
Comment 1 2	
Tlow Tmid Thigh [°C]	-40 20 85
Vlow Vmid Vhigh [V] @Imax [A]	4.5 5 5.5 @1
Auto Control enabled Power Supply Climatic Box	No No
Antenna Gain [dBi]	see Test Parameter (only if applicable)
Additional Path Loss [dB]	0.7

IUT Common Settings BT Low Energy	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 64 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	WS_USB_RS232 HCI 26 115200 None S1 None Off
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	09.10.2020 12:46:17
Ambit Temp [°C] Humidity [rel%]	24.4 44
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Class / TC Version	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.86 10.79 15				
Start [MHz] Stop [MHz]	2401.000 2403.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				


DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	671	kHz	INFO

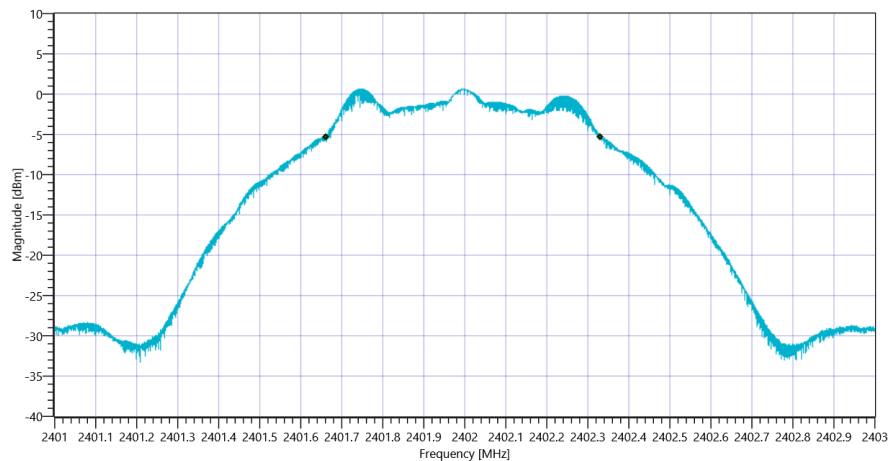

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_09102020_124644.png

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.86 10.79 20				
Start [MHz] Stop [MHz]	2401.000 2403.000				
RBW [MHz] VBW [MHz]	1.000000 5.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	0.93	dBm	PASS
Peak Power	---	1000	1.238797	mW	PASS
Frequency at Peak	---	---	2402.242	MHz	INFO

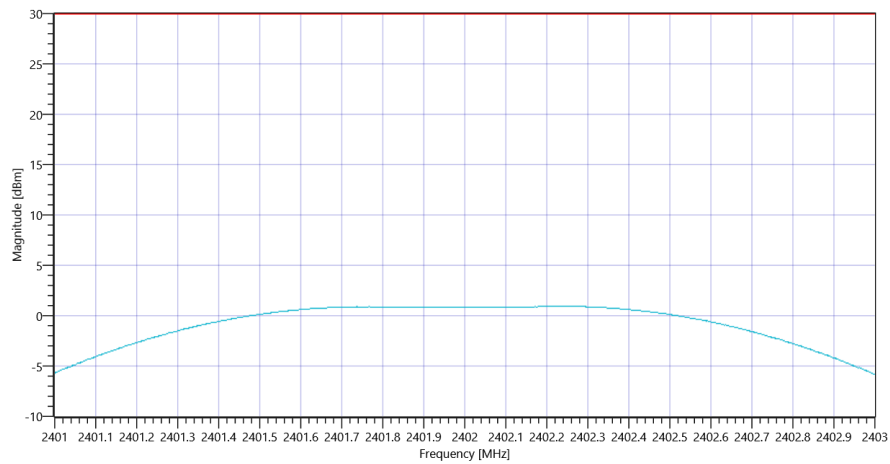


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_09102020_124659.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.93 10.8 15				
Start [MHz] Stop [MHz]	2439.000 2441.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	669	kHz	INFO

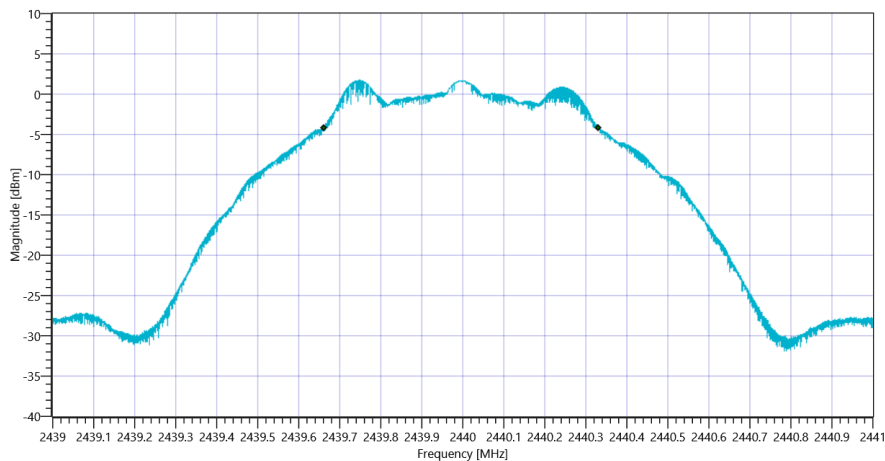

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.93 10.8 20				
Start [MHz] Stop [MHz]	2439.000 2441.000				
RBW [MHz] VBW [MHz]	1.000000 5.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	1.99	dBm	PASS
Peak Power	---	1000	1.581248	mW	PASS
Frequency at Peak	---	---	2440.244	MHz	INFO

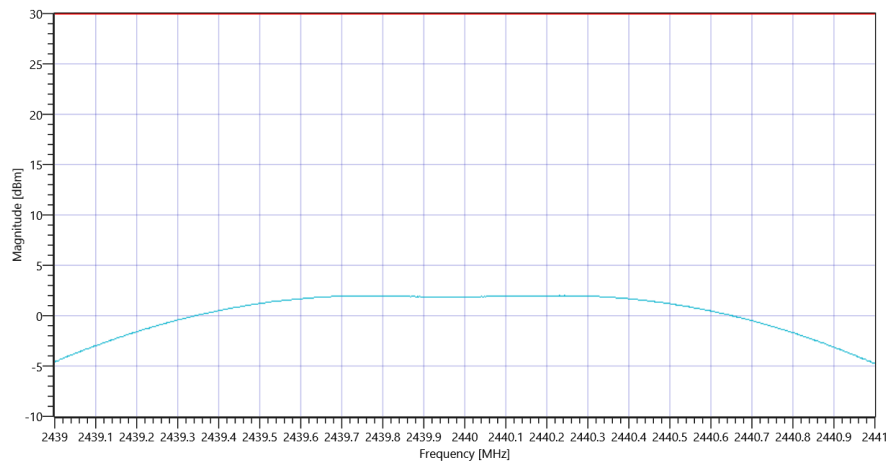


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_09102020_124741.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK


READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.17 10.85 15				
Start [MHz] Stop [MHz]	2479.000 2481.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

DTS Bandwidth					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	670	kHz	INFO

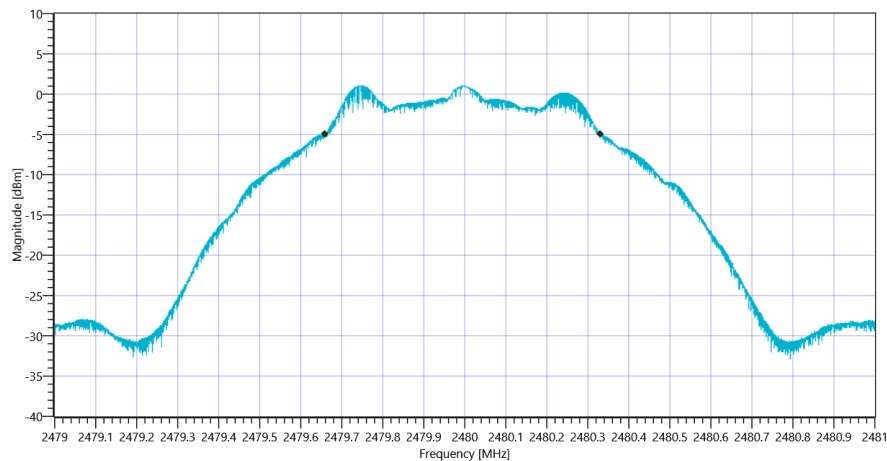

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.17 10.85 20				
Start [MHz] Stop [MHz]	2479.000 2481.000				
RBW [MHz] VBW [MHz]	1.000000 5.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	1.24	dBm	PASS
Peak Power	---	1000	1.330454	mW	PASS
Frequency at Peak	---	---	2480.242	MHz	INFO

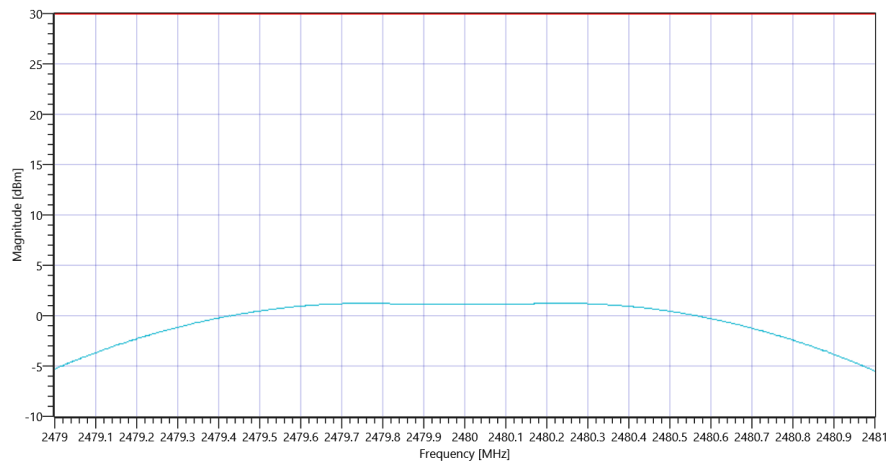

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_09102020_124823.png

TEST FINISHED

General Verdict

09.10.2020 12:48:23 / RT: 126 s

PASS

2. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msp/s

Test References	
TC Start	09.10.2020 12:11:11
Ambit Temp [°C] Humidity [rel%]	24.3 44
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	99
Class / TC Version	TC_VM_FCC15247_Bandwidth_6dB_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msp/s
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msp/s
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.88 10.79 15				
Start [MHz] Stop [MHz]	2401.000 2403.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	673	kHz	PASS

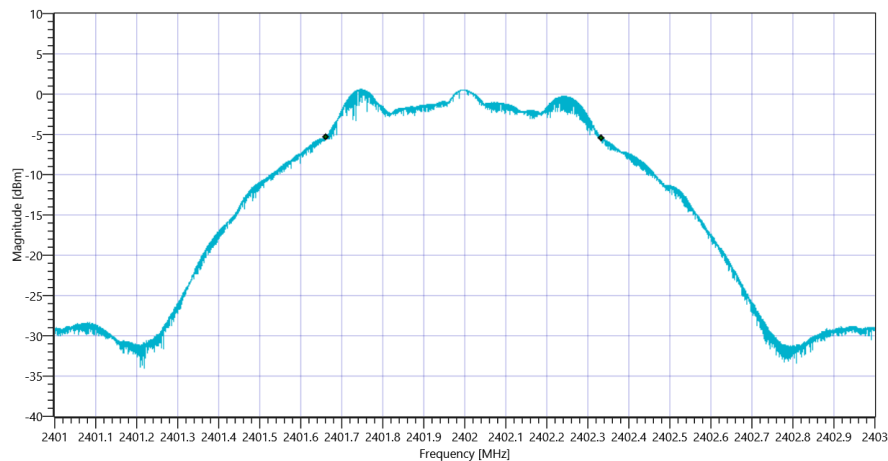


Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_09102020_121138.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.94 10.8 15	
Start [MHz] Stop [MHz]	2439.000 2441.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	668	kHz	PASS

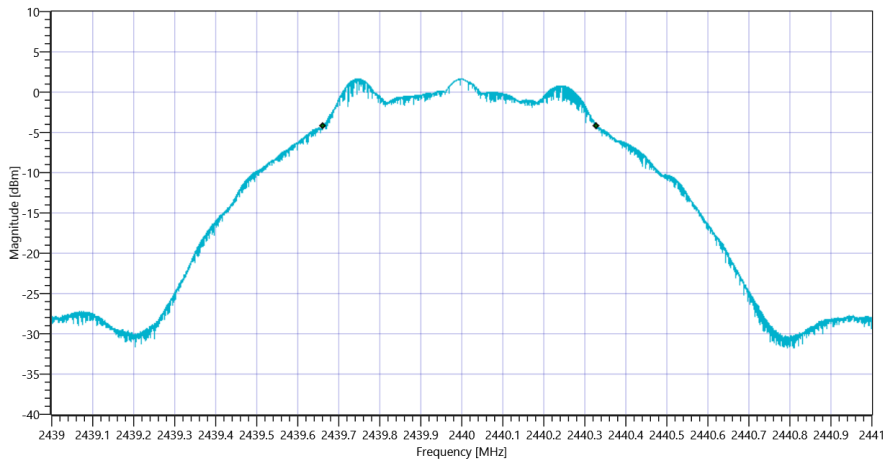


Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_09102020_121203.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.08 10.85 15				
Start [MHz] Stop [MHz]	2479.000 2481.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	670	kHz	PASS

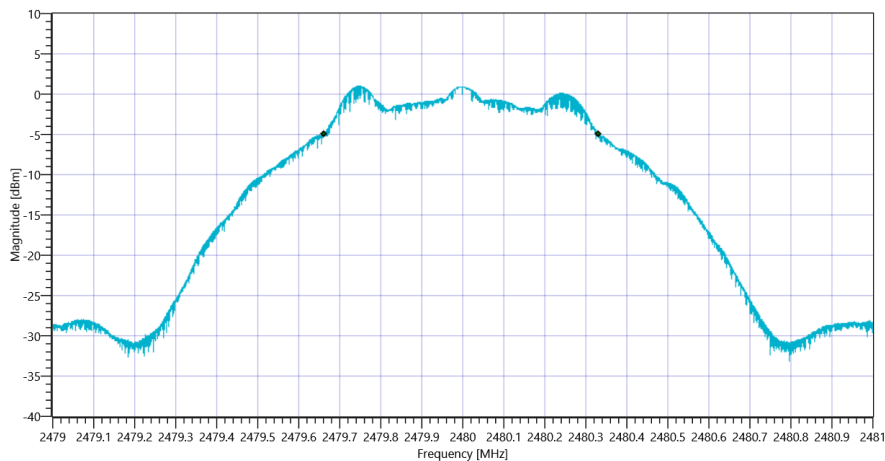

TEST FINISHED		
General Verdict	09.10.2020 12:12:29 / RT: 77 s	PASS

3. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps

Test References	
TC Start	09.10.2020 12:12:34
Ambit Temp [°C] Humidity [rel%]	24.3 44
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.83 10.79 15	
Start [MHz] Stop [MHz]	2401.250 2402.750	
RBW [MHz] VBW [MHz]	0.003000 0.010000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-14.31	dBm/3KHz	PASS

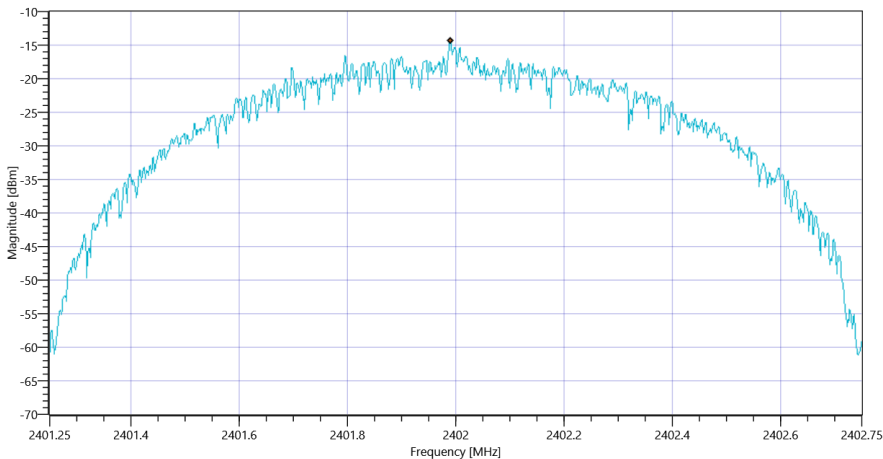


Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_09102020_121310.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.92 10.8 15	
Start [MHz] Stop [MHz]	2439.250 2440.750	
RBW [MHz] VBW [MHz]	0.003000 0.010000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-13.25	dBm/3KHz	PASS

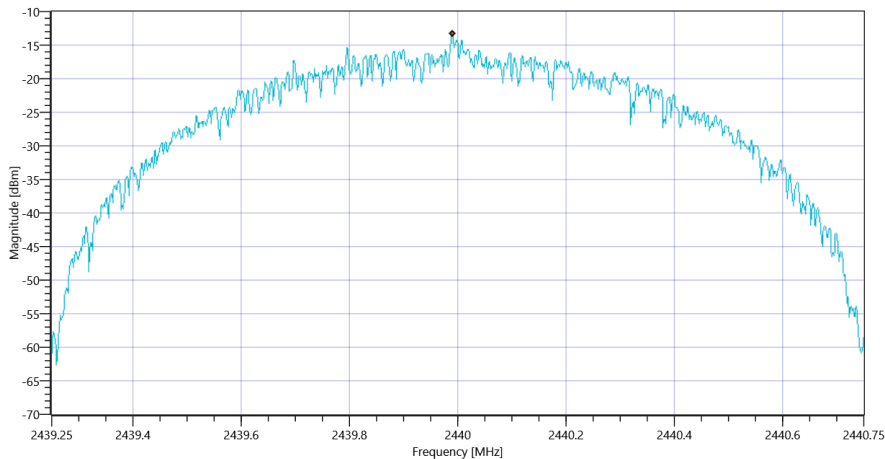


Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.09 10.85 15				
Start [MHz] Stop [MHz]	2479.250 2480.750				
RBW [MHz] VBW [MHz]	0.003000 0.010000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-13.98	dBm/3KHz	PASS

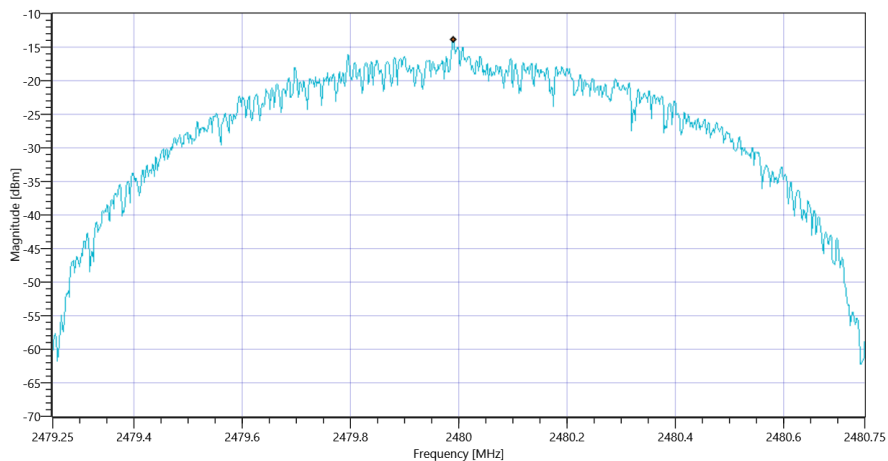

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_09102020_121419.png

TEST FINISHED		
General Verdict	09.10.2020 12:14:20 / RT: 106 s	PASS

4. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	07.12.2020 16:31:57
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	1.0.1.2
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2402 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			5.09 10.91 10		
Start [MHz] Stop [MHz]			2401.000 2403.000		
RBW [MHz] VBW [MHz]			0.020000 0.100000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1060	kHz	INFO
T1 99%	2400.000000	---	2401.4701	MHz	PASS
T2 99%	---	2483.500000	2402.5301	MHz	PASS

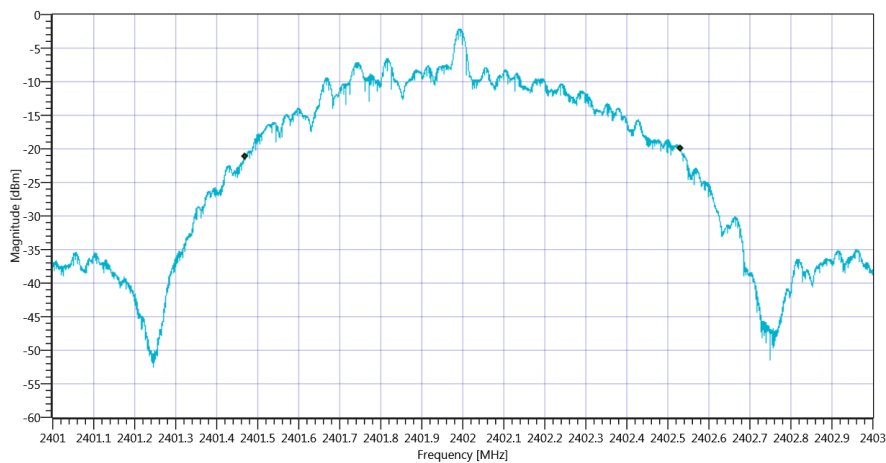

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_07122020_163226.png

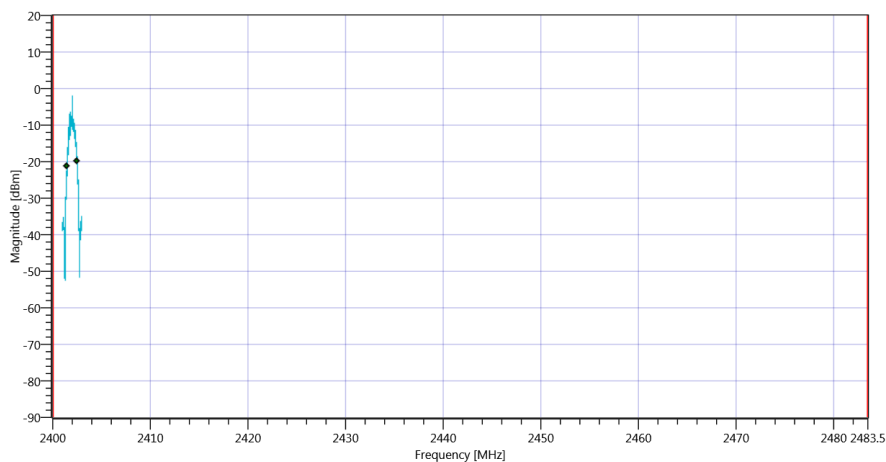

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 07122020_163230.png

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1085	kHz	INFO
T1 20DB	2400.000000	---	2401.4618	MHz	PASS


T2 20dB

2483.500000


2402.5472

MHz

PASS

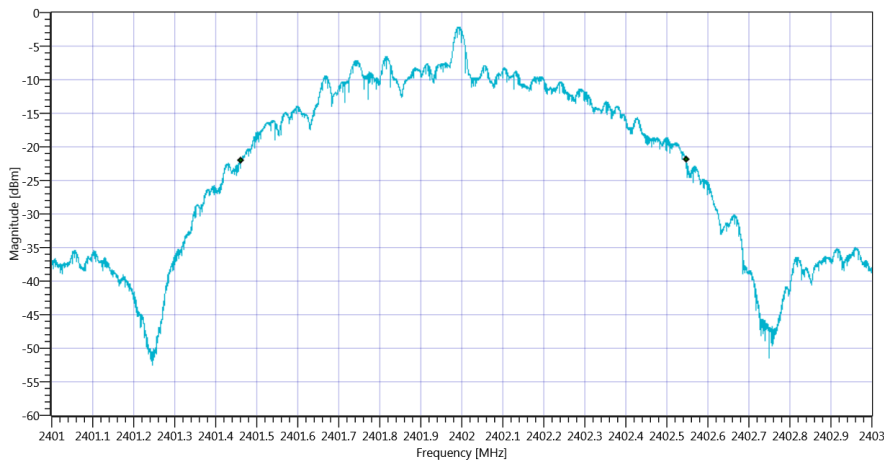

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_07122020_163236.png

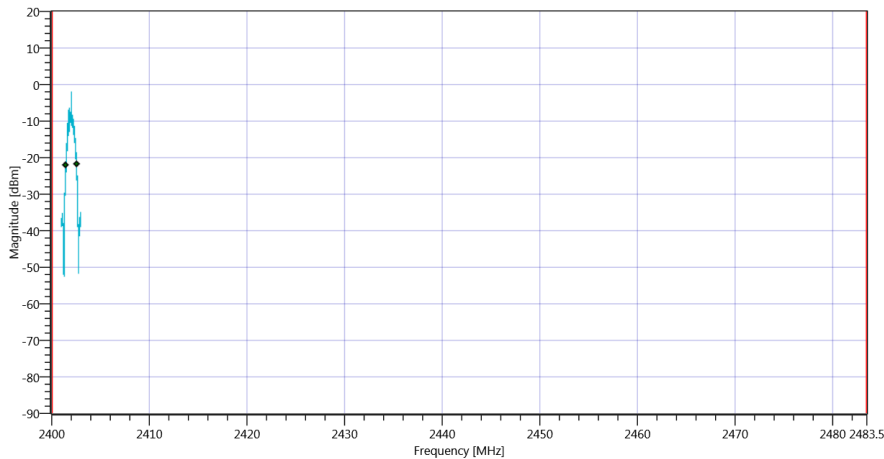



Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_07122020_163240.png

Test at TX 2440 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			5.92 10.99 10		
Start [MHz] Stop [MHz]			2439.000 2441.000		
RBW [MHz] VBW [MHz]			0.020000 0.100000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1060	kHz	INFO
T1 99%	2400.000000	---	2439.4695	MHz	PASS
T2 99%	---	2483.500000	2440.5293	MHz	PASS

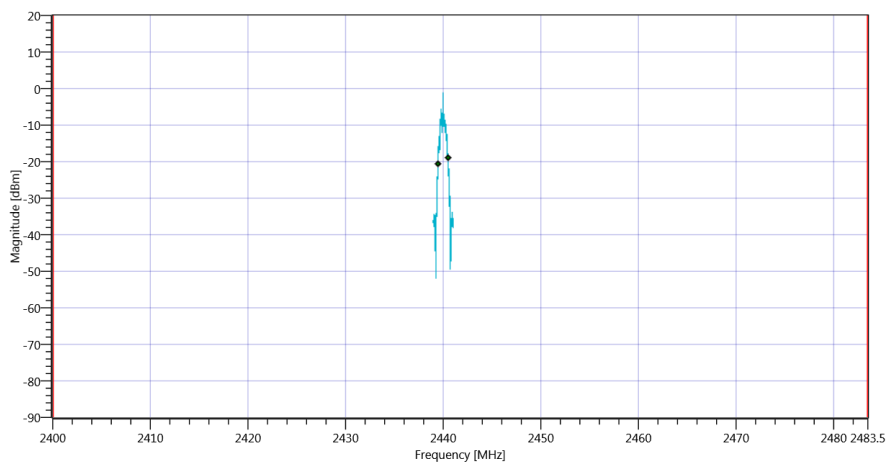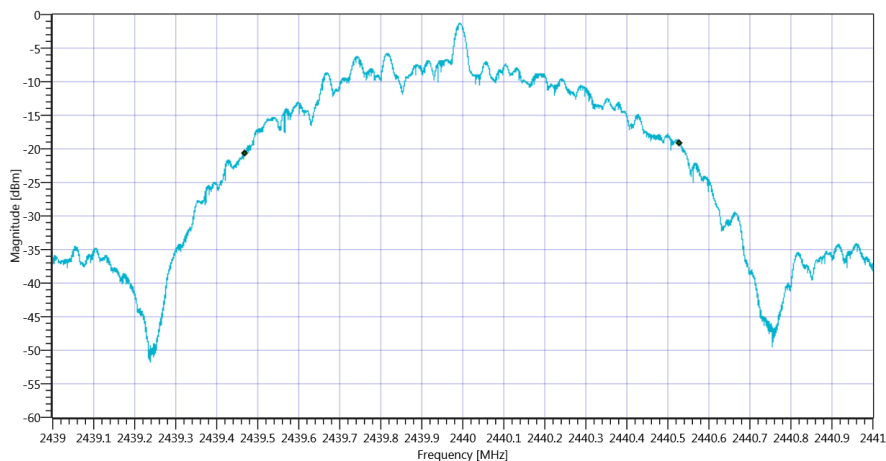

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1087	kHz	INFO
T1 20DB	2400.000000	---	2439.4608	MHz	PASS


T2 20dB

2483.500000


2440.5476

MHz

PASS

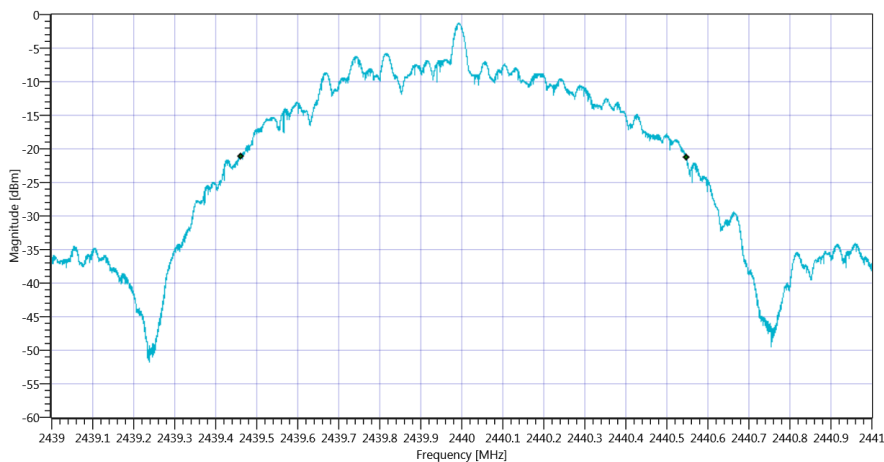

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_07122020_163318.png

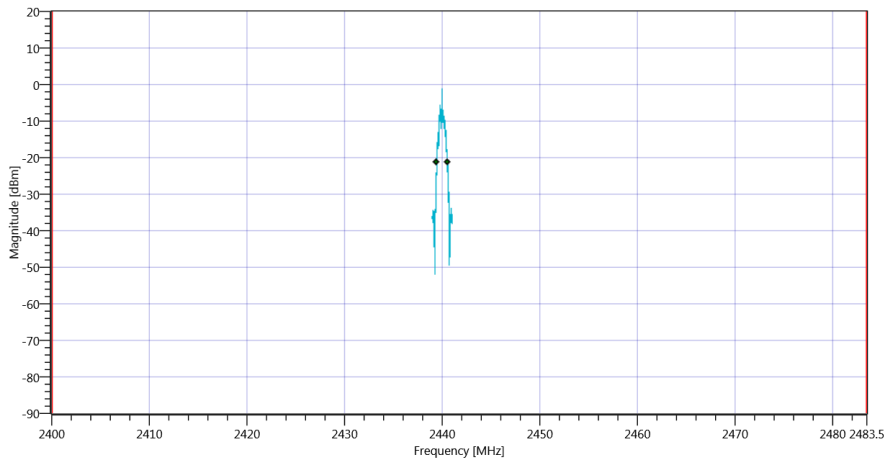



Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_07122020_163322.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			5.65 11.06 10		
Start [MHz] Stop [MHz]			2479.000 2481.000		
RBW [MHz] VBW [MHz]			0.020000 0.100000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			50 200 10001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1060	kHz	INFO
T1 99%	2400.000000	---	2479.4685	MHz	PASS
T2 99%	---	2483.500000	2480.5289	MHz	PASS

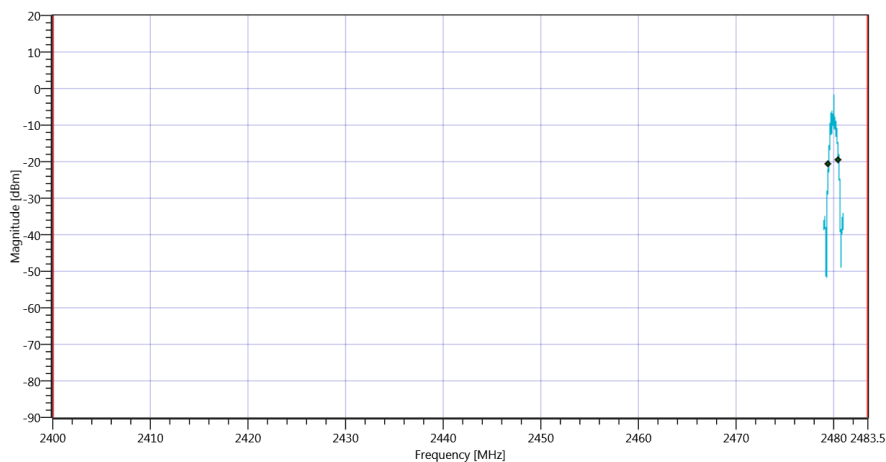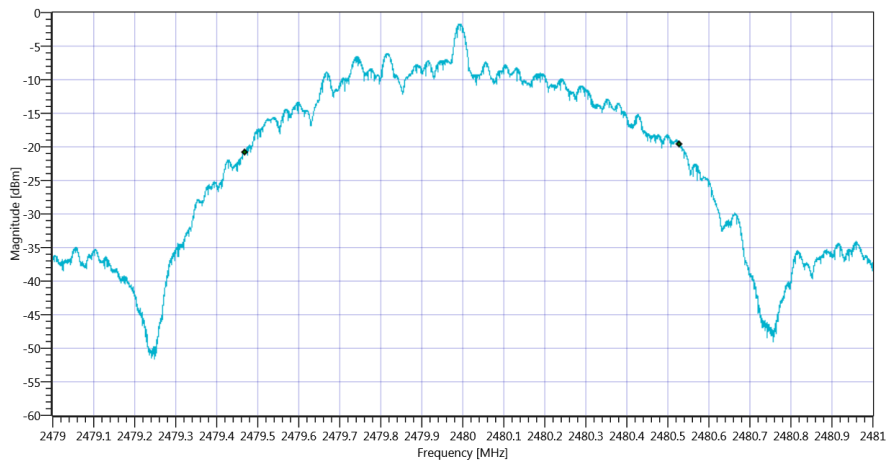

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1088	kHz	INFO
T1 20DB	2400.000000	---	2479.4594	MHz	PASS


T2 20dB

2483.500000


2480.5476

MHz

PASS

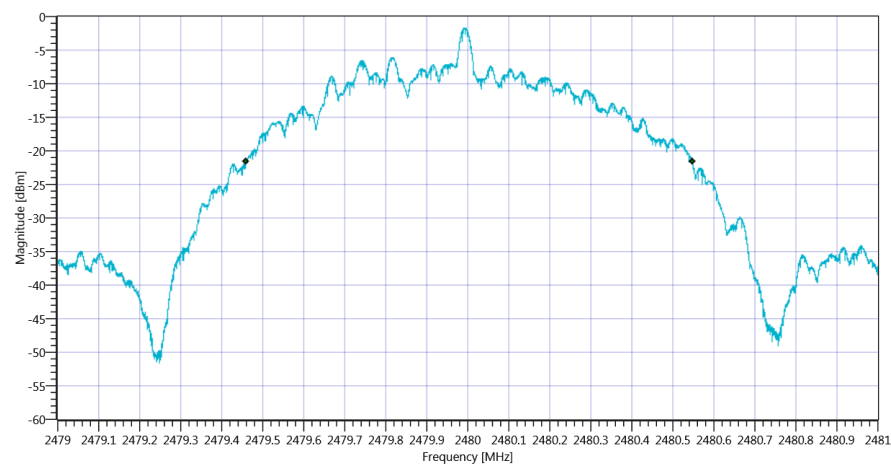

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_07122020_163400.png

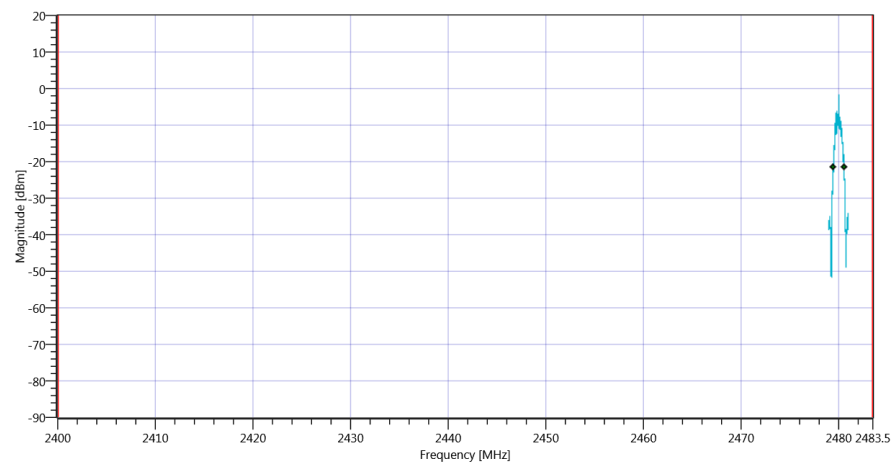

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_07122020_163404.png

TEST FINISHED

General Verdict

07.12.2020 16:34:04 / RT: 126 s

PASS

5. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msp

Test References	
TC Start	09.10.2020 12:31:36
Ambit Temp [°C] Humidity [rel%]	24.3 44
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msp
Add. Information	



Test Parameter	
Technology to test	BT LE 1 Msp
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			0.88 0 20		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			250 10 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.33 MHz	---	---	-0.67	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-135	dB	INFO

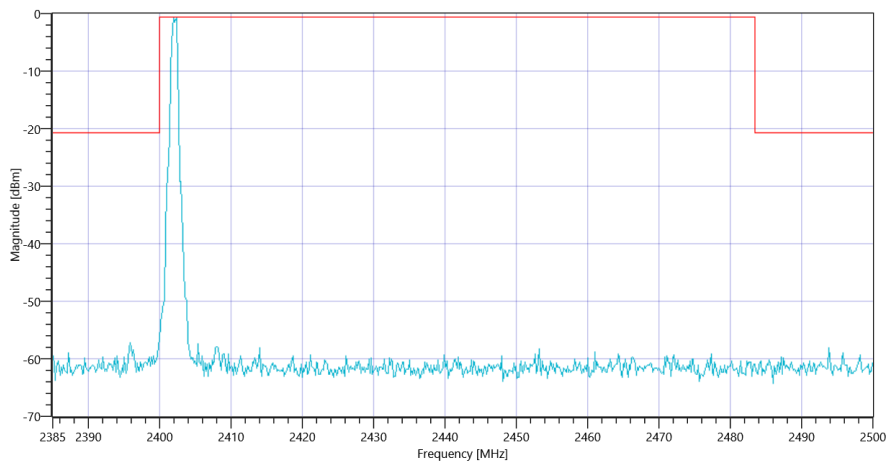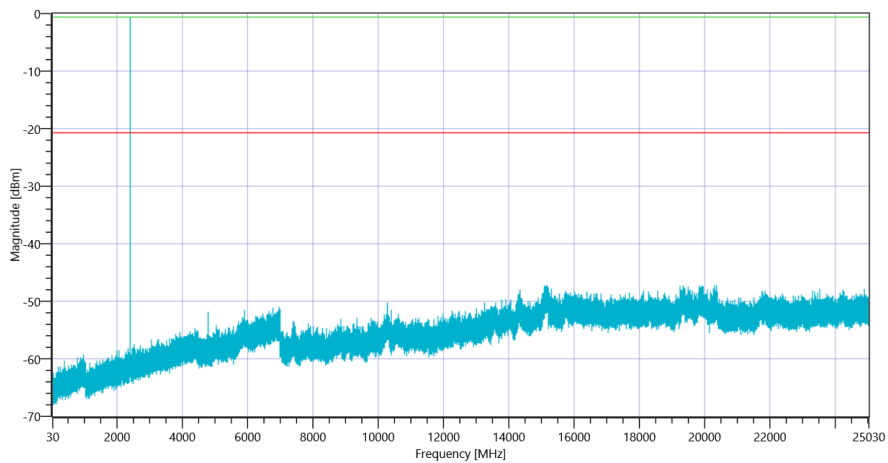


Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			1.96 0 20		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			250 10 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	0.49	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15065.167 MHz	0	---	26.17	dB	INFO

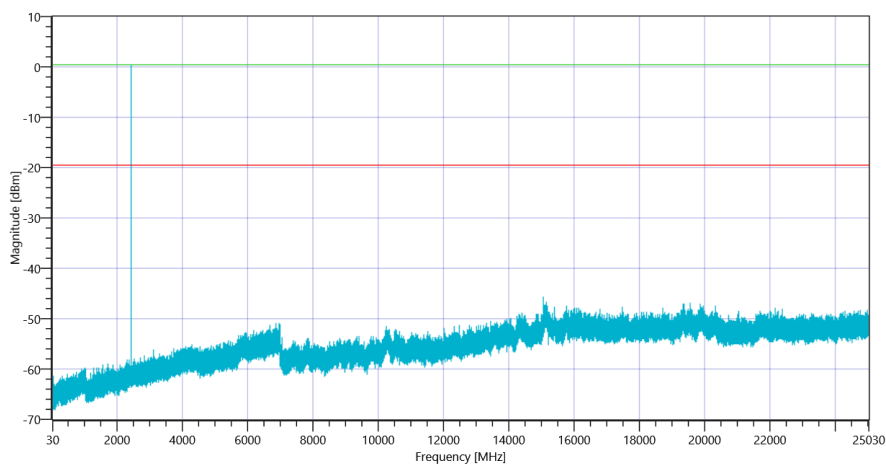

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_09102020_123845.png

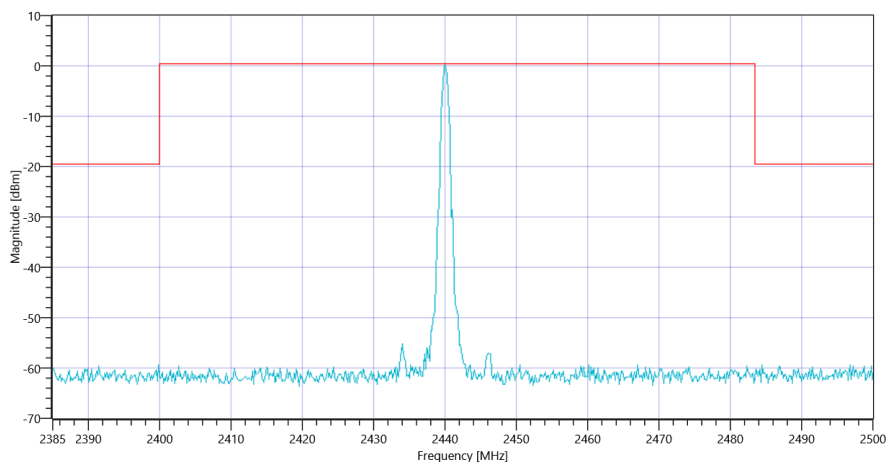


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_09102020_123848.png

Test at TX 2480 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	RESET OK

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			1.12 0 20		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			250 10 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.33 MHz	---	---	-0.59	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 16191.5 MHz	0	---	25.92	dB	INFO

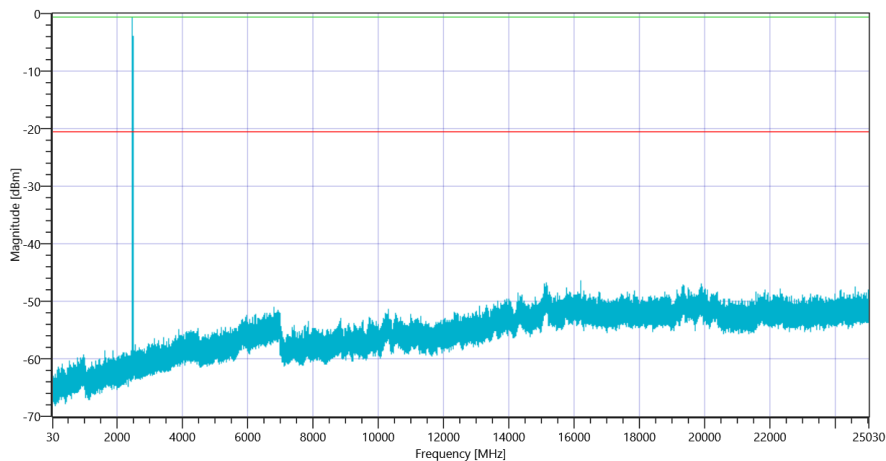

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_09102020_124221.png

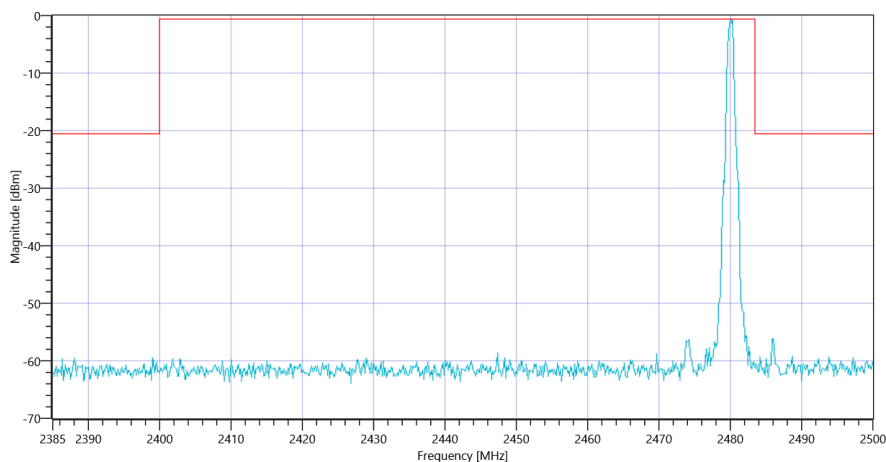

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_09102020_124224.png

TEST FINISHED		
General Verdict	09.10.2020 12:42:25 / RT: 649 s	PASS

- END OF DOCUMENT -
