

Prüfbericht-Nr.: <i>Test report no.:</i>	CN2498LL 002	Auftrags-Nr.: <i>Order no.:</i>	168491157	Seite 1 von 29 <i>Page 1 of 29</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2024-06-26	
Auftraggeber: <i>Client:</i>	SZ DJI Osmo Technology Co., Ltd. Room S11, Floor 23, Tower 1, DJI Sky City, No. 55 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China.			
Prüfgegenstand: <i>Test item:</i>	DJI Mic Mini Transmitter			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	DMMT01 (Trademark: DJI)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 3 August 2023 RSS-Gen Issue 5 February 2021			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2024-06-27	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003761161-017~018 A003754186-004~006			
Prüfzeitraum: <i>Testing period:</i>	2024-07-04 - 2024-07-20			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	Hardy X <i>Hardy</i> <i>Suo</i>		genehmigt von: <i>authorized by:</i>	Bell Hu X <i>Bell Hu</i>
Datum: <i>Date:</i>	2024-07-26		Ausstellungsdatum: <i>Issue date:</i>	2024-07-26
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / <i>Other:</i>	FCC ID: 2ANDR-DMMT01, IC: 23060-DMMT01, HVIN: DMMT01 This report is for Bluetooth dual mode and 2.4GHz SDR.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN2498LL 002
Test report no.:

Seite 2 von 29
Page 2 of 29

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 20dB BANDWIDTH

RESULT: Pass

5.1.7 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.8 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.9 TIME OF OCCUPANCY

RESULT: Pass

5.1.10 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.11 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.12 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES.....	6
2.1	TEST FACILITIES.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY.....	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	8
3	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS	9
3.3	INDEPENDENT OPERATION MODES	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	12
3.5	SUBMITTED DOCUMENTS.....	12
4	TEST SET-UP AND OPERATION MODES	13
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	13
4.2	TEST OPERATION AND TEST SOFTWARE.....	13
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	13
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	13
4.5	TEST SETUP DIAGRAM	14
5	TEST RESULTS.....	16
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	16
5.1.1	<i>Antenna Requirement.....</i>	<i>16</i>
5.1.2	<i>Maximum Peak Conducted Output Power.....</i>	<i>17</i>
5.1.3	<i>Conducted Power Spectral Density.....</i>	<i>19</i>
5.1.4	<i>6dB Bandwidth</i>	<i>20</i>
5.1.5	<i>99% Bandwidth</i>	<i>21</i>
5.1.6	<i>20dB Bandwidth</i>	<i>22</i>
5.1.7	<i>Carrier Frequency Separation.....</i>	<i>23</i>
5.1.8	<i>Number of Hopping Frequency.....</i>	<i>24</i>
5.1.9	<i>Time of Occupancy</i>	<i>25</i>
5.1.10	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth.....</i>	<i>26</i>
5.1.11	<i>Radiated Spurious Emission.....</i>	<i>27</i>
5.1.12	<i>Conducted Emission on AC Mains.....</i>	<i>28</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	29
7	LIST OF TABLES	29

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of Bluetooth BR & EDR

Appendix B: Test Results of Bluetooth LE

Appendix C: Test Results of 2.4GHz SDR

Appendix D: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

FCC Accreditation Designation No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2023-07-26	2024-07-25
OSP	R&S	OSP 150	101017	2023-11-14	2024-11-13
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2023-11-14	2024-11-13
Wideband Power Sensor	R&S	NRP-Z81	105677	2023-07-26	2024-07-25
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-21	2025-06-20
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2023-07-26	2024-07-25
Signal Analyzer	R&S	FSV 40	101439	2023-07-26	2024-07-25
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2023-07-26	2024-07-25
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-07-26	2024-07-25
Amplifier	R&S	SCU-18F	180070	2023-07-26	2024-07-25
Amplifier	R&S	SCU40A	100475	2023-07-26	2024-07-25
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-07	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-07	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-28	2024-08-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-08-07	2024-08-06

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:

Seite 7 von 29

Page 7 of 29

Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-21	2025-06-20

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2024-07-30
Artificial Mains Network	R&S	ENV216	102333	2024-07-31
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	±4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C & D of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:

Seite 8 von 29
Page 8 of 29

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The Product is DJI Mic Mini Transmitter which supports Bluetooth dual mode and 2.4GHz SDR functions.

*Remark: SDR means specific defined radio and cannot changes radio specification via software/firmware by end-users.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	DJI Mic Mini Transmitter
Type Designation:	DMMT01
Trademark:	DJI
FCC ID:	2ANDR-DMMT01
IC:	23060-DMMT01
HVIN:	DMMT01
Operating Voltage:	Built-in battery DC 3.87V, or Charging by Charging Dock (MN: DMMD01) DC 5V, or Charging by Charging Case (MN: DMMC01) DC 5V
Testing Voltage:	Fully charged battery or AC 120V, 60Hz
Operating Temperature Range:	-10°C ~ +45 °C
Radiofrequency operating mode:	1) Bluetooth: operating within 2400-2483.5MHz, Classic Bluetooth (BR&EDR), Bluetooth BLE (1Mbps&2Mbps) 2) 2.4GHz SDR: operating within 2400-2483.5MHz, supports 2MHz Bandwidth
Technical Specification of Bluetooth (dual mode)	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	BR & EDR mode:79 channels, Low Energy mode:40 channels
Channel Separation:	BR & EDR mode:1MHz, Low Energy mode:2MHz
Data Rate:	BR & EDR mode:(1Mbps, 2Mbps, 3Mbps) Low Energy mode: (1Mbps, 2Mbps)
Antenna Type:	Integral Antenna
Antenna Number:	1
Antenna Gain:	0 dBi (Provided by the Client)
Technical Specification of 2.4GHz SDR	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Channel Number:	40 channels
Channel Separation:	2MHz

Data Rate:	2Mbps
Antenna Type:	Integral Antenna
Antenna Number:	1
Antenna Gain:	0 dBi (Provided by the Client)
Remark: Bluetooth (dual mode) and 2.4GHz SDR share the same transmitter antenna.	

Table 4: RF Channel and Frequency of Bluetooth BR & EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for Bluetooth BR & EDR

Table 5: RF Channel and Frequency of Bluetooth LE

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478

9	2420	19	2440	29	2460	39	2480
---	------	-----------	-------------	----	------	-----------	-------------

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz for Bluetooth LE

Table 6: RF Channel and Frequency of 2.4GHz SDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz for 2.4GHz SDR

3.3 Independent Operation Modes

The basic operation modes are:

A. On, Bluetooth transmitting mode (BR & EDR mode)

- 1) Low Channel
- 2) Middle Channel
- 3) High Channel

B. On, Bluetooth transmitting mode (BLE)

- 1) Low Channel
- 2) Middle Channel
- 3) High Channel

C. On, 2.4GHz SDR transmitting mode

- 1) Low Channel
- 2) Middle Channel
- 3) High Channel

D. On, Transmitting on Hopping channel

E. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|------------------------------|-------------------------|
| - Application Form | - User Manual |
| - ID Label and Location Info | - Operation Description |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model DMMT01 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 7: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Laptop	Lenovo	T480	S/N: PF-16A6N8
DJI Mic Mini Charging Dock	/	DMMD01	/
AC/DC Adapter	HUAWEI	HW-100225C00	Input: 100-240V, 50/60Hz, 0.75A Output: 5V, 2A or 9V/2A or 10V/2.25A MAX

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

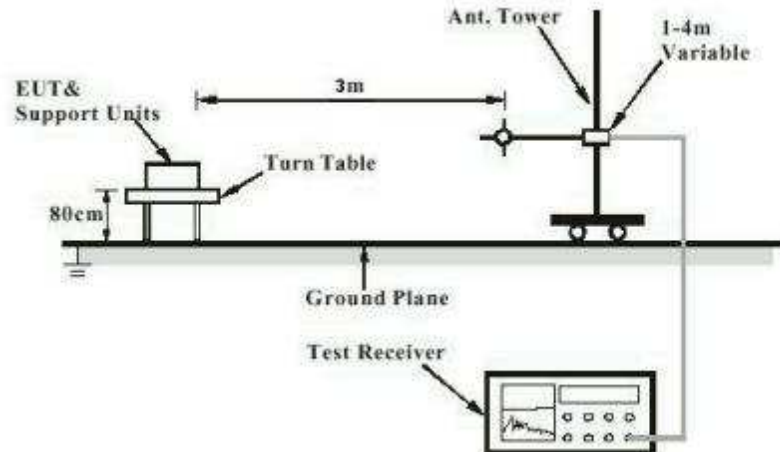


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

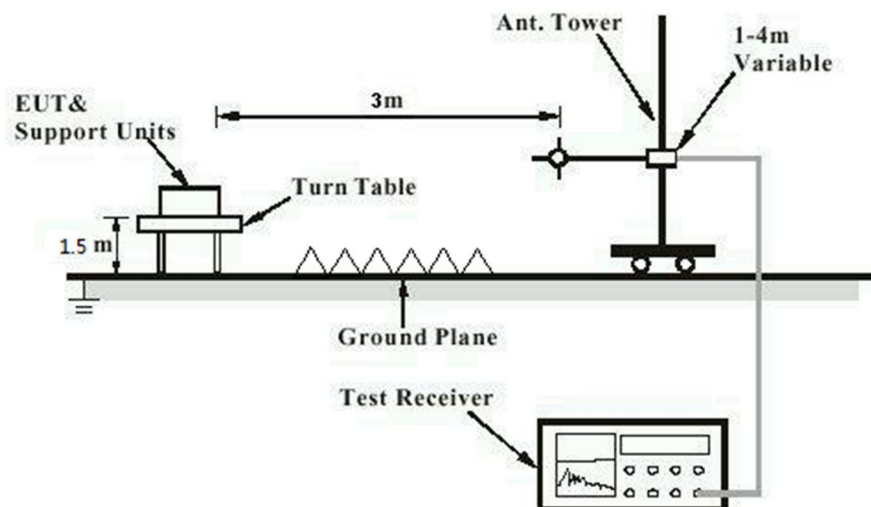


Diagram of Measurement Configuration for Mains Conduction Measurement


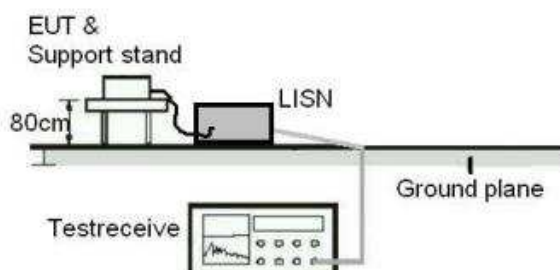


Diagram of Measurement Configuration for Conducted Transmitter Measurement

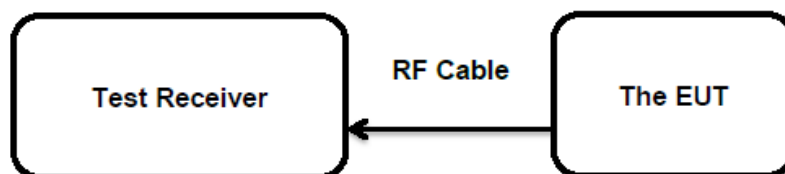

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has an Integral Antenna, the directional gain of antenna is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 17 von 29
Page 17 of 29

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(b)(1)&(3) RSS-247 Clause 5.4(b)&(d)
Basic standard	: ANSI C63.10: 2013
Limits	: FHSS < 0.125 Watts, DSSS < 1.0 Watts
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-17
Input voltage	: Fully charged battery
Operation mode	: A, B, C
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For details refer to following test result.

Table 8: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BR)	2402.0	14.17	0.0261	< 0.125
	2441.0	12.03	0.0160	
	2480.0	12.92	0.0196	
8DPSK (EDR)	2402.0	14.36	0.0273	
	2441.0	13.92	0.0247	
	2480.0	13.17	0.0207	
Maximum Measured Value		14.36	0.0273	
Max. e.i.r.p.=14.36dBm+0dBi=14.36dBm, which is less than 36dBm=4W.				

Table 9: Test Result of Maximum Peak Conducted Output Power, Bluetooth LE

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Power		Limit (W)
			(dBm)	(W)	
Bluetooth LE	1 Mbps	2402	8.97	0.0079	< 1.0
		2440	10.44	0.0111	
		2480	10.84	0.0121	
	2 Mbps	2402	11.17	0.0131	
		2440	10.02	0.0100	
		2480	10.47	0.0111	
Maximum Measured Value			11.17	0.0131	
Max. e.i.r.p.=11.17dBm+0dBi=11.17dBm, which is less than 36dBm=4W.					

Table 10: Test Result of Maximum Peak Conducted Output Power, 2.4GHz SDR

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Power		Limit (W)
			(dBm)	(W)	
2.4GHz SDR	2 Mbps	2402	13.91	0.0246	< 1.0
		2440	13.74	0.0237	
		2480	12.74	0.0188	
Maximum Measured Value			13.91	0.0246	
Max. e.i.r.p.=13.91dBm+0dBi=13.91dBm, which is less than 36dBm=4W.					

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 0 dBi for Bluetooth & 2.4GHz SDR

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 19 von 29
Page 19 of 29

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(e) RSS-247 Clause 5.2(b)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-17
Input voltage	: Fully charged battery
Operation mode	: B, C
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B, C.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 20 von 29
Page 20 of 29

5.1.4 6dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(2) RSS-247 Clause 5.2(a)
Basic standard	: ANSI C63.10: 2013
Limits	: > 500 KHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-17
Input voltage	: Fully charged battery
Operation mode	: B, C
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B, C.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 21 von 29
Page 21 of 29

5.1.5 99% Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a) RSS-Gen Clause 6.7
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-17
Input voltage	: Fully charged battery
Operation mode	: A, B, C
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A, B, C.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 22 von 29
Page 22 of 29

5.1.6 20dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(a)
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-15
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 23 von 29
Page 23 of 29

5.1.7 Carrier Frequency Separation

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(b)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-15
Input voltage	: Fully charged battery
Operation mode	: D
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 24 von 29
Page 24 of 29

5.1.8 Number of Hopping Frequency

RESULT:**Pass****Test Specification**

Test standard	: FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)
Basic standard	: ANSI C63.10: 2013
Limits	: ≥ 15 non-overlapping channels
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-15
Input voltage	: Fully charged battery
Operation mode	: D
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

5.1.9 Time of Occupancy

RESULT:**Pass****Test Specification**

Test standard	: FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)
Basic standard	: ANSI C63.10: 2013
Limits	: < 0.4s
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-15
Input voltage	: Fully charged battery
Operation mode	: D
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2498LL 002

Test Report No.:

Seite 26 von 29

Page 26 of 29

5.1.10 Conducted Spurious Emissions Measured in 100 kHz Bandwidth**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-12 to 2024-07-17
Input voltage	: Fully charged battery
Operation mode	: A, B, C
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix A, B, C.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 27 von 29
Page 27 of 29

5.1.11 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Section 8.9 & 8.10
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2024-07-04 to 2024-07-20
Input voltage	: Fully charged battery
Operation mode	: A, B, C
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A, B, C.

Prüfbericht - Nr.: CN2498LL 002
Test Report No.:Seite 28 von 29
Page 28 of 29**5.1.12 Conducted Emission on AC Mains****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-Gen Section 8.8
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Classification	: Class B
Limits	: FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-08
Input voltage	: AC 120V, 60Hz
Operation mode	: B, C
Earthing	: Not connected
Ambient temperature	: 23.7 °C
Relative humidity	: 52.2 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B, C.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix D.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT.....	9
Table 4: RF Channel and Frequency of Bluetooth BR & EDR.....	10
Table 5: RF Channel and Frequency of Bluetooth LE.....	10
Table 6: RF Channel and Frequency of 2.4GHz SDR.....	11
Table 7: List of Accessories and Auxiliary Equipment.....	13
Table 8: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR.....	18
Table 9: Test Result of Maximum Peak Conducted Output Power, Bluetooth LE.....	18
Table 10: Test Result of Maximum Peak Conducted Output Power, 2.4GHz SDR.....	18

Appendix A: Test Results of Bluetooth BR & EDR

APPENDIX A: TEST RESULTS OF BLUETOOTH BR & EDR	1
APPENDIX A.1: TEST RESULTS OF 99% BANDWIDTH.....	2
<i>BR mode (DH5).....</i>	<i>2</i>
<i>EDR mode (3-DH5).....</i>	<i>5</i>
APPENDIX A.2: TEST RESULTS OF 20dB BANDWIDTH	8
<i>BR mode (DH5).....</i>	<i>8</i>
<i>EDR mode (3-DH5).....</i>	<i>11</i>
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION.....	14
<i>BR mode (DH5).....</i>	<i>14</i>
<i>EDR mode (3-DH5).....</i>	<i>15</i>
APPENDIX A.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY.....	17
<i>BR mode (DH5).....</i>	<i>17</i>
<i>EDR mode (3-DH5).....</i>	<i>18</i>
APPENDIX A.5: TEST RESULTS OF TIME OF OCCUPANCY	19
<i>BR mode (DH5).....</i>	<i>19</i>
<i>EDR mode (3-DH5).....</i>	<i>22</i>
APPENDIX A.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH	25
<i>BR mode (DH5).....</i>	<i>25</i>
<i>Fixed mode, Band Edge.....</i>	<i>25</i>
<i>Fixed mode, Conducted Spurious Emission.....</i>	<i>26</i>
<i>Hopping Mode, Band Edge.....</i>	<i>29</i>
<i>Hopping Mode, Conducted Spurious Emission.....</i>	<i>30</i>
<i>EDR mode (3-DH5).....</i>	<i>31</i>
<i>Fixed mode, Band Edge.....</i>	<i>31</i>
<i>Fixed mode, Conducted Spurious Emission.....</i>	<i>32</i>
<i>Hopping Mode, Band Edge.....</i>	<i>35</i>
<i>Hopping Mode, Conducted Spurious Emission.....</i>	<i>36</i>
APPENDIX A.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS.....	37
30MHz - 1GHz.....	37
1GHz - 18GHz.....	39
APPENDIX A.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	51

Appendix A.1: Test Results of 99% Bandwidth

BR mode (DH5)

Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.880000	---	---	2401.562500	2402.442500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

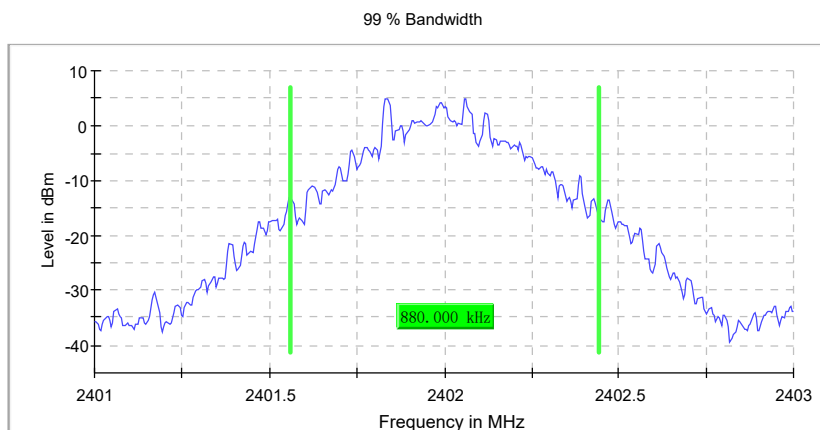

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB

Occupied Channel Bandwidth 99% (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	0.865000	---	---	2440.567500	2441.432500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

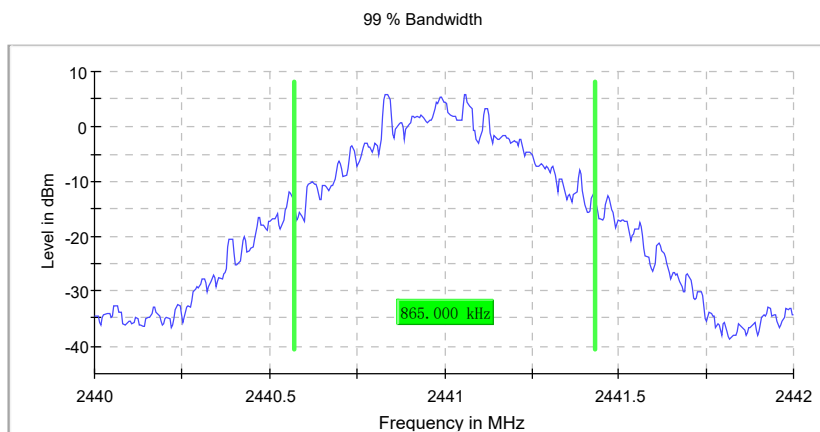

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.860000	---	---	2479.567500	2480.427500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

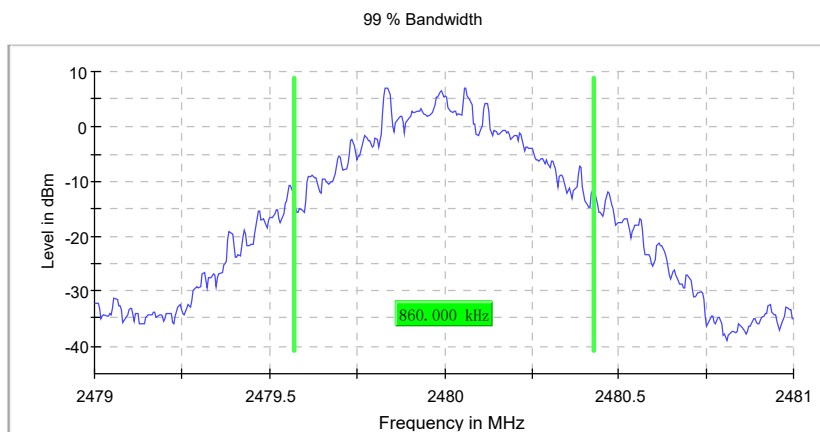

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB

EDR mode (3-DH5)

Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.190000	---	---	2401.412500	2402.602500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

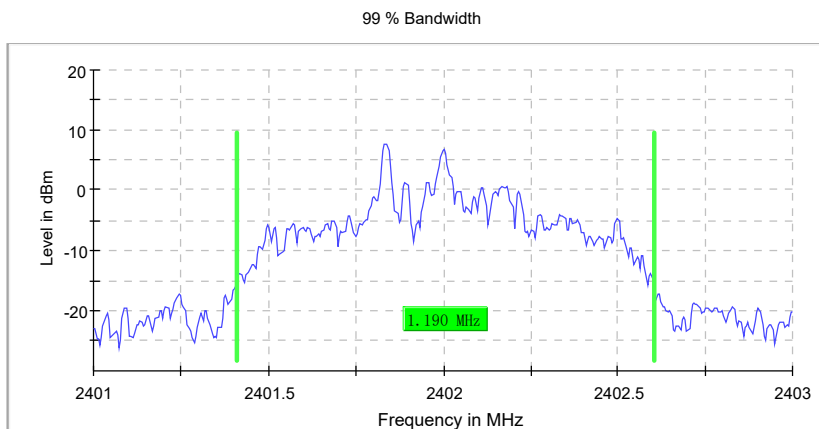

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.30 dB

Occupied Channel Bandwidth 99% (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	1.210000	---	---	2440.402500	2441.612500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

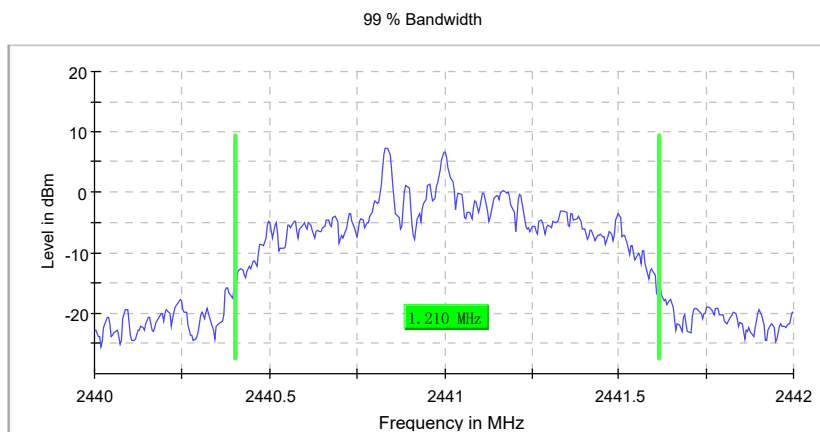

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.225000	---	---	2479.387500	2480.612500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

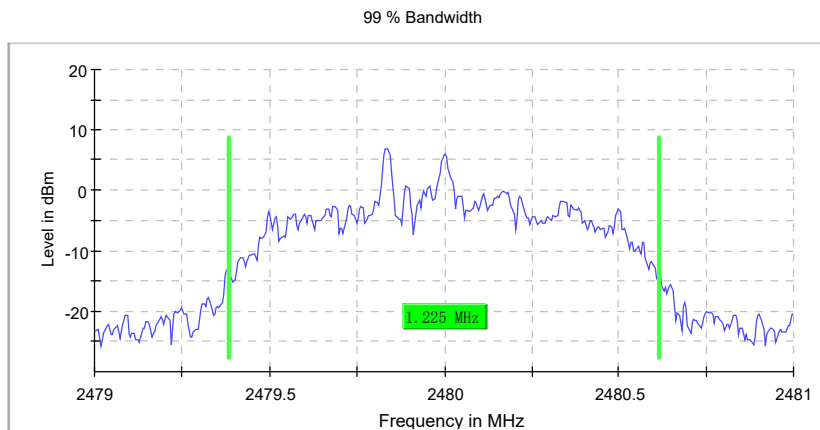

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB

Appendix A.2: Test Results of 20dB Bandwidth

BR mode (DH5)

Emission Bandwidth 20 dB (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.930000	---	---	2401.547500	2402.477500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	2.3	PASS

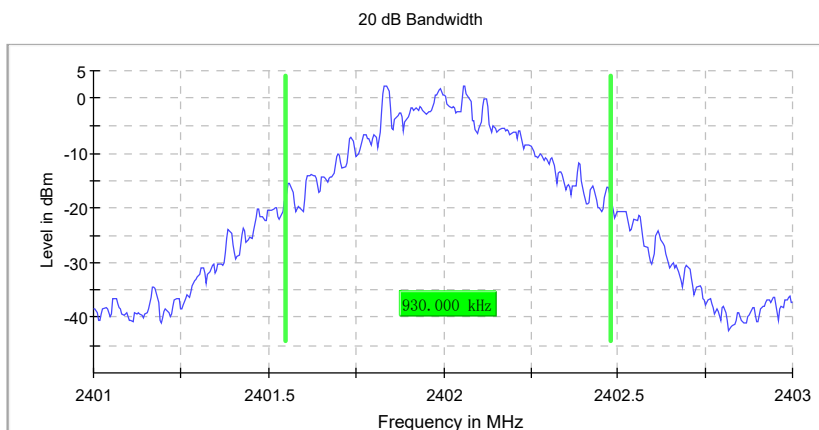

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.11 dB	0.50 dB

Emission Bandwidth 20 dB (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	0.930000	---	---	2440.547500	2441.477500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2441.000000	6.0	PASS

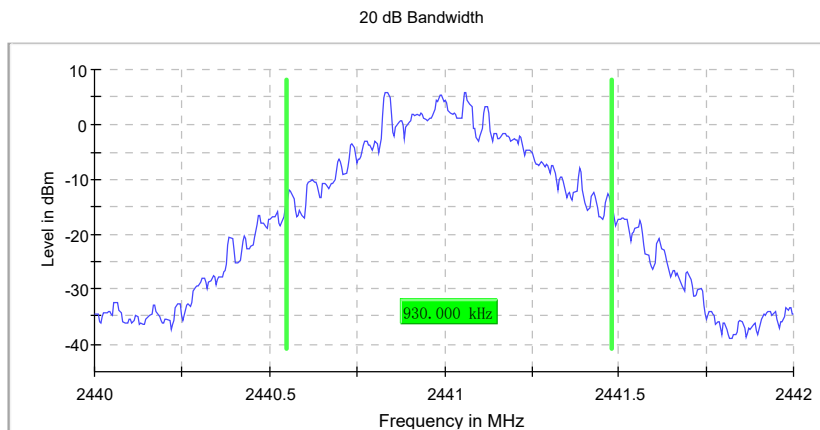

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.09 dB	0.50 dB

Emission Bandwidth 20 dB (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.930000	---	---	2479.547500	2480.477500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	7.0	PASS

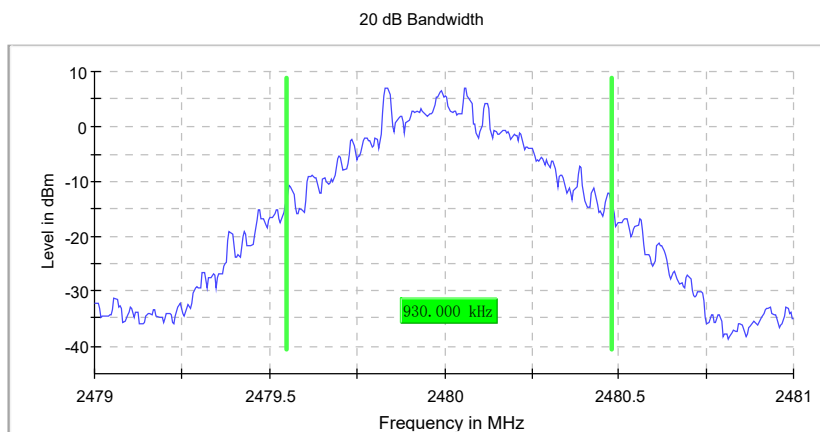

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.11 dB	0.50 dB

EDR mode (3-DH5)

Emission Bandwidth 20 dB (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.130000	---	---	2401.447500	2402.577500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	7.5	PASS

20 dB Bandwidth

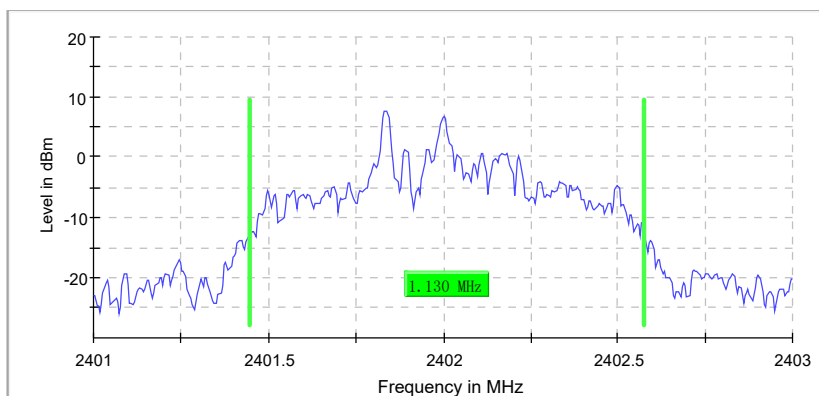

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.32 dB	0.50 dB

Emission Bandwidth 20 dB (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	1.185000	---	---	2440.412500	2441.597500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2441.000000	7.4	PASS

20 dB Bandwidth

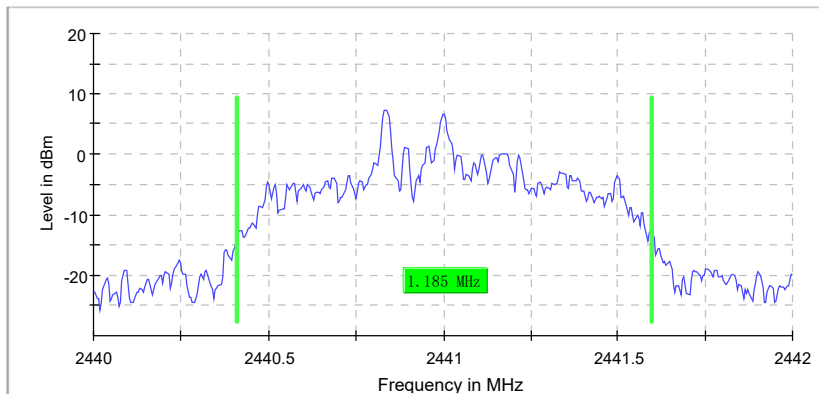

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Emission Bandwidth 20 dB (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.230000	---	---	2479.377500	2480.607500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	6.9	PASS

20 dB Bandwidth


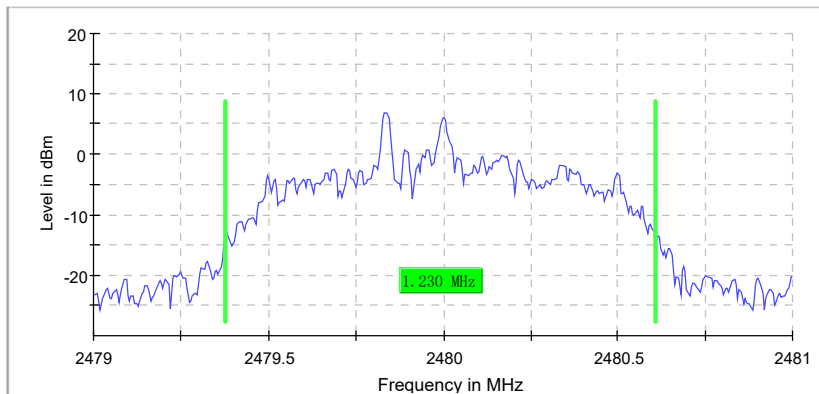



Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.09 dB	0.50 dB


Appendix A.3: Test Results of Carrier Frequency Separation


BR mode (DH5)

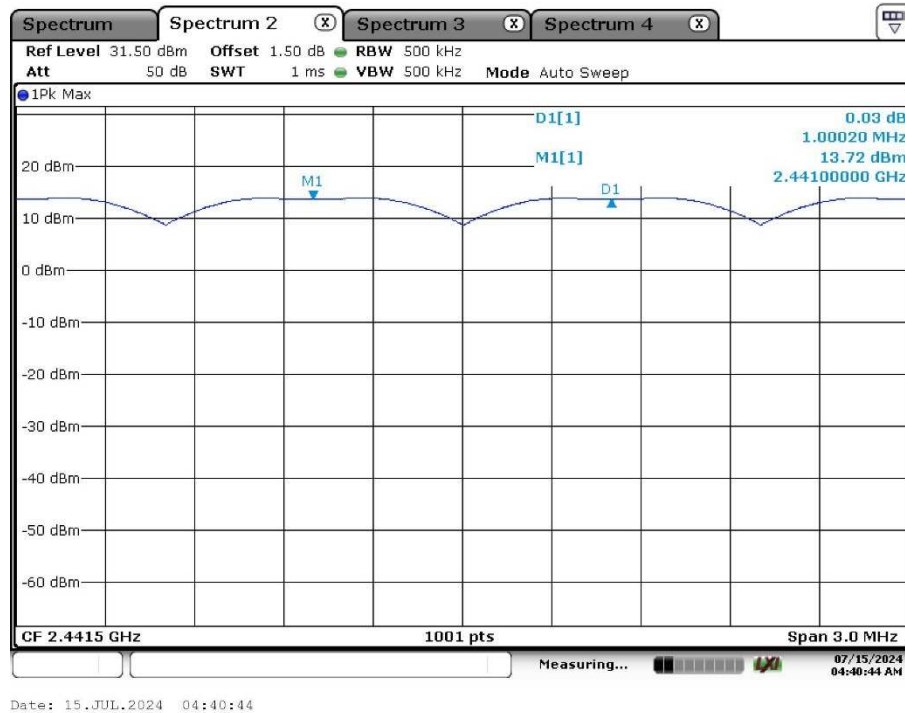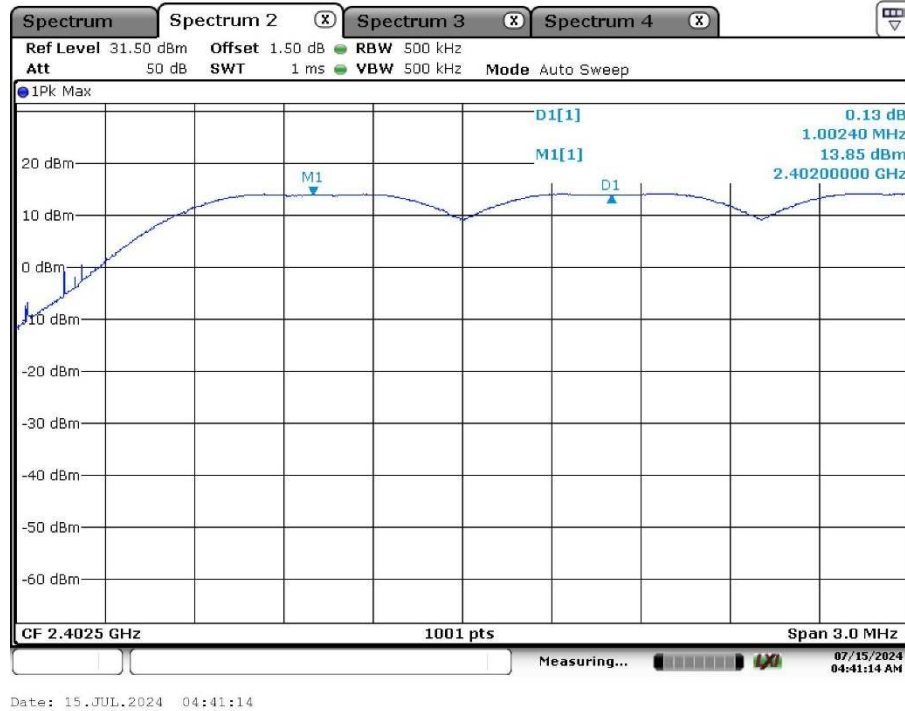

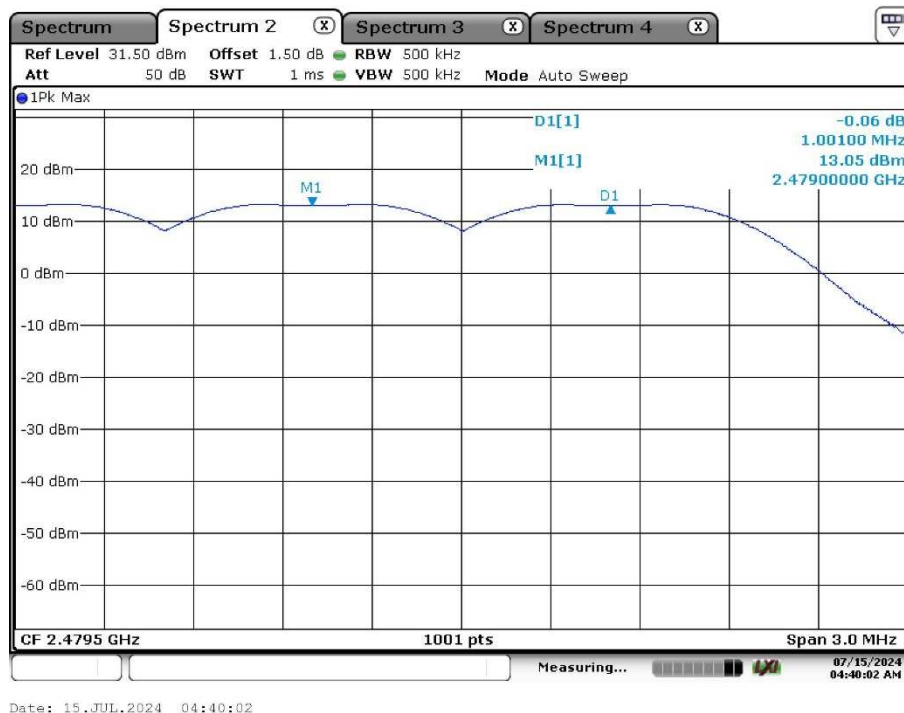


EDR mode (3-DH5)

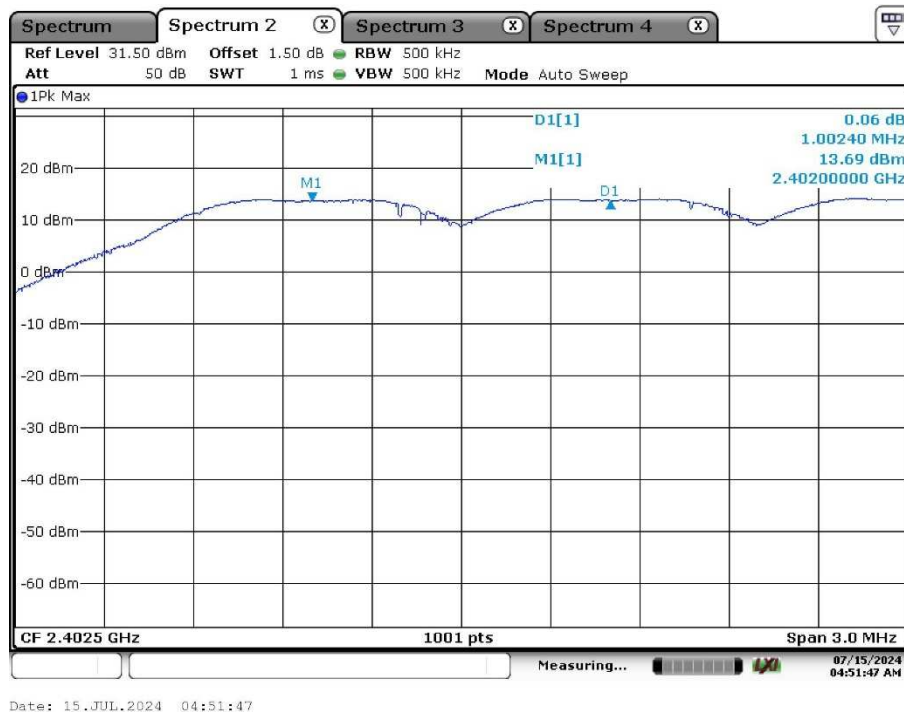

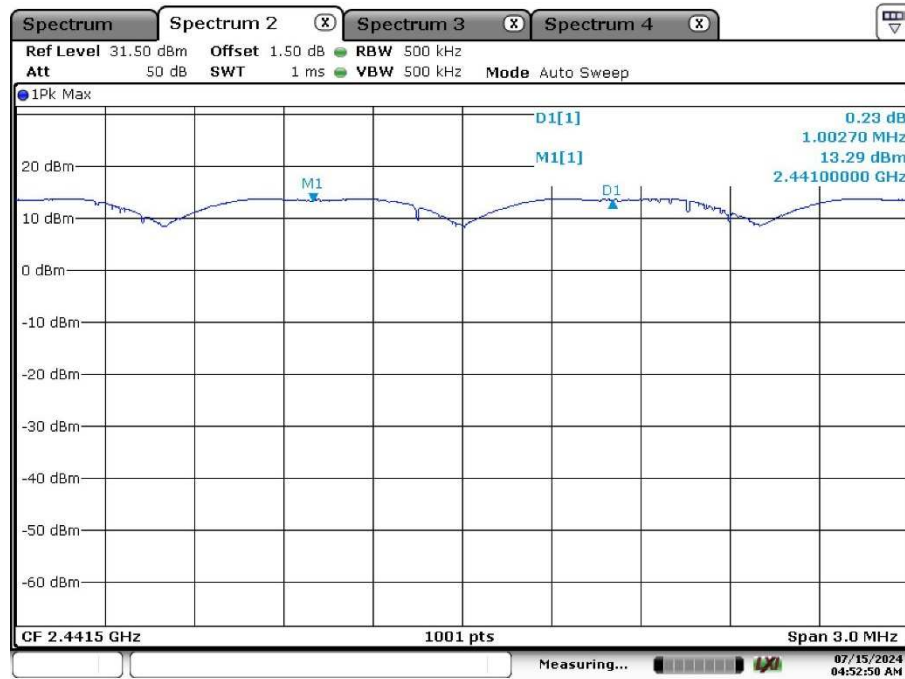

Date: 15.JUL.2024 04:52:50

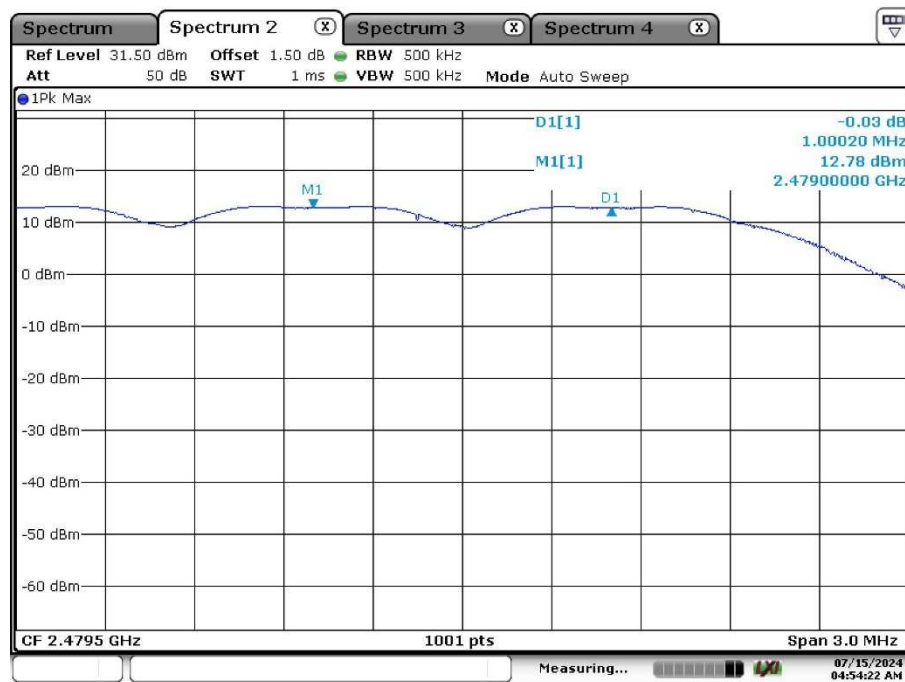

Date: 15.JUL.2024 04:54:22

Appendix A.4: Test Results of Number of Hopping Frequency


BR mode (DH5)

Hopping Frequencies (frequency independent; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(g), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

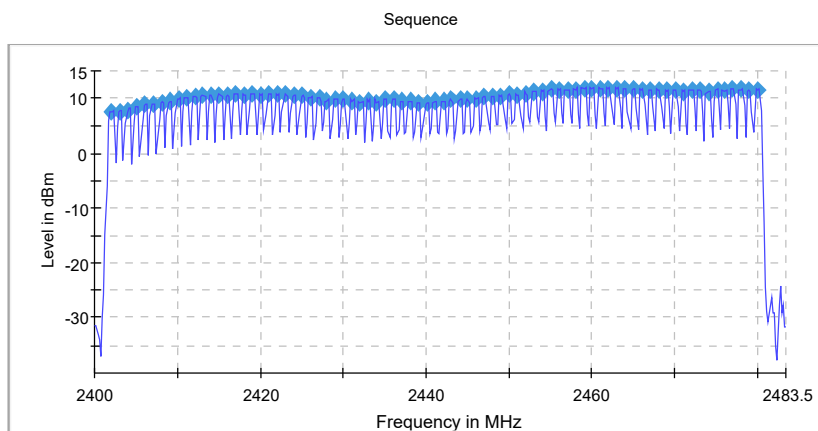

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
Sweptime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	46 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

EDR mode (3-DH5)


Hopping Frequencies (frequency independent; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(g), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence

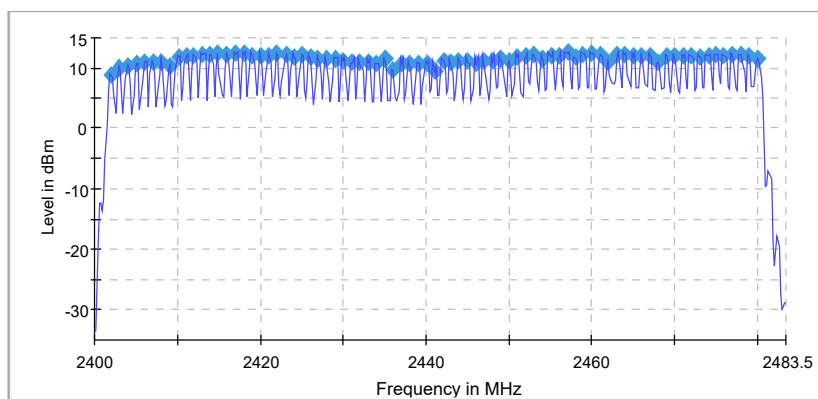

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
Sweptime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	112 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Appendix A.5: Test Results of Time of Occupancy

BR mode (DH5)

Time of Channel Occupancy (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	319	126.620	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
8.750	192.500	98.661


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.39	0.40	400.000	0.000	0.396

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.39	0.40	0.396

Time of Channel Occupancy

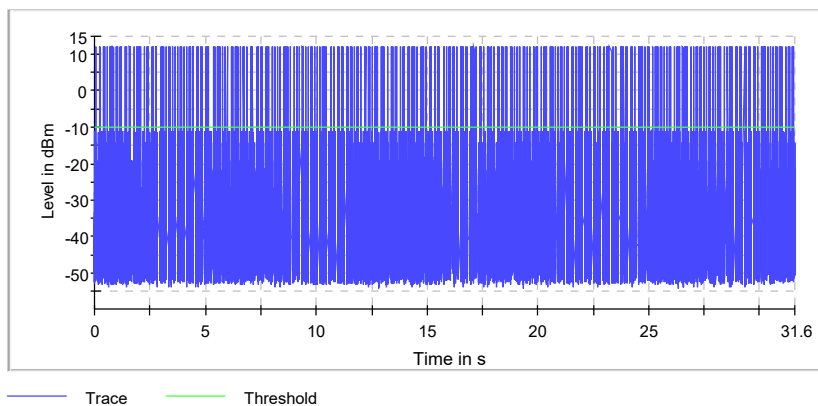

Time of Channel Occupancy(2) (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	157	254.590	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
17.500	367.490	198.776


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.590	3.200	400.000	0.000	1.611

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.630	4.140	1.655

Time of Channel Occupancy(2)

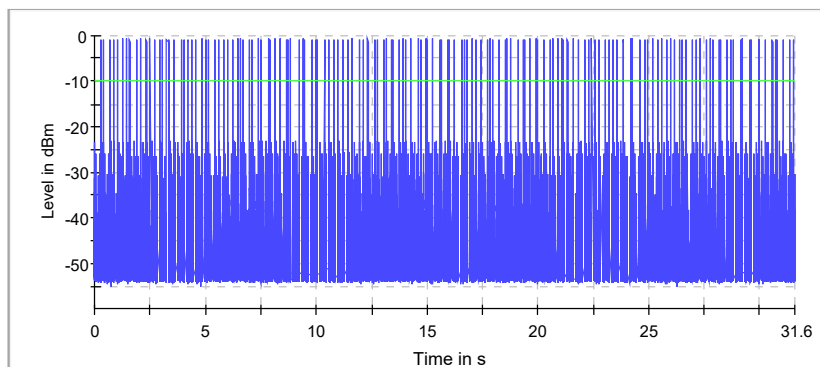

Trace Threshold

Time of Channel Occupancy(3) (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	106	305.240	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
41.240	573.730	294.277


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.840	2.870	400.000	0.000	2.853

DwellTime

Min (ms)	Max (ms)	Mean (ms)
2.880	2.900	2.891

Time of Channel Occupancy(3)

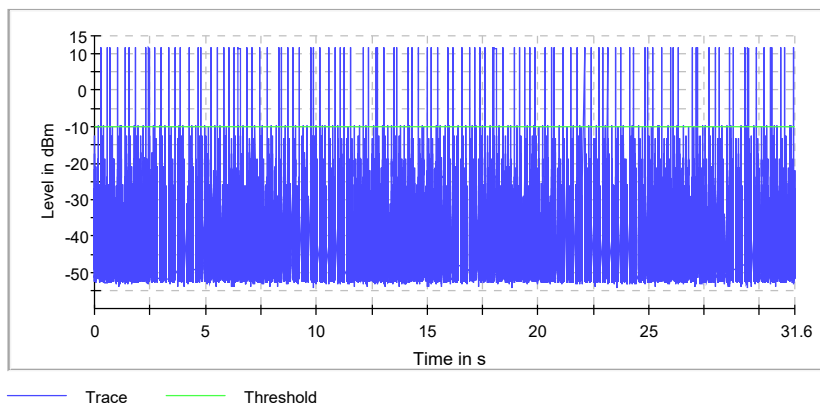

EDR mode (3-DH5)

Time of Channel Occupancy (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	485	132.040	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
2.780	185.000	65.052


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.02	0.41	400.000	0.000	0.272

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.02	0.41	0.272

Time of Channel Occupancy

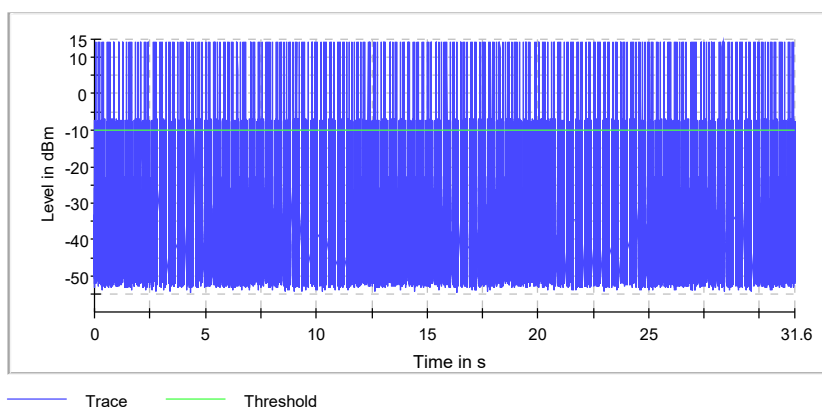

Time of Channel Occupancy(2) (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	574	294.720	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
0.34	161.960	54.939


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.02	3.320	400.000	0.000	0.513

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.02	4.160	0.971

Time of Channel Occupancy(2)

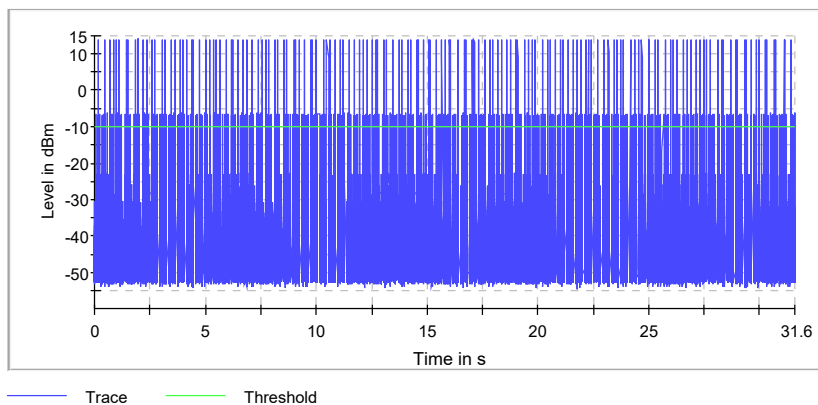

Time of Channel Occupancy(3) (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	461	344.200	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
0.22	235.970	68.480


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.02	2.910	400.000	0.000	0.746

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.02	2.910	1.459

Time of Channel Occupancy(3)

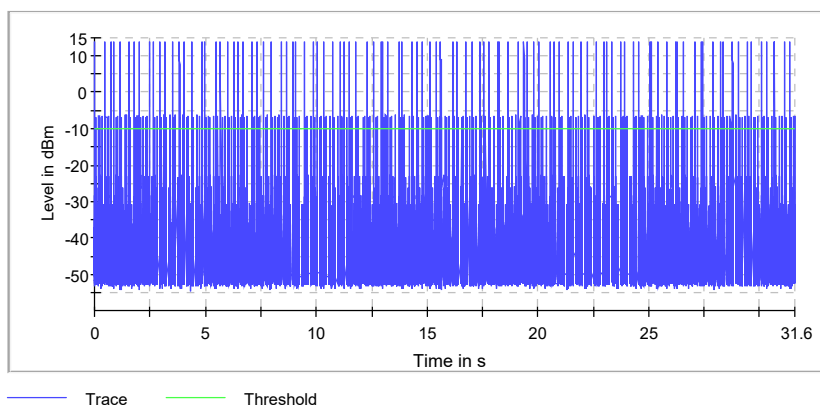

Appendix A.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

BR mode (DH5)

Fixed mode, Band Edge


Low Channel




High Channel



Fixed mode, Conducted Spurious Emission
Low Channel

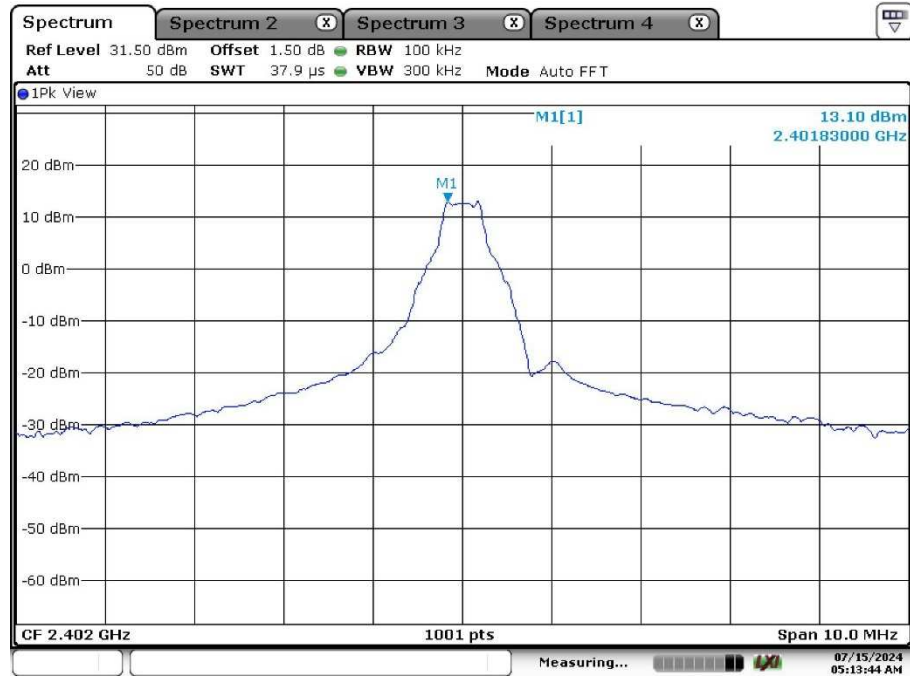


Date: 15.JUL.2024 05:13:44

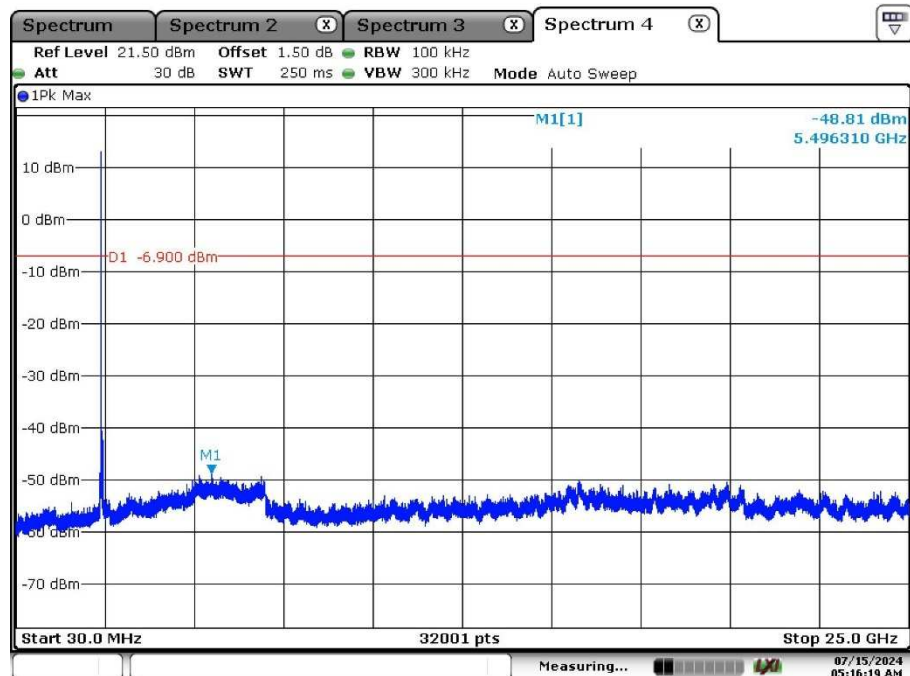


Date: 15.JUL.2024 05:16:19

Middle Channel

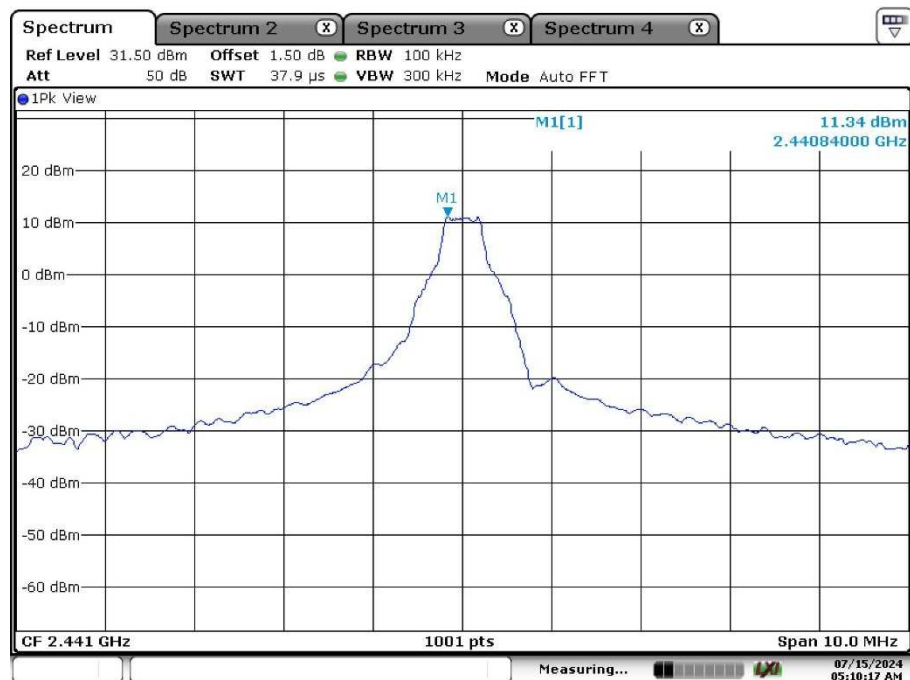


Date: 15.JUL.2024 05:10:17

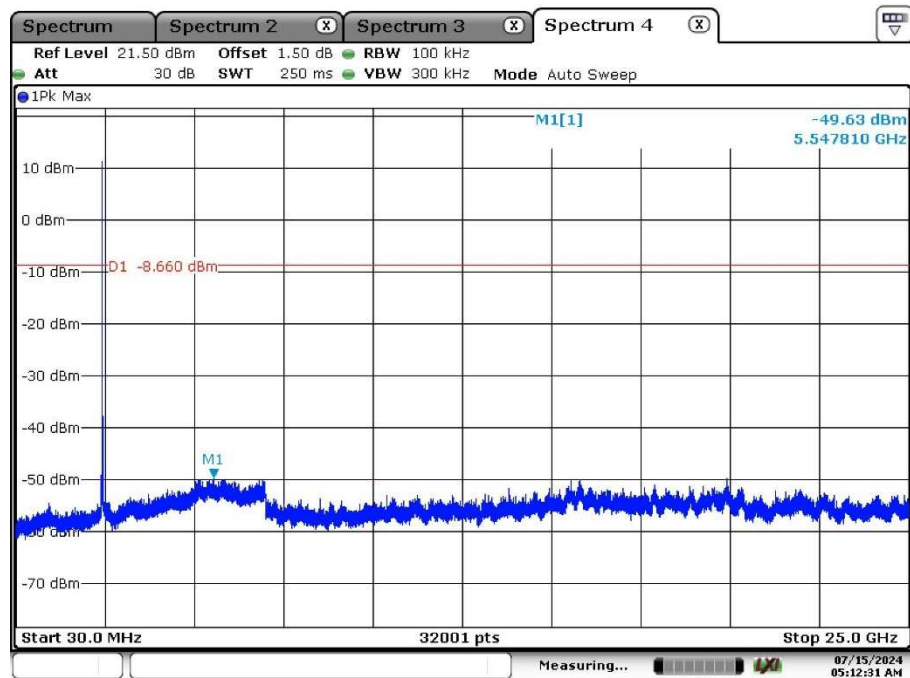


Date: 15.JUL.2024 05:12:31

High Channel

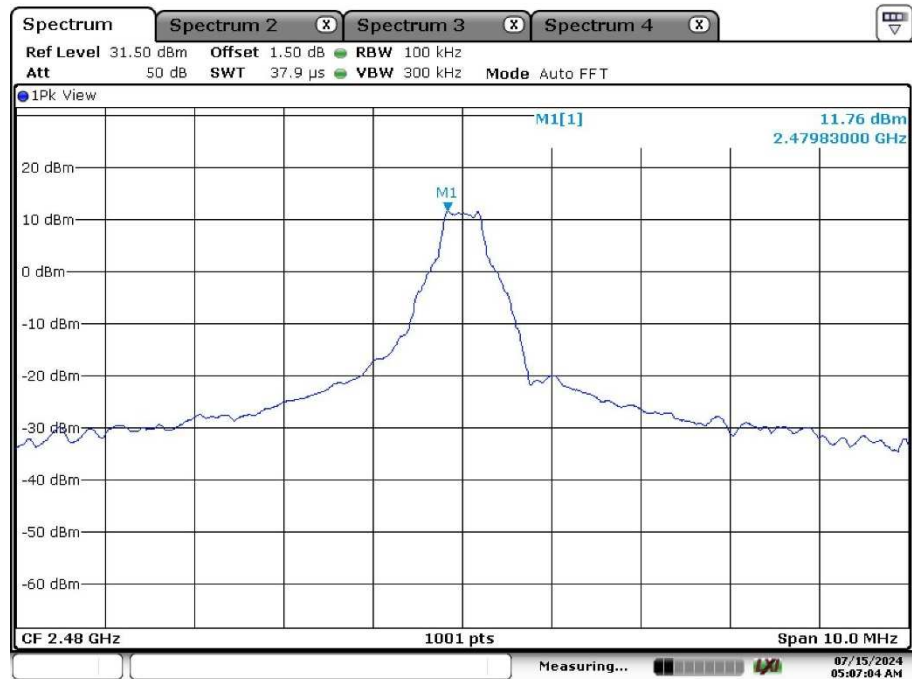


Date: 15.JUL.2024 05:07:04

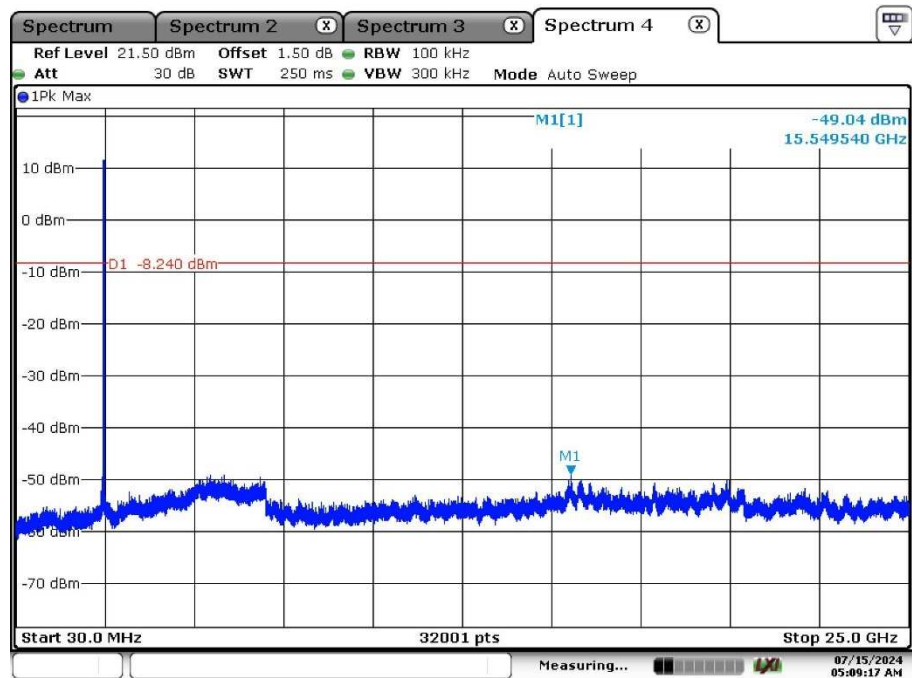


Date: 15.JUL.2024 05:09:17

Hopping Mode, Band Edge


Low Channel

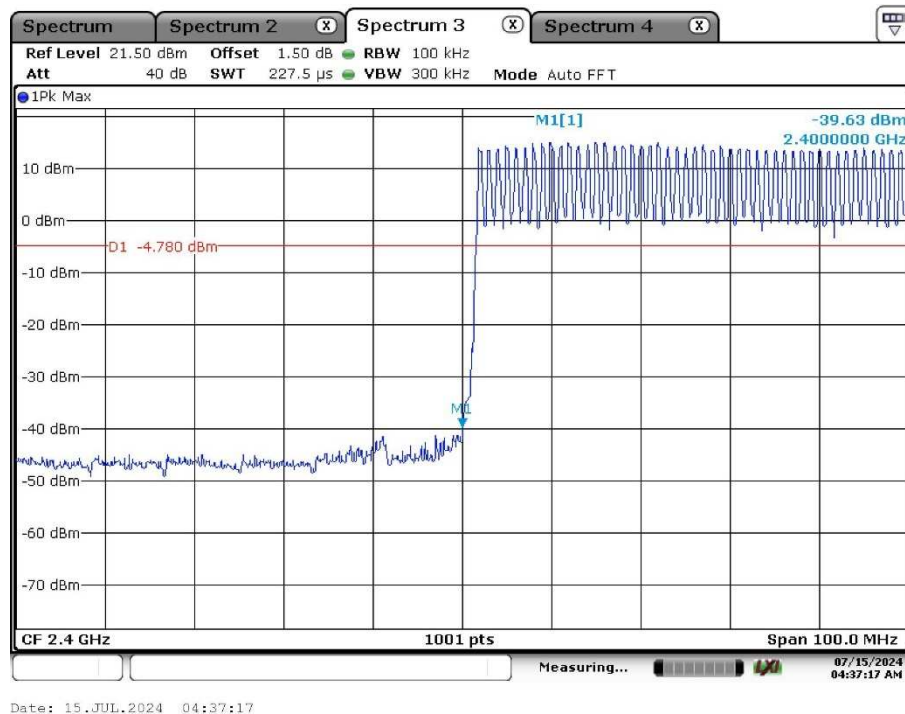


High Channel

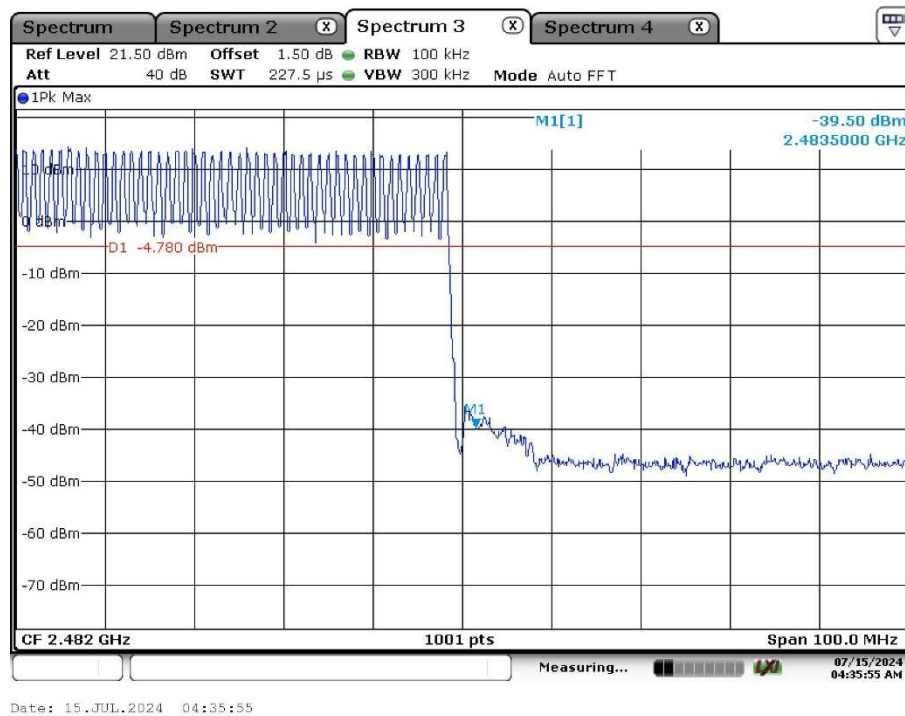

Hopping Mode, Conducted Spurious Emission

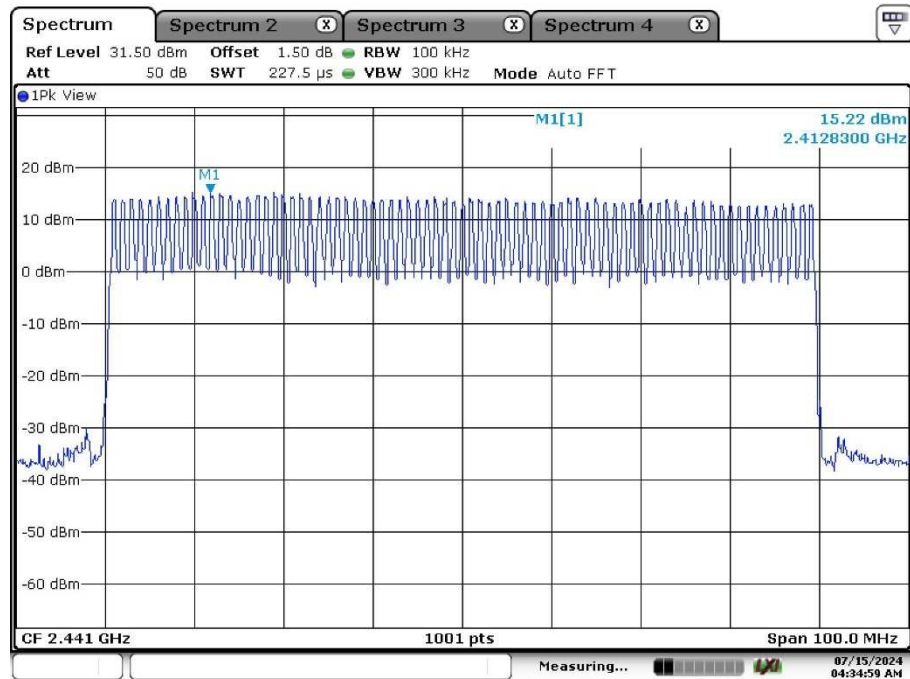

Date: 15.JUL.2024 04:34:59

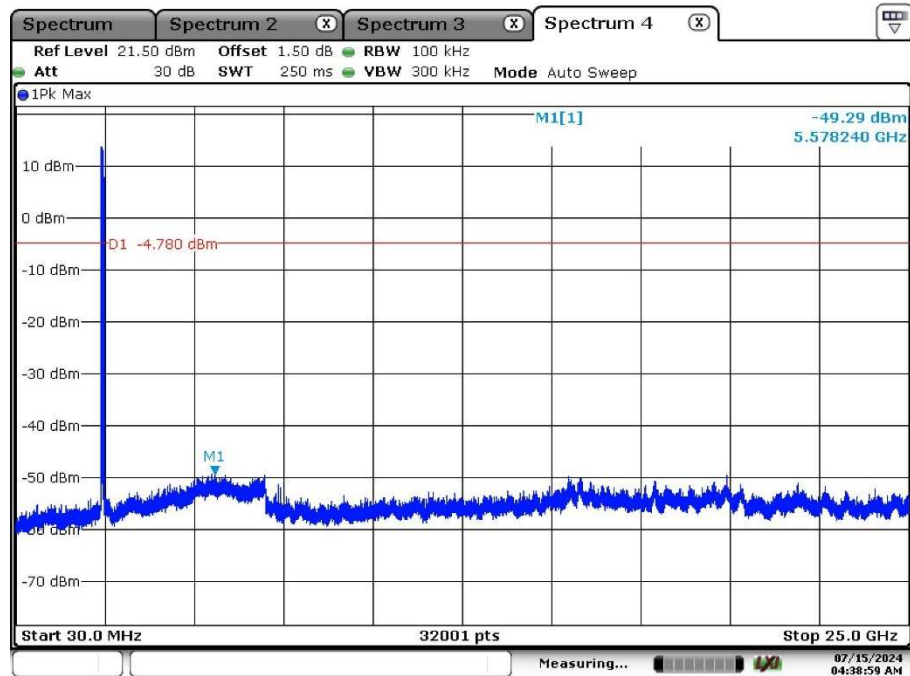

Date: 15.JUL.2024 04:38:59


EDR mode (3-DH5)

Fixed mode, Band Edge


Low Channel




High Channel

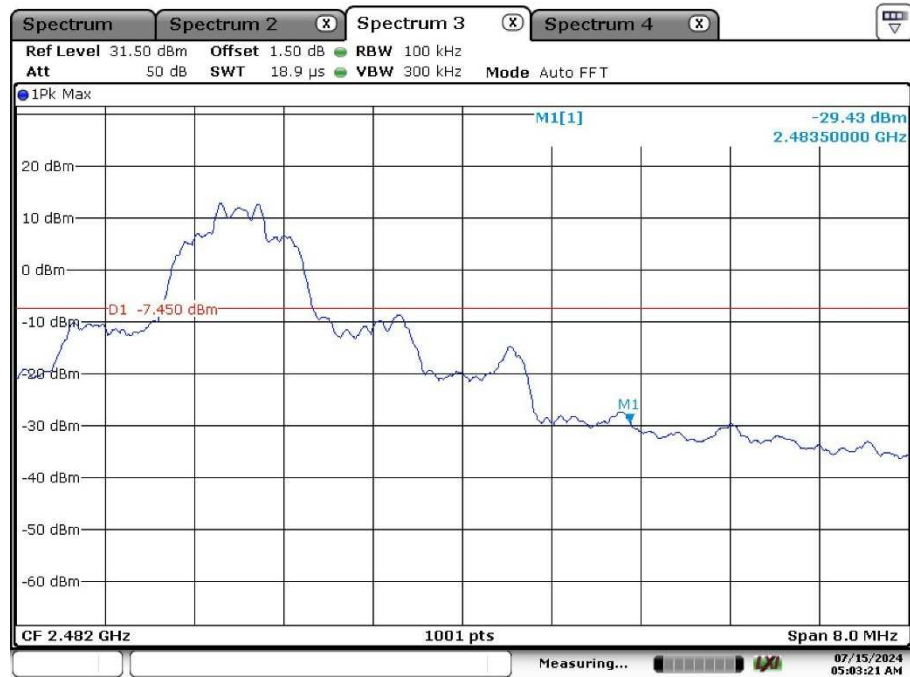

Fixed mode, Conducted Spurious Emission
Low Channel

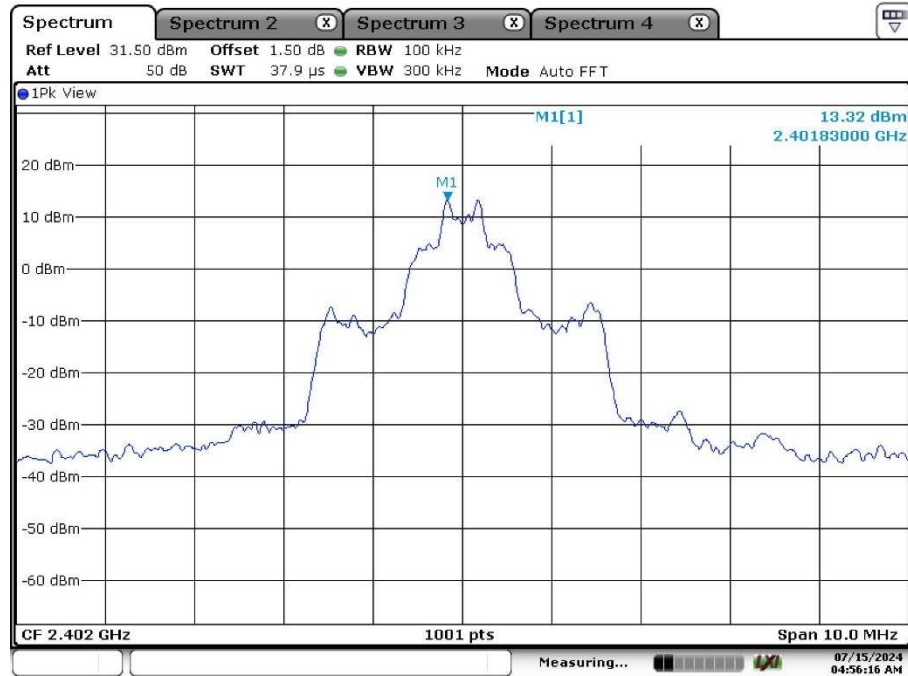


Date: 15.JUL.2024 04:56:16

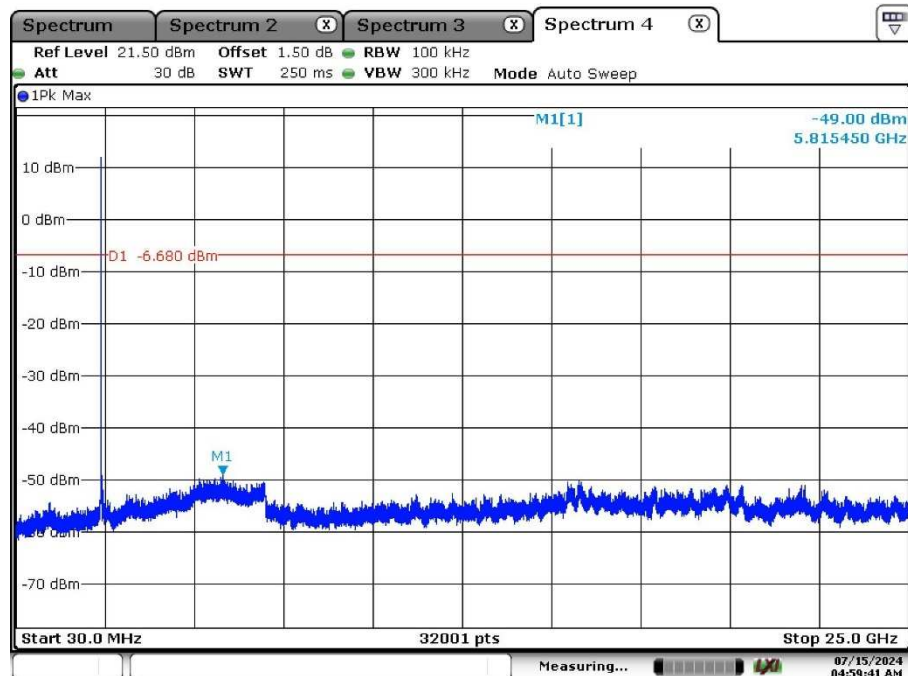


Date: 15.JUL.2024 04:59:41

Middle Channel

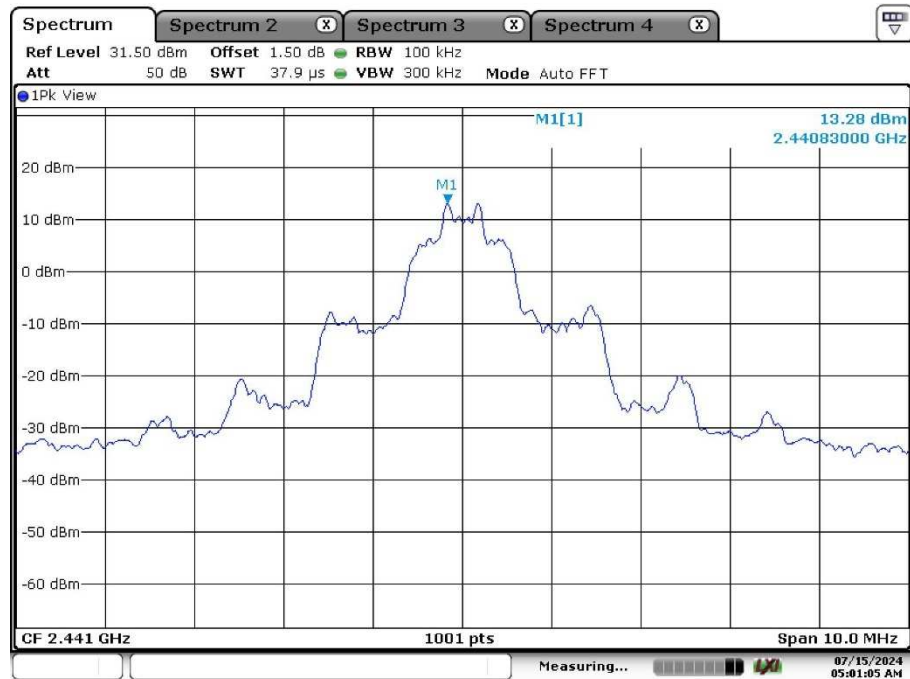


Date: 15.JUL.2024 05:01:05

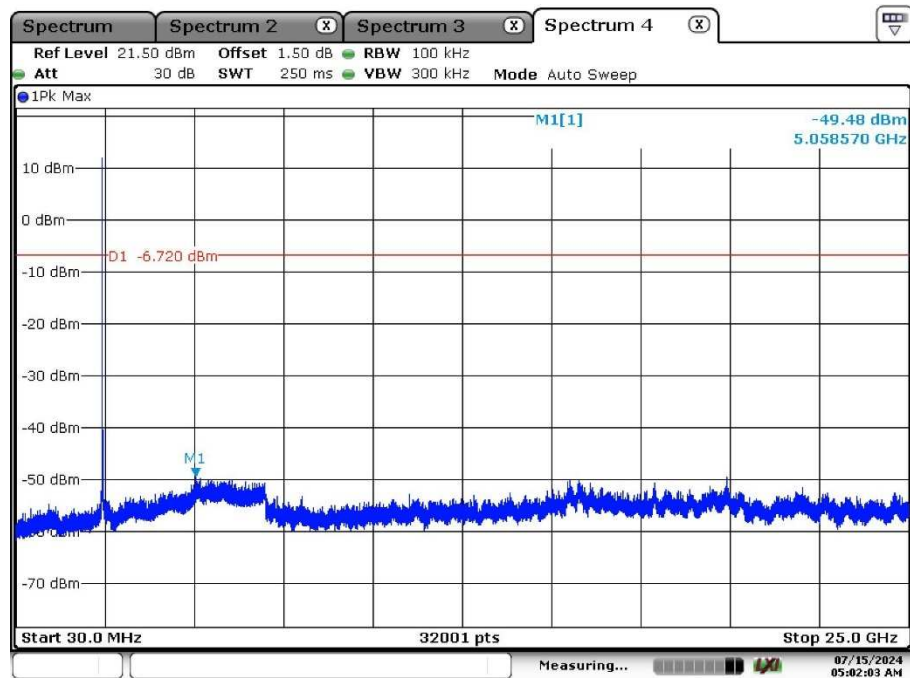


Date: 15.JUL.2024 05:02:03

High Channel

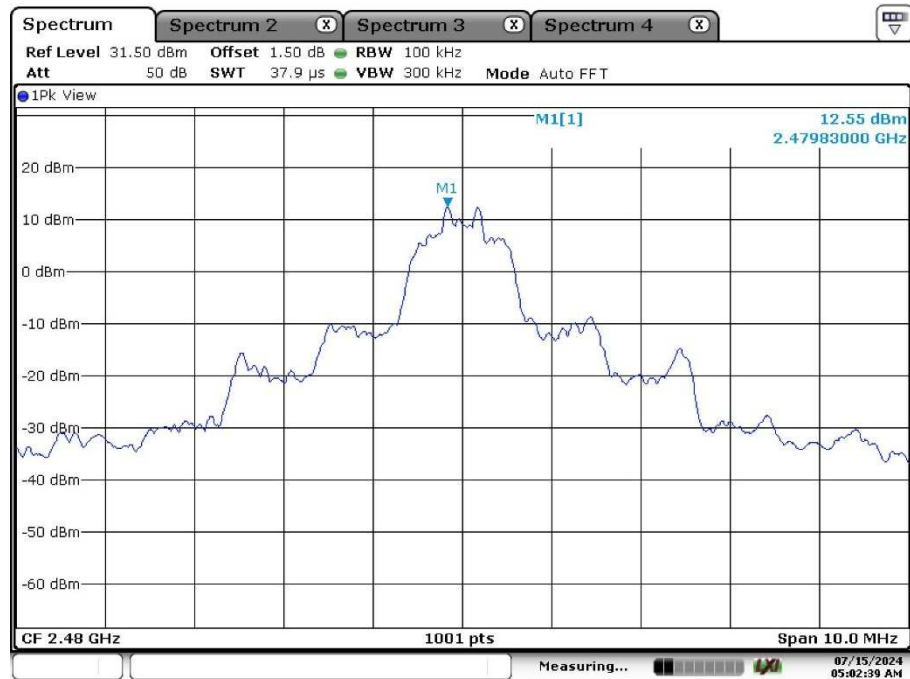


Date: 15.JUL.2024 05:02:39

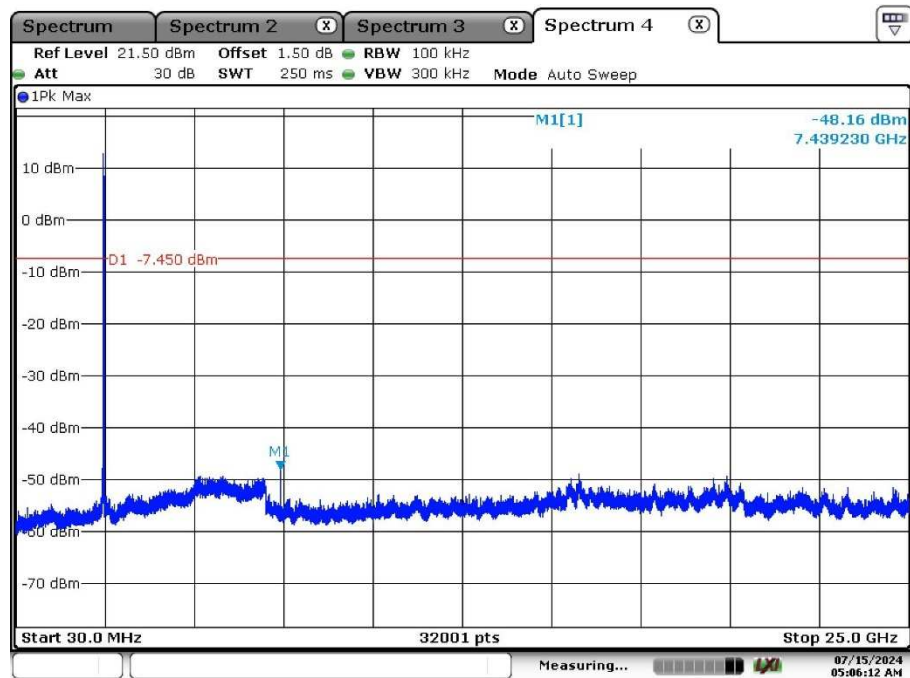


Date: 15.JUL.2024 05:06:12

Hopping Mode, Band Edge


Low Channel

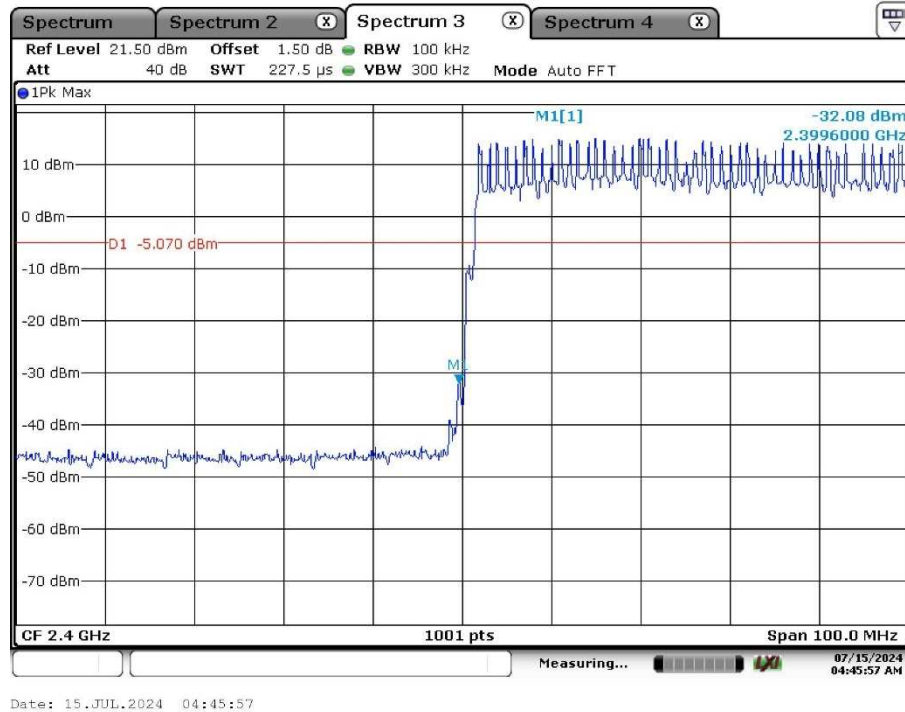


High Channel

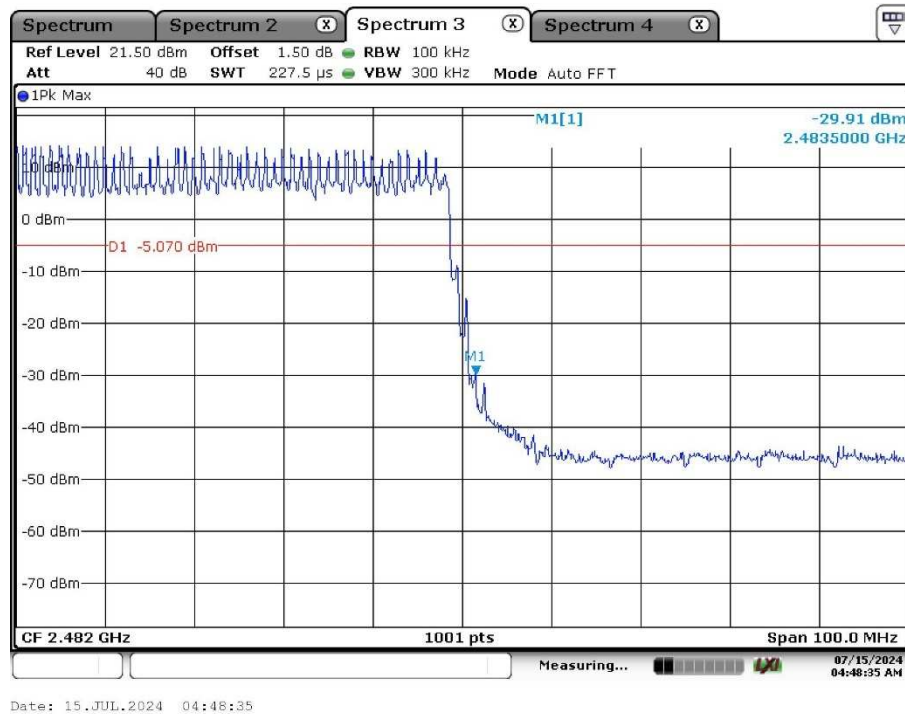

Hopping Mode, Conducted Spurious Emission

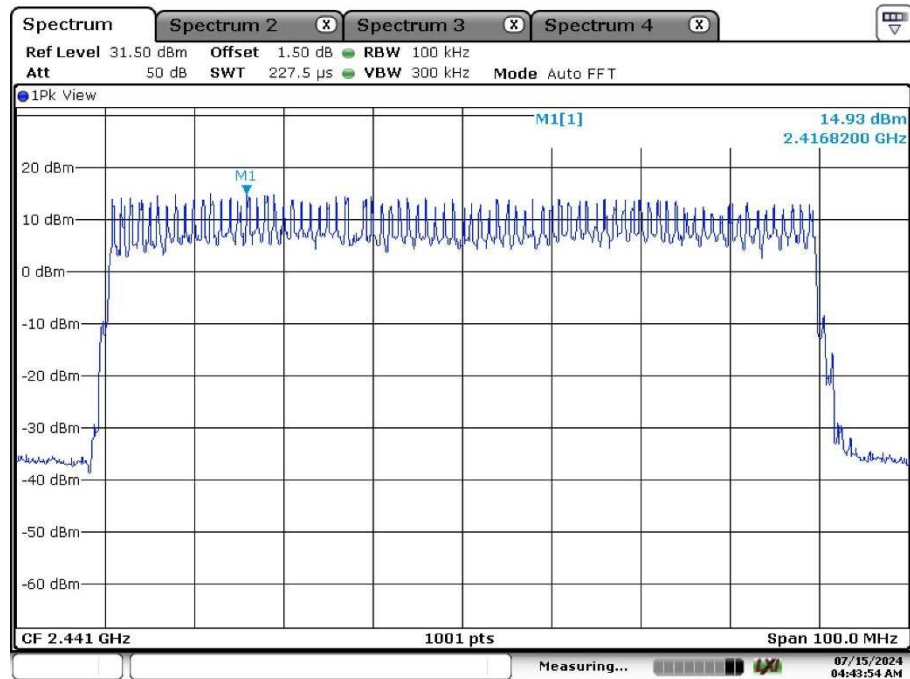

Date: 15.JUL.2024 04:43:54

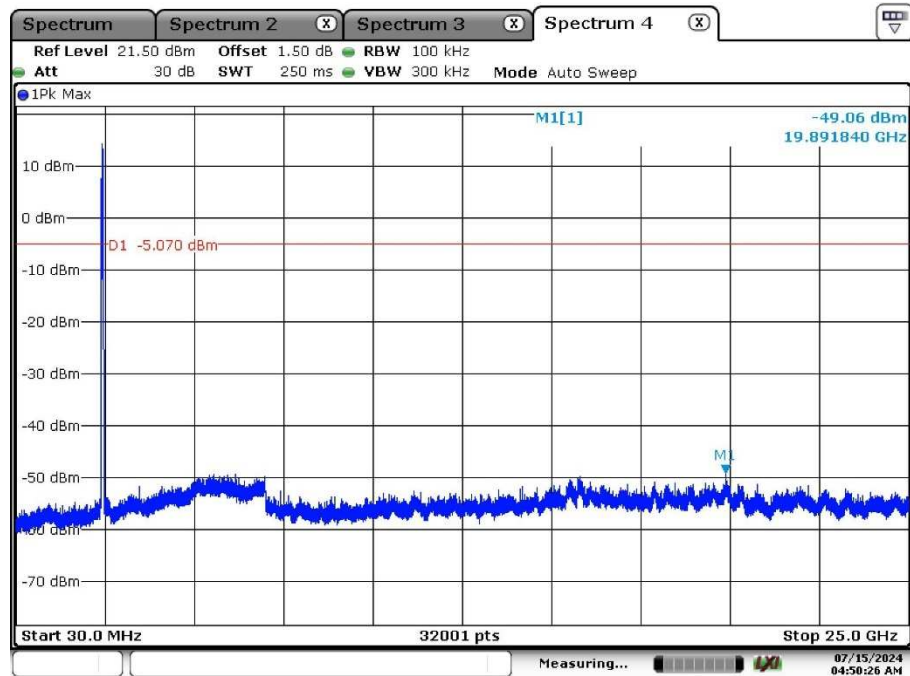

Date: 15.JUL.2024 04:50:26

Appendix A.7: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	DJI Mic Mini Transmitter
Model:	DMMT01
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168491157/A003754186-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Lich Chen
Reviewed By:	Terry Yin

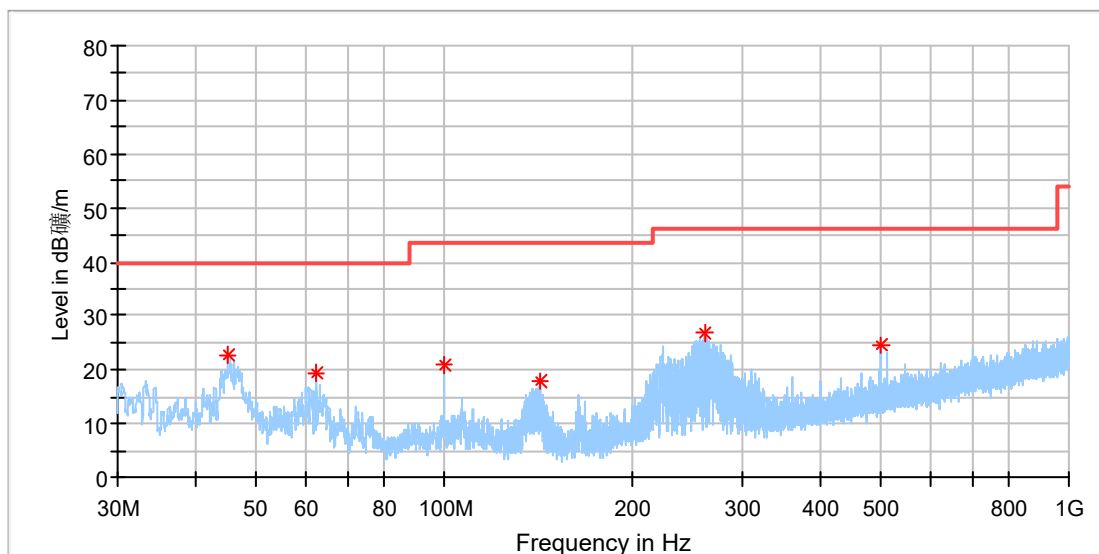

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.184231	22.83	40.00	17.18	100.0	H	84.0	-19.1
62.495000	19.40	40.00	20.60	100.0	H	35.0	-19.9
99.989231	20.70	43.50	22.80	100.0	H	355.0	-19.3
141.960385	17.77	43.50	25.73	100.0	H	0.0	-22.6
260.001923	26.61	46.00	19.39	100.0	H	348.0	-17.5
500.002308	24.73	46.00	21.27	100.0	H	197.0	-12.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

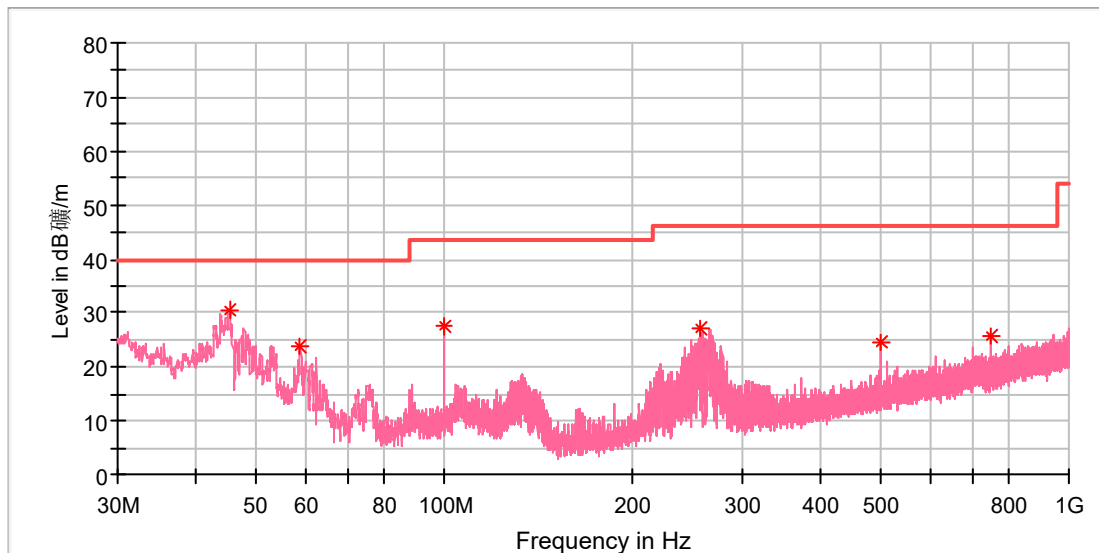

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.296154	30.63	40.00	9.37	100.0	V	309.0	-19.1
58.913462	23.66	40.00	16.34	100.0	V	35.0	-19.2
99.989231	27.44	43.50	16.06	100.0	V	286.0	-19.3
257.800769	27.19	46.00	18.81	100.0	V	126.0	-17.5
500.002308	24.63	46.00	21.37	100.0	V	337.0	-12.2
750.038462	25.83	46.00	20.17	100.0	V	88.0	-7.6

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	DJI Mic Mini Transmitter
Model:	DMMT01
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168491157/A003754186-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Lich Chen
Reviewed By:	Terry Yin

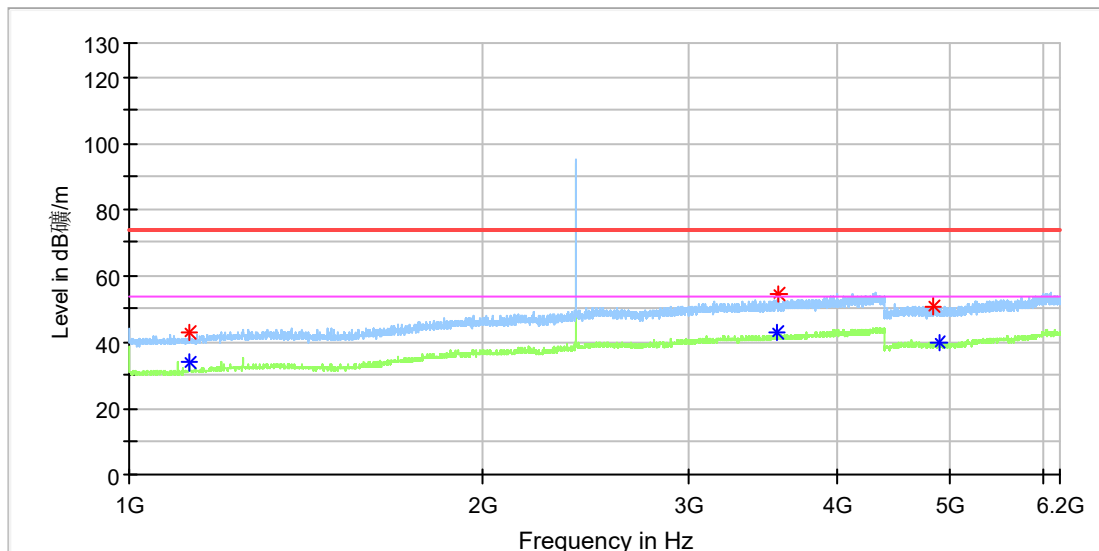

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.500000	42.73	---	74.00	31.27	150.0	H	342.0	0.3
1124.500000	---	33.93	54.00	20.07	150.0	H	342.0	0.3
3561.000000	---	42.67	54.00	11.33	150.0	H	0.0	9.2
3569.000000	54.28	---	74.00	19.72	150.0	H	204.0	9.2
4847.000000	50.92	---	74.00	23.08	150.0	H	81.0	11.8
4904.000000	---	39.66	54.00	14.34	150.0	H	61.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

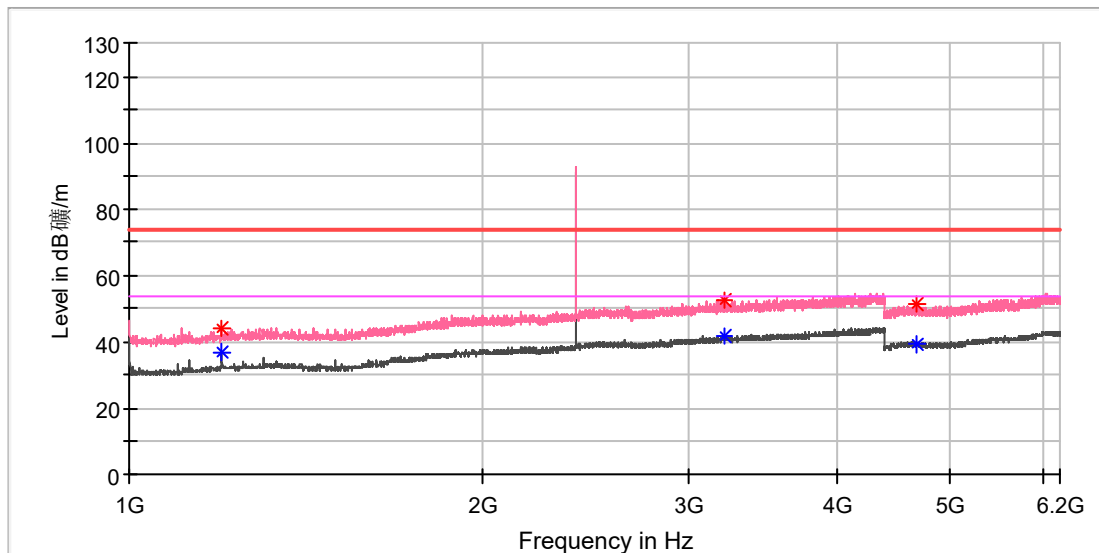

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1199.500000	44.03	---	74.00	29.97	150.0	V	277.0	1.1
1199.500000	---	37.18	54.00	16.82	150.0	V	277.0	1.1
3214.000000	---	41.53	54.00	12.47	150.0	V	192.0	8.6
3216.000000	52.48	---	74.00	21.52	150.0	V	0.0	8.6
4682.000000	---	39.54	54.00	14.46	150.0	V	47.0	12.0
4683.500000	51.43	---	74.00	22.57	150.0	V	129.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

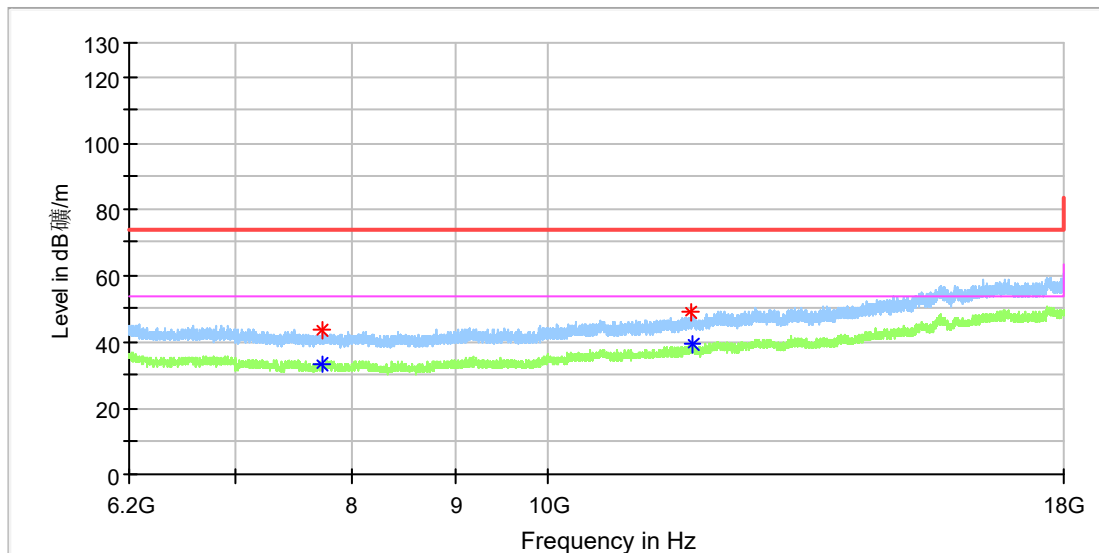

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7714.333333	43.54	---	74.00	30.46	150.0	H	281.0	8.7
7722.691667	---	33.39	54.00	20.61	150.0	H	0.0	8.7
11770.583333	48.87	---	74.00	25.13	150.0	H	5.0	13.4
11784.350000	---	39.01	54.00	14.99	150.0	H	231.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

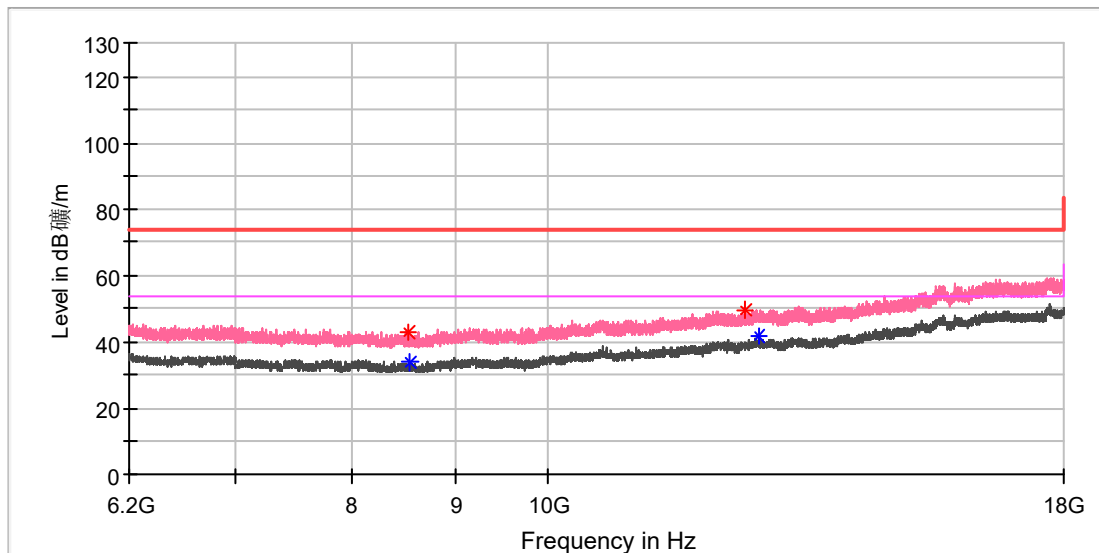

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8521.158333	43.11	---	74.00	30.89	150.0	V	0.0	8.8
8548.200000	---	33.78	54.00	20.22	150.0	V	111.0	8.8
12500.708333	49.86	---	74.00	24.14	150.0	V	86.0	14.6
12719.500000	---	41.56	54.00	12.44	150.0	V	86.0	15.1

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

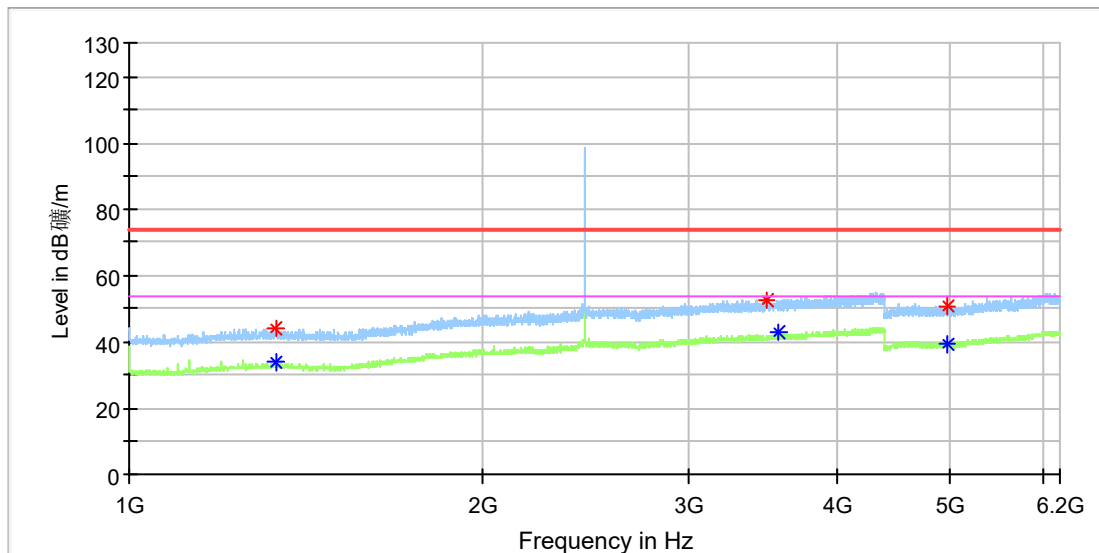

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1332.500000	---	33.64	54.00	20.36	150.0	H	168.0	2.1
1332.500000	44.06	---	74.00	29.94	150.0	H	168.0	2.1
3489.500000	52.35	---	74.00	21.65	150.0	H	268.0	8.9
3572.500000	---	42.99	54.00	11.01	150.0	H	0.0	9.2
4969.000000	---	39.46	54.00	14.54	150.0	H	81.0	11.8
4974.500000	50.95	---	74.00	23.05	150.0	H	47.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

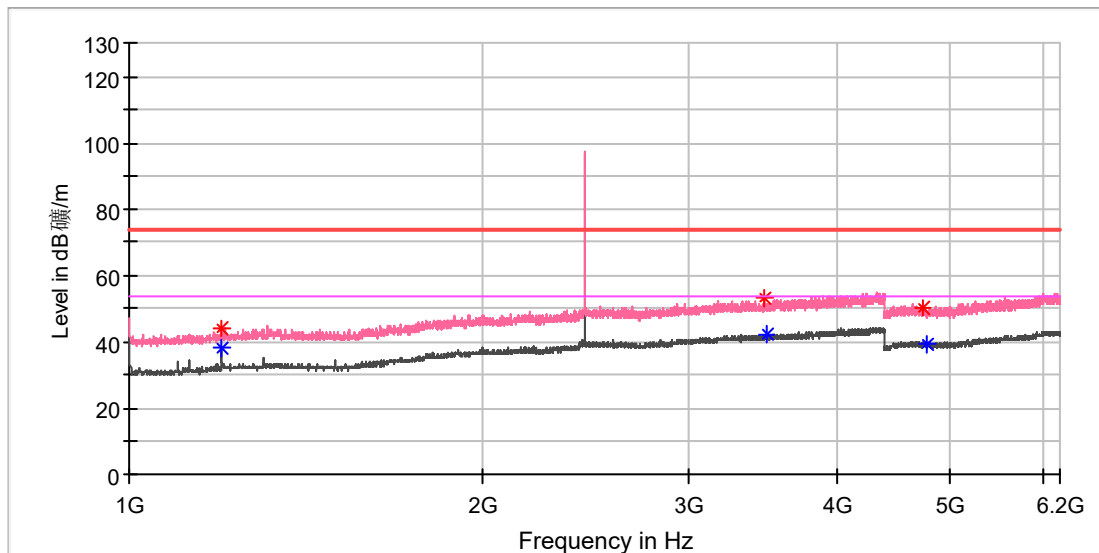

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1200.000000	---	38.26	54.00	15.74	150.0	V	0.0	1.1
1200.000000	44.33	---	74.00	29.67	150.0	V	0.0	1.1
3482.000000	53.07	---	74.00	20.93	150.0	V	328.0	8.9
3497.000000	---	42.10	54.00	11.90	150.0	V	105.0	9.0
4754.500000	50.32	---	74.00	23.68	150.0	V	268.0	11.8
4774.500000	---	39.43	54.00	14.57	150.0	V	19.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

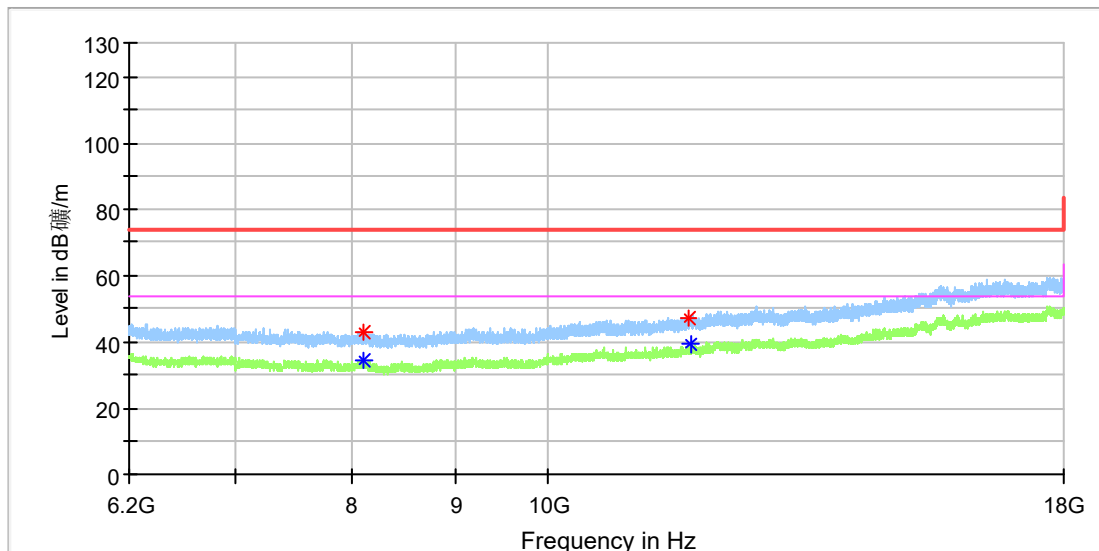

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8103.241667	43.02	---	74.00	30.98	150.0	H	82.0	8.9
8103.733333	---	34.41	54.00	19.59	150.0	H	178.0	8.9
11740.591667	47.41	---	74.00	26.59	150.0	H	324.0	13.3
11752.391667	---	39.33	54.00	14.67	150.0	H	276.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

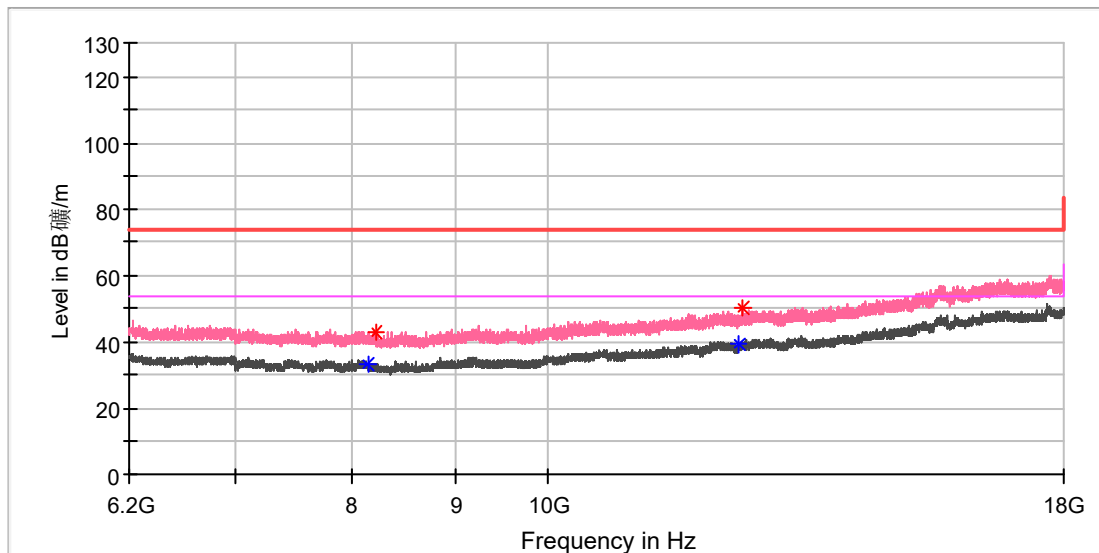

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8131.266667	---	33.42	54.00	20.58	150.0	V	122.0	9.0
8213.375000	43.22	---	74.00	30.78	150.0	V	76.0	8.9
12432.366667	---	39.41	54.00	14.59	150.0	V	3.0	14.6
12475.141667	50.39	---	74.00	23.61	150.0	V	146.0	14.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_High channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

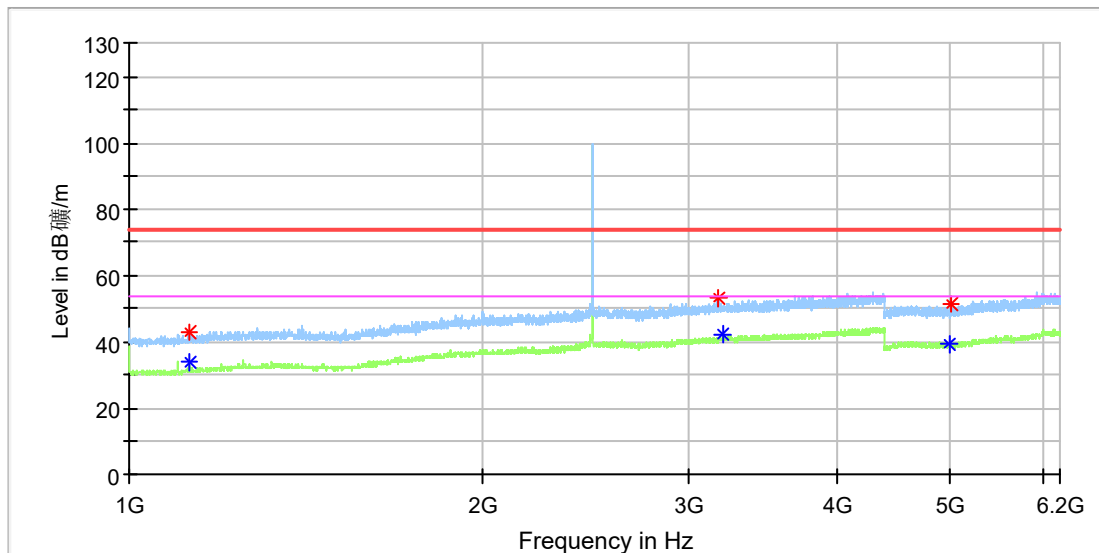

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.500000	43.00	---	74.00	31.00	150.0	H	0.0	0.3
1125.000000	---	34.06	54.00	19.94	150.0	H	289.0	0.3
3183.500000	53.02	---	74.00	20.98	150.0	H	354.0	8.6
3205.500000	---	42.03	54.00	11.97	150.0	H	348.0	8.6
5000.000000	---	39.45	54.00	14.55	150.0	H	193.0	11.8
5005.000000	51.17	---	74.00	22.83	150.0	H	277.0	11.9

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_High channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

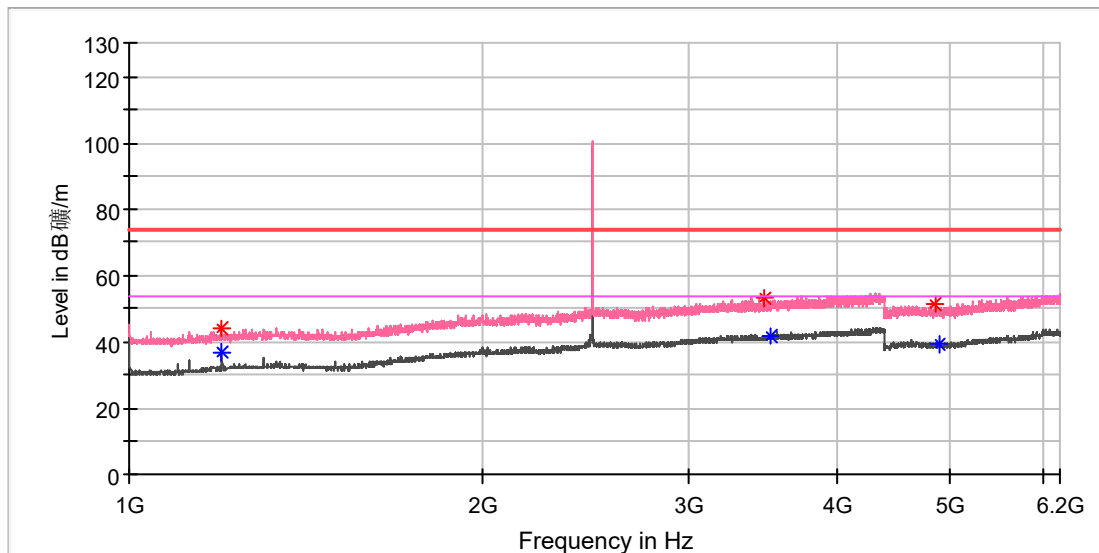

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1200.000000	43.84	---	74.00	30.16	150.0	V	235.0	1.1
1200.000000	---	36.96	54.00	17.04	150.0	V	235.0	1.1
3479.000000	53.30	---	74.00	20.70	150.0	V	167.0	8.9
3514.500000	---	41.86	54.00	12.14	150.0	V	180.0	9.0
4855.000000	51.14	---	74.00	22.86	150.0	V	12.0	11.8
4896.000000	---	39.53	54.00	14.47	150.0	V	66.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_High channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

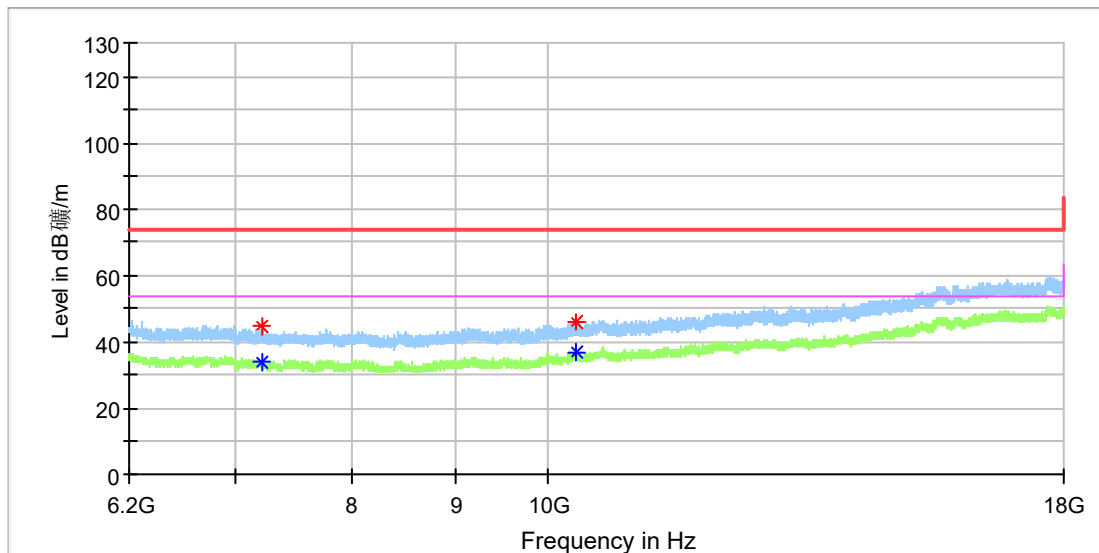

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7215.291667	44.63	---	74.00	29.37	150.0	H	275.0	8.7
7215.783333	---	34.01	54.00	19.99	150.0	H	153.0	8.7
10315.250000	---	36.66	54.00	17.34	150.0	H	153.0	11.6
10331.966667	45.92	---	74.00	28.08	150.0	H	70.0	11.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_High channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

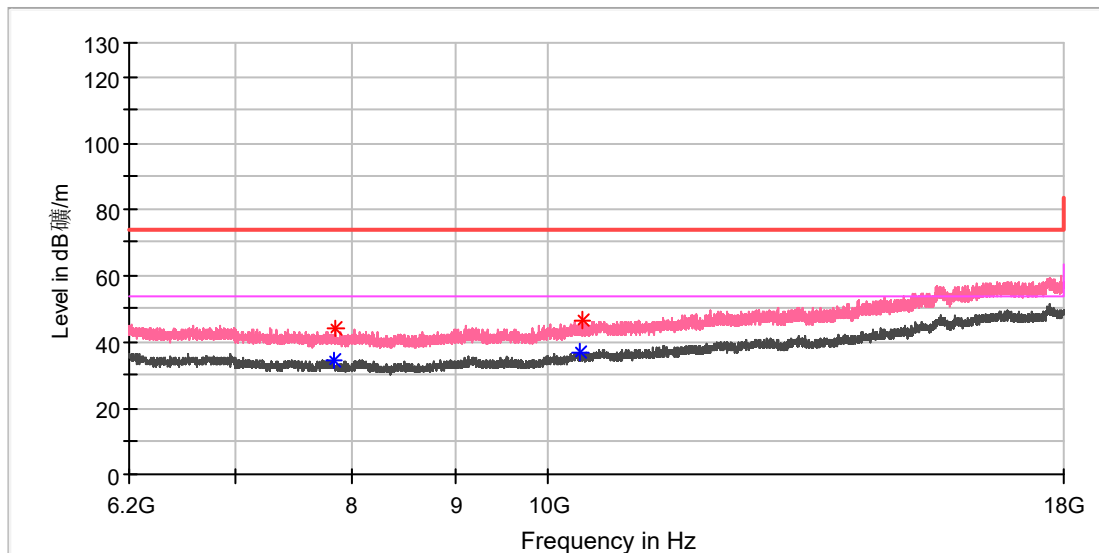

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7825.941667	---	34.22	54.00	19.78	150.0	V	156.0	8.8
7840.200000	43.89	---	74.00	30.11	150.0	V	181.0	8.7
10371.300000	---	36.71	54.00	17.29	150.0	V	218.0	11.8
10392.933333	46.84	---	74.00	27.16	150.0	V	86.0	11.9


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Appendix A.8: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	DJI Mic Mini Transmitter
Model:	DMMT01
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168491157/A003754186-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Lich Chen
Reviewed By:	Terry Yin

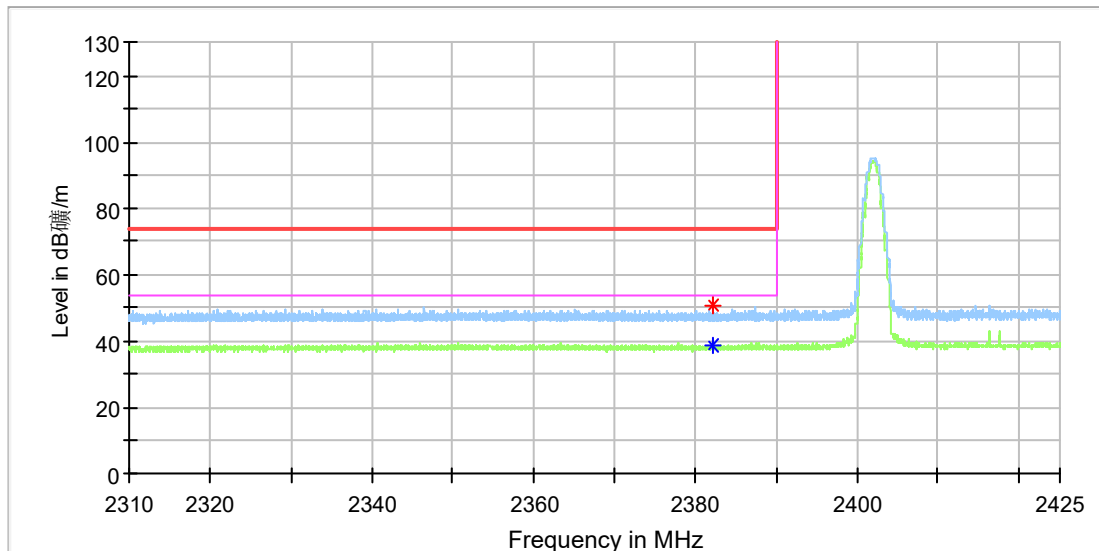

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2382.179412	---	38.89	54.00	15.11	150.0	H	264.0	7.0
2382.196324	50.51	---	74.00	23.49	150.0	H	359.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

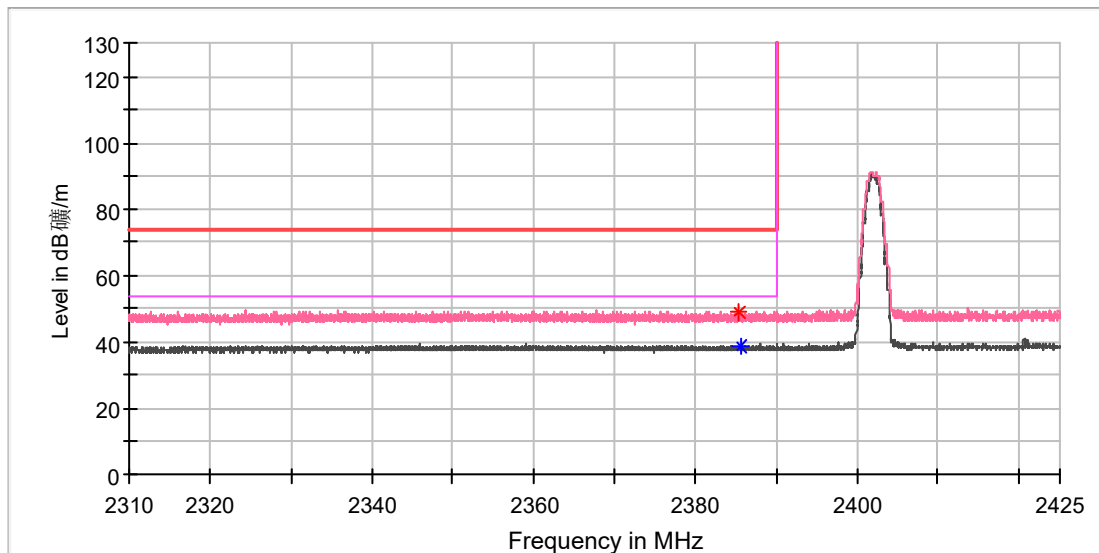

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2385.308088	48.70	---	74.00	25.30	150.0	V	76.0	7.0
2385.578677	---	38.55	54.00	15.45	150.0	V	5.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic Mini Transmitter
Model: DMMT01
Test Mode: BR_DH5_High channel
Order No/Sample No: 168491157/A003754186-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Lich Chen
Reviewed By: Terry Yin

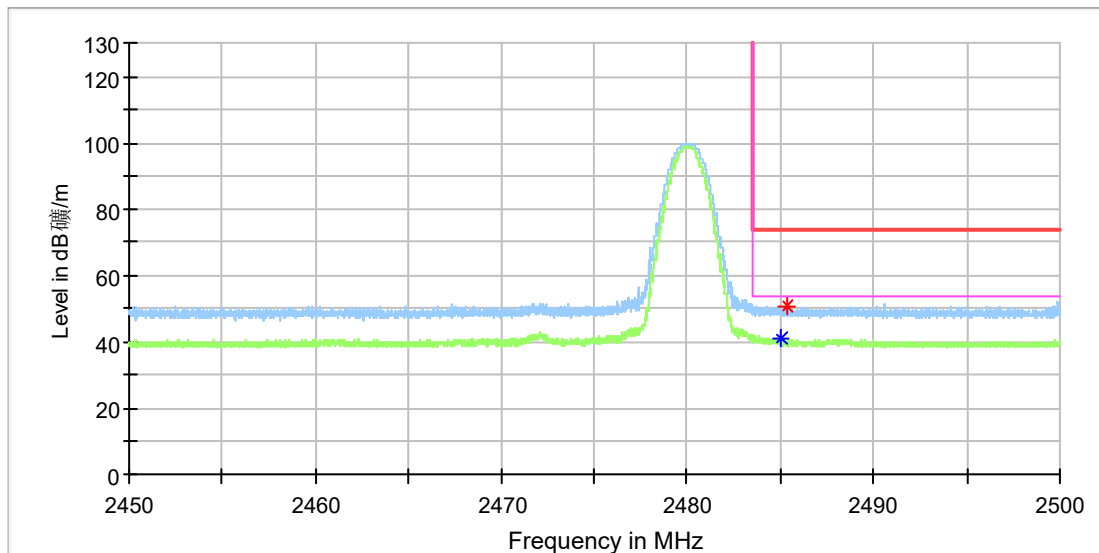

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.992647	---	41.32	54.00	12.68	150.0	H	73.0	7.4
2485.367647	50.71	---	74.00	23.29	150.0	H	88.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	DJI Mic Mini Transmitter
Model:	DMMT01
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168491157/A003754186-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Lich Chen
Reviewed By:	Terry Yin

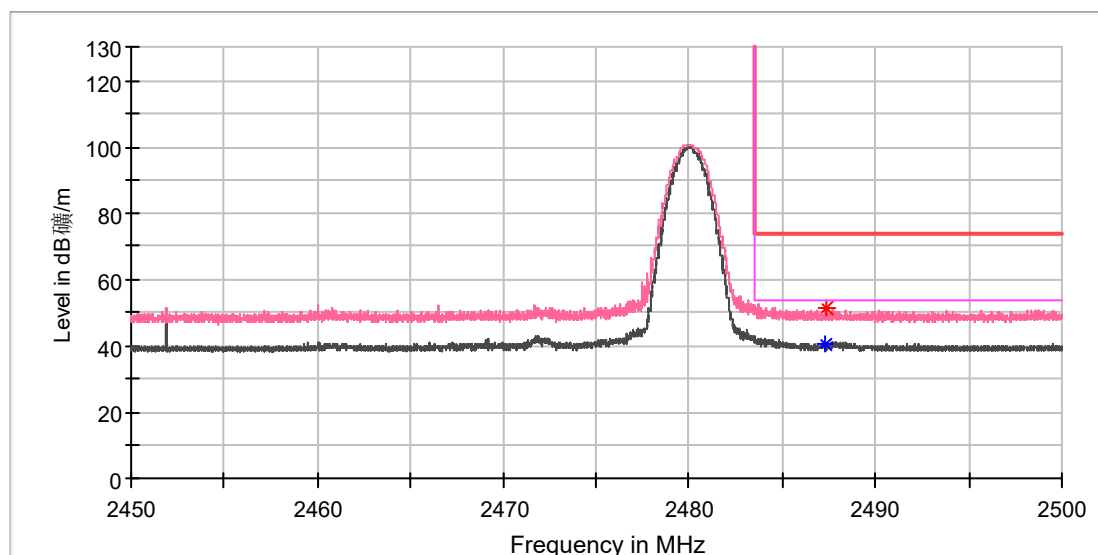

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.242647	---	40.48	54.00	13.52	150.0	V	25.0	7.4
2487.345588	51.36	---	74.00	22.64	150.0	V	184.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---