# FCC PART 15, SUBPART B and C; FCC 15.231; and RSS-210 & RSS GEN TEST REPORT

for

### **CLEAR SKY FIREFIGHTER**

Model: CS-602

Prepared for

ECOLINK INTELLIGENT TECHNOLOGY, INC. 2055 CORTE DEL NOGAL CARLSBAD, CALIFORNIA 92011

Prepared by:		
	JAMES ROSS	
Approved by:		
	KYLE FUJIMOTO	

COMPATIBLE ELECTRONICS INC. 114 OLINDA DRIVE BREA, CALIFORNIA 92823 (714) 579-0500

DATE: DECEMBER 8, 2020

	REPORT	APPENDICES			TOTAL		
	BODY	$\boldsymbol{A}$	В	C	D	E	
PAGES	22	2	2	2	10	25	63

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



#### TABLE OF CONTENTS

Section / T	itle	PAGE
GENERAL .	REPORT SUMMARY	4
SUMMARY	OF TEST RESULTS	5
1. PURI	POSE	6
	ecision Rule & Risk	6
2. ADM	INISTRATIVE DATA	7
	ocation of Testing	7
2.2 Ti	raceability Statement	7
2.3 C	ognizant Personnel	7
2.4 D	ate Test Sample was Received	7
2.5 D	isposition of the Test Sample	7
2.6 A	bbreviations and Acronyms	7
3. APPL	ICABLE DOCUMENTS	8
4. DESC	CRIPTION OF TEST CONFIGURATION	9
4.1 D	escription of Test Configuration – Emissions	9
4.1.1 C	able Construction and Termination	9
5. LISTS	S OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
	UT and Accessory List	10
5.2 E	missions Test Equipment	11
6. TEST	SITE DESCRIPTION	12
6.1 T	est Facility Description	12
6.2 E	UT Mounting, Bonding and Grounding	12
6.3 M	Seasurement Uncertainty	12
7. TEST	PROCEDURES	13
7.1 R	F Emissions	13
7.1.1 C	onducted Emissions Test	13
7.1.2 R	adiated Emissions Test	14
7.1.3 R	F Emissions Test Results	16
7.1.4 Sa	ample Calculations	17
	uty Cycle Calculation	19
	9 % Bandwidth	20
7.1.7 -2	20 dB Bandwidth	20
7.1.8 T	ransmission Time	21
8. CON	CLUSIONS	22

#### LIST OF APPENDICES

APPENDIX	TITLE		
A	Laboratory Accreditations and Recognitions		
В	Modifications to the EUT		
С	Models Covered Under This Report		
D	Diagrams, Charts, and Photos		
	Test Setup Diagrams		
	Antenna and Effective Gain Factors		
	Radiated Emissions Photos		
Е	Data Sheets		

#### LIST OF FIGURES

FIGURE	TITLE
1	
1	Layout of the Semi-Anechoic Test Chamber

#### LIST OF TABLES

TABLE	TITLE
1	Radiated Emission Results

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

TIBLE

Clear Sky Firefighter

Model: CS-602

#### GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the United States government.

Device Tested: Clear Sky Firefighter

Model: CS-602 S/N: N/A

Product Description: The equipment under test is a battery powered Clear Sky Firefighter manufactured by

Ecolink Intelligent Technology. The transmit frequency is 345 MHz. The oscillator(s) are

10.78 MHz. Dimensions: 6.0 cm (L) x 6.0 cm (W) x 0.8 cm (H).

Modifications: The EUT was not modified to meet the specifications.

Customer: Ecolink Intelligent Technology, Inc.

2055 Corte Del Nogal Carlsbad, California 92011

Test Date: November 23, 2020

Test Specifications covered by accreditation:

Test Specifications: Emissions requirements

CFR Title 47, Part 15, Subpart B;

CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.231; RSS-210 and RSS-Gen



Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

## **SUMMARY OF TEST RESULTS**

TEST	DESCRIPTION	RESULTS
1	Spurious Radiated RF Emissions, 9 kHz – 3.45 GHz (Transmitter and Digital portion)	Complies with the <b>Class B</b> limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15 Subpart C, sections 15.205, 15.209, and 15.231; and the limits of RSS-210 and RSS-Gen Highest reading in relation to spec limit 76.05 dBuV/m (AVG) @ 345 MHz (*U = 3.19 dB)
2	-20 dB Bandwidth	Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (c); and the limits of RSS-210
3	Transmission Time	Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (a)(1) and (a)(2); and the limits of RSS-210

<sup>\*</sup>U = Expanded Uncertainty with a coverage factor of k=2

Report Number: B01123D1

#### 1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Clear Sky Firefighter, Model: CS-602. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4 and ANSI C63.10. The tests were performed to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the <u>Class B specification limits defined by CFR Title 47, Part 15 Subpart B section, 15.109; the specification limits defined by CFR Title 47, Part 15 Subpart C sections 15.205, 15.209 and 15.231; and the specifications limits defined by RSS-210 and RSS-Gen.</u>

#### 1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a preproduction representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report Clear Sky Firefighter Model: CS-602

#### 2. ADMINISTRATIVE DATA

#### 2.1 **Location of Testing**

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

#### 2.2 **Traceability Statement**

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

#### 2.3 **Cognizant Personnel**

Ecolink Intelligent Technology, Inc.

David Shepard Product Compliance/QA Specialist

Director of Engineering Jay Stone

Compatible Electronics Inc.

Kyle Fujimoto **Test Engineer** James Ross **Test Engineer** 

#### 2.4 **Date Test Sample was Received**

The test sample was received prior to the date of this report.

#### 2.5 **Disposition of the Test Sample**

The test sample has not been returned to Ecolink Intelligent Technology, Inc. as of the date of this report.

#### 2.6 **Abbreviations and Acronyms**

The following abbreviations and acronyms may be used in this document.

**EMI** Electromagnetic Interference **EUT Equipment Under Test** P/N Part Number S/N Serial Number **FCC Federal Communications Commission Declaration of Conformity** DoC N/A Not Applicable Tx **Transmit** Receive Rx Incorporated Inc Limited Liability Company RFRadio Frequency

LLC

**BLE** Bluetooth Low Energy Code of Federal Regulations **CFR** 

**PCB** Printed Circuit Board

DC Direct Current

LED Light Emitting Diode

#### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emission Test Report.

SPEC	TITLE	
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators	
FCC Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) –Unintentional Radiators	
RSS-210 Issue 10: 2019	License-exempt Radio Apparatus: Category I Equipment	
RSS-Gen Issue 5: 2019 + Amendment 1	General Requirements for Compliance of Radio Apparatus	
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	
ANSI C63.10: 2013	American National Standard of procedure for compliance testing of unlicensed wireless devices	

Clear Sky Firefighter Model: CS-602

#### 4. DESCRIPTION OF TEST CONFIGURATION

### 4.1 Description of Test Configuration – Emissions

The Clear Sky Firefighter, Model: CS-602 (EUT) was tested as a stand alone unit. The EUT was transmtting at 345 MHz on a continuous basis.

The EUT was tested for emissions while in the X, Y and Z axis. The X orientation is when the EUT is parallel to the ground. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The EUT was tested with a new battery.

The final radiated emissions data for the EUT was taken in the configuration described above. Please see Appendix E for the data sheets.

#### 4.1.1 Cable Construction and Termination

The EUT had no external cables.

## 5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

## 5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
CLEAR SKY FIREFIGHTER (EUT)	ECOLINK INTELLIGENT TECHNOLOGY, INC.	CS-602	N/A	XQC-CS602 IC: 9863B-CS602



#### 5.2 **Emissions Test Equipment**

EQUIPMENT TYPE	MANU- FACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CAL. CYCLE
	RADIA	TED EMISSION	S TEST EQUIPM	ENT	
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
MXE EMI Receiver, 3 Hz – 44 GHz	Keysight Technologies, Inc.	N9038A	MY59050117	October 5, 2020	1 Year
Loop Antenna	Com-Power	AL-130R	121090	February 5, 2019	2 Year
CombiLog Antenna	Com-Power	AC-220	061093	June 5, 2019	2 Year
Horn Antenna	Com-Power	AH-118	10050113	February 4, 2020	2 Year
Preamplifier	Com-Power	PA-118	181653	February 5, 2020	1 Year
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A

Model: CS-602

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report Clear Sky Firefighter

#### 6. TEST SITE DESCRIPTION

#### 6.1 Test Facility Description

Please refer to section 2.1 of this report for emissions test location.

### 6.2 EUT Mounting, Bonding and Grounding

**For frequencies 1 GHz and below:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

**For frequencies above 1 GHz:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

#### 6.3 Measurement Uncertainty

Compatible Electronics'  $U_{\text{lab}}$  value is less than  $U_{\text{cispr}}$ , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_{\rm c}(y) = \sqrt{\sum_i c_i^2 \ u^2(x_i)}$$

Measurement		$U_{cispr}$	$U_{lab} = 2 uc (y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.73 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.27 dB (Vertical) 3.19 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	3.95 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	3.95 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26.5 GHz)	N/A	4.69 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.55 dB

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

TIBLE

Clear Sky Firefighter

Model: CS-602

#### 7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

#### 7.1 RF Emissions

#### 7.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

#### **Test Results:**

This test was not performed because the EUT operates on battery power only and cannot be connected to the AC public mains.

Clear Sky Firefighter Model: CS-602

#### 7.1.2 **Radiated Emissions Test**

The EMI Receiver was used as the measuring meter. An internal preamplifier was used to increase the sensitivity of the instrument during emissions tests up to 1000 MHz, and an external preamplifier was used to increase the sensitivity of the instrument during emissions tests above 1 GHz. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which considers the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz, except for the fundamental frequency and the 2<sup>nd</sup> harmonic of the fundamental frequency, were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The harmonic frequencies above 1 GHz, the fundamental frequency, and the 2<sup>nd</sup> harmonic were averaged using the duty cycle correction calculation.

All other frequencies above 1 GHz were averaged using the average detector of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

#### **Radiated Emissions Test (Continued)**

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 3.45 GHz	1 MHz	Horn Antenna

#### **Test Results:**

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.231; and the limits of RSS-210 and RSS-Gen for radiated emissions.

Model: CS-602

#### 7.1.3 RF Emissions Test Results

Table 1 RADIATED EMISSION RESULTS

Clear Sky Firefighter Model: CS-602

Frequency (MHz)	Average EMI Reading (dBuV/m)	Specification Limit (dBuV/m)	Delta (Cor. Reading – Spec. Limit) (dB)
345.00 (H) (Z-Axis)	76.05	77.26	-1.21
345.00 (V) (X-Axis)	74.83	77.26	-2.43
2415.00 (V) (Z-Axis)	54.40	57.26	-2.86
345.00 (V) (Y-Axis)	74.39	77.26	-2.87
345.00 (V) (X-Axis)	73.74	77.26	-3.52
2415.00 (V) (Y-Axis)	53.50	57.26	-3.76

#### Notes:

- \* The complete emissions data is given in Appendix E of this report.
- (V) Vertical Polarization
- (H) Horizontal Polarization

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

TIBLE

Clear Sky Firefighter

Model: CS-602

#### 7.1.4 Sample Calculations

A correction factor for the antenna, cable, and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ( $\mu$ V/m) log x 20 = Specification Limit in dBuV/m

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance)  $\log x = 40 = 100$ 

For measurements above 30 MHz: (Specification distance / test distance)  $\log x 20 = \text{distance factor}$ 

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F - A + C

where: F = antenna factor

A= amplifier gain C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

When the limit is in terms of magnetic field, the following equation applies:

$$H[dB(\mu A/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^H[dB(S/m)]$$

where: *H* is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer,

 $L_C$  is the cable loss,

 $G_{PA}$  is the gain of the preamplifier (if used), and

 $AF^{H}$  is the magnetic antenna factor.

The  $G_{PA}$  term is only included in the equation when an external preamplifier is used in the measurement chain, in front of the receiver or spectrum analyzer. An external preamplifier is not usually necessary (or even advisable, due to risk of saturating the input mixer of the receiver) when an active loop antenna is used. In that case, the antenna factor of the loop already includes the gain of its built-in preamplifier.

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report Clear Sky Firefighter

Model: CS-602

#### **Sample Calculations (Continued)**

If the "electrical" antenna factor is used instead, the above equation becomes:

$$H[dB(\mu A/m)] = V[dB(\mu V)] + L_{C}[dB] - G_{PA}[dB] + AF^{E}[dB(m^{-1})] - 51.5[dB\Omega]$$

where:  $AF^E$  is the "electric" antenna factor, as provided by the antenna calibration laboratory.

When the limit is in terms of electric field, the following equation applies:

$$E[dB(\mu V/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^E[dB(m^{-1})]$$
 or, if the magnetic antenna factor is used:

$$E[dB(\mu V/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^H [dB(S/m)] + 51.5[dB\Omega]$$

The display of the receiver (or spectrum analyzer) <u>shall not</u> be configured in units of current, e.g.  $\mu A$  or  $dB(\mu A)$ . That conversion is calculated inside the receiver (or spectrum analyzer) using its input impedance, which is 50  $\Omega$ , while the magnetic field calculation is based on the free-space impedance of 377  $\Omega$ .

### 7.1.5 **Duty Cycle Calculation**

The fundamental and harmonics were measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

Where

$$\delta(dB) = 20 \log \left[ \sum (nt_1 + mt_2 + ... + \xi t_x) / T \right]$$

n is the number of pulses of duration t1 m is the number of pulses of duration t2  $\xi$  is the number of pulses of duration txT is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Duty Cycle Correction Factor = -18.715 dB

Time of One Small Pulse =  $151 \mu s$ 

Time of One Large Pulse =  $281 \mu s$ 

Number of Small Pulses = 50

Number of Large Pulses = 15

Total On Time =  $11765 \mu s = 11.765 ms$ 

The time between pulses is greater than 100 ms

Duty Cycle = 11.765 ms / 100 ms = 11.765 %

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

TIBLE

Clear Sky Firefighter

Model: CS-602

#### **7.1.6 99 % Bandwidth**

The 99 % bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7:

- 1. Set RBW to 1 % to 5 % of the actual occupied bandwidth.
- 2. Set VBW to greater than 3 times the RBW.
- 3. Set the EMI Receiver to the occupied bandwidth Function set at 99 %
- 4. Set the peak detector to max hold.
- 5. Set the sweep time to auto
- 6. Allow the trace to stabilize.

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.

#### **7.1.7 -20 dB Bandwidth**

The -20 dB bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the -20 dB bandwidth:

- 1. Set RBW to at least 1% of the maximum occupied bandwidth allowed.
- 2. Set VBW to greater than 3 times the RBW.
- 3. Set the peak detector to max hold.
- 4. Set the sweep time to auto
- 5. Allow the trace to stabilize.
- 6. Set the markers to -20 dB of the peak fundamental emission

#### **Test Results:**

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (c); and the limits of RSS-210.

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

TIBLE

Clear Sky Firefighter

Model: CS-602

#### 7.1.8 Transmission Time

The transmission time was measured using an EMI Receiver.

The following steps were performed for measuring transmission time:

- 1. Set RBW = 120 kHz.
- 2. Set VBW = 510 kHz
- 3. Span = 0 Hz
- 4. Set the sweep time to 10 seconds
- 5. Push a button on the EUT, which automatically activated the transmitter.
- 6. Allow the trace to stabilize.
- 7. Set the 1<sup>st</sup> marker to start of the transmission
- 8. Set the 2<sup>nd</sup> marker for 5 seconds after the start of the transmission
- 9. Verify the transmission does not go beyond the 2<sup>nd</sup> marker.

#### **Test Results:**

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (a)(1) and (a)(2); and the limits of RSS-210.

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report Clear Sky Firefighter

Model: CS-602

#### 8. CONCLUSIONS

The Clear Sky Firefighter, Model: CS-602 (EUT), as tested, meets all of the specification limits defined in RSS-210, RSS-Gen, the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B; and the specification limits defined in CFR Title 47, Part, 15, Subpart C, sections 15.205, 15.209 and 15.231.

#### APPENDIX A

# LABORATORY ACCREDITATIONS AND RECOGNITIONS

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

TIBLE

Clear Sky Firefighter

Model: CS-602

## LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit http://celectronics.com/quality/scope/

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

Innovation, Science and Economic Development Canada Lab Code 2154A

## **APPENDIX B**

# **MODIFICATIONS TO THE EUT**

# MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B, FCC 15.231, RSS-210, and RSS-Gen specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



## APPENDIX C

# MODELS COVERED UNDER THIS REPORT

Model: CS-602

# MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Clear Sky Firefighter Model: ČS-602 S/N: N/A


There are no additional models or part numbers covered under this report.



## APPENDIX D

# DIAGRAMS, CHARTS, AND PHOTOS

# FIGURE 1: LAYOUT OF THE SEMI -ANECHOIC TEST CHAMBER

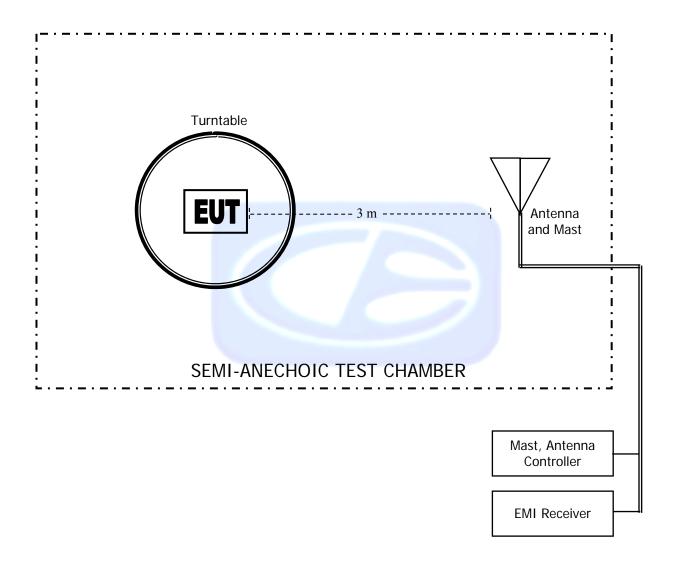

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

ATIBLE

Clear Sky Firefighter

Model: CS-602

# COM-POWER AL-130R LOOP ANTENNA

S/N: 121090

CALIBRATION DATE: FEBRUARY 5, 2019

FREQUENCY (MHz)	MAGNETIC	ELECTRIC
	(dB/m)	(dB/m)
0.009	16.1	-35.4
0.01	15.6	-35.9
0.02	14.8	-36.7
0.03	15.6	-35.9
0.04	15.1	-36.4
0.05	14.4	-37.0
0.06	14.6	-36.9
0.07	14.4	-37.1
0.08	14.3	-37.1
0.09	14.5	-36.9
0.10	14.1	-37.3
0.20	14.1	-37.3
0.30	14.0	-37.4
0.40	14.0	-37.4
0.50	14.2	-37.2
0.60	14.2	-37.2
0.70	14.2	-37.2
0.80	14.2	-37.3
0.90	14.3	-37.2
1.00	14.5	-37.0
2.00	14.5	-36.9
3.00	14.5	-36.9
4.00	14.7	-36.8
5.00	14.6	-36.9
6.00	14.6	-36.9
7.00	14.6	-36.9
8.00	14.6	-36.9
9.00	14.6	-36.9
10.00	14.8	-36.6
11.00	14.9	-36.6
12.00	14.8	-36.6
13.00	14.8	-36.7
14.00	14.6	-36.8
15.00	14.5	-36.9
16.00	14.5	-37.0
17.00	14.5	-36.9
18.00	14.6	-36.7
19.00	14.7	-36.6
20.00	14.8	-36.6 -36.6
21.00	14.9	-36.8
22.00	14.0	-30.8
23.00	13.7	-37.7
24.00	13.7	-37.7
25.00	13.3	-38.5 -38.5
26.00	12.9	
26.00		-38.6
	13.0	-38.5 38.4
28.00	13.1	-38.4
29.00	13.1 12.9	-38.4 -38.5
30.00	12.9	-38.3

Clear Sky Firefighter

Model: CS-602

# COM-POWER AC-220

# **COMBILOG ANTENNA**

S/N: 61093

CALIBRATION DATE: JUNE 5, 2019

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.10	200	15.30
35	20.90	250	16.80
40	20.10	300	19.00
45	19.40	350	19.60
50	18.40	400	21.70
60	15.10	450	21.60
70	12.00	500	22.20
80	11.60	550	22.70
90	13.50	600	24.20
100	14.70	650	24.40
120	15.90	700	24.50
125	15.90	750	25.40
140	14.80	800	26.30
150	15.50	850	26.70
160	19.80	900	27.50
175	15.20	950	27.80
180	14.90	1000	27.90

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

TIBLE

Clear Sky Firefighter

Model: CS-602

## **COM POWER AH-118**

# HORN ANTENNA

S/N: 10050113

# CALIBRATION DATE: FEBRUARY 4, 2020

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.343	10.0	38.826
1.5	25.419	10.5	39.102
2.0	28.838	11.0	38.259
2.5	28.971	11.5	39.920
3.0	29.919	12.0	40.149
3.5	30.674	12.5	40.576
4.0	31.670	13.0	40.264
4.5	32.437	13.5	40.364
5.0	33.414	14.0	40.424
5.5	34.003	14.5	41.677
6.0	34.799	15.0	43.010
6.5	35.381	15.5	39.799
7.0	37.024	16.0	40.187
7.5	37.403	16.5	40.155
8.0	37.445	17.0	40.507
8.5	37.390	17.5	41.963
9.0	38.076	18.0	43.196
9.5	38.809		

Clear Sky Firefighter

Model: CS-602

## **COM-POWER PA-118**

# **PREAMPLIFIER**

S/N: 181653

# CALIBRATION DATE: FEBRUARY 5, 2020

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	40.10	6.0	40.60
1.1	40.10	6.5	39.50
1.2	40.00	7.0	39.40
1.3	39.70	7.5	39.30
1.4	39.60	8.0	39.20
1.5	39.90	8.5	40.50
1.6	40.00	9.0	39.60
1.7	39.70	9.5	39.50
1.8	39.50	10.0	38.80
1.9	39.60	11.0	38.70
2.0	39.90	12.0	42.20
2.5	40.10	13.0	40.00
3.0	40.80	14.0	40.30
3.5	40.60	15.0	40.20
4.0	40.50	16.0	41.00
4.5	41.60	17.0	39.70
5.0	39.20	18.0	40.90
5.5	40.00		



#### **FRONT VIEW**

ECOLINK INTELLIGENT TECHNOLOGY, INC.

CLEAR SKY FIREFIGHTER

MODEL: CS-602

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – BELOW 1 GHz

# PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS



#### **REAR VIEW**

ECOLINK INTELLIGENT TECHNOLOGY, INC.


CLEAR SKY FIREFIGHTER

MODEL: CS-602

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – BELOW 1 GHZ

# PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS




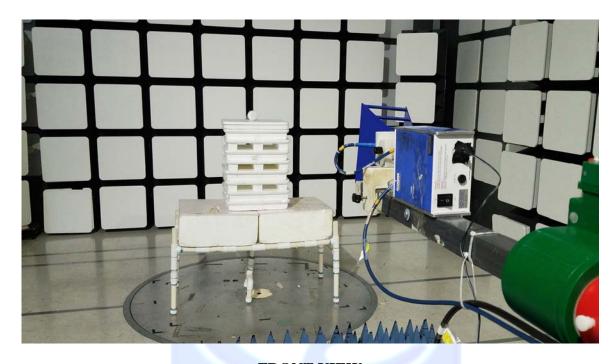

#### **FRONT VIEW**

ECOLINK INTELLIGENT TECHNOLOGY, INC.
CLEAR SKY FIREFIGHTER
MODEL: CS-602
FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHZ

## PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS

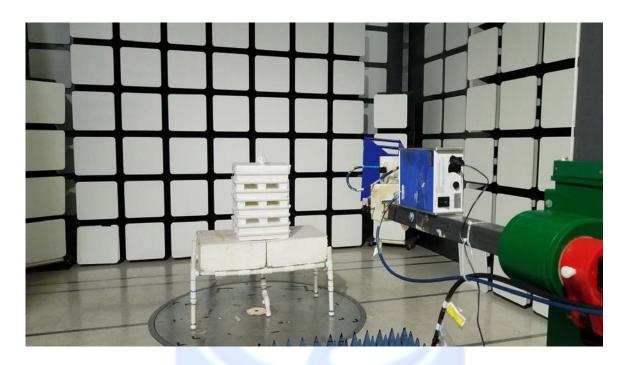

#### **REAR VIEW**

ECOLINK INTELLIGENT TECHNOLOGY, INC. ECOLINK INTELLIGENT TECHNOLOGY, INC.

CLEAR SKY FIREFIGHTER

MODEL: CS-602

FCC SUBPART B AND C; RSS-210 AND RSS-GEN - RADIATED EMISSIONS - ABOVE 1 GHz

## PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONs

#### **APPENDIX E**

## DATA SHEETS

## RADIATED EMISSIONS

DATA SHEETS

11/23/2020 2:17:12 PM

Sequence: Preliminary Scan

Report Number: B01123D1



Title: Pre-Scan - FCC Class B File: 1 - Keysight - Pre-Scan - X-Axis - CS-602 - FCC Class B - 11-23-2020.set Operator: Kyle Fujimoto EUT Type: Clear Sky Firefighter EUT Condition: The EUT is continuously transmitting at 345 MHz

Company: Ecolink Intelligent Technology, Inc. Model: CS-602


(PEAK) EMI (V)

S/N: N/A

Note: The emission at 345 MHz and 690 MHz are from the intentional radiator from the EUT and are subject to the limits of FCC 15.231 instead.

X-Axis (Worst Case)

FCC Class B

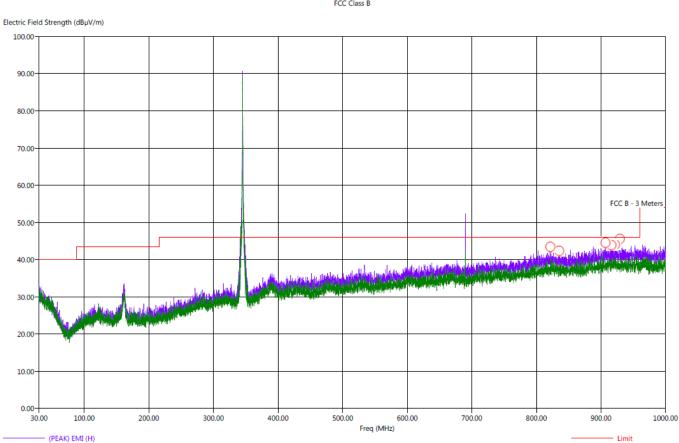



Title: Radiated Final - FCC Class B File: 1 - Keysight - Final Scan - CS-602 - FCC Class B - 11-23-2020.set Operator: Kyle Fujimoto EUT Type: Clear Sky Firefighter EUT Condition: The EUT is continuously transmitting at 345 MHz Company: Ecolink Intelligent Technology, Inc. Model: CS-602 S/N: N/A

X-Axis

11/23/2020 2:28:25 PM Sequence: Final Measurements

#### FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(OP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Agl (deg)	Twr Ht (cm)
821.70	н	42.72	37.21	-3.28	-8.79	46.00	26.96	2.30	185.50	209.73
835.50	н	42.61	37.05	-3.39	-8.95	46.00	26.75	2.30	79.25	334.68
907.20	н	44.08	38.46	-1.92	-7.54	46.00	27.80	2.47	322.25	286.80
916.40	H	44.17	38.69	-1.83	-7.31	46.00	27.94	2.51	272.00	302.74
921.80	н	44.58	38.81	-1.42	-7.19	46.00	28.01	2.53	123.50	334.62
929.30	Н	44.06	38.69	-1.94	-7.31	46.00	27.80	2.57	138.00	302.62



## **FUNDAMENTAL AND HARMONICS**

DATA SHEETS



FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 11/23/2020

Clear Sky Firefighter Lab: D

Model: CS-602 Tested By: Kyle Fujimoto

#### **Fundamental**

Freq.	Level	Pol			Peak / QP /	Table Angle	Ant. Height	
(MHz)	(dBuV/m)	(v/h)	Limit	Margin	Avg	(deg)	(cm)	Comments
345.00	92.32	V	97.26	-4.94	Peak	58.75	180.89	X-Axis
345.00	73.74	V	77.26	-3.52	Avg	58.75	180.89	Vertical Polarization
345.00	92.97	V	97.26	-4.29	Peak	35.50	193.85	Y-Axis
345.00	74.39	V	77.26	-2.87	Avg	35.50	193.85	Vertical Polarization
345.00	89.54	V	97.26	-7.72	Peak	276.75	167.28	Z-Axis
345.00	70.96	V	77.26	-6.30	Avg	276.75	167.28	Vertical Polarization
345.00	93.41	Н	97.26	-3.85	Peak	237.75	100.53	X-Axis
345.00	74.83	Н	77.26	-2.43	Avg	237.75	100.53	Horizontal Polarization
345.00	87.53	Н	97.26	-9.73	Peak	353.25	100.38	Y-Axis
345.00	68.95	Н	77.26	-8.31	Avg	353.25	100.38	Horizontal Polarization
345.00	94.63	Н	97.26	-2.63	Peak	0.25	102.20	Z-Axis
345.00	76.05	Н	77.26	-1.21	Avg	0.25	102.20	Horizontal Polarization
<u> </u>								



FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 11/23/2020

Clear Sky Firefighter Lab: D

Model: CS-602 Tested By: Kyle Fujimoto

**Harmonics** 

**Transmit Mode - X-Axis** 

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
690.00	49.49	V	77.26	-27.77	Peak	283.75	147.64	
690.00	30.91	V	57.26	-26.35	Avg	283.75	147.64	
1035.00	45.83	V	73.97	-28.14	Peak	116.50	153.55	
1035.00	27.25	V	53.97	-26.72	Avg	116.50	153.55	
1380.00	36.90	V	73.97	-37.08	Peak	46.25	130.08	
1380.00	18.32	V	53.97	-35.66	Avg	46.25	130.08	
1725.00	52.85	V	77.26	-24.41	Peak	334.25	187.22	
1725.00	34.27	V	57.26	-22.99	Avg	334.25	187.22	
2070.00	63.46	V	77.26	-13.80	Peak	123.75	114.44	
2070.00	44.88	V	57.26	-12.38	Avg	123.75	114.44	
2415.00	67.65	V	77.26	-9.61	Peak	331.50	207.34	
2415.00	49.07	V	57.26	-8.19	Avg	331.50	207.34	
2760.00	63.03	V	73.97	-10.94	Peak	59.75	127.28	
2760.00	44.45	V	53.97	-9.52	Avg	59.75	127.28	
3105.00	58.44	V	77.26	-18.82	Peak	90.75	127.76	
3105.00	39.86	V	57.26	-17.40	Avg	90.75	127.76	
3450.00	56.24	V	77.26	-21.02	Peak	71.00	143.34	
3450.00	37.66	V	57.26	-19.60	Avg	71.00	143.34	



#### FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 11/23/2020

Clear Sky Firefighter Lab: D

Model: CS-602 Tested By: Kyle Fujimoto

#### **Harmonics**

**Transmit Mode - Y-Axis** 

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
690.00	55.11	V	77.26	-22.15	Peak	281.25	160.65	
690.00	36.53	V	57.26	-20.73	Avg	281.25	160.65	
1035.00	45.27	V	73.97	-28.70	Peak	358.50	191.22	
1035.00	26.69	V	53.97	-27.28	Avg	358.50	191.22	
1380.00	35.37	V	73.97	-38.60	Peak	4.25	207.22	
1380.00	16.79	V	53.97	-37.18	Avg	4.25	207.22	
1725.00	54.41	V	77.26	-22.85	Peak	348.25	191.10	
1725.00	35.83	V	57.26	-21.43	Avg	348.25	191.10	
					100000000000000000000000000000000000000			
2070.00	71.23	V	77.26	-6.03	Peak	0.25	143.40	
2070.00	52.65	V	57.26	-4.61	Avg	0.25	143.40	
2415.00	72.08	V	77.26	-5.18	Peak	322.25	175.16	
2415.00	53.50	V	57.26	-3.76	Avg	322.25	175.16	
2760.00	58.32	V	73.97	-15.65	Peak	26.25	127.28	
2760.00	39.74	V	53.97	-14.23	Avg	26.25	127.28	
3105.00	57.96	V	77.26	-19.30	Peak	352.75	207.04	
3105.00	39.38	V	57.26	-17.88	Avg	352.75	207.04	
3450.00	54.19	V	77.26	-23.07	Peak	74.00	175.88	
3450.00	35.61	V	57.26	-21.65	Avg	74.00	175.80	



#### FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 11/23/2020

Clear Sky Firefighter Lab: D

Model: CS-602 Tested By: Kyle Fujimoto

#### **Harmonics**

**Transmit Mode - Z-Axis** 

(MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
690.00	54.31	V	77.26	-22.95	Peak	66.50	164.29	
690.00	35.73	V	57.26	-21.53	Avg	66.50	164.29	
1035.00	45.54	V	73.97	-28.43	Peak	112.75	143.40	
1035.00	26.96	V	53.97	-27.01	Avg	112.75	143.40	
1380.00	35.31	V	73.97	-38.66	Peak	162.75	206.92	
1380.00	16.73	V	53.97	-37.24	Avg	162.75	206.92	
1725.00	48.90	V	77.26	-28.36	Peak	318.25	111.40	
1725.00	30.32	V	57.26	-26.94	Avg	318.25	111.40	
2070.00	65.06	V	77.26	-12.20	Peak	260.25	127.40	
2070.00	46.48	V	57.26	-10.78	Avg	260.25	127.40	
2415.00	72.98	V	77.26	-4.28	Peak	231.75	111.34	
2415.00	54.40	V	57.26	-2.86	Avg	231.75	111.34	
2760.00	62.10	V	73.97	-11.87	Peak	178.25	127.40	
2760.00	43.52	V	53.97	-10.45	Avg	178.25	127.40	
3105.00	59.65	V	77.26	-17.61	Peak	151.50	111.40	
3105.00	41.07	V	57.26	-16.19	Avg	151.50	111.40	
3450.00	48.54	V	77.26	-28.72	Peak	356.25	249.91	
3450.00	29.96	V	57.26	-27.30	Avg	356.25	249.91	





FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 11/23/2020

Clear Sky Firefighter Lab: D

Model: CS-602 Tested By: Kyle Fujimoto

#### **Harmonics**

**Transmit Mode - X-Axis** 

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
690.00	57.99	Н	77.26	-19.27	Peak	184.50	119.76	
690.00	39.41	Н	57.26	-17.85	Avg	184.50	119.76	
1035.00	44.96	Н	73.97	-29.01	Peak	197.75	175.58	
1035.00	26.38	Н	53.97	-27.59	Avg	197.75	175.58	
1380.00	38.15	Н	73.97	-35.82	Peak	25.35	201.00	
1380.00	19.57	Н	53.97	-34.40	Avg	25.35	201.00	
1725.00	51.87	Н	77.26	-25.39	Peak	96.75	127.28	
1725.00	33.29	Н	57.26	-23.97	Avg	96.75	127.28	
					760			
2070.00	67.45	Η	77.26	-9.81	Peak	56.20	159.46	
2070.00	48.87	Н	57.26	-8.39	Avg	56.25	159.46	
2415.00	71.33	Н	77.26	-5.93	Peak	0.00	192.79	
2415.00	52.75	Н	57.26	-4.51	Avg	0.00	192.79	
2760.00	53.93	Н	73.97	-20.04	Peak	311.75	127.16	
2760.00	35.35	Н	53.97	-18.62	Avg	311.75	127.16	
3105.00	54.68	Н	77.26	-22.58	Peak	149.25	191.04	
3105.00	36.10	Н	57.26	-21.16	Avg	149.25	191.04	
3450.00	52.88	Н	77.26	-24.38	Peak	95.00	110.68	
3450.00	34.30	Н	57.26	-22.96	Avg	95.00	110.68	





FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 11/23/2020

Clear Sky Firefighter Lab: D

Model: CS-602 Tested By: Kyle Fujimoto

**Harmonics** 

**Transmit Mode - Y-Axis** 

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
690.00	51.44	Н	77.26	-25.82	Peak	354.50	120.65	
690.00	32.86	Н	57.26	-24.40	Avg	354.50	120.65	
1035.00	45.49	Н	73.97	-28.48	Peak	179.00	175.10	
1035.00	26.91	Н	53.97	-27.06	Avg	179.00	175.10	
1380.00	36.41	Н	73.97	-37.56	Peak	298.00	175.22	
1380.00	17.83	Н	53.97	-36.14	Avg	298.00	175.22	
						///		
1725.00	51.08	Н	77.26	-26.18	Peak	304.50	127.22	
1725.00	32.50	Н	57.26	-24.76	Avg	304.50	127.22	
2070.00	56.77	Н	77.26	-20.49	Peak	146.75	127.28	
2070.00	38.19	Н	57.26	-19.07	Avg	146.75	127.28	
0445.00	60.00		77.00	0.00	Daal	040.75	407.40	
2415.00	68.06	Н	77.26	-9.20 7.70	Peak	313.75	127.40	
2415.00	49.48	Н	57.26	-7.78	Avg	313.75	127.40	
2760.00	64.05	Н	73.97	-9.92	Peak	113.75	143.52	
2760.00	45.47	H	53.97	-8.50	Avg	113.75	143.52	
2700.00	70.77	- 11	30.07	0.00	, .vg	110.70	140.02	
3105.00	60.12	Н	77.26	-17.14	Peak	145.00	175.22	
3105.00	41.54	Н	57.26	-15.72	Avg	145.00	175.22	
3450.00	57.39	Н	77.26	-19.87	Peak	63.25	143.34	
3450.00	38.81	Н	57.26	-18.45	Avg	63.25	143.34	





FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 11/23/2020

Clear Sky Firefighter Lab: D

Model: CS-602 Tested By: Kyle Fujimoto

**Harmonics** 

**Transmit Mode - Z-Axis** 

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
690.00	55.58	Н	77.26	-21.68	Peak	183.75	113.55	
690.00	37.00	Н	57.26	-20.26	Avg	183.75	113.55	
1035.00	46.52	Н	73.97	-27.45	Peak	0.00	127.34	
1035.00	27.94	Н	53.97	-26.03	Avg	0.00	127.34	
1380.00	34.36	Н	73.97	-39.61	Peak	353.00	143.52	
1380.00	15.78	Н	53.97	-38.19	Avg	353.00	143.52	
1725.00	53.82	Н	77.26	-23.44	Peak	0.00	159.16	
1725.00	35.24	Н	57.26	-22.02	Avg	0.00	159.16	
2070.00	70.39	Н	77.26	-6.87	Peak	340.25	191.40	
2070.00	51.81	Н	57.26	-5.45	Avg	340.25	191.40	
2415.00	70.66	Н	77.26	-6.60	Peak	5.00	191.28	
2415.00	52.08	Н	57.26	-5.18	Avg	5.00	191.28	
2760.00	55.31	Н	73.97	-18.66	Peak	314.00	191.16	
2760.00	36.73	Н	53.97	-17.24	Avg	314.00	191.16	
3105.00	58.28	Н	77.26	-18.98	Peak	20.00	127.28	
3105.00	39.70	Н	57.26	-17.56	Avg	20.00	127.28	
3450.00	49.59	Н	77.26	-27.67	Peak	60.00	174.92	
3450.00	31.01	Н	57.26	-26.25	Avg	60.00	174.92	

Report Number: **B01123D1**FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

Clear Sky Firefighter

Model: CS-602

FCC Class B and FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 11/23/2020

Clear Sky Firefighter

Lab: D

Model: CS-602 Tested By: Kyle Fujimoto

Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz To 3.45 GHz

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
								No Emissions Detected
								from 9 kHz to 30 MHz
								for the digital portion
								of the EUT
								No Emissions Detected
						4		from 1 GHz to 3.45 GHz
								for the digital portion
								of the EUT
					7-1-1	and the second		
								No Emissions Detected
								from 9 kHz to 30 MHz
								for the Non-Harmonic Emissions
								of the Transmitter for the EUT
								5. tile 1. tanonimo 16. tile <b>2</b> 0 .
								No Emissions Detected
								from 1 GHz to 3.45 GHz
								for the Non-Harmonic Emissions
								of the Transmitter for the EUT
								or the Transmitter for the 201
								Investigated in the X-Axis,
								Y-Axis, and Z-Axis
								-,
				<u> </u>				


# 99 % BANDWIDTH DATA SHEET

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report

TIBLE

Clear Sky Firefighter

Model: CS-602

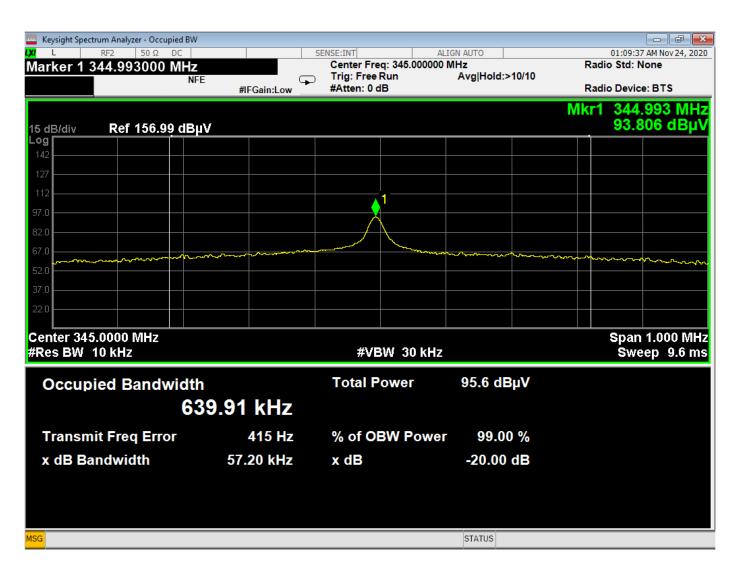


99 Percent Bandwidth Plot

# -20 dB BANDWIDTH PLOT DATA SHEET

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report Clear Sky Firefighter

Model: CS-602

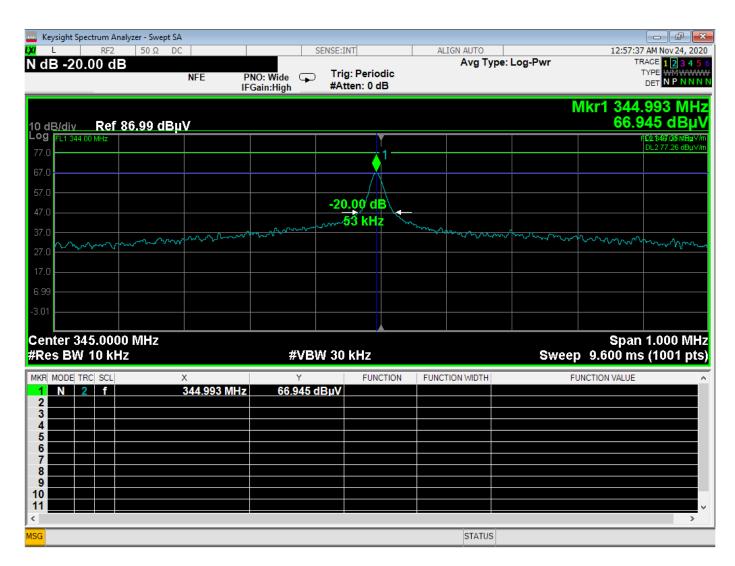

-20 dB Bandwidth Plot


# TRANSMISSION TIME DATA SHEET

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report


TIBLE

Clear Sky Firefighter

Model: CS-602

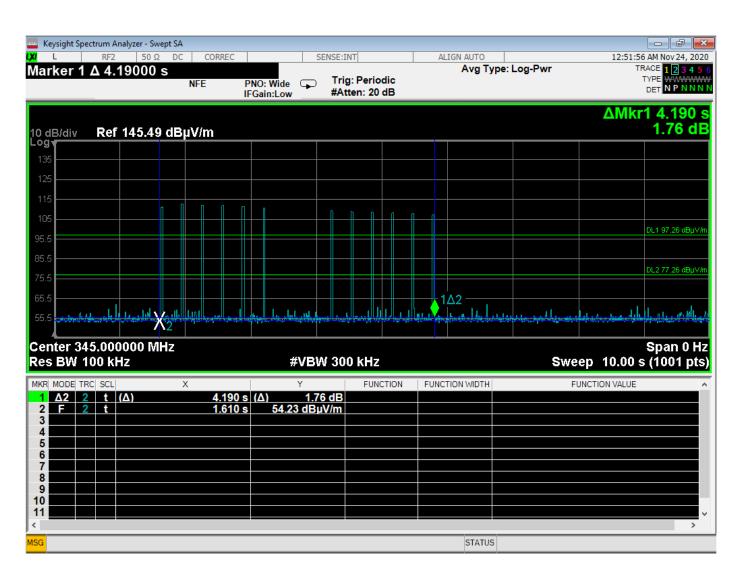

Time of Transmission - 4.19 Seconds

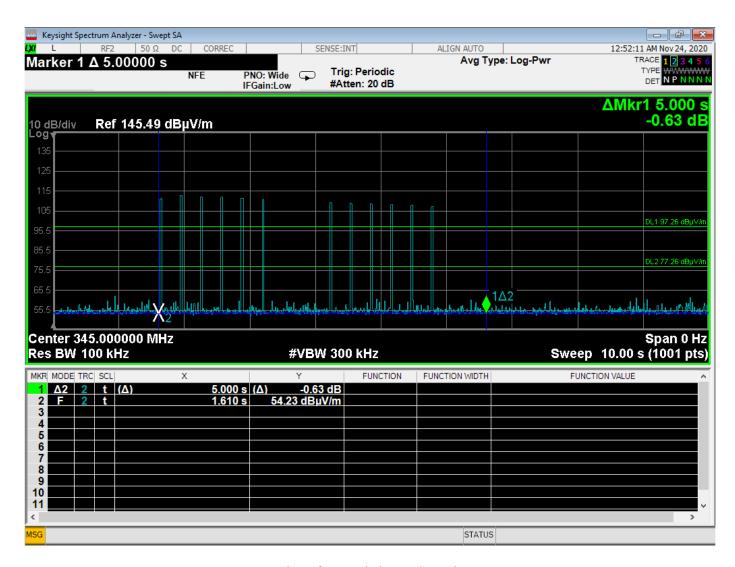


Time of Transmission - 5 Seconds

## **DUTY CYCLE**


DATA SHEETS

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report Clear Sky Firefighter


Model: CS-602

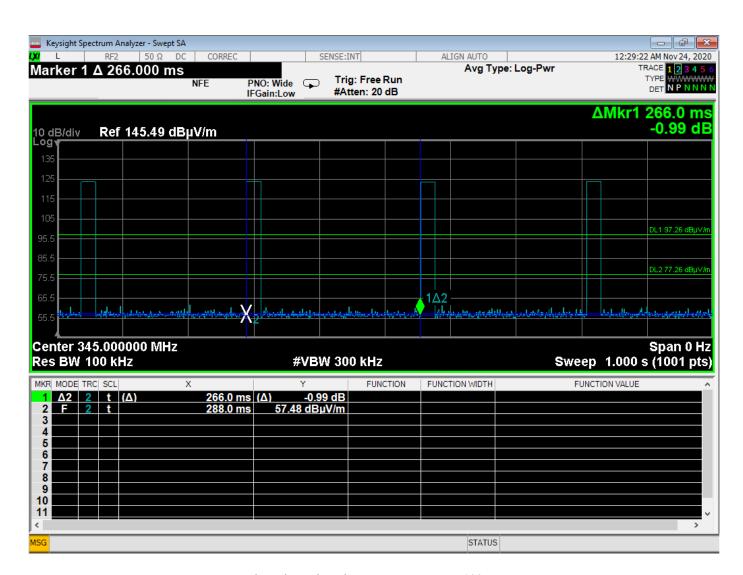

The pulse train only appears once every 100 ms

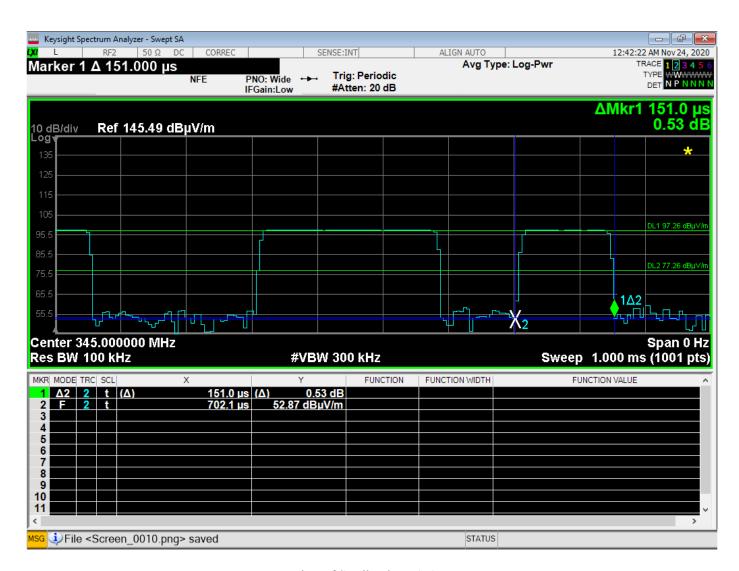


Time of Small Pulse = 151 us

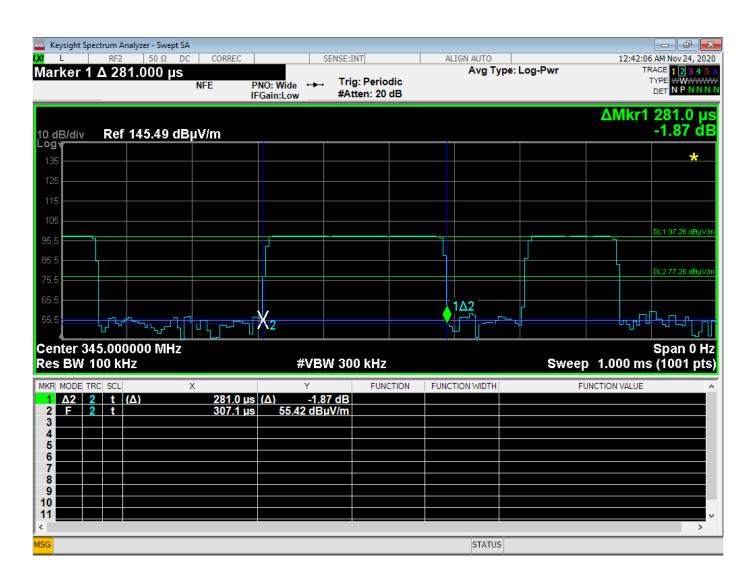

Time of Large Pulse = 281 us

FCC Part 15 Subpart B and FCC Section 15.231; RSS-210 & RSS-GEN Test Report Clear Sky Firefighter

Model: CS-602

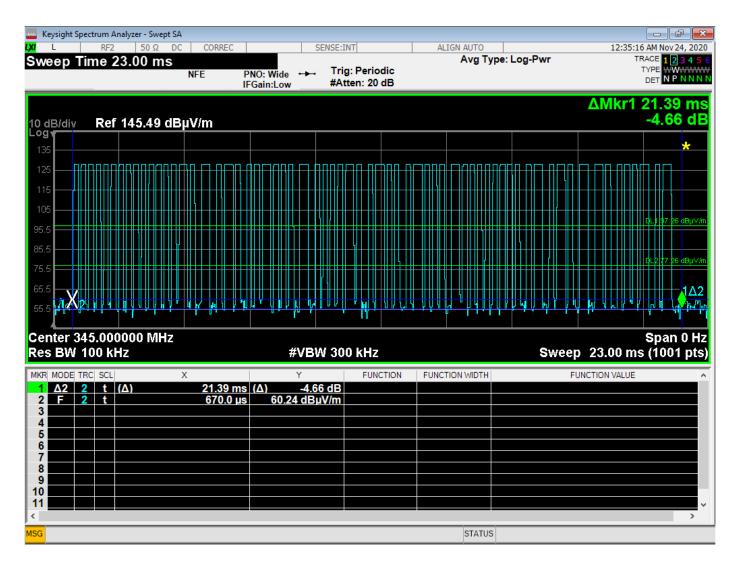

Number of Small Pulses = 50 = (50\*151 us) = 7550 usNumber of Large Pulses = 15 = (15\*281 us) = 4215 us

Total On Time = 11765 us = 11.765 ms

Duty Cycle = 11.765 ms / 100 ms = 11.765%

The peak to average ratio is -18.58 dB