



EMC-TRF-01 Rev 1.0

Report No.: GZCR210802082806

Page: 1 of 252

FCC ID: SS3-RM51021

TEST REPORT

Application No.: GZCR2108020828AT
Applicant: SZ DJI TECHNOLOGY CO.,LTD.
Address of Applicant: 14th floor, West Wing, Skyworth Semiconductor Design Building NO.18
Gaoxin South 4th Ave, Nanshan District, Shenzhen, Guangdong, China
Manufacturer: SZ DJI TECHNOLOGY CO.,LTD.
Address of Manufacturer: 14th floor, West Wing, Skyworth Semiconductor Design Building NO.18
Gaoxin South 4th Ave, Nanshan District, Shenzhen, Guangdong, China
Equipment Under Test (EUT):
EUT Name: DJI RC Pro
Model No.: RM510
Trade mark: DJI
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2021-08-19
Date of Test: 2021-08-20 to 2021-08-27
Date of Issue: 2021-08-30

| | |
|---------------------|--------------|
| Test Result: | Pass* |
|---------------------|--------------|

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian

Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198 Kexu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

| Revision Record | | | | |
|-----------------|---------|------------|----------|----------|
| Version | Chapter | Date | Modifier | Remark |
| 01 | | 2021-08-30 | | Original |
| | | | | |
| | | | | |

| | | | | |
|-------------------------|--|---|--|--|
| Authorized for issue by | | | | |
| Tested By | |  | | |
| | | | | |
| | | Curry Wu /Project Engineer | | |
| Reviewed By | |  | | |
| | | | | |
| | | Ricky Liu/Reviewer | | |

2 Test Summary

| Radio Spectrum Technical Requirement | | | | |
|--------------------------------------|----------------------------------|-------------------|--------------------------------------|--------|
| Item | Standard | Method | Requirement | Result |
| Antenna Requirement | 47 CFR Part 15, Subpart E 15.407 | N/A | 47 CFR Part 15, Subpart C 15.203 | Pass |
| Transmission in the Absence of Data | | N/A | 47 CFR Part 15, Subpart E 15.407 (c) | Pass |
| Frequency Stability | | KDB 789033 II A 3 | 47 CFR Part 15, Subpart E 15.407 (g) | Pass |

| Radio Spectrum Matter Part | | | | |
|---|----------------------------------|--------------------------------|--|--------|
| Item | Standard | Method | Requirement | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz) | 47 CFR Part 15, Subpart E 15.407 | ANSI C63.10 (2013) Section 6.2 | 47 CFR Part 15, Subpart C 15.207 & E 15.407 b(6) | Pass |
| Duty Cycle | | KDB 789033 II B 1 | KDB 789033 D02 II B 1 | Pass |
| 99% Bandwidth | | KDB 789033 II D | N/A | Pass |
| 26dB Emission bandwidth | | KDB 789033 D02 II C 1 | 47 CFR Part 15, Subpart E 15.407 (a) | Pass |
| Minimum 6 dB bandwidth (5.725-5.85 GHz band) | | KDB 789033 D02 II C 2 | 47 CFR Part 15, Subpart E 15.407 (e) | Pass |
| Maximum Conducted output power | | KDB 789033 D02 II E | 47 CFR Part 15, Subpart E 15.407 (a) | Pass |
| Peak Power spectrum density | | KDB 789033 D02 II F | 47 CFR Part 15, Subpart E 15.407 (a) | Pass |
| Radiated Emissions | | KDB 789033 D02 II G | 47 CFR Part 15, Subpart C 15.209 & E 15.407(b) | Pass |
| Radiated Emissions which fall in the restricted bands | | KDB 789033 D02 II G | 47 CFR Part 15, Subpart C 15.209 & E 15.407(b) | Pass |
| Band Edge | | KDB 789033 D02 II | 47 CFR Part 15, Subpart E 15.407(b) | Pass |

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

| | Page |
|---|-----------|
| 1 Cover Page | 1 |
| 2 Test Summary | 3 |
| 3 Contents | 4 |
| 4 General Information..... | 6 |
| 4.1 Details of E.U.T. | 6 |
| 4.2 Description of Support Units | 6 |
| 4.3 Measurement Uncertainty | 7 |
| 4.4 Test Location..... | 7 |
| 4.5 Test Facility | 8 |
| 4.6 Deviation from Standards..... | 8 |
| 4.7 Abnormalities from Standard Conditions | 8 |
| 5 Equipment List | 9 |
| 6 Radio Spectrum Technical Requirement | 14 |
| 6.1 Antenna Requirement | 14 |
| 6.1.1 Test Requirement: | 14 |
| 6.1.2 Conclusion | 14 |
| 6.2 Transmission in the Absence of Data | 15 |
| 6.2.1 Test Requirement: | 15 |
| 6.2.2 Conclusion | 15 |
| 6.3 Frequency Stability | 15 |
| 6.3.1 Test Requirement: | 15 |
| 6.3.2 Conclusion | 15 |
| 7 Radio Spectrum Matter Test Results | 16 |
| 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz) | 16 |
| 7.1.1 E.U.T. Operation | 16 |
| 7.1.2 Test Mode Description | 16 |
| 7.1.3 Test Setup Diagram | 17 |
| 7.1.4 Measurement Procedure and Data..... | 17 |
| 7.2 Duty Cycle | 20 |
| 7.2.1 E.U.T. Operation | 20 |
| 7.2.2 Test Mode Description | 20 |
| 7.2.3 Test Setup Diagram | 20 |
| 7.2.4 Measurement Procedure and Data..... | 20 |
| 7.3 99% Bandwidth | 21 |
| 7.3.1 E.U.T. Operation | 21 |
| 7.3.1 Test Mode Description | 21 |
| 7.3.2 Test Setup Diagram | 22 |
| 7.3.3 Measurement Procedure and Data..... | 22 |
| 7.4 26dB Emission bandwidth | 23 |
| 7.4.1 E.U.T. Operation | 23 |
| 7.4.1 Test Mode Description | 23 |
| 7.4.2 Test Setup Diagram | 24 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

| | | |
|--------|---|-----|
| 7.4.3 | Measurement Procedure and Data..... | 24 |
| 7.5 | Minimum 6 dB bandwidth (5.725-5.85 GHz band)..... | 25 |
| 7.5.1 | E.U.T. Operation | 25 |
| 7.5.1 | Test Mode Description | 25 |
| 7.5.2 | Test Setup Diagram | 26 |
| 7.5.3 | Measurement Procedure and Data..... | 26 |
| 7.6 | Maximum Conducted output power | 27 |
| 7.6.1 | E.U.T. Operation | 27 |
| 7.6.1 | Test Mode Description | 27 |
| 7.6.2 | Test Setup Diagram | 28 |
| 7.6.3 | Measurement Procedure and Data..... | 28 |
| 7.7 | Peak Power spectrum density..... | 29 |
| 7.7.1 | E.U.T. Operation | 29 |
| 7.7.1 | Test Mode Description | 29 |
| 7.7.2 | Test Setup Diagram | 30 |
| 7.7.3 | Measurement Procedure and Data..... | 30 |
| 7.8 | Radiated Emissions | 31 |
| 7.8.1 | E.U.T. Operation | 31 |
| 7.8.2 | Test Mode Description | 32 |
| 7.8.3 | Test Setup Diagram | 33 |
| 7.8.4 | Measurement Procedure and Data..... | 34 |
| 7.9 | Radiated Emissions which fall in the restricted bands | 80 |
| 7.9.1 | E.U.T. Operation | 81 |
| 7.9.1 | Test Mode Description | 81 |
| 7.9.2 | Test Setup Diagram | 82 |
| 7.9.3 | Measurement Procedure and Data..... | 83 |
| 7.10 | Band Edge..... | 112 |
| 7.10.1 | E.U.T. Operation..... | 112 |
| 7.10.1 | Test Mode Description..... | 112 |
| 7.10.2 | Test Setup Diagram..... | 113 |
| 7.10.3 | Measurement Procedure and Data | 113 |
| 8 | Test Setup Photo | 114 |
| 9 | EUT Constructional Details (EUT Photos) | 114 |
| 10 | Appendix..... | 115 |

4 General Information

4.1 Details of E.U.T.

| | |
|----------------------|--|
| Power supply: | DC 7.2V Lithium-ion rechargeable battery (to be charged from type C port) |
| Operation Frequency: | 1.4MHz BW:5728.5MHz-5846.5MHz; 1.4MHz BW CA:5730.12MHz-5848.12MHz; 3MHz BW:5727.5MHz-5844.5MHz; 3MHz BW CA:5730.2MHz-5847.2MHz; 10MHz BW:5730.5MHz-5844.5MHz; 20MHz BW:5735.5MHz-5839.5MHz; 40MHz BW:5745.5MHz-5829.5MHz |
| Modulation Type: | OFDM |
| Number of Channels: | 1.4MHz BW:60; 1.4MHz BW CA:60; 3MHz BW:40; 3MHz BW CA:40; 10MHz BW:115; 20MHz BW:105; 40MHz BW:85 |
| Channel Spacing: | 1.4MHz BW:2MHz; 1.4MHz BW CA:2MHz; 3MHz BW:3MHz; 3MHz BW CA:3MHz; 10MHz BW:1MHz; 20MHz BW:1MHz; 40MHz BW:1MHz |
| Antenna Type: | Dipole Antenna |
| Antenna Gain: | Antenna 1&3: 3.5dBi; Antenna 2: 4dBi; Antenna 4: 4.5dBi Antenna 1&2 are TX Antennas; Antenna 3&4 are RX Antennas |

4.2 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|---------------|--------------|-----------|------------|
| AC/DC Adapter | DJI | PD-65US | N/A |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.3 Measurement Uncertainty

| Test Item | Measurement Uncertainty |
|--|--|
| Conducted Emissions at AC Power Line (150kHz-30MHz) | 3.12dB |
| Duty Cycle | ± 0.37% |
| 99% Bandwidth | ± 3% |
| 26dB Emission bandwidth | ± 3% |
| Minimum 6 dB bandwidth (5.725-5.85 GHz band) | ± 3% |
| Maximum Conducted output power | ± 0.75dB |
| Peak Power spectrum density | ± 2.84dB |
| Radiated Emissions | 5.06dB (30MHz-1GHz ; 3m) 4.46dB (30MHz-1GHz ; 10m) 5.08dB (1GHz-6GHz) 5.14dB (above 6GHz) |
| Radiated Emissions which fall in the restricted bands | 5.06dB (30MHz-1GHz ; 3m) 4.46dB (30MHz-1GHz ; 10m) 5.08dB (1GHz-6GHz) 5.14dB (above 6GHz) |
| Frequency Stability | ± 7.25 x 10 ⁻⁸ |

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555

Fax: +86 20 82075059

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

5 Equipment List

| Conducted Emissions at AC Power Line (150kHz-30MHz) | | | | | |
|---|-------------------|----------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| Shielding Room | ChangZhou ZhongYu | 8m x 3m x 3.8m | EMC0306 | N/A | N/A |
| Two-Line V-Network | Rohde & Schwarz | ENV216 | EMC0118 | 2021-01-08 | 2022-01-06 |
| Two-Line V-Network-GZ | Rohde & Schwarz | ENV216 | EMC2135 | 2020-09-25 | 2021-09-24 |
| Coaxial Cable | HangTianXing | 2m | EMC0107 | 2020-09-09 | 2022-09-08 |
| Test Software E3c | Audix | Ver. 5.4.1221b | GZE100-62 | N/A | N/A |
| EMI Test Receiver(9kHz-3.6GHz) | Rohde & Schwarz | ESR4 | EMC2221 | 2021/6/1 | 2022/5/31 |

| Duty Cycle | | | | | |
|--|----------------------|-------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz) | Agilent Technologies | N9020A | SEM004-10 | 2021-03-02 | 2022-03-01 |
| ESG Vector Signal Generator(250kHz-6GHz) | Keysight | E4438C | SEM006-03 | 2021-03-12 | 2022-03-11 |
| EXG Analog Signal Generator(9kHz-3GHz) | Agilent Technologies | N5171B | SEM006-04 | 2020-07-15 | 2021-07-14 |
| Power Meter (U2021XA_Ch2) | Agilent Technologies | U2021XA_Ch2 | SEM009-02 | 2021-05-19 | 2022-05-18 |
| Power Meter (U2021XA_Ch3) | Agilent Technologies | U2021XA_Ch3 | SEM009-03 | 2021-05-19 | 2022-05-18 |
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2019-11-02 | 2021-11-01 |
| MI CABLE | SGS-EMC | 0.8M | EMC2137 | 2019-11-02 | 2021-11-01 |

| 99% Bandwidth | | | | | |
|--|----------------------|-------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz) | Agilent Technologies | N9020A | SEM004-10 | 2021-03-02 | 2022-03-01 |
| ESG Vector Signal Generator(250kHz-6GHz) | Keysight | E4438C | SEM006-03 | 2021-03-12 | 2022-03-11 |
| EXG Analog Signal Generator(9kHz-3GHz) | Agilent Technologies | N5171B | SEM006-04 | 2020-07-15 | 2021-07-14 |
| Power Meter (U2021XA_Ch2) | Agilent Technologies | U2021XA_Ch2 | SEM009-02 | 2021-05-19 | 2022-05-18 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. 198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou Branch Testing & Inspection Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

| | | | | | |
|------------------------------------|-------------------------|-------------|-----------|------------|------------|
| Power Meter (U2021XA_Ch3) | Agilent Technologies | U2021XA_Ch3 | SEM009-03 | 2021-05-19 | 2022-05-18 |
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2019-11-02 | 2021-11-01 |
| MI CABLE | SGS-EMC | 0.8M | EMC2137 | 2019-11-02 | 2021-11-01 |

| 26dB Emission bandwidth | | | | | |
|---|-------------------------|-------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz) | Agilent Technologies | N9020A | SEM004-10 | 2021-03-02 | 2022-03-01 |
| ESG Vector Signal Generator(250kHz- 6GHz) | Keysight | E4438C | SEM006-03 | 2021-03-12 | 2022-03-11 |
| EXG Analog Signal Generator(9kHz-3GHz) | Agilent Technologies | N5171B | SEM006-04 | 2020-07-15 | 2021-07-14 |
| Power Meter (U2021XA_Ch2) | Agilent Technologies | U2021XA_Ch2 | SEM009-02 | 2021-05-19 | 2022-05-18 |
| Power Meter (U2021XA_Ch3) | Agilent Technologies | U2021XA_Ch3 | SEM009-03 | 2021-05-19 | 2022-05-18 |
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2019-11-02 | 2021-11-01 |
| MI CABLE | SGS-EMC | 0.8M | EMC2137 | 2019-11-02 | 2021-11-01 |

| Minimum 6 dB bandwidth (5.725-5.85 GHz band) | | | | | |
|---|-------------------------|-------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz) | Agilent Technologies | N9020A | SEM004-10 | 2021-03-02 | 2022-03-01 |
| ESG Vector Signal Generator(250kHz- 6GHz) | Keysight | E4438C | SEM006-03 | 2021-03-12 | 2022-03-11 |
| EXG Analog Signal Generator(9kHz-3GHz) | Agilent Technologies | N5171B | SEM006-04 | 2020-07-15 | 2021-07-14 |
| Power Meter (U2021XA_Ch2) | Agilent Technologies | U2021XA_Ch2 | SEM009-02 | 2021-05-19 | 2022-05-18 |
| Power Meter (U2021XA_Ch3) | Agilent Technologies | U2021XA_Ch3 | SEM009-03 | 2021-05-19 | 2022-05-18 |
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou branch Testing Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

| | | | | | |
|----------|---------|------|---------|------------|------------|
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2019-11-02 | 2021-11-01 |
| MI CABLE | SGS-EMC | 0.8M | EMC2137 | 2019-11-02 | 2021-11-01 |

| Maximum Conducted output power | | | | | |
|--|----------------------|-------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz) | Agilent Technologies | N9020A | SEM004-10 | 2021-03-02 | 2022-03-01 |
| ESG Vector Signal Generator(250kHz-6GHz) | Keysight | E4438C | SEM006-03 | 2021-03-12 | 2022-03-11 |
| EXG Analog Signal Generator(9kHz-3GHz) | Agilent Technologies | N5171B | SEM006-04 | 2020-07-15 | 2021-07-14 |
| Power Meter (U2021XA_Ch2) | Agilent Technologies | U2021XA_Ch2 | SEM009-02 | 2021-05-19 | 2022-05-18 |
| Power Meter (U2021XA_Ch3) | Agilent Technologies | U2021XA_Ch3 | SEM009-03 | 2021-05-19 | 2022-05-18 |
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2019-11-02 | 2021-11-01 |
| MI CABLE | SGS-EMC | 0.8M | EMC2137 | 2019-11-02 | 2021-11-01 |

| Peak Power spectrum density | | | | | |
|--|----------------------|-------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz) | Agilent Technologies | N9020A | SEM004-10 | 2021-03-02 | 2022-03-01 |
| ESG Vector Signal Generator(250kHz-6GHz) | Keysight | E4438C | SEM006-03 | 2021-03-12 | 2022-03-11 |
| EXG Analog Signal Generator(9kHz-3GHz) | Agilent Technologies | N5171B | SEM006-04 | 2020-07-15 | 2021-07-14 |
| Power Meter (U2021XA_Ch2) | Agilent Technologies | U2021XA_Ch2 | SEM009-02 | 2021-05-19 | 2022-05-18 |
| Power Meter (U2021XA_Ch3) | Agilent Technologies | U2021XA_Ch3 | SEM009-03 | 2021-05-19 | 2022-05-18 |
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2019-11-02 | 2021-11-01 |
| MI CABLE | SGS-EMC | 0.8M | EMC2137 | 2019-11-02 | 2021-11-01 |



Radiated Emissions

| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
|---|--------------------------------|---------------|--------------|------------|--------------|
| EMI Test Receiver(20Hz-26.5GHz) | Rohde & Schwarz | ESIB26 | EMC0522 | 2021-01-08 | 2022-01-07 |
| Chamber cable(Above 1GHz) | Scoflex | KMKM-8.0m | EMC0545 | 2020/9/9 | 2022/9/8 |
| Horn Antenna(1GHz-18GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120D | EMC2026 | 2019-09-25 | 2022-09-24 |
| 1GHz-26.5 GHz Pre-Amplifier | Agilent | 8449B | EMC0521 | 2021-01-08 | 2022-01-07 |
| 966 Anechoic Chamber | C.R.T | 9m x 6m x 6m | EMC2142 | 2020-12-20 | 2023-12-19 |
| MXE EMI Receiver(10Hz-8.4GHz) | Keysight | N9038A | EMC2139 | 2020-11-13 | 2021-11-12 |
| EXA Signal Analyzer(10Hz-44GHz) | Keysight | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| Test Software E3 | Audix | Ver.6.120110a | GZE100-61 | N/A | N/A |
| Notch Filter (5150-5880) | Mico-Tronics | BRM50716 | EMC2168 | 2021-07-28 | 2022-07-27 |
| Horn Antenna(14-40GHz) | SCHWARZBECK | BBHA 9170 | EMC2041 | 2020-06-28 | 2023-06-27 |
| Microwave Broadband Preamplifier (18-40GHz) | SCHWARZBECK | BBV 9721 | EMC2172 | 2020-09-09 | 2021-09-08 |

Radiated Emissions which fall in the restricted bands

| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
|---------------------------------|--------------------------------|---------------|--------------|------------|--------------|
| EMI Test Receiver(20Hz-26.5GHz) | Rohde & Schwarz | ESIB26 | EMC0522 | 2021-01-08 | 2022-01-07 |
| Chamber cable(Above 1GHz) | Scoflex | KMKM-8.0m | EMC0545 | 2020/09/09 | 2022/09/08 |
| Horn Antenna(1GHz-18GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120D | EMC2026 | 2019-09-25 | 2022-09-24 |
| 1GHz-26.5 GHz Pre-Amplifier | Agilent | 8449B | EMC0521 | 2021-01-08 | 2022-01-07 |
| 966 Anechoic Chamber | C.R.T | 9m x 6m x 6m | EMC2142 | 2020-12-20 | 2023-12-19 |
| MXE EMI Receiver(10Hz-8.4GHz) | Keysight | N9038A | EMC2139 | 2020-11-13 | 2021-11-12 |
| EXA Signal Analyzer(10Hz-44GHz) | Keysight | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| Test Software E3 | Audix | Ver.6.120110a | GZE100-61 | N/A | N/A |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

| | | | | | |
|--|--------------|-----------|---------|------------|------------|
| Notch Filter (5150-5880) | Mico-Tronics | BRM50716 | EMC2168 | 2021-07-28 | 2022-07-27 |
| Horn Antenna(14-40GHz) | SCHWARZBECK | BBHA 9170 | EMC2041 | 2020-06-28 | 2023-06-27 |
| Microwave Broadband Preamplifier (18-40GHz) | SCHWARZBECK | BBV 9721 | EMC2172 | 2020-09-09 | 2021-09-08 |

| Band Edge | | | | | |
|--|----------------------|----------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz) | Agilent Technologies | N9020A | SEM004-10 | 2021-03-02 | 2022-03-01 |
| ESG Vector Signal Generator(250kHz-6GHz) | Keysight | E4438C | SEM006-03 | 2021-03-12 | 2022-03-11 |
| EXG Analog Signal Generator(9kHz-3GHz) | Agilent Technologies | N5171B | SEM006-04 | 2020-07-15 | 2021-07-14 |
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A | EMC2138 | 2020-09-17 | 2021-09-16 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |
| Test Software JS1120-3 | HangTianXing | V2.6 | GZE100-69 | N/A | N/A |
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2019-11-02 | 2021-11-01 |
| MI CABLE | SGS-EMC | 0.8M | EMC2137 | 2019-11-02 | 2021-11-01 |

| General used equipment | | | | | |
|------------------------|--------------|----------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| DMM | Fluke | 73 | EMC0006 | 2021-07-05 | 2022-07-05 |
| DMM | Fluke | 73 | EMC0007 | 2021-07-05 | 2022-07-05 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the Antenna are Antenna 1&4: 3.5dBi; Antenna 2: 4dBi; Antenna 4: 4.5dBi.

Antenna location: Refer to internal photo.

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

RF chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

6.3 Frequency Stability

6.3.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (g)

6.3.2 Conclusion

The grantee declared that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual, it comply the frequency stability requirement.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & E 15.407 b(6)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz) | Conducted limit(dBμV) | |
|----------------------------|-----------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C


Humidity: 62.8 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|-----------------------|-----------|---|
| Final test | 32 | Charge + TX mode(1.4MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 33 | Charge + TX mode(1.4MHz,CA)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 34 | Charge + TX mode(3MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 35 | Charge + TX mode(3MHz,CA)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 36 | Charge + TX mode(10MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 37 | Charge + TX mode(20MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 38 | Charge + TX mode(40MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |

7.1.3 Test Setup Diagram

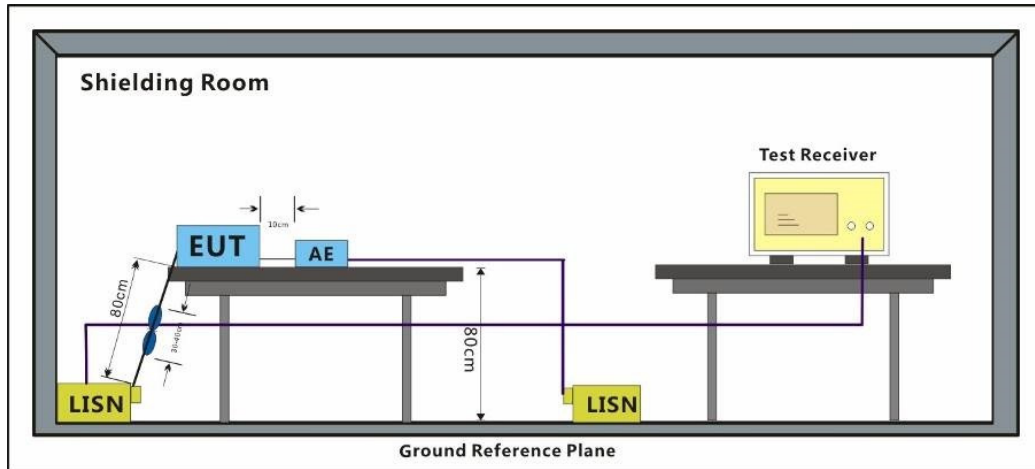


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Test Mode: 32; Line: Live line; Modulation:OFDM; Channel:Low

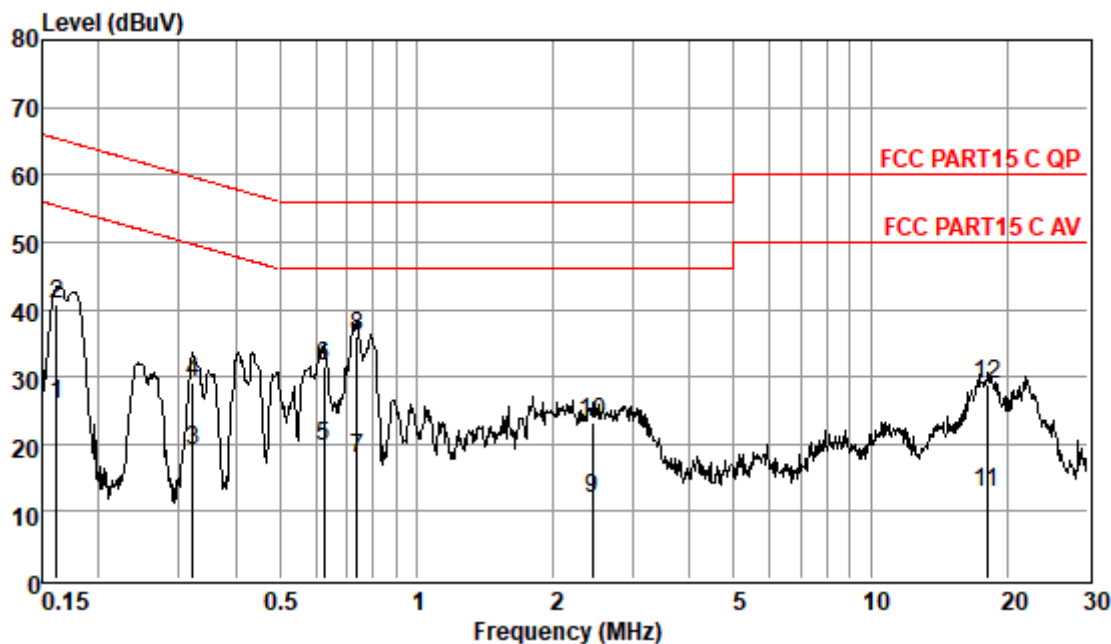Pol :LINE
Mode :
Model :

| Freque | Read | Cable | LISN | Measured | Limit | Over | Remark |
|--------|-------|-------|--------|----------|-------|--------|---------|
| nc | Level | Loss | Factor | Level | Line | Limit | |
| MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 0.16 | 16.09 | 0.06 | 9.62 | 25.77 | 55.38 | -29.61 | Average |
| 0.16 | 31.06 | 0.06 | 9.62 | 40.74 | 65.38 | -24.64 | QP |
| 0.32 | 9.49 | 0.06 | 9.62 | 19.17 | 49.66 | -30.49 | Average |
| 0.32 | 19.56 | 0.06 | 9.62 | 29.24 | 59.66 | -30.42 | QP |
| 0.63 | 9.83 | 0.07 | 9.63 | 19.53 | 46.00 | -26.47 | Average |
| 0.63 | 21.88 | 0.07 | 9.63 | 31.58 | 56.00 | -24.42 | QP |
| 0.74 | 8.15 | 0.07 | 9.63 | 17.85 | 46.00 | -28.15 | Average |
| 0.74 | 26.25 | 0.07 | 9.63 | 35.95 | 56.00 | -20.05 | QP |
| 2.43 | 2.05 | 0.13 | 9.62 | 11.80 | 46.00 | -34.20 | Average |
| 2.43 | 13.41 | 0.13 | 9.62 | 23.16 | 56.00 | -32.84 | QP |
| 18.04 | 2.67 | 0.34 | 9.75 | 12.76 | 50.00 | -37.24 | Average |
| 18.04 | 18.79 | 0.34 | 9.75 | 28.88 | 60.00 | -31.12 | QP |

Test Mode: 32; Line: Neutral Line; Modulation: OFDM; Channel: Low

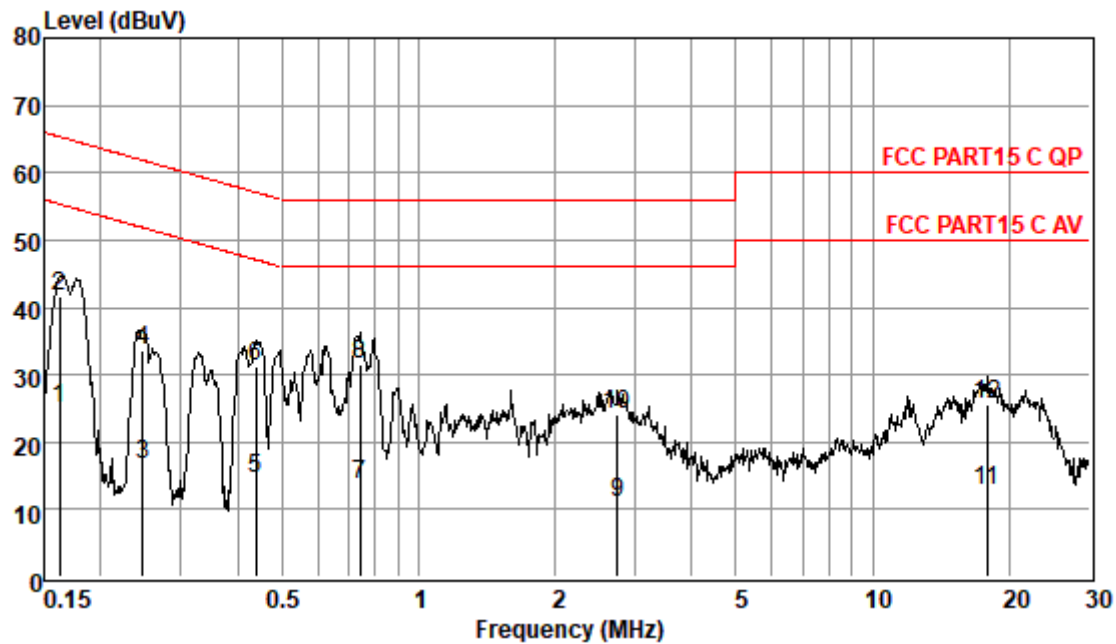

Pol : NEUTRAL

Mode :

Model :

| Frequency MHz | Read Level dBuV | Cable Loss dB | LISN Factor dB | Measured Level dBuV | Limit Line dBuV | Over Limit dB | Remark |
|------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 0.16 | 15.49 | 0.06 | 9.55 | 25.10 | 55.34 | -30.24 | Average |
| 0.16 | 32.12 | 0.06 | 9.55 | 41.73 | 65.34 | -23.61 | QP |
| 0.25 | 7.07 | 0.06 | 9.55 | 16.68 | 51.86 | -35.18 | Average |
| 0.25 | 23.95 | 0.06 | 9.55 | 33.56 | 61.86 | -28.30 | QP |
| 0.44 | 4.84 | 0.06 | 9.56 | 14.46 | 47.07 | -32.61 | Average |
| 0.44 | 21.54 | 0.06 | 9.56 | 31.16 | 57.07 | -25.91 | QP |
| 0.74 | 4.19 | 0.07 | 9.55 | 13.81 | 46.00 | -32.19 | Average |
| 0.74 | 22.02 | 0.07 | 9.55 | 31.64 | 56.00 | -24.36 | QP |
| 2.74 | 1.35 | 0.14 | 9.55 | 11.04 | 46.00 | -34.96 | Average |
| 2.74 | 14.51 | 0.14 | 9.55 | 24.20 | 56.00 | -31.80 | QP |
| 17.85 | 2.81 | 0.34 | 9.66 | 12.81 | 50.00 | -37.19 | Average |
| 17.85 | 15.54 | 0.34 | 9.66 | 25.54 | 60.00 | -34.46 | QP |

7.2 Duty Cycle

Test Requirement KDB 789033 D02 II B 1
Test Method: KDB 789033 D02 II B 2

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 39.5 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Final test | 25 | TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 26 | TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 27 | TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 28 | TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 29 | TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 30 | TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 31 | TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation |

7.2.3 Test Setup Diagram

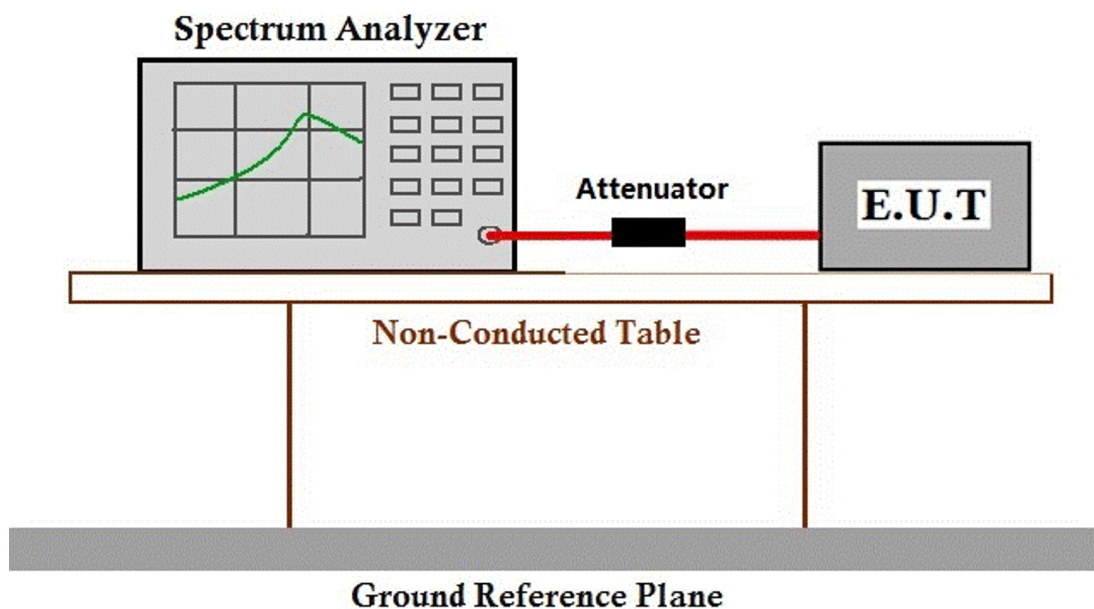

7.2.4 Measurement Procedure and Data

Please Refer To Appendix For Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch EMC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.3 99% Bandwidth

Test Requirement N/A
Test Method: KDB 789033 II D


7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 22.9 °C Humidity: 39.5 % RH Atmospheric Pressure: 1010 mbar

7.3.1 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Final test | 25 | TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 26 | TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 27 | TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 28 | TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 29 | TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 30 | TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 31 | TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation |

7.3.2 Test Setup Diagram

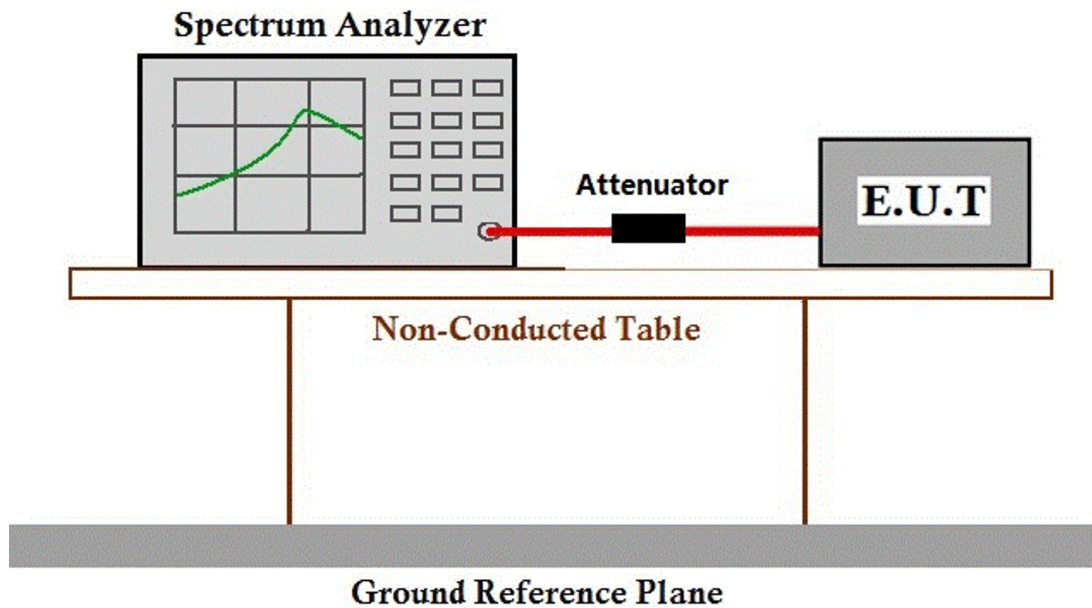

7.3.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.4 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)
Test Method: KDB 789033 D02 II C 1

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 39.5 % RH Atmospheric Pressure: 1010 mbar

7.4.1 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Final test | 25 | TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 26 | TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 27 | TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 28 | TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 29 | TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 30 | TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 31 | TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation |

7.4.2 Test Setup Diagram

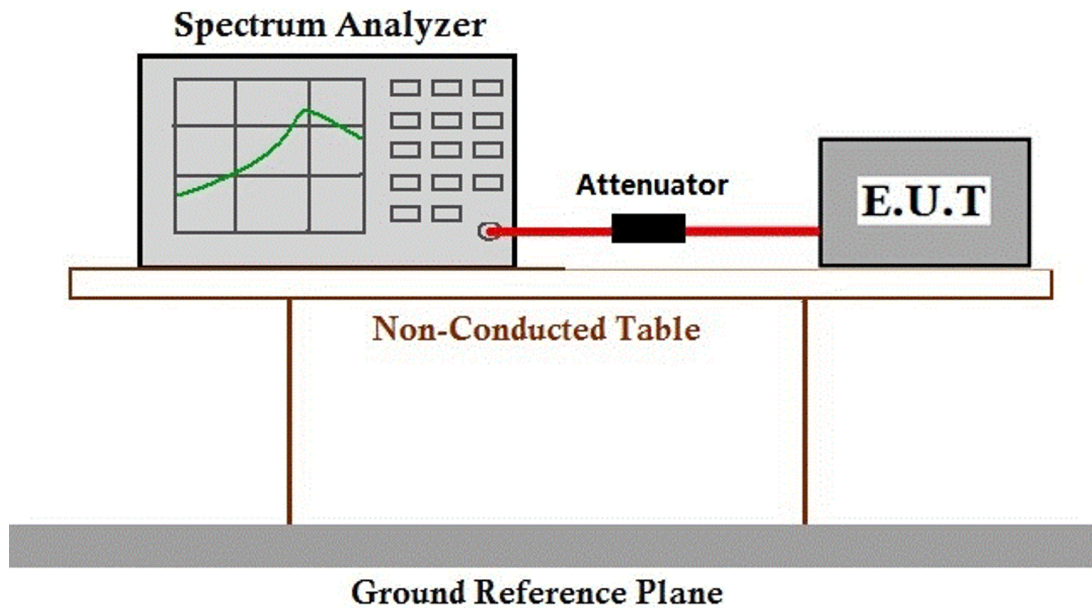

7.4.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: KDB 789033 D02 II C 2

Limit:

| Frequency band(MHz) | Limit |
|---------------------|----------|
| 5725-5850 | ≥500 kHz |

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C

Humidity: 39.5 % RH

Atmospheric Pressure: 1010 mbar

7.5.1 Test Mode Description


| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Final test | 25 | TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 26 | TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 27 | TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 28 | TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 29 | TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 30 | TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 31 | TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5.2 Test Setup Diagram

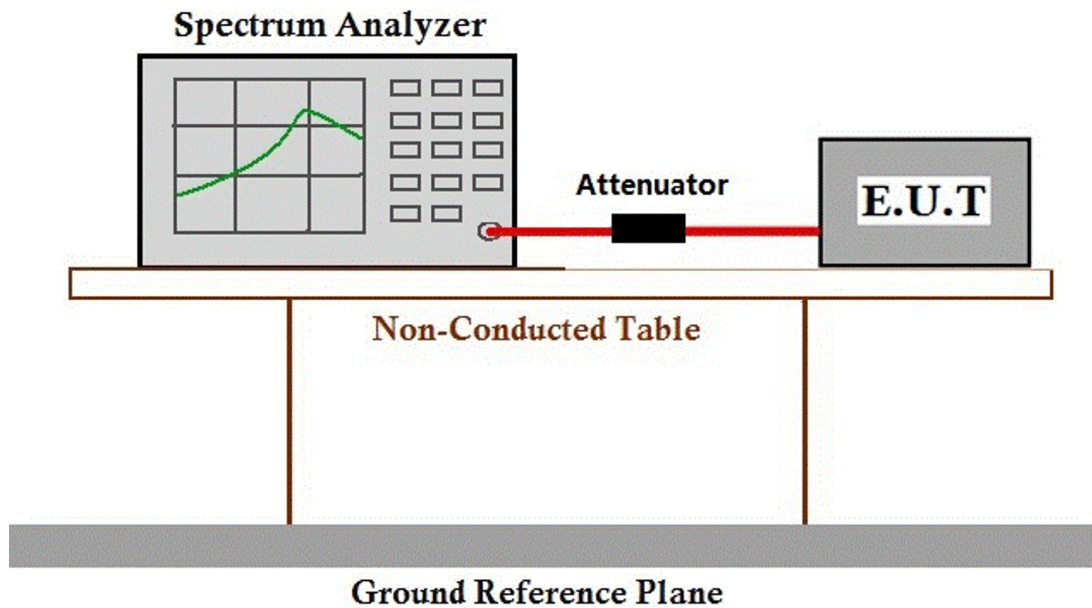

7.5.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.6 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

| Frequency band(MHz) | Limit |
|---------------------|---|
| 5150-5250 | ≤1W(30dBm) for master device |
| | ≤250mW(24dBm) for client device |
| 5250-5350 | ≤250mW(24dBm) for client device or 11dBm+10logB* |
| 5470-5725 | ≤250mW(24dBm) for client device or 11dBm+10logB* |
| 5725-5850 | ≤1W(30dBm) |
| Remark: | <p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p> |

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C

Humidity: 39.5 % RH

Atmospheric Pressure: 1010 mbar

7.6.1 Test Mode Description


| Pre-scan / Final test | Mode Code | Description |
|-----------------------|-----------|---|
| Final test | 25 | TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 26 | TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 27 | TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 28 | TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 29 | TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 30 | TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 31 | TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.6.2 Test Setup Diagram

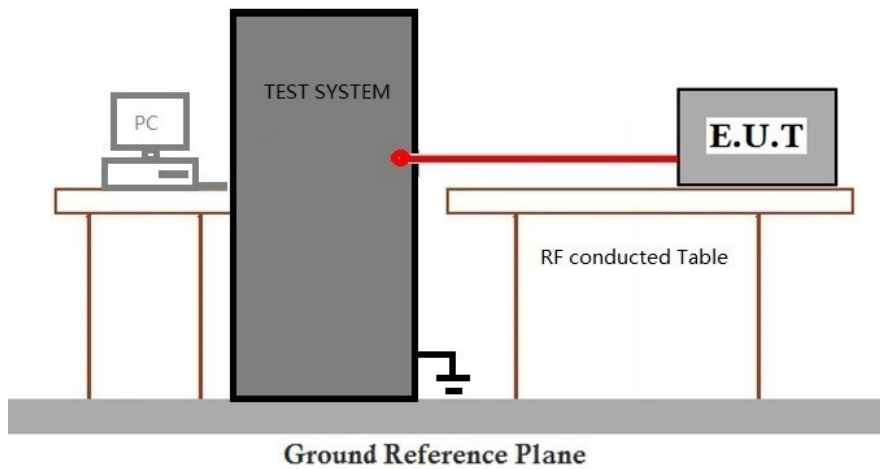

7.6.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.7 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

| Frequency band(MHz) | Limit |
|---------------------|--|
| 5150-5250 | ≤17dBm in 1MHz for master device |
| | ≤11dBm in 1MHz for client device |
| 5250-5350 | ≤11dBm in 1MHz for client device |
| 5470-5725 | ≤11dBm in 1MHz for client device |
| 5725-5850 | ≤30dBm in 500 kHz |
| Remark: | The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. |

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C


Humidity: 39.5 % RH

Atmospheric Pressure: 1010 mbar

7.7.1 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|-----------------------|-----------|---|
| Final test | 25 | TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 26 | TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 27 | TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 28 | TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 29 | TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 30 | TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 31 | TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation |

7.7.2 Test Setup Diagram

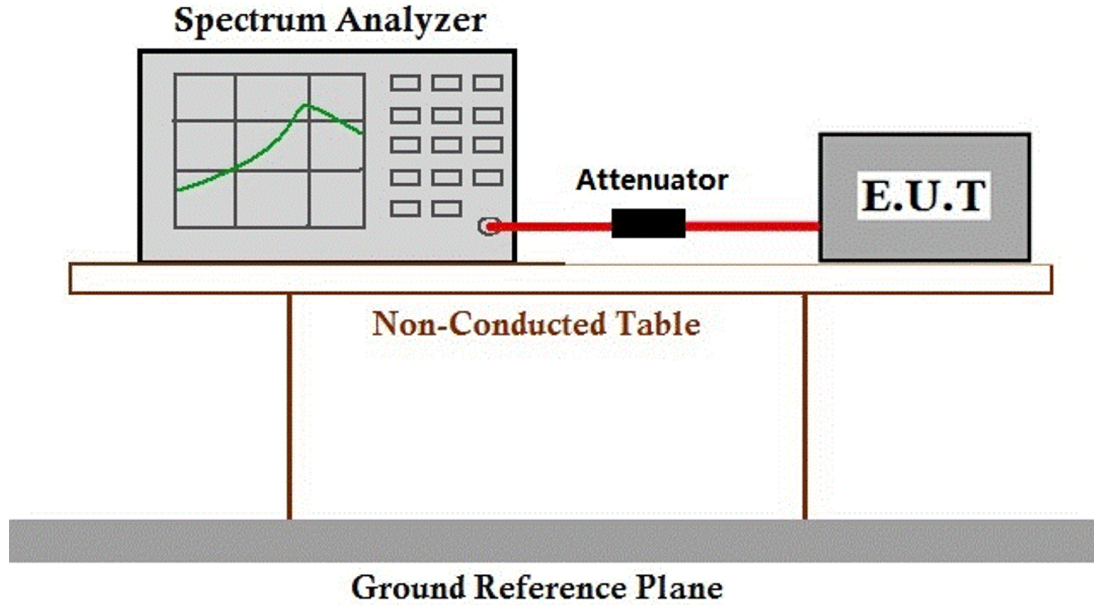

7.7.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.8 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & E 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.6 °C

Humidity: 51.9 % RH

Atmospheric Pressure: 1010 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.8.2 Test Mode Description


| Pre-scan / Final test | Mode Code | Description |
|-----------------------|-----------|---|
| Final test | 25 | TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 26 | TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 27 | TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 28 | TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 29 | TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 30 | TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Final test | 31 | TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation |
| Pre-scan | 32 | Charge + TX mode(1.4MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 33 | Charge + TX mode(1.4MHz,CA)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 34 | Charge + TX mode(3MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 35 | Charge + TX mode(3MHz,CA)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 36 | Charge + TX mode(10MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 37 | Charge + TX mode(20MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |
| Pre-scan | 38 | Charge + TX mode(40MHz)_Keep the EUT in charging and continuously transmitting mode with modulation |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.8.3 Test Setup Diagram

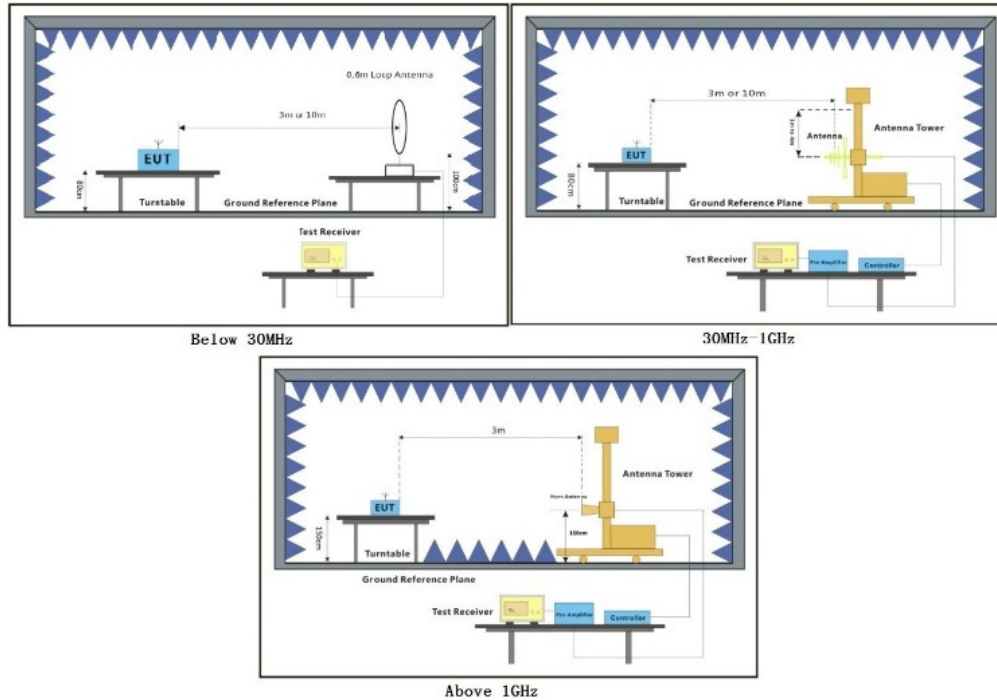

7.8.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark1:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11ac. Only the worst case is recorded in the report.
3. Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark2:


1. The disturbance below 30MHz and above 18GHz was very low, and the below harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
2. Pretest the EUT at antenna 1 and antenna 2 and MIMO mode find the worst case is MIMO mode.
3. For 30-1000MHz, Pretest the EUT in BW 1.4MHz, 1.4MHz CA, 3MHz, 3MHz CA, 10MHz, 20MHz, 40MHz find the worst case are 1.4MHz, only record the worst case test data 1.4MHz in this report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: Low

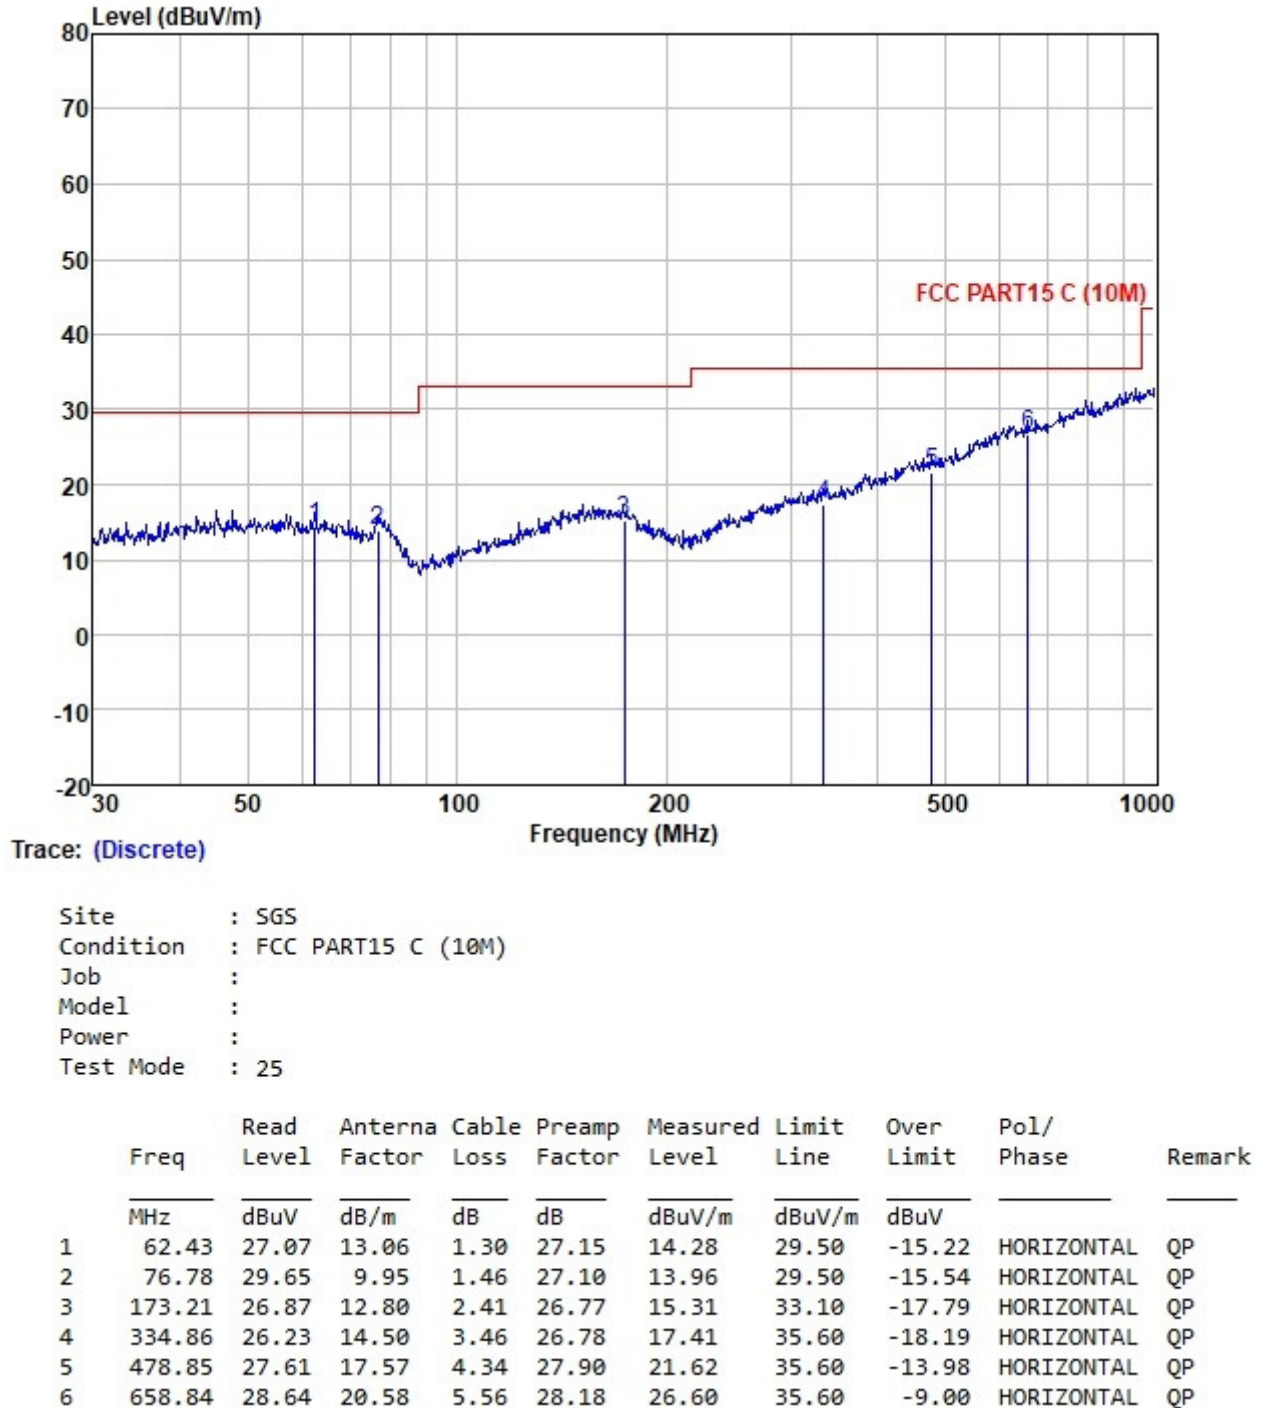

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: Low

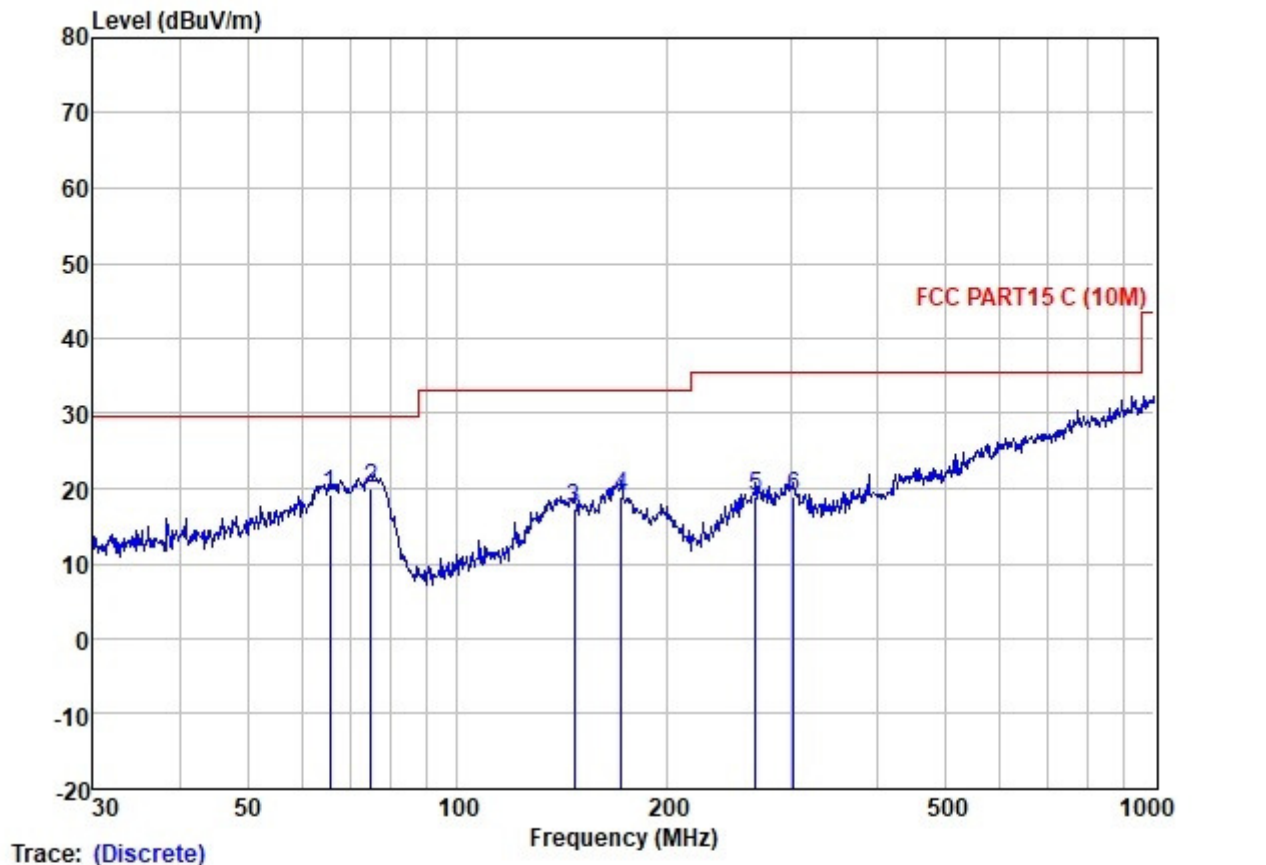

Site : SGS
Condition : FCC PART15 C (10M)
Job :
Model :
Power :
Test Mode : 25

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamplifier Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|--------|------------|----------------|------------|---------------------|----------------|------------|------------|-----------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dBuV | | |
| 1 | 65.57 | 32.31 | 12.65 | 1.35 | 27.15 | 19.16 | 29.50 | -10.34 | VERTICAL | QP |
| 2 | 75.18 | 35.08 | 10.52 | 1.45 | 27.11 | 19.94 | 29.50 | -9.56 | VERTICAL | QP |
| 3 | 146.89 | 28.32 | 13.70 | 2.20 | 26.85 | 17.37 | 33.10 | -15.73 | VERTICAL | QP |
| 4 | 171.99 | 30.31 | 13.00 | 2.40 | 26.77 | 18.94 | 33.10 | -14.16 | VERTICAL | QP |
| 5 | 267.55 | 29.85 | 12.55 | 3.04 | 26.58 | 18.86 | 35.60 | -16.74 | VERTICAL | QP |
| 6 | 303.54 | 28.54 | 13.68 | 3.18 | 26.57 | 18.83 | 35.60 | -16.77 | VERTICAL | QP |

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

L₃: Level @ 3m distance. Unit: uV/m;

L₁₀: Level @ 10m distance. Unit: uV/m;

D₃: 3m distance. Unit: m

D₁₀: 10m distance. Unit: m

The level at 3m test distance is below:


| Frequency (MHz) | Level @ 10m (dBuV/m) | Level @ 10m (uV/m) | Level @ 3m (uV/m) | Level @ 3m (dBuV/m) | Limit @ 3m (dBuV/m) | Margin (dB) | Ant. Polarization |
|-----------------|----------------------|--------------------|-------------------|---------------------|---------------------|-------------|-------------------|
| 65.57 | 19.16 | 9.08 | 30.26 | 29.62 | 40.00 | -10.38 | H |
| 75.18 | 19.94 | 9.93 | 33.10 | 30.40 | 40.00 | -9.60 | H |
| 146.89 | 17.37 | 7.39 | 24.63 | 27.83 | 43.50 | -15.67 | H |
| 172.00 | 18.94 | 8.85 | 29.50 | 29.40 | 43.50 | -14.10 | H |
| 267.55 | 18.86 | 8.77 | 29.23 | 29.32 | 46.00 | -16.68 | H |
| 303.54 | 18.83 | 8.74 | 29.13 | 29.29 | 46.00 | -16.71 | H |
| 62.43 | 14.28 | 5.18 | 17.25 | 24.74 | 40.00 | -15.26 | V |
| 76.78 | 13.96 | 4.99 | 16.63 | 24.42 | 40.00 | -15.58 | V |
| 173.21 | 15.31 | 5.83 | 19.43 | 25.77 | 43.50 | -17.73 | V |
| 334.86 | 17.41 | 7.42 | 24.74 | 27.87 | 46.00 | -18.13 | V |
| 478.85 | 21.62 | 12.05 | 40.17 | 32.08 | 46.00 | -13.92 | V |
| 658.84 | 26.60 | 21.38 | 71.27 | 37.06 | 46.00 | -8.94 | V |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: Low

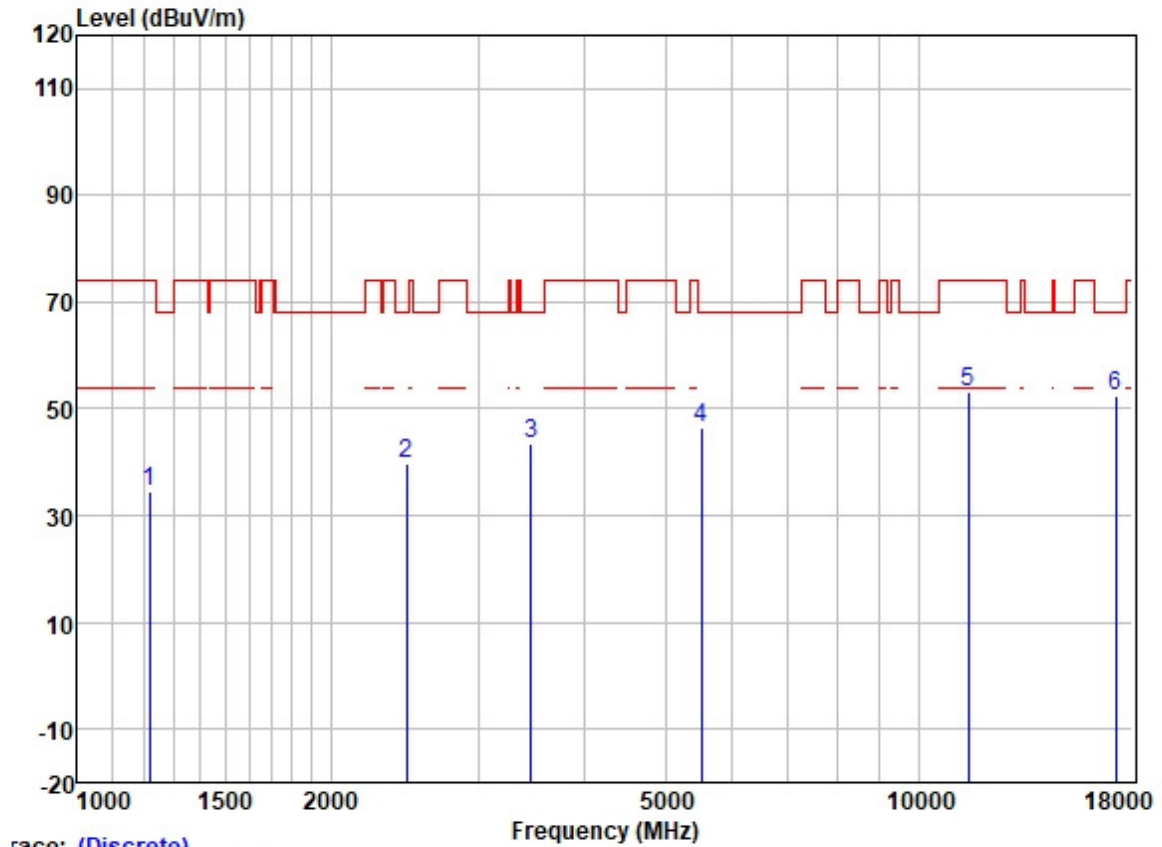


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1219.085 | 45.86 | 24.82 | 2.32 | 38.37 | 34.63 | 74.00 | -39.37 | HORIZONTAL | Peak |
| 2 | 2463.000 | 46.28 | 27.45 | 3.50 | 37.57 | 39.66 | 68.20 | -28.54 | HORIZONTAL | Peak |
| 3 | 3465.510 | 47.46 | 28.88 | 4.22 | 36.95 | 43.61 | 68.20 | -24.59 | HORIZONTAL | Peak |
| 4 | 5521.556 | 45.16 | 31.81 | 6.38 | 36.89 | 46.46 | 68.20 | -21.74 | HORIZONTAL | Peak |
| 5 | 11457.000 | 42.17 | 39.91 | 8.37 | 37.15 | 53.30 | 74.00 | -20.70 | HORIZONTAL | Peak |
| 6 | 17185.500 | 34.87 | 42.79 | 9.92 | 35.33 | 52.25 | 68.20 | -15.95 | HORIZONTAL | Peak |

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: Low

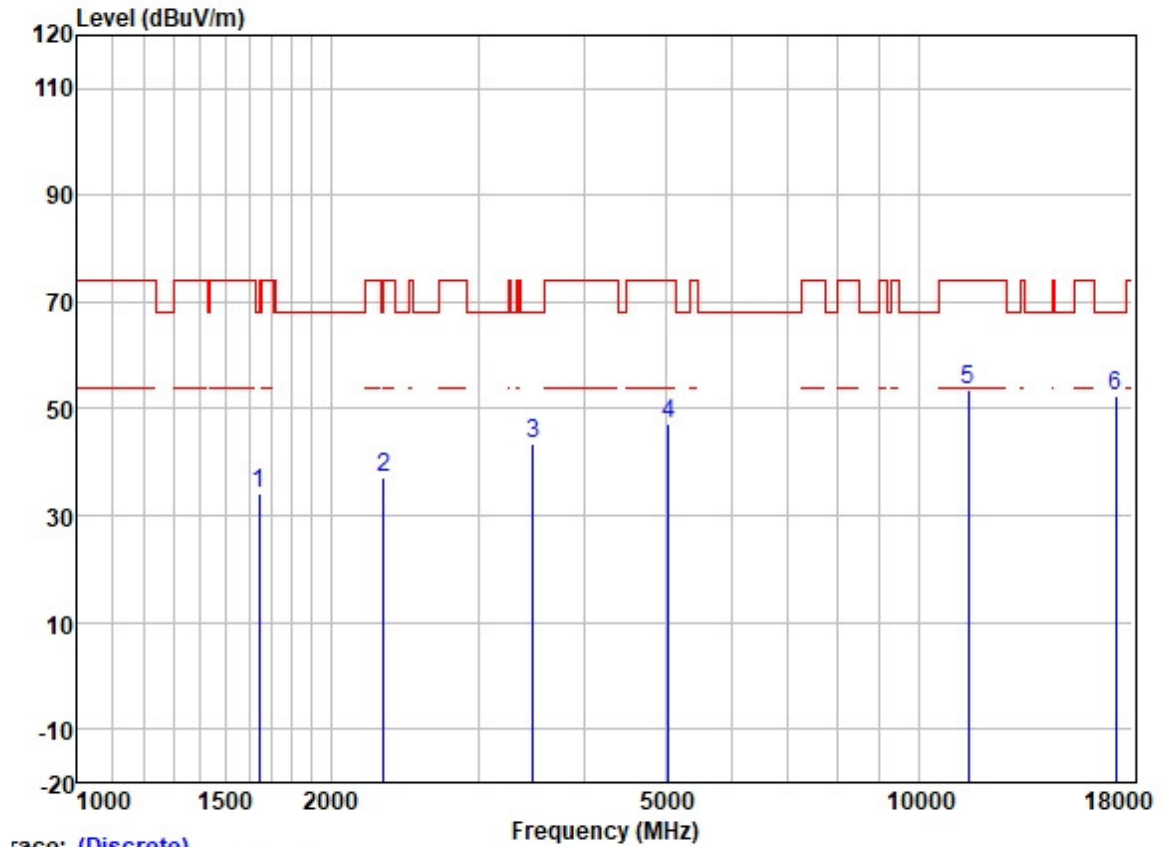


| | Freq | Read | Antenna | Cable | Preamp | Limit | Over | | |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
| | MHz | Level | Factor | Loss | Factor | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 1644.751 | 43.70 | 25.63 | 2.80 | 37.93 | 34.20 | 68.20 | -34.00 | VERTICAL Peak |
| 2 | 2315.000 | 44.14 | 27.15 | 3.32 | 37.62 | 36.99 | 74.00 | -37.01 | VERTICAL Peak |
| 3 | 3485.601 | 47.12 | 28.89 | 4.27 | 36.95 | 43.33 | 68.20 | -24.87 | VERTICAL Peak |
| 4 | 5044.705 | 46.55 | 31.71 | 5.68 | 36.86 | 47.08 | 74.00 | -26.92 | VERTICAL Peak |
| 5 | 11457.000 | 42.26 | 39.91 | 8.37 | 37.15 | 53.39 | 74.00 | -20.61 | VERTICAL Peak |
| 6 | 17185.500 | 35.17 | 42.79 | 9.92 | 35.33 | 52.55 | 68.20 | -15.65 | VERTICAL Peak |

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: middle

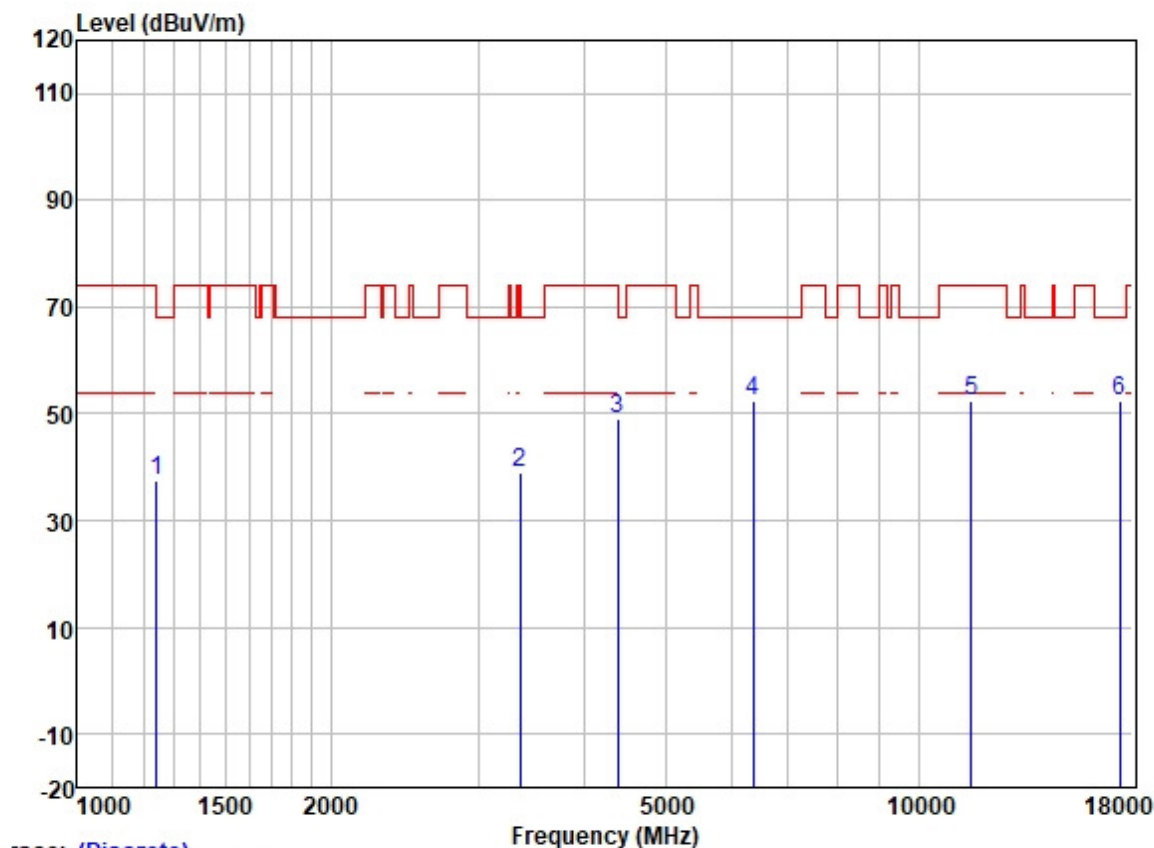


| | | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------|---------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1243.289 | 48.39 | 24.98 | 2.31 | 38.35 | 37.33 | 68.20 | -30.87 | HORIZONTAL | Peak |
| 2 | 3356.153 | 43.17 | 28.81 | 4.09 | 37.01 | 39.06 | 74.00 | -34.94 | HORIZONTAL | Peak |
| 3 | 4392.376 | 50.69 | 30.66 | 4.70 | 36.81 | 49.24 | 74.00 | -24.76 | HORIZONTAL | Peak |
| 4 | 6354.000 | 49.68 | 33.63 | 5.92 | 36.97 | 52.26 | 68.20 | -15.94 | HORIZONTAL | Peak |
| 5 | 11573.000 | 41.26 | 39.78 | 8.38 | 37.14 | 52.28 | 74.00 | -21.72 | HORIZONTAL | Peak |
| 6 | 17359.500 | 34.11 | 43.40 | 10.39 | 35.32 | 52.58 | 68.20 | -15.62 | HORIZONTAL | Peak |

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: middle

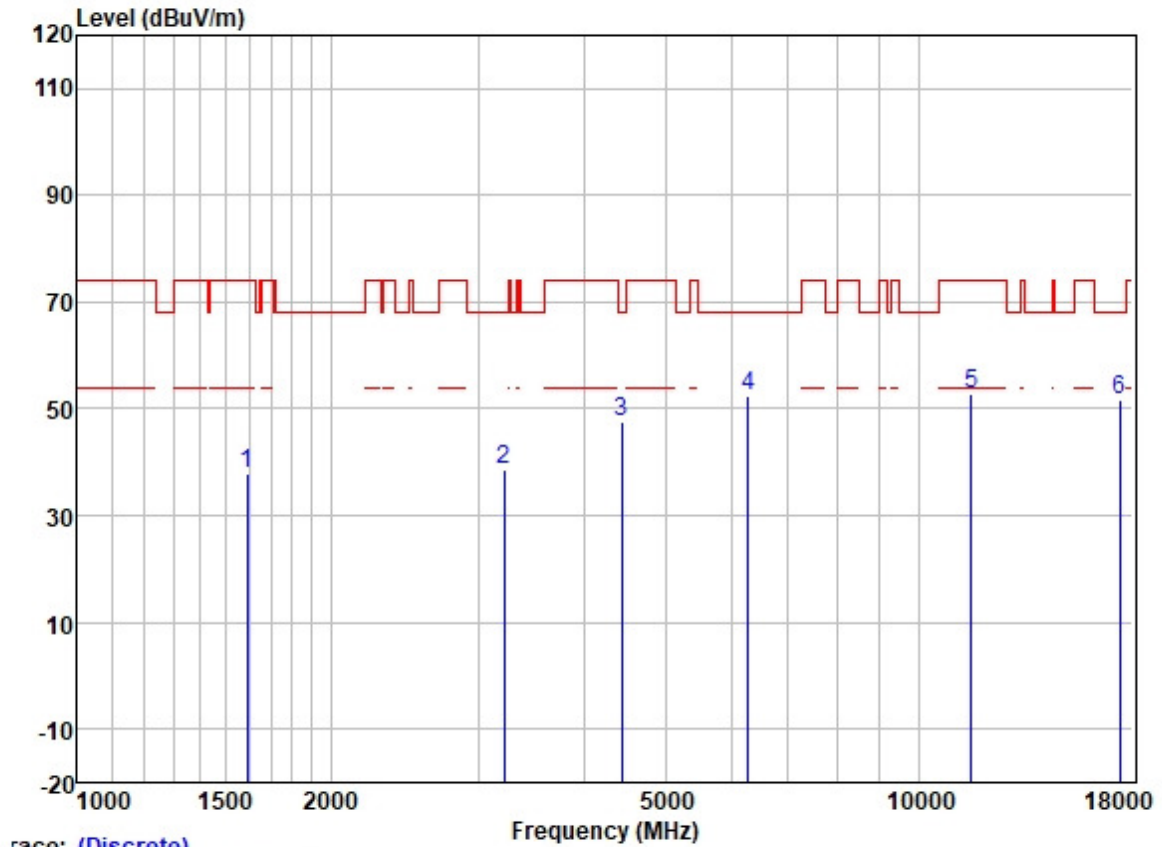


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1592.945 | 47.31 | 25.57 | 2.80 | 37.98 | 37.70 | 74.00 | -36.30 | VERTICAL | Peak |
| 2 | 3218.478 | 43.18 | 28.61 | 4.01 | 37.07 | 38.73 | 68.20 | -29.47 | VERTICAL | Peak |
| 3 | 4443.453 | 48.68 | 30.73 | 4.83 | 36.81 | 47.43 | 68.20 | -20.77 | VERTICAL | Peak |
| 4 | 6277.361 | 49.91 | 33.37 | 5.98 | 36.95 | 52.31 | 68.20 | -15.89 | VERTICAL | Peak |
| 5 | 11573.000 | 41.61 | 39.78 | 8.38 | 37.14 | 52.63 | 74.00 | -21.37 | VERTICAL | Peak |
| 6 | 17359.500 | 33.37 | 43.40 | 10.39 | 35.32 | 51.84 | 68.20 | -16.36 | VERTICAL | Peak |

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: High

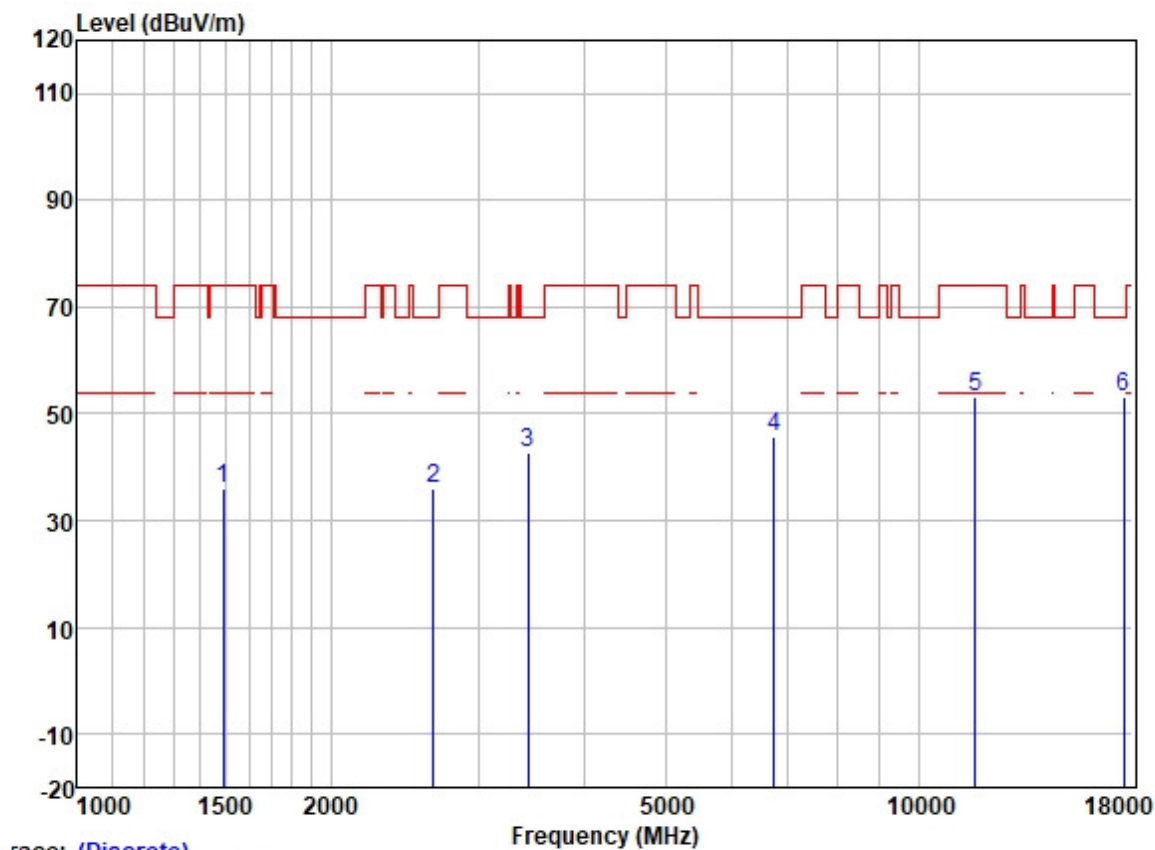


| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|-----------|---------|-------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1490.007 | 45.74 | 25.49 | 2.79 | 38.10 | 35.92 | 74.00 | -38.08 | HORIZONTAL Peak |
| 2 | 2648.000 | 42.30 | 27.71 | 3.54 | 37.49 | 36.06 | 68.20 | -32.14 | HORIZONTAL Peak |
| 3 | 3435.590 | 46.64 | 28.87 | 4.16 | 36.97 | 42.70 | 68.20 | -25.50 | HORIZONTAL Peak |
| 4 | 6738.857 | 42.59 | 34.50 | 5.82 | 37.10 | 45.81 | 68.20 | -22.39 | HORIZONTAL Peak |
| 5 | 11693.000 | 42.32 | 39.49 | 8.32 | 37.13 | 53.00 | 74.00 | -21.00 | HORIZONTAL Peak |
| 6 | 17539.500 | 33.61 | 43.97 | 10.76 | 35.31 | 53.03 | 68.20 | -15.17 | HORIZONTAL Peak |

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: High

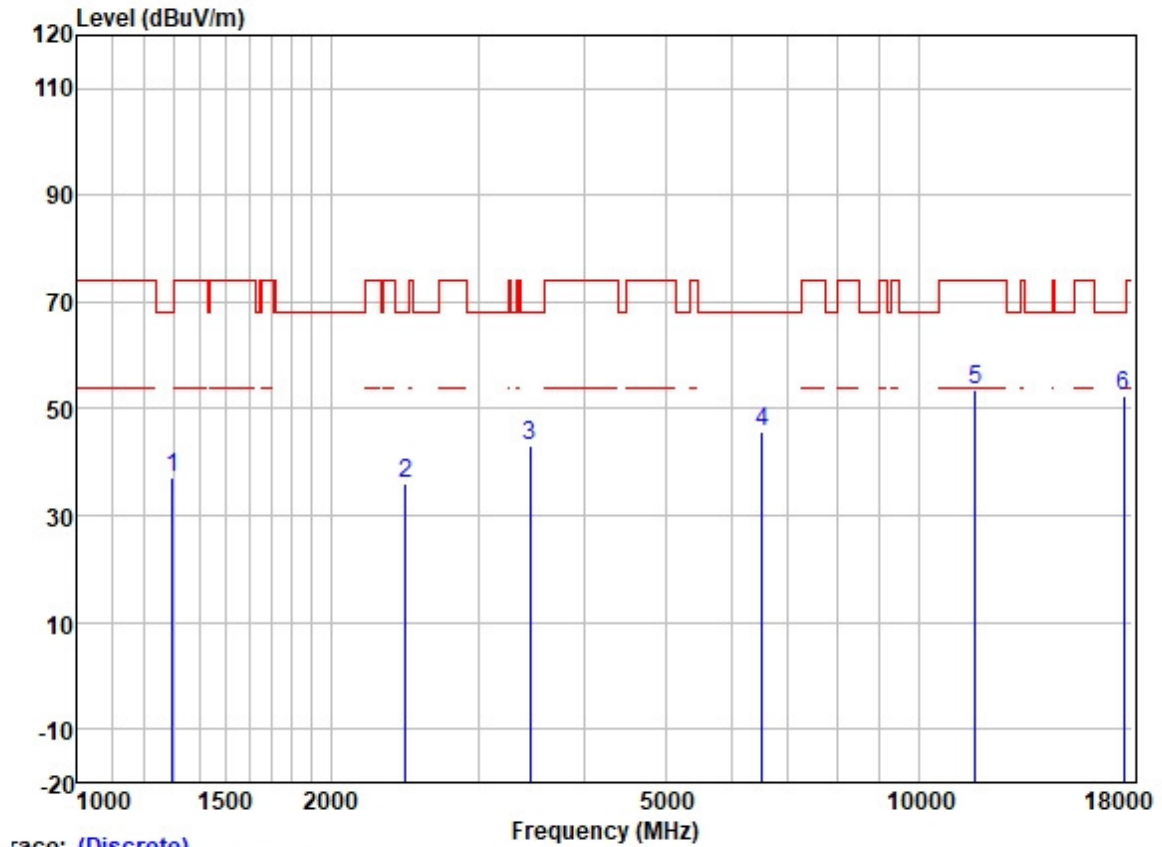

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1295.812 | 47.59 | 25.19 | 2.58 | 38.31 | 37.05 | 68.20 | -31.15 | VERTICAL | Peak |
| 2 | 2457.000 | 42.64 | 27.44 | 3.45 | 37.58 | 35.95 | 68.20 | -32.25 | VERTICAL | Peak |
| 3 | 3455.508 | 46.93 | 28.88 | 4.20 | 36.96 | 43.05 | 68.20 | -25.15 | VERTICAL | Peak |
| 4 | 6514.374 | 42.85 | 34.00 | 5.84 | 37.02 | 45.67 | 68.20 | -22.53 | VERTICAL | Peak |
| 5 | 11693.000 | 42.83 | 39.49 | 8.32 | 37.13 | 53.51 | 74.00 | -20.49 | VERTICAL | Peak |
| 6 | 17539.500 | 32.92 | 43.97 | 10.76 | 35.31 | 52.34 | 68.20 | -15.86 | VERTICAL | Peak |


Test Mode: 26; Polarity: Horizontal; Modulation: OFDM; Channel: Low

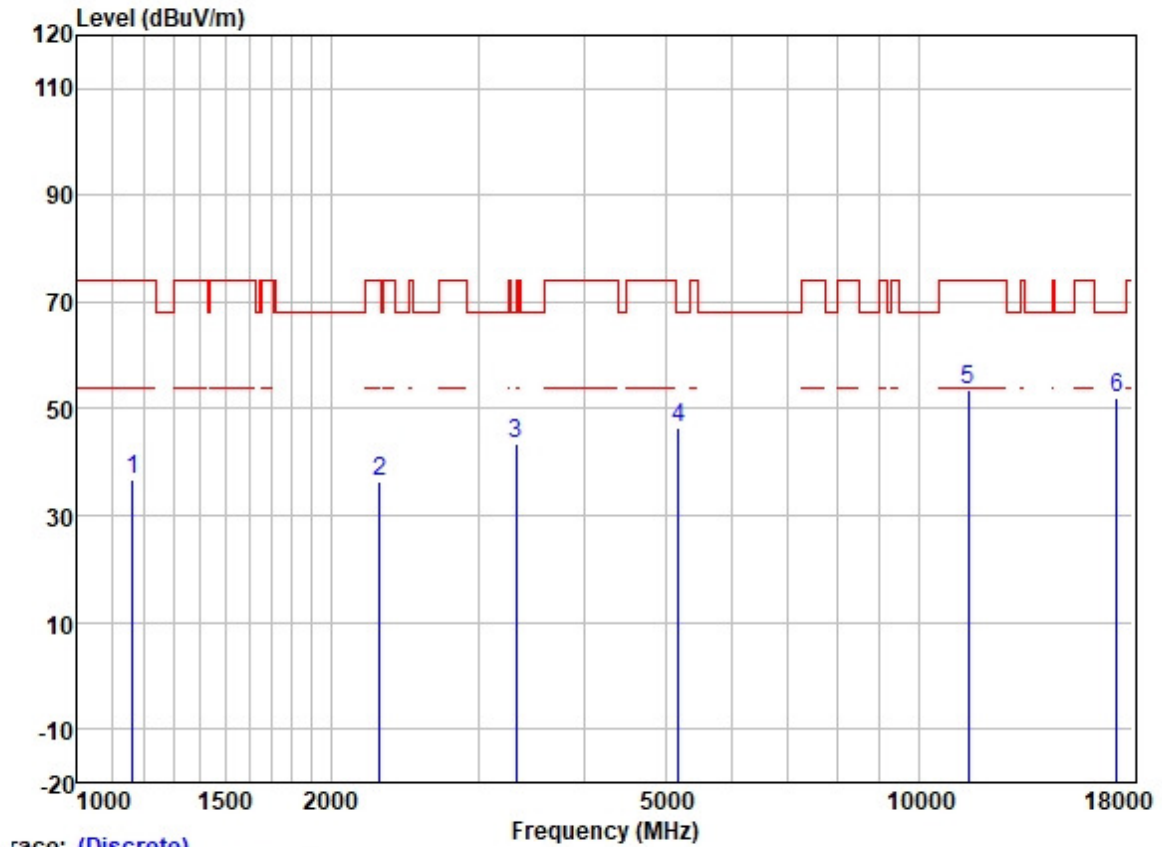

race: (Discrete)


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1164.452 | 48.40 | 24.54 | 2.39 | 38.40 | 36.93 | 74.00 | -37.07 | HORIZONTAL | Peak |
| 2 | 2287.000 | 43.53 | 27.06 | 3.29 | 37.63 | 36.25 | 74.00 | -37.75 | HORIZONTAL | Peak |
| 3 | 3328.077 | 47.53 | 28.78 | 4.07 | 37.02 | 43.36 | 68.20 | -24.84 | HORIZONTAL | Peak |
| 4 | 5179.929 | 45.88 | 31.73 | 5.61 | 36.87 | 46.35 | 68.20 | -21.85 | HORIZONTAL | Peak |
| 5 | 11460.240 | 42.52 | 39.91 | 8.37 | 37.15 | 53.65 | 74.00 | -20.35 | HORIZONTAL | Peak |
| 6 | 17190.360 | 34.80 | 42.79 | 9.92 | 35.33 | 52.18 | 68.20 | -16.02 | HORIZONTAL | Peak |

Test Mode: 26; Polarity: Vertical; Modulation: OFDM; Channel: Low

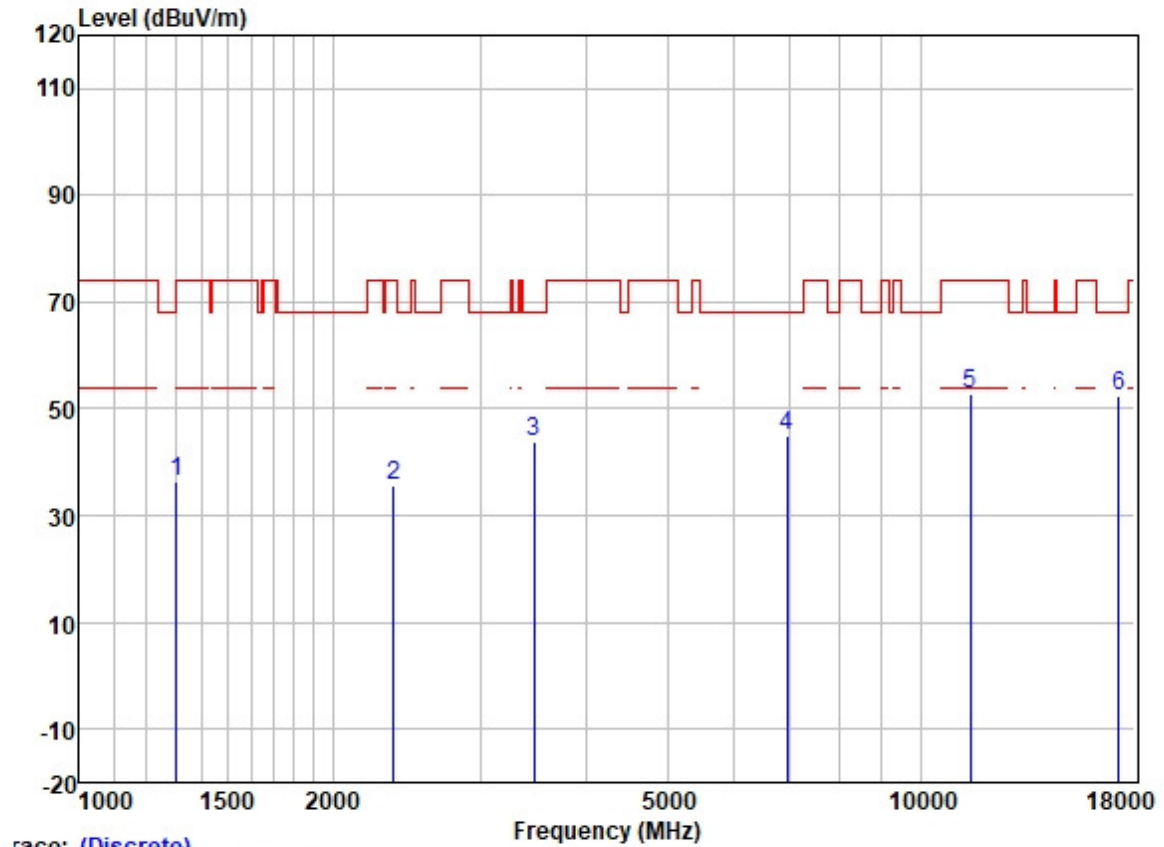


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1304.804 | 46.85 | 25.21 | 2.60 | 38.31 | 36.35 | 74.00 | -37.65 | VERTICAL | Peak |
| 2 | 2365.000 | 42.68 | 27.28 | 3.43 | 37.60 | 35.79 | 74.00 | -38.21 | VERTICAL | Peak |
| 3 | 3475.541 | 47.60 | 28.89 | 4.25 | 36.95 | 43.79 | 68.20 | -24.41 | VERTICAL | Peak |
| 4 | 6943.883 | 41.49 | 34.92 | 5.81 | 37.21 | 45.01 | 68.20 | -23.19 | VERTICAL | Peak |
| 5 | 11460.240 | 41.74 | 39.91 | 8.37 | 37.15 | 52.87 | 74.00 | -21.13 | VERTICAL | Peak |
| 6 | 17190.360 | 35.17 | 42.79 | 9.92 | 35.33 | 52.55 | 68.20 | -15.65 | VERTICAL | Peak |

Test Mode: 26; Polarity: Horizontal; Modulation: OFDM; Channel: middle

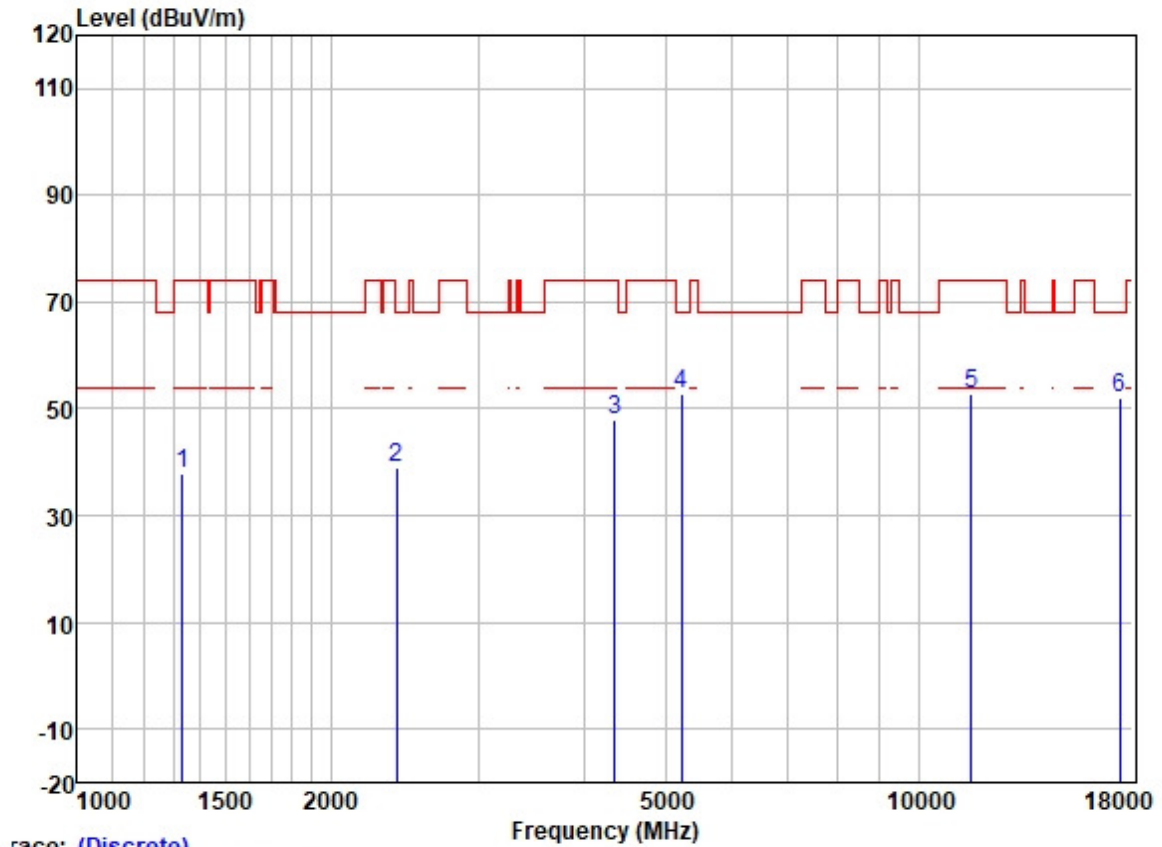


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1331.780 | 48.31 | 25.28 | 2.60 | 38.29 | 37.90 | 74.00 | -36.10 | HORIZONTAL | Peak |
| 2 | 2398.000 | 45.60 | 27.35 | 3.50 | 37.59 | 38.86 | 68.20 | -29.34 | HORIZONTAL | Peak |
| 3 | 4354.454 | 49.32 | 30.59 | 4.68 | 36.81 | 47.78 | 74.00 | -26.22 | HORIZONTAL | Peak |
| 4 | 5231.464 | 52.34 | 31.74 | 5.70 | 36.87 | 52.91 | 68.20 | -15.29 | HORIZONTAL | Peak |
| 5 | 11572.240 | 41.65 | 39.78 | 8.38 | 37.14 | 52.67 | 74.00 | -21.33 | HORIZONTAL | Peak |
| 6 | 17358.360 | 33.50 | 43.40 | 10.39 | 35.32 | 51.97 | 68.20 | -16.23 | HORIZONTAL | Peak |

Test Mode: 26; Polarity: Vertical; Modulation: OFDM; Channel: middle

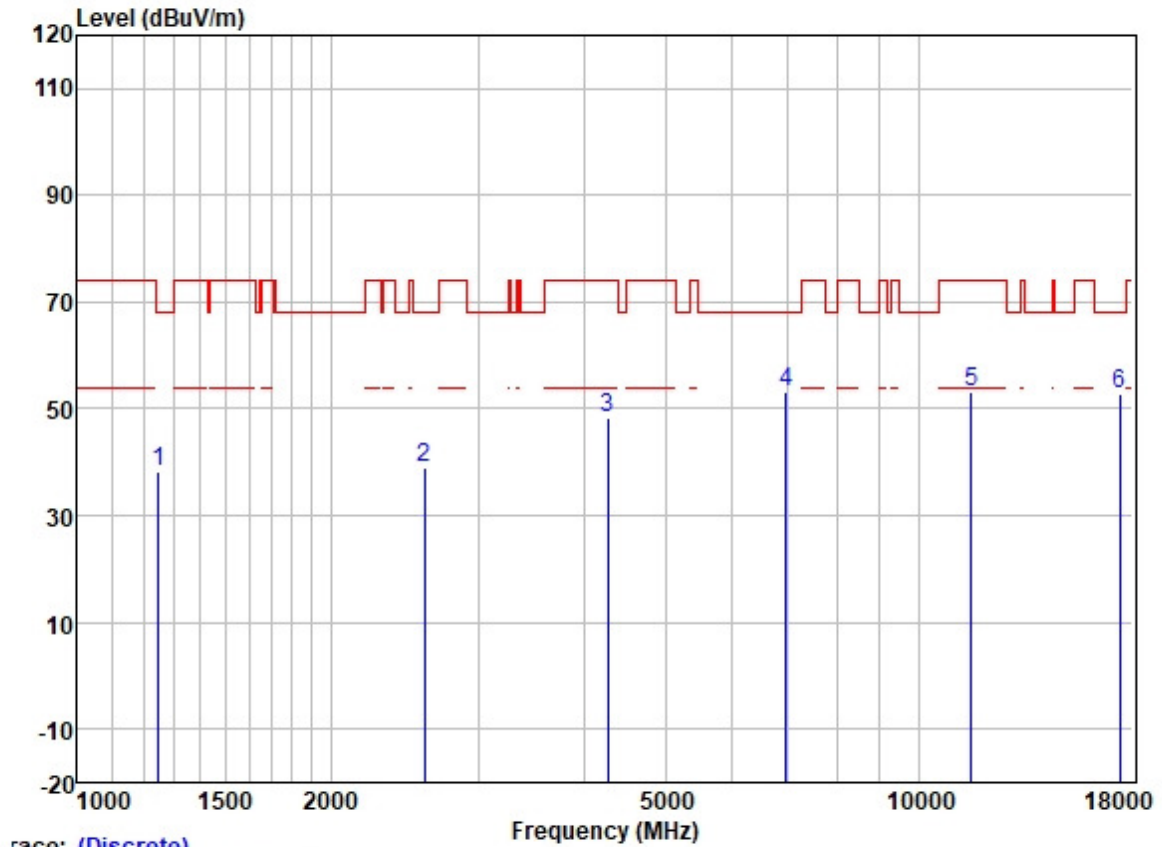


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1249.667 | 49.36 | 25.02 | 2.34 | 38.35 | 38.37 | 68.20 | -29.83 | VERTICAL | Peak |
| 2 | 2587.000 | 45.36 | 27.61 | 3.49 | 37.53 | 38.93 | 68.20 | -29.27 | VERTICAL | Peak |
| 3 | 4267.237 | 50.21 | 30.38 | 4.63 | 36.81 | 48.41 | 74.00 | -25.59 | VERTICAL | Peak |
| 4 | 6964.487 | 49.51 | 34.95 | 5.81 | 37.23 | 53.04 | 68.20 | -15.16 | VERTICAL | Peak |
| 5 | 11572.240 | 42.17 | 39.78 | 8.38 | 37.14 | 53.19 | 74.00 | -20.81 | VERTICAL | Peak |
| 6 | 17358.360 | 34.20 | 43.40 | 10.39 | 35.32 | 52.67 | 68.20 | -15.53 | VERTICAL | Peak |

Test Mode: 26; Polarity: Horizontal; Modulation: OFDM; Channel: High

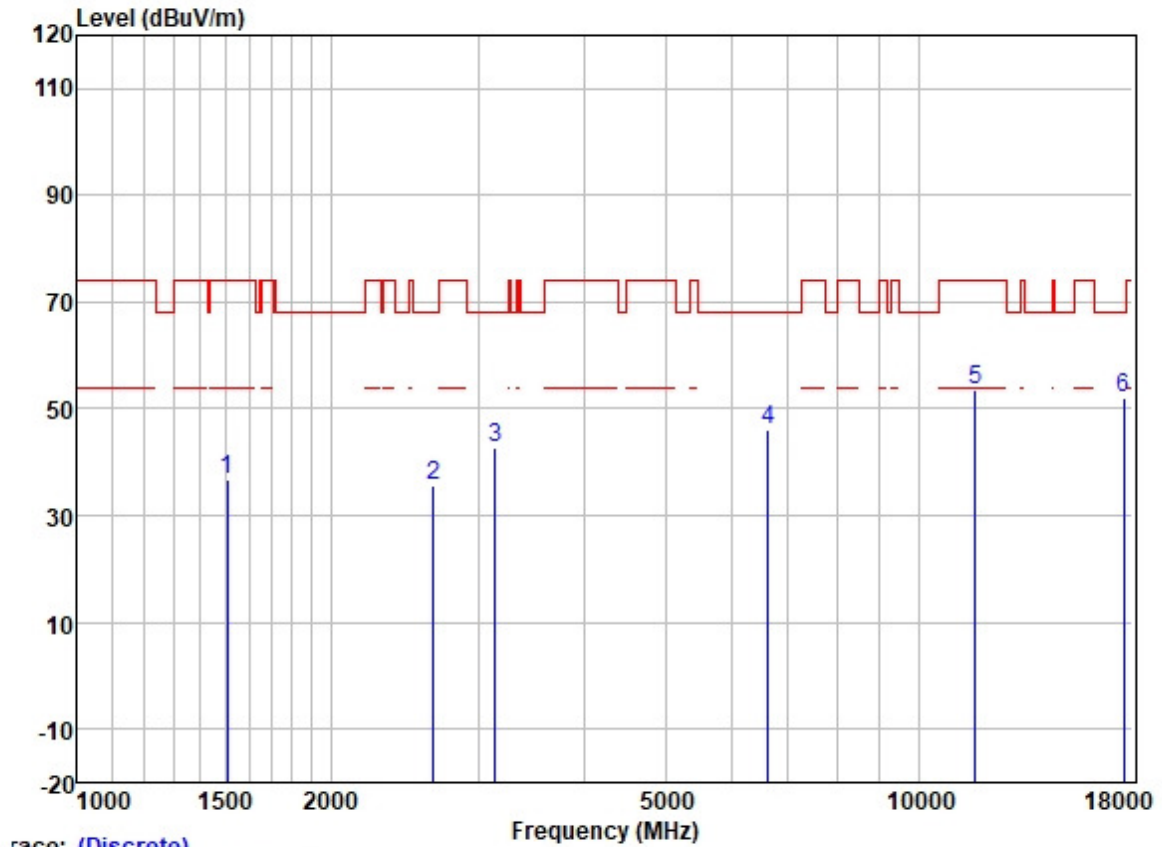


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1507.825 | 46.48 | 25.51 | 2.80 | 38.10 | 36.69 | 74.00 | -37.31 | HORIZONTAL | Peak |
| 2 | 2647.000 | 41.78 | 27.71 | 3.54 | 37.49 | 35.54 | 68.20 | -32.66 | HORIZONTAL | Peak |
| 3 | 3141.145 | 47.49 | 28.51 | 3.95 | 37.12 | 42.83 | 68.20 | -25.37 | HORIZONTAL | Peak |
| 4 | 6628.661 | 43.05 | 34.20 | 5.83 | 37.05 | 46.03 | 68.20 | -22.17 | HORIZONTAL | Peak |
| 5 | 11696.240 | 42.93 | 39.49 | 8.32 | 37.13 | 53.61 | 74.00 | -20.39 | HORIZONTAL | Peak |
| 6 | 17544.360 | 32.78 | 43.97 | 10.76 | 35.31 | 52.20 | 68.20 | -16.00 | HORIZONTAL | Peak |

Test Mode: 26; Polarity: Vertical; Modulation: OFDM; Channel: High

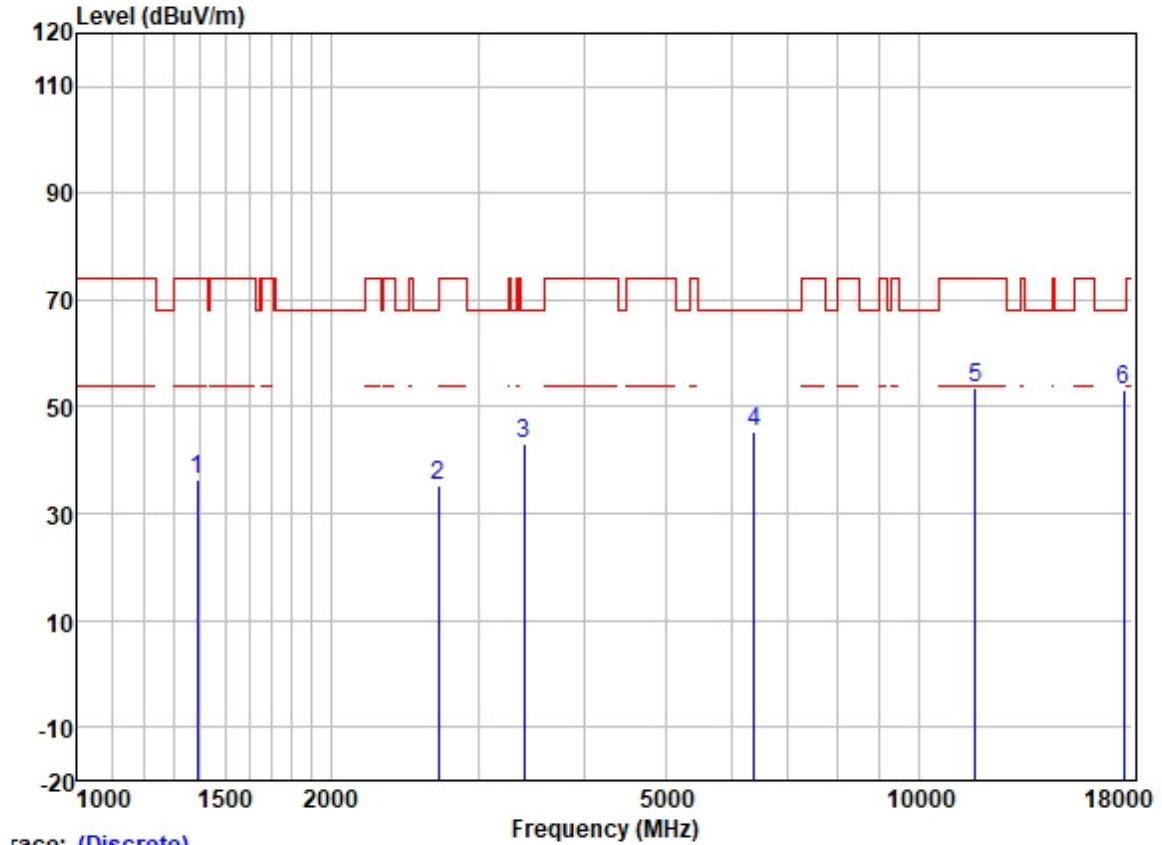


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1387.097 | 46.73 | 25.37 | 2.60 | 38.25 | 36.45 | 74.00 | -37.55 | VERTICAL | Peak |
| 2 | 2688.000 | 41.49 | 27.80 | 3.59 | 37.47 | 35.41 | 68.20 | -32.79 | VERTICAL | Peak |
| 3 | 3396.098 | 47.12 | 28.84 | 4.10 | 36.98 | 43.08 | 68.20 | -25.12 | VERTICAL | Peak |
| 4 | 6384.764 | 42.73 | 33.68 | 5.91 | 36.98 | 45.34 | 68.20 | -22.86 | VERTICAL | Peak |
| 5 | 11696.240 | 42.73 | 39.49 | 8.32 | 37.13 | 53.41 | 74.00 | -20.59 | VERTICAL | Peak |
| 6 | 17544.360 | 33.59 | 43.97 | 10.76 | 35.31 | 53.01 | 68.20 | -15.19 | VERTICAL | Peak |

Test Mode: 27; Polarity: Horizontal; Modulation: OFDM; Channel: Low

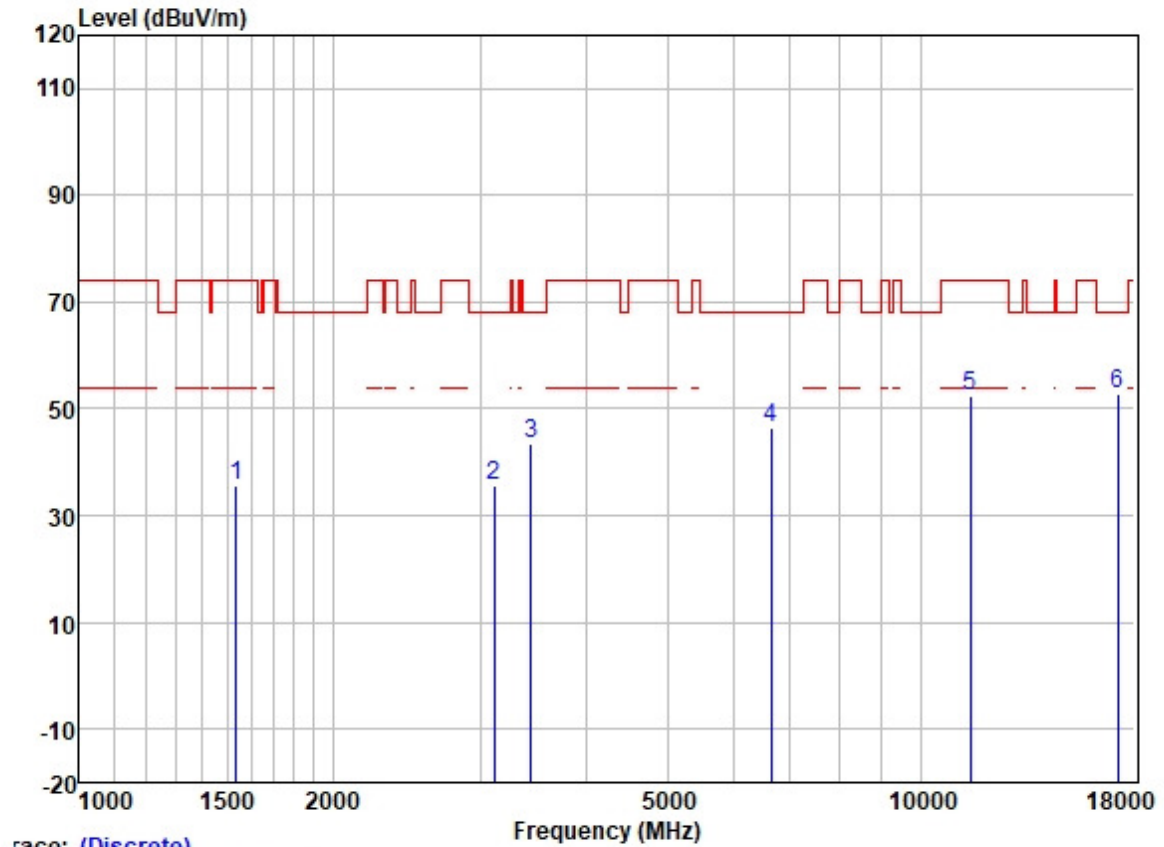


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1536.709 | 45.41 | 25.53 | 2.80 | 38.07 | 35.67 | 74.00 | -38.33 | HORIZONTAL | Peak |
| 2 | 3109.175 | 40.56 | 28.48 | 3.91 | 37.16 | 35.79 | 68.20 | -32.41 | HORIZONTAL | Peak |
| 3 | 3445.535 | 47.26 | 28.87 | 4.18 | 36.96 | 43.35 | 68.20 | -24.85 | HORIZONTAL | Peak |
| 4 | 6648.685 | 43.34 | 34.24 | 5.83 | 37.06 | 46.35 | 68.20 | -21.85 | HORIZONTAL | Peak |
| 5 | 11455.000 | 41.38 | 39.91 | 8.37 | 37.15 | 52.51 | 74.00 | -21.49 | HORIZONTAL | Peak |
| 6 | 17182.500 | 35.60 | 42.79 | 9.92 | 35.33 | 52.98 | 68.20 | -15.22 | HORIZONTAL | Peak |

Test Mode: 27; Polarity: Vertical; Modulation: OFDM; Channel: Low

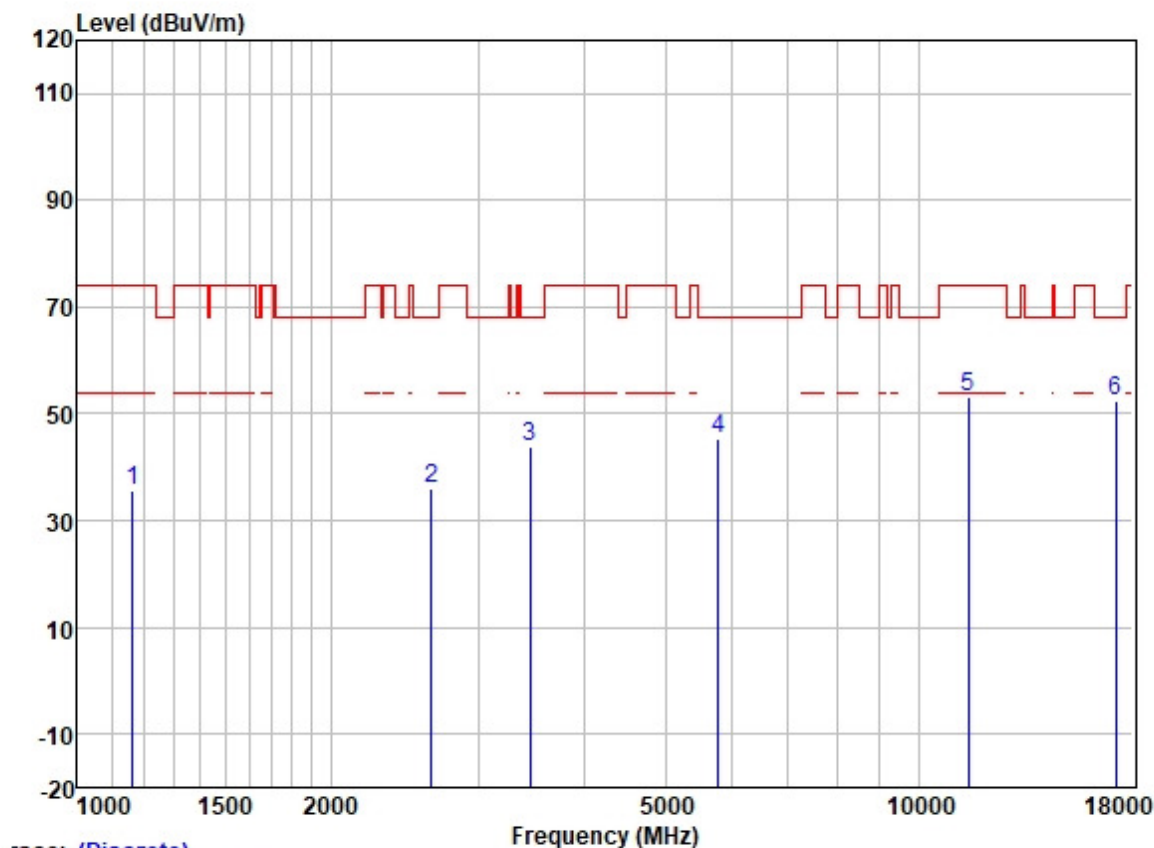


| | Freq | Read | Antenna | Cable | Preamp | Limit | Over | | |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
| | | Level | Factor | Loss | Factor | Level | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 1163.973 | 47.00 | 24.54 | 2.39 | 38.40 | 35.53 | 74.00 | -38.47 | VERTICAL Peak |
| 2 | 2635.000 | 42.16 | 27.68 | 3.53 | 37.51 | 35.86 | 68.20 | -32.34 | VERTICAL Peak |
| 3 | 3455.508 | 47.63 | 28.88 | 4.20 | 36.96 | 43.75 | 68.20 | -24.45 | VERTICAL Peak |
| 4 | 5778.563 | 44.03 | 32.16 | 6.10 | 36.89 | 45.40 | 68.20 | -22.80 | VERTICAL Peak |
| 5 | 11455.000 | 42.22 | 39.91 | 8.37 | 37.15 | 53.35 | 74.00 | -20.65 | VERTICAL Peak |
| 6 | 17182.500 | 35.08 | 42.79 | 9.92 | 35.33 | 52.46 | 68.20 | -15.74 | VERTICAL Peak |

Test Mode: 27; Polarity: Horizontal; Modulation: OFDM; Channel: middle

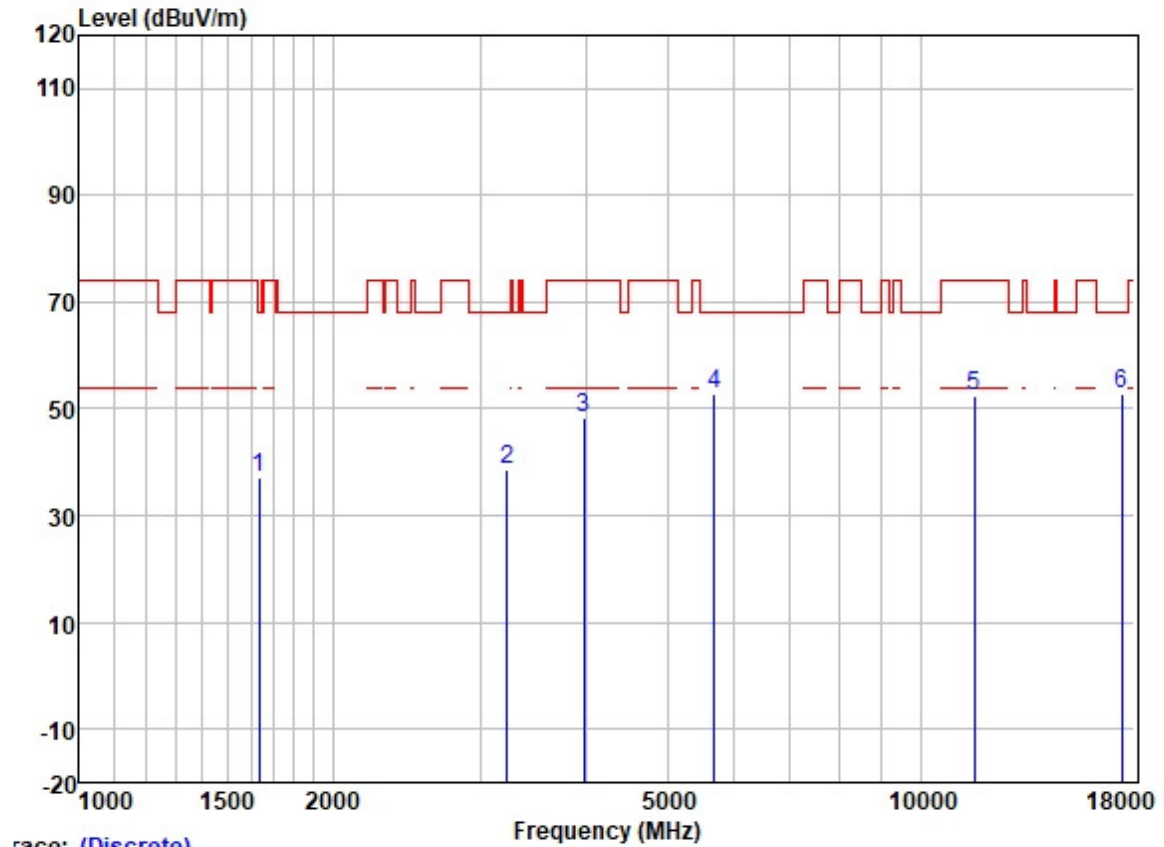


| | | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------|---------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1635.704 | 46.48 | 25.62 | 2.80 | 37.95 | 36.95 | 68.20 | -31.25 | HORIZONTAL | Peak |
| 2 | 3226.347 | 43.15 | 28.63 | 4.01 | 37.07 | 38.72 | 68.20 | -29.48 | HORIZONTAL | Peak |
| 3 | 3981.257 | 50.85 | 29.78 | 4.60 | 36.81 | 48.42 | 74.00 | -25.58 | HORIZONTAL | Peak |
| 4 | 5681.854 | 51.43 | 31.99 | 6.38 | 36.89 | 52.91 | 68.20 | -15.29 | HORIZONTAL | Peak |
| 5 | 11575.000 | 41.31 | 39.78 | 8.38 | 37.14 | 52.33 | 74.00 | -21.67 | HORIZONTAL | Peak |
| 6 | 17362.500 | 33.88 | 43.57 | 10.53 | 35.32 | 52.66 | 68.20 | -15.54 | HORIZONTAL | Peak |

Test Mode: 27; Polarity: Vertical; Modulation: OFDM; Channel: middle

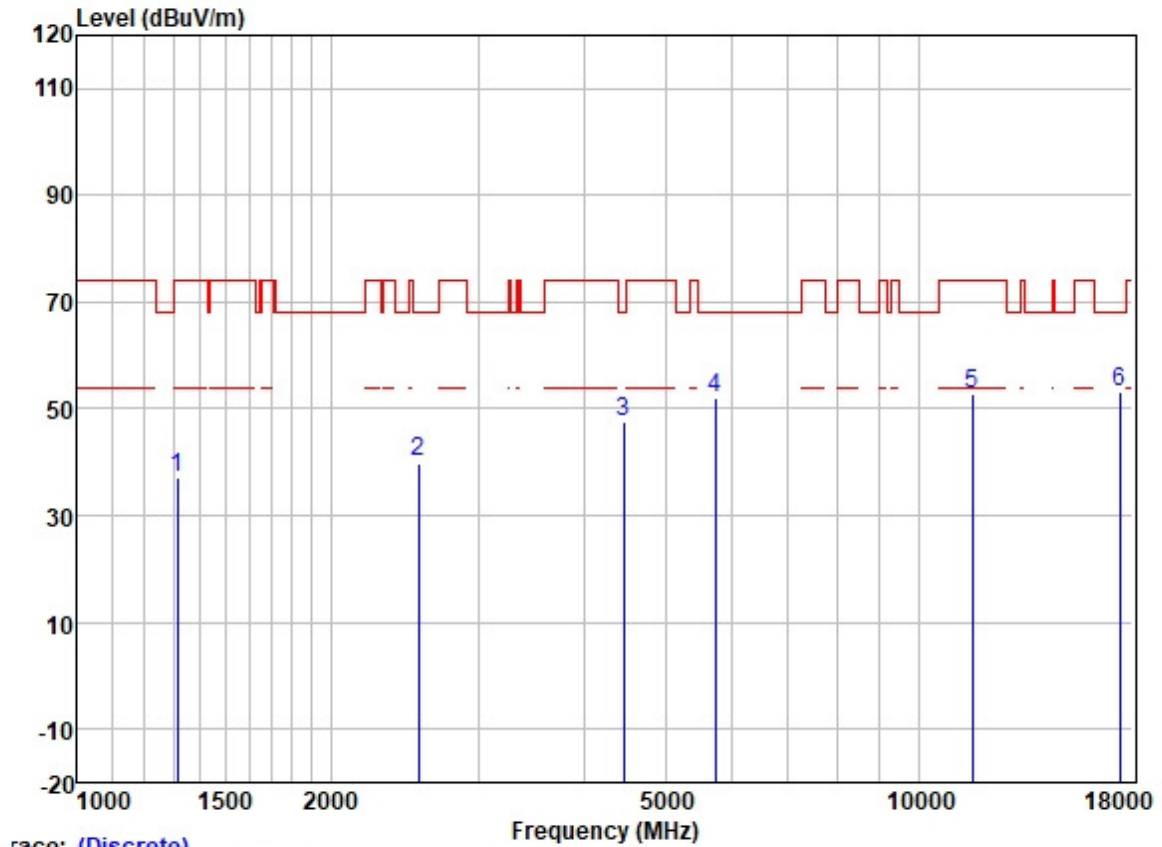


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1315.649 | 47.71 | 25.24 | 2.60 | 38.29 | 37.26 | 74.00 | -36.74 | VERTICAL | Peak |
| 2 | 2547.000 | 46.47 | 27.55 | 3.44 | 37.54 | 39.92 | 68.20 | -28.28 | VERTICAL | Peak |
| 3 | 4456.315 | 48.85 | 30.75 | 4.88 | 36.81 | 47.67 | 68.20 | -20.53 | VERTICAL | Peak |
| 4 | 5733.029 | 50.55 | 32.07 | 6.25 | 36.89 | 51.98 | 68.20 | -16.22 | VERTICAL | Peak |
| 5 | 11575.000 | 41.81 | 39.78 | 8.38 | 37.14 | 52.83 | 74.00 | -21.17 | VERTICAL | Peak |
| 6 | 17362.500 | 34.23 | 43.57 | 10.53 | 35.32 | 53.01 | 68.20 | -15.19 | VERTICAL | Peak |

Test Mode: 27; Polarity: Horizontal; Modulation: OFDM; Channel: High

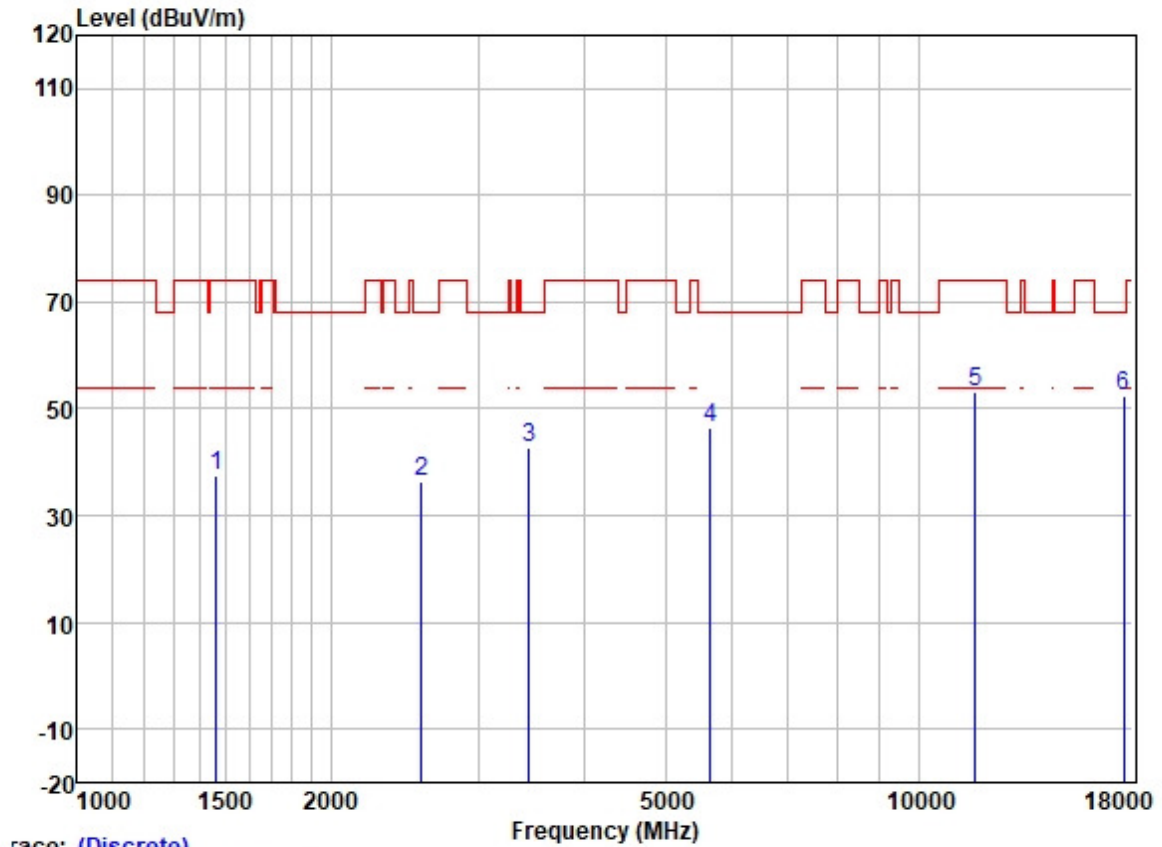


| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|-----------|---------|-------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1461.119 | 47.63 | 25.46 | 2.73 | 38.17 | 37.65 | 74.00 | -36.35 | HORIZONTAL Peak |
| 2 | 2563.000 | 42.86 | 27.58 | 3.47 | 37.53 | 36.38 | 68.20 | -31.82 | HORIZONTAL Peak |
| 3 | 3445.535 | 46.68 | 28.87 | 4.18 | 36.96 | 42.77 | 68.20 | -25.43 | HORIZONTAL Peak |
| 4 | 5651.367 | 44.91 | 31.95 | 6.35 | 36.89 | 46.32 | 68.20 | -21.88 | HORIZONTAL Peak |
| 5 | 11689.000 | 42.34 | 39.49 | 8.32 | 37.13 | 53.02 | 74.00 | -20.98 | HORIZONTAL Peak |
| 6 | 17533.500 | 33.06 | 43.97 | 10.76 | 35.31 | 52.48 | 68.20 | -15.72 | HORIZONTAL Peak |

Test Mode: 27; Polarity: Vertical; Modulation: OFDM; Channel: High

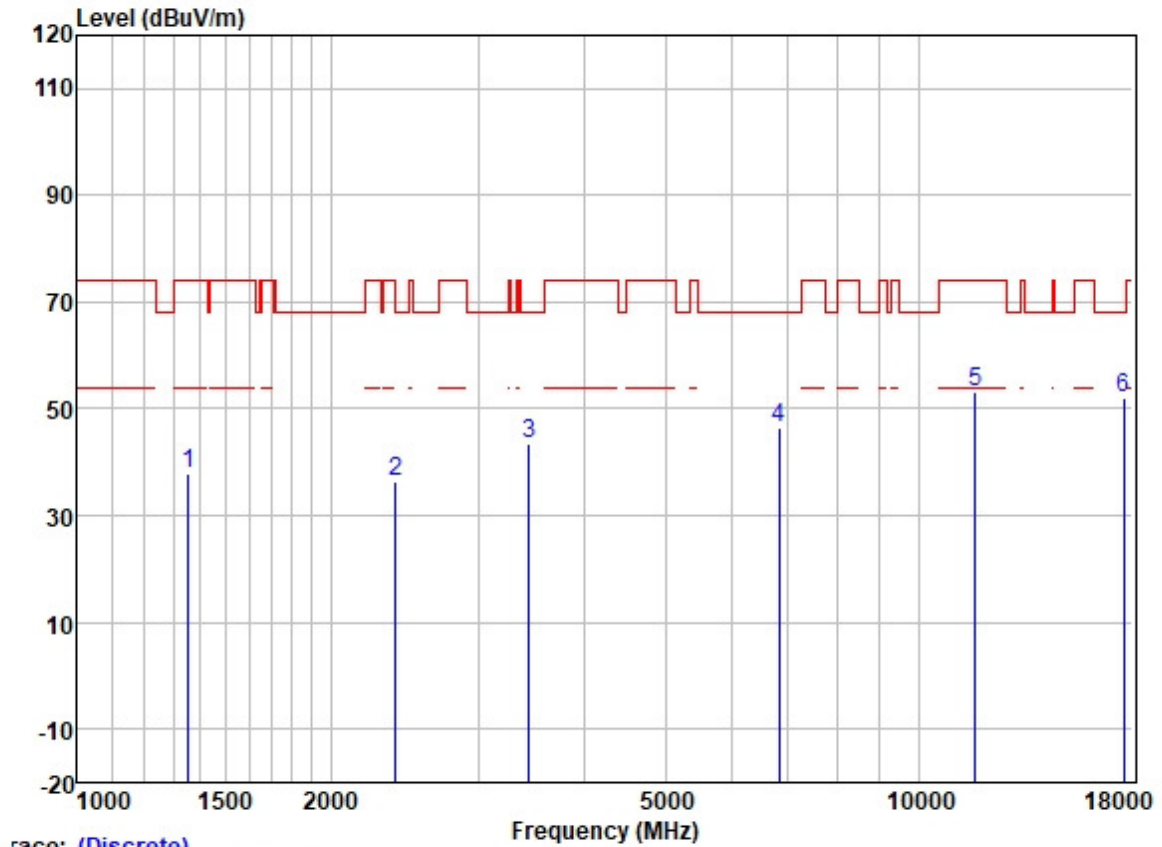


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1355.263 | 48.28 | 25.32 | 2.60 | 38.27 | 37.93 | 74.00 | -36.07 | VERTICAL | Peak |
| 2 | 2387.000 | 42.99 | 27.33 | 3.48 | 37.60 | 36.20 | 74.00 | -37.80 | VERTICAL | Peak |
| 3 | 3445.535 | 47.42 | 28.87 | 4.18 | 36.96 | 43.51 | 68.20 | -24.69 | VERTICAL | Peak |
| 4 | 6820.407 | 42.93 | 34.70 | 5.82 | 37.13 | 46.32 | 68.20 | -21.88 | VERTICAL | Peak |
| 5 | 11689.000 | 42.33 | 39.49 | 8.32 | 37.13 | 53.01 | 74.00 | -20.99 | VERTICAL | Peak |
| 6 | 17533.500 | 32.55 | 43.97 | 10.76 | 35.31 | 51.97 | 68.20 | -16.23 | VERTICAL | Peak |

Test Mode: 28; Polarity: Horizontal; Modulation: OFDM; Channel: Low

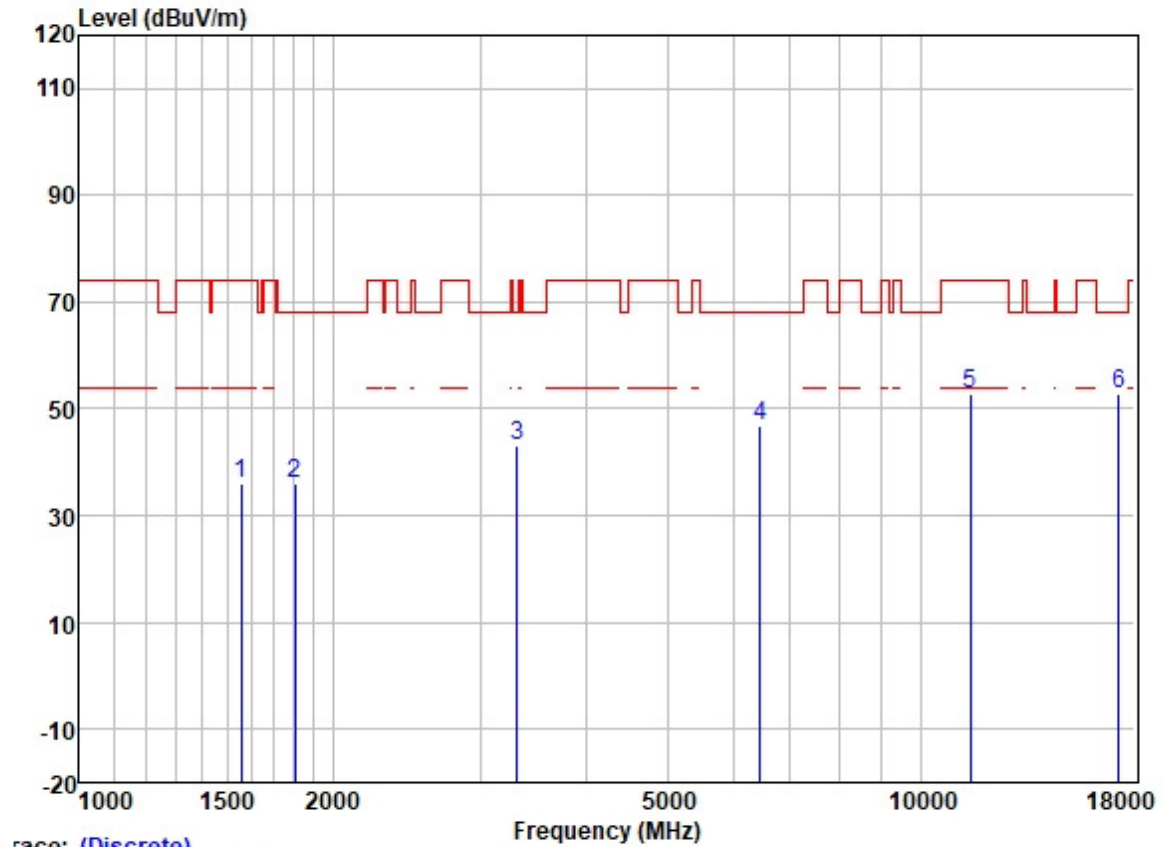

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1559.423 | 45.61 | 25.54 | 2.80 | 38.03 | 35.92 | 74.00 | -38.08 | HORIZONTAL | Peak |
| 2 | 1804.490 | 44.77 | 25.95 | 3.00 | 37.81 | 35.91 | 68.20 | -32.29 | HORIZONTAL | Peak |
| 3 | 3315.073 | 47.23 | 28.77 | 4.07 | 37.02 | 43.05 | 68.20 | -25.15 | HORIZONTAL | Peak |
| 4 | 6448.273 | 43.96 | 33.88 | 5.87 | 37.00 | 46.71 | 68.20 | -21.49 | HORIZONTAL | Peak |
| 5 | 11460.400 | 41.84 | 39.91 | 8.37 | 37.15 | 52.97 | 74.00 | -21.03 | HORIZONTAL | Peak |
| 6 | 17190.600 | 35.41 | 42.79 | 9.92 | 35.33 | 52.79 | 68.20 | -15.41 | HORIZONTAL | Peak |


Test Mode: 28; Polarity: Vertical; Modulation: OFDM; Channel: Low

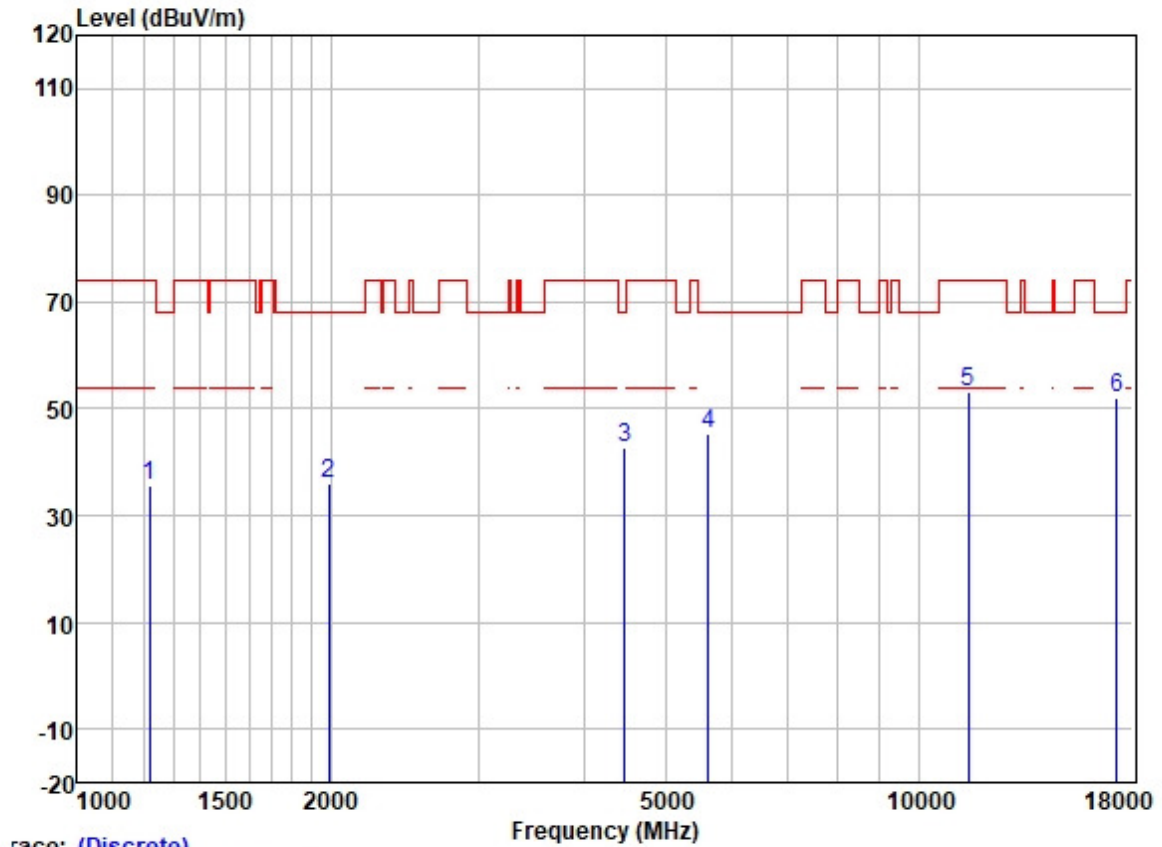

race: (Discrete)


| | Freq | Read | Antenna | Cable | Preamp | Limit | Over | | |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
| | MHz | Level | Factor | Loss | Factor | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 1217.321 | 47.07 | 24.79 | 2.32 | 38.37 | 35.81 | 74.00 | -38.19 | VERTICAL Peak |
| 2 | 1989.476 | 44.69 | 26.09 | 3.08 | 37.70 | 36.16 | 68.20 | -32.04 | VERTICAL Peak |
| 3 | 4476.582 | 43.90 | 30.78 | 4.99 | 36.81 | 42.86 | 68.20 | -25.34 | VERTICAL Peak |
| 4 | 5628.075 | 43.96 | 31.93 | 6.33 | 36.89 | 45.33 | 68.20 | -22.87 | VERTICAL Peak |
| 5 | 11460.400 | 42.07 | 39.91 | 8.37 | 37.15 | 53.20 | 74.00 | -20.80 | VERTICAL Peak |
| 6 | 17190.600 | 34.71 | 42.79 | 9.92 | 35.33 | 52.09 | 68.20 | -16.11 | VERTICAL Peak |

Test Mode: 28; Polarity: Horizontal; Modulation: OFDM; Channel: middle

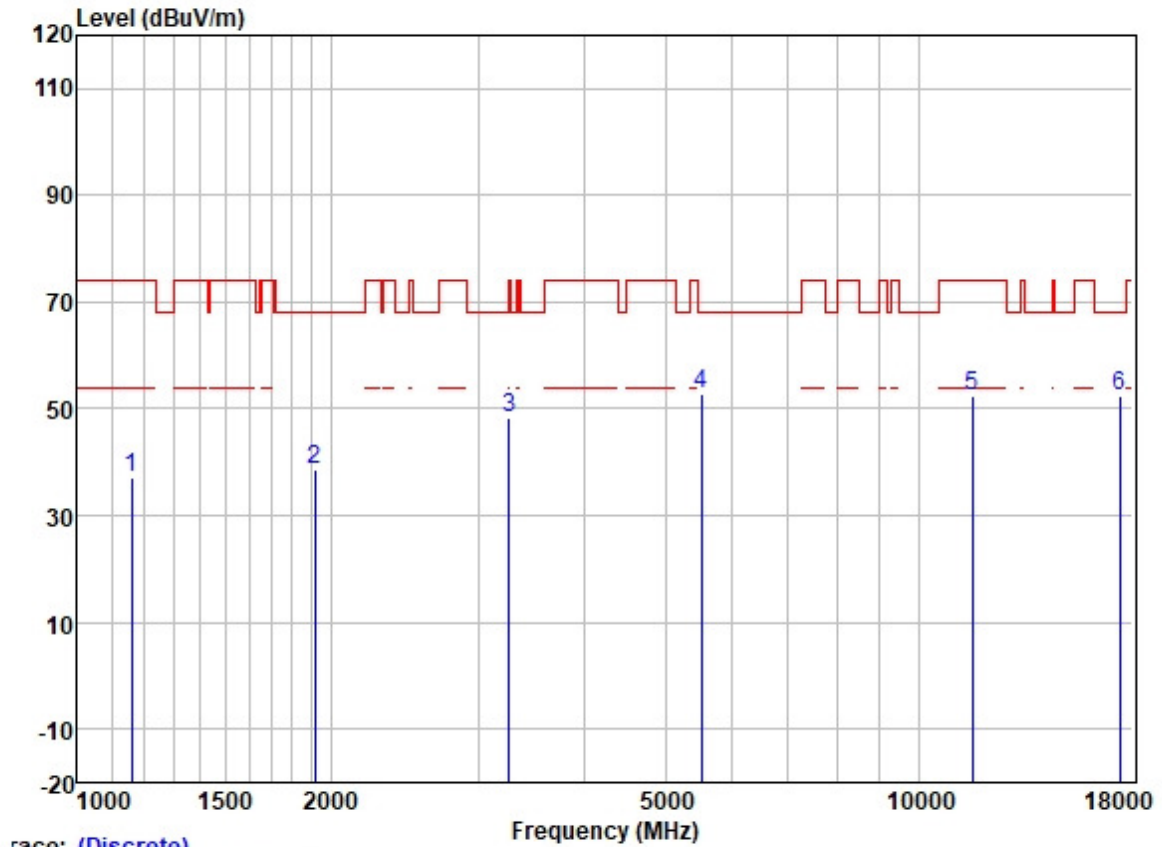


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1161.093 | 48.61 | 24.53 | 2.40 | 38.42 | 37.12 | 74.00 | -36.88 | HORIZONTAL | Peak |
| 2 | 1917.476 | 47.24 | 26.05 | 2.93 | 37.74 | 38.48 | 68.20 | -29.72 | HORIZONTAL | Peak |
| 3 | 3263.372 | 52.78 | 28.70 | 4.03 | 37.04 | 48.47 | 74.00 | -25.53 | HORIZONTAL | Peak |
| 4 | 5516.598 | 51.41 | 31.81 | 6.38 | 36.89 | 52.71 | 68.20 | -15.49 | HORIZONTAL | Peak |
| 5 | 11574.400 | 41.56 | 39.78 | 8.38 | 37.14 | 52.58 | 74.00 | -21.42 | HORIZONTAL | Peak |
| 6 | 17361.600 | 33.79 | 43.57 | 10.53 | 35.32 | 52.57 | 68.20 | -15.63 | HORIZONTAL | Peak |

Test Mode: 28; Polarity: Vertical; Modulation: OFDM; Channel: middle

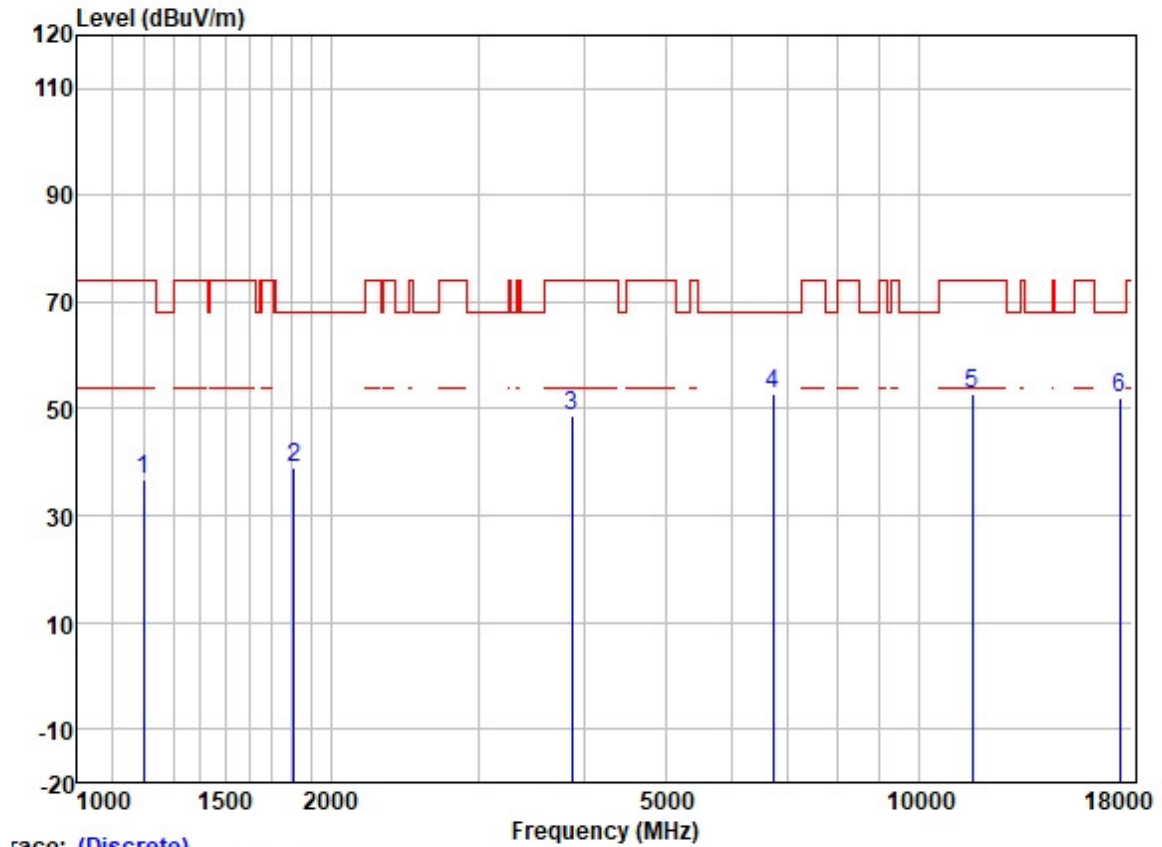


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1199.070 | 48.12 | 24.68 | 2.34 | 38.39 | 36.75 | 74.00 | -37.25 | VERTICAL | Peak |
| 2 | 1807.918 | 47.83 | 25.95 | 2.99 | 37.81 | 38.96 | 68.20 | -29.24 | VERTICAL | Peak |
| 3 | 3867.495 | 51.27 | 29.64 | 4.60 | 36.83 | 48.68 | 74.00 | -25.32 | VERTICAL | Peak |
| 4 | 6709.400 | 49.51 | 34.44 | 5.83 | 37.08 | 52.70 | 68.20 | -15.50 | VERTICAL | Peak |
| 5 | 11574.400 | 41.61 | 39.78 | 8.38 | 37.14 | 52.63 | 74.00 | -21.37 | VERTICAL | Peak |
| 6 | 17361.600 | 33.28 | 43.57 | 10.53 | 35.32 | 52.06 | 68.20 | -16.14 | VERTICAL | Peak |

Test Mode: 28; Polarity: Horizontal; Modulation: OFDM; Channel: High

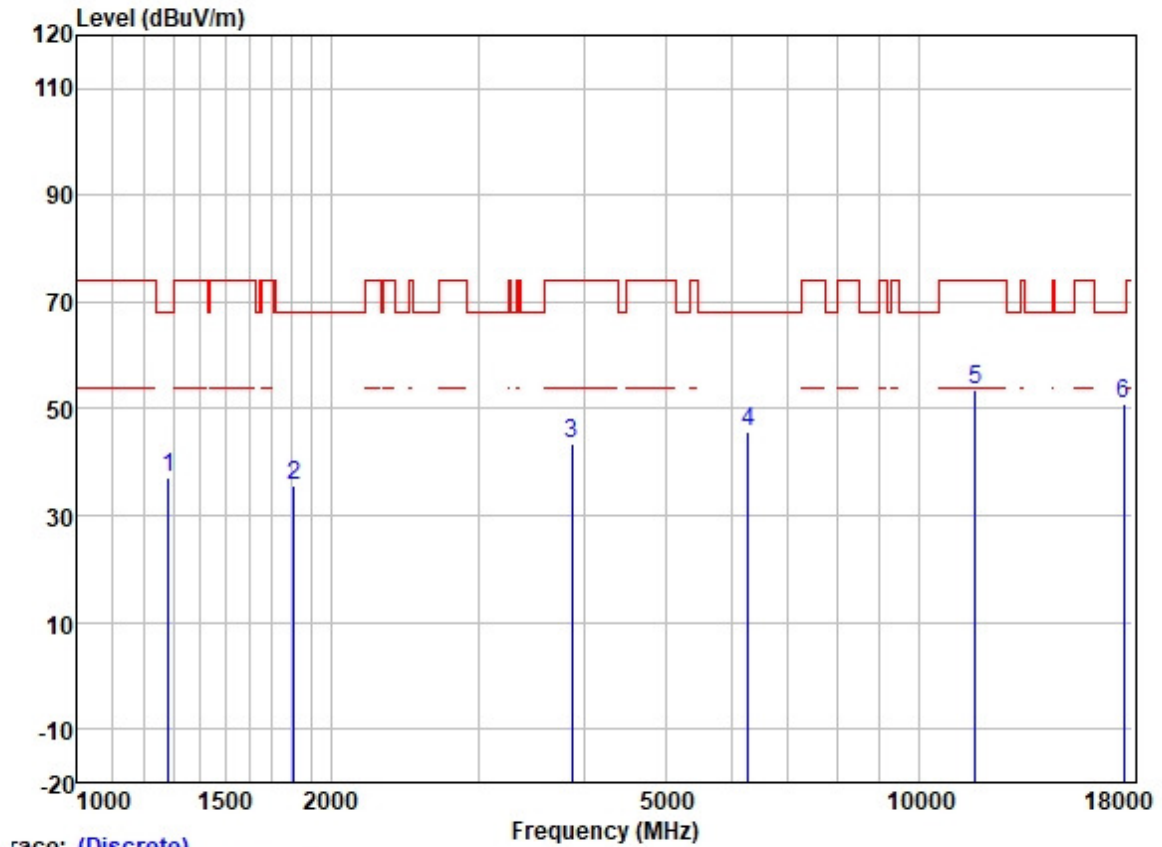

| | | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------|---------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1284.409 | 47.82 | 25.16 | 2.53 | 38.33 | 37.18 | 68.20 | -31.02 | HORIZONTAL | Peak |
| 2 | 1811.682 | 44.63 | 25.96 | 2.99 | 37.81 | 35.77 | 68.20 | -32.43 | HORIZONTAL | Peak |
| 3 | 3876.430 | 45.87 | 29.66 | 4.60 | 36.83 | 43.30 | 74.00 | -30.70 | HORIZONTAL | Peak |
| 4 | 6267.914 | 43.36 | 33.29 | 6.00 | 36.95 | 45.70 | 68.20 | -22.50 | HORIZONTAL | Peak |
| 5 | 11694.400 | 42.69 | 39.49 | 8.32 | 37.13 | 53.37 | 74.00 | -20.63 | HORIZONTAL | Peak |
| 6 | 17541.600 | 31.48 | 43.97 | 10.76 | 35.31 | 50.90 | 68.20 | -17.30 | HORIZONTAL | Peak |

Test Mode: 28; Polarity: Vertical; Modulation: OFDM; Channel: High

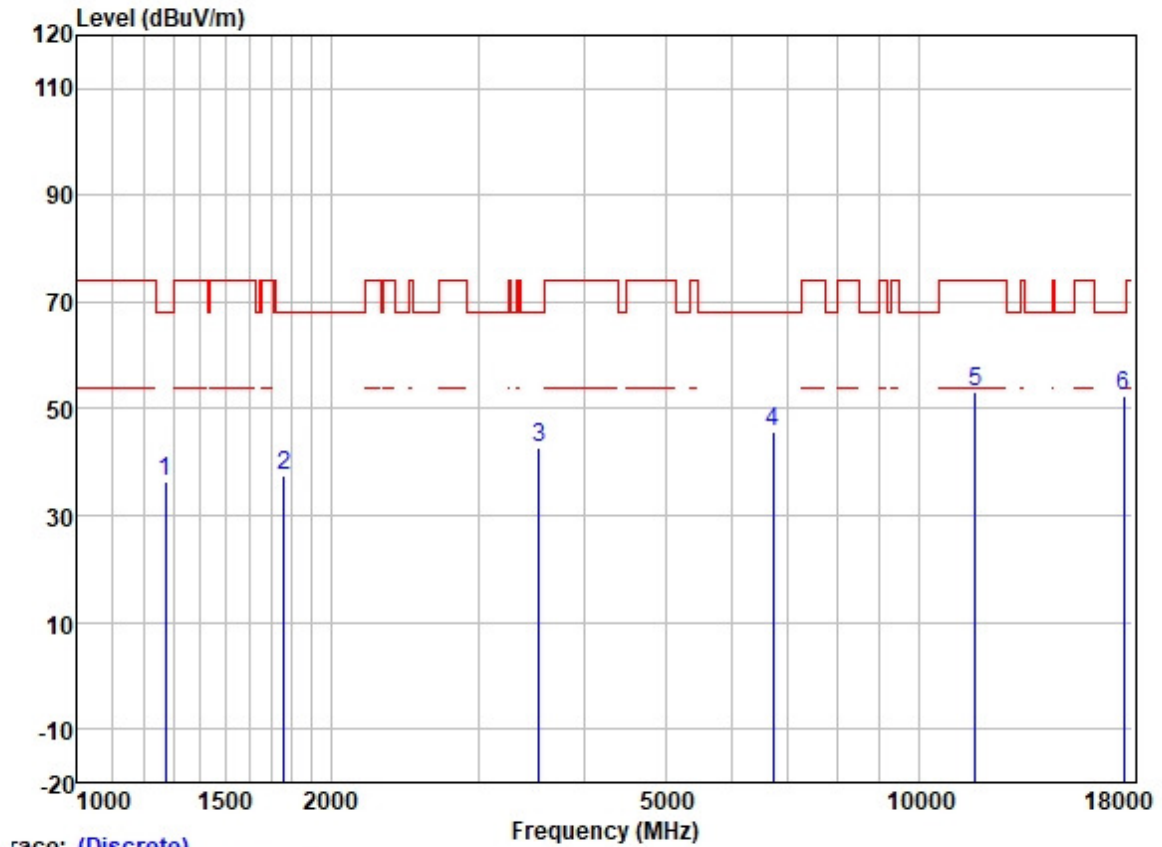

race: (Discrete)


| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|-----------|---------|-------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1274.378 | 47.22 | 25.12 | 2.48 | 38.33 | 36.49 | 68.20 | -31.71 | VERTICAL Peak |
| 2 | 1760.165 | 46.36 | 25.88 | 2.93 | 37.85 | 37.32 | 68.20 | -30.88 | VERTICAL Peak |
| 3 | 3539.493 | 46.38 | 28.95 | 4.40 | 36.92 | 42.81 | 68.20 | -25.39 | VERTICAL Peak |
| 4 | 6719.644 | 42.70 | 34.44 | 5.83 | 37.09 | 45.88 | 68.20 | -22.32 | VERTICAL Peak |
| 5 | 11694.400 | 42.55 | 39.49 | 8.32 | 37.13 | 53.23 | 74.00 | -20.77 | VERTICAL Peak |
| 6 | 17541.600 | 33.00 | 43.97 | 10.76 | 35.31 | 52.42 | 68.20 | -15.78 | VERTICAL Peak |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 29; Polarity: Horizontal; Modulation: OFDM; Channel: Low

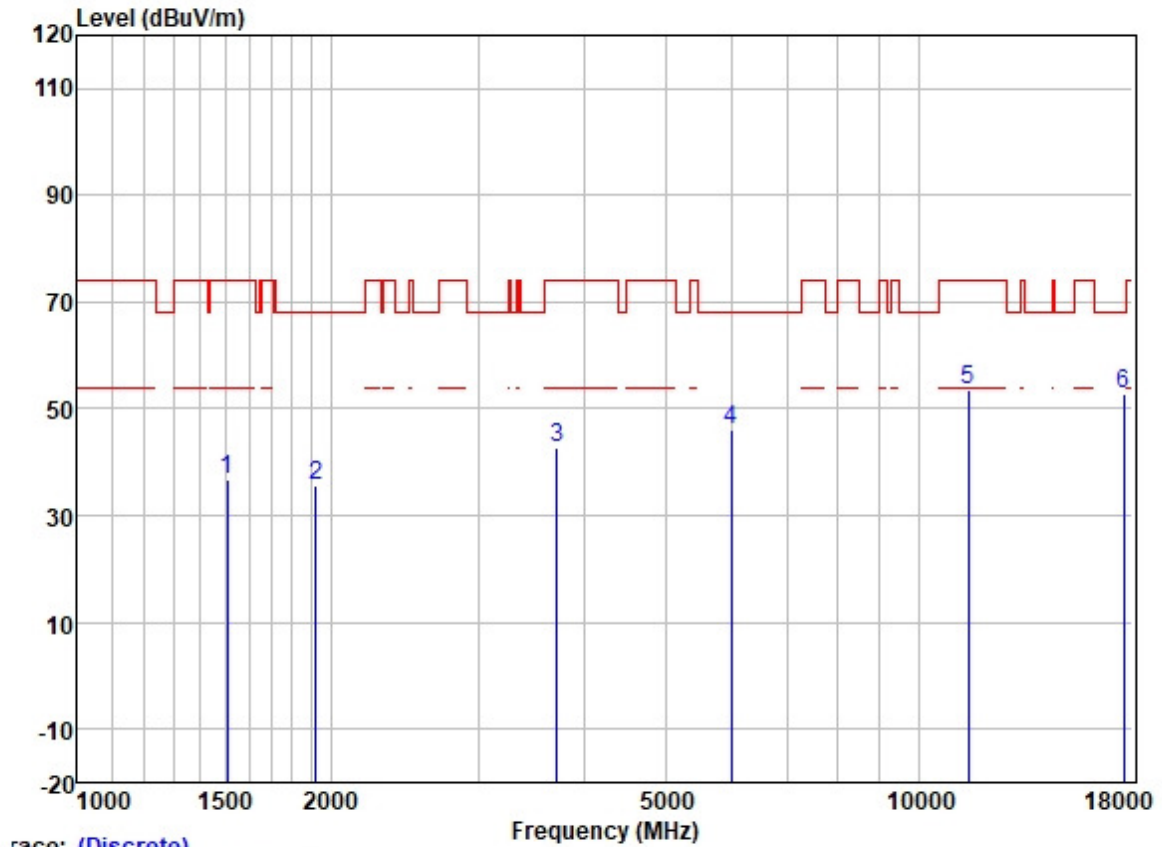


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1507.013 | 46.45 | 25.51 | 2.80 | 38.10 | 36.66 | 74.00 | -37.34 | HORIZONTAL | Peak |
| 2 | 1920.761 | 44.25 | 26.06 | 2.94 | 37.74 | 35.51 | 68.20 | -32.69 | HORIZONTAL | Peak |
| 3 | 3721.787 | 45.69 | 29.31 | 4.57 | 36.87 | 42.70 | 74.00 | -31.30 | HORIZONTAL | Peak |
| 4 | 5991.675 | 44.35 | 32.39 | 6.15 | 36.90 | 45.99 | 68.20 | -22.21 | HORIZONTAL | Peak |
| 5 | 11461.000 | 42.37 | 39.91 | 8.37 | 37.15 | 53.50 | 74.00 | -20.50 | HORIZONTAL | Peak |
| 6 | 17533.500 | 33.21 | 43.97 | 10.76 | 35.31 | 52.63 | 68.20 | -15.57 | HORIZONTAL | Peak |

Test Mode: 29; Polarity: Vertical; Modulation: OFDM; Channel: Low

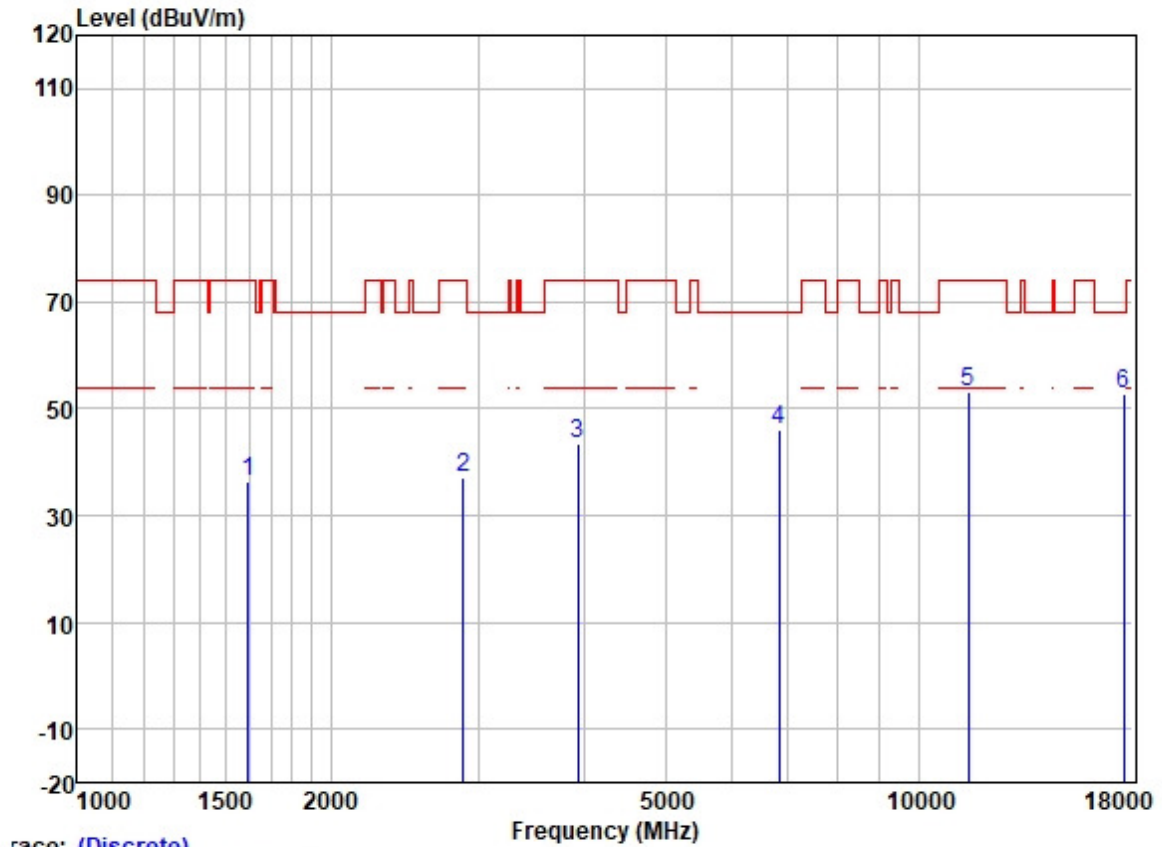


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1597.096 | 46.09 | 25.58 | 2.80 | 37.98 | 36.49 | 74.00 | -37.51 | VERTICAL | Peak |
| 2 | 2876.000 | 42.67 | 28.26 | 3.70 | 37.36 | 37.27 | 74.00 | -36.73 | VERTICAL | Peak |
| 3 | 3938.461 | 45.99 | 29.73 | 4.60 | 36.81 | 43.51 | 74.00 | -30.49 | VERTICAL | Peak |
| 4 | 6823.154 | 42.59 | 34.70 | 5.82 | 37.13 | 45.98 | 68.20 | -22.22 | VERTICAL | Peak |
| 5 | 11461.000 | 41.89 | 39.91 | 8.37 | 37.15 | 53.02 | 74.00 | -20.98 | VERTICAL | Peak |
| 6 | 17533.500 | 33.48 | 43.97 | 10.76 | 35.31 | 52.90 | 68.20 | -15.30 | VERTICAL | Peak |

Test Mode: 29; Polarity: Horizontal; Modulation: OFDM; Channel: middle

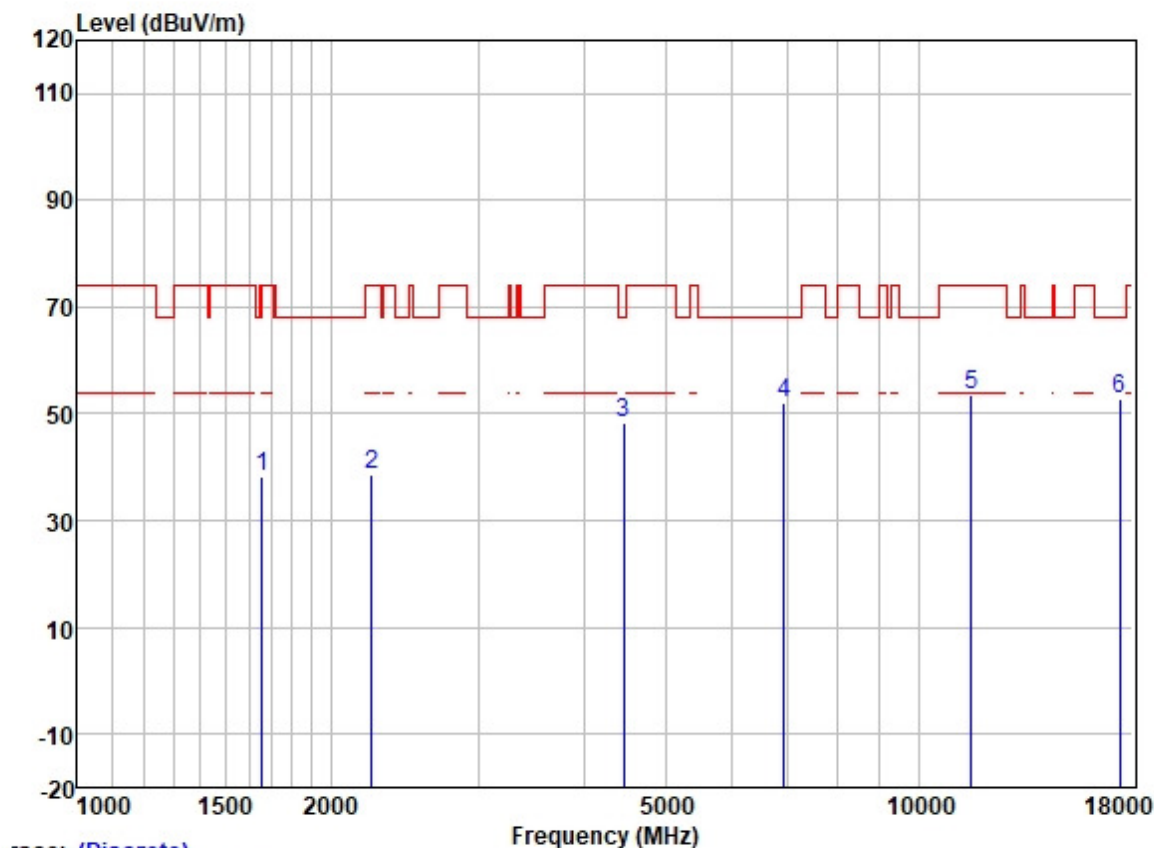

| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|-----------|---------|-------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1655.983 | 47.66 | 25.65 | 2.80 | 37.93 | 38.18 | 68.20 | -30.02 | HORIZONTAL Peak |
| 2 | 2236.172 | 46.37 | 26.80 | 3.23 | 37.64 | 38.76 | 74.00 | -35.24 | HORIZONTAL Peak |
| 3 | 4461.383 | 49.47 | 30.75 | 4.88 | 36.81 | 48.29 | 68.20 | -19.91 | HORIZONTAL Peak |
| 4 | 6916.484 | 48.56 | 34.89 | 5.81 | 37.19 | 52.07 | 68.20 | -16.13 | HORIZONTAL Peak |
| 5 | 11573.000 | 42.39 | 39.78 | 8.38 | 37.14 | 53.41 | 74.00 | -20.59 | HORIZONTAL Peak |
| 6 | 17359.500 | 34.35 | 43.40 | 10.39 | 35.32 | 52.82 | 68.20 | -15.38 | HORIZONTAL Peak |


Test Mode: 29; Polarity: Vertical; Modulation: OFDM; Channel: middle

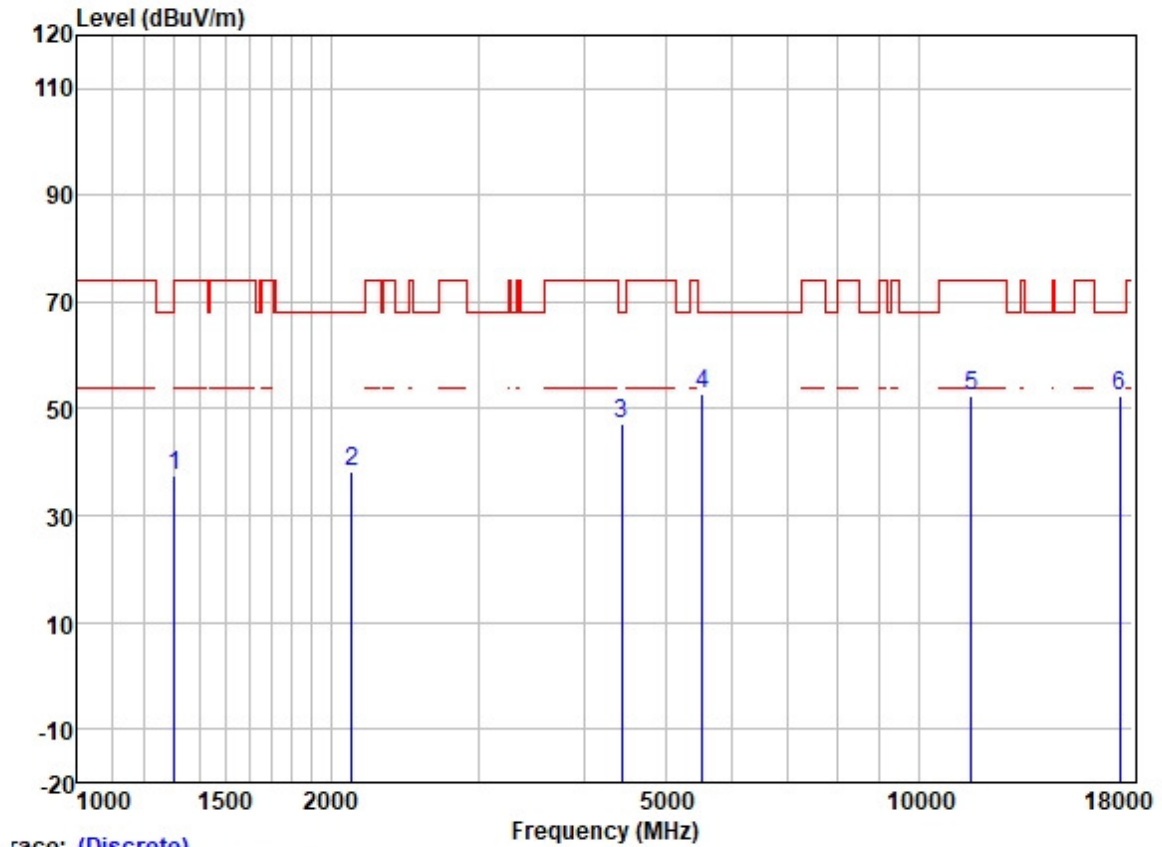

race: (Discrete)


| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|-----------|---------|-------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1302.693 | 48.17 | 25.20 | 2.60 | 38.31 | 37.66 | 74.00 | -36.34 | VERTICAL Peak |
| 2 | 2117.937 | 46.24 | 26.34 | 3.17 | 37.67 | 38.08 | 68.20 | -30.12 | VERTICAL Peak |
| 3 | 4440.305 | 48.50 | 30.73 | 4.83 | 36.81 | 47.25 | 68.20 | -20.95 | VERTICAL Peak |
| 4 | 5536.251 | 51.36 | 31.83 | 6.37 | 36.89 | 52.67 | 68.20 | -15.53 | VERTICAL Peak |
| 5 | 11573.000 | 41.55 | 39.78 | 8.38 | 37.14 | 52.57 | 74.00 | -21.43 | VERTICAL Peak |
| 6 | 17359.500 | 34.04 | 43.40 | 10.39 | 35.32 | 52.51 | 68.20 | -15.69 | VERTICAL Peak |

Test Mode: 29; Polarity: Horizontal; Modulation: OFDM; Channel: High

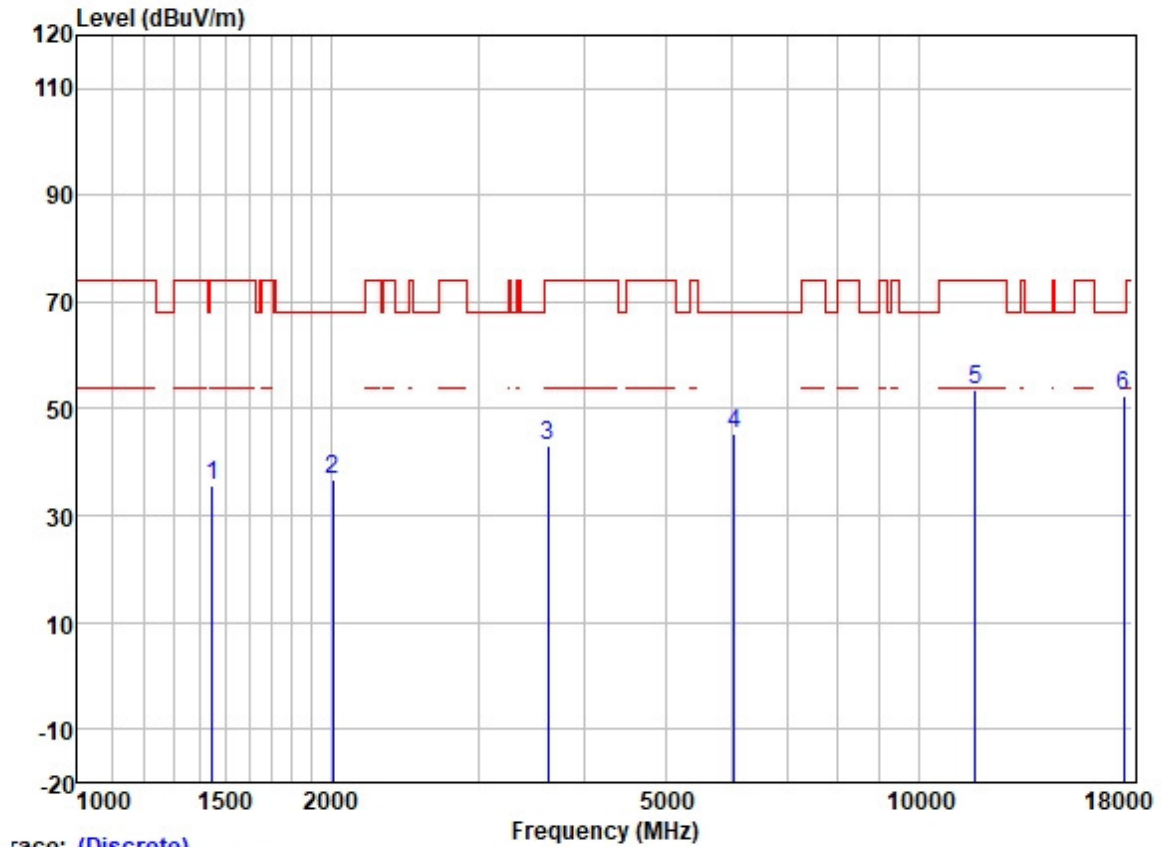


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1447.565 | 45.69 | 25.45 | 2.70 | 38.17 | 35.67 | 74.00 | -38.33 | HORIZONTAL | Peak |
| 2 | 2013.231 | 45.12 | 26.12 | 3.10 | 37.69 | 36.65 | 68.20 | -31.55 | HORIZONTAL | Peak |
| 3 | 3626.512 | 46.30 | 29.09 | 4.51 | 36.90 | 43.00 | 74.00 | -31.00 | HORIZONTAL | Peak |
| 4 | 6031.736 | 43.68 | 32.48 | 6.18 | 36.90 | 45.44 | 68.20 | -22.76 | HORIZONTAL | Peak |
| 5 | 11689.000 | 42.94 | 39.49 | 8.32 | 37.13 | 53.62 | 74.00 | -20.38 | HORIZONTAL | Peak |
| 6 | 17533.500 | 32.99 | 43.97 | 10.76 | 35.31 | 52.41 | 68.20 | -15.79 | HORIZONTAL | Peak |

Test Mode: 29; Polarity: Vertical; Modulation: OFDM; Channel: High

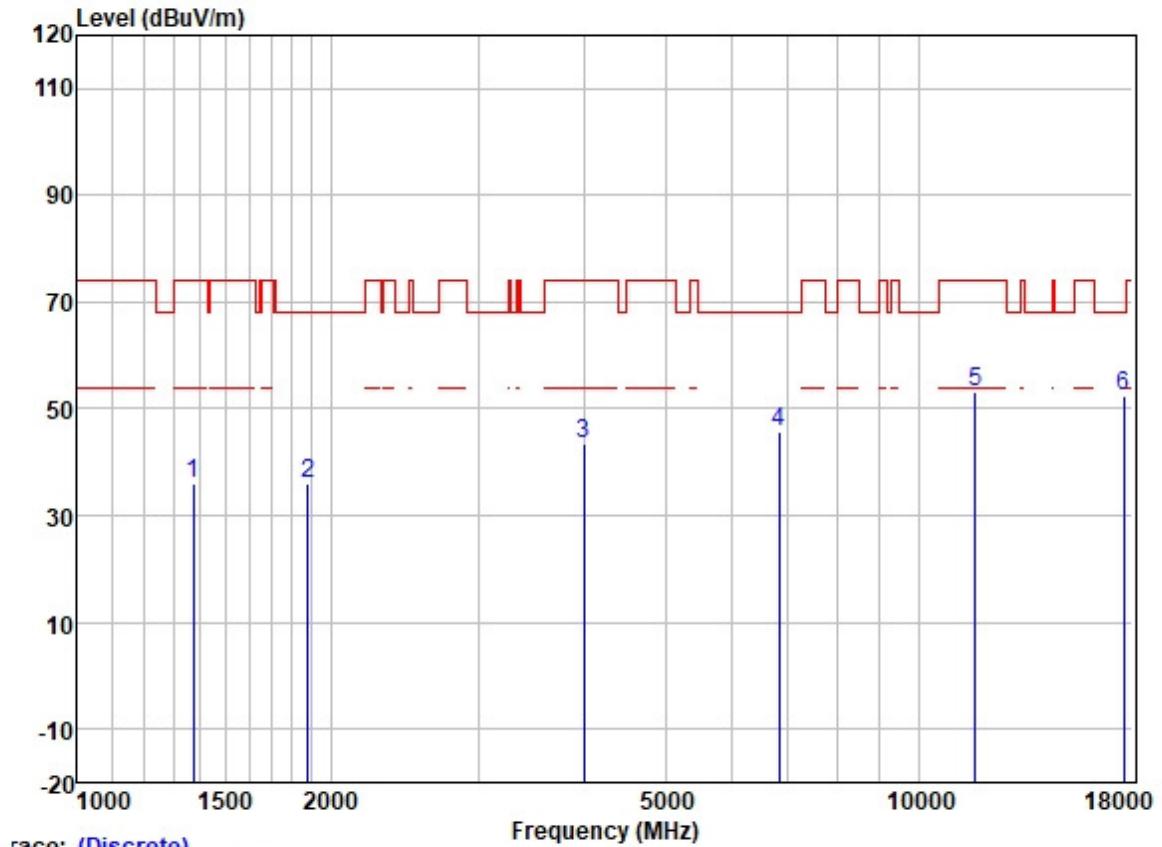


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1373.938 | 46.14 | 25.35 | 2.60 | 38.25 | 35.84 | 74.00 | -38.16 | VERTICAL | Peak |
| 2 | 1880.489 | 44.96 | 26.02 | 2.92 | 37.77 | 36.13 | 68.20 | -32.07 | VERTICAL | Peak |
| 3 | 3997.304 | 45.91 | 29.79 | 4.60 | 36.80 | 43.50 | 74.00 | -30.50 | VERTICAL | Peak |
| 4 | 6831.762 | 42.15 | 34.74 | 5.82 | 37.13 | 45.58 | 68.20 | -22.62 | VERTICAL | Peak |
| 5 | 11689.000 | 42.65 | 39.49 | 8.32 | 37.13 | 53.33 | 74.00 | -20.67 | VERTICAL | Peak |
| 6 | 17533.500 | 33.09 | 43.97 | 10.76 | 35.31 | 52.51 | 68.20 | -15.69 | VERTICAL | Peak |

Test Mode: 30; Polarity: Horizontal; Modulation: OFDM; Channel: Low

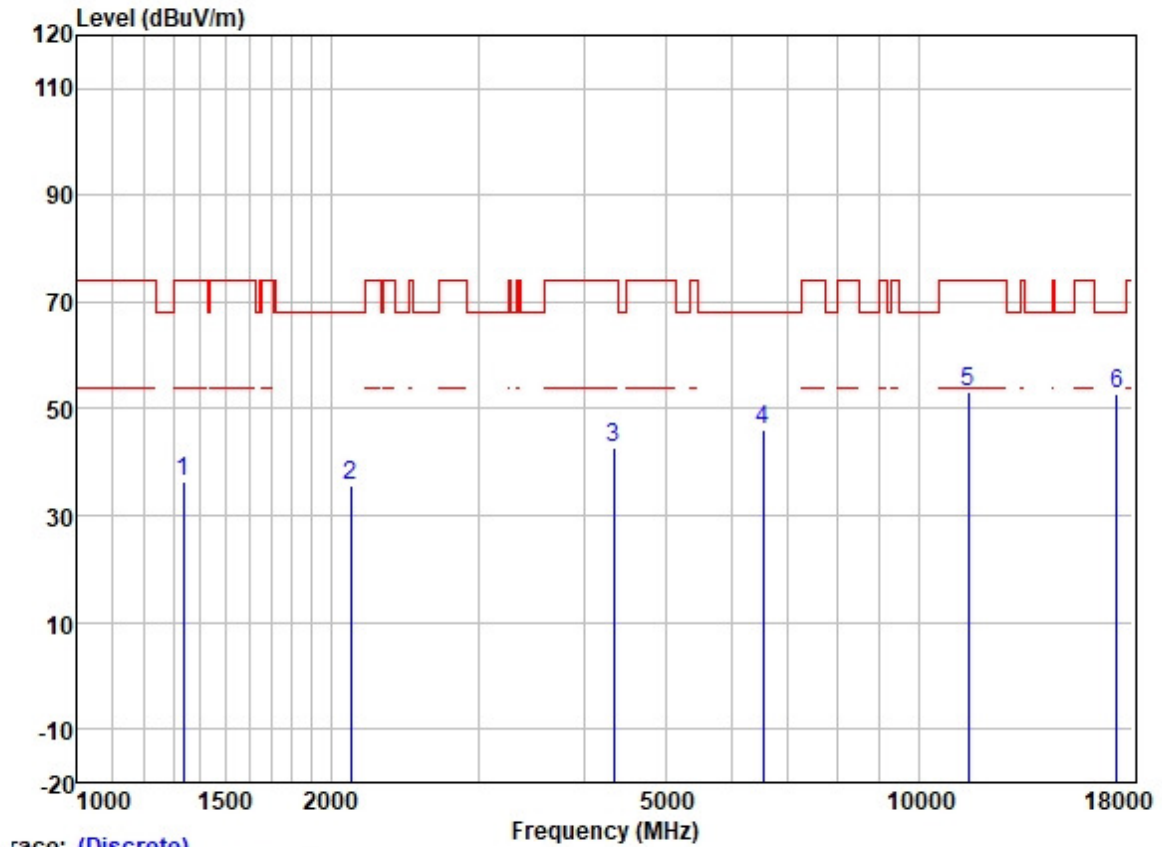

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1338.050 | 46.60 | 25.29 | 2.60 | 38.27 | 36.22 | 74.00 | -37.78 | HORIZONTAL | Peak |
| 2 | 2112.597 | 43.88 | 26.32 | 3.16 | 37.67 | 35.69 | 68.20 | -32.51 | HORIZONTAL | Peak |
| 3 | 4341.933 | 44.20 | 30.57 | 4.67 | 36.81 | 42.63 | 74.00 | -31.37 | HORIZONTAL | Peak |
| 4 | 6537.675 | 43.14 | 34.06 | 5.84 | 37.03 | 46.01 | 68.20 | -22.19 | HORIZONTAL | Peak |
| 5 | 11471.000 | 42.21 | 39.91 | 8.37 | 37.15 | 53.34 | 74.00 | -20.66 | HORIZONTAL | Peak |
| 6 | 17206.500 | 35.51 | 42.79 | 9.92 | 35.33 | 52.89 | 68.20 | -15.31 | HORIZONTAL | Peak |


Test Mode: 30; Polarity: Vertical; Modulation: OFDM; Channel: Low

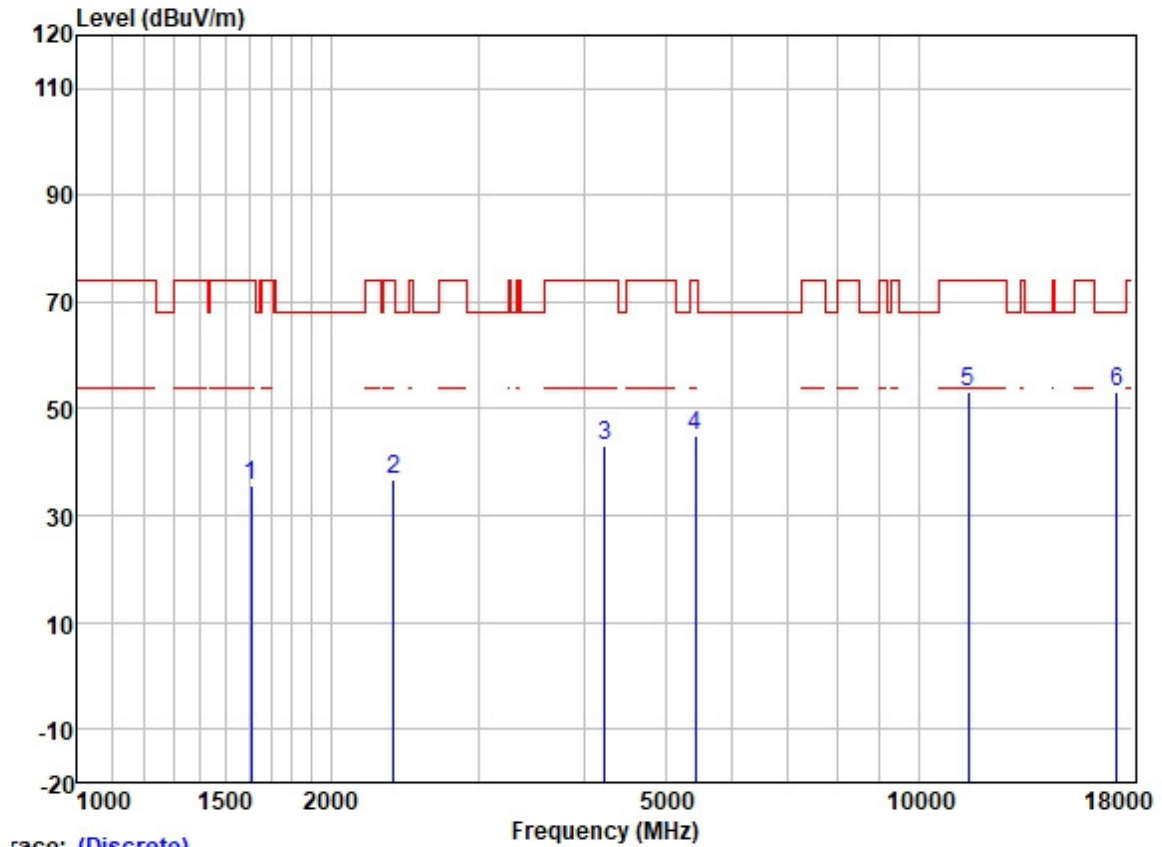

race: (Discrete)

| | Freq | ReadAntenna | Cable | Preamp | | Limit | Over | | | |
|---|-----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
| | MHz | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1608.533 | 45.33 | 25.59 | 2.80 | 37.98 | 35.74 | 74.00 | -38.26 | VERTICAL | Peak |
| 2 | 2376.361 | 43.52 | 27.30 | 3.45 | 37.60 | 36.67 | 74.00 | -37.33 | VERTICAL | Peak |
| 3 | 4232.843 | 45.05 | 30.26 | 4.61 | 36.81 | 43.11 | 74.00 | -30.89 | VERTICAL | Peak |
| 4 | 5427.189 | 43.99 | 31.79 | 6.13 | 36.88 | 45.03 | 74.00 | -28.97 | VERTICAL | Peak |
| 5 | 11471.000 | 42.18 | 39.91 | 8.37 | 37.15 | 53.31 | 74.00 | -20.69 | VERTICAL | Peak |
| 6 | 17206.500 | 35.80 | 42.79 | 9.92 | 35.33 | 53.18 | 68.20 | -15.02 | VERTICAL | Peak |

Test Mode: 30; Polarity: Horizontal; Modulation: OFDM; Channel: middle

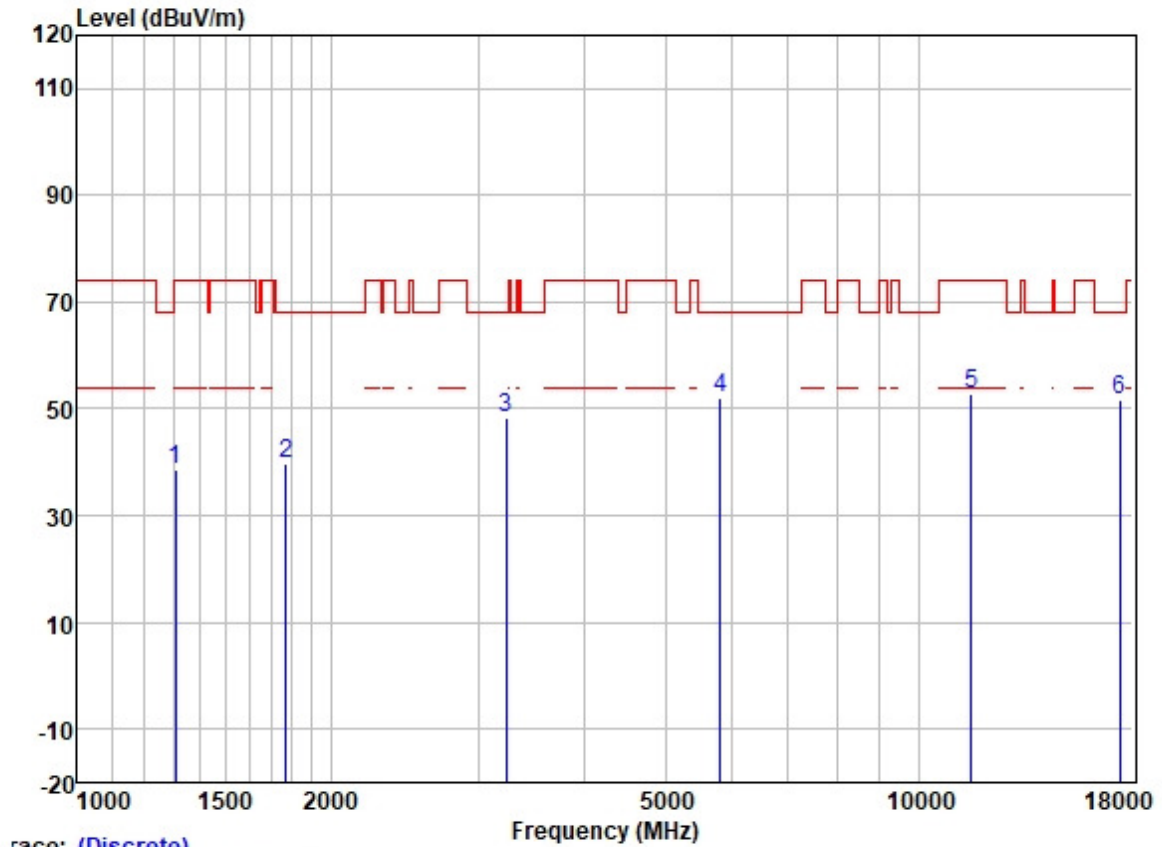

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 1309.033 | 48.94 | 25.22 | 2.60 | 38.31 | 38.45 | 74.00 | -35.55 | HORIZONTAL | Peak |
| 2 | 1769.959 | 48.58 | 25.90 | 2.95 | 37.83 | 39.60 | 68.20 | -28.60 | HORIZONTAL | Peak |
| 3 | 3238.011 | 52.69 | 28.67 | 4.02 | 37.06 | 48.32 | 68.20 | -19.88 | HORIZONTAL | Peak |
| 4 | 5806.184 | 50.78 | 32.21 | 6.07 | 36.89 | 52.17 | 68.20 | -16.03 | HORIZONTAL | Peak |
| 5 | 11573.000 | 41.96 | 39.78 | 8.38 | 37.14 | 52.98 | 74.00 | -21.02 | HORIZONTAL | Peak |
| 6 | 17359.500 | 33.35 | 43.40 | 10.39 | 35.32 | 51.82 | 68.20 | -16.38 | HORIZONTAL | Peak |