

Test Report

Report No.: MTi231212015-01E2

Date of issue: 2024-08-26

Applicant: ALOGIC Corporation Pty Ltd.

Product: Wireless Mouse

Model(s): AMBT4KBK, AMBT4KWH, AMBT4KXX
(XX represents color)

FCC ID: 2ATCA-AMBT4K

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.cn>




Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1	General Description	5
1.1	Description of EUT	5
1.2	Description of test modes	5
1.3	Measurement uncertainty	6
2	Summary of Test Result.....	7
3	Test Facilities and Accreditations	8
3.1	Test laboratory	8
4	Equipment List	9
5	Test Result	11
5.1	Antenna requirement	11
5.2	Conducted Emission at AC power line	12
5.3	Radiated spurious emission	15
5.4	20dB and 99% bandwidth	27
	Photographs of the Test Setup.....	29
	Photographs of the EUT.....	30

Test Result Certification	
Applicant:	ALOGIC Corporation Pty Ltd.
Address:	Level 40, 140 William Street, Melbourne VIC, 3000 Australia
Manufacturer:	ALOGIC Corporation Pty Ltd.
Address:	Level 40, 140 William Street, Melbourne VIC, 3000 Australia
Product description	
Product name:	Wireless Mouse
Trademark:	Alogic
Model name:	AMBT4KBK
Series Model:	AMBT4KWH, AMBT4KXX (XX represents color)
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013
Date of Test	
Date of test:	2024-06-12 to 2024-08-26
Test result:	Pass

Test Engineer	:	
		(Maleah Deng)
Reviewed By	:	
		(David Lee)
Approved By	:	
		(Leon Chen)

1 General Description

1.1 Description of EUT

Product name:	Wireless Mouse
Model name:	AMBT4KBK
Series Model:	AMBT4KWH, AMBT4KXX (XX represents color)
Model difference:	All the models are the same circuit and module, except the model name and color.
Electrical rating:	Input: DC 5V Battery: DC 3.7V,15mA
Hardware version:	SAMouse V01
Software version:	CS:9B73
Accessories:	Wireless Keyboard *1 Input: DC 5V FCC: 2ATCA-ASKBT Dongle *1 Input: DC 5V FCC: 2ATCA-AM4KD Cable*1 USB-A to USB-C cable 105cm
Test sample(s) number:	MTi231212015-01S1001
RF specification:	
Operation frequency:	2405-2470MHz
Modulation type:	GFSK
Antenna designation:	Antenna type: PCB Antenna Antenna gain: 1.6dBi
Max. Field Strength:	67.23dBuV/m

1.2 Description of test modes

No.	Emission test modes
Mode1	TX-GFSK

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	6	2426	11	2450
2	2409	7	2430	12	2455
3	2413	8	2435	13	2460
4	2417	9	2440	14	2465
5	2422	10	2445	15	2470

1.2.2 Test channels

Chanel	Frequency
Lowest	2405MHz
Middle	2430MHz
Highest	2470MHz

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:

For power setting, refer to below table.

Test Software:	BQB Tool-B91 support		
Mode	2405MHz	2430MHz	2470MHz
GFSK	Default	Default	Default

1.2.3 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
Adapter	HW-200200ZP1	/	HUAWEI

1.3 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	15.249(d)	Radiated spurious emissions	Pass
4	15.249(a)	Field Strength of the Fundamental signal	Pass
5	15.215	20dB and 99% Bandwidth	Pass

3 Test Facilities and Accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2024-03-20	2025-03-19
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2024-03-21	2025-03-20
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2024-03-20	2025-03-19
20dB and 99% Bandwidth						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2024-03-20	2025-03-19
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2024-03-21	2025-03-20
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2024-03-21	2025-03-20
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2024-03-21	2025-03-20
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2024-03-21	2025-03-20
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2024-03-21	2025-03-20
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2024-03-20	2025-03-19
9	DC Power Supply	Agilent	E3632A	MY40027695	2024-03-21	2025-03-20
Field Strength of the Fundamental signal Radiated spurious emissions (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-06-17	2025-06-16
3	Amplifier	Agilent	8449B	3008A01120	2024-03-20	2025-03-19
4	MXA signal analyzer	Agilent	N9020A	MY54440859	2024-03-21	2025-03-20
5	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2023-06-17	2025-06-16
7	Pre-amplifier	Space-Dtronic	EWLAN1840 G	210405001	2024-03-21	2025-03-20
Radiated spurious emissions (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2024-03-20	2025-03-19
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2024-03-21	2025-03-20
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2024-03-20	2025-03-19
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2025-03-22
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2024-03-20	2025-03-19

5 Test Result

5.1 Antenna requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of EUT is PCB antenna (Antenna Gain: 1.6 dBi). which is no consideration of replacement.

5.2 Conducted Emission at AC power line

5.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

5.2.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

5.2.3 Test setup

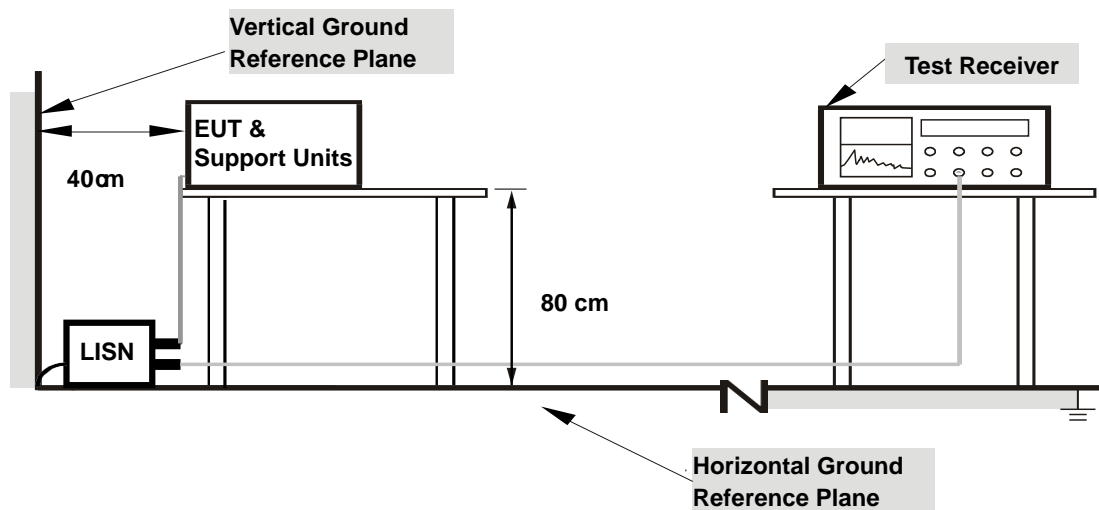

For the actual test configuration, please refer to the related item – Photographs of the test setup.

5.2.4 Test Result

Notes:

All modes of operation of the EUT were investigated, and only the worst-case results are reported.


Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)

Over (dB) = Measurement (dB μ V) – Limit (dB μ V)


5.2.5 Test Data:

Mode1 / Line: Line / CH: H

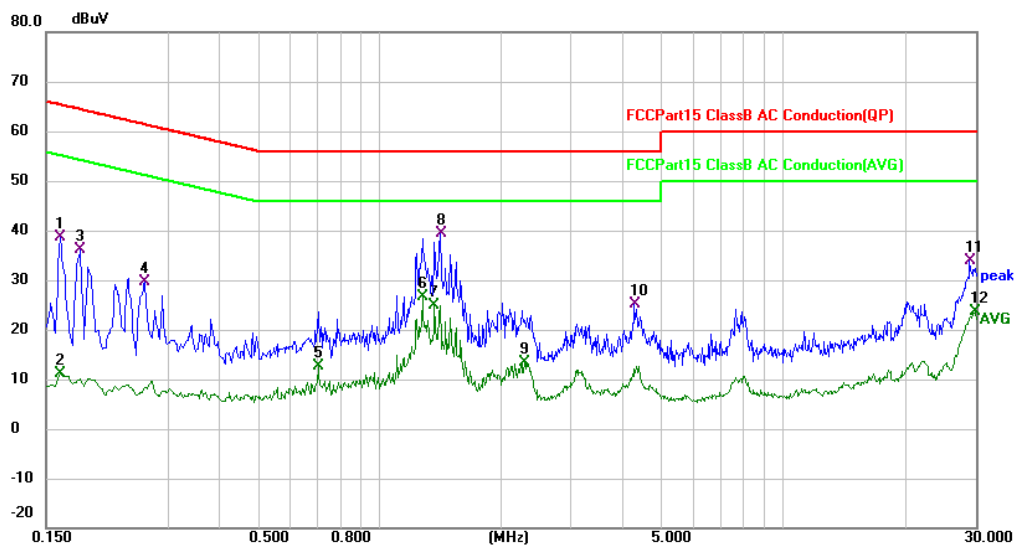

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	28.28	10.38	38.66	65.36	-26.70	QP	
2		0.1620	0.63	10.38	11.01	55.36	-44.35	AVG	
3		0.1819	25.36	10.73	36.09	64.40	-28.31	QP	
4		0.2620	18.59	10.93	29.52	61.37	-31.85	QP	
5		0.7060	0.56	11.98	12.54	46.00	-33.46	AVG	
6		1.2780	13.43	13.18	26.61	46.00	-19.39	AVG	
7		1.3700	11.63	13.37	25.00	46.00	-21.00	AVG	
8	*	1.4140	25.86	13.44	39.30	56.00	-16.70	QP	
9		2.2980	2.76	10.64	13.40	46.00	-32.60	AVG	
10		4.3019	14.40	10.65	25.05	56.00	-30.95	QP	
11		29.0140	22.90	10.98	33.88	60.00	-26.12	QP	
12		29.9700	12.60	10.96	23.56	50.00	-26.44	AVG	

Mode1 / Line: Neutral / CH: H

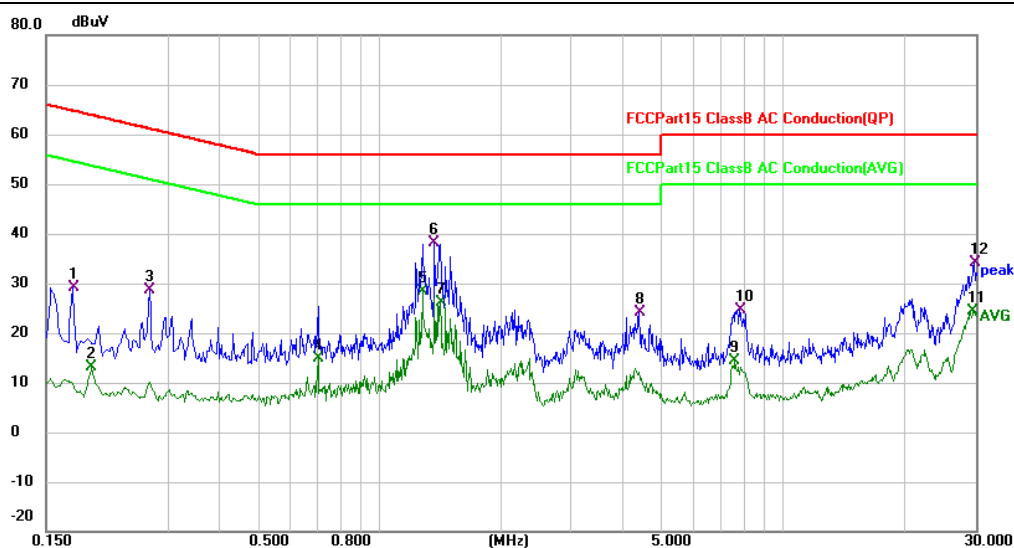

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1740	18.79	10.38	29.17	64.77	-35.60	QP	
2	0.1940	2.30	10.76	13.06	53.86	-40.80	AVG	
3	0.2700	17.73	10.95	28.68	61.12	-32.44	QP	
4	0.7060	3.00	11.98	14.98	46.00	-31.02	AVG	
5 *	1.2780	15.11	13.18	28.29	46.00	-17.71	AVG	
6	1.3700	24.74	13.37	38.11	56.00	-17.89	QP	
7	1.4140	12.61	13.44	26.05	46.00	-19.95	AVG	
8	4.4139	13.49	10.65	24.14	56.00	-31.86	QP	
9	7.6139	3.74	10.71	14.45	50.00	-35.55	AVG	
10	7.8419	13.91	10.72	24.63	60.00	-35.37	QP	
11	29.6140	13.36	10.97	24.33	50.00	-25.67	AVG	
12	29.7140	23.12	10.97	34.09	60.00	-25.91	QP	

5.3 Radiated spurious emission

5.3.1 Limits

FCC PART 15.249(a);

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (μV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

§ 15.209 Radiated emission limits at restricted bands:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

5.3.2 Test setup


Below 30MHz:

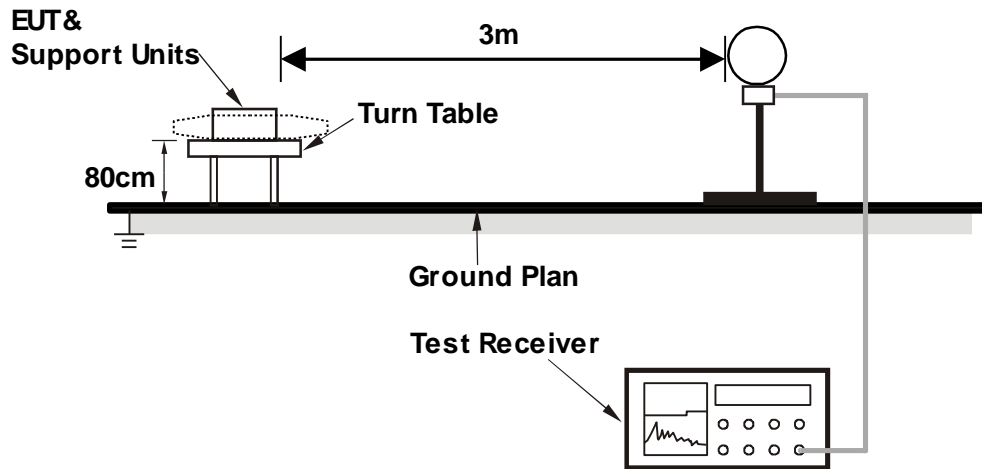

30MHz~1GHz:

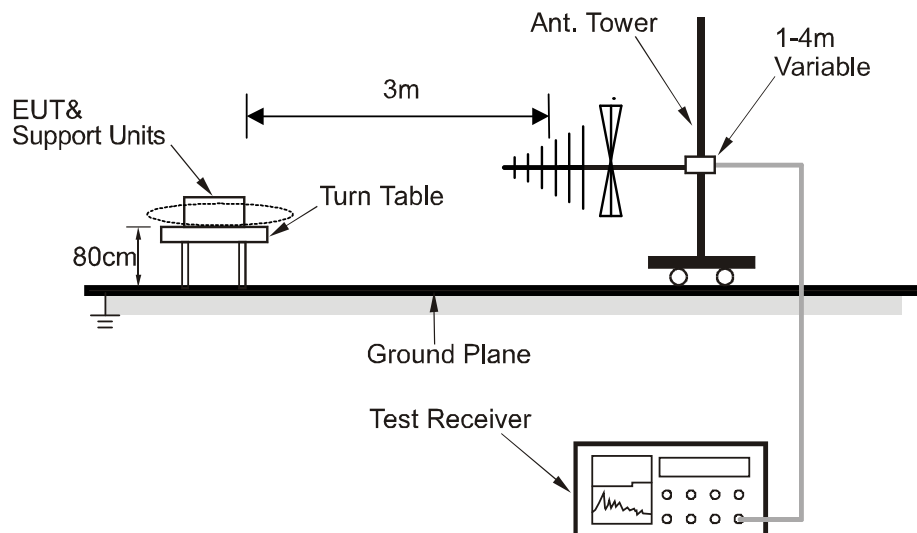

Above 1GHz:

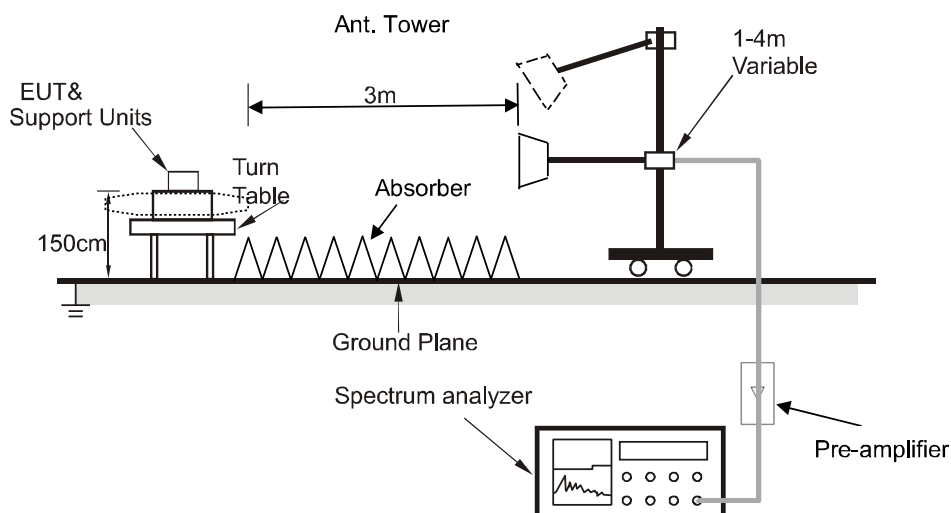

For the actual test configuration, please refer to the related item – Photographs of the test setup.

5.3.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.3, 6.4, 6.5, 6.6, 11.11, 11.12, 11.13.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector

5.3.4 Test results

Notes:

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported.

There were no emissions found below 30MHz within 20dB of the limit.


Calculation formula:

Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)


Radiated emissions between 30MHz – 1GHz

Mode1 / Polarization: Horizontal / CH: H

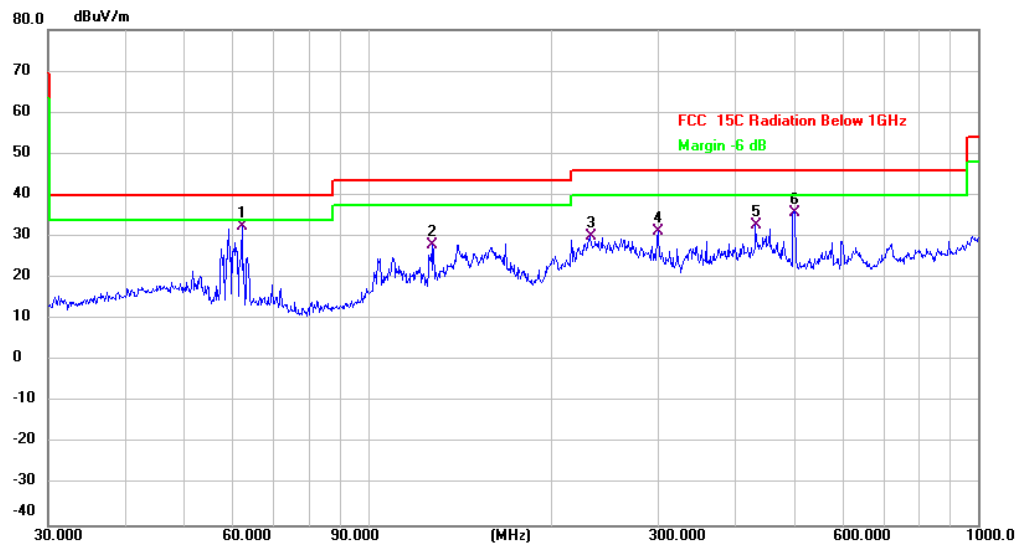

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	62.2128	42.03	-9.58	32.45	40.00	-7.55	QP	
2		127.6645	40.09	-12.05	28.04	43.50	-15.46	QP	
3		231.7179	37.35	-7.28	30.07	46.00	-15.93	QP	
4		299.3158	36.08	-4.72	31.36	46.00	-14.64	QP	
5		432.5457	37.92	-5.13	32.79	46.00	-13.21	QP	
6		499.4247	39.42	-3.52	35.90	46.00	-10.10	QP	

Mode1 / Polarization: Vertical / CH: H

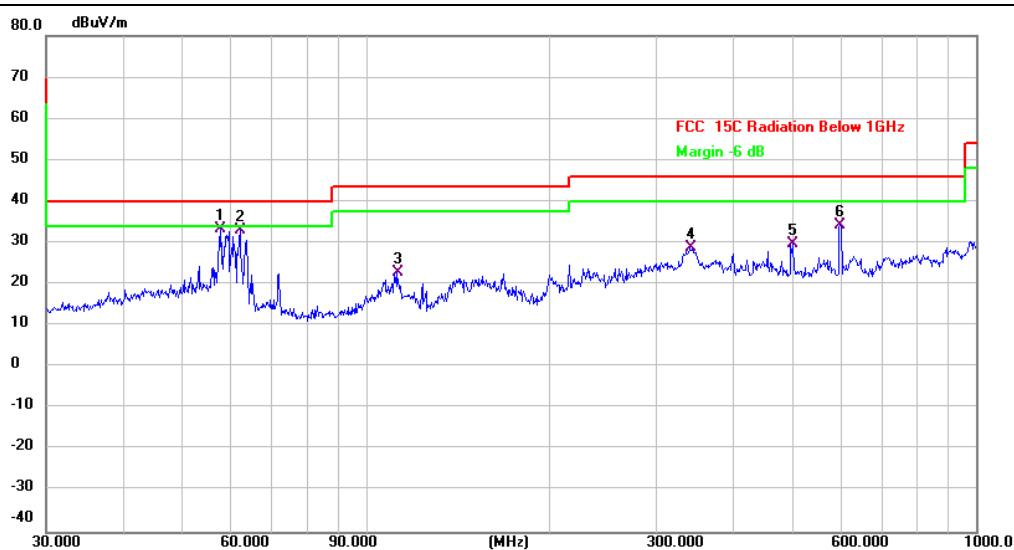

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	57.7962	42.96	-9.64	33.32	40.00	-6.68	QP	
2		62.2128	42.73	-9.58	33.15	40.00	-6.85	QP	
3		112.5244	30.79	-7.88	22.91	43.50	-20.59	QP	
4		340.7817	32.72	-3.86	28.86	46.00	-17.14	QP	
5		501.1790	33.29	-3.47	29.82	46.00	-16.18	QP	
6		599.3212	37.17	-3.05	34.12	46.00	-11.88	QP	

Radiated emissions 1 GHz ~ 25 GHz

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4810.000	43.57	0.53	44.10	74.00	-29.90	peak
2		4810.000	39.62	0.53	40.15	54.00	-13.85	AVG
3		7215.000	42.99	7.82	50.81	74.00	-23.19	peak
4		7215.000	36.57	7.82	44.39	54.00	-9.61	AVG
5		9620.000	45.17	8.89	54.06	74.00	-19.94	peak
6	*	9620.000	39.39	8.89	48.28	54.00	-5.72	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4810.000	43.25	0.53	43.78	74.00	-30.22	peak
2		4810.000	37.63	0.53	38.16	54.00	-15.84	AVG
3		7215.000	42.90	7.82	50.72	74.00	-23.28	peak
4		7215.000	36.44	7.82	44.26	54.00	-9.74	AVG
5		9620.000	44.86	8.89	53.75	74.00	-20.25	peak
6	*	9620.000	39.09	8.89	47.98	54.00	-6.02	AVG

Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4860.000	43.24	0.53	43.77	74.00	-30.23	peak
2		4860.000	37.63	0.53	38.16	54.00	-15.84	AVG
3		7290.000	42.89	7.39	50.28	74.00	-23.72	peak
4		7290.000	36.87	7.39	44.26	54.00	-9.74	AVG
5		9720.000	44.61	9.00	53.61	74.00	-20.39	peak
6	*	9720.000	39.96	9.00	48.96	54.00	-5.04	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4860.000	45.06	0.53	45.59	74.00	-28.41	peak
2		4860.000	39.70	0.53	40.23	54.00	-13.77	AVG
3		7290.000	44.07	7.39	51.46	74.00	-22.54	peak
4		7290.000	37.86	7.39	45.25	54.00	-8.75	AVG
5		9720.000	44.61	9.00	53.61	74.00	-20.39	peak
6	*	9720.000	38.36	9.00	47.36	54.00	-6.64	AVG

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4940.000	45.30	0.59	45.89	74.00	-28.11	peak
2		4940.000	39.64	0.59	40.23	54.00	-13.77	AVG
3		7410.000	45.39	7.97	53.36	74.00	-20.64	peak
4	*	7410.000	39.42	7.97	47.39	54.00	-6.61	AVG
5		9880.000	43.97	9.39	53.36	74.00	-20.64	peak
6		9880.000	36.90	9.39	46.29	54.00	-7.71	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4940.000	43.19	0.59	43.78	74.00	-30.22	peak
2		4940.000	37.66	0.59	38.25	54.00	-15.75	AVG
3		7410.000	43.33	7.97	51.30	74.00	-22.70	peak
4		7410.000	38.29	7.97	46.26	54.00	-7.74	AVG
5		9880.000	44.30	9.39	53.69	74.00	-20.31	peak
6	*	9880.000	37.87	9.39	47.26	54.00	-6.74	AVG

Radiated emissions at band edge

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	48.87	-4.83	44.04	74.00	-29.96	peak
2		2310.000	38.22	-4.83	33.39	54.00	-20.61	AVG
3		2390.000	48.51	-4.31	44.20	74.00	-29.80	peak
4	*	2390.000	38.26	-4.31	33.95	54.00	-20.05	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	48.57	-4.83	43.74	74.00	-30.26	peak
2		2310.000	38.02	-4.83	33.19	54.00	-20.81	AVG
3		2390.000	49.11	-4.31	44.80	74.00	-29.20	peak
4	*	2390.000	38.30	-4.31	33.99	54.00	-20.01	AVG

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.86	-4.21	44.65	74.00	-29.35	peak
2		2483.500	38.15	-4.21	33.94	54.00	-20.06	AVG
3		2500.000	48.61	-4.10	44.51	74.00	-29.49	peak
4	*	2500.000	38.28	-4.10	34.18	54.00	-19.82	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.90	-4.21	43.69	74.00	-30.31	peak
2		2483.500	38.01	-4.21	33.80	54.00	-20.20	AVG
3		2500.000	48.10	-4.10	44.00	74.00	-30.00	peak
4	*	2500.000	38.18	-4.10	34.08	54.00	-19.92	AVG

5.3.5 Band edge–Field strength of fundamental

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dB μ V/m	dB μ V/m		
2405	H	67.23	114	Peak	Pass
2405	H	66.62	94	AVG	Pass
2405	V	54.13	114	Peak	Pass
2405	V	51.16	94	AVG	Pass

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dB μ V/m	dB μ V/m		
2430	H	66.13	114	Peak	Pass
2430	H	61.82	94	AVG	Pass
2430	V	54.06	114	Peak	Pass
2430	V	48.11	94	AVG	Pass

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dB μ V/m	dB μ V/m		
2470	H	64.04	114	Peak	Pass
2470	H	59.64	94	AVG	Pass
2470	V	54.62	114	Peak	Pass
2470	V	48.13	94	AVG	Pass


5.4 20dB and 99% bandwidth

5.4.1 Limits

FCC §15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.4.2 Test setup



5.4.3 Test procedures

Use the following spectrum analyzer settings:

For 20 dB bandwidth

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = 1% to 5% of the 20 dB bandwidth

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission

5.4.4 Test results


Test channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
CH1	2405	2.215	2.1007
CH7	2430	2.226	2.1075
CH15	2470	2.226	2.1326

20dB occupied bandwidth


CH1

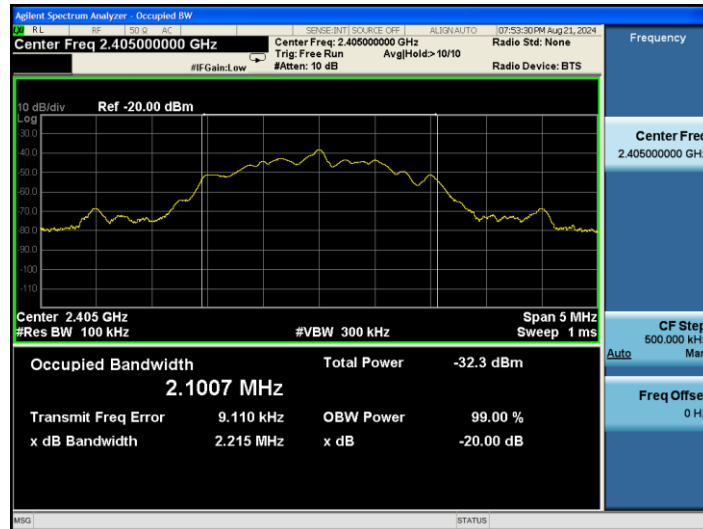

CH7

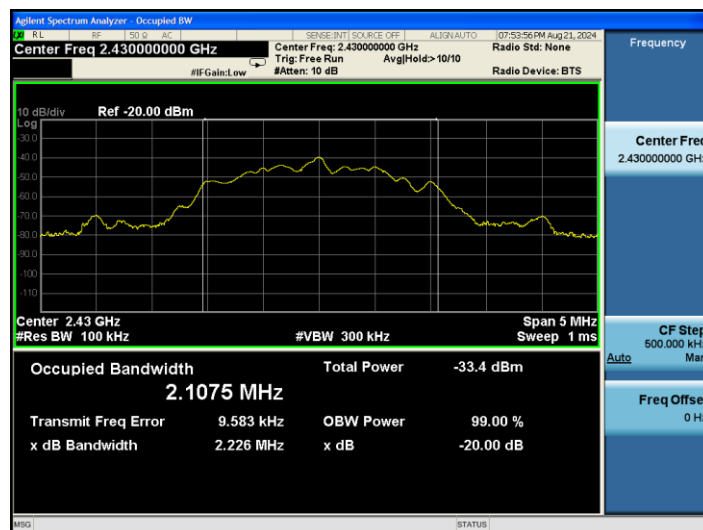

CH15

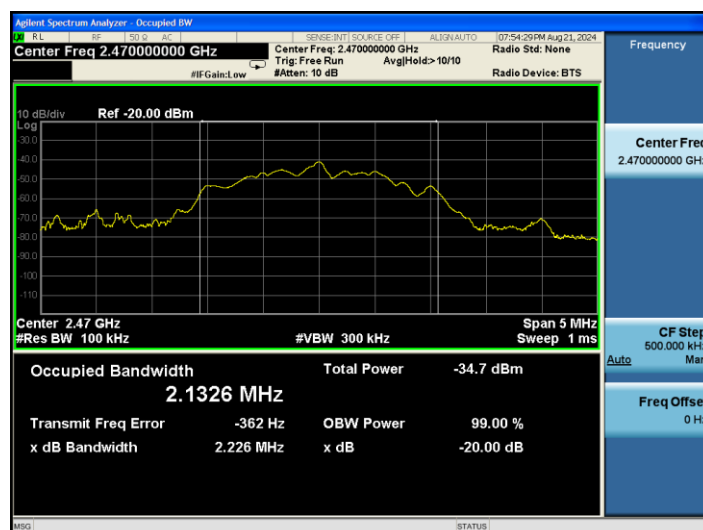

Photographs of the Test Setup

See the appendix – Test Setup Photos.

Photographs of the EUT

See the appendix - EUT Photos.

----End of Report----