Photo of the EUT

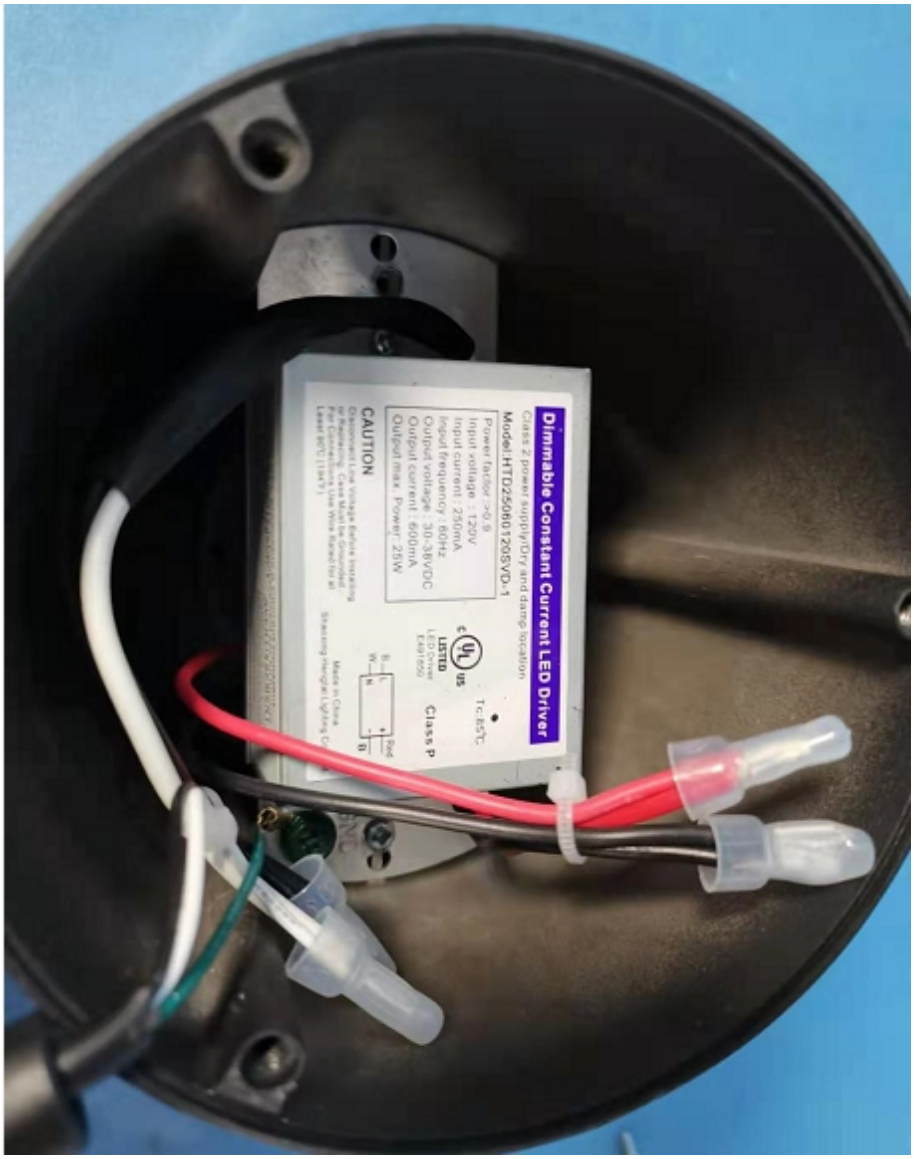

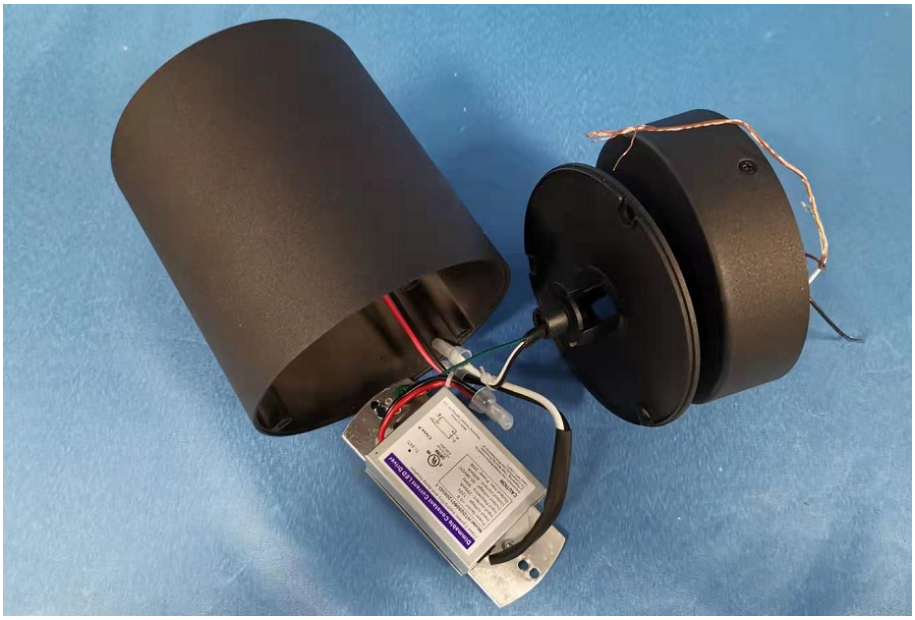

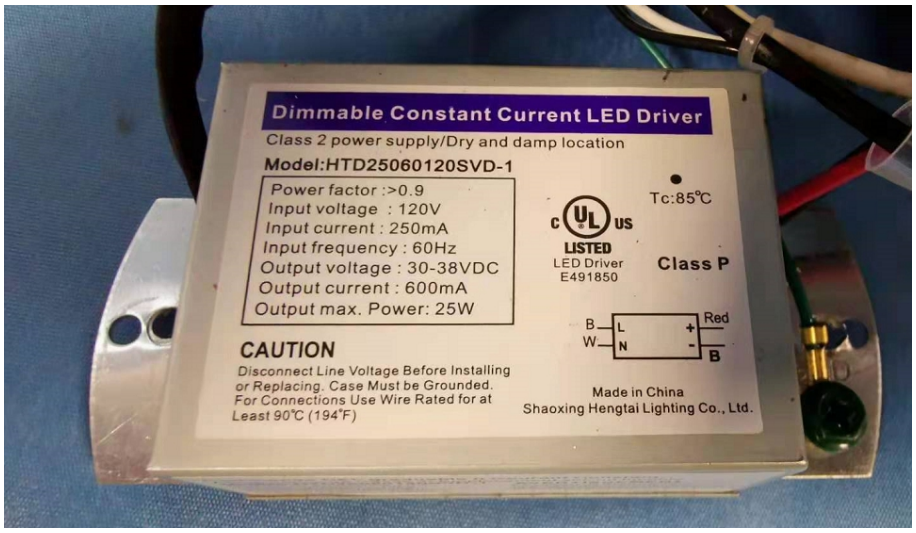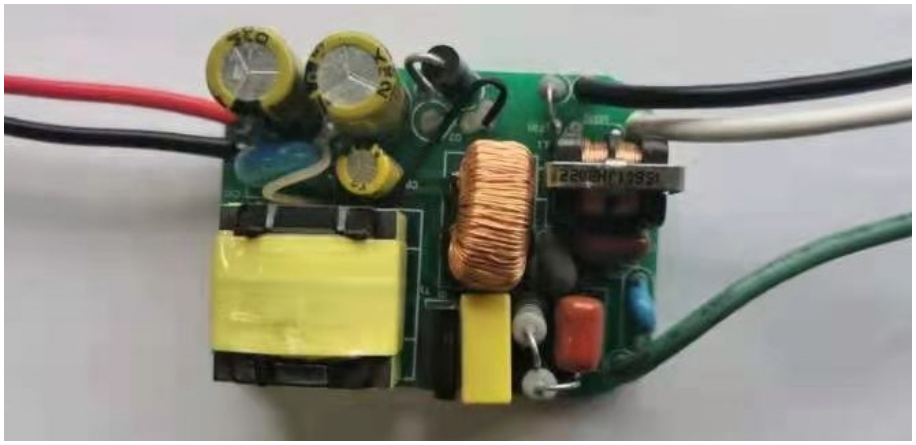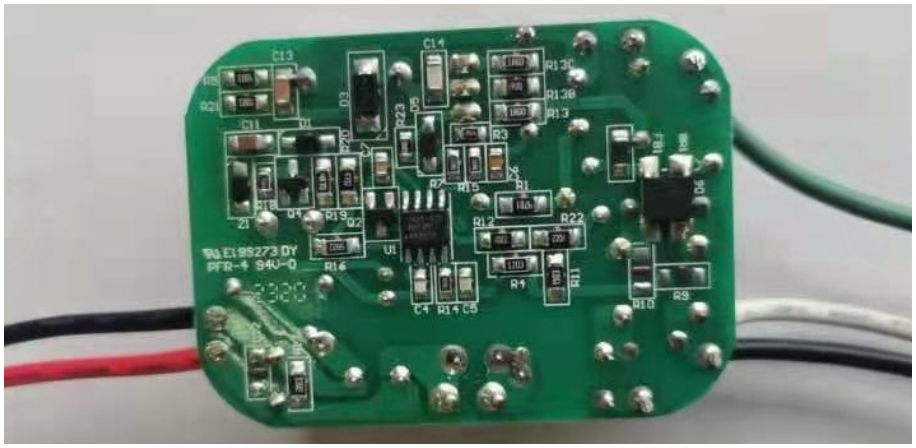
Dimmable Constant Current LED Driver
Class 2 power supply/Dry and damp location
Model:HTD25060120SVD-1
Power factor :>0.9
Input voltage : 120V
Input current : 250mA
Input frequency : 60Hz
Output voltage : 30-38VDC
Output current : 600mA
Output max. Power: 25W
Tc:85°C
LISTED
LED Driver
E491850
Class P
B
W
L
N
Red
B
CAUTION
Disconnect Line Voltage Before Installing or Replacing. Case Must be Grounded. For Connections Use Wire Rated for at Least 90°C (194°F)
Made in China
Shaoxing Hengtai Lighting Co., Ltd.