

FCC Radio Test Report


FCC ID: E2K-APL260AE


This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1410025
Equipment : Access Point
Model Name : APL26-0AE
Applicant : Dell Inc.
Address : One Dell Way Round Rock, Texas 78682 United States

Date of Receipt : Oct. 17, 2014
Date of Test : Oct. 17, 2014 ~ Nov. 19, 2014
Issued Date : Nov. 20, 2014
Tested by : BTL Inc.

Testing Engineer : 
(Josh Lin)

Technical Manager : 
(Jeff Yang)

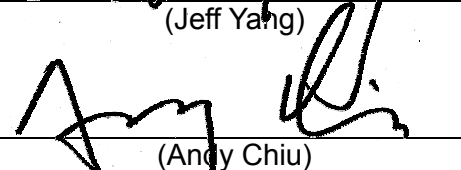Authorized Signatory : 
(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	13
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	15
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
3.5 DESCRIPTION OF SUPPORT UNITS	17
4 . EMC EMISSION TEST	18
4.1 CONDUCTED EMISSION MEASUREMENT	18
4.1.1 POWER LINE CONDUCTED EMISSION	18
4.1.2 TEST PROCEDURE	18
4.1.3 DEVIATION FROM TEST STANDARD	18
4.1.4 TEST SETUP	19
4.1.5 EUT OPERATING CONDITIONS	19
4.1.6 EUT TEST CONDITIONS	19
4.1.7 TEST RESULTS	19
4.2 RADIATED EMISSION MEASUREMENT	20
4.2.1 RADIATED EMISSION LIMITS	20
4.2.2 TEST PROCEDURE	21
4.2.3 DEVIATION FROM TEST STANDARD	21
4.2.4 TEST SETUP	21
4.2.5 EUT OPERATING CONDITIONS	22
4.2.6 EUT TEST CONDITIONS	22
4.2.7 TEST RESULTS (9K TO 30MHz)	23
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	23
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	23
5 . 26dB SPECTRUM BANDWIDTH	24
5.1 APPLIED PROCEDURES / LIMIT	24
5.1.1 TEST PROCEDURE	24
5.1.2 DEVIATION FROM STANDARD	24
5.1.3 TEST SETUP	24
5.1.4 EUT OPERATION CONDITIONS	24
5.1.5 EUT TEST CONDITIONS	25
5.1.6 TEST RESULTS	25
6 . MAXIMUM CONDUCTED OUTPUT POWER	26

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	26
6.1.1 TEST PROCEDURE	26
6.1.2 DEVIATION FROM STANDARD	27
6.1.3 TEST SETUP	27
6.1.4 EUT OPERATION CONDITIONS	27
6.1.5 EUT TEST CONDITIONS	27
6.1.6 TEST RESULTS	27
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	28
7.1 APPLIED PROCEDURES / LIMIT	28
7.1.1 TEST PROCEDURE	28
7.1.2 DEVIATION FROM STANDARD	28
7.1.3 TEST SETUP	28
7.1.4 EUT OPERATION CONDITIONS	28
7.1.5 EUT TEST CONDITIONS	28
7.1.6 TEST RESULTS	28
8 . POWER SPECTRAL DENSITY TEST	29
8.1 APPLIED PROCEDURES / LIMIT	29
8.1.1 TEST PROCEDURE	29
8.1.1 DEVIATION FROM STANDARD	30
8.1.2 TEST SETUP	30
8.1.3 EUT OPERATION CONDITIONS	30
8.1.4 EUT TEST CONDITIONS	30
8.1.5 TEST RESULTS	30
9 . FREQUENCY STABILITY MEASUREMENT	31
9.1 APPLIED PROCEDURES / LIMIT	31
9.1.1 TEST PROCEDURE	31
9.1.2 DEVIATION FROM STANDARD	31
9.1.3 TEST SETUP	32
9.1.4 EUT OPERATION CONDITIONS	32
9.1.5 EUT TEST CONDITIONS	32
9.1.6 TEST RESULTS	32
10 . MEASUREMENT INSTRUMENTS LIST	33
11 . EUT TEST PHOTOS	35
ATTACHMENT A - CONDUCTED EMISSION	44
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	49
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	53
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	60
ATTACHMENT E - BANDWIDTH	179

Table of Contents**Page**

ATTACHMENT F - MAXIMUM OUTPUT POWER	202
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	215
ATTACHMENT H - POWER SPECTRAL DENSITY	252
ATTACHMENT I - FREQUENCY STABILITY	331

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1410025	Original Issue.	Nov. 20, 2014

1. CERTIFICATION

Equipment : Access Point
Brand Name : DELL
Model Name : APL26-0AE
Applicant : Dell Inc.
Date of Test : Oct. 17, 2014 ~ Nov. 19, 2014
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.4: 2009
FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2- 1410025) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

(2) FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C02: 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Below 1 GHz):

CB08: 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted emission test:

Test Site	Measurement Frequency Range	U,(dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

B. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
	Vertical Polarization		30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

If U_{lab} is less than or equal to U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Access Point	
Brand Name	DELL	
Model Name	APL26-0AE	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	450Mbps
	Output Power (Max.)for UNII-1	802.11a: 19.93dBm 802.11n (20M): 20.56dBm 802.11n (40M): 19.15dBm 802.11ac (20M): 18.34dBm 802.11ac (40M): 17.57dBm 802.11ac (80M): 16.31dBm
	Output Power (Max.)for UNII-3	802.11a: 20.15dBm 802.11n (20M): 20.59dBm 802.11n (40M): 20.38dBm 802.11ac (20M): 18.27dBm 802.11ac (40M): 18.34dBm 802.11ac (80M): 19.32dBm
Power Source	#1 DC voltage supplied from AC/DC adapter. #2 Supplied from PoE.	
Power Rating	#1 (1) AMIGO, AMS117-1202000F2 I/P: AC 100-240V~50/60Hz 0.8A Max / O/P: DC 12V 2.0A (2) SUNNY COMPUTER TECHNOLOGY CO., LTD. SYS1544-2412-T3 I/P: AC 100-240V~1.0A MAX 50-60Hz / O/P: DC +12V 2.0A #2 DC 48V	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List:

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel I	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Part NO.	Antenna Type	Connector	Gain (dBi)	Note
4		C147-510905B	Dipole	Reversed TNC	5.89	TX/RX
5		C147-510905B	Dipole	Reversed TNC	5.89	TX/RX
6		C147-510905B	Dipole	Reversed TNC	5.89	TX/RX

- (1) Note: The EUT incorporates a MIMO function. Physically, the EUT provides three completed three transmitters and three receivers (3T3R)..All transmit signals are completely uncorrelated, then, Direction gain = G_{ANT} , that is Directional gain=5.89.

4.

Operating Mode TX Mode	3TX
802.11a	V (ANT 1 + ANT 2+ANT 3)
802.11n (20MHz)	V (ANT 1 + ANT 2+ANT 3)
802.11n (40MHz)	V (ANT 1 + ANT 2+ANT 3)
802.11ac (20MHz)	V (ANT 1 + ANT 2+ANT 3)
802.11ac (40MHz)	V (ANT 1 + ANT 2+ANT 3)
802.11ac (80MHz)	V (ANT 1 + ANT 2+ANT 3)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC80 Mode / CH155 (UNII-3)
Mode 13	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 13	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC80 Mode / CH155 (UNII-3)

Note: For Radiated Below 1G test, the 802.11a mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product


UNII-1			
Test Software Version	RT		
Frequency (MHz)	5180	5200	5240
A Mode	15.5	15.5	15.5
N20 Mode	16	16	16
Frequency (MHz)	5190	5230	
N40 Mode	15	16.5	

UNII-3			
Test Software Version	ART		
Frequency (MHz)	5745	5785	5825
A Mode	16.5	17	17.5
N20 Mode	17	17.5	18
Frequency (MHz)	5755	5795	
N40 Mode	17.5	18	

UNII-1			
Test Software Version	ART		
Frequency (MHz)	5180	5200	5240
AC20 Mode	14	14	14
Frequency (MHz)	5190	5230	
AC40 Mode	13	15	
Frequency (MHz)	5210		
AC80 Mode	14		

UNII-3			
Test Software Version	ART		
Frequency (MHz)	5745	5785	5825
AC20 Mode	15	15	15.5
Frequency (MHz)	5755	5795	
AC40 Mode	16	16	
Frequency (MHz)	5775		
AC80 Mode	17.5		

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

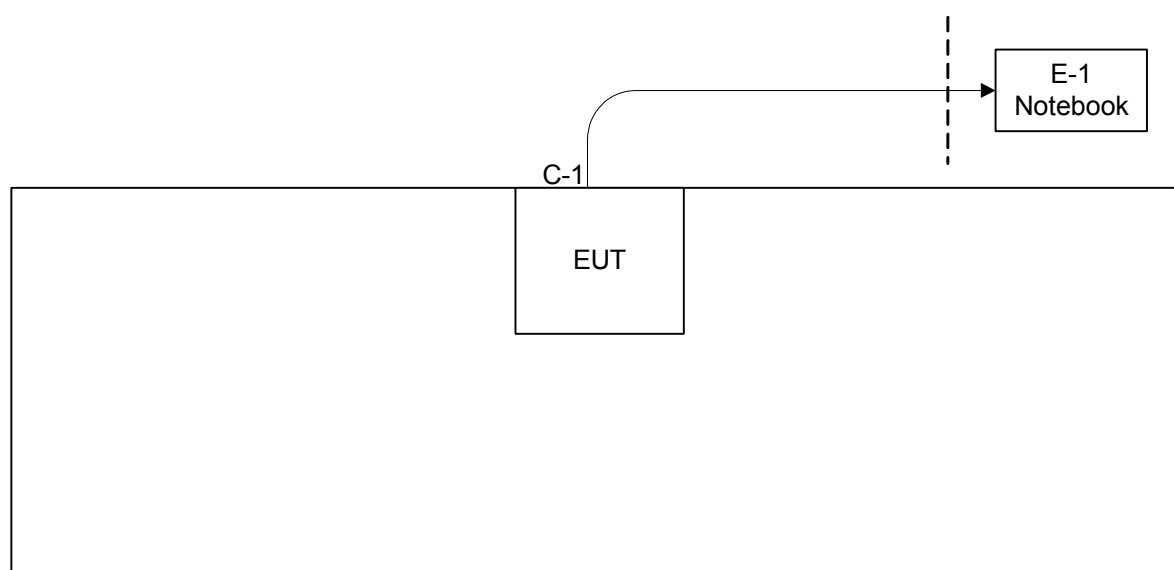

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
E-1	Notebook PC	DELL	PP18L	DOC	PF329 A01	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10m	RJ-45 Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

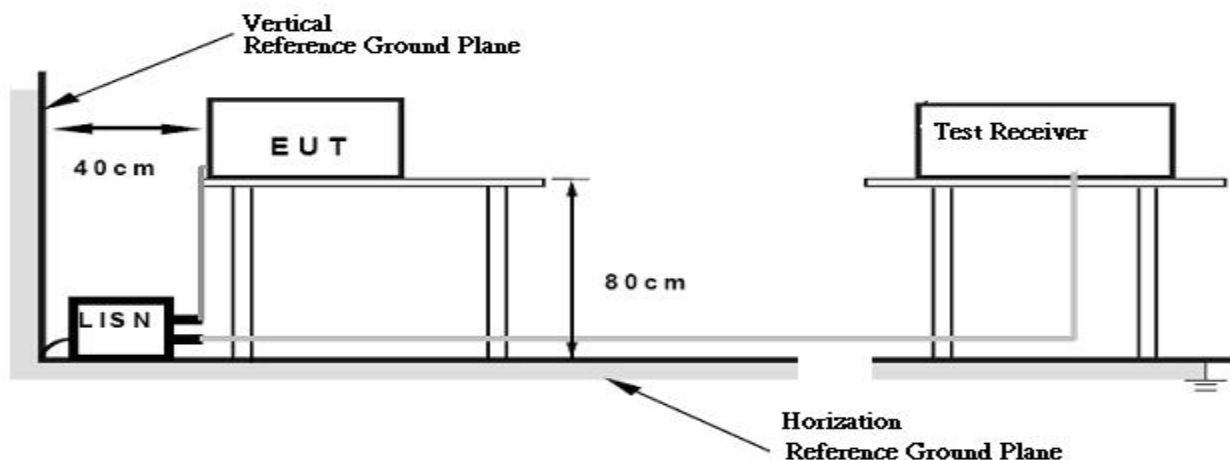

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note 』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5725-5850	-27 (beyond 10MHz of the band edge)	68.3
	-17 (within 10 MHz of band edge)	78.3

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)

4.2.2 TEST PROCEDURE


- The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 - 1000MHz

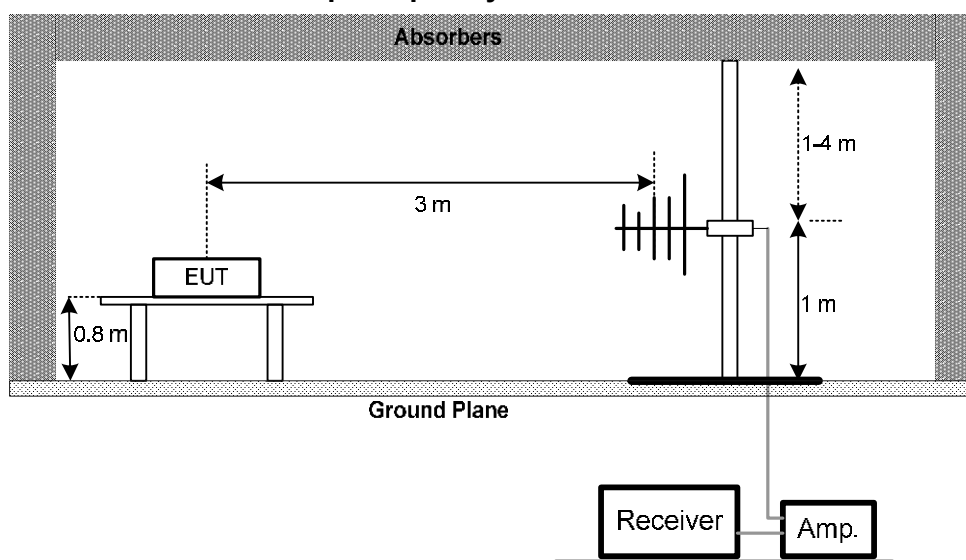

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

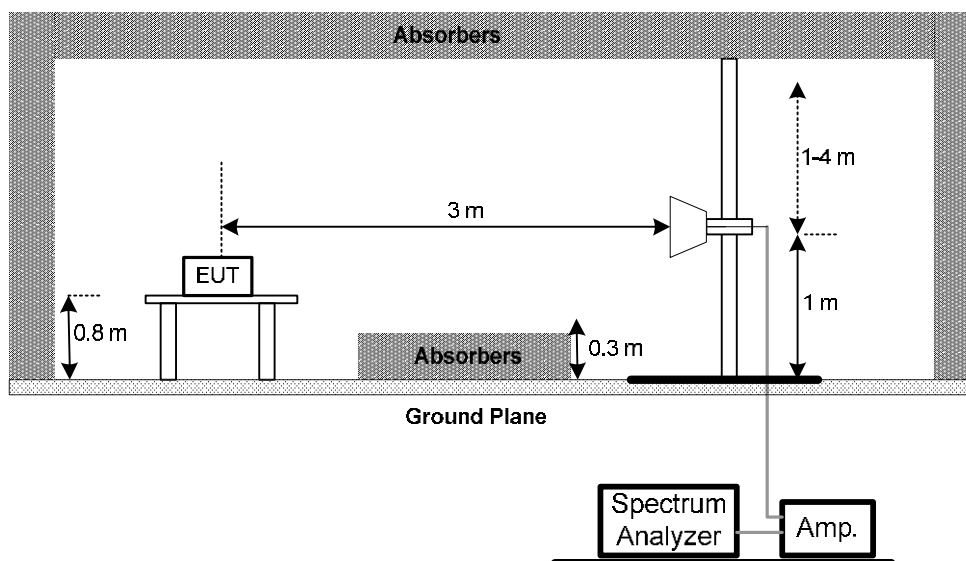

(C) Radiated emissions below 30MHz

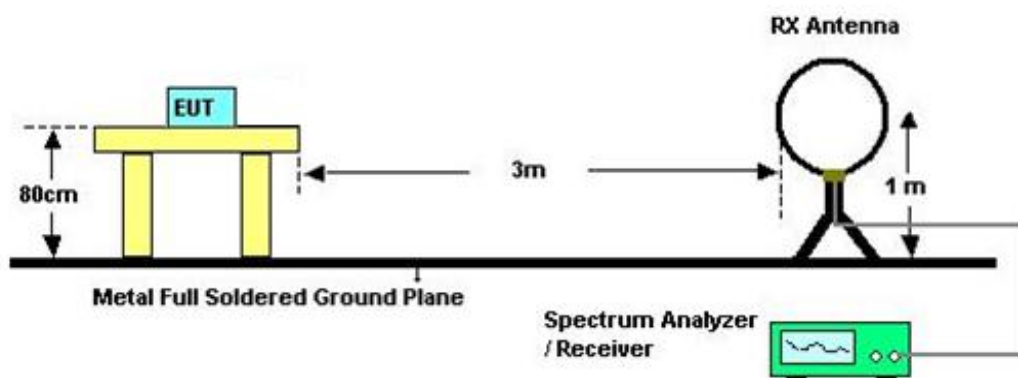

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW=120KHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Spectrum Setting: 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (7) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (8) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	26 dB Bandwidth	5150-5250	PASS
	Minimum 500KHz 6dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Conducted Output Power	Fixed:1 Watt (30dBm)	5150-5250	PASS
	Mobile and portable: 250mW (24dBm)		
	1 Watt (30dBm)	5725-5850	PASS

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	$\geq$ 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27dBm/MHz	5150-5250	PASS
	Below -17dBm/MHz within 10MHz of band edge, below -27dBm/MHz beyond 10MHz of the band edge	5725-5850	PASS

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
RBW	1000kHz
VBW	1000kHz
Trace	Max Hold
Sweep Time	Auto

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250	PASS
	30dBm/500KHz	5725-5850	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

8.1.1 DEVIATION FROM STANDARD

No deviation.

8.1.2 TEST SETUP



8.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.4 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.5 TEST RESULTS

Please refer to the Attachment H.

9. FREQUENCY STABILITY MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	Specified in the user's manual	5150-5250	PASS
		5725-5850	PASS

9.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is 0°C~50°C.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP

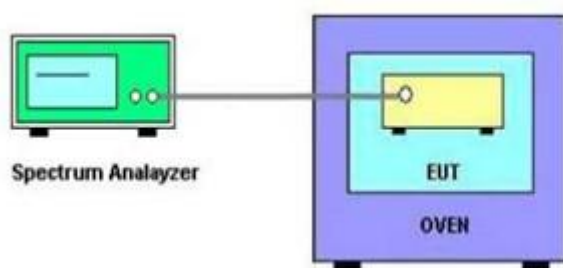

9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

9.1.6 TEST RESULTS

Please refer to the Attachment I.

10. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	100087	Nov. 23, 2014
2	Test Cable	TIMES	CFD300-NL	C01	Jun. 15, 2015
3	EMI Test Receiver	R&S	ESCI	100082	Apr. 13, 2015
4	Measurement Software	EZ	EZ EMC (Version NB-02A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 14, 2015
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 15, 2015
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 12, 2015
5	Microflex Cable	EMC	S104-SMA	8m	May. 12, 2015
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 12, 2015
7	Test Cable	LMR	LMR-400	12m	May. 13, 2015
8	Test Cable	LMR	LMR-400	3m	May. 13, 2015
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 17, 2015
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	July. 10, 2015
11	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 17, 2015
12	Horn Antenna	Schwarzbeck	BBHA 9170	340	Nov. 13, 2015

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Aug. 08, 2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Aug. 08, 2014

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

11. EUT TEST PHOTOS


Conducted Measurement Photos AMIGO, AMS117-1202000F2

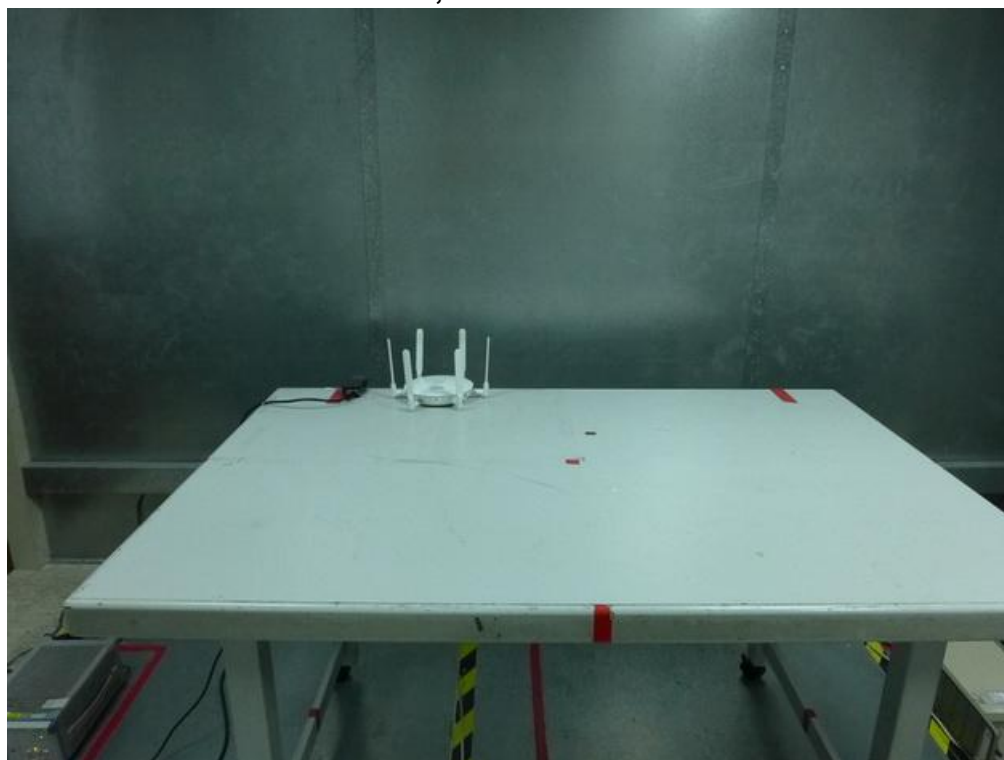

Conducted Measurement Photos**SUNNY, SYS1544-2412-T3**


Radiated Measurement Photos

9kHz to 30MHz- AMIGO, AMS117-1202000F2

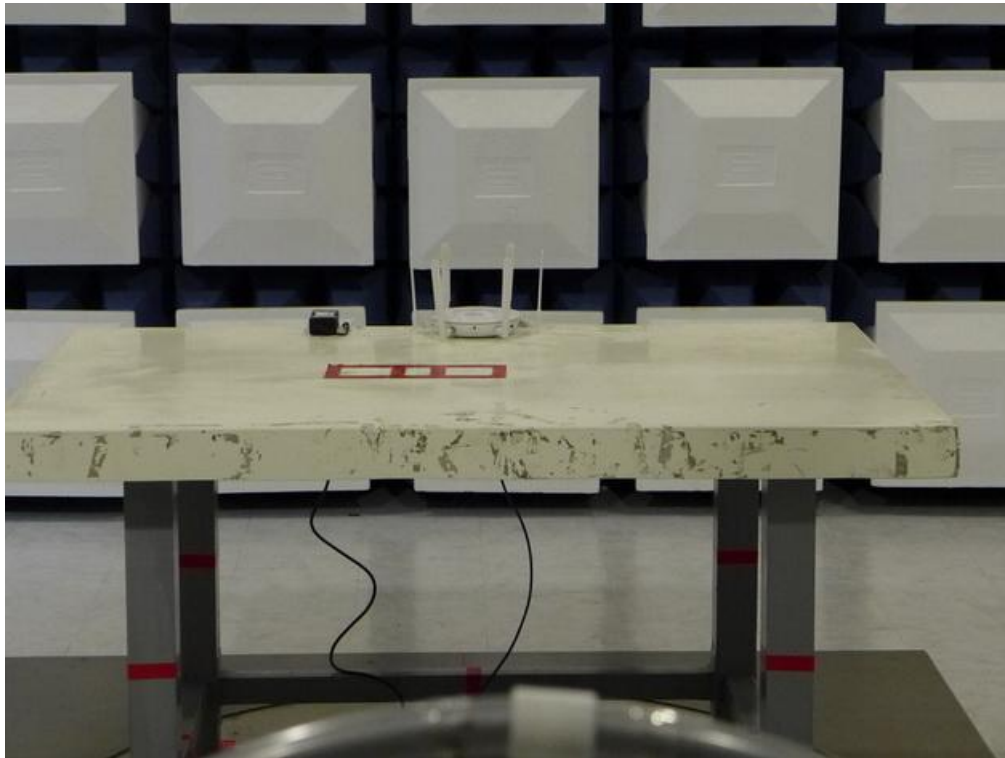



Radiated Measurement Photos

9kHz to 30MHz- SUNNY, SYS1544-2412-T3

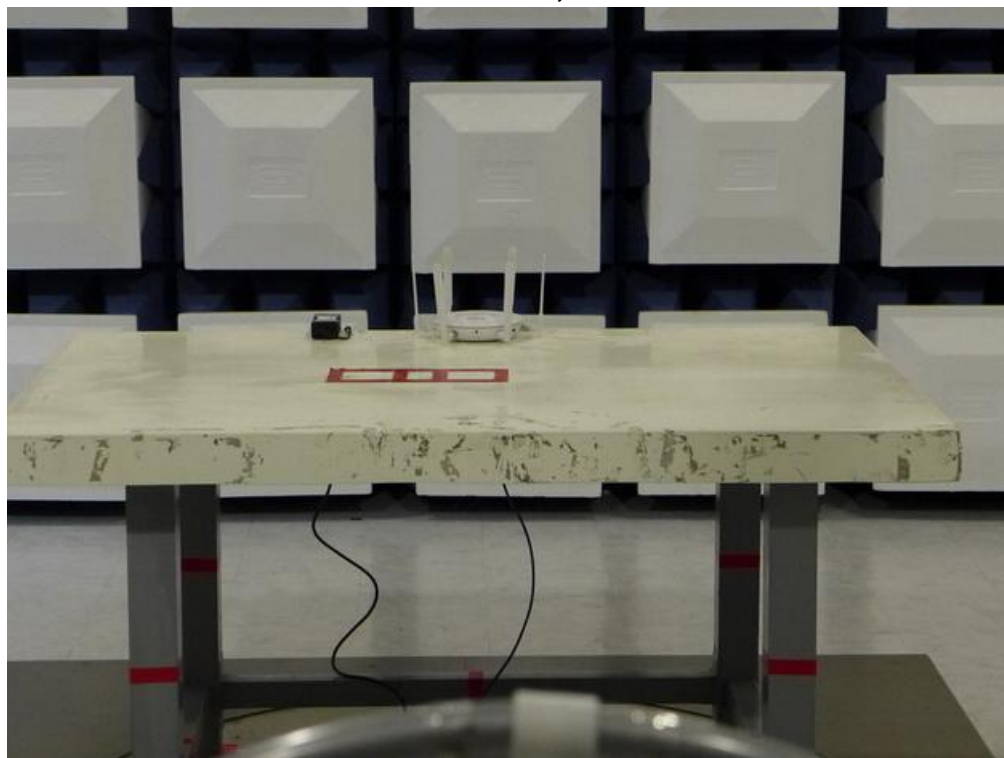



Radiated Measurement Photos

9kHz to 30MHz- PoE

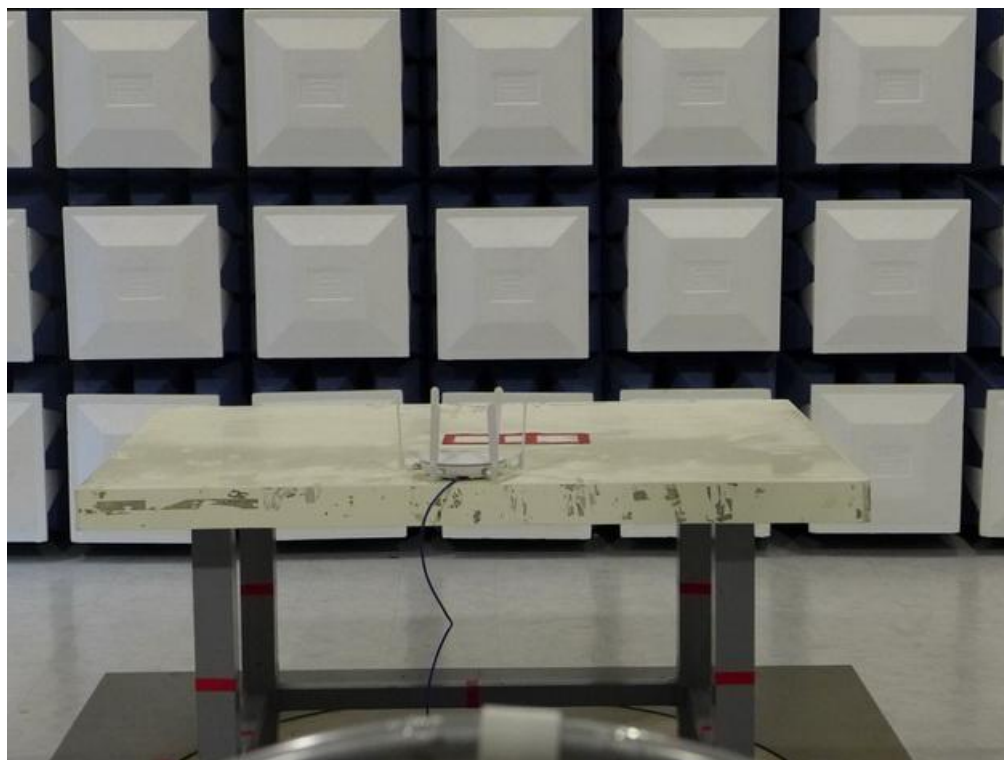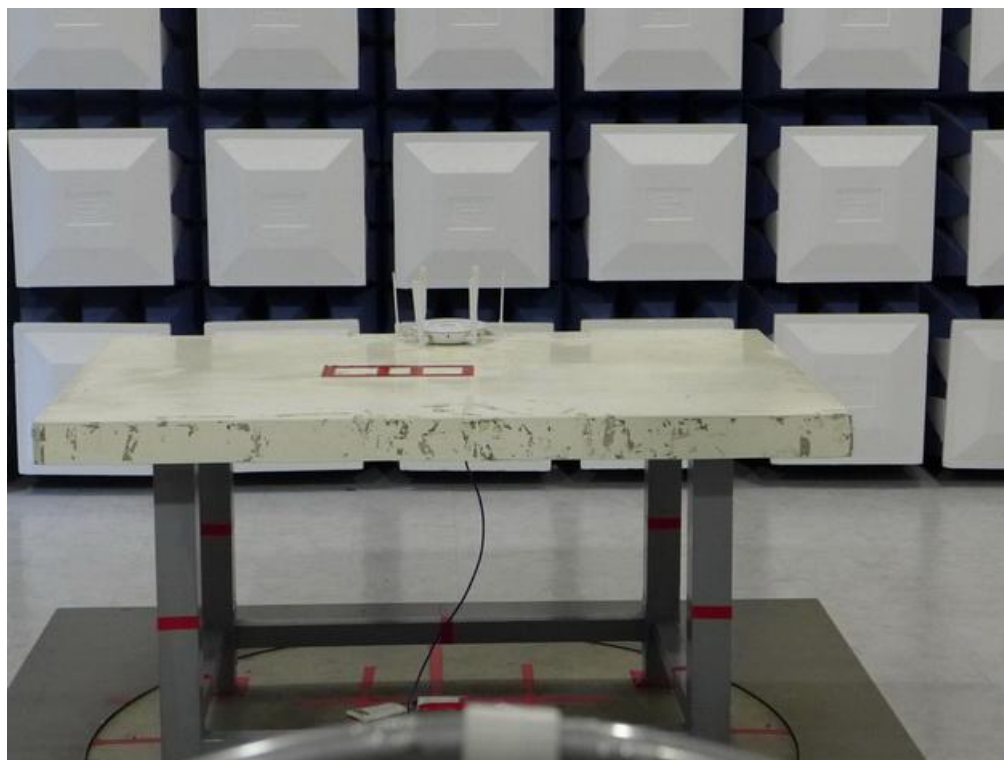



Radiated Measurement Photos

30MHz to 1000MHz- AMIGO, AMS117-1202000F2

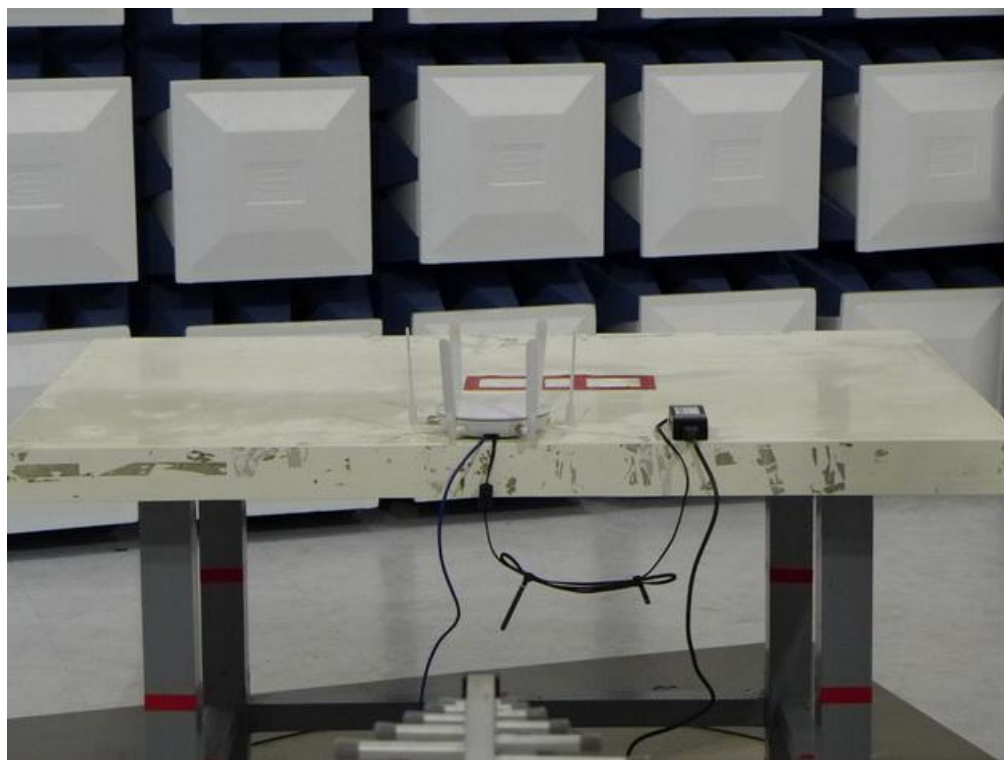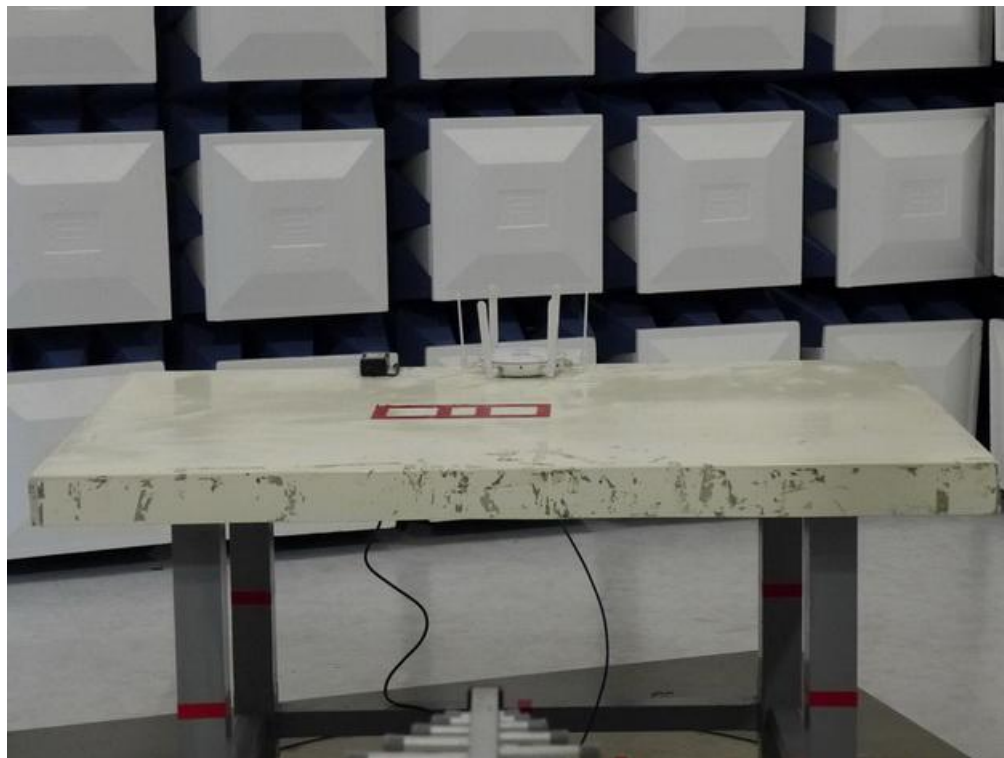



Radiated Measurement Photos

30MHz to 1000MHz- SUNNY, SYS1544-2412-T3

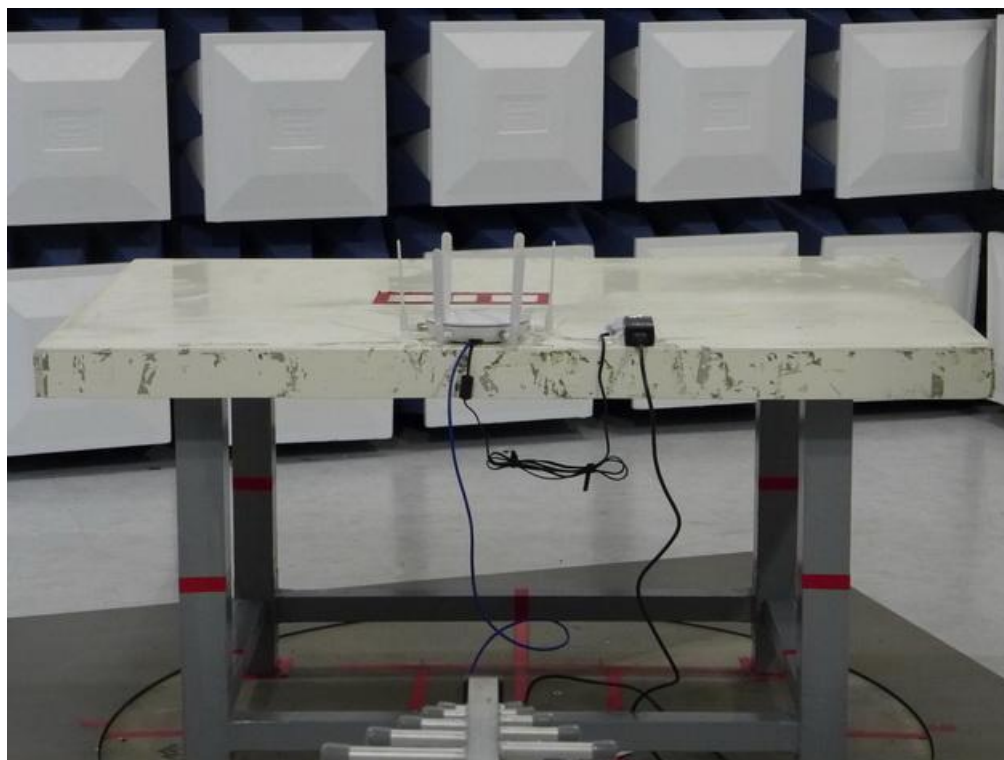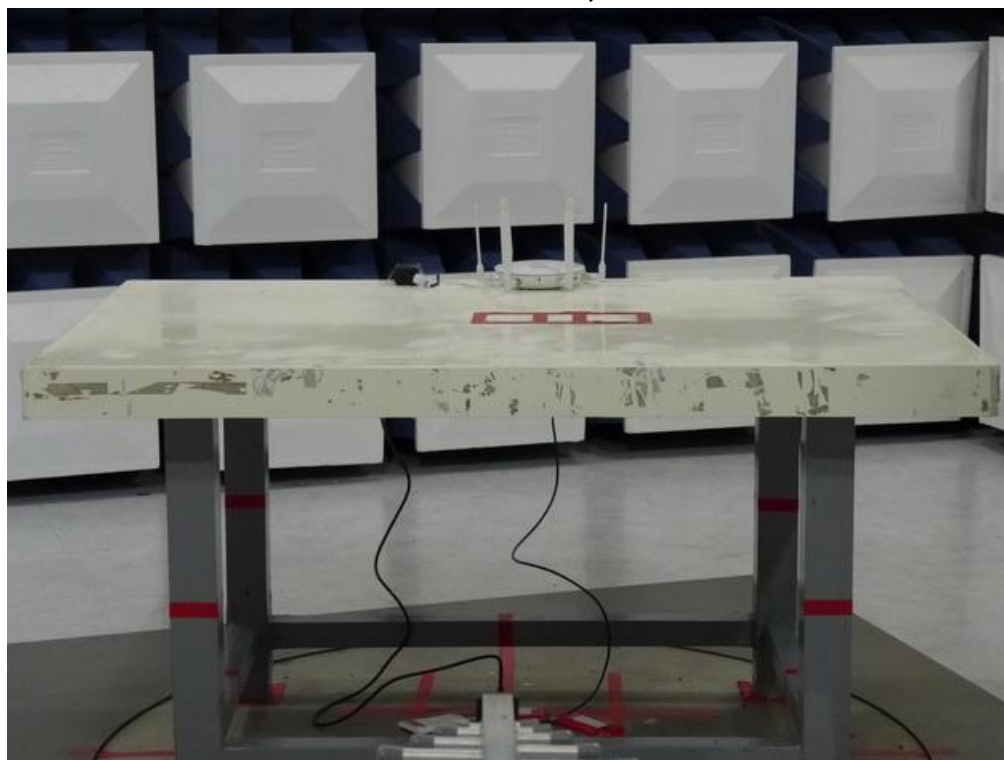


Radiated Measurement Photos

30MHz to 1000MHz-PoE

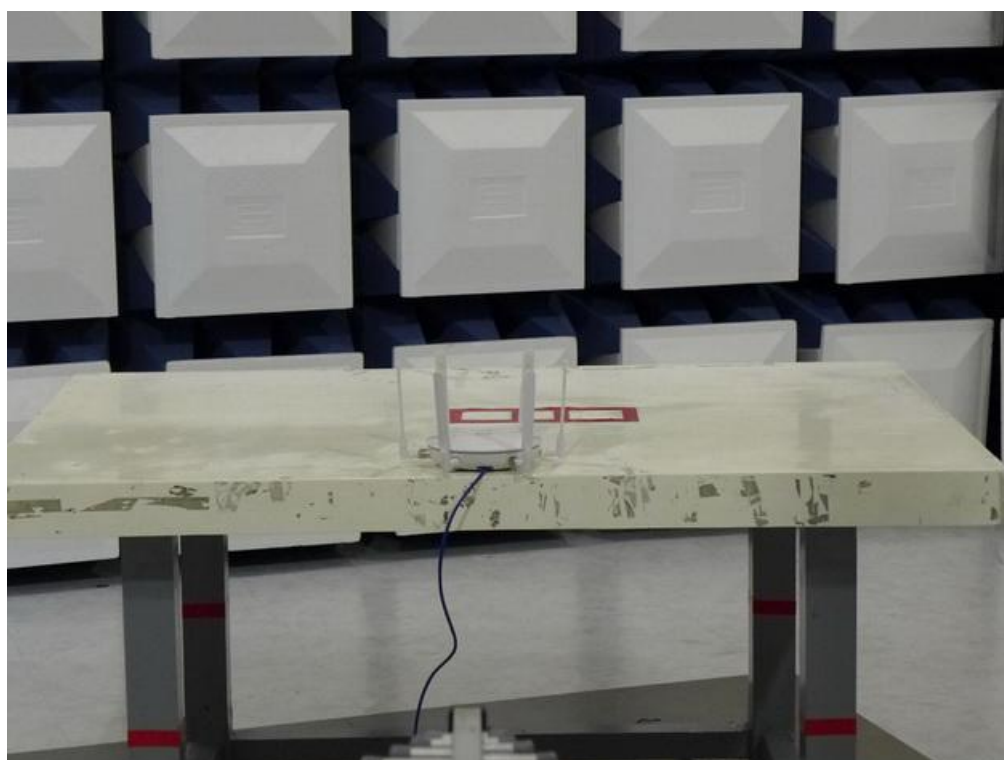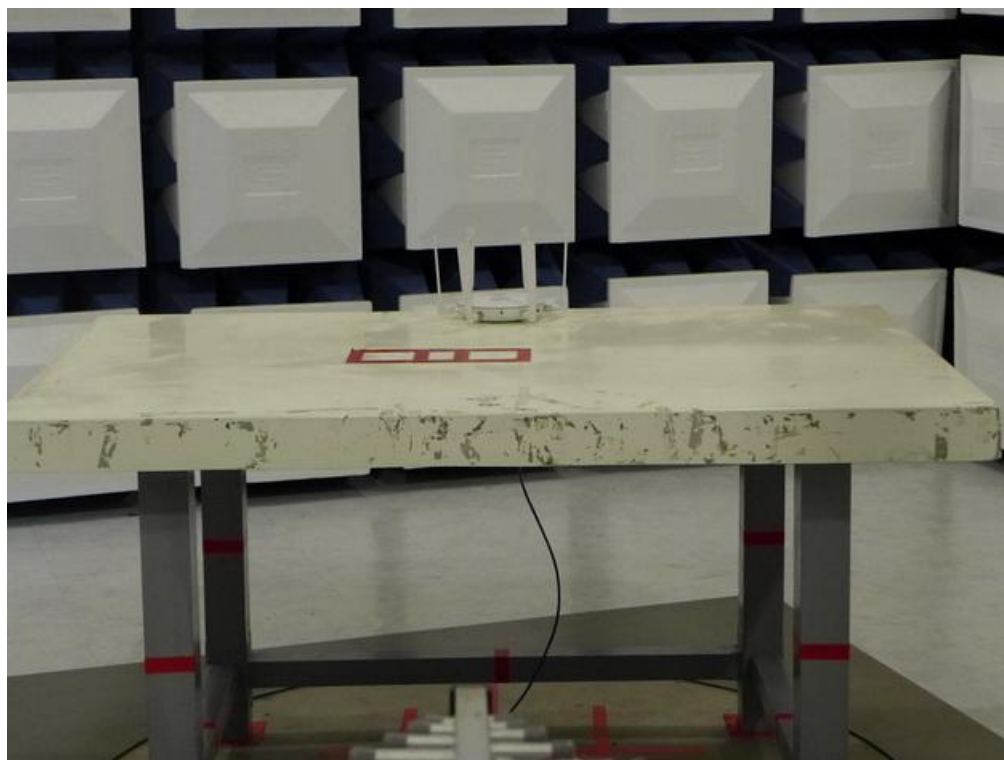

Radiated Measurement Photos


Above 1000MHz

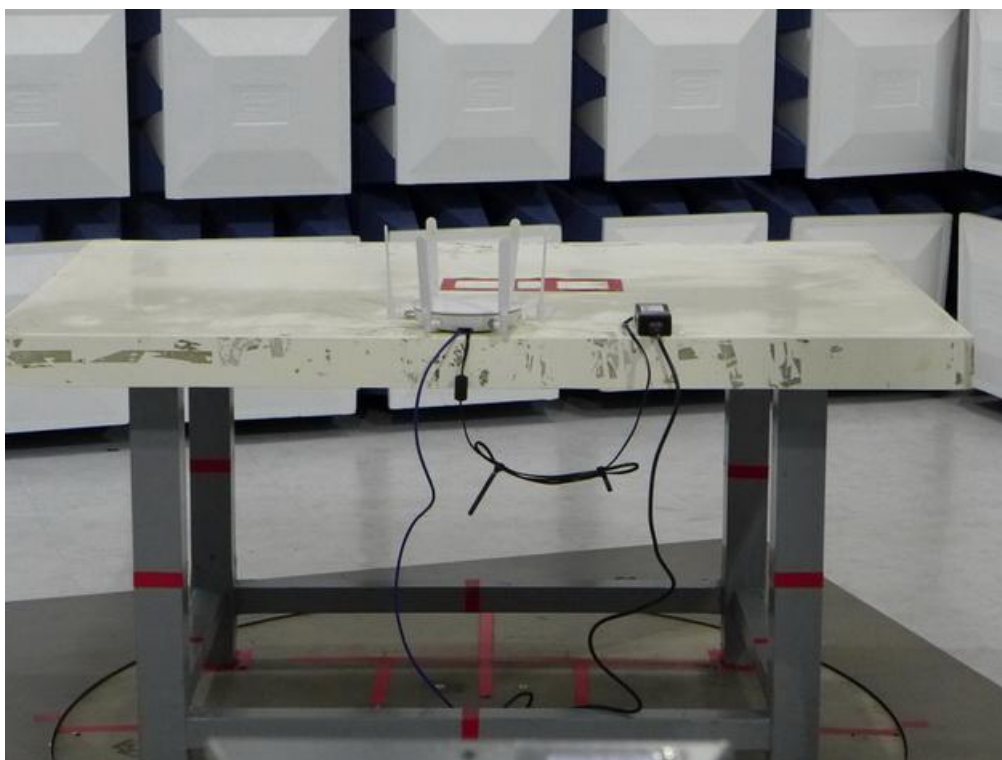

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX MODE- AMIGO, AMS117-1202000F2

Line

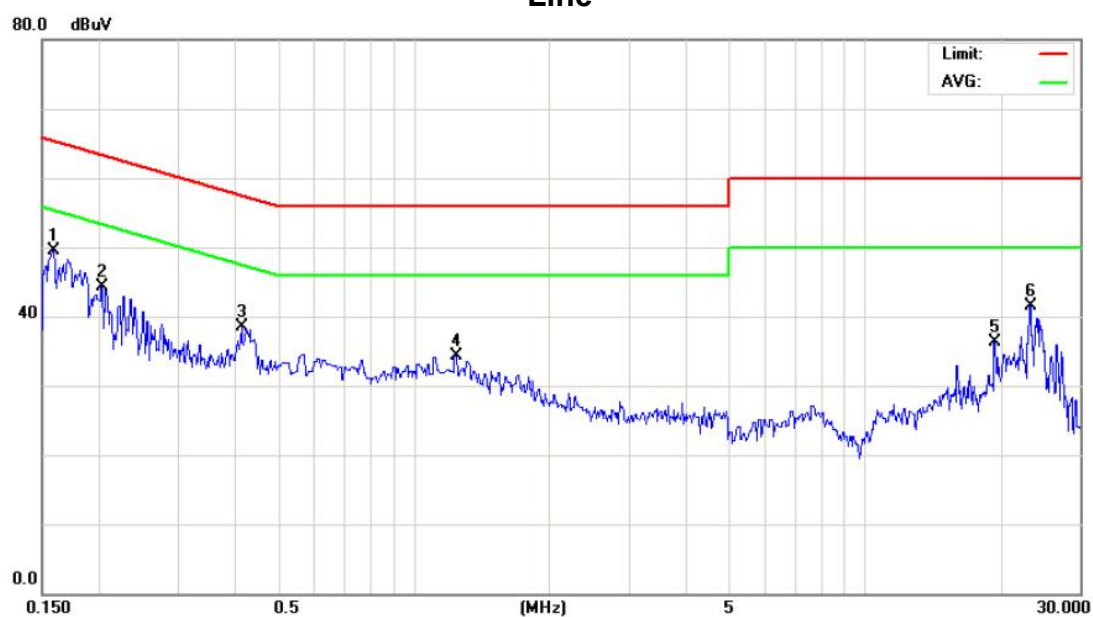


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1584	39.85	9.64	49.49	65.54	-16.05	peak	
2		0.2031	34.61	9.64	44.25	63.48	-19.23	peak	
3		0.4138	28.77	9.66	38.43	57.57	-19.14	peak	
4		1.2379	24.54	9.70	34.24	56.00	-21.76	peak	
5		19.3500	25.91	10.37	36.28	60.00	-23.72	peak	
6		23.1499	30.96	10.49	41.45	60.00	-18.55	peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE- AMIGO, AMS117-1202000F2


Neutral

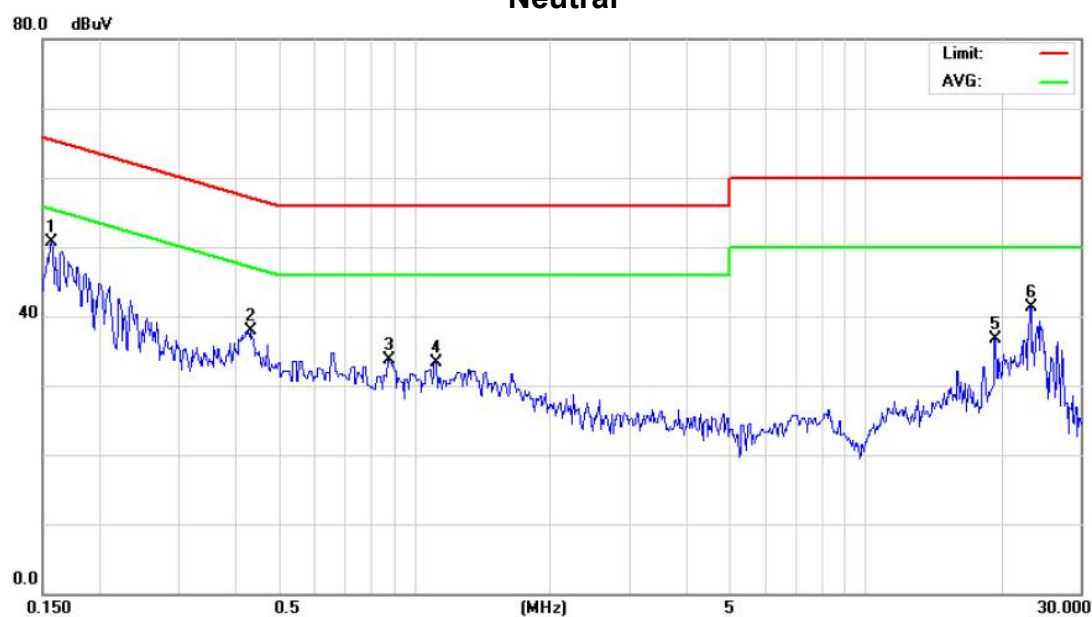

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1570	41.16	9.64	50.80	65.62	-14.82	peak	
2		0.4320	28.28	9.67	37.95	57.21	-19.26	peak	
3		0.8780	23.99	9.69	33.68	56.00	-22.32	peak	
4		1.1119	23.54	9.70	33.24	56.00	-22.76	peak	
5		19.3500	26.32	10.37	36.69	60.00	-23.31	peak	
6		23.1500	30.83	10.49	41.32	60.00	-18.68	peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE- SUNNY, SYS1544-2412-T3

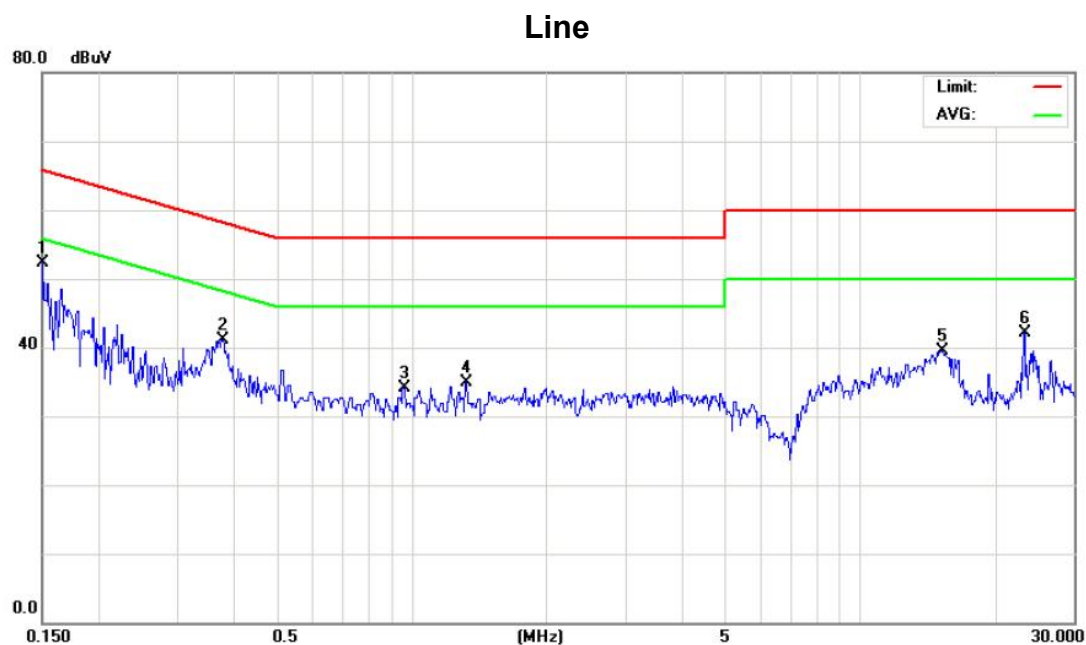


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1507	42.67	9.65	52.32	65.96	-13.64	peak	
2		0.3774	31.31	9.85	41.16	58.34	-17.18	peak	
3		0.9590	24.50	9.70	34.20	56.00	-21.80	peak	
4		1.3189	25.18	9.73	34.91	56.00	-21.09	peak	
5		15.1500	29.45	10.14	39.59	60.00	-20.41	peak	
6		23.1500	31.64	10.46	42.10	60.00	-17.90	peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE- SUNNY, SYS1544-2412-T3

Neutral

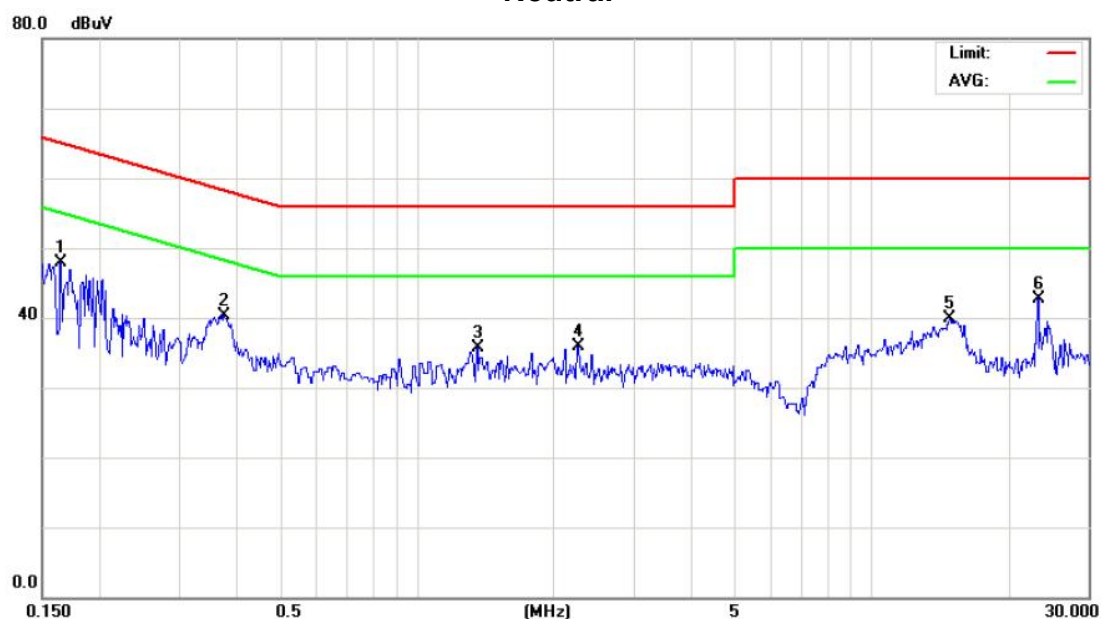

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1647	38.24	9.64	47.88	65.22	-17.34	peak	
2		0.3753	30.62	9.66	40.28	58.38	-18.10	peak	
3		1.3549	25.99	9.72	35.71	56.00	-20.29	peak	
4		2.2549	26.21	9.78	35.99	56.00	-20.01	peak	
5		14.8000	29.66	10.17	39.83	60.00	-20.17	peak	
6	*	23.1500	32.24	10.49	42.73	60.00	-17.27	peak	

Note : The test result has included the cable loss.

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX Mode- AMIGO, AMS117-1202000F2
------------	----------------------------------

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.2523	0°	46.24	11.40	57.64	79.57	-21.93	AVG
0.2523	0°	53.11	11.40	64.51	99.57	-35.06	PK
0.3712	0°	38.47	11.14	49.61	76.21	-26.60	AVG
0.3712	0°	46.29	11.14	57.43	96.21	-38.78	PK
0.432	0°	50.32	11.18	61.50	74.89	-13.40	AVG
0.432	0°	49.17	11.18	60.35	94.89	-34.55	PK
0.744	0°	44.52	11.30	55.82	90.55	-34.73	QP
0.772	0°	40.15	11.33	51.48	69.85	-18.37	QP
1.356	0°	38.29	11.53	49.82	64.96	-15.14	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.255	90°	46.52	11.38	57.90	79.47	-21.57	AVG
0.255	90°	57.44	11.38	68.82	99.47	-30.65	PK
0.377	90°	37.35	11.14	48.49	76.08	-27.58	AVG
0.377	90°	46.29	11.14	57.43	96.08	-38.64	PK
0.435	90°	42.11	11.18	53.29	74.83	-21.55	AVG
0.435	90°	51.27	11.18	62.45	94.83	-32.39	PK
0.746	90°	44.32	11.30	55.62	90.55	-34.93	QP
0.788	90°	40.51	11.34	51.85	69.67	-17.83	QP
1.365	90°	38.64	11.53	50.17	64.90	-14.73	QP

Test Mode: TX Mode- SUNNY, SYS1544-2412-T3

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.2527	0°	46.85	11.40	58.25	79.55	-21.31	AVG
0.2527	0°	53.22	11.40	64.62	99.55	-34.94	PK
0.3700	0°	38.36	11.14	49.50	76.24	-26.74	AVG
0.3700	0°	46.15	11.14	57.29	96.24	-38.95	PK
0.4330	0°	40.39	11.18	51.57	74.87	-23.31	AVG
0.4330	0°	49.41	11.18	60.59	94.87	-34.29	PK
0.7410	0°	44.28	11.30	55.58	90.55	-34.97	QP
0.7780	0°	40.36	11.33	51.69	69.78	-18.09	QP
1.3620	0°	38.74	11.53	50.27	64.92	-14.65	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.2540	90°	46.28	11.39	57.67	79.51	-21.84	AVG
0.2540	90°	57.47	11.39	68.86	99.51	-30.65	PK
0.3720	90°	37.22	11.14	48.36	76.19	-27.83	AVG
0.3720	90°	46.39	11.14	57.53	96.19	-38.66	PK
0.4330	90°	42.51	11.18	53.69	74.87	-21.19	AVG
0.4330	90°	51.62	11.18	62.80	94.87	-32.08	PK
0.7470	90°	44.28	11.30	55.58	90.55	-34.97	QP
0.7780	90°	40.47	11.33	51.80	69.78	-17.98	QP
1.3620	90°	38.62	11.53	50.15	64.92	-14.77	QP

Test Mode: TX Mode- PoE


Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.2510	0°	46.29	11.41	57.70	79.61	-21.91	AVG
0.2510	0°	53.25	11.41	64.66	99.61	-34.95	PK
0.3780	0°	38.11	11.14	49.25	76.05	-26.80	AVG
0.3780	0°	46.63	11.14	57.77	96.05	-38.28	PK
0.4310	0°	40.57	11.18	51.75	74.91	-23.17	AVG
0.4310	0°	49.24	11.18	60.42	94.91	-34.50	PK
0.7450	0°	44.16	11.30	55.46	90.55	-35.09	QP
0.7780	0°	40.42	11.33	51.75	69.78	-18.03	QP
1.3620	0°	38.12	11.53	49.65	64.92	-15.27	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.2523	90°	46.28	11.40	57.68	79.57	-21.89	AVG
0.2523	90°	57.09	11.40	68.49	99.57	-31.08	PK
0.3760	90°	37.25	11.14	48.39	76.10	-27.71	AVG
0.3760	90°	46.68	11.14	57.82	96.10	-38.28	PK
0.4400	90°	42.89	11.18	54.07	74.74	-20.66	AVG
0.4400	90°	51.32	11.18	62.50	94.74	-32.23	PK
0.7470	90°	44.73	11.30	56.03	90.55	-34.52	QP
0.7780	90°	40.68	11.33	52.01	69.78	-17.77	QP
1.3620	90°	38.22	11.53	49.75	64.92	-15.17	QP

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	UNII-1/TX A Mode 5200MHz- AMIGO, AMS117-1202000F2
------------	---

Vertical

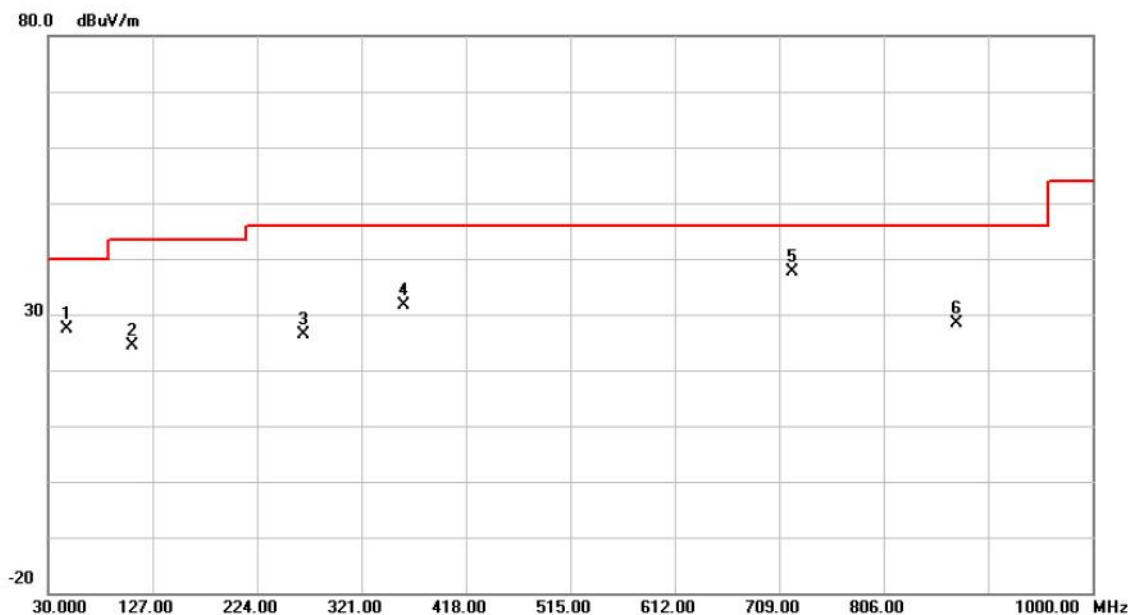

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		46.9750	41.12	-13.68	27.44	40.00	-12.56	peak	
2		107.6000	42.08	-17.68	24.40	43.50	-19.10	peak	
3		267.6500	40.57	-14.29	26.28	46.00	-19.72	peak	
4		359.8000	43.66	-12.08	31.58	46.00	-14.42	peak	
5	*	721.1250	42.87	-5.25	37.62	46.00	-8.38	peak	
6		873.9000	31.83	-3.36	28.47	46.00	-17.53	peak	

Test Mode: UNII-1/TX A Mode 5200MHz- AMIGO, AMS117-1202000F2

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		107.6000	41.60	-17.68	23.92	43.50	-19.58	peak	
2		284.6250	46.05	-13.84	32.21	46.00	-13.79	peak	
3		359.8000	46.68	-12.08	34.60	46.00	-11.40	peak	
4		374.3500	41.29	-11.74	29.55	46.00	-16.45	peak	
5		636.2500	32.27	-7.05	25.22	46.00	-20.78	peak	
6	*	721.1250	42.47	-5.25	37.22	46.00	-8.78	peak	

Test Mode: UNII-1/TX A Mode 5200MHz- SUNNY, SYS1544-2412-T3


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	49.4000	48.28	-13.69	34.59	40.00	-5.41	peak	
2		359.8000	44.59	-12.08	32.51	46.00	-13.49	peak	
3		374.3500	41.80	-11.74	30.06	46.00	-15.94	peak	
4		721.1250	36.08	-5.25	30.83	46.00	-15.17	peak	
5		873.9000	35.48	-3.36	32.12	46.00	-13.88	peak	
6		900.5750	37.29	-2.82	34.47	46.00	-11.53	peak	

Test Mode: UNII-1/TX A Mode 5200MHz- SUNNY, SYS1544-2412-T3

Horizontal

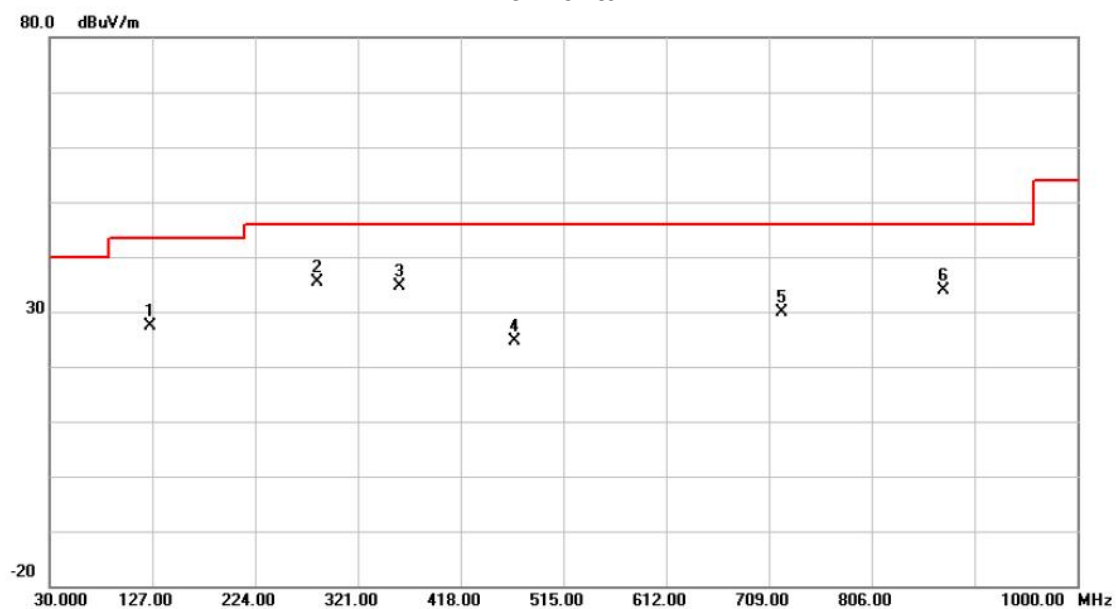

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	124.5750	43.24	-15.80	27.44	43.50	-16.06	peak	
2 *	282.2000	49.27	-13.91	35.36	46.00	-10.64	peak	
3	359.8000	46.66	-12.08	34.58	46.00	-11.42	peak	
4	468.9250	34.17	-9.53	24.64	46.00	-21.36	peak	
5	721.1250	35.02	-5.25	29.77	46.00	-16.23	peak	
6	873.9000	37.16	-3.36	33.80	46.00	-12.20	peak	

Test Mode: UNII-1/TX A Mode 5200MHz-PoE

Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	49.4000	46.28	-13.69	32.59	40.00	-7.41	peak	
2		214.3000	46.57	-16.56	30.01	43.50	-13.49	peak	
3		359.8000	44.59	-12.08	32.51	46.00	-13.49	peak	
4		539.2500	36.74	-8.27	28.47	46.00	-17.53	peak	
5		721.1250	36.08	-5.25	30.83	46.00	-15.17	peak	
6		900.5750	37.79	-2.82	34.97	46.00	-11.03	peak	

Test Mode: UNII-1/TX A Mode 5200MHz-PoE


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		124.5750	44.74	-15.80	28.94	43.50	-14.56	peak	
2		282.2000	48.27	-13.91	34.36	46.00	-11.64	peak	
3		299.1750	47.28	-13.51	33.77	46.00	-12.23	peak	
4	*	359.8000	46.66	-12.08	34.58	46.00	-11.42	peak	
5		721.1250	35.52	-5.25	30.27	46.00	-15.73	peak	
6		873.9000	37.16	-3.36	33.80	46.00	-12.20	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

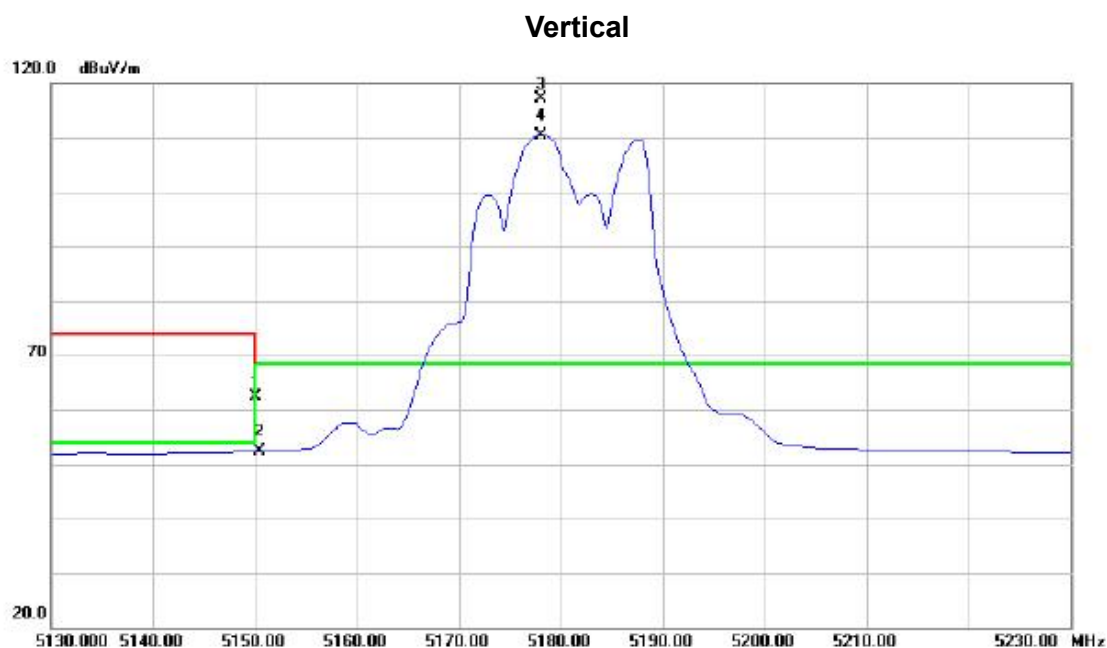

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	24.56	37.74	62.30	68.30	-6.00	peak	
2		5150.000	14.57	37.74	52.31	54.00	-1.69	AVG	
3	*	5178.000	79.38	37.83	117.21	68.30	48.91	peak	no limit
4	X	5178.000	72.58	37.83	110.41	68.30	42.11	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

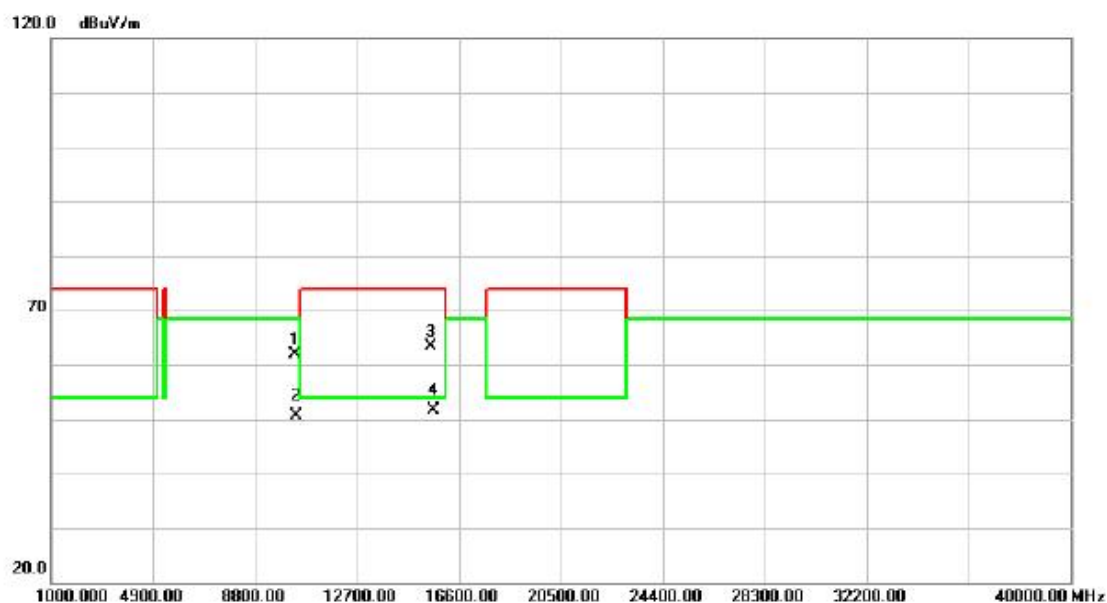

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10359.61	44.10	17.74	61.84	68.30	-6.46	peak	
2		10359.61	32.80	17.74	50.54	68.30	-17.76	AVG	
3		15540.89	44.00	19.30	63.30	74.00	-10.70	peak	
4	*	15540.89	32.31	19.30	51.61	54.00	-2.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

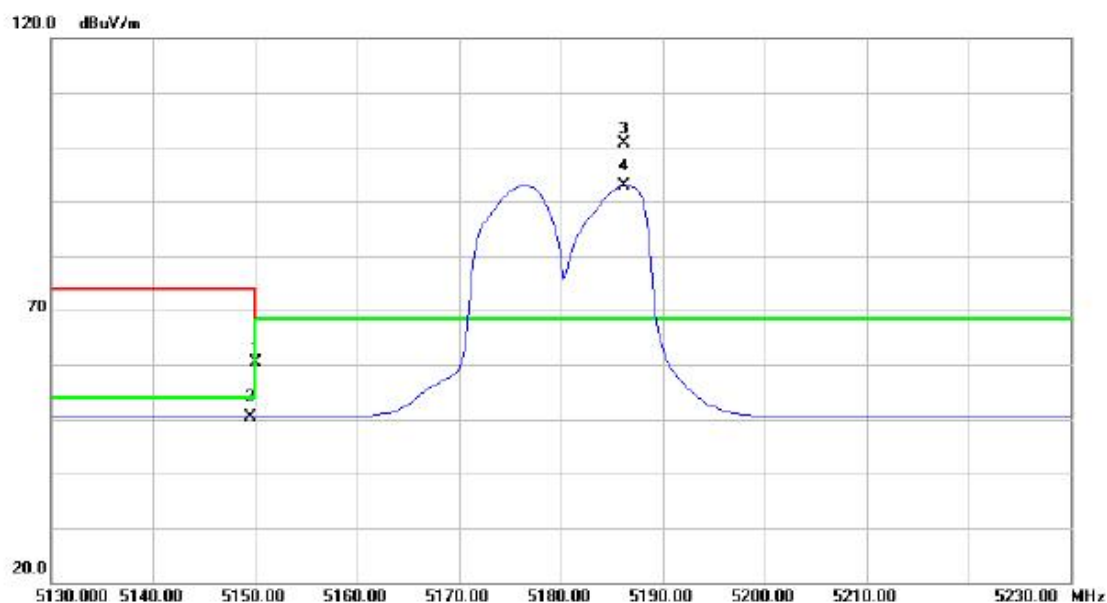

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	22.65	37.74	60.39	68.30	-7.91	peak	
2		5150.000	12.76	37.74	50.50	54.00	-3.50	AVG	
3	*	5186.250	62.66	37.86	100.52	68.30	32.22	peak	no limit
4	X	5186.250	55.14	37.86	93.00	68.30	24.70	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

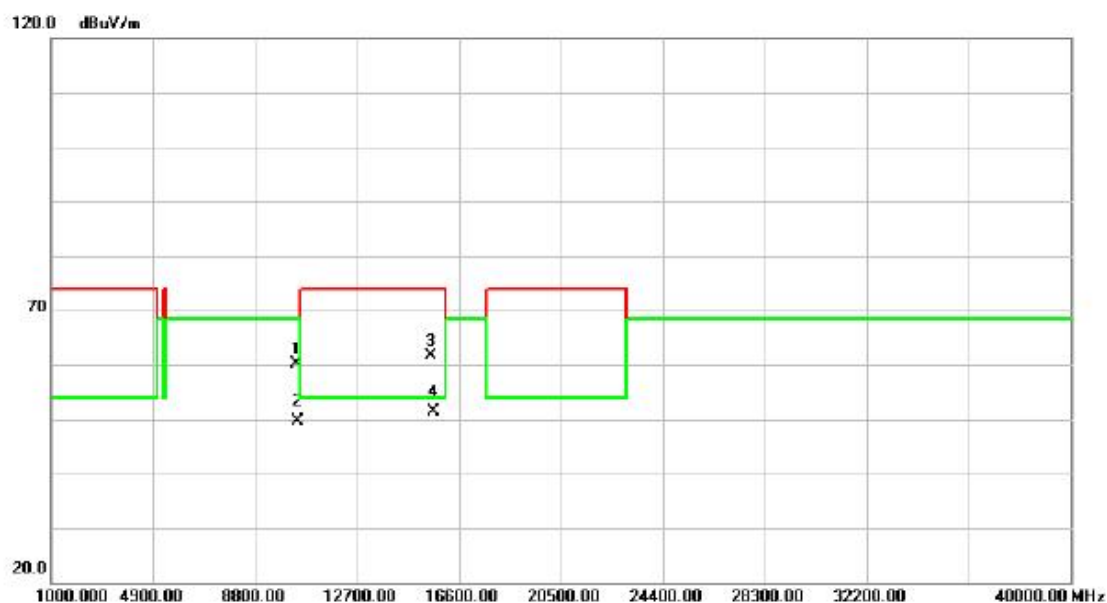

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10360.19	42.44	17.74	60.18	68.30	-8.12	peak	
2		10360.19	31.88	17.74	49.62	68.30	-18.68	AVG	
3		15540.92	42.34	19.30	61.64	74.00	-12.36	peak	
4	*	15540.92	32.17	19.30	51.47	54.00	-2.53	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

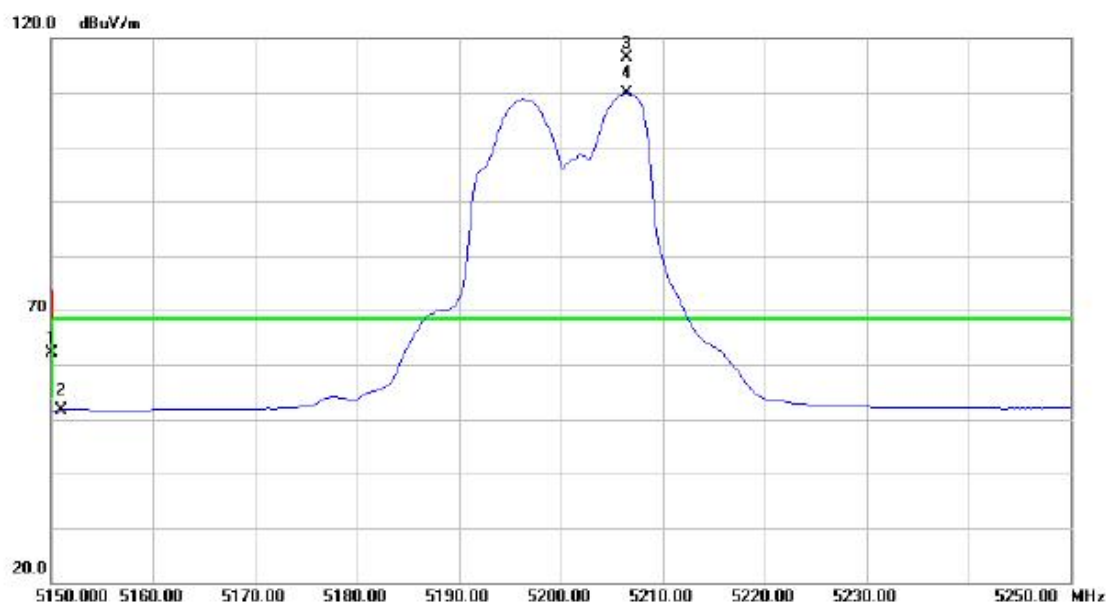

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	24.47	37.74	62.21	68.30	-6.09	peak	
2		5150.000	13.92	37.74	51.66	54.00	-2.34	AVG	
3	*	5206.500	78.44	37.94	116.38	68.30	48.08	peak	no limit
4	X	5206.500	71.89	37.94	109.83	68.30	41.53	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

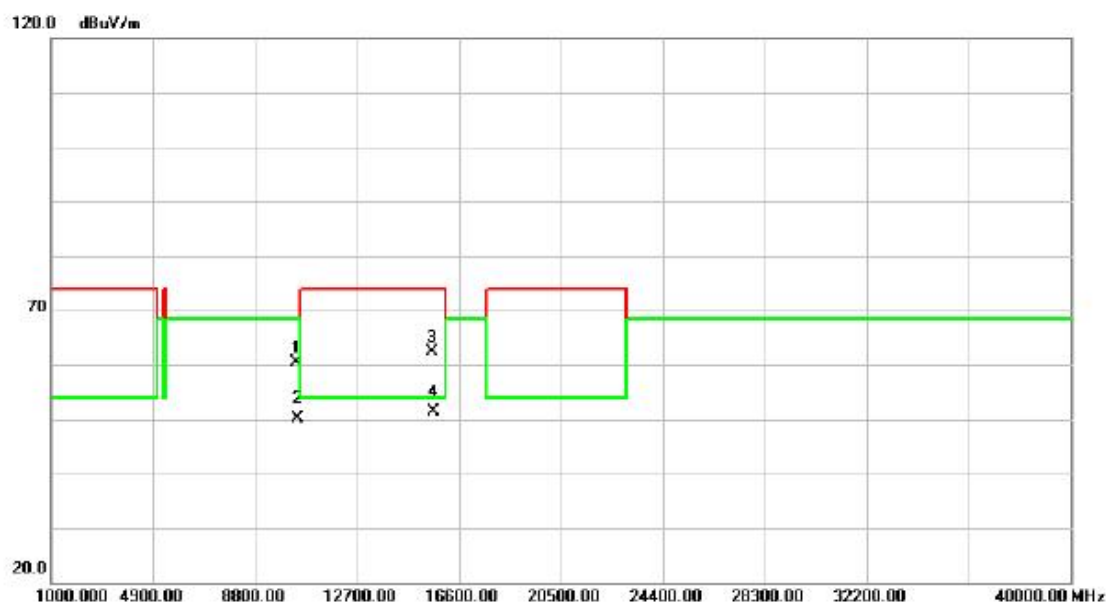

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10399.92	42.58	17.92	60.50	68.30	-7.80	peak	
2		10399.92	32.30	17.92	50.22	68.30	-18.08	AVG	
3		15600.52	42.98	19.32	62.30	74.00	-11.70	peak	
4	*	15600.52	32.15	19.32	51.47	54.00	-2.53	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Horizontal

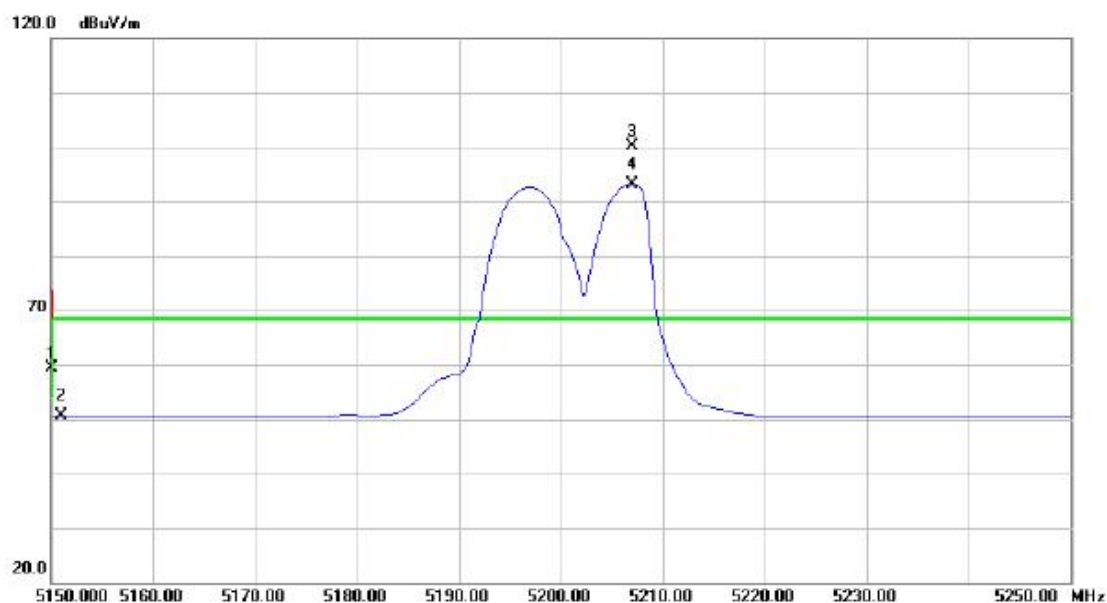

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	21.75	37.74	59.49	68.30	-8.81	peak	
2		5150.000	12.77	37.74	50.51	54.00	-3.49	AVG	
3	*	5207.000	62.28	37.94	100.22	68.30	31.92	peak	no limit
4	X	5207.000	55.16	37.94	93.10	68.30	24.80	AVG	no limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Horizontal

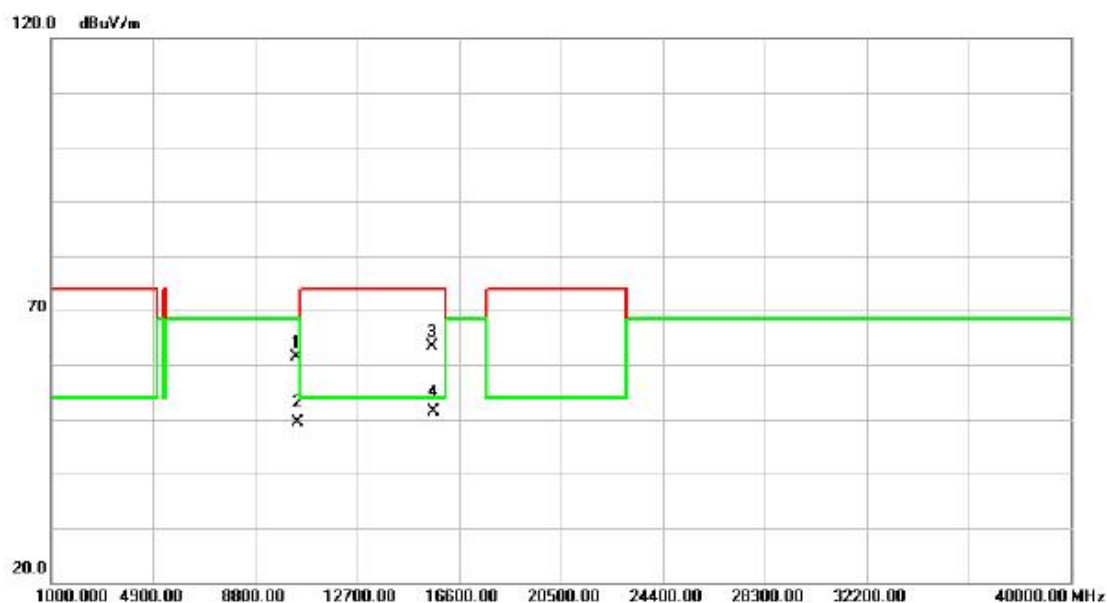

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10400.03	43.39	17.92	61.31	68.30	-6.99	peak	
2		10400.03	31.57	17.92	49.49	68.30	-18.81	AVG	
3		15600.18	44.00	19.32	63.32	74.00	-10.68	peak	
4	*	15600.18	32.04	19.32	51.36	54.00	-2.64	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

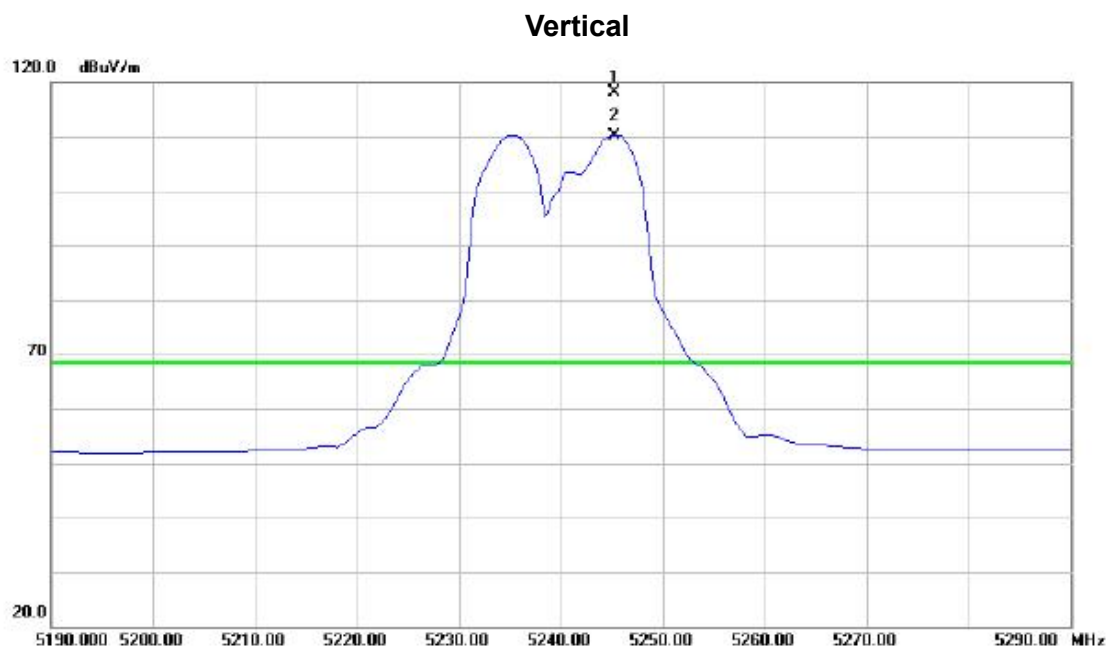

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5245.250	80.08	38.06	118.14	68.30	49.84	peak	no limit
2	X	5245.250	72.10	38.06	110.16	68.30	41.86	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

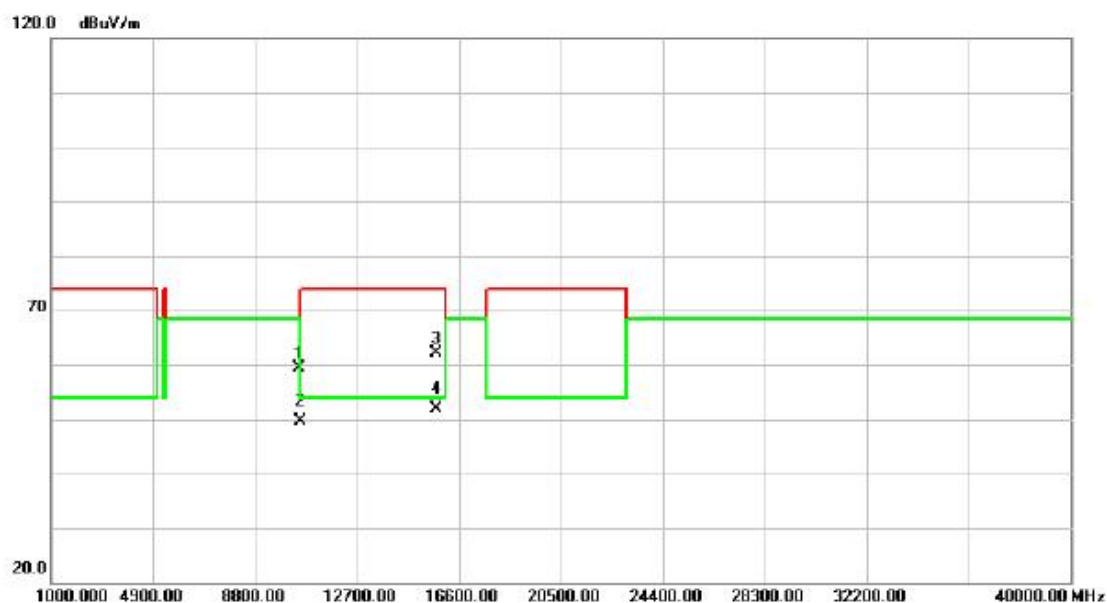

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10479.74	41.12	18.29	59.41	68.30	-8.89	peak	
2		10479.74	31.22	18.29	49.51	68.30	-18.79	AVG	
3		15720.15	42.72	19.36	62.08	74.00	-11.92	peak	
4	*	15720.15	32.51	19.36	51.87	54.00	-2.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

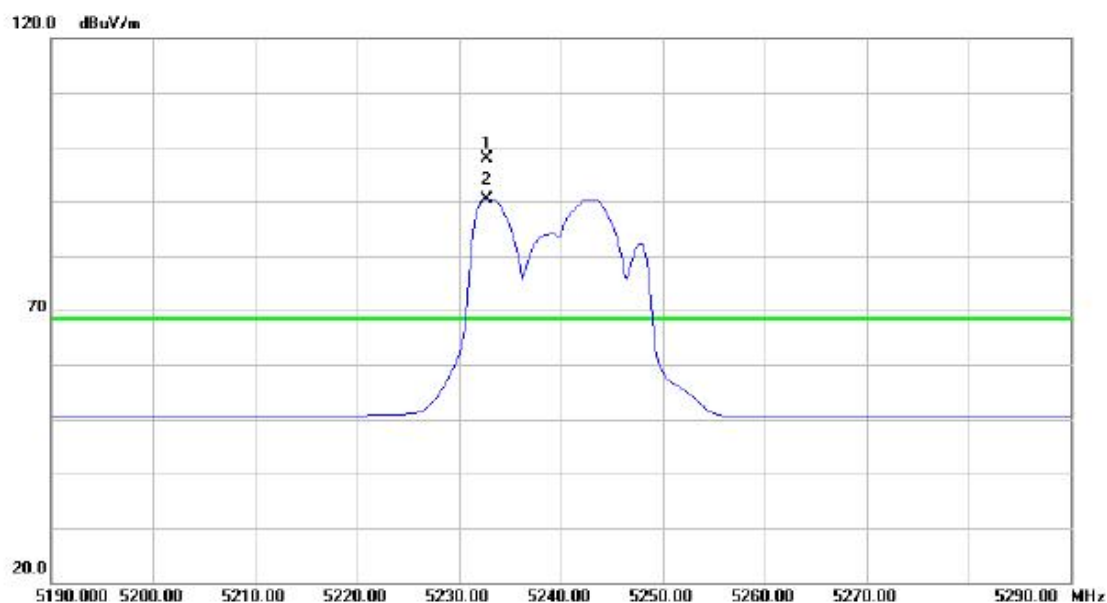

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5232.750	59.94	38.03	97.97	68.30	29.67	peak	no limit
2	X	5232.750	52.46	38.03	90.49	68.30	22.19	AVG	no limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

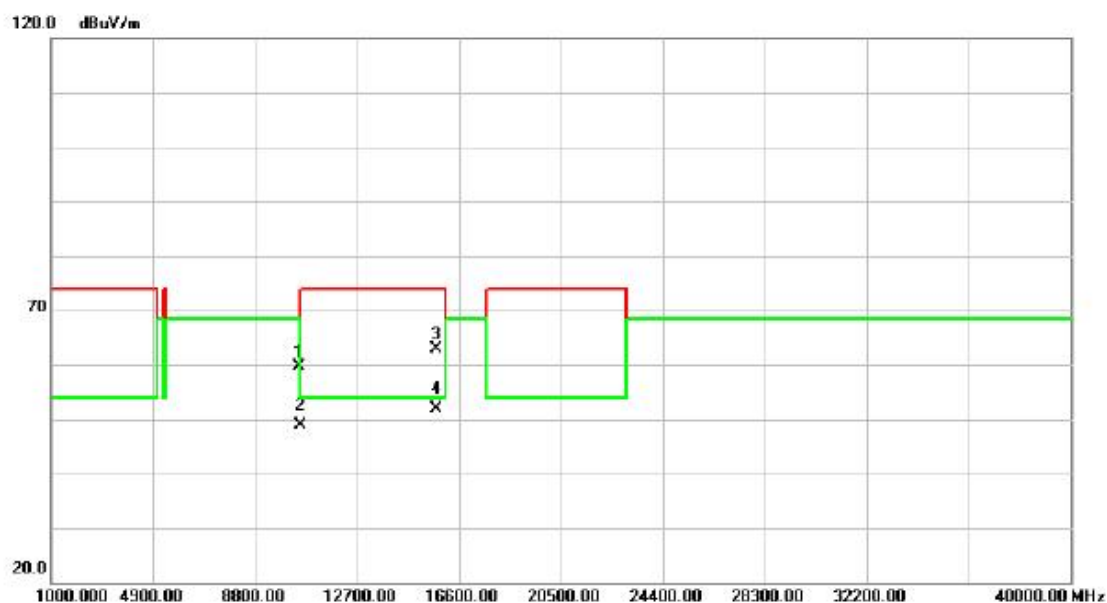

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.55	41.29	18.29	59.58	68.30	-8.72	peak	
2		10480.55	30.60	18.29	48.89	68.30	-19.41	AVG	
3		15720.45	43.59	19.36	62.95	74.00	-11.05	peak	
4	*	15720.45	32.44	19.36	51.80	54.00	-2.20	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

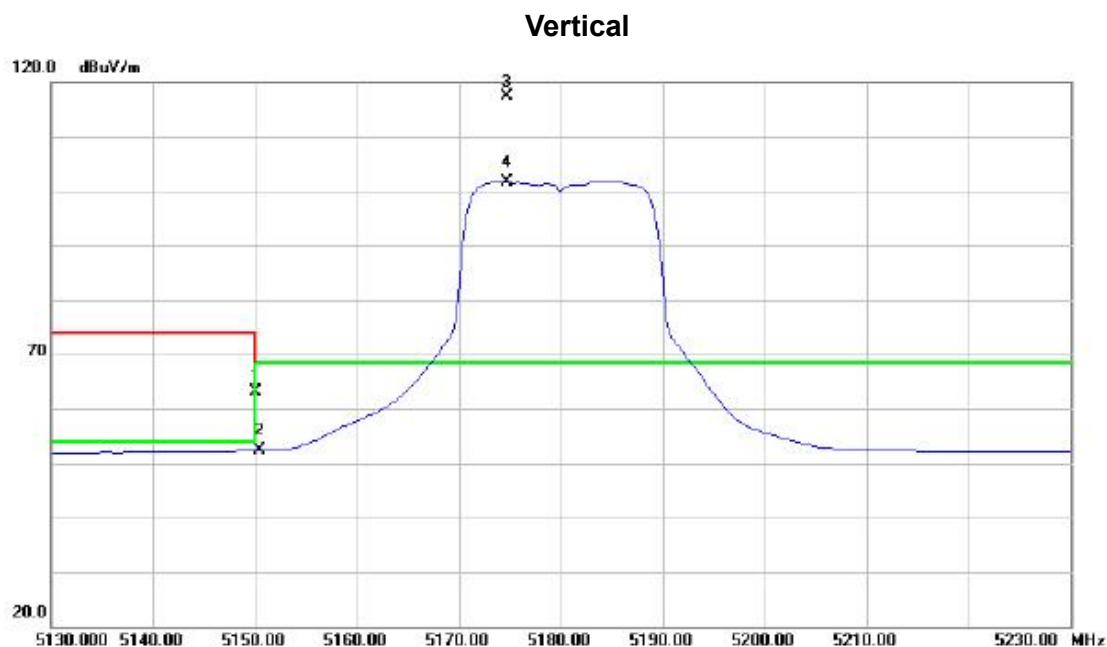

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	25.36	37.74	63.10	68.30	-5.20	peak	
2		5150.000	14.59	37.74	52.33	54.00	-1.67	AVG	
3	*	5174.750	79.44	37.82	117.26	68.30	48.96	peak	no limit
4	X	5174.750	63.88	37.82	101.70	68.30	33.40	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

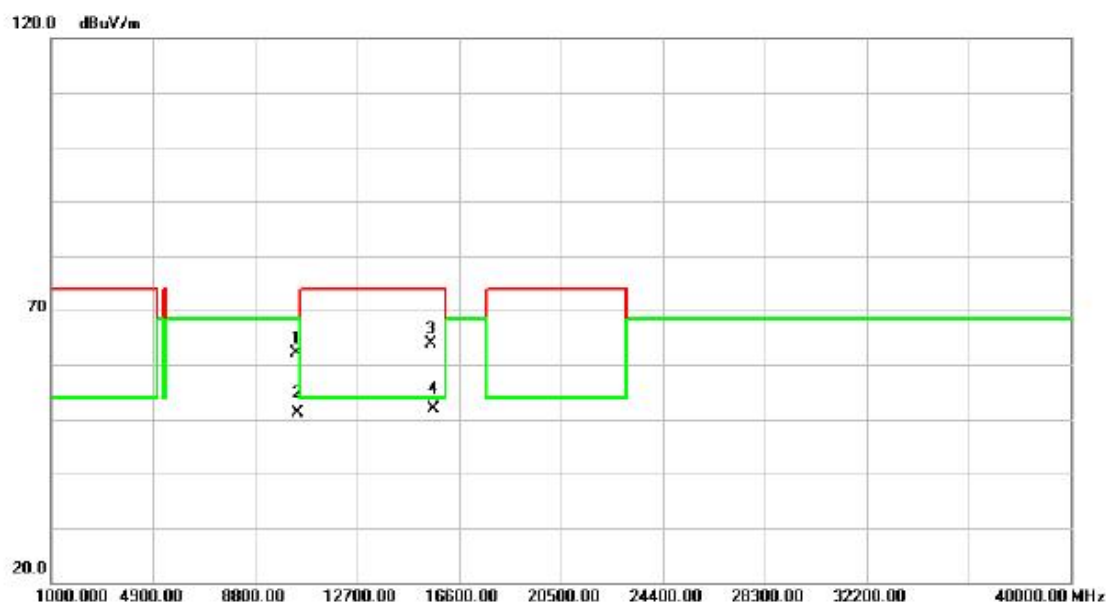

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10360.20	44.35	17.74	62.09	68.30	-6.21	peak	
2		10360.20	33.37	17.74	51.11	68.30	-17.19	AVG	
3		15540.76	44.62	19.30	63.92	74.00	-10.08	peak	
4	*	15540.76	32.62	19.30	51.92	54.00	-2.08	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

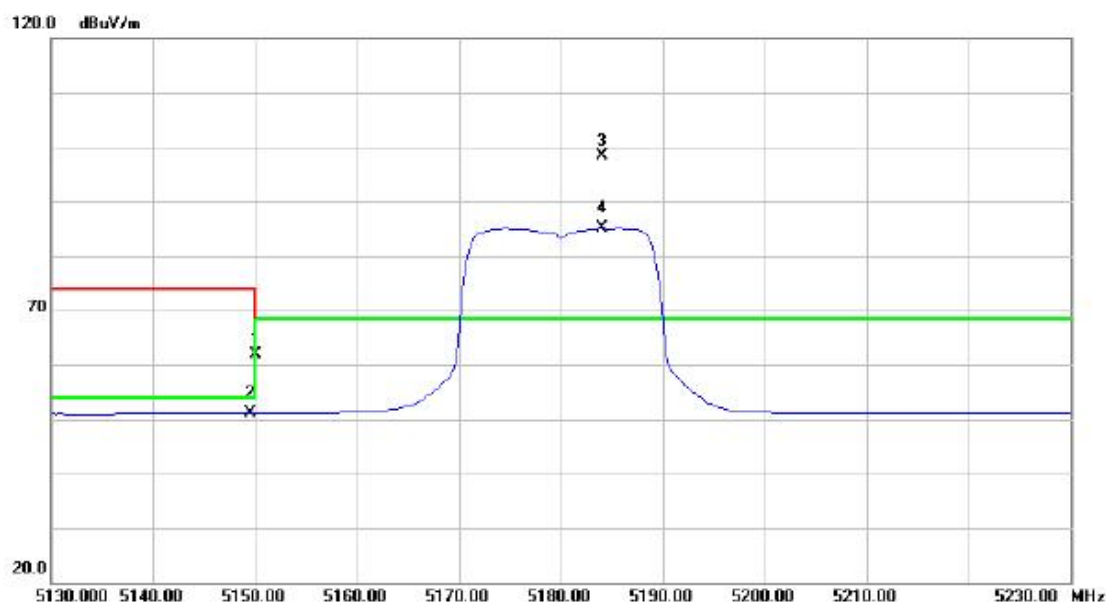

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	24.20	37.74	61.94	68.30	-6.36	peak	
2		5150.000	13.30	37.74	51.04	54.00	-2.96	AVG	
3	*	5184.000	60.60	37.86	98.46	68.30	30.16	peak	no limit
4	X	5184.000	47.18	37.86	85.04	68.30	16.74	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

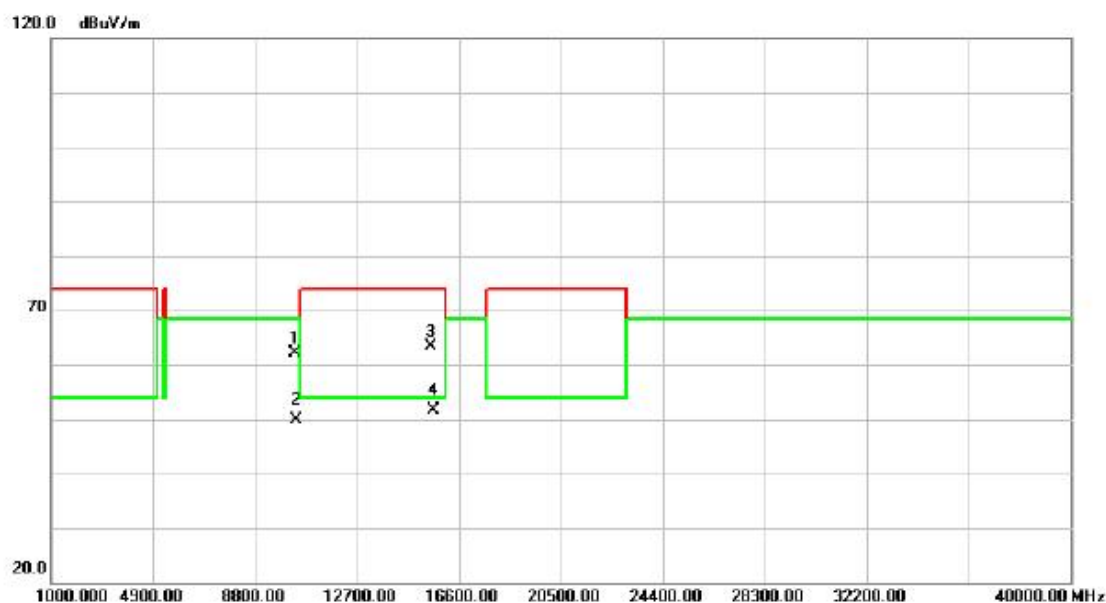

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10359.90	44.37	17.74	62.11	68.30	-6.19	peak	
2		10359.90	32.23	17.74	49.97	68.30	-18.33	AVG	
3		15540.13	44.09	19.30	63.39	74.00	-10.61	peak	
4	*	15540.13	32.41	19.30	51.71	54.00	-2.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

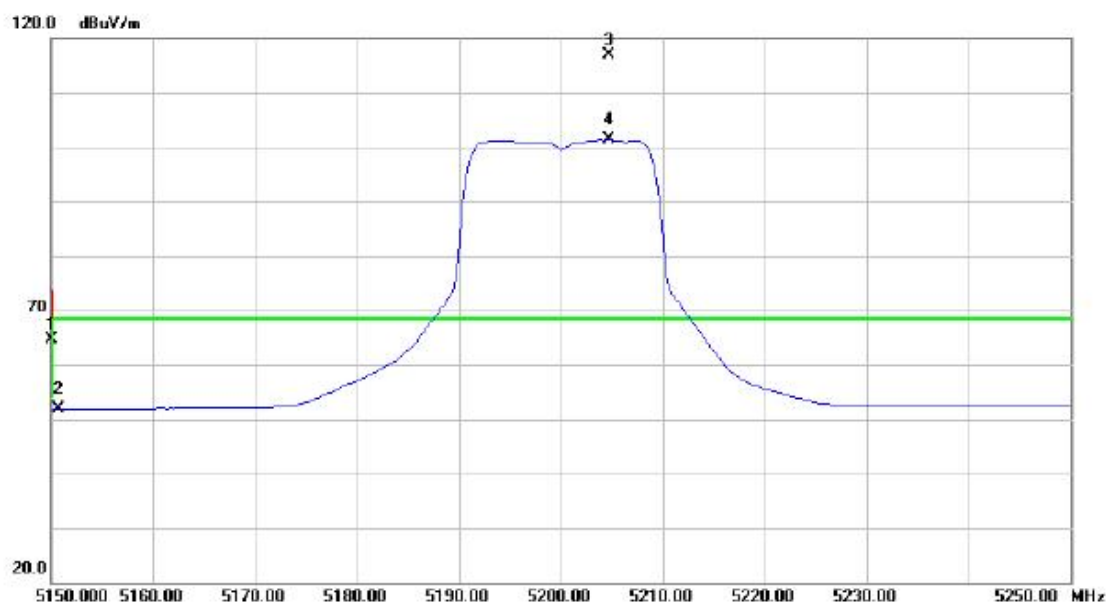

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	26.82	37.74	64.56	68.30	-3.74	peak	
2		5150.000	14.07	37.74	51.81	54.00	-2.19	AVG	
3	*	5204.750	79.07	37.93	117.00	68.30	48.70	peak	no limit
4	X	5204.750	63.43	37.93	101.36	68.30	33.06	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

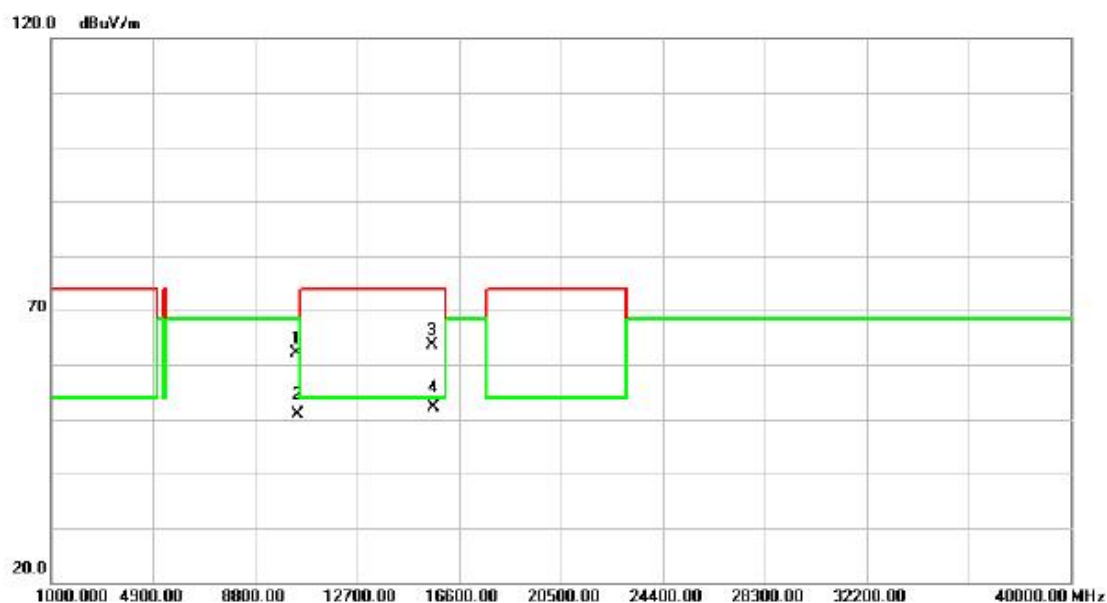

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10400.07	44.11	17.92	62.03	68.30	-6.27	peak	
2		10400.07	33.08	17.92	51.00	68.30	-17.30	AVG	
3		15600.46	44.23	19.32	63.55	74.00	-10.45	peak	
4	*	15600.46	32.81	19.32	52.13	54.00	-1.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

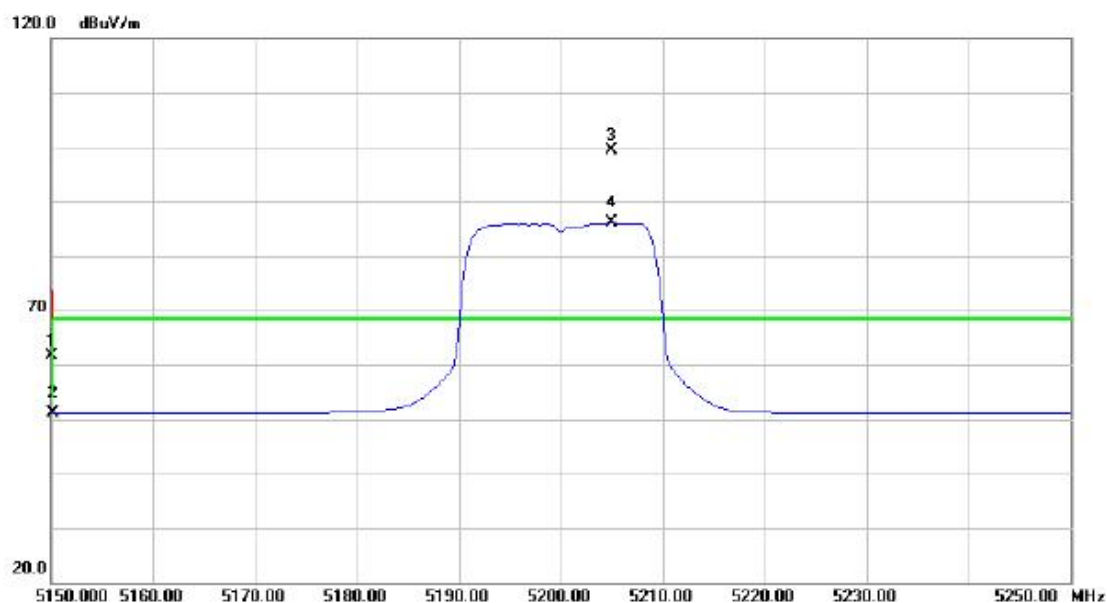

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	23.98	37.74	61.72	68.30	-6.58	peak	
2		5150.000	13.31	37.74	51.05	54.00	-2.95	AVG	
3	*	5205.000	61.40	37.93	99.33	68.30	31.03	peak	no limit
4	X	5205.000	48.10	37.93	86.03	68.30	17.73	AVG	no limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Horizontal

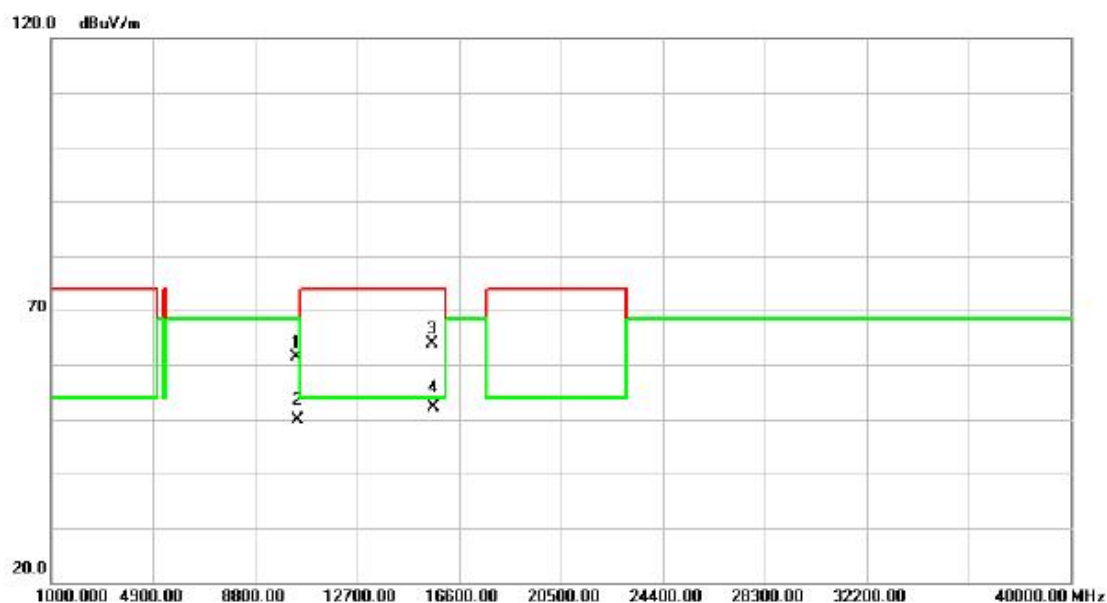

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10400.10	43.56	17.92	61.48	68.30	-6.82	peak	
2		10400.10	31.97	17.92	49.89	68.30	-18.41	AVG	
3		15600.18	44.56	19.32	63.88	74.00	-10.12	peak	
4	*	15600.18	32.71	19.32	52.03	54.00	-1.97	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

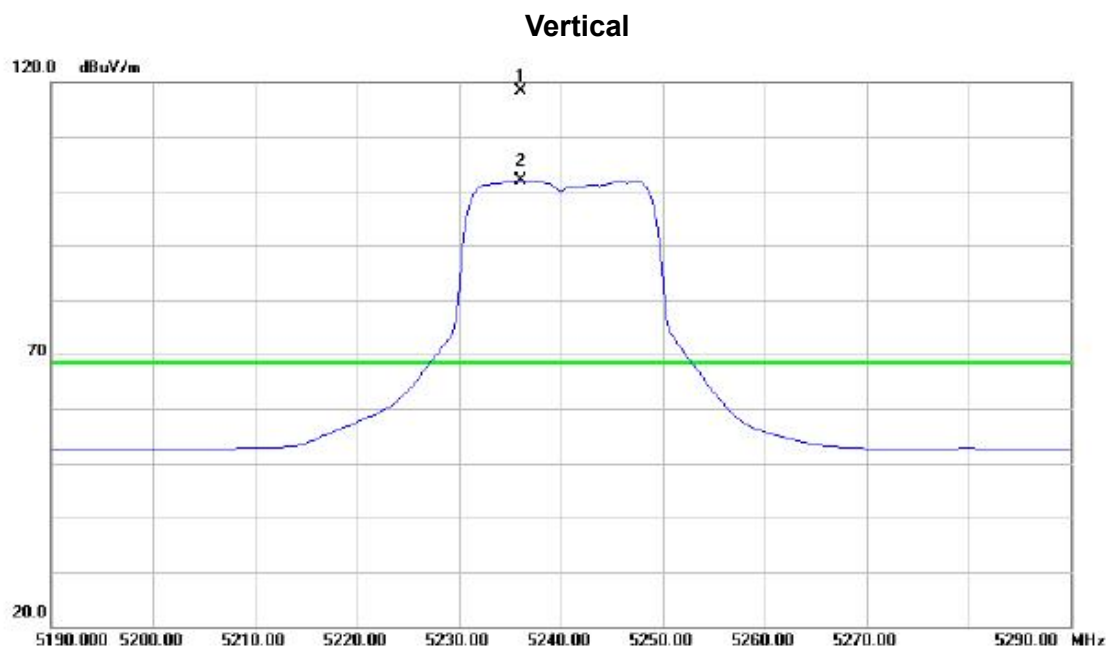

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5236.000	80.23	38.03	118.26	68.30	49.96	peak	no limit
2	X	5236.000	63.83	38.03	101.86	68.30	33.56	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

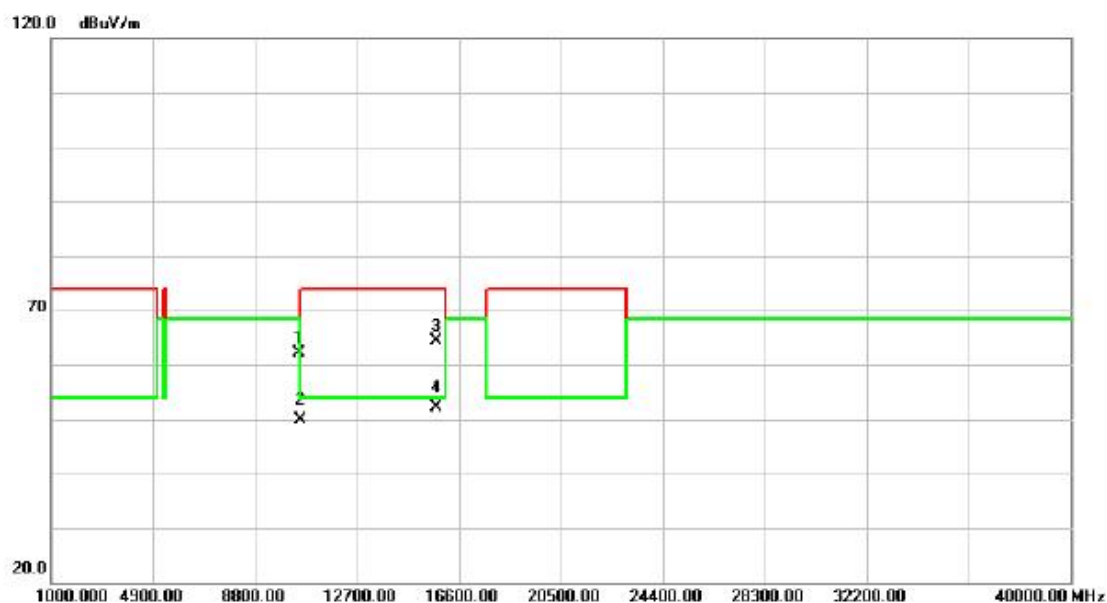

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.04	43.77	18.29	62.06	68.30	-6.24	peak	
2		10480.04	31.51	18.29	49.80	68.30	-18.50	AVG	
3		15720.25	44.95	19.36	64.31	74.00	-9.69	peak	
4	*	15720.25	32.66	19.36	52.02	54.00	-1.98	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

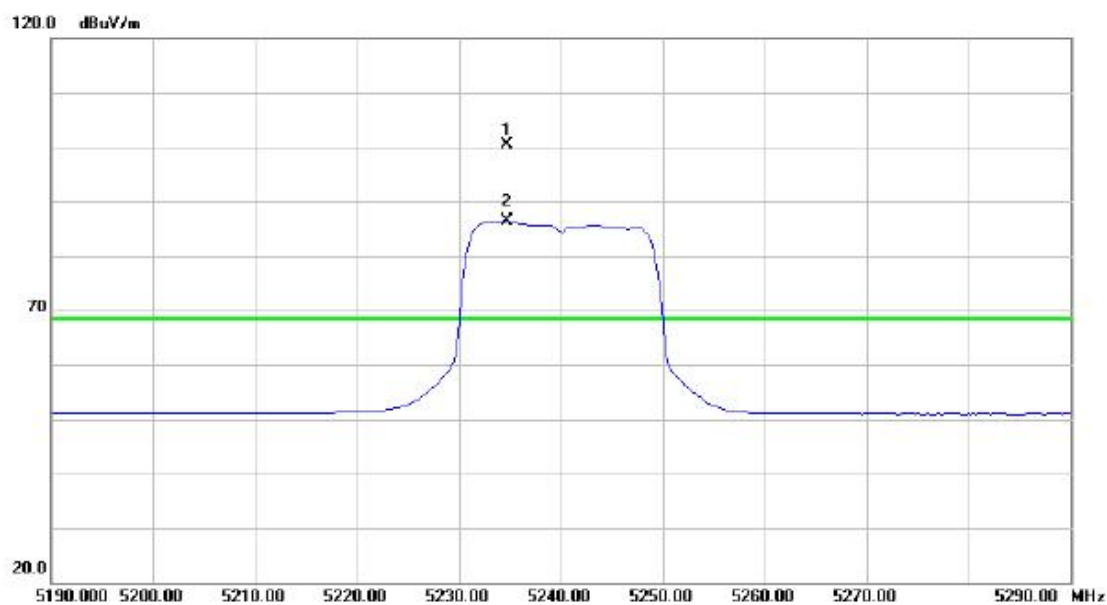

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5234.750	62.25	38.03	100.28	68.30	31.98	peak	no limit
2	X	5234.750	48.24	38.03	86.27	68.30	17.97	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

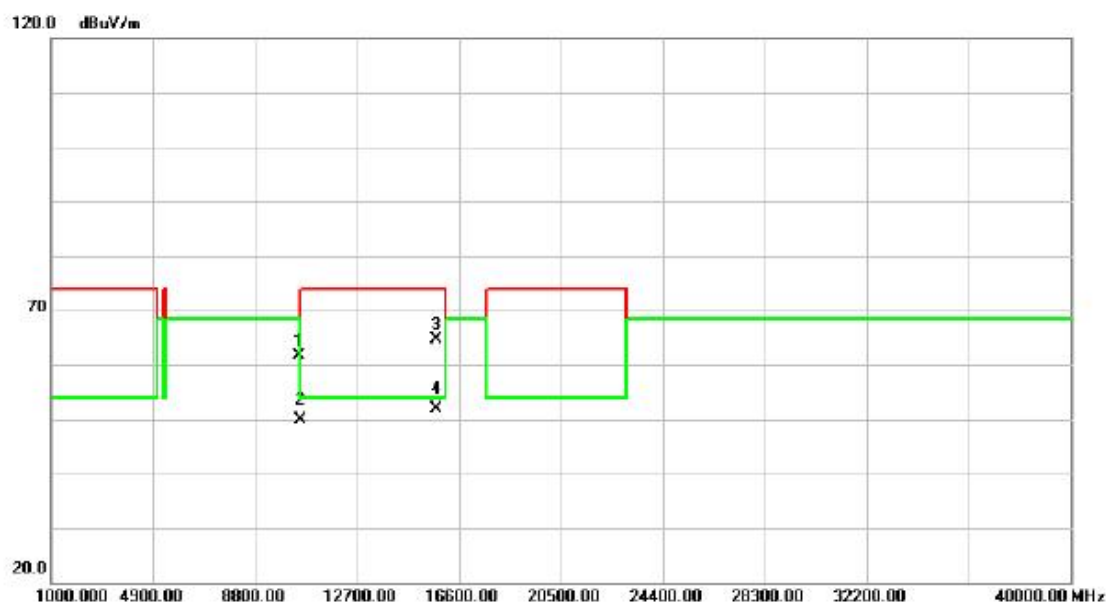

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10479.98	43.22	18.29	61.51	68.30	-6.79	peak	
2		10479.98	31.54	18.29	49.83	68.30	-18.47	AVG	
3		15720.24	45.26	19.36	64.62	74.00	-9.38	peak	
4	*	15720.61	32.62	19.37	51.99	54.00	-2.01	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

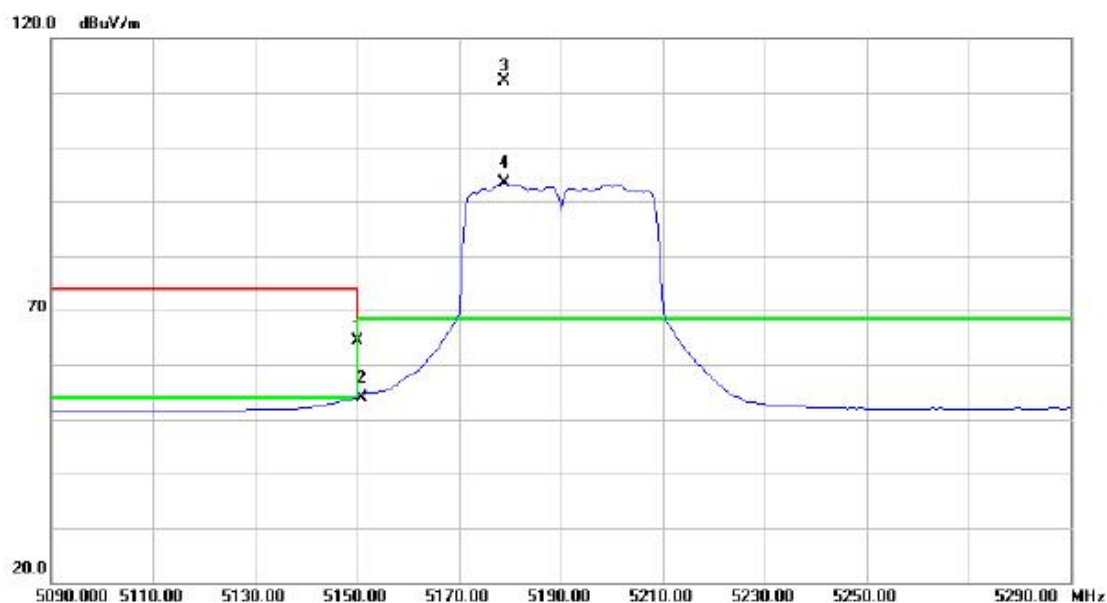

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	26.58	37.74	64.32	68.30	-3.98	peak	
2		5150.000	16.15	37.74	53.89	54.00	-0.11	AVG	
3	*	5179.000	74.28	37.83	112.11	68.30	43.81	peak	no limit
4	X	5179.000	55.53	37.83	93.36	68.30	25.06	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

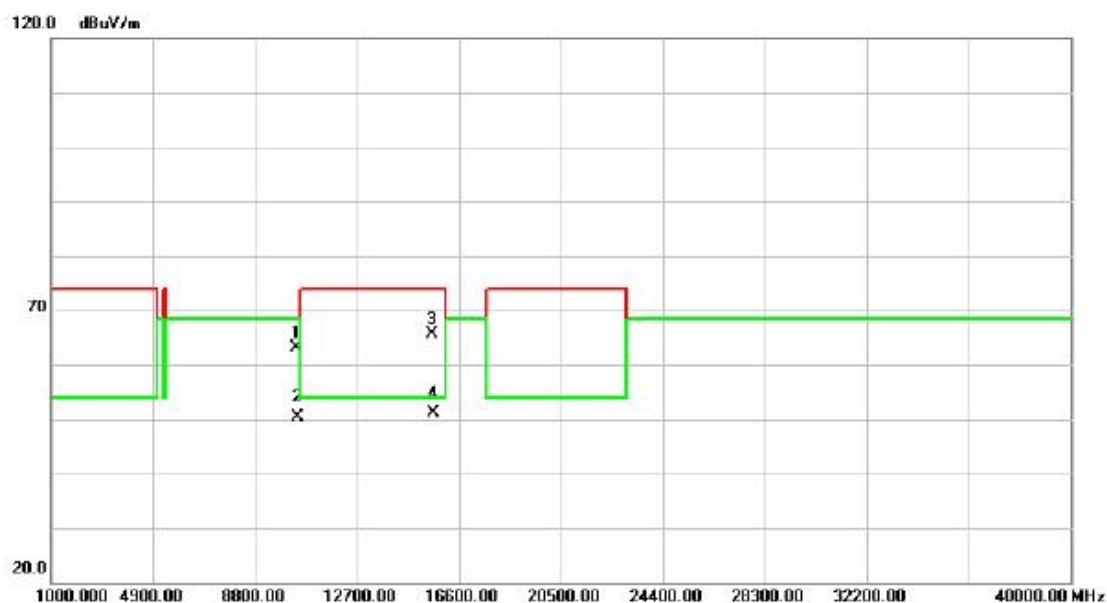

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10380.55	45.27	17.83	63.10	68.30	-5.20	peak	
2		10380.55	32.62	17.83	50.45	68.30	-17.85	AVG	
3		15569.81	46.35	19.31	65.66	74.00	-8.34	peak	
4	*	15569.81	31.91	19.31	51.22	54.00	-2.78	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

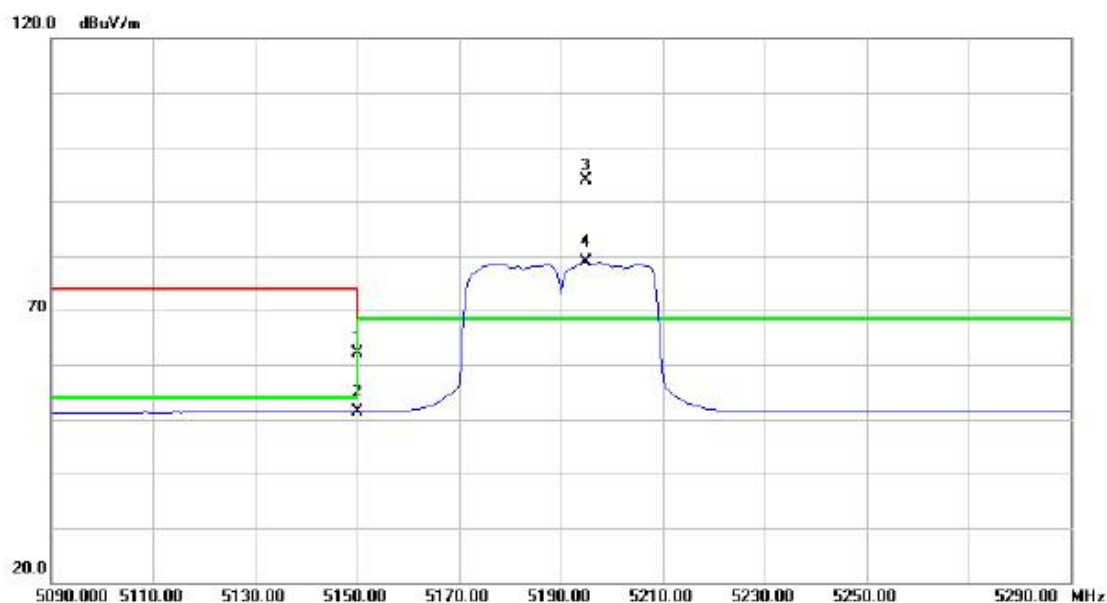

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	24.30	37.74	62.04	68.30	-6.26	peak	
2		5150.000	13.76	37.74	51.50	54.00	-2.50	AVG	
3	*	5195.000	55.99	37.89	93.88	68.30	25.58	peak	no limit
4	X	5195.000	40.96	37.89	78.85	68.30	10.55	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

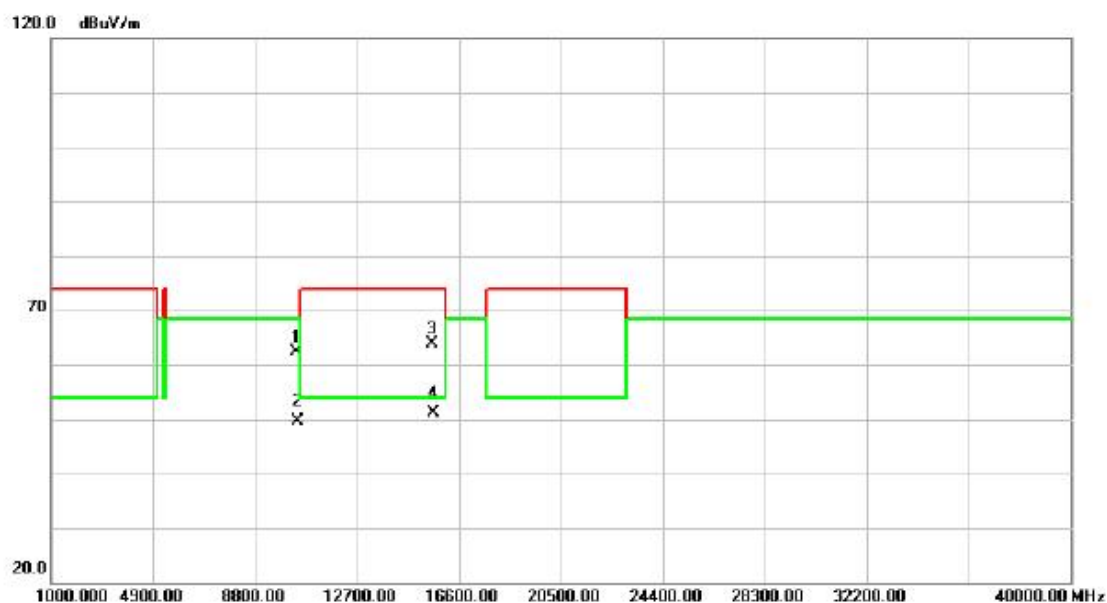

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10380.39	44.63	17.83	62.46	68.30	-5.84	peak	
2		10380.39	31.83	17.83	49.66	68.30	-18.64	AVG	
3		15570.04	44.46	19.31	63.77	74.00	-10.23	peak	
4	*	15570.04	31.80	19.31	51.11	54.00	-2.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

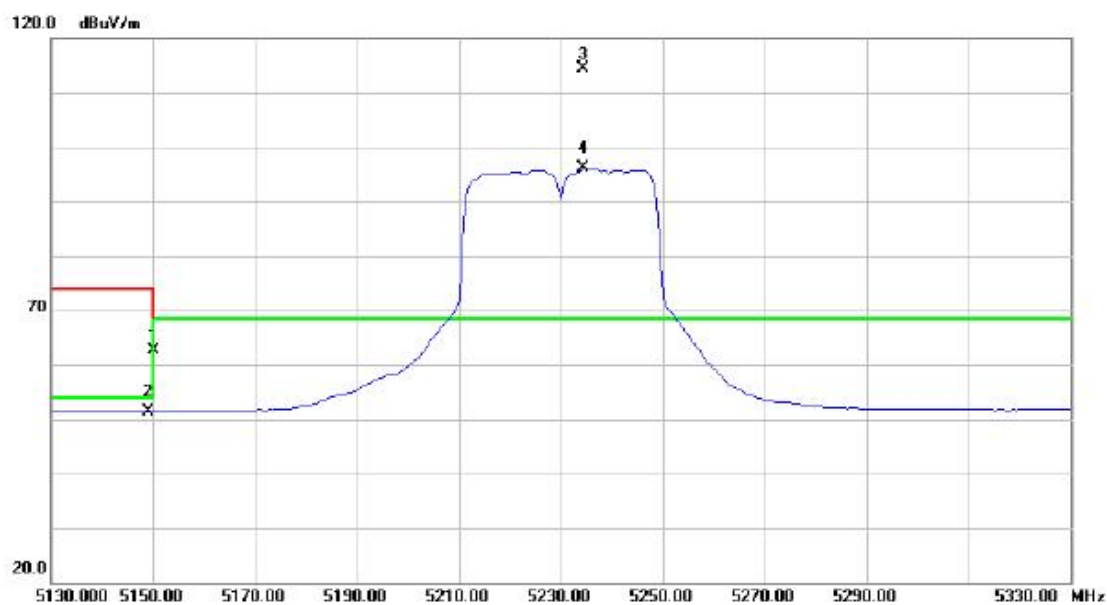

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	24.88	37.74	62.62	68.30	-5.68	peak	
2		5150.000	13.71	37.74	51.45	54.00	-2.55	AVG	
3	*	5234.500	76.43	38.03	114.46	68.30	46.16	peak	no limit
4	X	5234.500	58.15	38.03	96.18	68.30	27.88	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

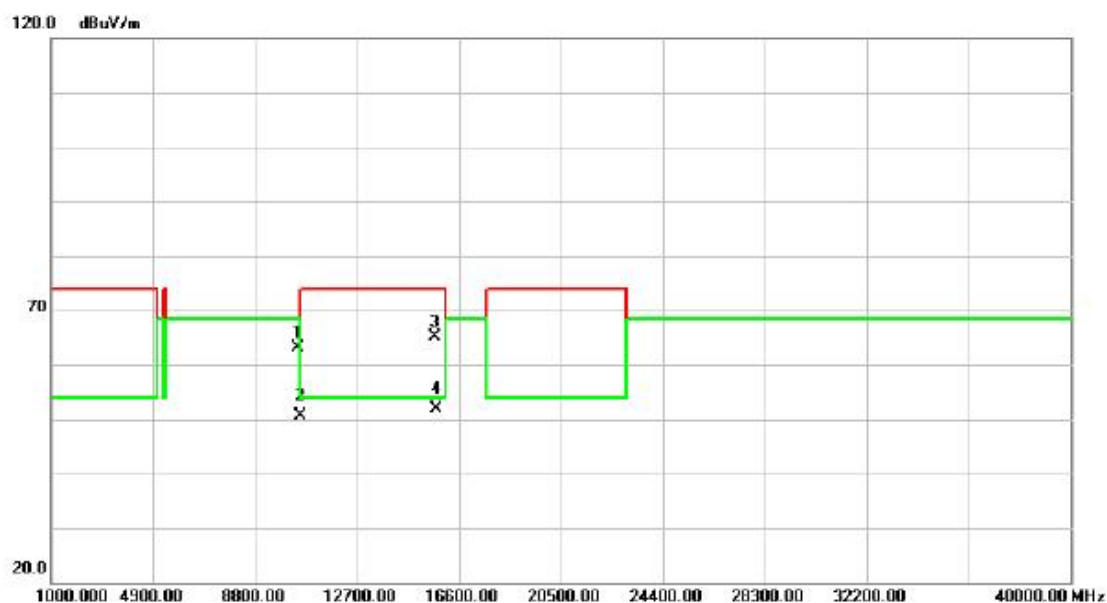

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10460.21	44.96	18.21	63.17	68.30	-5.13	peak	
2		10460.21	32.35	18.21	50.56	68.30	-17.74	AVG	
3		15690.83	45.83	19.35	65.18	74.00	-8.82	peak	
4	*	15690.83	32.58	19.35	51.93	54.00	-2.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

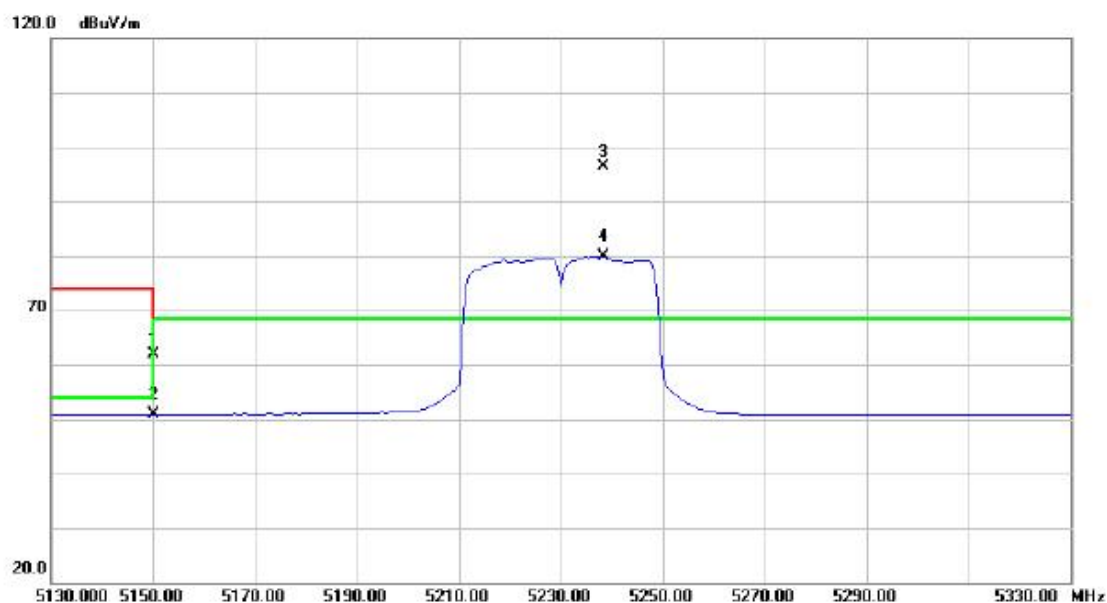

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	24.10	37.74	61.84	68.30	-6.46	peak	
2		5150.000	13.21	37.74	50.95	54.00	-3.05	AVG	
3	*	5238.500	58.36	38.05	96.41	68.30	28.11	peak	no limit
4	X	5238.500	41.93	38.05	79.98	68.30	11.68	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

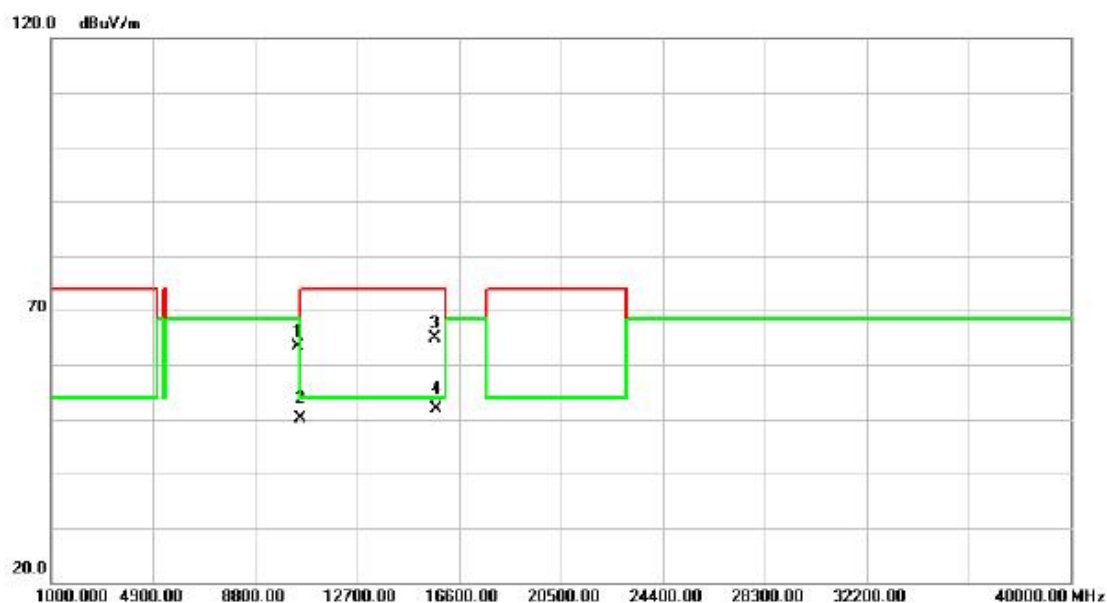

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10460.71	45.18	18.21	63.39	68.30	-4.91	peak	
2		10460.71	31.99	18.21	50.20	68.30	-18.10	AVG	
3		15689.23	45.56	19.36	64.92	74.00	-9.08	peak	
4	*	15689.23	32.63	19.36	51.99	54.00	-2.01	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

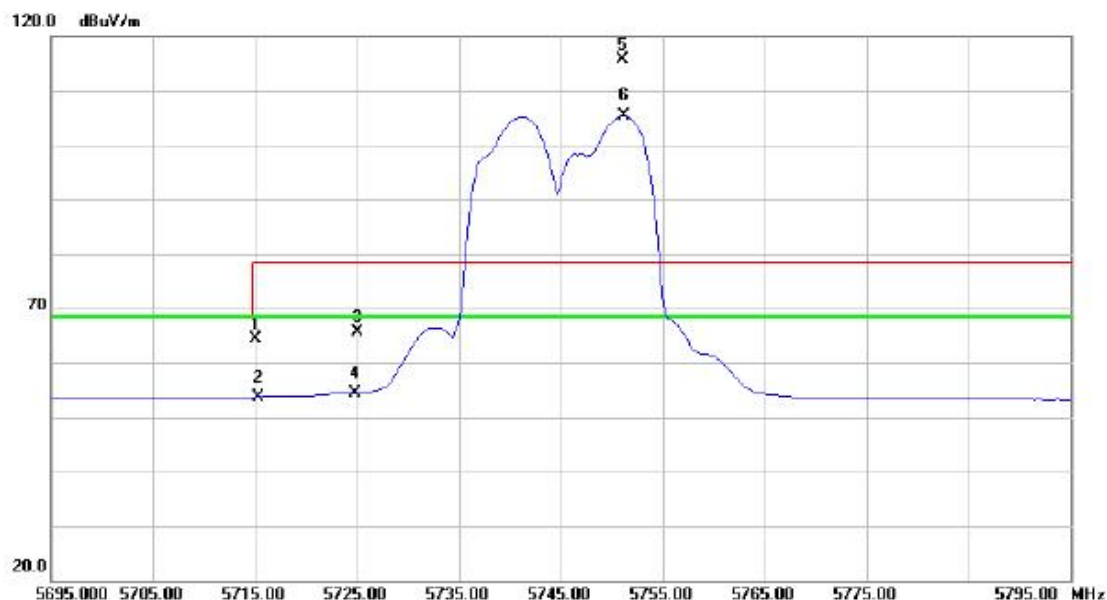

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	24.85	39.43	64.28	68.30	-4.02	peak	
2		5715.000	14.30	39.43	53.73	68.30	-14.57	AVG	
3		5725.000	26.10	39.45	65.55	78.30	-12.75	peak	
4		5725.000	14.90	39.45	54.35	68.30	-13.95	AVG	
5	*	5751.000	76.09	39.51	115.60	78.30	37.30	peak	no limit
6	X	5751.000	65.81	39.51	105.32	68.30	37.02	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

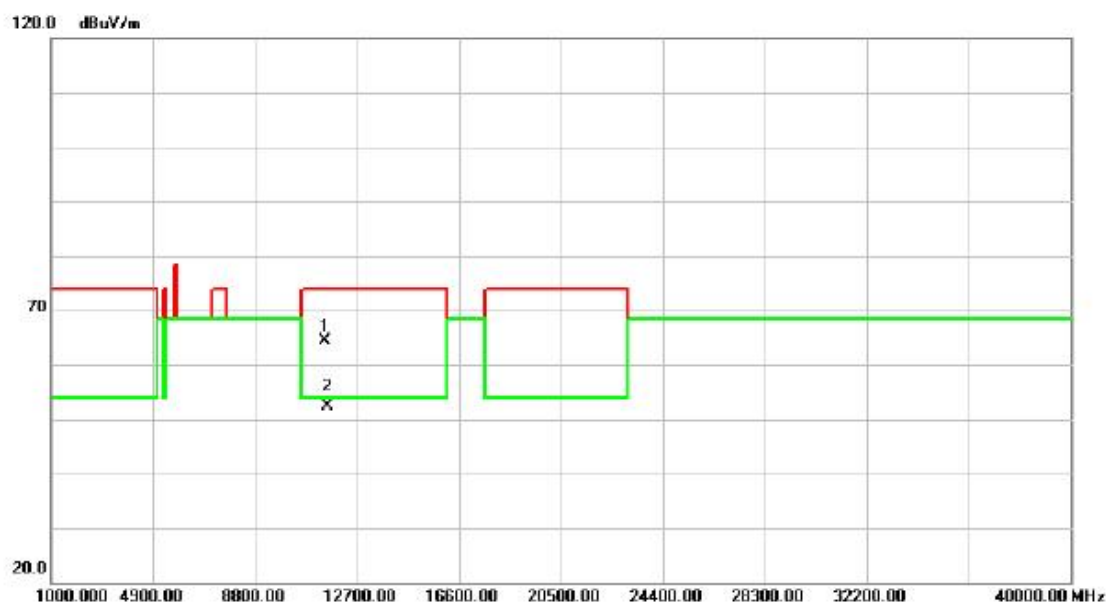

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.90	43.97	20.34	64.31	74.00	-9.69	peak	
2	*	11490.90	31.94	20.34	52.28	54.00	-1.72	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

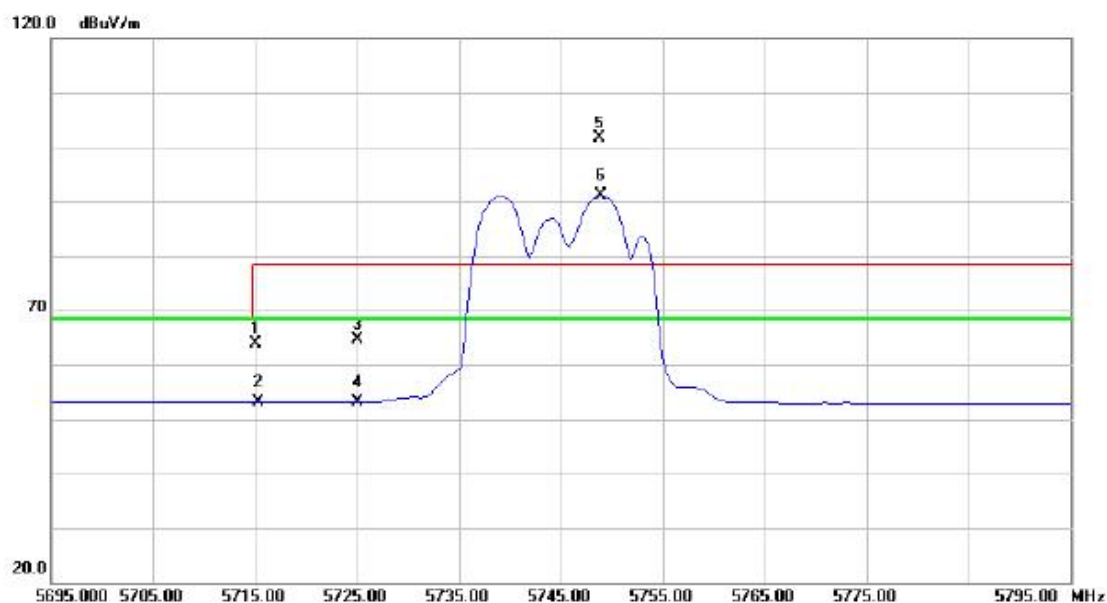

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	24.36	39.43	63.79	68.30	-4.51	peak	
2		5715.000	13.70	39.43	53.13	68.30	-15.17	AVG	
3		5725.000	25.18	39.45	64.63	78.30	-13.67	peak	
4		5725.000	13.68	39.45	53.13	68.30	-15.17	AVG	
5	*	5748.750	62.01	39.51	101.52	78.30	23.22	peak	no limit
6	X	5748.750	51.51	39.51	91.02	68.30	22.72	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

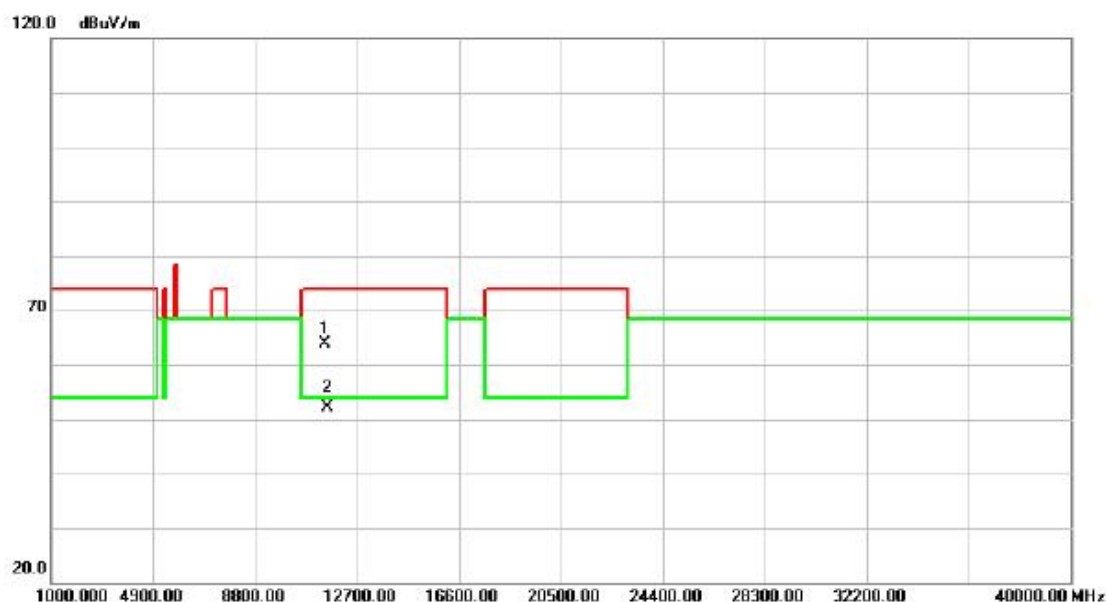

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.07	43.49	20.34	63.83	74.00	-10.17	peak	
2	*	11490.07	31.71	20.34	52.05	54.00	-1.95	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

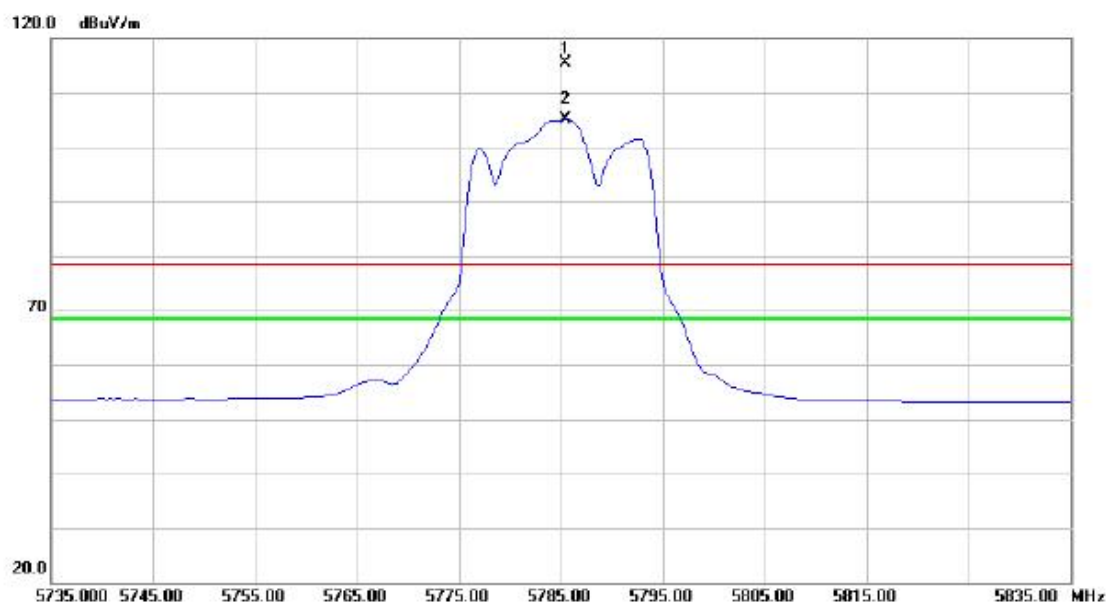

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5785.500	75.82	39.59	115.41	78.30	37.11	peak	no limit
2	X	5785.500	65.47	39.59	105.06	68.30	36.76	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

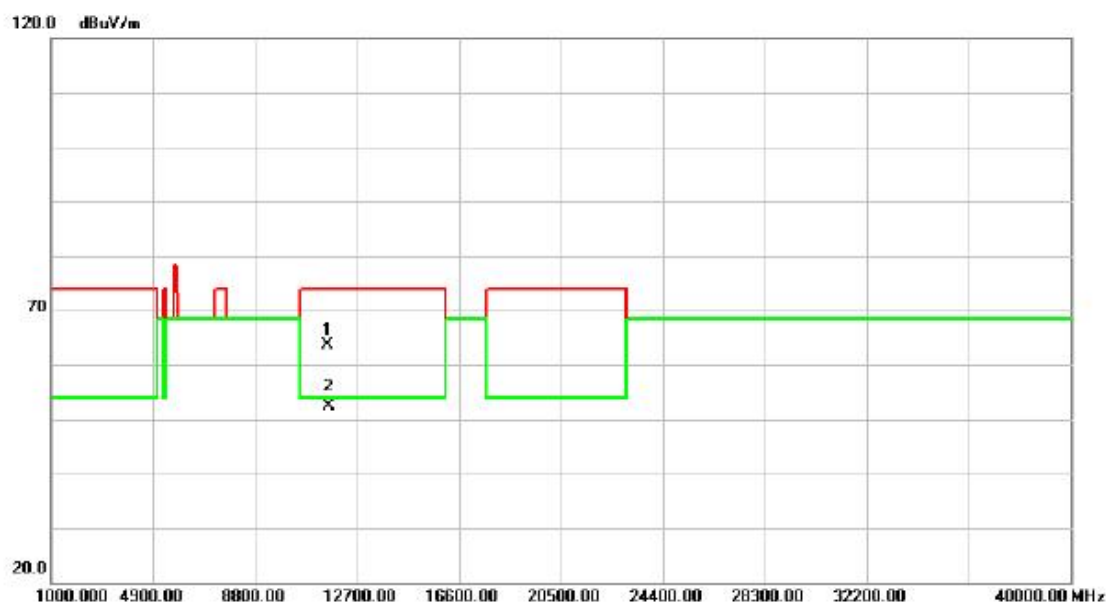

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11571.00	43.18	20.42	63.60	74.00	-10.40	peak	
2	*	11571.00	31.93	20.42	52.35	54.00	-1.65	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

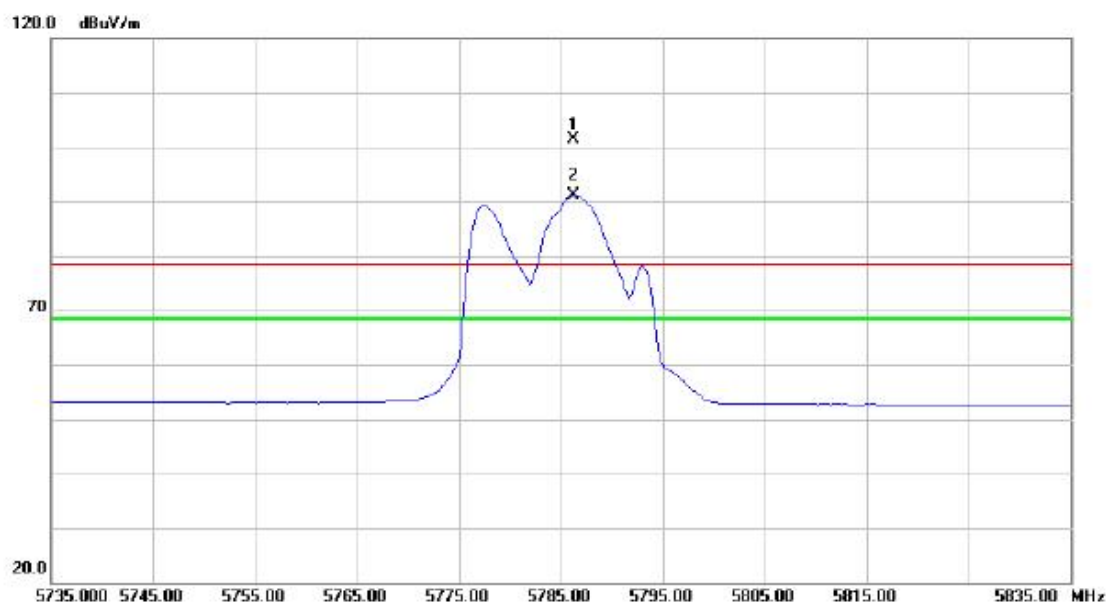

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5786.250	61.67	39.60	101.27	78.30	22.97	peak	no limit
2	X	5786.250	51.42	39.60	91.02	68.30	22.72	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Horizontal

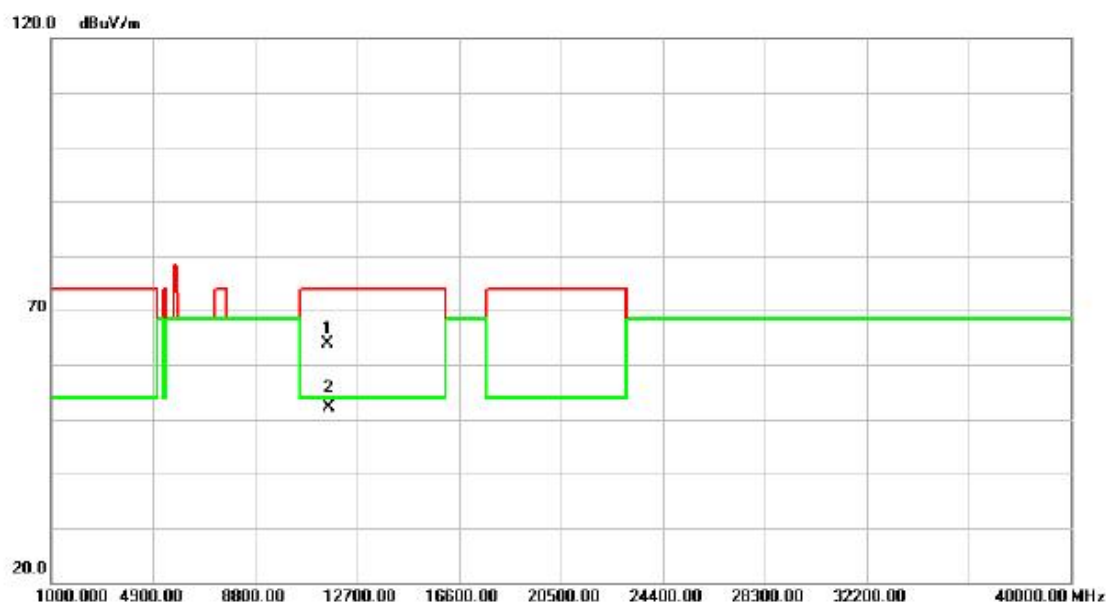

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11569.98	43.41	20.41	63.82	74.00	-10.18	peak	
2	*	11569.98	31.75	20.41	52.16	54.00	-1.84	AVG	