

## TEST REPORT

**Product** : WIFI+BT Module  
**Trade mark** : GSD  
**Model/Type reference** : WCT5LM2001  
**Serial Number** : N/A  
**Report Number** : EED32L00242601  
**FCC ID** : 2AC23-WCT5L  
**Date of Issue** : Dec. 04, 2019  
**Test Standards** : 47 CFR Part 15Subpart C  
**Test result** : PASS

Prepared for:

**Hui Zhou Gaoshengda Technology Co.,LTD**  
**NO.75 Zhongkai Development Area,Huizhou,Guangdong, China**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Tested By:

*mark.chen.*

Mark Chen

Compiled by:

*smile zhong*

Smile Zhong

Reviewed by:

*Ware Xin*

Ware Xin

Approved by:

*Kevin Yang*

Kevin Yang

Date:

Dec. 04, 2019

Check No.: 3096388499



## 2 Version

Version No.	Date	Description
00	Dec. 04, 2019	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious Emissions</b>	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


## 4 Content

<b>1 COVER PAGE</b>	<b>1</b>
<b>2 VERSION</b>	<b>2</b>
<b>3 TEST SUMMARY</b>	<b>3</b>
<b>4 CONTENT</b>	<b>4</b>
<b>5 TEST REQUIREMENT</b>	<b>5</b>
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
<b>6 GENERAL INFORMATION</b>	<b>7</b>
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 DEVIATION FROM STANDARDS	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
<b>7 EQUIPMENT LIST</b>	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>14</b>
EUT DUTY CYCLE	15
Appendix A): 6dB Occupied Bandwidth	17
Appendix B): Conducted Peak Output Power	23
Appendix C): Band-edge for RF Conducted Emissions	27
Appendix D): RF Conducted Spurious Emissions	31
Appendix E): Power Spectral Density	39
Appendix F): Antenna Requirement	43
Appendix G): AC Power Line Conducted Emission	44
Appendix H): Restricted bands around fundamental frequency (Radiated)	47
Appendix I) Radiated Spurious Emissions	64
<b>PHOTOGRAPHS OF TEST SETUP</b>	<b>71</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	<b>75</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

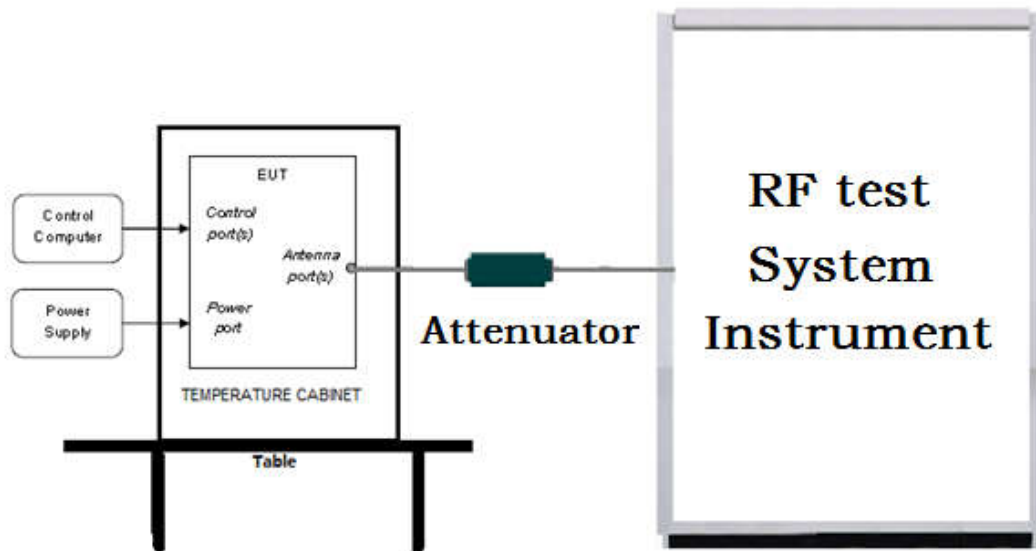

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

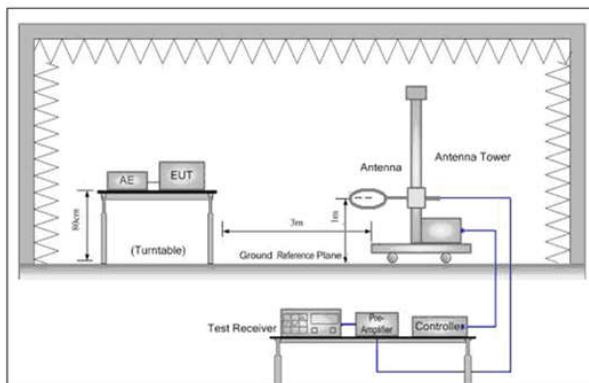


Figure 1. Below 30MHz

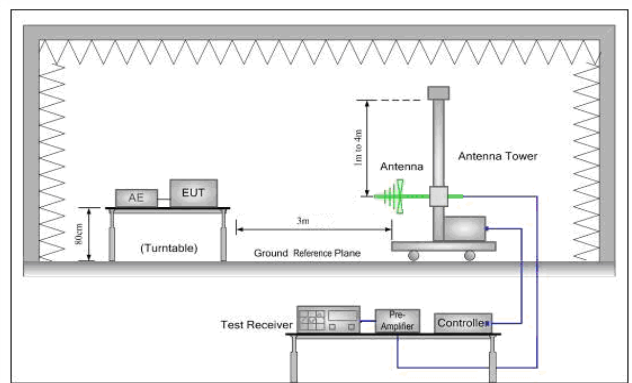


Figure 2. 30MHz to 1GHz


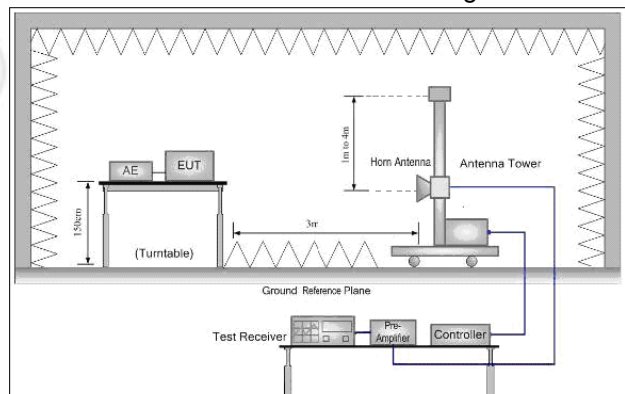


Figure 3. Above 1GHz



### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

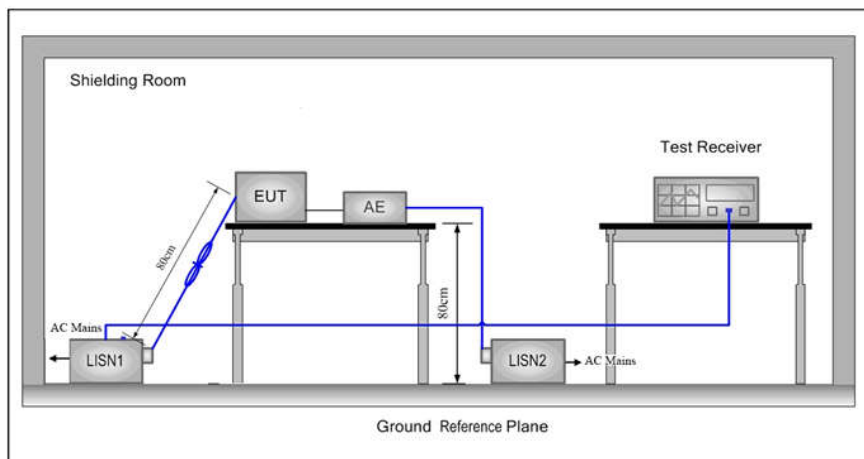

## 5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	1011mbar

## 5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2480 MHz	Channel 1	Channel 20	Channel 40
		2402MHz	2440MHz	2480MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

## 6 General Information

### 6.1 Client Information

Applicant:	Hui Zhou Gaoshengda Technology Co.,LTD
Address of Applicant:	NO.75 Zhongkai Development Area,Huizhou,Guangdong, China
Manufacturer:	Hui Zhou Gaoshengda Technology Co.,LTD
Address of Manufacturer:	NO.75 Zhongkai Development Area,Huizhou,Guangdong, China
Factory:	Hui Zhou Gaoshengda Technology Co.,LTD
Address of Factory:	NO.75 Zhongkai Development Area,Huizhou,Guangdong, China

### 6.2 General Description of EUT

Product Name:	WIFI+BT Module
Model No.(EUT):	WCT5LM2001
Trade mark:	GSD
EUT Supports Radios application:	BT5.0 Dual mode 2402MHz to 2480MHz
Power Supply:	DC 3.3V
Sample Received Date:	Aug. 29, 2019
Sample tested Date:	Aug. 29, 2019 to Nov. 04, 2019

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	5.0
Modulation Technique:	DSSS
Modulation Type:	GFSK
Number of Channel:	40
Test Power Grade:	Reference Table
Test Software of EUT:	WCN Combo Tool
Antenna Type and Gain:	Type: PIFA antenna Gain: 2dBi
Test Voltage:	DC 3.3V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

## 6.4 Description of Support Units

The EUT has been tested independently

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.



## 6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-29-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-29-2020
Attenuator	HuaXiang	SHX370	15040701	03-01-2019	02-29-2020
Signal Generator	Keysight	N5181A	MY46240094	03-01-2019	02-29-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-29-2020
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-09-2019	01-08-2020
Communication test set	R&S	CMW500	107929	04-28-2019	04-27-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-29-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-29-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-29-2020
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	03-01-2019	02-29-2020
high-low temperature test chamber	DongGuangQinZhuo	LK-80GA	QZ20150611879	03-01-2019	02-29-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2022
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
LISN	schwarzbeck	NNLK8121	8121-529	05-08-2019	05-07-2020
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-12-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-20-2019	05-19-2020
ISN	TESEQ	ISN T800	30297	01-16-2019	01-15-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Microwave Preamplifier	Agilent	8449B	3008A02425	07-12-2019	07-11-2020
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057410	06-05-2018	06-04-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-27-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Receiver	R&S	ESCI7	100938-003	11-23-2018	11-22-2019
Multi device Controller	maturo	NCD/070/10711112	---	01-09-2019	01-08-2020
Signal Generator	Agilent	E4438C	MY45095744	03-01-2019	02-29-2020
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-29-2020
Temperature/Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Communication test set	Agilent	E5515C	GB47050534	03-01-2019	02-28-2022
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
High-pass filter	Sinoscite	FL3CX03WG18NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03CL12-0394-001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-24-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-24-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-13-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-21-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	Agilent	8449B	3008A02425	07-12-2019	07-11-2020
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020



## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices


### Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

## EUT DUTY CYCLE


For 1M

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
BLE	0.1343	0.6232	21.55%

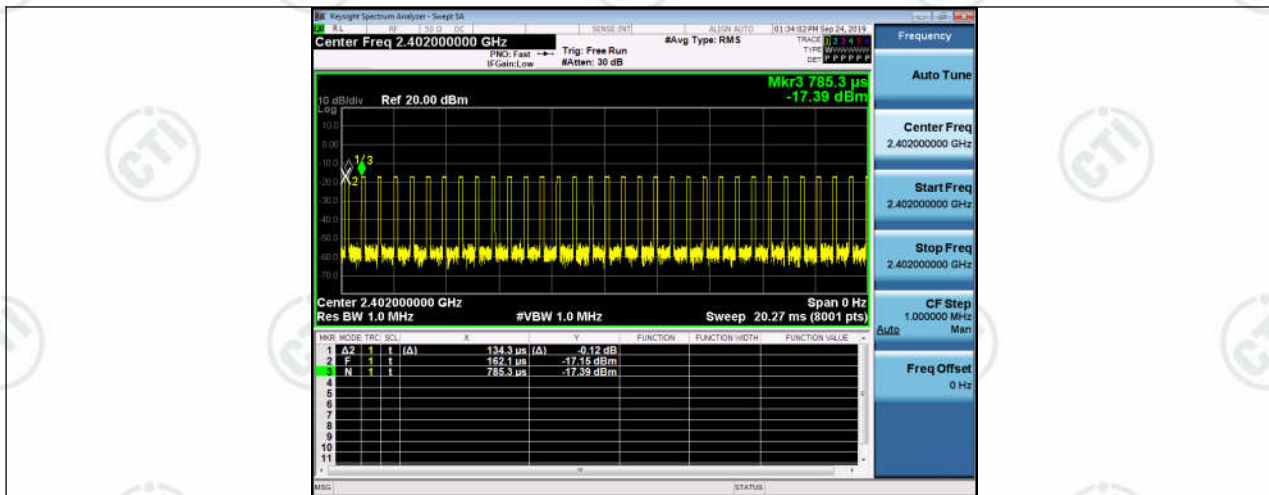

For 2M

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
BLE	1.065	1.875	56.8%

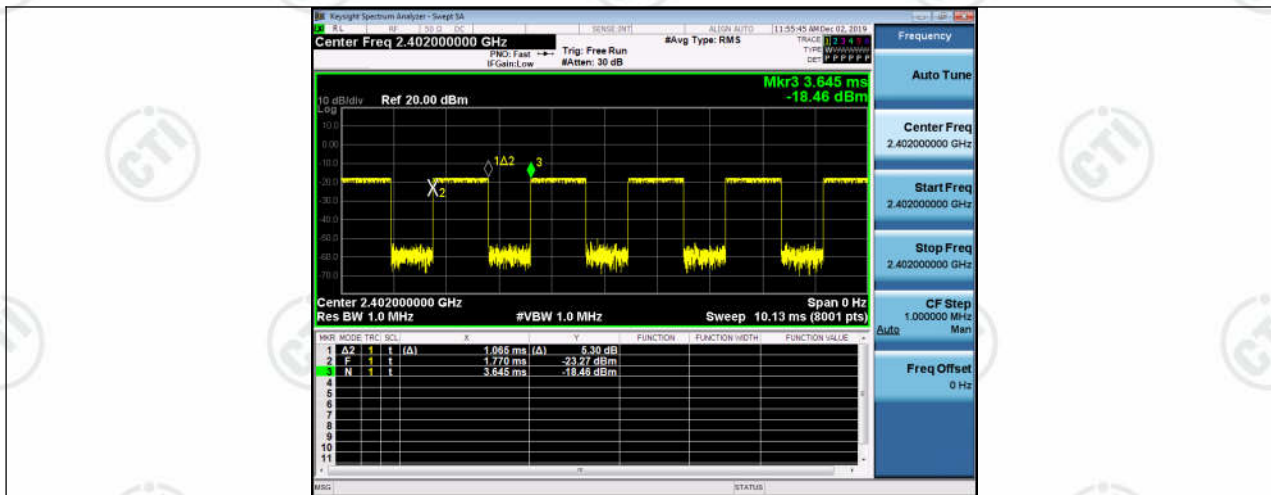

## Appendix A): 6dB Occupied Bandwidth

### Test Limit

According to §15.247(a)(2) and RSS-247 section 5.2(a)

### 6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------

**Occupied Bandwidth(99%) :** For reporting purposes only.

### Test Procedure

Test method Refer as KDB 558074 D01 v04, section 8.1 and ANSI 63.10:2013 clause 6.9.2 & 6.9.3.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

### Test Setup



**Test Result For 1M**

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict
BLE	LCH	0.6890	1.0233	PASS
BLE	MCH	0.6928	1.0232	PASS
BLE	HCH	0.6901	1.0232	PASS

**Test Result For 2M**

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict
BLE	LCH	2.0475	2.0580	PASS
BLE	MCH	2.0518	2.0577	PASS
BLE	HCH	2.0501	2.0569	PASS



## Test Graphs For 1M

Graphs	
LCH	
MCH	
HCH	

**99% OBW**

Graphs	
LCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 20.4 dB Ref 30.00 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth <b>1.0233 MHz</b></p> <p>Total Power 8.49 dBm</p> <p>Transmit Freq Error 17.835 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 567.2 kHz</p> <p>x dB -6.00 dB</p> <p>Frequency: Center Freq 2.402000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>
MCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 20.67 dB Ref 30.00 dBm</p> <p>Center 2.44 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth <b>1.0232 MHz</b></p> <p>Total Power 9.03 dBm</p> <p>Transmit Freq Error 17.474 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 568.6 kHz</p> <p>x dB -6.00 dB</p> <p>Frequency: Center Freq 2.440000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>
HCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 20.67 dB Ref 30.00 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth <b>1.0232 MHz</b></p> <p>Total Power 9.42 dBm</p> <p>Transmit Freq Error 16.757 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 568.5 kHz</p> <p>x dB -6.00 dB</p> <p>Frequency: Center Freq 2.480000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>

## Test Graphs For 2M

Graphs	
LCH	<p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 20.4 dB Ref 30.00 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth <b>2.0580 MHz</b></p> <p>Total Power 8.70 dBm</p> <p>Transmit Freq Error 15.288 kHz</p> <p>x dB Bandwidth 1.283 MHz</p>
MCH	<p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 20.67 dB Ref 30.00 dBm</p> <p>Center 2.44 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth <b>2.0577 MHz</b></p> <p>Total Power 9.19 dBm</p> <p>Transmit Freq Error 15.086 kHz</p> <p>x dB Bandwidth 1.284 MHz</p>
HCH	<p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 20.67 dB Ref 30.00 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth <b>2.0569 MHz</b></p> <p>Total Power 9.06 dBm</p> <p>Transmit Freq Error 14.062 kHz</p> <p>x dB Bandwidth 1.284 MHz</p>

## 6dB Bandwidth

Graphs	
LCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 20.4 dB Ref 30.00 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth <b>2.0475 MHz</b></p> <p>Total Power 9.61 dBm</p> <p>Transmit Freq Error 7.551 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.239 MHz</p> <p>x dB -6.00 dB</p>
MCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 20.67 dB Ref 30.00 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth <b>2.0518 MHz</b></p> <p>Total Power 9.97 dBm</p> <p>Transmit Freq Error 4.480 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.239 MHz</p> <p>x dB -6.00 dB</p>
HCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 20.67 dB Ref 30.00 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth <b>2.0501 MHz</b></p> <p>Total Power 10.5 dBm</p> <p>Transmit Freq Error 4.662 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.234 MHz</p> <p>x dB -6.00 dB</p>



## Appendix B): Conducted Peak Output Power

### Test Limit

According to §15.247(b) and RSS-247 section 5.4(d)

#### Peak output power:

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [ Limit = 30 – (DG – 6) ] <input type="checkbox"/> Point-to-point operation
-------	--

### Test Procedure

Test method Refer as KDB 558074 D01 v04, section 9.1.2.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

### Test Setup

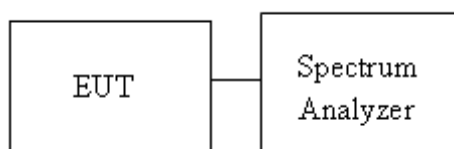




**Test Result For 1M**

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	3.602	PASS
BLE	MCH	4.158	PASS
BLE	HCH	4.551	PASS


**Test Result For 2M**

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	2.584	PASS
BLE	MCH	3.09	PASS
BLE	HCH	3.025	PASS

## Test Graphs For 1M

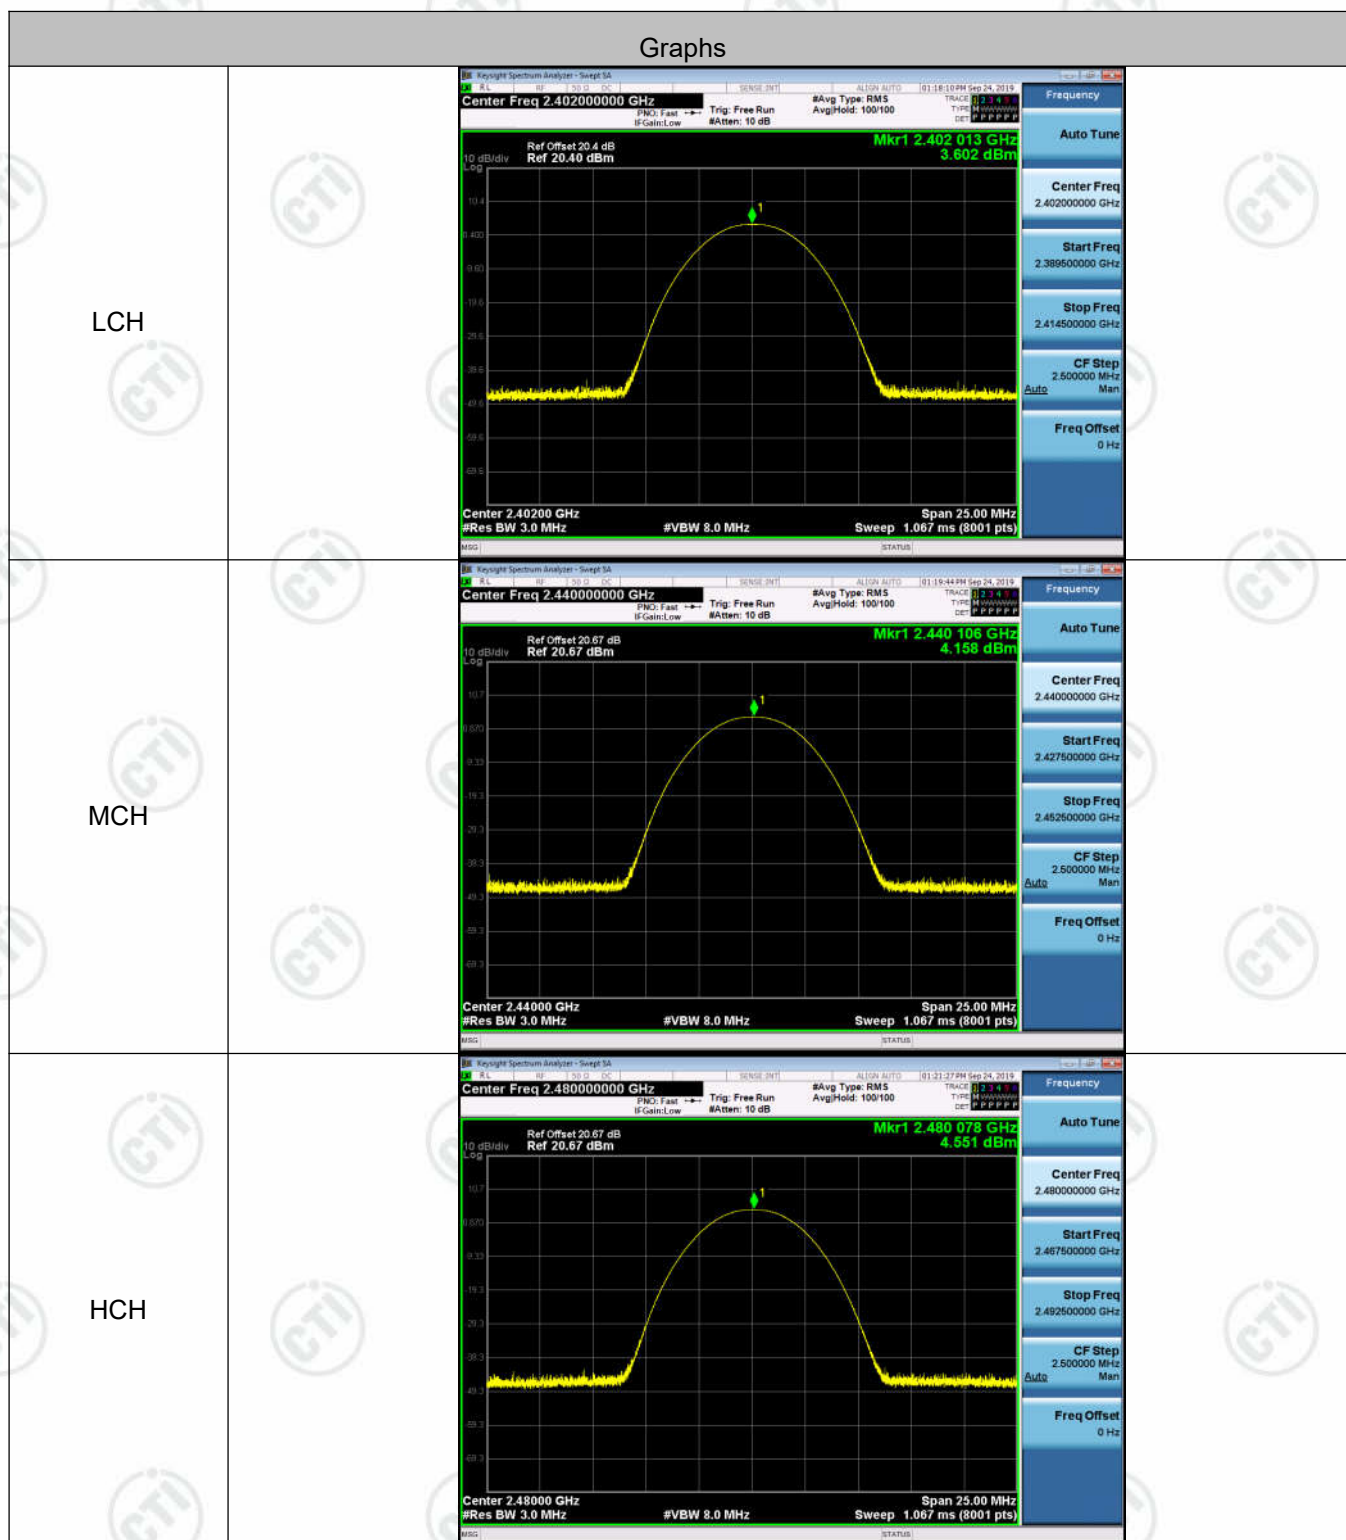

## Test Graphs For 2M

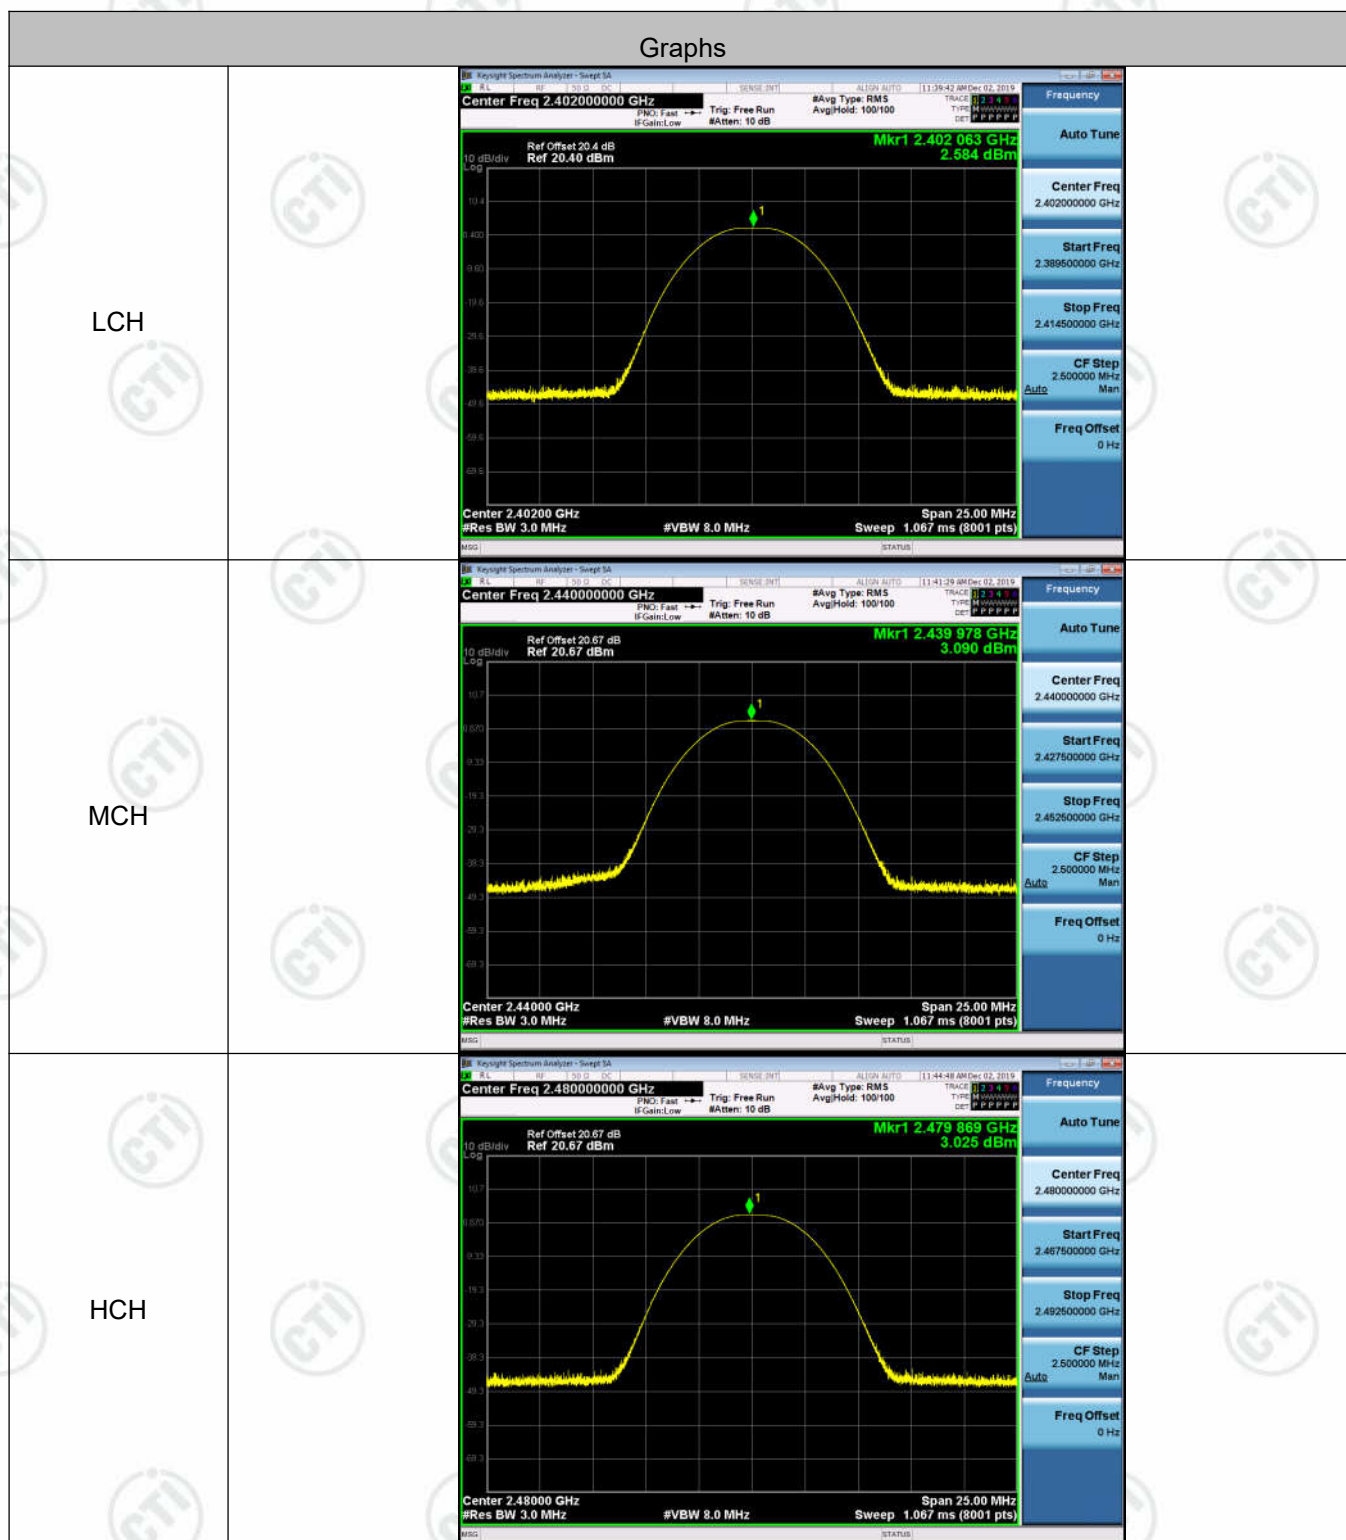

## Appendix C): Band-edge for RF Conducted Emissions

### Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### Test Setup



**Result Table For 1M**


Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	2.758	-59.878	-17.24	PASS
BLE	HCH	3.672	-59.078	-16.33	PASS

**Result Table For 2M**


Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	1.474	-60.355	-18.53	PASS
BLE	HCH	1.816	-56.950	-18.18	PASS



## Test Graphs For 1M

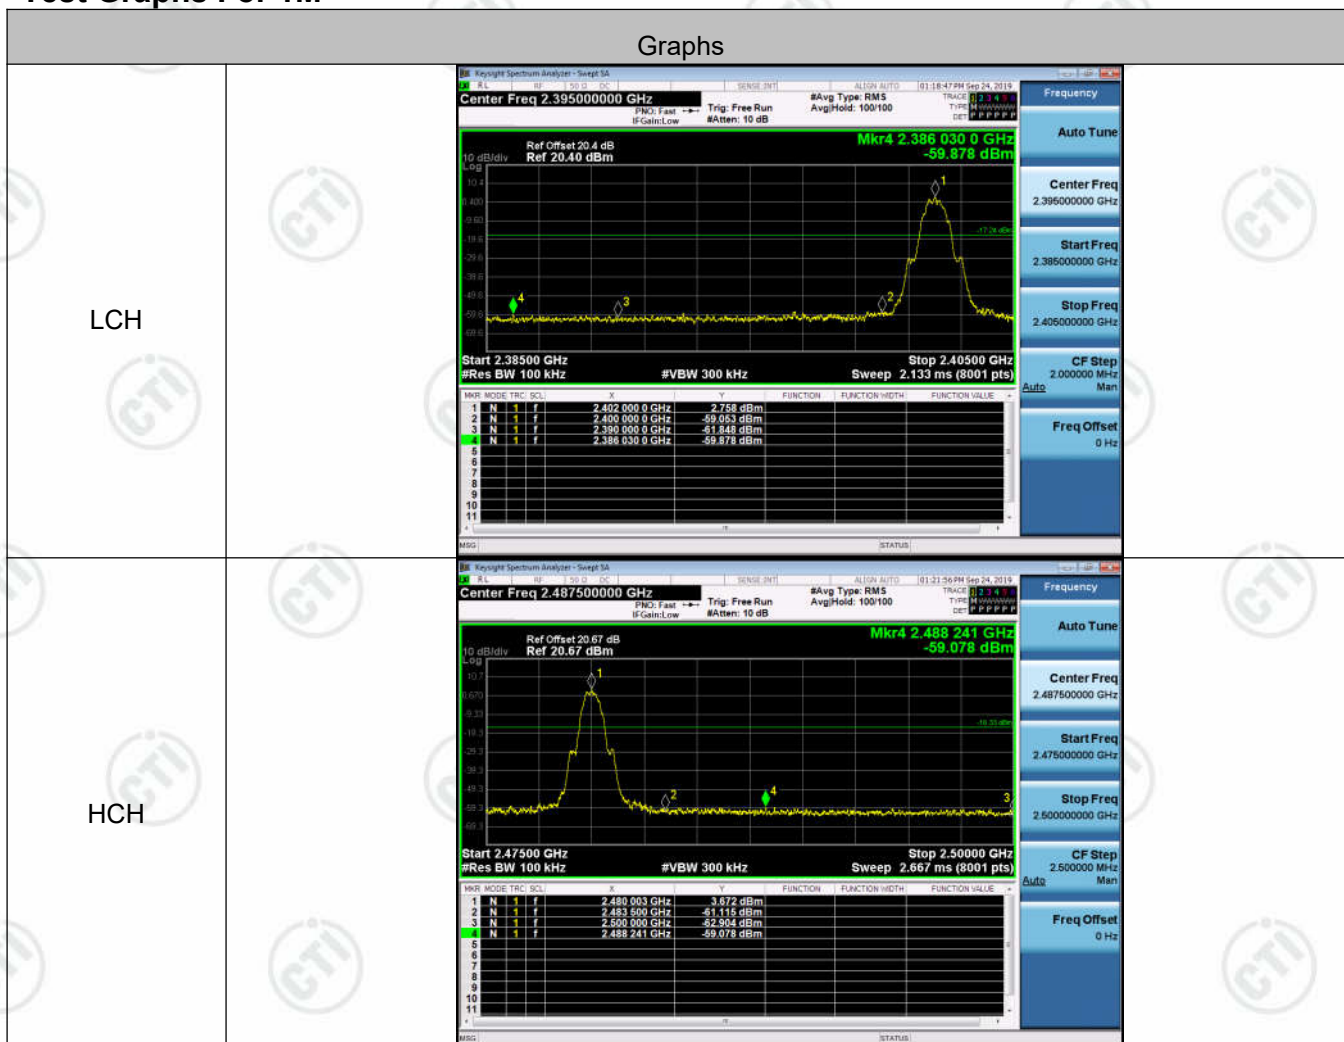

## Test Graphs For 2M

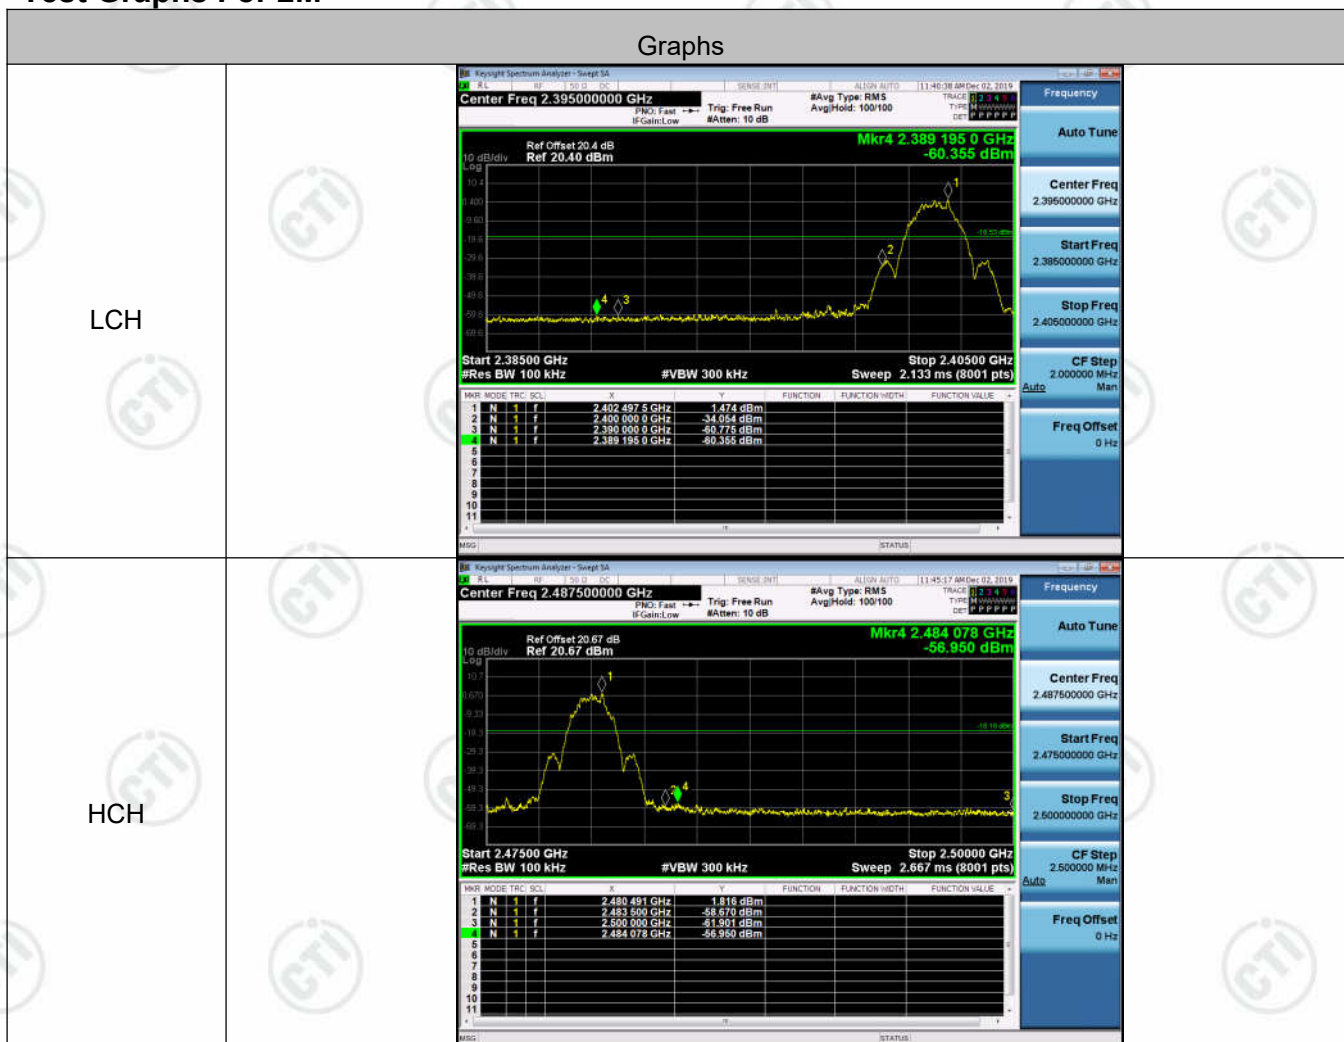

## **Appendix D): RF Conducted Spurious Emissions**

### **Test Limit**

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### **Test Procedure**

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### **Test Setup**




**Result Table For 1M**

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	2.529	<Limit	PASS
BLE	MCH	3.076	<Limit	PASS
BLE	HCH	3.473	<Limit	PASS


**Result Table For 2M**


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	1.115	<Limit	PASS
BLE	MCH	1.634	<Limit	PASS
BLE	HCH	1.494	<Limit	PASS

## Test Graphs For 1M

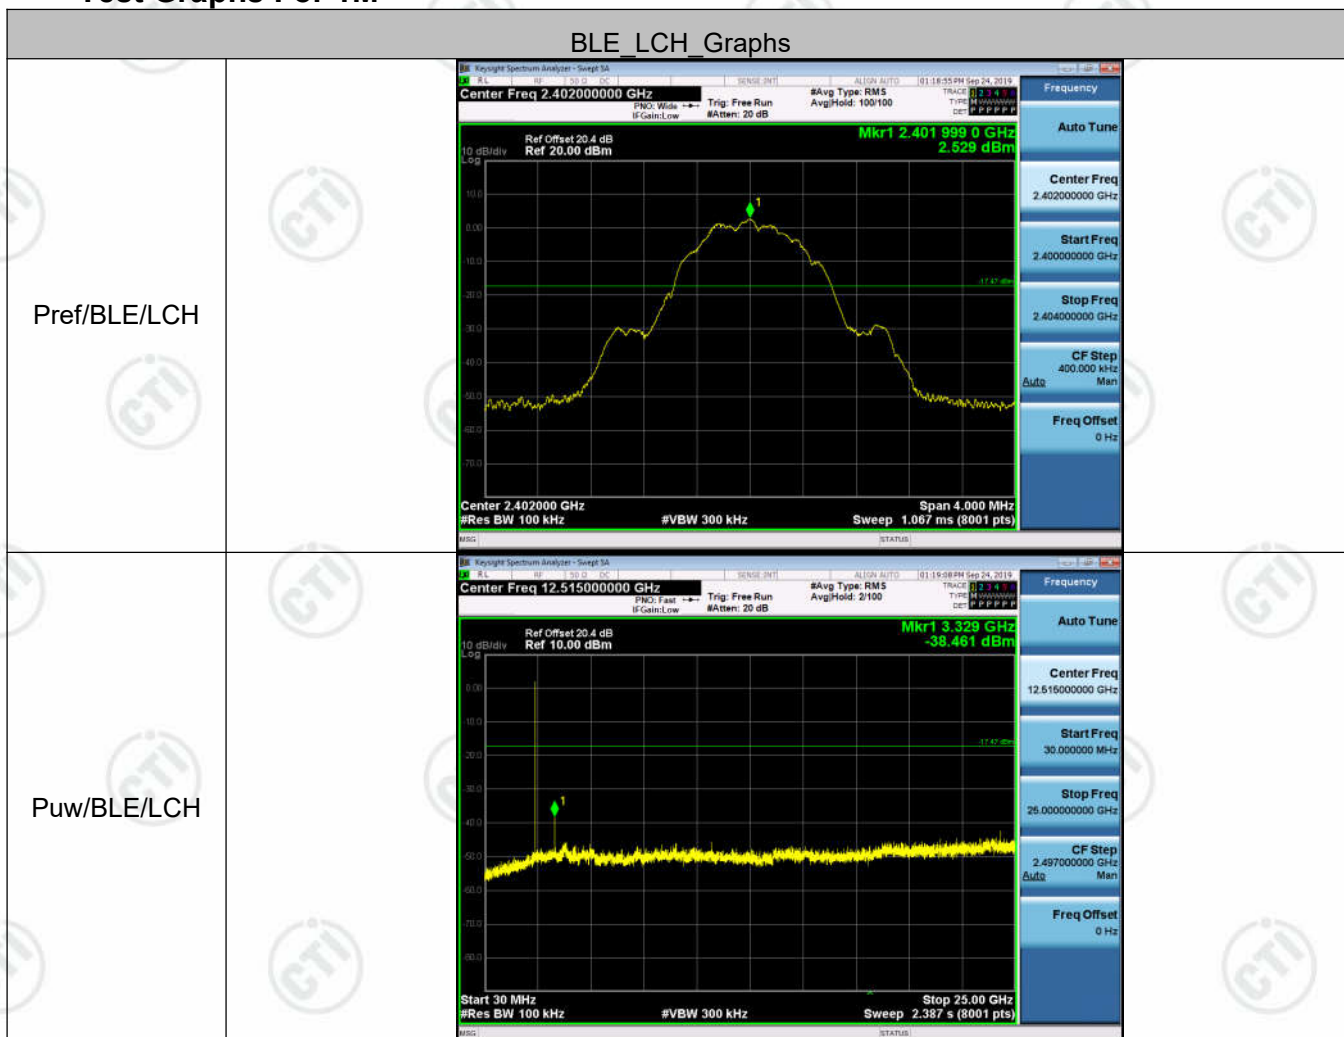





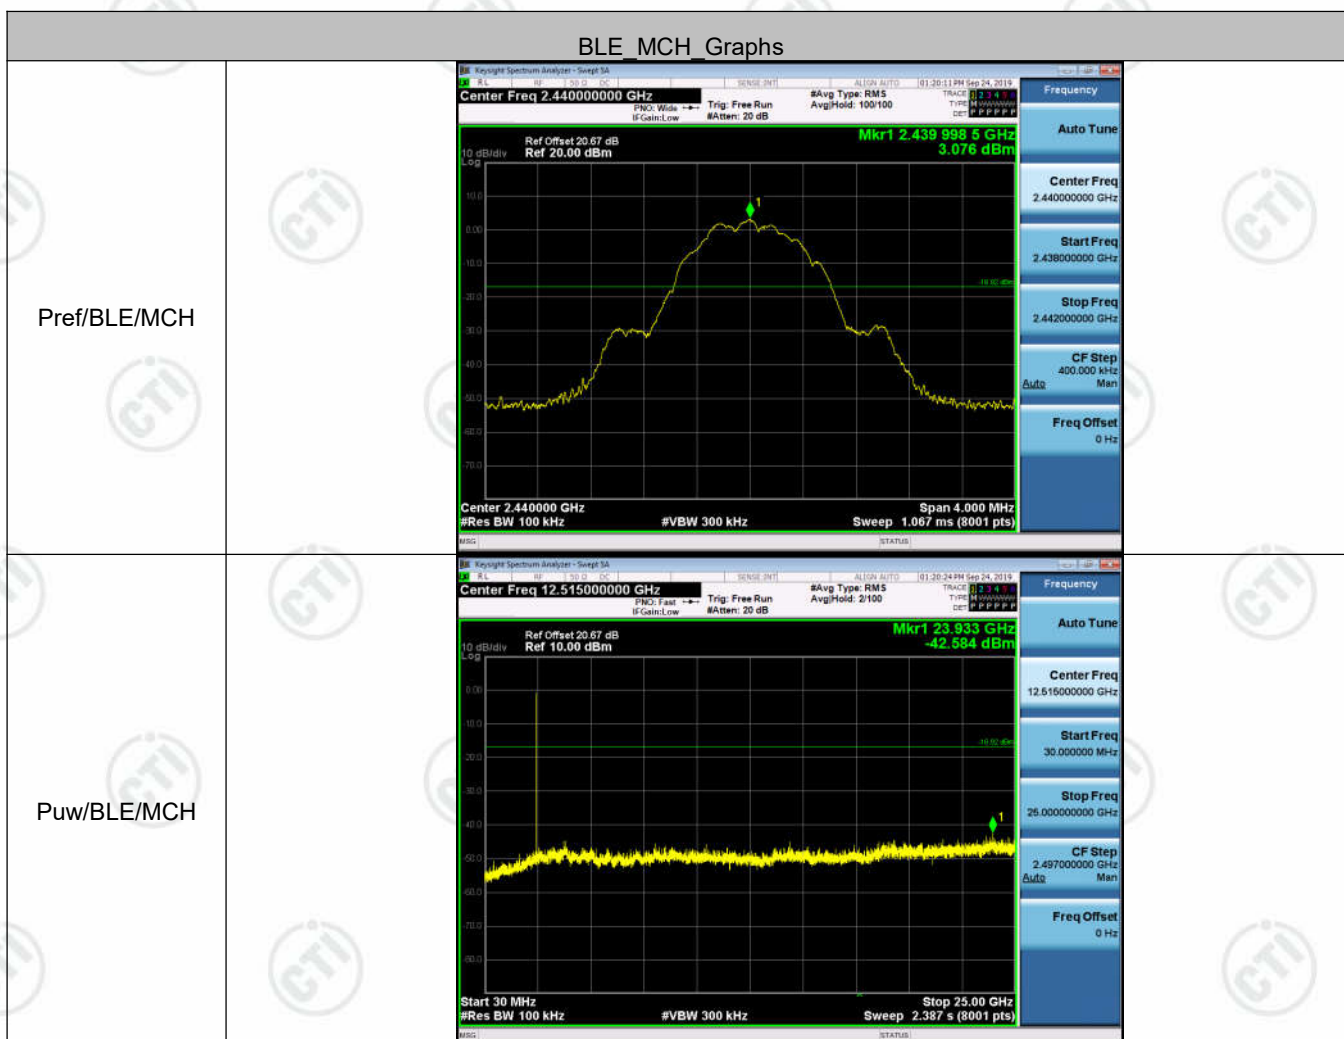


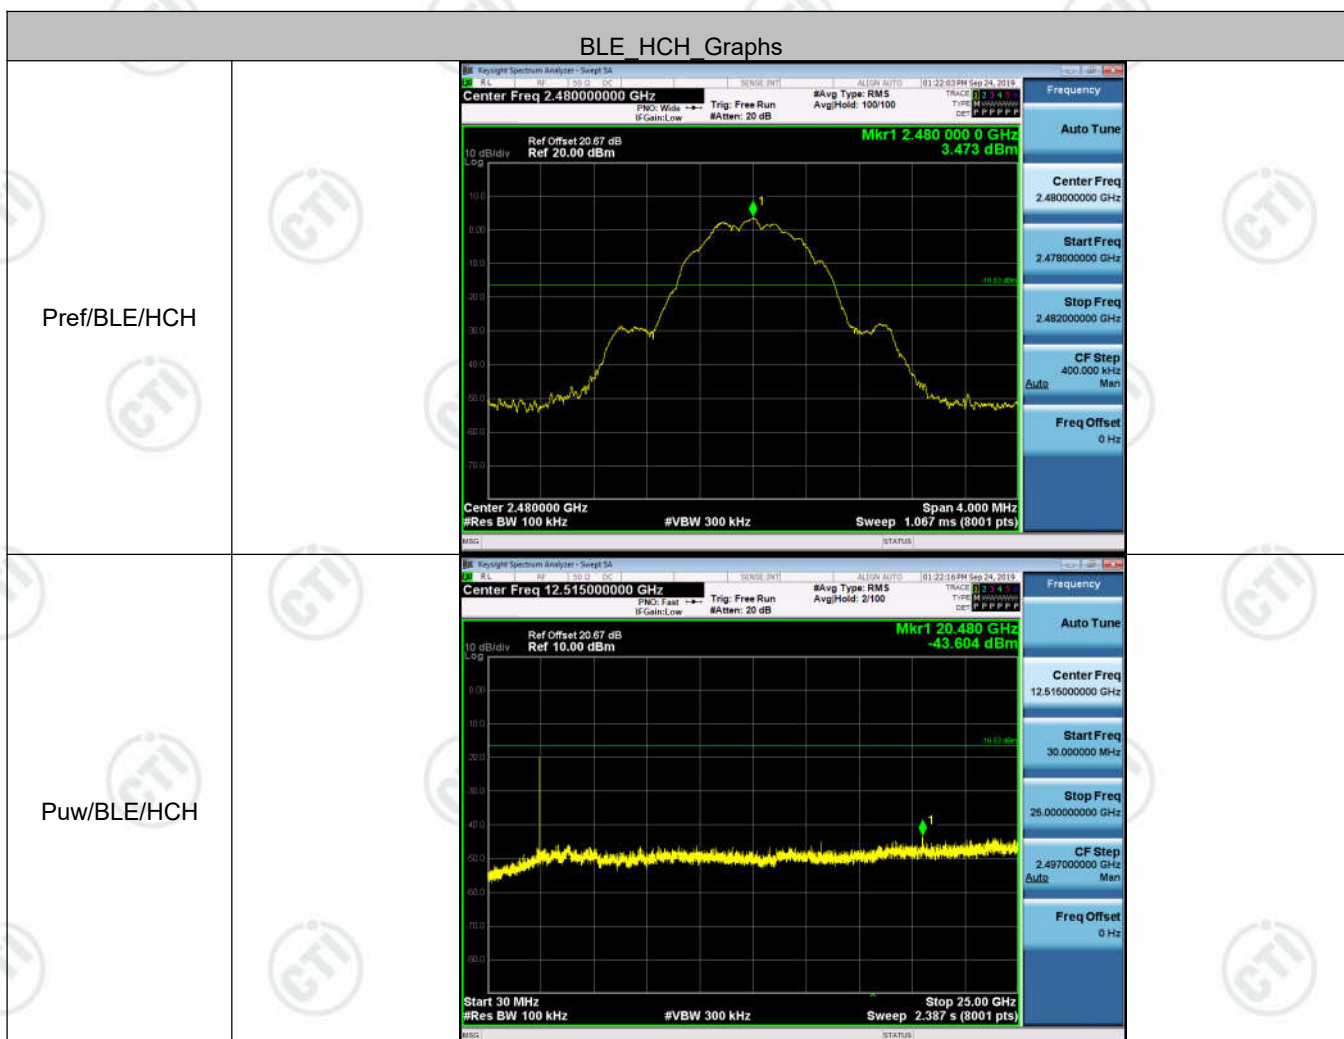

## Test Graphs For 2M

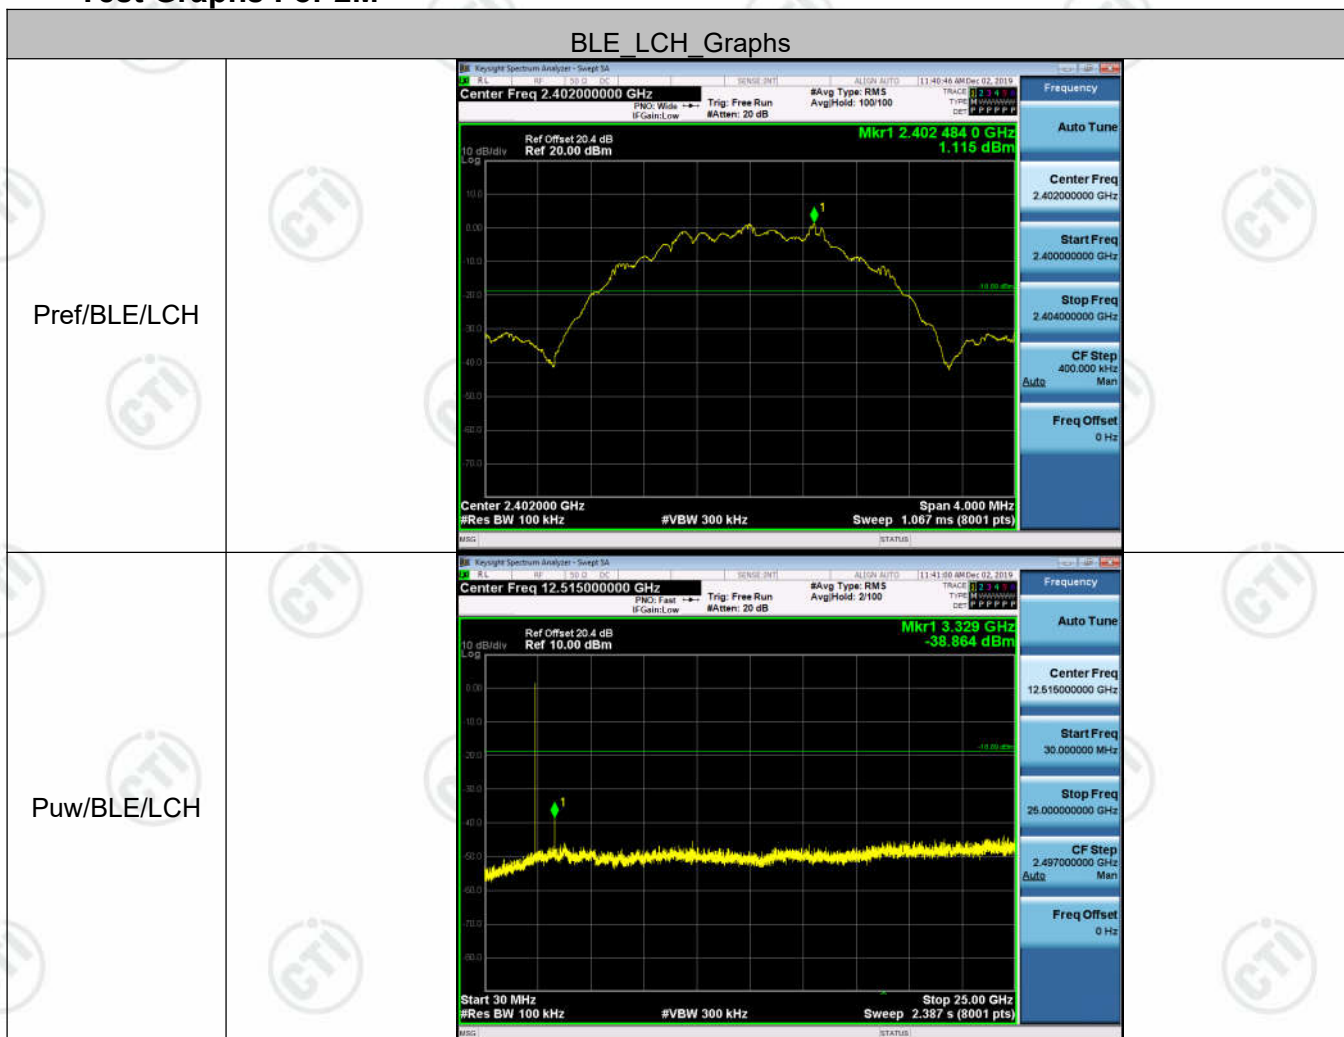

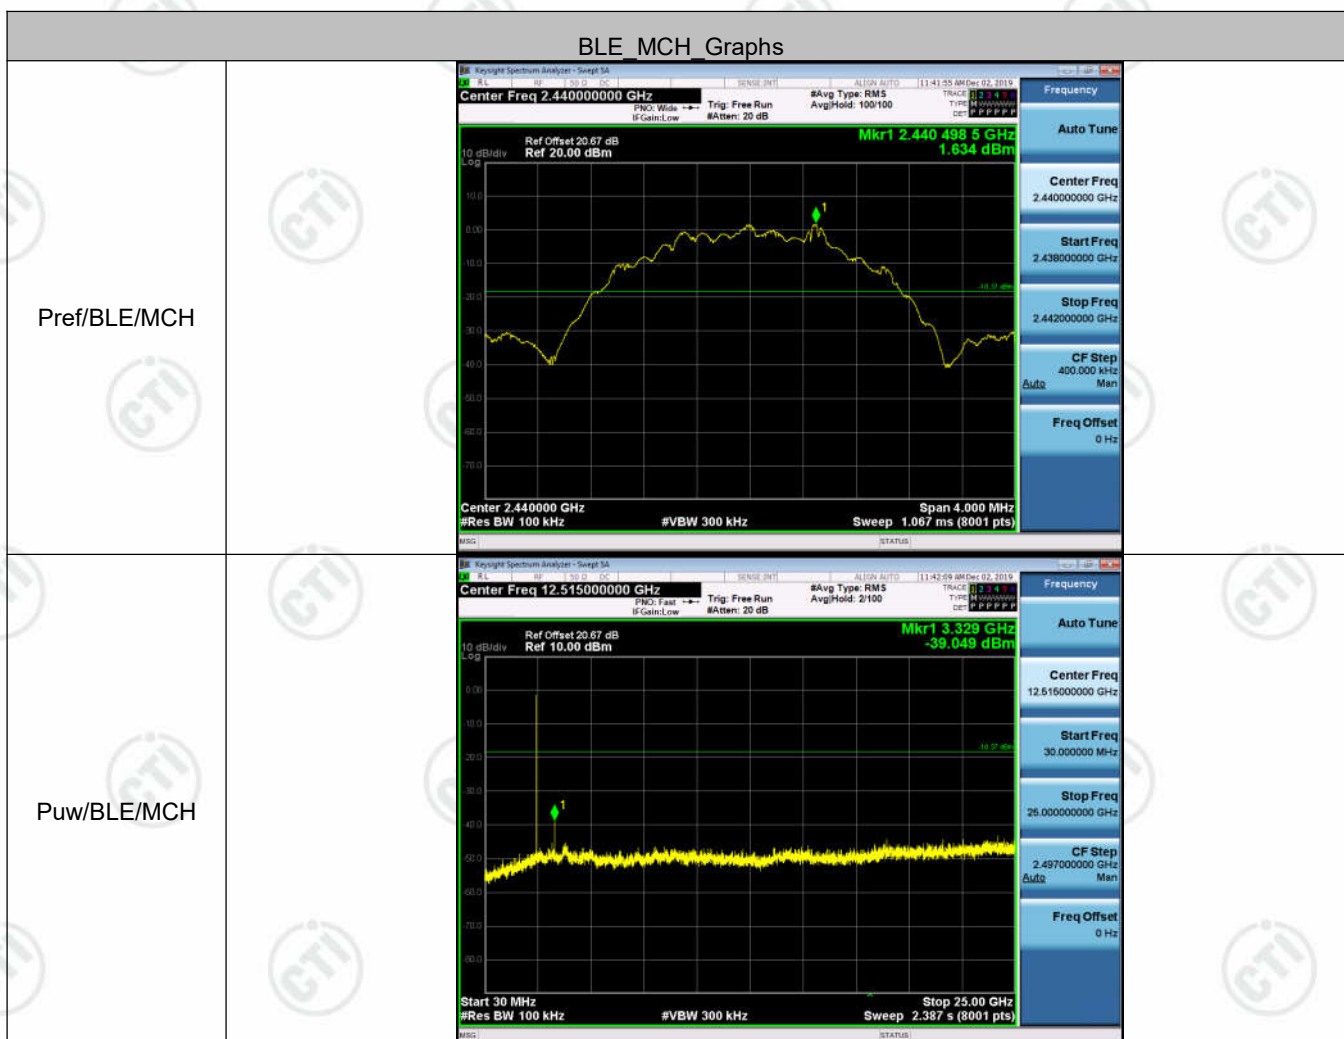

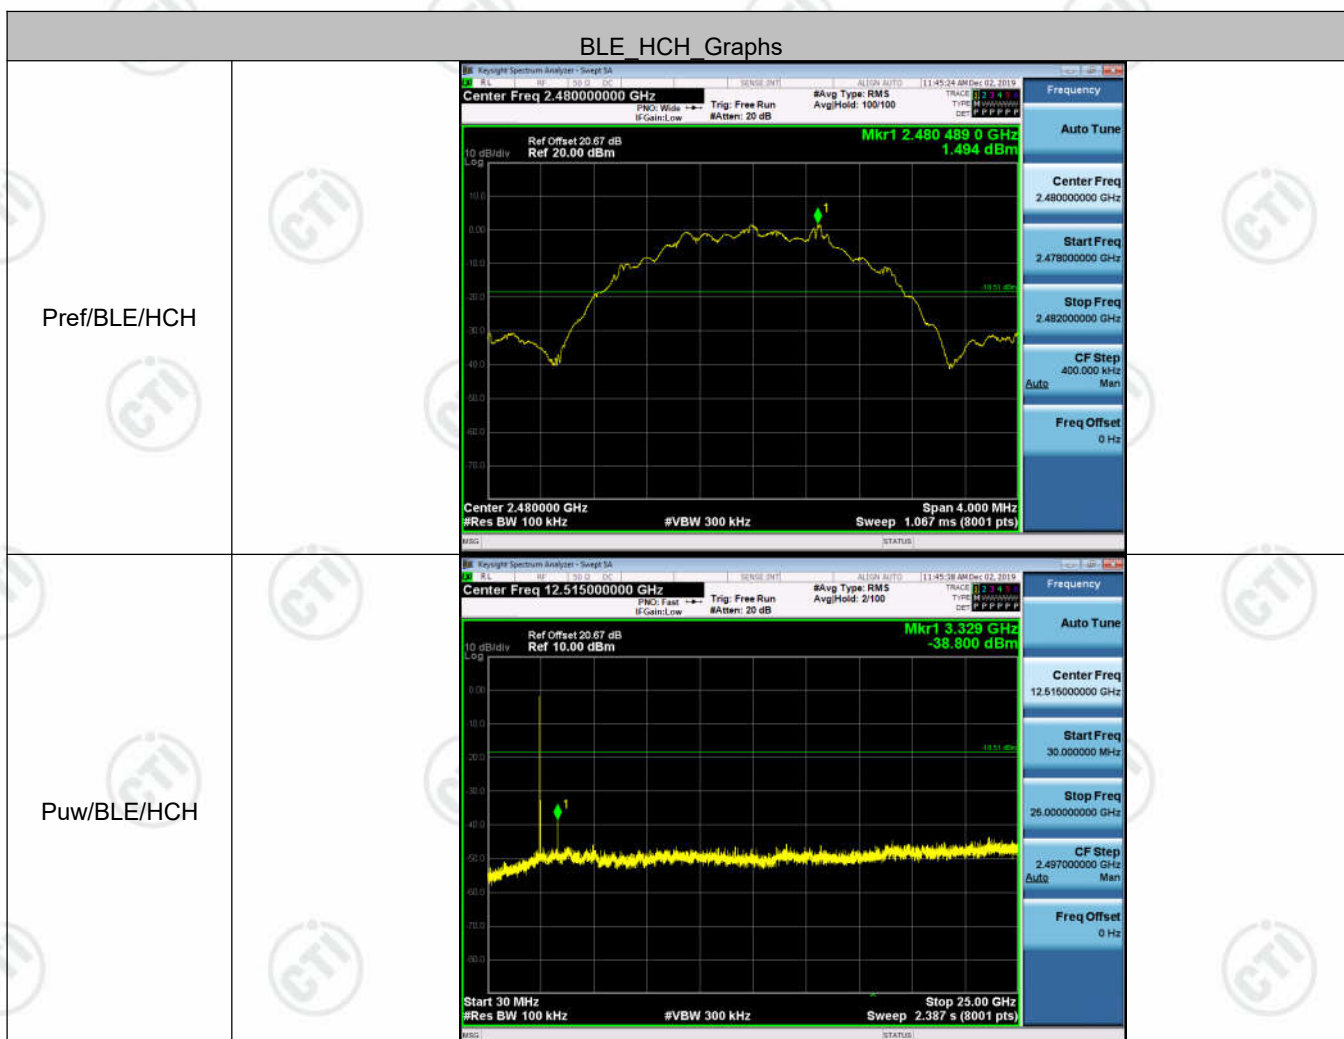



## Appendix E): Power Spectral Density

### Test Limit

According to §15.247(e) and RSS-247 section 5.2(b)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [ Limit = 8 – (DG – 6) ] <input type="checkbox"/> Point-to-point operation:
-------	---


### Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.

Measure and record the result of power spectral density. in the test report.

### Test Setup

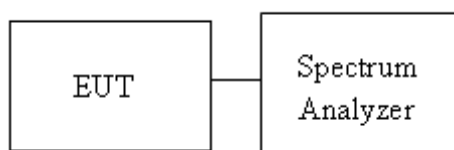




**Result Table For 1M**

Mode	Channel	PSD [dBm/3kHz]	Verdict
BLE	LCH	-12.182	PASS
BLE	MCH	-11.673	PASS
BLE	HCH	-11.269	PASS


**Result Table For 2M**

Mode	Channel	PSD [dBm/3kHz]	Verdict
BLE	LCH	-16.896	PASS
BLE	MCH	-16.373	PASS
BLE	HCH	-16.423	PASS

## Test Graphs For 1M

Graphs	
LCH	 <p>Keygraph Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref Offset 20.4 dB Ref 10.00 dBm Mkr1 2.402 129 19 GHz -12.182 dBm Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz</p>
MCH	 <p>Keygraph Spectrum Analyzer - Swept SA Center Freq 2.440000000 GHz Ref Offset 20.67 dB Ref 10.00 dBm Mkr1 2.440 129 56 GHz -11.673 dBm Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz</p>
HCH	 <p>Keygraph Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 20.67 dB Ref 10.00 dBm Mkr1 2.480 129 00 GHz -11.269 dBm Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz</p>

## Test Graphs For 2M

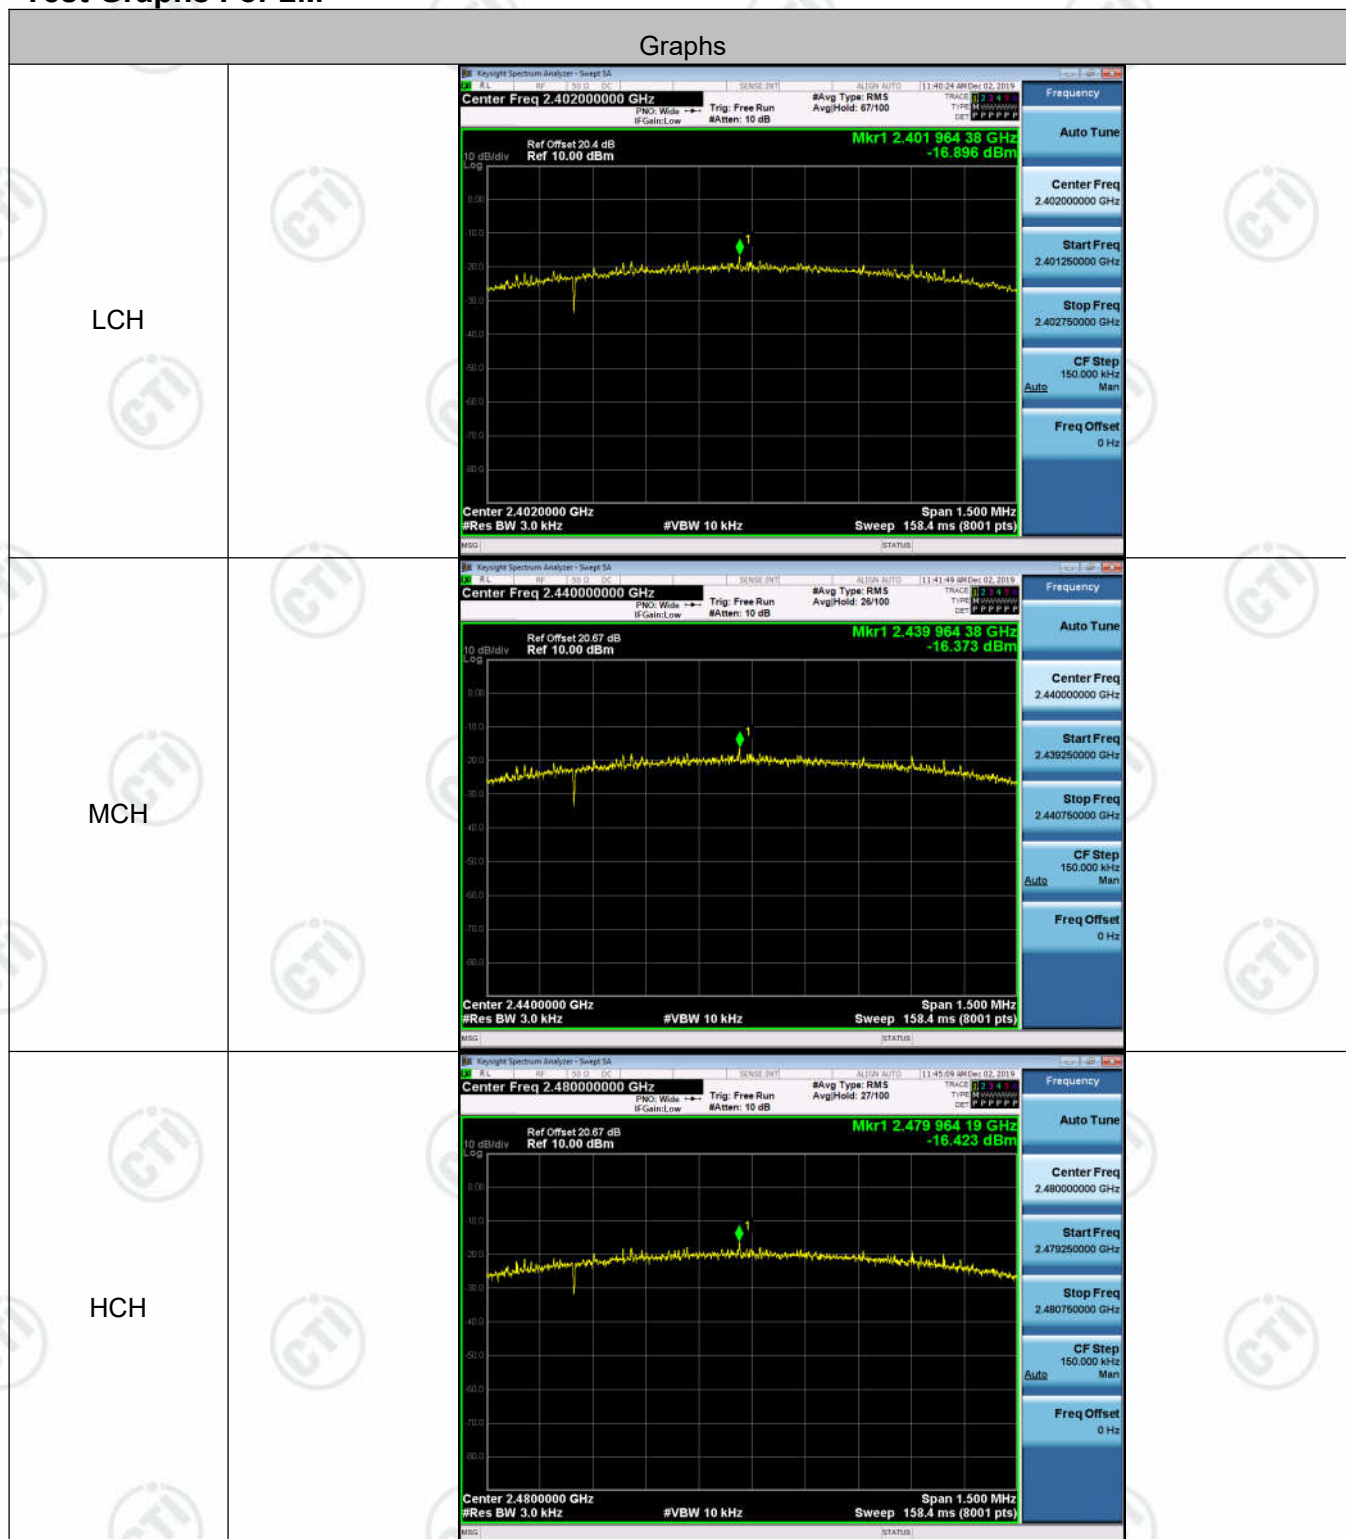



## Appendix F): Antenna Requirement



### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

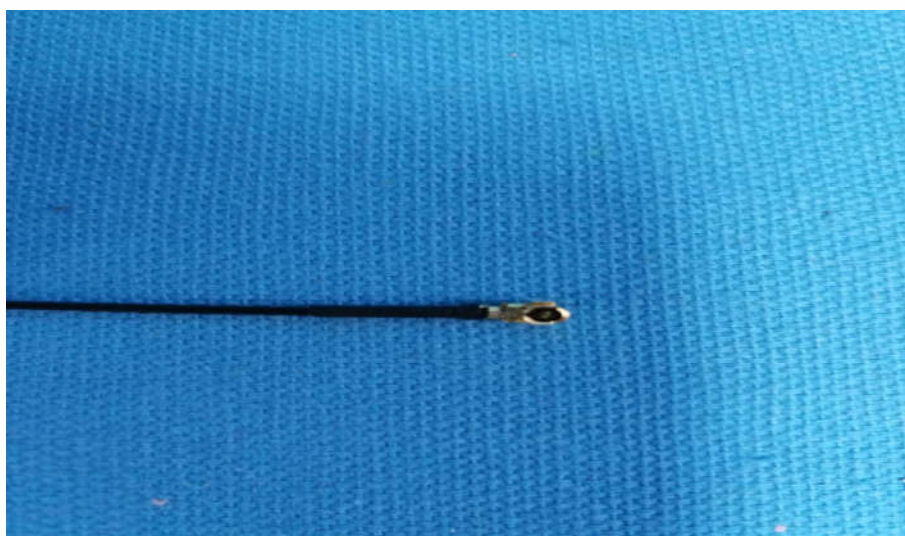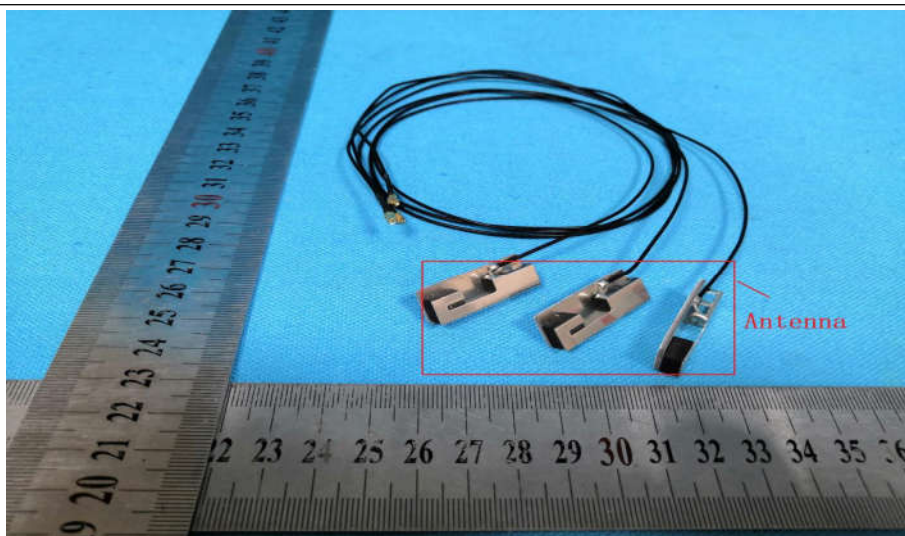

The antenna type is PIFA with I-PEX connector, that is a unique connector and compliant with the requirement for 15.203. The best case gain of the antenna is 2dBi.



## Appendix G): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dB<math>\mu\text{V}</math>)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB $\mu\text{V}$ )		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB $\mu\text{V}$ )														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


**Product** : WIFI+BT Module

**Model/Type reference** : WCT5LM2001

**Temperature** : 23.2℃


**Humidity** : 51%

Live line:

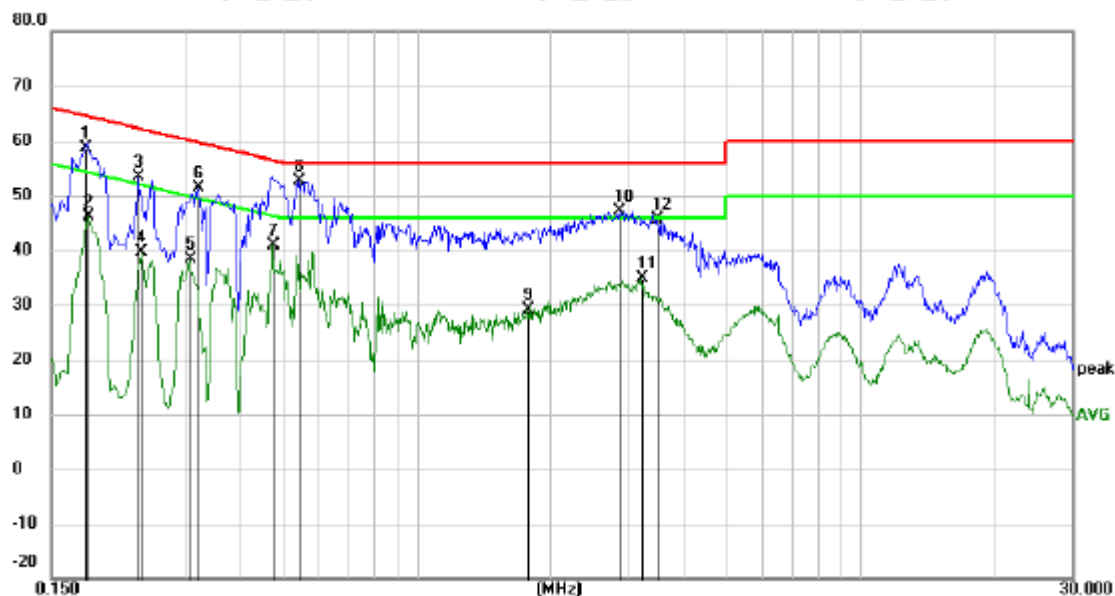

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1787	48.70	10.00	58.70	64.55	-5.85	peak	
2		0.1815	36.15	10.00	46.15	54.42	-8.27	AVG	
3		0.2355	43.22	10.05	53.27	62.25	-8.98	peak	
4		0.2400	29.52	10.05	39.57	52.10	-12.53	AVG	
5		0.3075	28.30	10.09	38.39	50.04	-11.65	AVG	
6		0.3209	41.32	10.08	51.40	59.68	-8.28	peak	
7		0.4740	30.76	10.00	40.76	46.44	-5.68	AVG	
8	*	0.5415	42.51	10.05	52.56	56.00	-3.44	peak	
9		1.7790	19.40	9.85	29.25	46.00	-16.75	AVG	
10		2.8590	37.37	9.83	47.20	56.00	-8.80	peak	
11		3.2190	25.01	9.83	34.84	46.00	-11.16	AVG	
12		3.4890	35.76	9.83	45.59	56.00	-10.41	peak	

Neutral line:

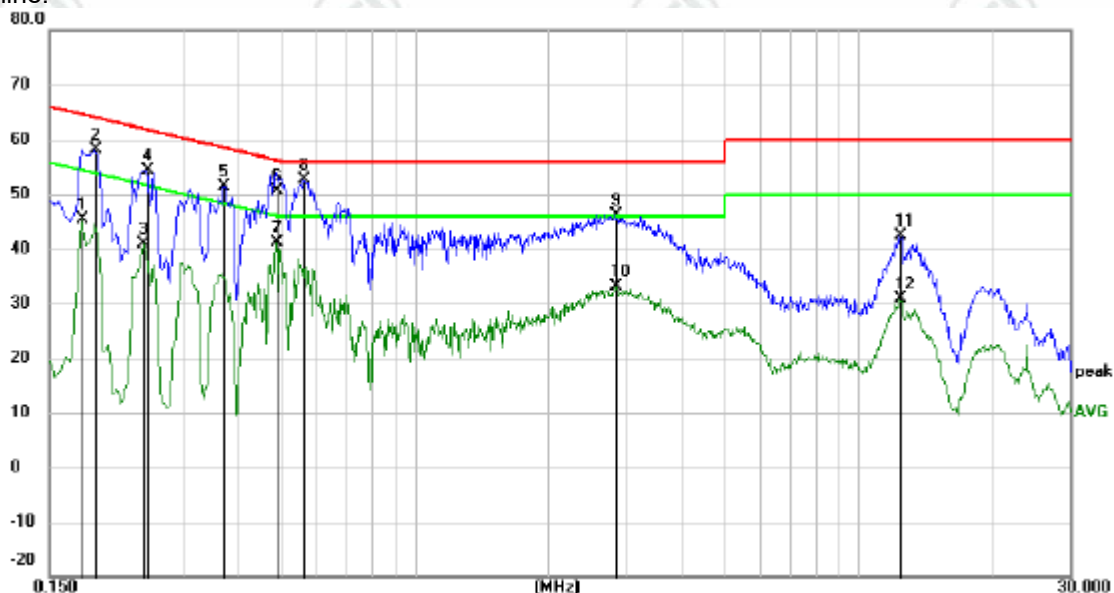

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1770	35.46	10.00	45.46	54.63	-9.17	AVG	
2		0.1905	48.19	10.01	58.20	64.01	-5.81	peak	
3		0.2445	30.88	10.06	40.94	51.94	-11.00	AVG	
4		0.2490	44.39	10.06	54.45	61.79	-7.34	peak	
5		0.3704	41.45	10.03	51.48	58.49	-7.01	peak	
6		0.4875	40.60	10.00	50.60	56.21	-5.61	QP	
7		0.4875	31.24	10.00	41.24	46.21	-4.97	AVG	
8	*	0.5639	42.63	10.08	52.71	56.00	-3.29	peak	
9		2.8320	36.38	9.83	46.21	56.00	-9.79	peak	
10		2.8320	23.30	9.83	33.13	46.00	-12.87	AVG	
11		12.4485	32.31	9.97	42.28	60.00	-17.72	peak	
12		12.4485	20.87	9.97	30.84	50.00	-19.16	AVG	

Notes:

1. The following Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <p>Test method Refer as KDB 558074 D01 v04, Section 12.1</p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dBμV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		




Test plot as follows:

For 1M:

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	PK		

Test Graph

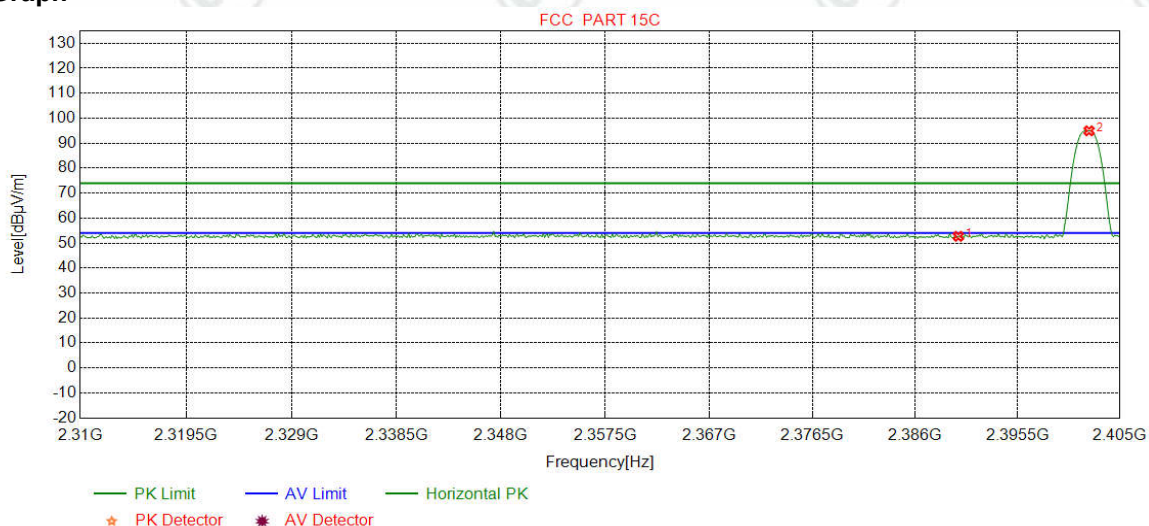


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.52	52.70	74.00	21.30	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	91.80	94.94	74.00	-20.94	Pass	Horizontal



Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

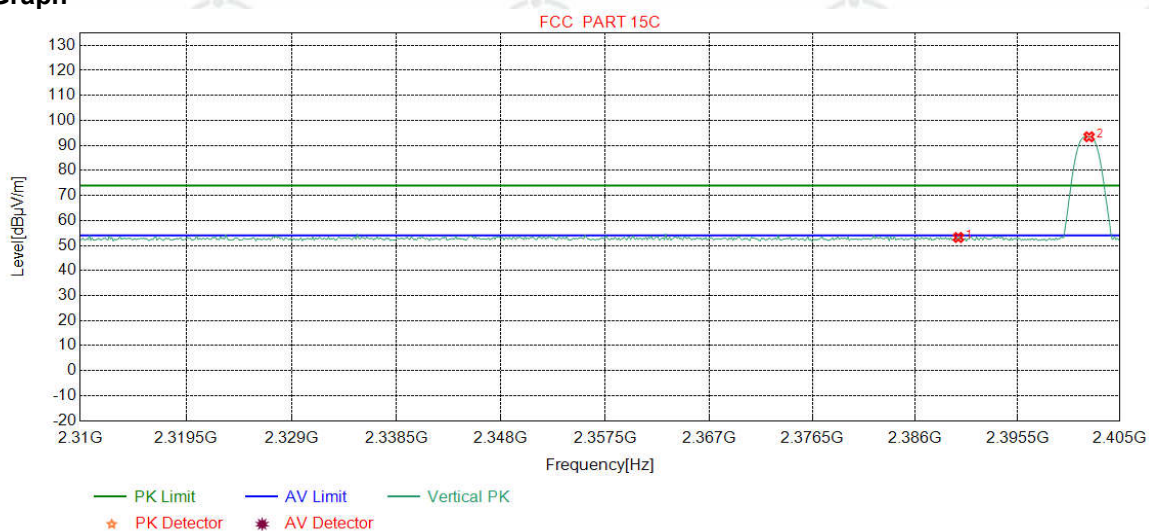

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.03	53.21	74.00	20.79	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	90.31	93.45	74.00	-19.45	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

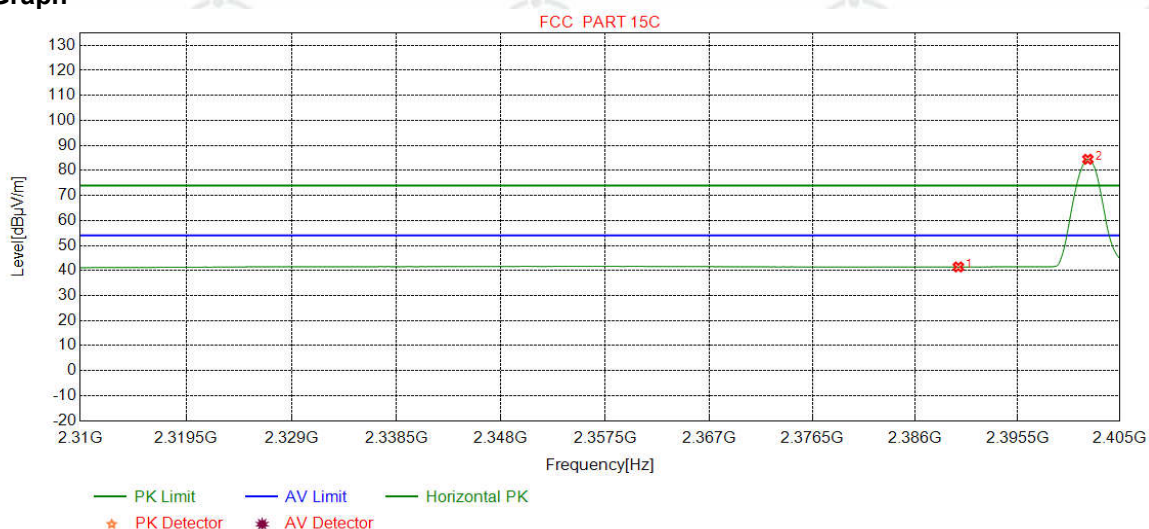

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.24	41.42	54.00	12.58	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	81.33	84.47	54.00	-30.47	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

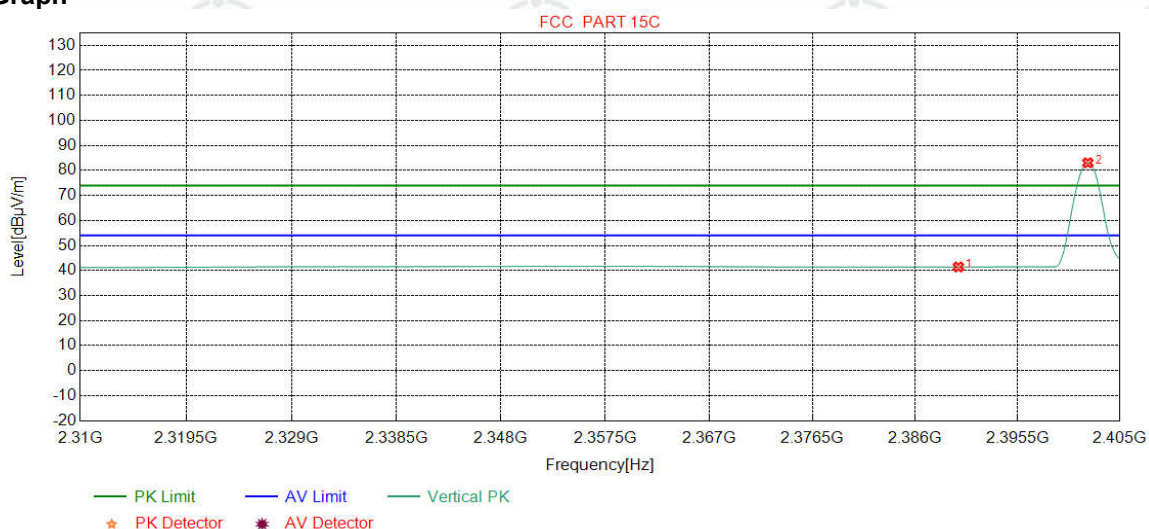

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.24	41.42	54.00	12.58	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	79.91	83.05	54.00	-29.05	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

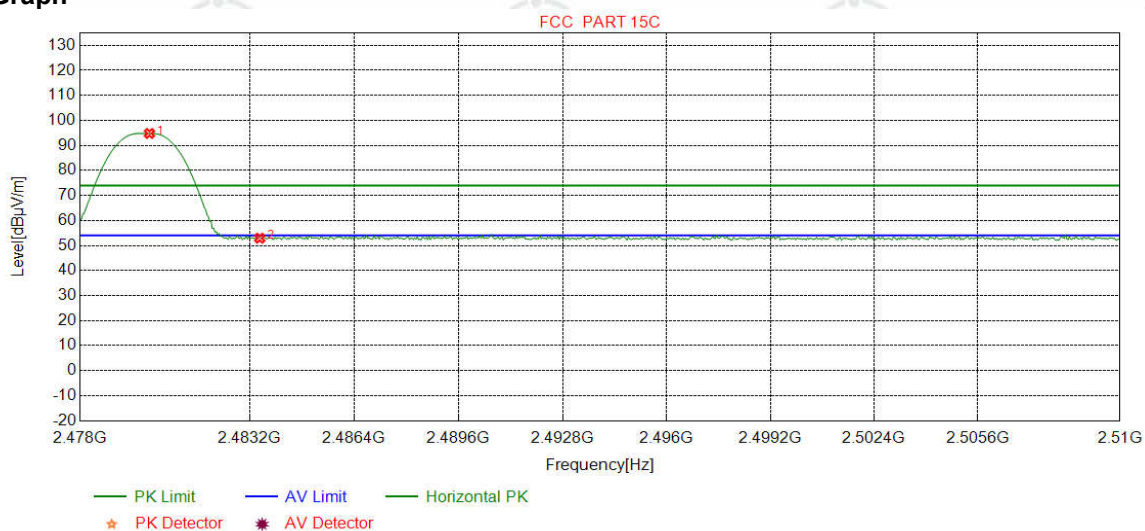

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.1227	32.37	13.39	-42.40	91.42	94.78	74.00	-20.78	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.57	52.93	74.00	21.07	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	PK		

### Test Graph

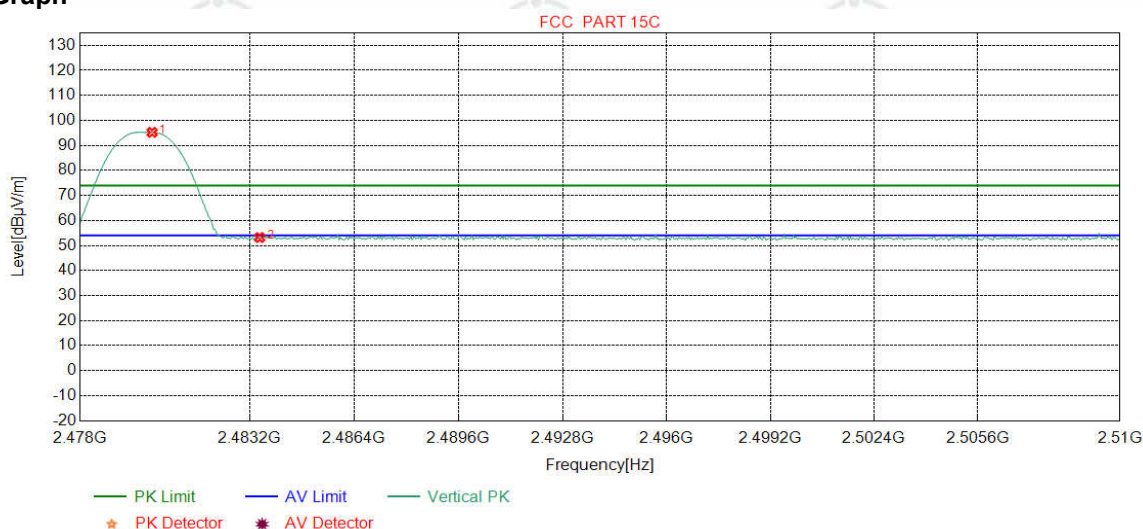


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.2028	32.37	13.39	-42.40	91.87	95.23	74.00	-21.23	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.83	53.19	74.00	20.81	Pass	Vertical



Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

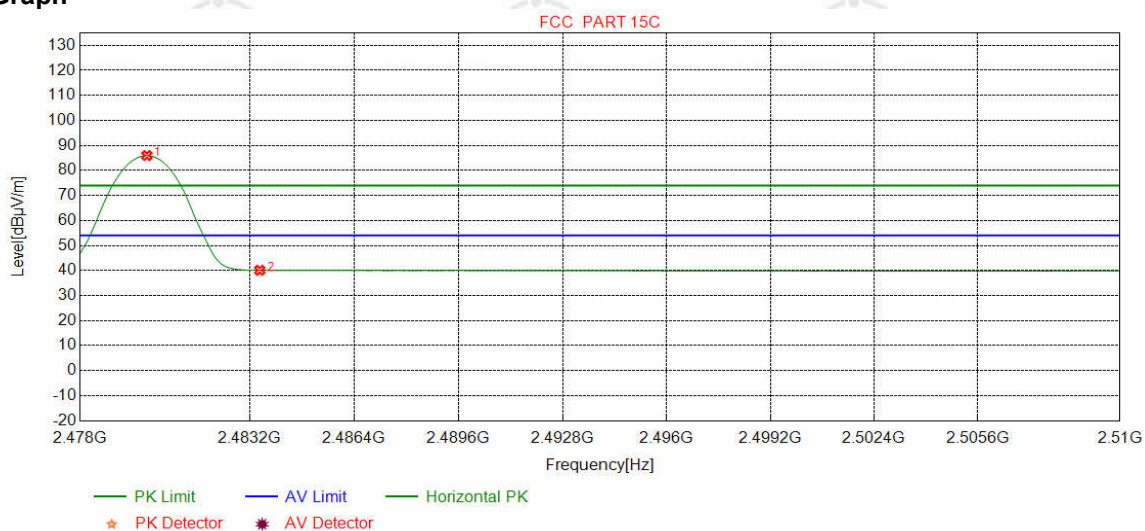

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-42.39	82.57	85.94	54.00	-31.94	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.74	40.10	54.00	13.90	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

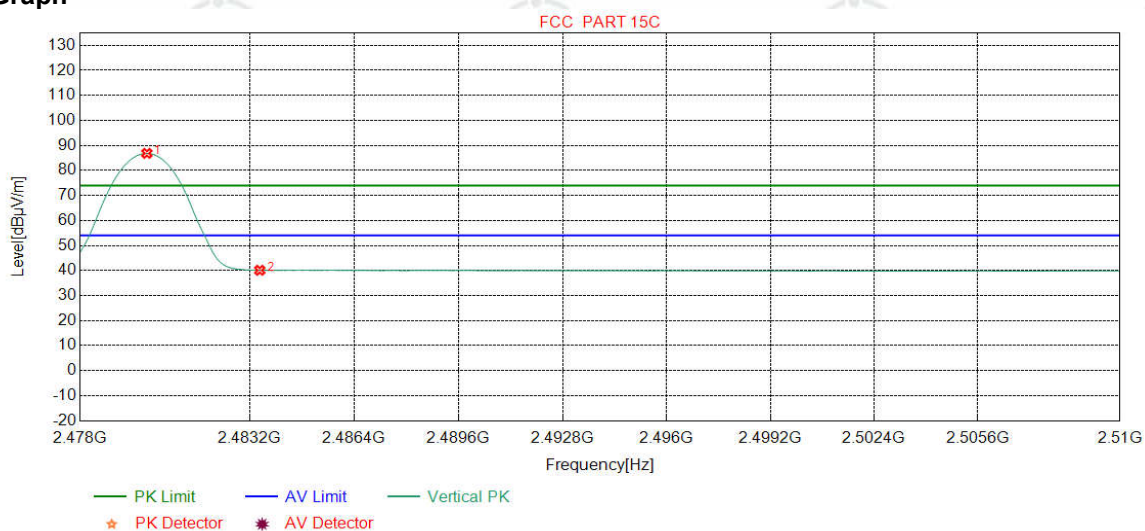


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-42.39	83.46	86.83	54.00	-32.83	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.74	40.10	54.00	13.90	Pass	Vertical

For 2M:

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

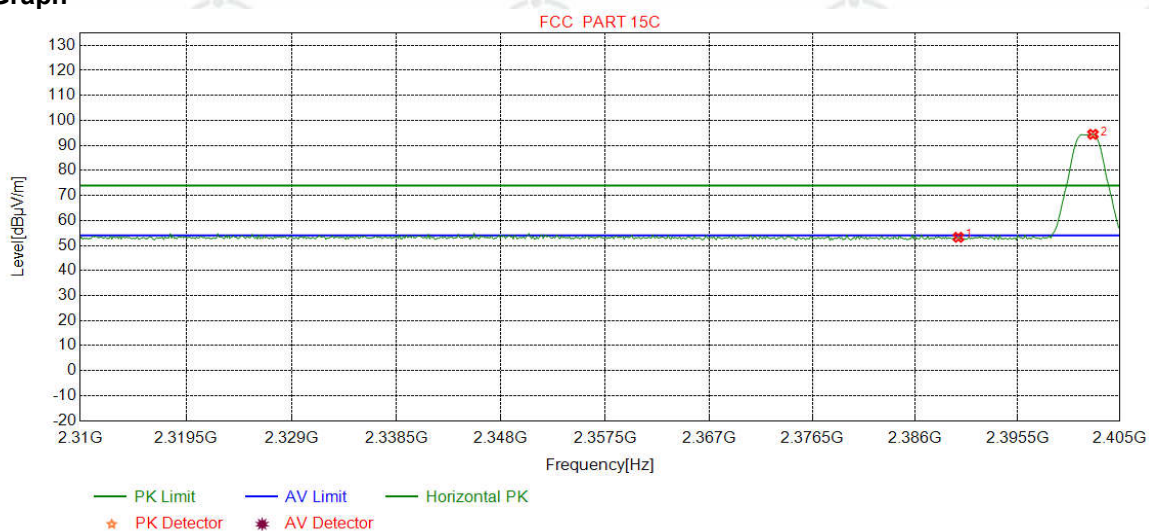

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.10	53.28	74.00	20.72	Pass	Horizontal
2	2402.5031	32.26	13.31	-42.43	91.30	94.44	74.00	-20.44	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

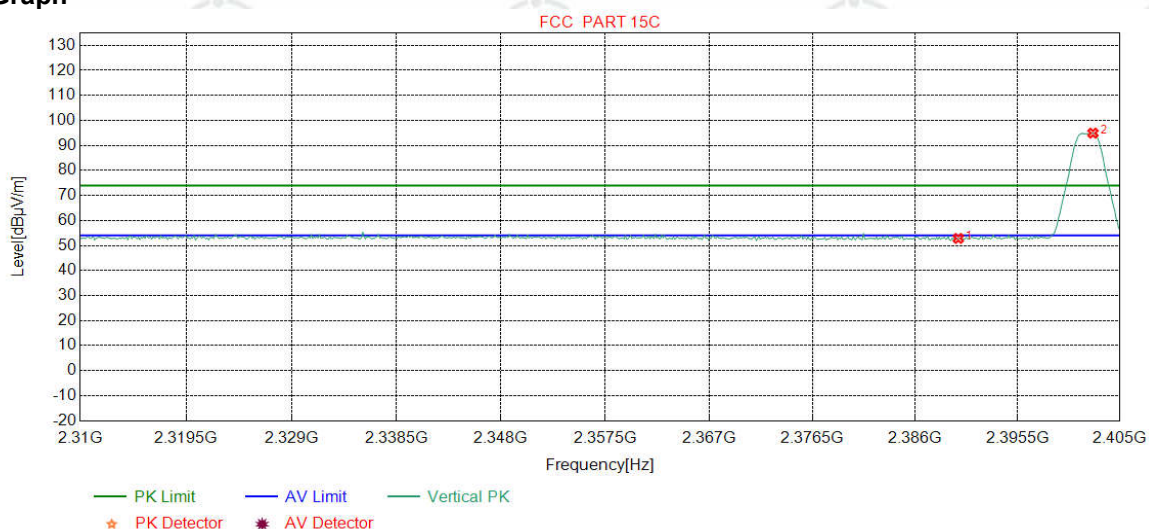

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.65	52.83	74.00	21.17	Pass	Vertical
2	2402.5031	32.26	13.31	-42.43	91.78	94.92	74.00	-20.92	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	AV		

### Test Graph

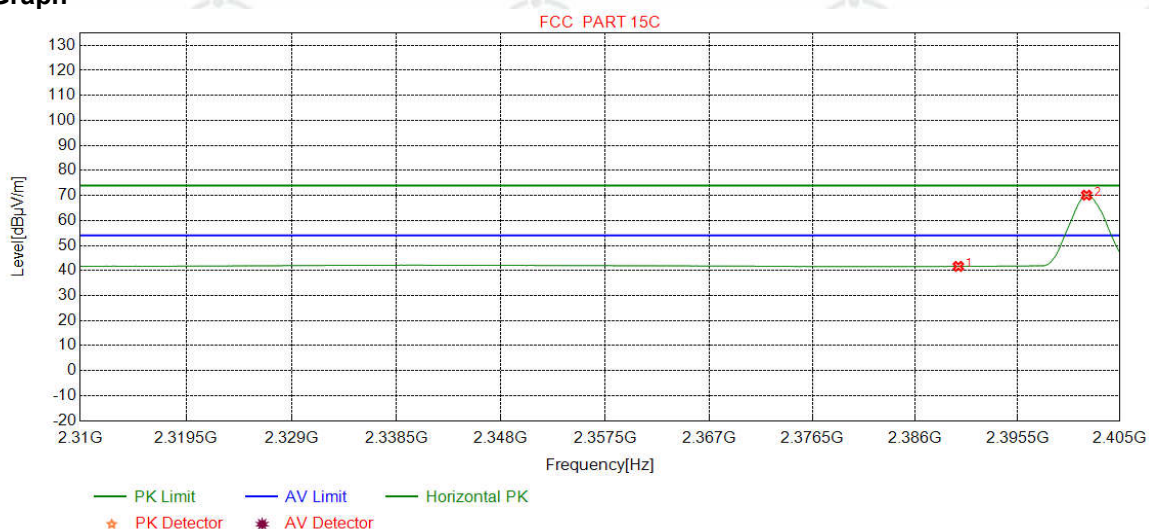


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.48	41.66	54.00	12.34	Pass	Horizontal
2	2401.9086	32.26	13.31	-42.43	66.97	70.11	54.00	-16.11	Pass	Horizontal



Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

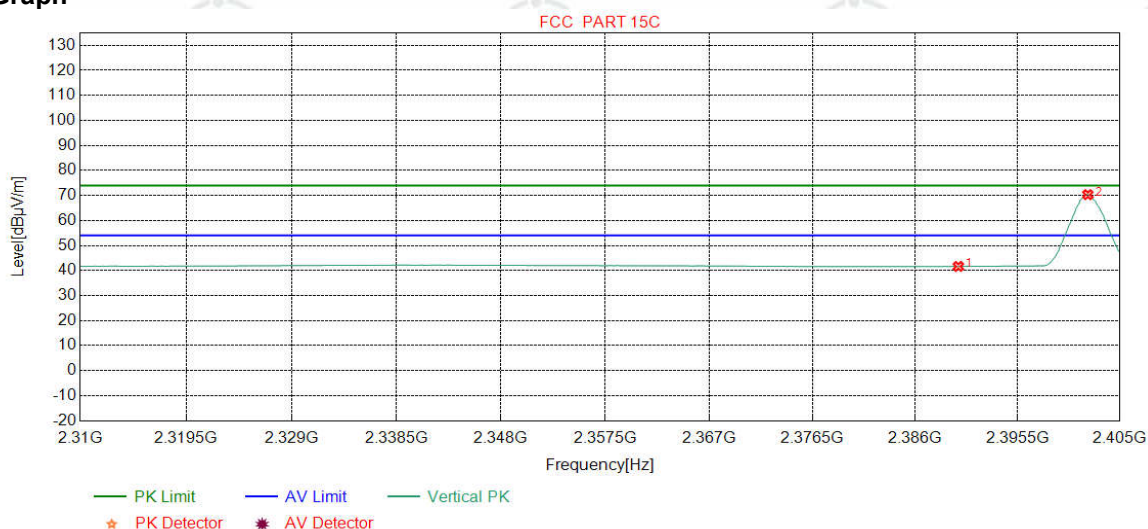

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.46	41.64	54.00	12.36	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	67.17	70.31	54.00	-16.31	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

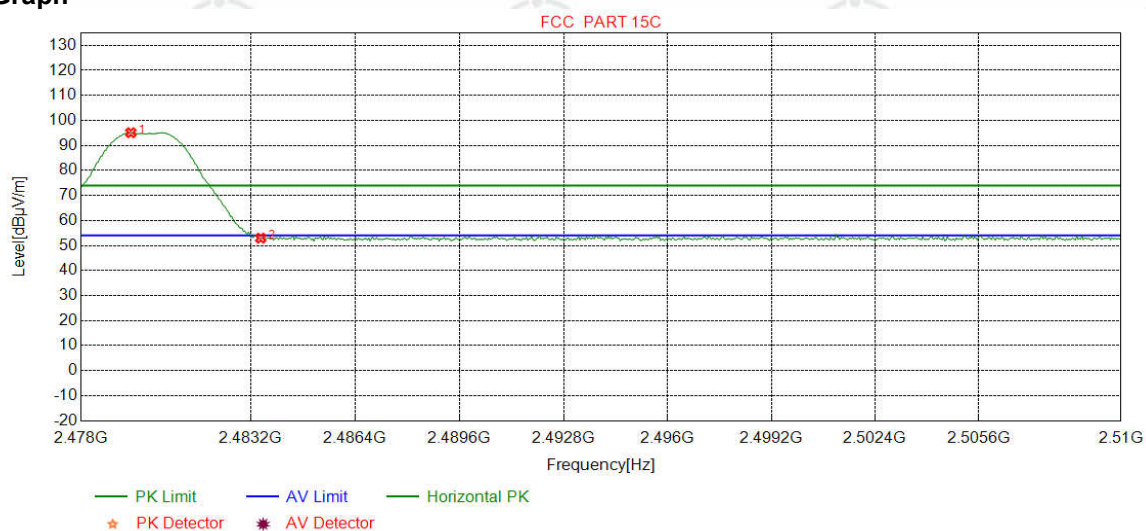

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.5219	32.37	13.39	-42.39	91.70	95.07	74.00	-21.07	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.59	52.95	74.00	21.05	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

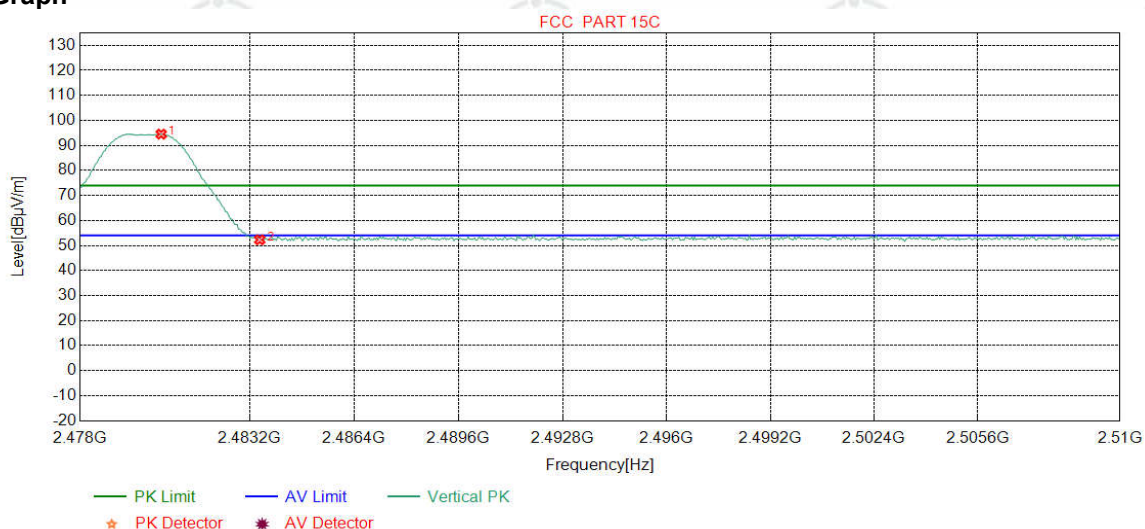

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.4831	32.37	13.39	-42.40	91.15	94.51	74.00	-20.51	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	48.92	52.28	74.00	21.72	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

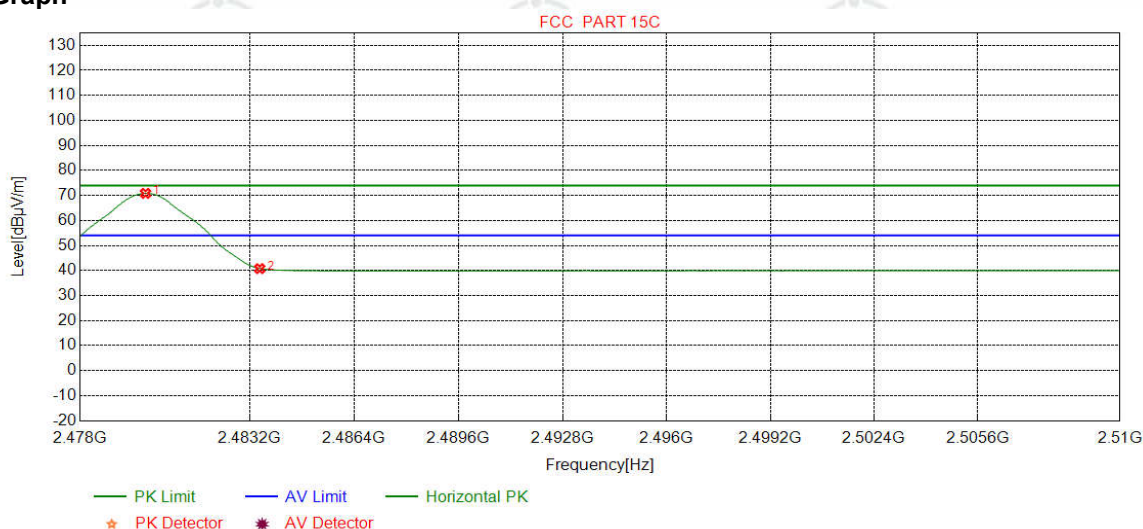

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0025	32.37	13.39	-42.39	67.48	70.85	54.00	-16.85	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	37.39	40.75	54.00	13.25	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

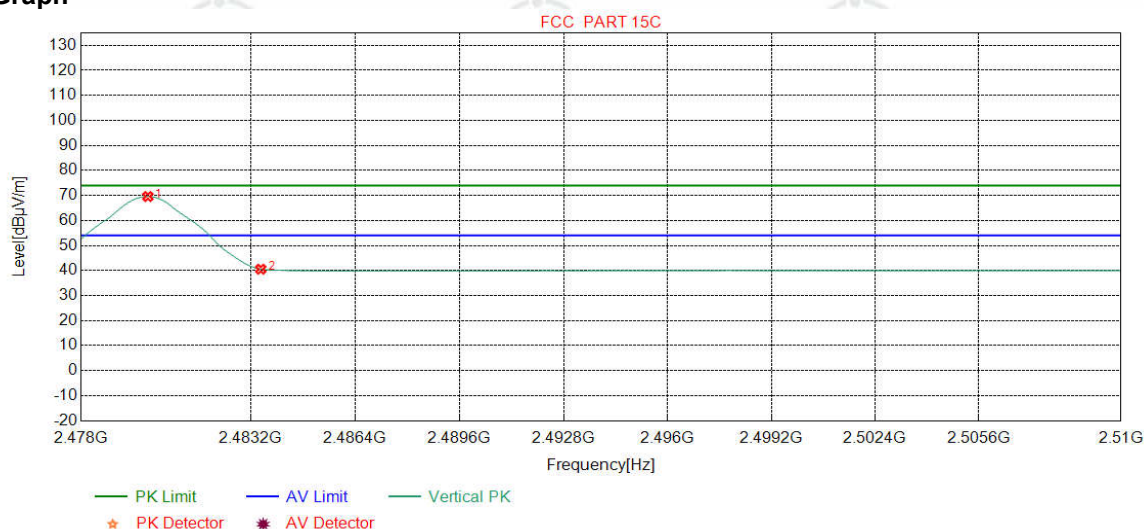

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-42.39	66.21	69.58	54.00	-15.58	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	37.17	40.53	54.00	13.47	Pass	Vertical

### Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor



## Appendix I) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below: Test method Refer as KDB 558074 D01 v04, Section 12.1 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below: g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

**Radiated Spurious Emissions test Data:**  
**Radiated Emission below 1GHz**  
**For 1M:**

Mode:			BLE GFSK Transmitting					Channel:		2440	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	76.2736	7.81	1.02	-32.07	58.43	35.19	40.00	4.81	Pass	H	PK
2	208.8859	11.13	1.71	-31.94	47.18	28.08	43.50	15.42	Pass	H	PK
3	312.0072	13.46	2.10	-31.89	40.95	24.62	46.00	21.38	Pass	H	PK
4	552.0092	18.04	2.80	-31.97	41.59	30.46	46.00	15.54	Pass	H	PK
5	792.0112	20.81	3.37	-31.98	38.60	30.80	46.00	15.20	Pass	H	PK
6	887.9538	21.96	3.57	-31.63	33.08	26.98	46.00	19.02	Pass	H	PK
7	76.3706	7.79	1.02	-32.06	62.77	39.52	40.00	0.48	Pass	V	PK
8	150.0010	7.55	1.45	-32.01	51.89	28.88	43.50	14.62	Pass	V	PK
9	227.9968	11.63	1.79	-31.92	48.62	30.12	46.00	15.88	Pass	V	PK
10	265.8306	12.52	1.94	-31.88	50.06	32.64	46.00	13.36	Pass	V	PK
11	552.0092	18.04	2.80	-31.97	44.18	33.05	46.00	12.95	Pass	V	PK
12	792.0112	20.81	3.37	-31.98	39.46	31.66	46.00	14.34	Pass	V	PK

**For 2M:**

Mode:			BLE GFSK Transmitting					Channel:		2440	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	54.5435	12.47	0.84	-32.08	41.97	23.20	40.00	16.80	Pass	H	PK
2	68.0278	9.51	0.94	-32.05	50.09	28.49	40.00	11.51	Pass	H	PK
3	120.0250	9.20	1.30	-32.07	44.65	23.08	43.50	20.42	Pass	H	PK
4	177.9398	8.89	1.57	-31.99	55.63	34.10	43.50	9.40	Pass	H	PK
5	239.9290	11.94	1.84	-31.90	51.22	33.10	46.00	12.90	Pass	H	PK
6	713.7244	19.95	3.19	-32.10	44.37	35.41	46.00	10.59	Pass	H	PK
7	71.4231	8.73	0.97	-32.06	55.27	32.91	40.00	7.09	Pass	V	PK
8	184.3424	9.41	1.59	-31.98	51.37	30.39	43.50	13.11	Pass	V	PK
9	236.5337	11.85	1.82	-31.90	50.20	31.97	46.00	14.03	Pass	V	PK
10	455.9696	16.30	2.54	-31.86	44.22	31.20	46.00	14.80	Pass	V	PK
11	600.0290	19.00	2.96	-31.99	46.69	36.66	46.00	9.34	Pass	V	PK
12	974.9715	22.55	3.75	-30.95	41.84	37.19	54.00	16.81	Pass	V	PK

**Transmitter Emission above 1GHz**
**For 1M:**

Mode:			BLE GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1497.0497	28.40	2.99	-42.68	55.49	44.20	74.00	29.80	Pass	H	PK
2	3331.0221	33.33	4.54	-41.92	50.98	46.93	74.00	27.07	Pass	H	PK
3	4804.0000	34.50	4.55	-40.66	48.57	46.96	74.00	27.04	Pass	H	PK
4	7206.0000	36.31	5.81	-41.02	46.43	47.53	74.00	26.47	Pass	H	PK
5	9608.0000	37.64	6.63	-40.76	45.92	49.43	74.00	24.57	Pass	H	PK
6	12010.0000	39.31	7.60	-41.21	44.79	50.49	74.00	23.51	Pass	H	PK
7	1819.4819	30.51	3.34	-42.70	51.43	42.58	74.00	31.42	Pass	V	PK
8	3331.0221	33.33	4.54	-41.92	54.99	50.94	74.00	23.06	Pass	V	PK
9	4804.0000	34.50	4.55	-40.66	48.01	46.40	74.00	27.60	Pass	V	PK
10	7206.0000	36.31	5.81	-41.02	46.18	47.28	74.00	26.72	Pass	V	PK
11	9608.0000	37.64	6.63	-40.76	45.73	49.24	74.00	24.76	Pass	V	PK
12	12010.0000	39.31	7.60	-41.21	45.16	50.86	74.00	23.14	Pass	V	PK

Mode:			BLE GFSK Transmitting					Channel:		2440	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1663.6664	29.48	3.16	-42.75	51.65	41.54	74.00	32.46	Pass	H	PK
2	3331.0221	33.33	4.54	-41.92	51.56	47.51	74.00	26.49	Pass	H	PK
3	4880.0000	34.50	4.80	-40.60	47.83	46.53	74.00	27.47	Pass	H	PK
4	7320.0000	36.42	5.85	-40.92	45.31	46.66	74.00	27.34	Pass	H	PK
5	9760.0000	37.70	6.73	-40.62	45.74	49.55	74.00	24.45	Pass	H	PK
6	12200.0000	39.42	7.67	-41.17	45.69	51.61	74.00	22.39	Pass	H	PK
7	1812.2812	30.46	3.33	-42.70	54.32	45.41	74.00	28.59	Pass	V	PK
8	3331.0221	33.33	4.54	-41.92	53.47	49.42	74.00	24.58	Pass	V	PK
9	4880.0000	34.50	4.80	-40.60	46.57	45.27	74.00	28.73	Pass	V	PK
10	7320.0000	36.42	5.85	-40.92	45.37	46.72	74.00	27.28	Pass	V	PK
11	9760.0000	37.70	6.73	-40.62	45.59	49.40	74.00	24.60	Pass	V	PK
12	12200.0000	39.42	7.67	-41.17	44.43	50.35	74.00	23.65	Pass	V	PK

Mode:			BLE GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1402.2402	28.30	2.90	-42.68	54.70	43.22	74.00	30.78	Pass	H	PK
2	3331.0221	33.33	4.54	-41.92	51.28	47.23	74.00	26.77	Pass	H	PK
3	4960.0000	34.50	4.82	-40.53	46.60	45.39	74.00	28.61	Pass	H	PK
4	7440.0000	36.54	5.85	-40.82	46.03	47.60	74.00	26.40	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	45.53	49.61	74.00	24.39	Pass	H	PK
6	12400.0000	39.54	7.86	-41.12	45.58	51.86	74.00	22.14	Pass	H	PK
7	1854.6855	30.74	3.38	-42.68	50.67	42.11	74.00	31.89	Pass	V	PK
8	3331.0221	33.33	4.54	-41.92	54.77	50.72	74.00	23.28	Pass	V	PK
9	4960.0000	34.50	4.82	-40.53	46.35	45.14	74.00	28.86	Pass	V	PK
10	7440.0000	36.54	5.85	-40.82	46.49	48.06	74.00	25.94	Pass	V	PK
11	9920.0000	37.77	6.79	-40.48	46.19	50.27	74.00	23.73	Pass	V	PK
12	12400.0000	39.54	7.86	-41.12	45.61	51.89	74.00	22.11	Pass	V	PK



**For 2M:**

Mode:			BLE GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2999.1999	33.20	4.55	-42.12	52.29	47.92	74.00	26.08	Pass	H	PK
2	4003.0669	33.80	4.33	-40.78	49.58	46.93	74.00	27.07	Pass	H	PK
3	4804.0000	34.50	4.55	-40.66	47.53	45.92	74.00	28.08	Pass	H	PK
4	7206.0000	36.31	5.81	-41.02	46.06	47.16	74.00	26.84	Pass	H	PK
5	9608.0000	37.64	6.63	-40.76	47.04	50.55	74.00	23.45	Pass	H	PK
6	11992.5995	39.29	7.59	-41.21	48.36	54.03	74.00	19.97	Pass	H	PK
7	2995.1995	33.19	4.54	-42.12	56.37	51.98	74.00	22.02	Pass	V	PK
8	3331.0221	33.33	4.54	-41.92	54.45	50.40	74.00	23.60	Pass	V	PK
9	4804.0000	34.50	4.55	-40.66	49.52	47.91	74.00	26.09	Pass	V	PK
10	7206.0000	36.31	5.81	-41.02	46.10	47.20	74.00	26.80	Pass	V	PK
11	9608.0000	37.64	6.63	-40.76	47.17	50.68	74.00	23.32	Pass	V	PK
12	11961.5974	39.27	7.51	-41.22	48.61	54.17	74.00	19.83	Pass	V	PK

Mode:			BLE GFSK Transmitting					Channel:		2440	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	3330.0220	33.33	4.54	-41.92	51.19	47.14	74.00	26.86	Pass	H	PK
2	3872.0581	33.70	4.35	-41.05	49.99	46.99	74.00	27.01	Pass	H	PK
3	4880.0000	34.50	4.80	-40.60	47.49	46.19	74.00	27.81	Pass	H	PK
4	7320.0000	36.42	5.85	-40.92	46.96	48.31	74.00	25.69	Pass	H	PK
5	9760.0000	37.70	6.73	-40.62	45.48	49.29	74.00	24.71	Pass	H	PK
6	12200.0000	39.42	7.67	-41.17	45.90	51.82	74.00	22.18	Pass	H	PK
7	2997.3997	33.20	4.54	-42.12	54.65	50.27	74.00	23.73	Pass	V	PK
8	3331.0221	33.33	4.54	-41.92	54.41	50.36	74.00	23.64	Pass	V	PK
9	4880.0000	34.50	4.80	-40.60	46.53	45.23	74.00	28.77	Pass	V	PK
10	7320.0000	36.42	5.85	-40.92	46.70	48.05	74.00	25.95	Pass	V	PK
11	9760.0000	37.70	6.73	-40.62	46.93	50.74	74.00	23.26	Pass	V	PK
12	12323.6216	39.49	7.69	-41.13	48.00	54.05	74.00	19.95	Pass	V	PK

Mode:			BLE GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	3331.0221	33.33	4.54	-41.92	50.95	46.90	74.00	27.10	Pass	H	PK
2	4148.0765	34.01	4.50	-40.82	50.02	47.71	74.00	26.29	Pass	H	PK
3	4960.0000	34.50	4.82	-40.53	47.32	46.11	74.00	27.89	Pass	H	PK
4	7440.0000	36.54	5.85	-40.82	47.24	48.81	74.00	25.19	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	46.83	50.91	74.00	23.09	Pass	H	PK
6	12400.0000	39.54	7.86	-41.12	46.05	52.33	74.00	21.67	Pass	H	PK
7	2986.5987	33.18	4.51	-42.13	55.97	51.53	74.00	22.47	Pass	V	PK
8	3331.0221	33.33	4.54	-41.92	55.23	51.18	74.00	22.82	Pass	V	PK
9	4960.0000	34.50	4.82	-40.53	47.58	46.37	74.00	27.63	Pass	V	PK
10	7440.0000	36.54	5.85	-40.82	48.38	49.95	74.00	24.05	Pass	V	PK
11	9920.0000	37.77	6.79	-40.48	47.56	51.64	74.00	22.36	Pass	V	PK
12	12400.0000	39.54	7.86	-41.12	45.86	52.14	74.00	21.86	Pass	V	PK

**Note:**

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.