



Part Number : [2128600011](#)
Product Description : 2.4GHz / 5GHz Wi-Fi/Bluetooth Hinged External Antenna, with Reverse Polar SMA Male Connector, Black
Series Number : 212860
Status : Active
Product Category : Antennas



Documents & Resources

Drawings

[Drawing 2128600011_sd.pdf](#)
[Packaging Design Drawing 2128600001-PK1.pdf](#)

3D Models and Design Files

[3D Model 2128600011_stp.zip](#)

Specifications

[Application Specification 2128600001-AS.pdf](#)
[Product Specification 2128600001-PS.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead per D(2023)8585-DC (23 Jan 2024)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Antennas
Series	212860
Description	2.4GHz / 5GHz Wi-Fi/Bluetooth Hinged External Antenna, with Reverse Polar SMA Male Connector, Black
Component Type	External Antenna
Function	Signal
Product Family	Internet of Things (IoT) Antennas: Wi-Fi, Bluetooth, Zigbee
Product Name	2.4/5GHz Wi-Fi/BT Antenna
Protocol	BT, Wi-Fi
Type	External
UPC	193264201464

Electrical

Band#1 F_End (MHz)	2500
Band#1 F_Start (MHz)	2400
Band#2 F_End (MHz)	5850
Band#2 F_Start (MHz)	5150
Electrical Connectivity	Cable
Peak Gain (dBi)	4.5 @ 5 GHz, 5.3 @ 2.4 GHz
Return Loss - S11 (dB)	< -10
Total Efficiency	>75% @ 5 GHz, >80% @ 2.4 GHz

Physical

Length	108.40mm
Mounting Style	N/A

Net Weight	9.250/g
Packaging Type	PET Bag
Polarization	Linear
Radiation Pattern	Omnidirectional
Width	9.35mm

Mates With / Use With

Mates with Part(s)

Description	Part Number
Mates With	Reverse Polar SMA Female Receptacle

This document was generated on Mar 26, 2024



APPLICATION SPECIFICATION

TITLE

MOLEX WIFI DUAL-BAND ANTENNA HINGED

TABLE OF CONTENTS

1.0 SCOPE

2.0 PRODUCT DESCRIPTION

3.0 APPLICABLE DOCUMENTS

4.0 ANTENNA PERFORMANCE

5.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

6.0 CHANGE HISTORY

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	1 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31



APPLICATION SPECIFICATION

MOLEX WIFI DUAL-BAND ANTENNA HINGED

1.0 SCOPE

This specification describes the antenna application and surrounding. The information in this document is for reference and benchmark purposes only. The user is responsible for validating antenna RF performance based on the user's actual implementation.

Antenna illustrations in this document are generic representations. They are not intended to be an image of any antenna listed in the scope.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER (S)

Product name: Molex WIFI Dual Band Antenna Hinged


Series Number: 212860

2.2 DESCRIPTION

212860 is external antenna being designed to cover WIFI working frequencies in the 2.4-2.5GHz and 5.15-5.85GHz. The joint hinge of the antenna allows 90° rotating on vertical plane, and the SMA-J connector allows 180° rotating on horizontal plane.

2.3 PRODUCT STRUCTURE INFORMATION

Please refer to PS-2128600001 for full information.

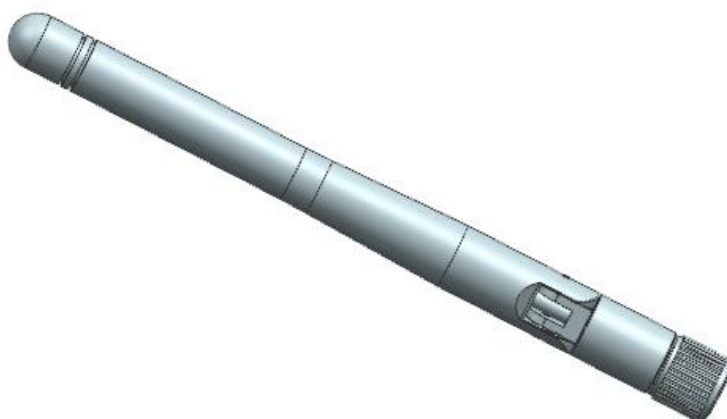

2128600001 Molex WIFI Dual Band Antenna Hinged 3D VIEW

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	2 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

3.0 APPLICABLE DOCUMENTS

DOCUMENT	NUMBER	DESCRIPTION
Sale Drawing (SD)	SD-2128600001	Mechanical Dimension of the product
Product Specification (PS)	PS-2128600001	Product Specification
Packing Drawing (PK)	PK-2128600001	Product packaging specifications

4.0 ANTENNA PERFORMANCE

4.1 RF TEST CONDITIONS

All measurements are done of the antenna mounted on a 100mm*100mm ground PCB with VNA Agilent E5071C and Over-The-Air (OTA) chamber for the part No.212860 series.

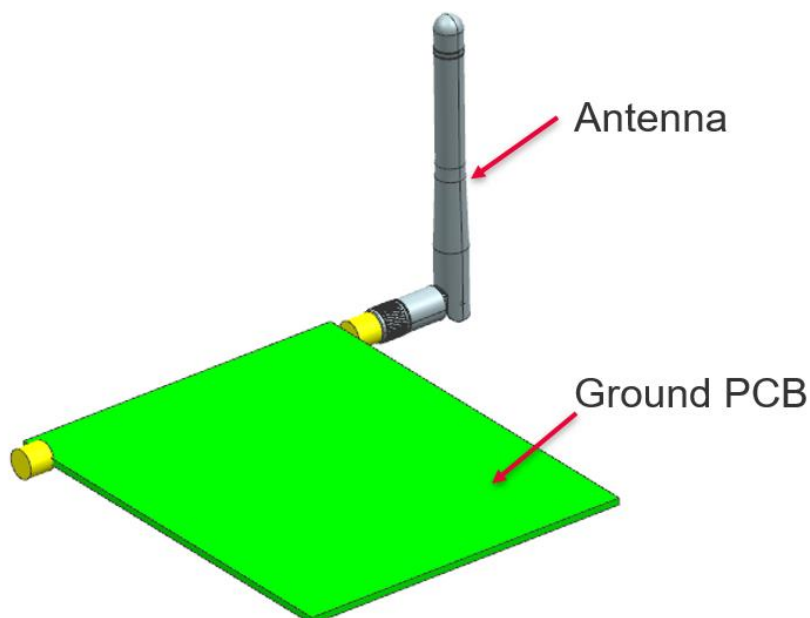
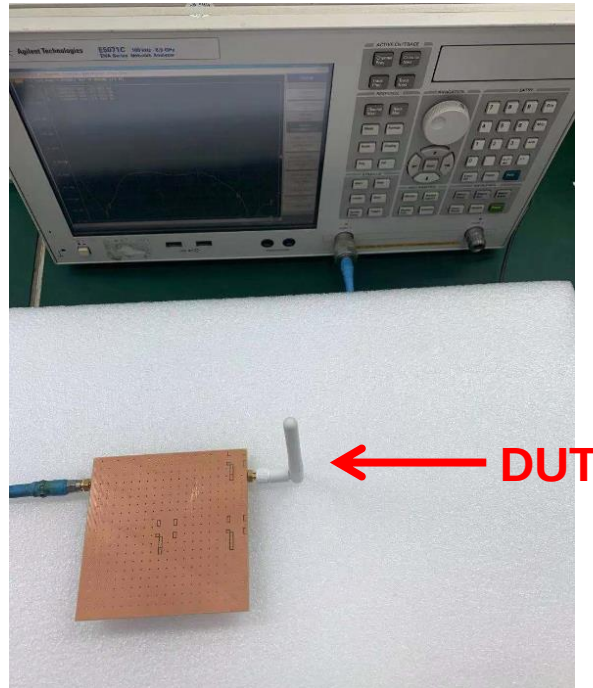


FIGURE4.1.1 ANTENNA MOUNTED ON A 100MM*100MM GROUND PCB

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	3 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31



**FIGURE 4.1.2 ANTENNA MOUNTED ON 100MM*100MM GROUND PCB
TESTED WITH VNA E5071C**



**FIGURE 4.1.3 ANTENNA MOUNTED ON 100MM*100MM GROUND PCB
TESTED IN OTA CHAMBER**

REVISION: B	ECR/ECN INFORMATION: EC No: 726689 DATE: 2022/10/31	TITLE: Molex WIFI Dual Band Antenna Hinged Application Specification	SHEET No. 4 of 18
DOCUMENT NUMBER: AS-2128600001	CREATED / REVISED BY: Liu Hai 2022/10/31	CHECKED BY: Cooper Zhou 2022/10/31	APPROVED BY: Andy Zhang 2022/10/31



APPLICATION SPECIFICATION

4.2 ANTENNA PERFORMANCE

Description	Equipment	Requirement	
Frequency Range	VNA E5071C	2.4-2.5GHz	5.15-5.85GHz
Return Loss	VNA E5071C	<-10 dB	<-10 dB
Peak Gain (Max)	OTA Chamber	5.3dBi	4.5dBi
Average Total Efficiency	OTA Chamber	>80%	>75%
Polarization	OTA Chamber	Linear	
Input Impedance	VNA E5071C	50 ohms	

Note that the above antenna performance is measured with just the antenna mounted on a PCB to simulate a free-space condition. When implement into the system, the resonant frequency might be off-tune due to the loading of surrounding components especially metal plane. This off-tune can be compensated through matching. Although module manufacturers specify a peak gain limit, it is based on free-space conditions. The peak gain will be degraded by 1 to 2dB in the actual implementation as the radiation pattern will change due to the surrounding components. As such, during selection of antenna, you can select one with high peak gain to compensate for the loss. Molex can offer assistant to choose the best location and best tuning in-order to meet this peak gain requirement.

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	5 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

4.3 RETURN LOSS PLOT

All measurements in this document are done by installing the antenna on 100mm*100mm ground PCB.

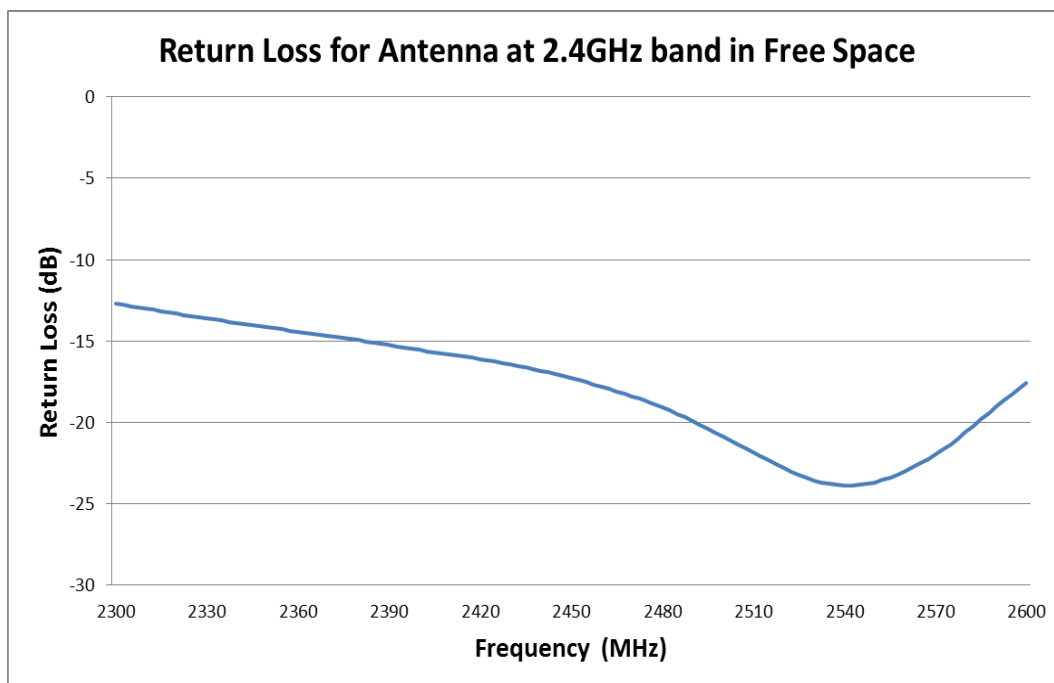


FIGURE 4.3.1 RETURN LOSS OF ANTENNA AT 2.4GHZ BAND IN FREE SPACE

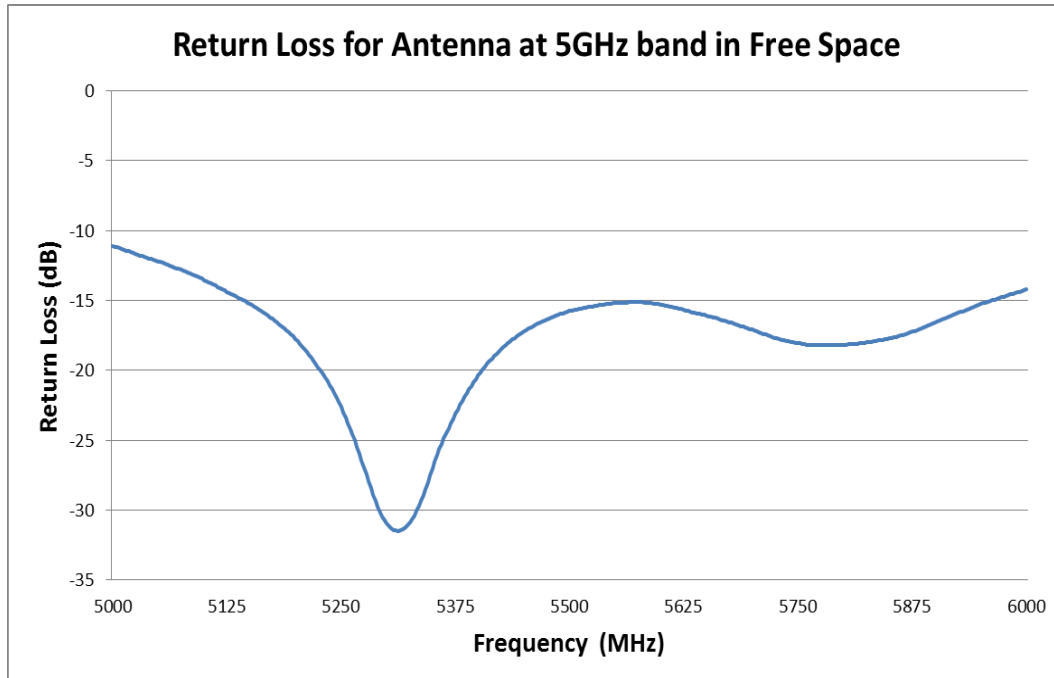


FIGURE 4.3.2 RETURN LOSS OF ANTENNA AT 5GHZ BAND IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	6 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

4.4 EFFICIENCY PLOT

All measurements in this document are done by installing the antenna on 100mm*100mm ground PCB.

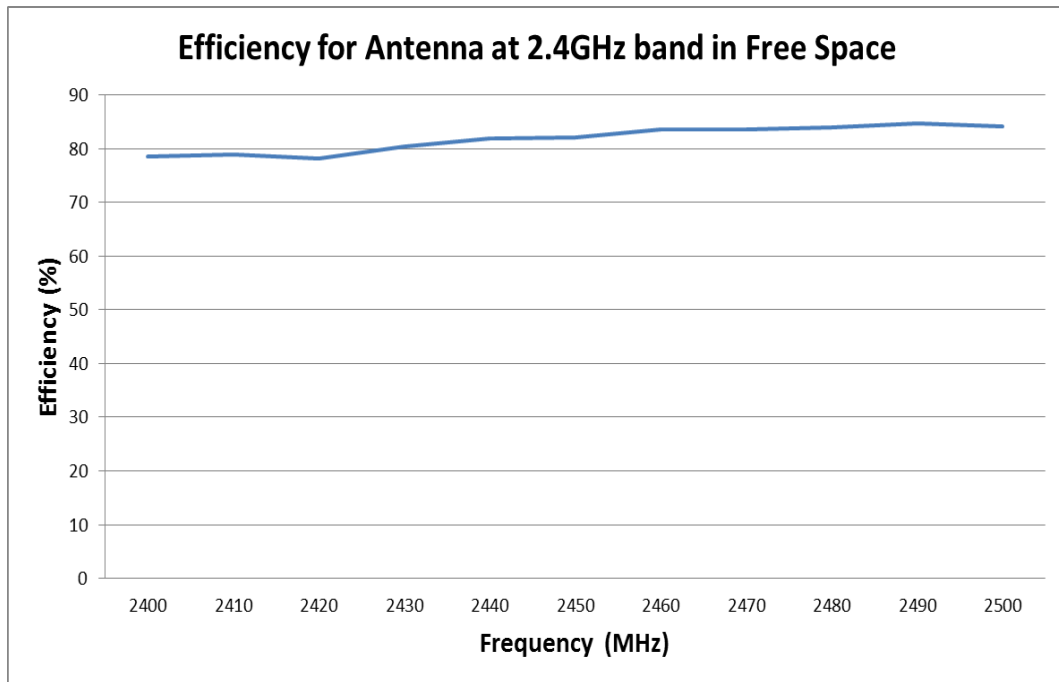


FIGURE 4.4.1 EFFICIENCY OF ANTENNA AT 2.4GHZ BAND IN FREE SPACE

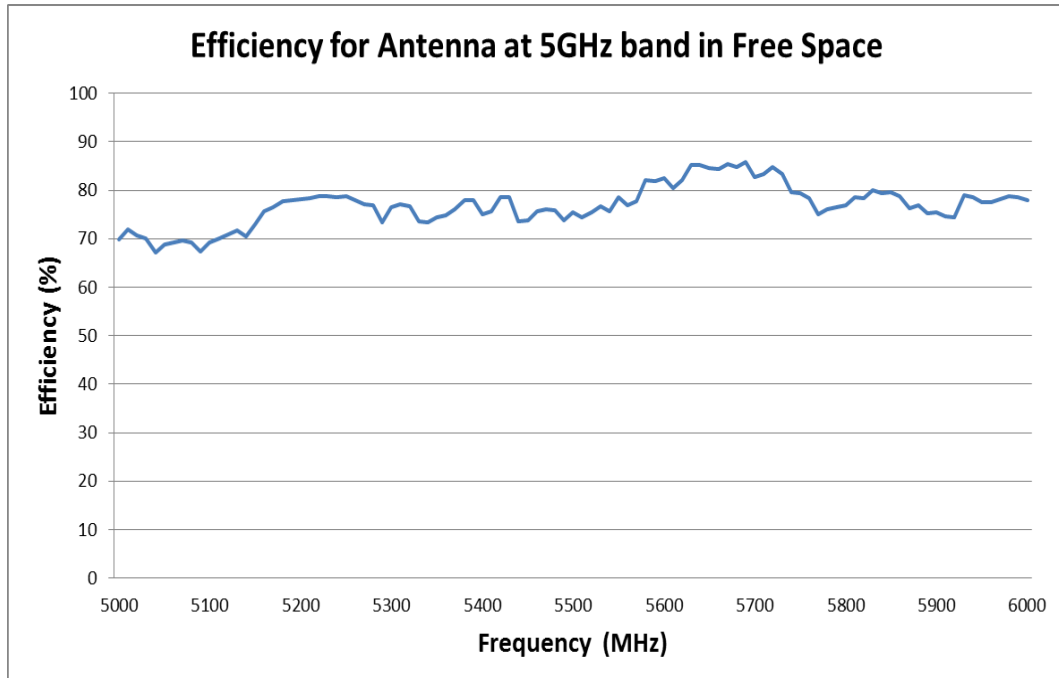


FIGURE 4.4.2 EFFICIENCY OF ANTENNA AT 5GHZ BAND IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	7 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

4.5 2D/3D RADIATION PATTERN

All measurements in this document are done by installing the antenna on 100mm*100mm ground PCB.

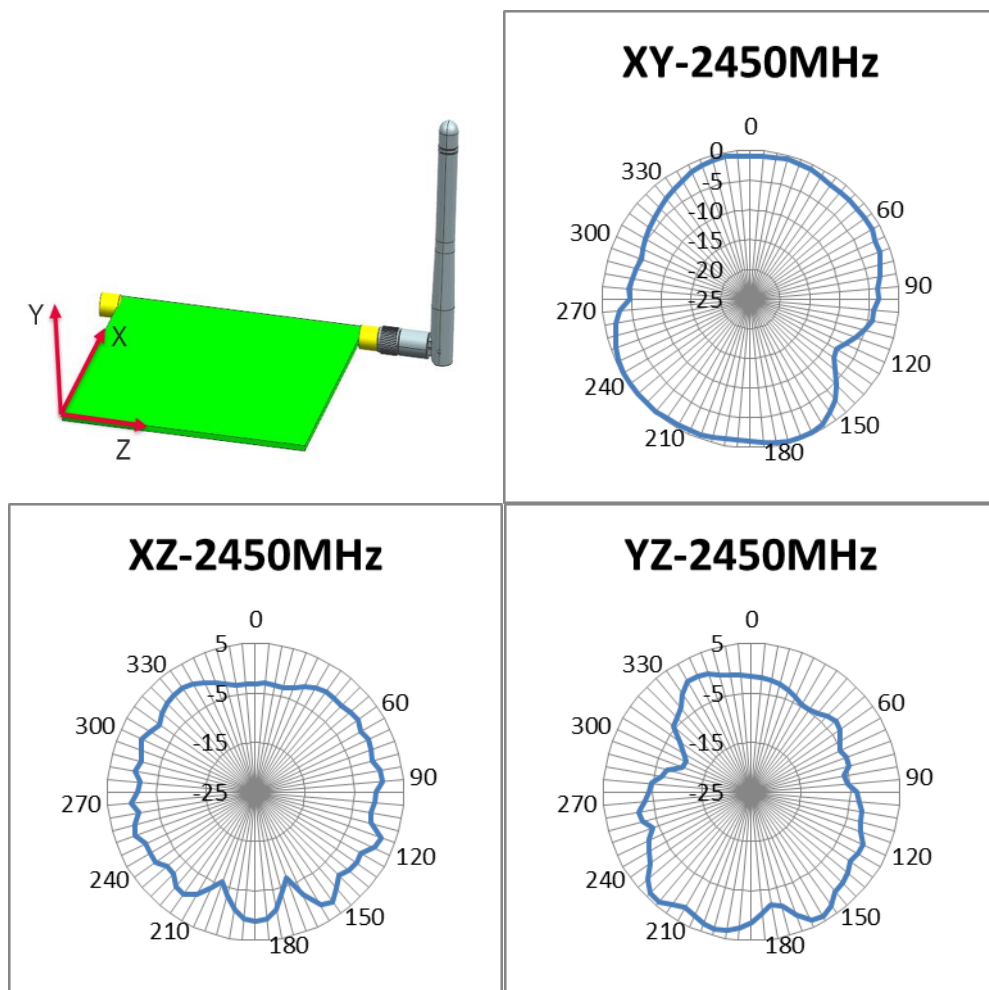


FIGURE 4.5.1 2D RADIATION PATTERN OF ANTENNA AT 2450MHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	8 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

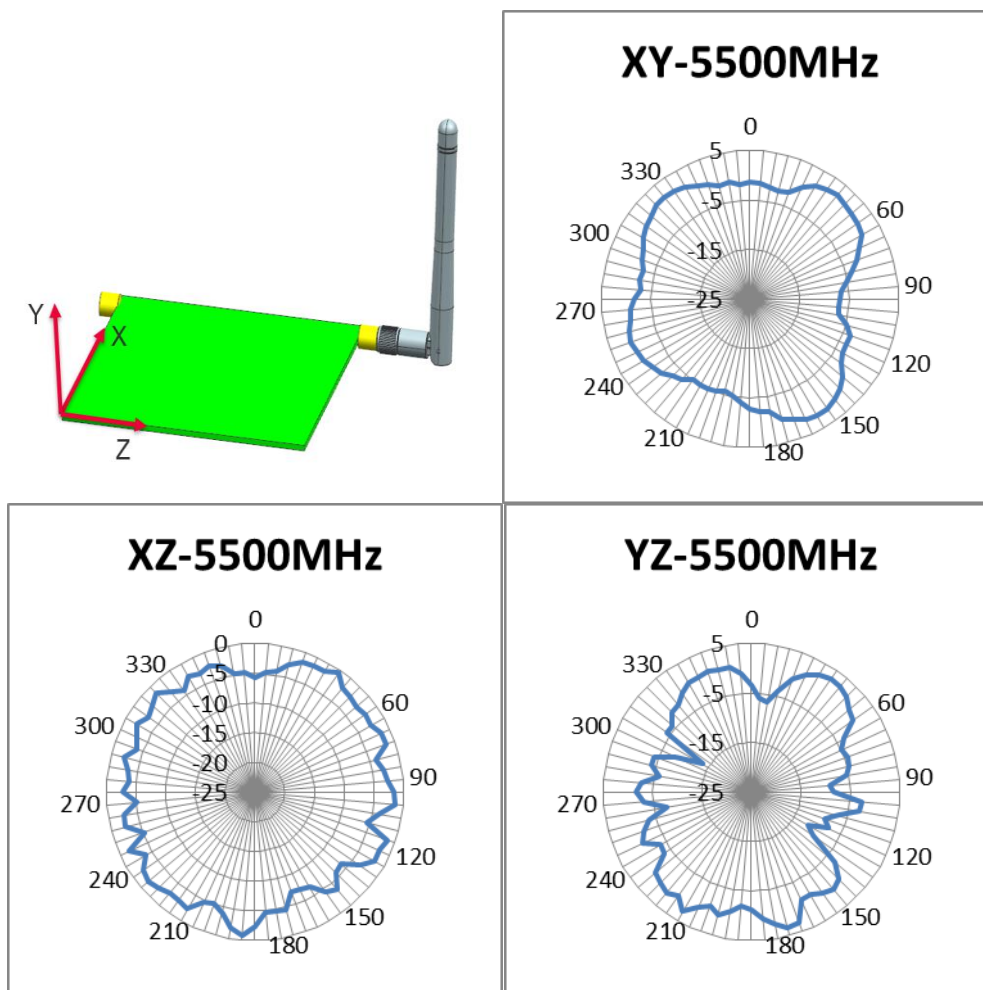


FIGURE 4.5.2 2D RADIATION PATTERN OF ANTENNA AT 5500MHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	9 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

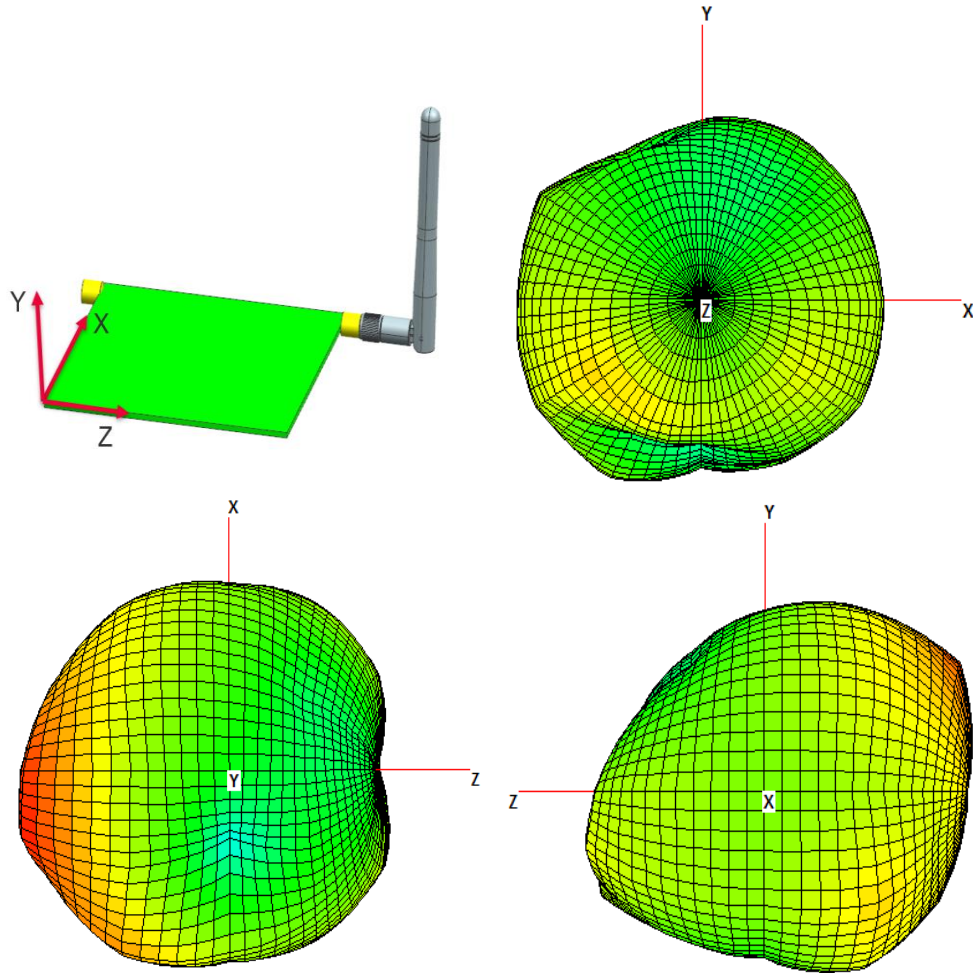


FIGURE 4.5.3 3D RADIATION PATTERN OF ANTENNA AT 2450MHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	10 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

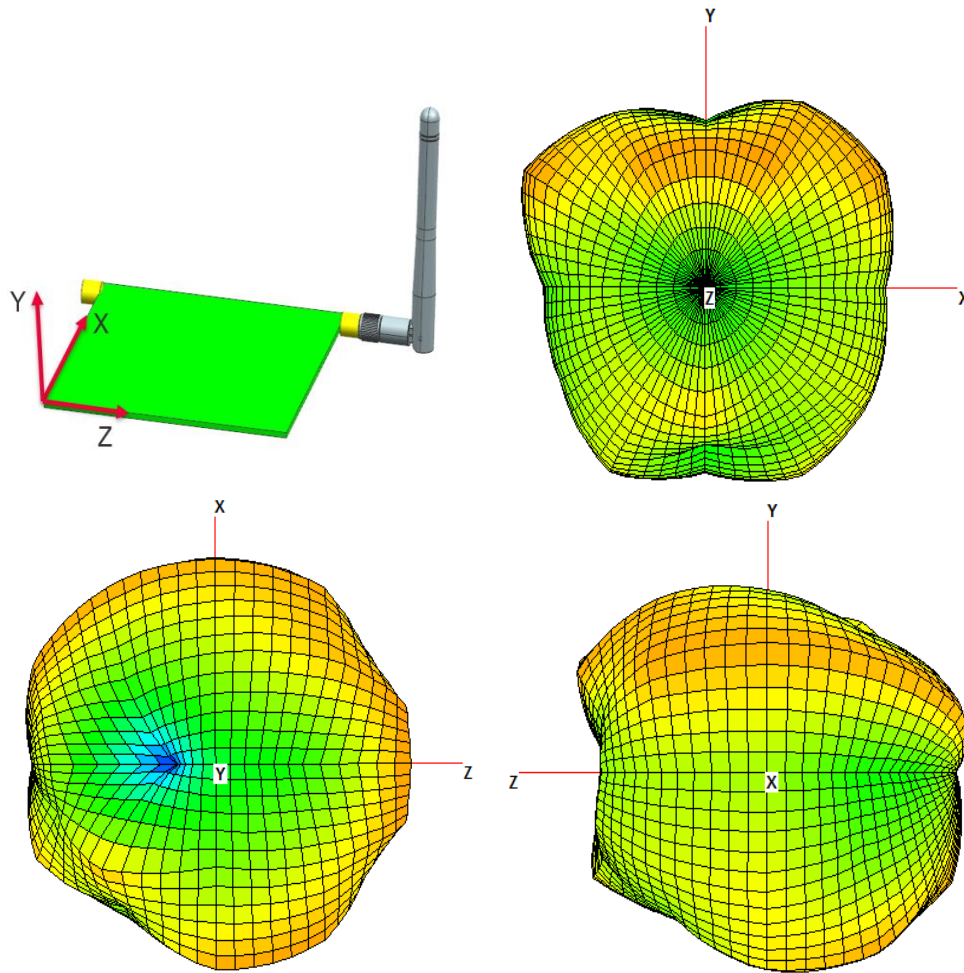


FIGURE 4.5.4 3D RADIATION PATTERN OF ANTENNA AT 5500MHZ IN FREE SPACE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	11 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

5.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

5.1 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT STATES

Four states for antenna have been evaluated and these states are shown in figure 5.1.0. The ground size is 100mm*100mm. The performance of antenna installed on ground PCB is better than that without ground PCB. The reference state with antenna mounted on ground PCB and bending 90 degree is recommended, which is a generally used state.

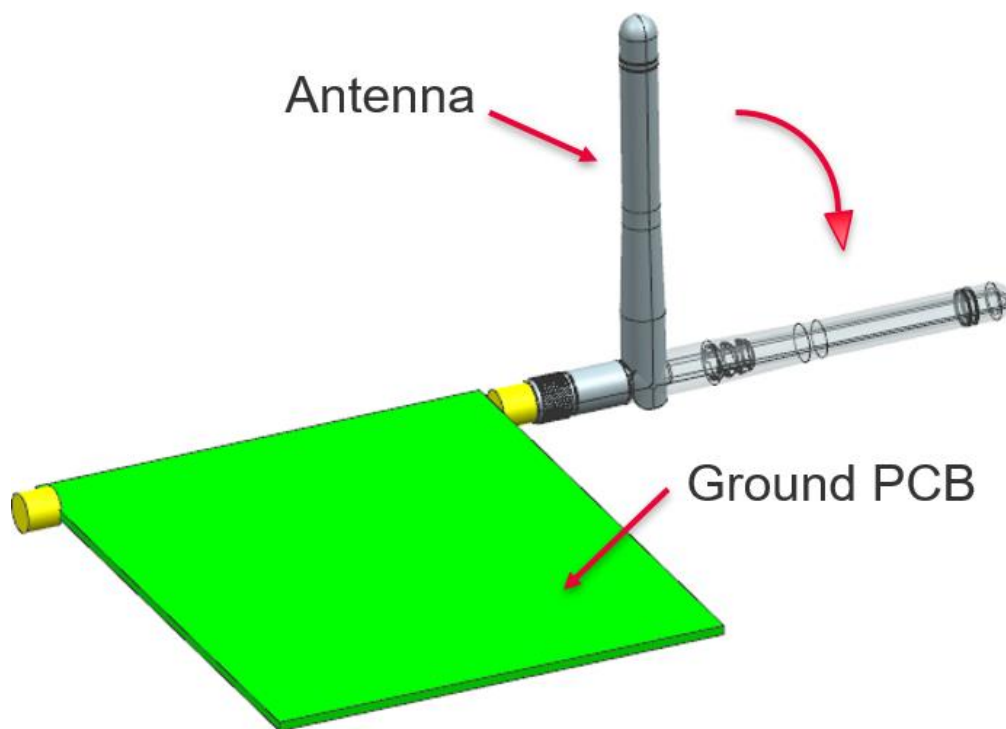


FIGURE 5.1.0 FOUR STATES FOR ANTENNA

Ground PCB Size: 100mm*100mm;

Reference state: Antenna mounted on ground PCB with bending 90 degree;

State 2: Antenna mounted on ground PCB without bending;

State 3: Single antenna without bending (without ground PCB);

State 4: Single antenna with bending 90 degree (without ground PCB).

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	12 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

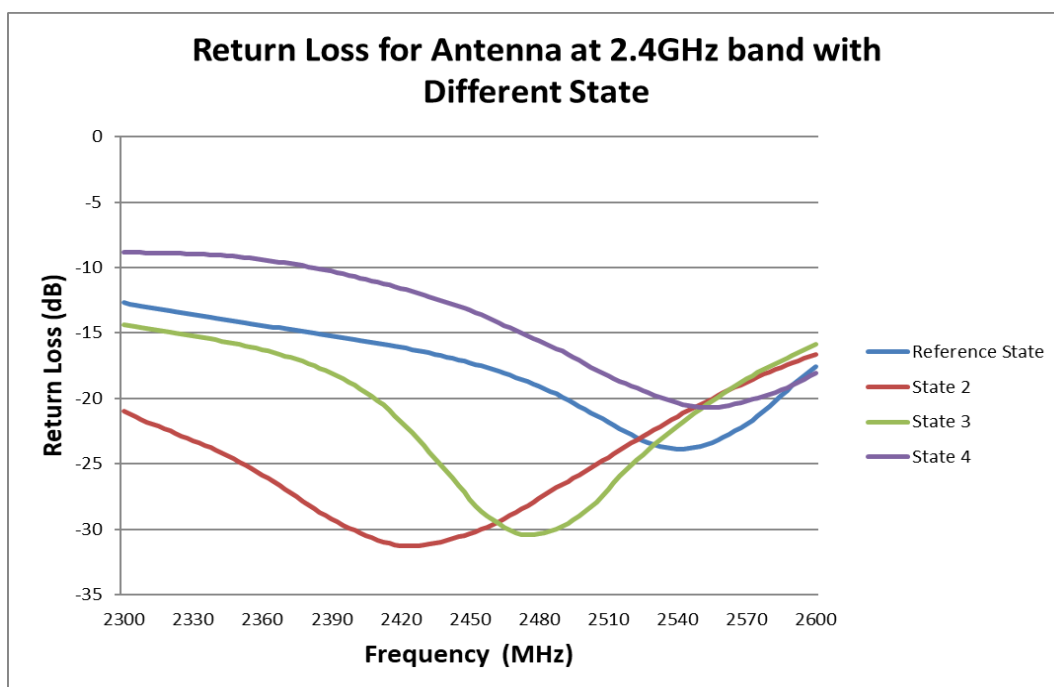


FIGURE 5.1.1 RETURN LOSS OF ANTENNA AT 2.4GHZ BAND WITH DIFFERENT STATE

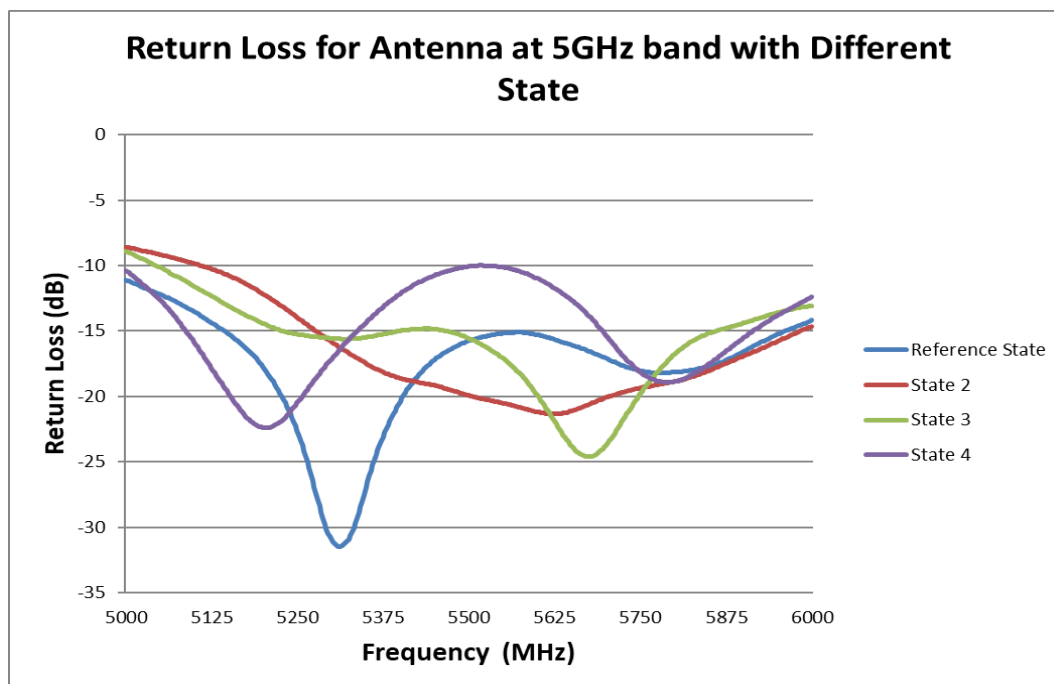


FIGURE 5.1.2 RETURN LOSS OF ANTENNA AT 5GHZ BAND WITH DIFFERENT STATE

REVISION: B	ECR/ECN INFORMATION: EC No: 726689 DATE: 2022/10/31	TITLE: Molex WIFI Dual Band Antenna Hinged Application Specification	SHEET No. 13 of 18
DOCUMENT NUMBER: AS-2128600001	CREATED / REVISED BY: Liu Hai 2022/10/31	CHECKED BY: Cooper Zhou 2022/10/31	APPROVED BY: Andy Zhang 2022/10/31

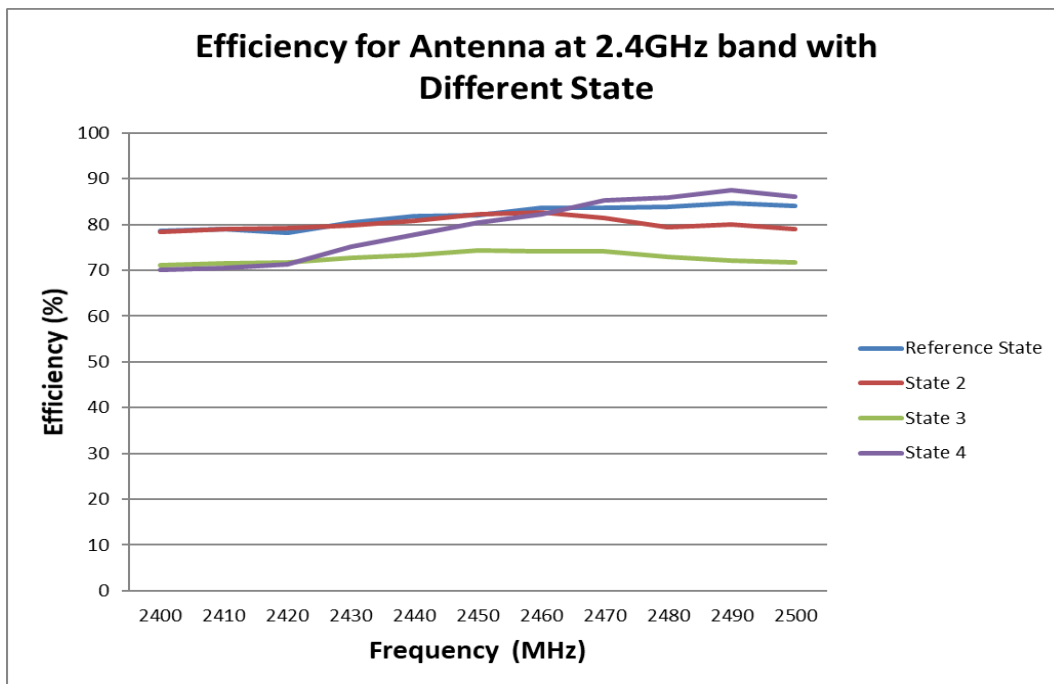


FIGURE 5.1.3 EFFICIENCY OF ANTENNA AT 2.4GHZ BAND WITH DIFFERENT STATE


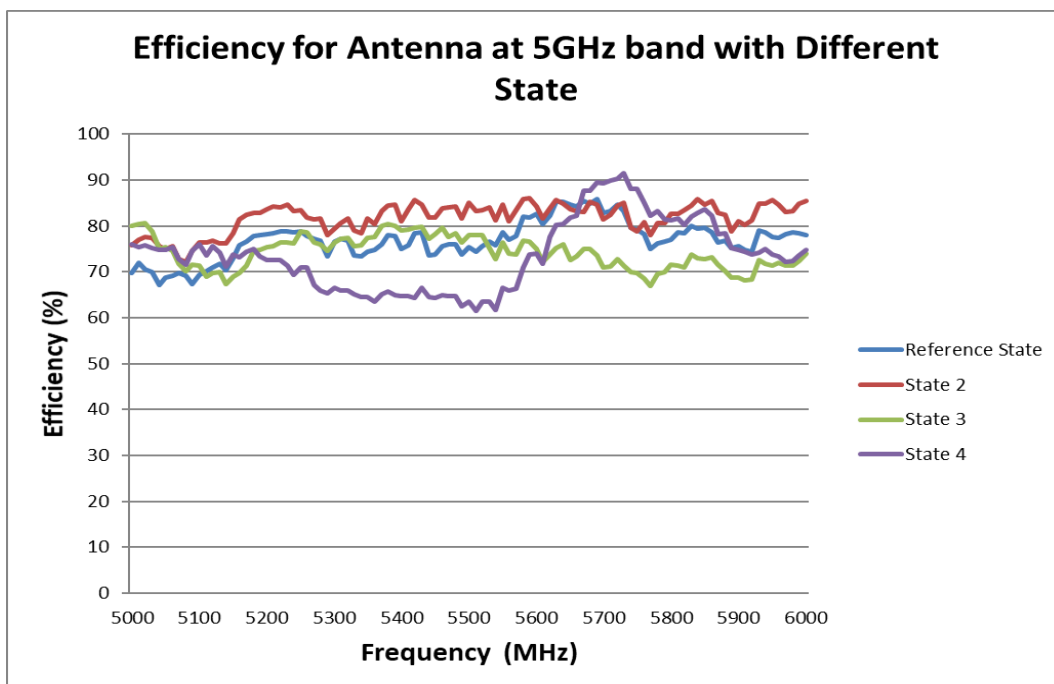


FIGURE 5.1.4 EFFICIENCY OF ANTENNA AT 5GHZ BAND WITH DIFFERENT STATE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	14 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

5.2 ANTENNA RF PERFORMANCE AS A FUNCTION WITH DIFFERENT GROUND SIZE

Five different ground size have been evaluated and the size are shown in figure 5.2.0. The change of ground size has little effect on the antenna performance, the minimum ground size is suggested to be 100*100mm.

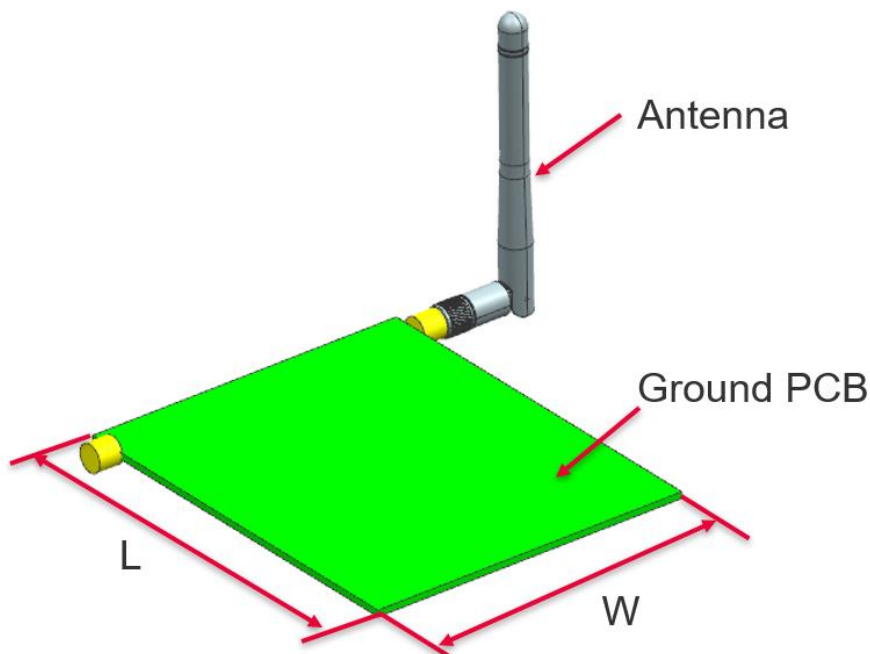

L*W (50*50、70*70、100*100、120*120、150*150)

FIGURE 5.2.0 FIVE DIFFERENT GROUND SIZE

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	15 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31

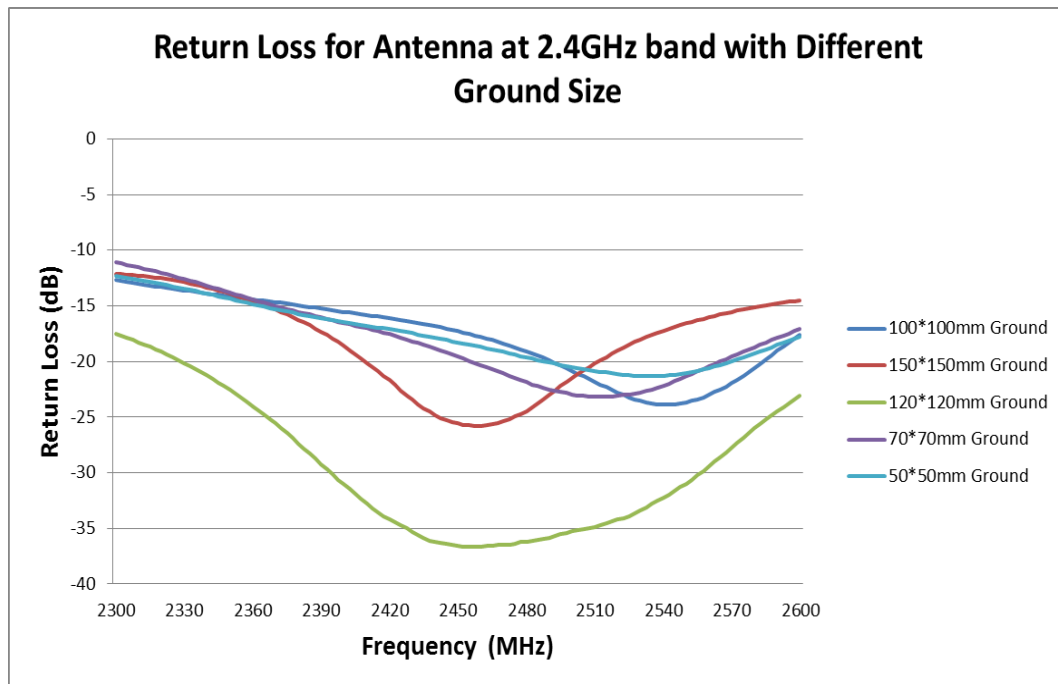


FIGURE 5.2.1 RETURN LOSS OF ANTENNA AT 2.4GHZ BAND WITH DIFFERENT GROUND SIZE

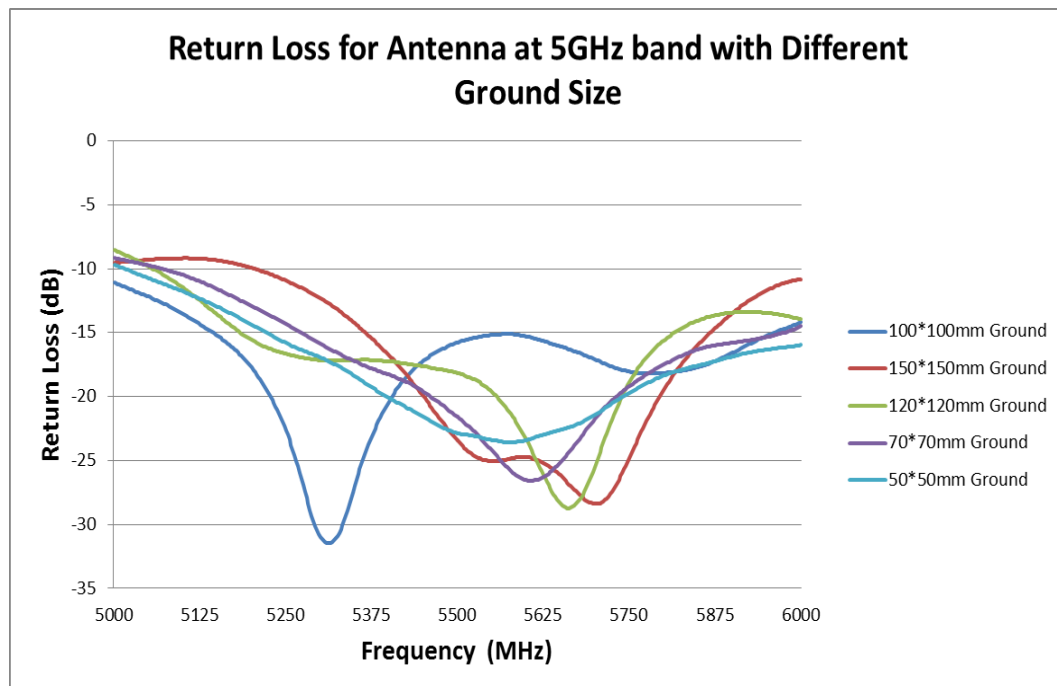


FIGURE 5.2.2 RETURN LOSS OF ANTENNA AT 5GHZ BAND WITH DIFFERENT GROUND SIZE

REVISION: B	ECR/ECN INFORMATION: EC No: 726689 DATE: 2022/10/31	TITLE: Molex WIFI Dual Band Antenna Hinged Application Specification	SHEET No. 16 of 18
DOCUMENT NUMBER: AS-2128600001	CREATED / REVISED BY: Liu Hai 2022/10/31	CHECKED BY: Cooper Zhou 2022/10/31	APPROVED BY: Andy Zhang 2022/10/31

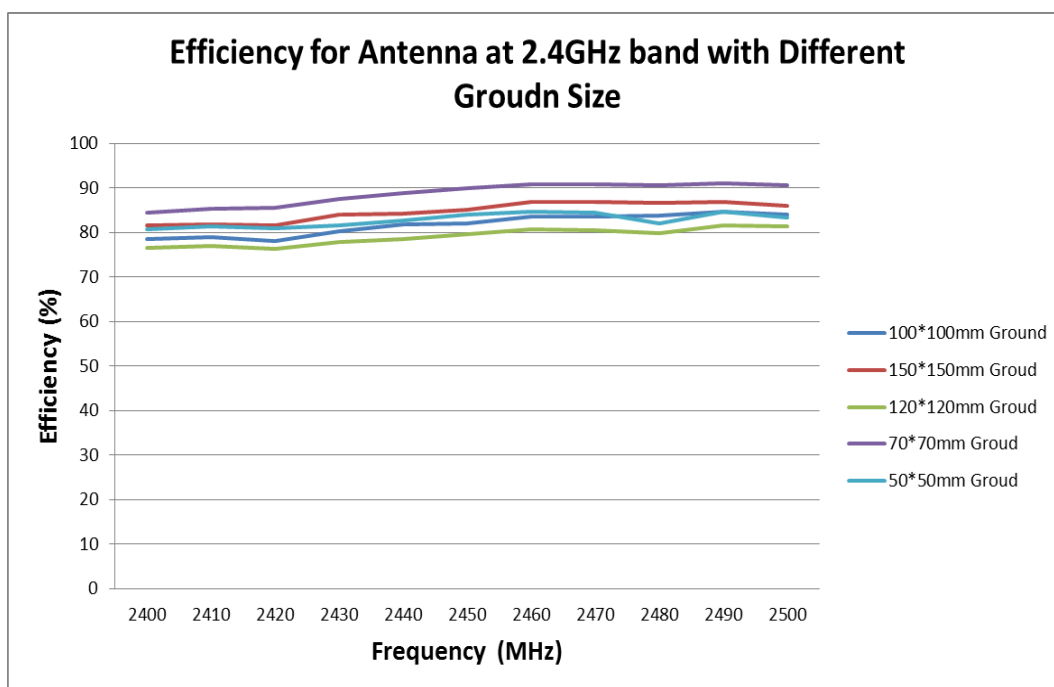


FIGURE 5.2.3 EFFICIENCY OF ANTENNA AT 2.4GHZ BAND WITH DIFFERENT GROUND SIZE

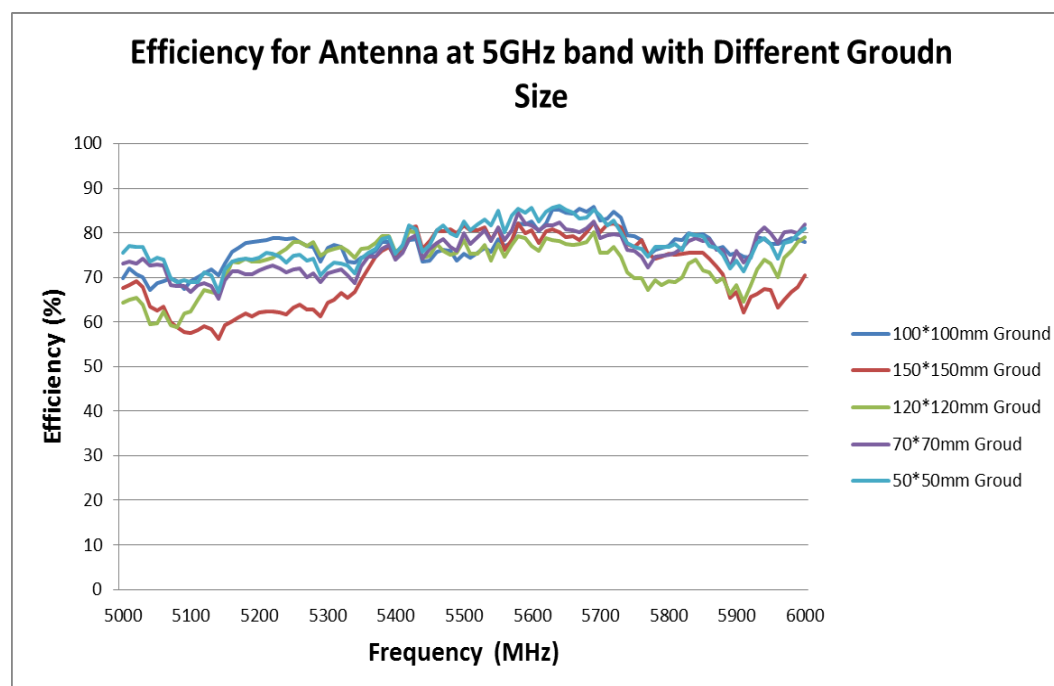


FIGURE 5.2.4 EFFICIENCY OF ANTENNA AT 5GHZ BAND WITH DIFFERENT GROUND SIZE

REVISION: B	ECR/ECN INFORMATION: EC No: 726689 DATE: 2022/10/31	TITLE: Molex WIFI Dual Band Antenna Hinged Application Specification	SHEET No. 17 of 18
DOCUMENT NUMBER: AS-2128600001	CREATED / REVISED BY: Liu Hai 2022/10/31	CHECKED BY: Cooper Zhou 2022/10/31	APPROVED BY: Andy Zhang 2022/10/31



APPLICATION SPECIFICATION

6.0 CHANGE HISTORY

REV	DATE	DESCRIPTION
A	2019/10/19	First Release
B	2022/10/31	Update gain values in Table 4.2.

Address : 2222 Wellington Ct Lisle, IL 60532, USA

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: 726689 DATE: 2022/10/31	Molex WIFI Dual Band Antenna Hinged Application Specification	18 of 18
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
AS-2128600001	Liu Hai 2022/10/31	Cooper Zhou 2022/10/31	Andy Zhang 2022/10/31