

# FCC Test Report

Report No.: AGC00429241002FR01

FCC ID	:	2BB5QRW1-RW2
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Headset
BRAND NAME	:	RoadWarrior
MODEL NAME	:	RW2 RoadWarrior, RW1 RoadWarrior
APPLICANT	:	ThinkWrite Technologies LLC
DATE OF ISSUE	:	Nov. 08, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
<b>REPORT VERSION</b>	:	V1.0







# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 08, 2024	Valid	Initial Release



# **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	7
2.6 Equally Average Use of Frequencies And Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	9
2.9 Equipment Modifications	9
2.10 Antenna Requirement	9
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	24
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8 / Measurement Results	21



9. Radiated Spurious Emission	. 51
9.1 Measurement Limit	. 51
9.2 Measurement Procedure	. 51
9.3 Measurement Setup (Block Diagram of Configuration)	. 54
9.4 Measurement Result	. 55
10. Number of Hopping Frequency Measurement	. 69
10.1 Provisions Applicable	. 69
10.2 Measurement Procedure	. 69
10.3 Measurement Setup (Block Diagram of Configuration)	. 69
10.4 Measurement Result	. 69
11. Time of Occupancy (Dwell Time) Measurement	.71
11.1 Provisions Applicable	. 71
11.2 Measurement Procedure	. 71
11.3 Measurement Setup (Block Diagram of Configuration)	. 71
11.4 Measurement Result	. 71
12. Frequency Separation Measurement	. 75
12.1 Provisions Applicable	. 75
12.2 Measurement Procedure	. 75
12.3 Measurement Setup (Block Diagram of Configuration)	. 75
12.4 Measurement Result	. 75
13. AC Power Line Conducted Emission Test	. 77
13.1 Measurement Limit	. 77
13.2 Measurement Setup (Block Diagram of Configuration)	. 77
13.3 Preliminary Procedure of Line Conducted Emission Test	
13.4 Final Procedure of Line Conducted Emission Test	. 78
13.5 Measurement Results	. 78
Appendix I: Photographs of Test Setup	. 79
Appendix II: Photographs of Test EUT	. 79



# **1. General Information**

Applicant	ThinkWrite Technologies LLC			
Address	6878 Embarcadero Lane, Carlsbad, California 90211, United States			
Manufacturer	Huizhou Weide Electronics Co., Ltd.			
Address	Jimadi Industrial Area, Boluo County, Huizhou, Guangdong, 516100, China.			
Factory	Huizhou Weide Electronics Co., Ltd.			
Address	Jimadi Industrial Area, Boluo County, Huizhou, Guangdong, 516100, China.			
Product Designation	Wireless Headset			
Brand Name	RoadWarrior			
Test Model	RW2 RoadWarrior			
Series Model	RW1 RoadWarrior			
Declaration of Difference	All models are identical, the only difference is the shape of the headphone mainboard, antenna and appearance color.			
Date of receipt of test item	Oct. 25, 2024			
Date of Test	Oct. 25, 2024~Nov. 08, 2024			
Deviation from Standard	No any deviation from the test method			
Condition of Test Sample	Normal			
Test Result	Pass			
Test Report Form No	AGCER-FCC-BR_EDR-V1			

Note: The test results of this report relate only to the tested sample identified in this report.

Thea Huang Prepared By Thea Huang Nov. 08, 2024 (Project Engineer) lin -

Reviewed By

Calvin Liu

(Reviewer)

Nov. 08, 2024

Approved By

Max Zhang (Authorized Officer)

Nov. 08, 2024



# 2. Product Information

# 2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BR 🖾 GFSK, EDR 🖾 $\pi$ /4-DQPSK, 🖾 8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	-5.791dBm
Hardware Version	V3.2
Software Version	V1.0
Antenna Designation	FPC Antenna
Antenna Gain	RW2 RoadWarrior: 2.79dBi RW1 RoadWarrior: 2.70dBi
Power Supply	DC 3.7V by battery

# 2.2 Test Frequency List

Frequency Band	Channel Number	Frequency			
	0	2402 MHz			
	1	2403 MHz			
	:	:			
2400~2483.5MHz	39	2441MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			
Note: f = 2402 + 1k MHz, k = 0,, 78 ; "f "is the operating frequency (MHz); "k" is the operating channel.					



# 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2BB5QRW1-RW2, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

# 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15 Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

## 2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

# 2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



## 2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20	76	02	19		21	64	75
								1	1		
			li						:		
						; ;			i i		
				i		<u></u>		1	i		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



#### 2.8 Special Accessories

Not available for this EUT intended for grant.

## **2.9 Equipment Modifications**

Not available for this EUT intended for grant.

#### 2.10 Antenna Requirement

#### Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The model RW2 RoadWarrior gain of the antenna is 2.70dBi, the model RW1 RoadWarrior gain of the antenna is 2.70dBi.



# 3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



## **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

#### **3.4 Measurement Uncertainty**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



### 3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\square$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
$\boxtimes$	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
$\boxtimes$	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
$\square$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
$\square$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
$\square$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
$\square$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
$\bowtie$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
$\square$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		



• Tes	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
	AGC-EM-S004	RE Test System	Tonscend	TS+Ver2.1(JS32-RE)	4.0.0.0		
$\square$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
$\square$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



# **4.System Test Configuration**

## **4.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

Radiated Emission Configure:



# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No	. Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	RISYM	USB-TTL		

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1				-	



#### 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



# 5. Description of Test Modes

Summary table of Test Cases           Data Rate / Modulation           Bluetooth – BR_EDR (GFSK/m /4-DQPSK/8DPSK)           Mode 1: Bluetooth Tx CH30_2402 MHz_1Mbps (Battery power Mode 3: Bluetooth Tx CH32_2440 MHz_1Mbps (Battery power Mode 4: Bluetooth Tx CH32_2440 MHz_2Mbps (Battery power Mode 5: Bluetooth Tx CH32_2440 MHz_2Mbps (Battery power Mode 5: Bluetooth Tx CH32_2440 MHz_2Mbps (Battery power Mode 6: Bluetooth Tx CH32_2440 MHz_3Mbps (Battery power Mode 6: Bluetooth Tx CH32_2440 MHz_3Mbps (Battery power Mode 6: Bluetooth Tx CH32_2441 MHz_3Mbps (Battery power Mode 6: Bluetooth Tx CH32_2440 MHz_3Mbps (Battery power Mode 10: Bluetooth Tx Happing-1Mbps (Battery powered) Mode10: Bluetooth Tx Happing-1Mbps (Battery powered) Mode11: Bluetooth Tx Happing-3Mbps (Battery powered) Mode12: Bluetooth Tx Happing-3Mbps (Battery powered) Mode13: Bluetooth Tx Happing-3Mbps (Battery powered) Mode14: Bluetooth Tx Happing-3Mbps (Battery powered) Mode15: Bluetooth Tx Happing-3Mbps (Battery powered) Mode16: Bluetooth Tx Happing-3Mbps (Battery powered) Mode17:		Summany table	of Tost Casos			
Test Item       Bluetooth – BR_EDR (GFSK/m /4-DQPSK/8DPSK)         Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery power Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery power Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery power Mode 4: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery power Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery power Mode 6: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery power Mode 7: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery power Mode 9: Bluetooth Tx CH78_2440 MHz_3Mbps (Battery power Mode 10: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery power Mode 11: Bluetooth Tx Hopping-1Mbps (Battery power Mode 11: Bluetooth Tx Hopping-2Mbps (Battery power Mode 12: Bluetooth Tx Hopping-3Mbps (Battery power Mode 12: Bluetooth Tx Hopping-3Mbps (Battery powered) Mode 12: Blue		Summary table				
Bluetooth – BR_EDR (GFSK/tr /4-DQPSK/8DPSK)         Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery power Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery power Mode 3: Bluetooth Tx CH32_2480 MHz_1Mbps (Battery power Mode 4: Bluetooth Tx CH32_2480 MHz_2Mbps (Battery power Mode 5: Bluetooth Tx CH32_2480 MHz_2Mbps (Battery power Mode 6: Bluetooth Tx CH32_2441 MHz_3Mbps (Battery power Mode 6: Bluetooth Tx CH32_2441 MHz_3Mbps (Battery power Mode 9: Bluetooth Tx CH32_2440 MHz_3Mbps (Battery power Mode 10: Bluetooth Tx Hopping-1Mbps (Battery powered) Mode11: Bluetooth Tx Hopping-3Mbps (Battery powered) Mode12: Bluetooth Tx Hopping-3Mbps (Battery powe	Test Item	Data Rate / Modulation				
Radiated & Conducted Test Cases       Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery power Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery power Mode 4: Bluetooth Tx CH09_2441 MHz_2Mbps (Battery power Mode 6: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery power Mode 6: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery power Mode 6: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery power Mode 9: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery power Mode 10: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery power Mode 10: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery power Mode 10: Bluetooth Tx Hopping-1Mbps (Battery power Mode 11: Bluetooth Tx Hopping-1Mbps (Battery power Mode 12: Bluetooth Tx Hopping-3Mbps (Battery powered) Mode 12: B	lest tielli	Bluetooth – B	R_EDR (GFSK/π /4-DQPSK/8DF	°SK)		
AC Conducted Emission N/A Note: 1. Only the result of the worst case was recorded in the report, if no other cases. 2. The battery is full-charged during the test. 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode. 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture Software Setting Diagram  FCC Assist 1.0.2.2 FCC Assist 1.0.2 F		Mode 2: Bluetooth Tx Mode 3: Bluetooth Tx Mode 4: Bluetooth Tx Mode 5: Bluetooth Tx Mode 6: Bluetooth Tx Mode 7: Bluetooth Tx Mode 8: Bluetooth Tx Mode 9: Bluetooth Tx Mode 10: Bluetooth Mode11: Bluetooth	CH39_2441 MHz_1Mbps (Batter CH78_2480 MHz_1Mbps (Batter CH00_2402 MHz_2Mbps (Batter CH39_2441 MHz_2Mbps (Batter CH78_2480 MHz_2Mbps (Batter CH00_2402 MHz_3Mbps (Batter CH39_2441 MHz_3Mbps (Batter CH39_2441 MHz_3Mbps (Batter CH78_2480 MHz_3Mbps (Batter CH78_2480 MHz_3Mbps (Batter Dth Tx Hopping-1Mbps (Battery point th Tx Hopping-2Mbps (Battery point)	ry powered) ry powered) ry powered) ry powered) ry powered) ry powered) ry powered) ry powered) owered) owered)		
<ol> <li>Only the result of the worst case was recorded in the report, if no other cases.</li> <li>The battery is full-charged during the test.</li> <li>For Radiated Emission, 3axis were chosen for testing for each applicable mode.</li> <li>For Conducted Test method, a temporary antenna connector is provided by the manufacture Software Setting Diagram</li> </ol>	Conducted Emission		N/A			
IPansmit_Fover 3       return code: 0x0         Packet_Type       I=DH5         Hopping       0N         Data_Types       Fn9         Send configuration       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00         return code: 0x0       Regy data: 04 0E 04 01 01 FC 00	For Radiated Emission, For Conducted Test me FCC Assist 事助() 串口设置 単位 一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一一	3axis were chosen for testin thod, a temporary antenna c Software Setti 10.2.2 (IDSE-SERIAL CH340) ・ (IDSE-SERIAL CH340) (IDSE-SERIAL CH340) (IDSE-	Onnector is provided by the manual ng Diagram	Ifacture.		



# 6. RF Output Power Measurement

# 6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

# 6.2 Measurement Procedure

⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$  RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# For Average power test:

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required


# 6.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

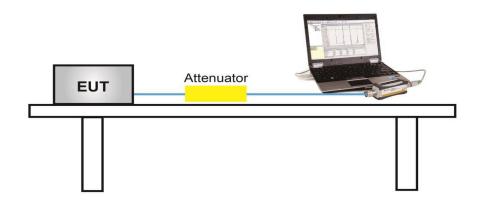




## For peak power test setup

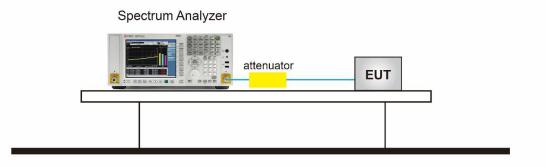

#### 6.4 Measurement Result


Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	-7.017	≤21	Pass	
GFSK	2441	-7.117	≤21	Pass	
	2480	-7.647	≪21	Pass	
	2402	-6.267	≤21	Pass	
π /4-DQPSK	2441	-6.321	≤21	Pass	
	2480	-6.801	≤21	Pass	
	2402	-5.791	≤21	Pass	
8DPSK	2441	-5.914	≤21	Pass	
	2480	-6.454	≦21	Pass	



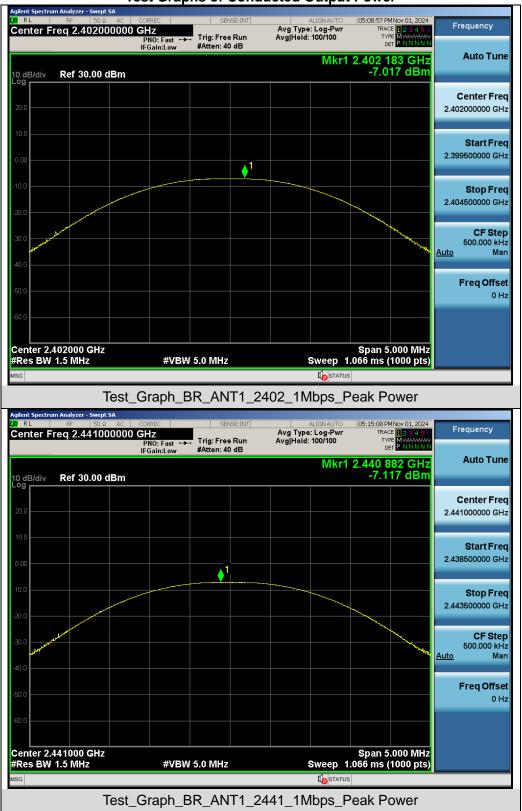


#### **Test Graphs of Conducted Output Power**




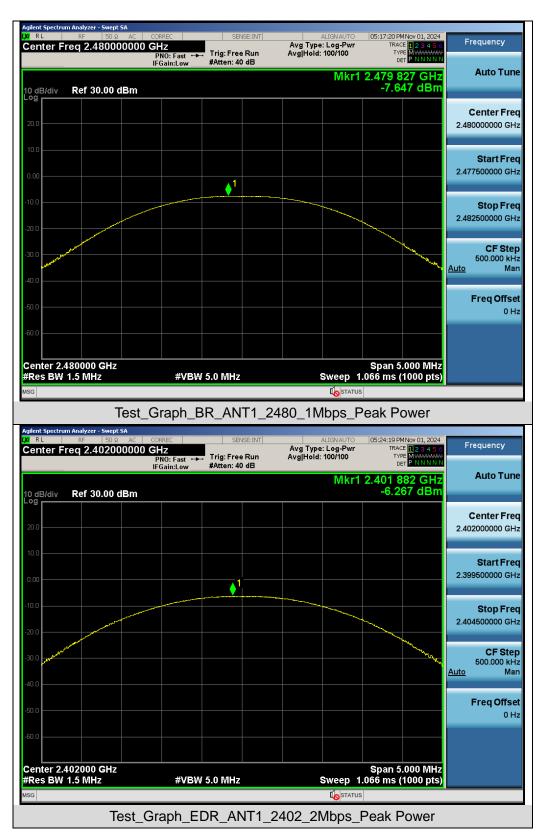



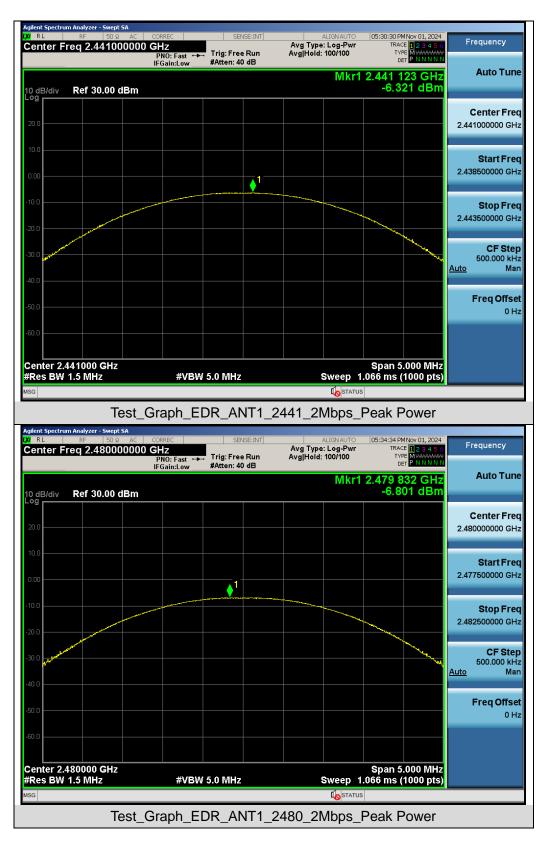



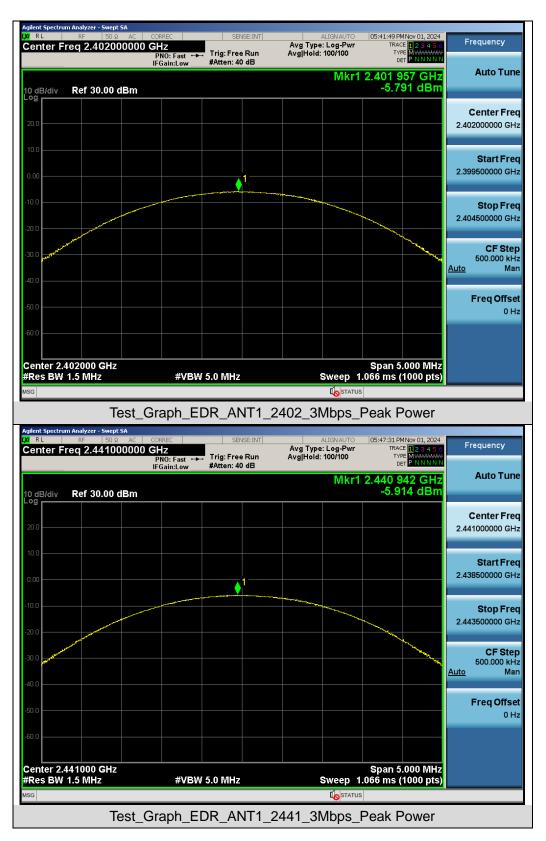







# 7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

# 7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

## 7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW  $\geq$  1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW  $\geq$  3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

# 7.3 Measurement Setup (Block Diagram of Configuration)

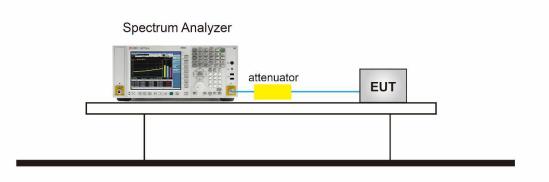




#### 7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth							
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail		
	2402	0.860	0.957	N/A	Pass		
GFSK	2441	0.861	0.953	N/A	Pass		
	2480	0.862	0.957	N/A	Pass		
	2402	1.170	1.284	N/A	Pass		
π /4-DQPSK	2441	1.169	1.284	N/A	Pass		
	2480	1.170	1.282	N/A	Pass		
	2402	1.174	1.298	N/A	Pass		
8DPSK	2441	1.174	1.298	N/A	Pass		
	2480	1.174	1.299	N/A	Pass		


#### Test Graphs of Occupied Bandwidth and -20 Bandwidth

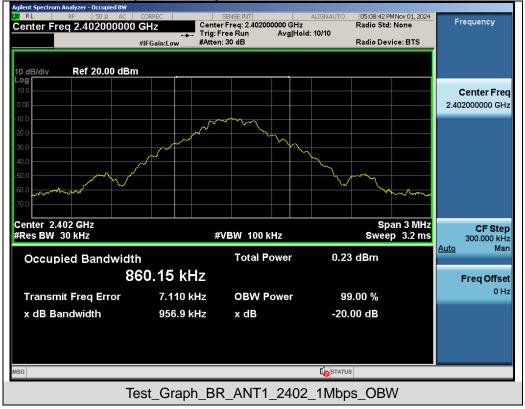









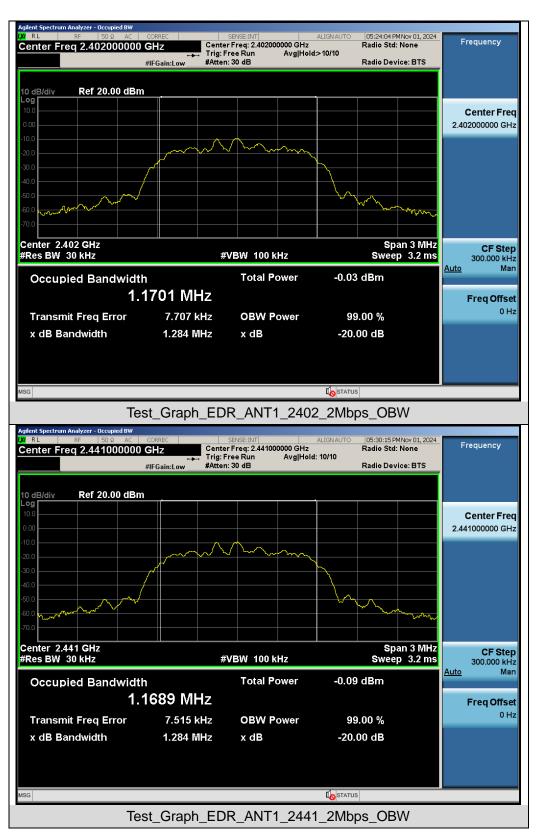



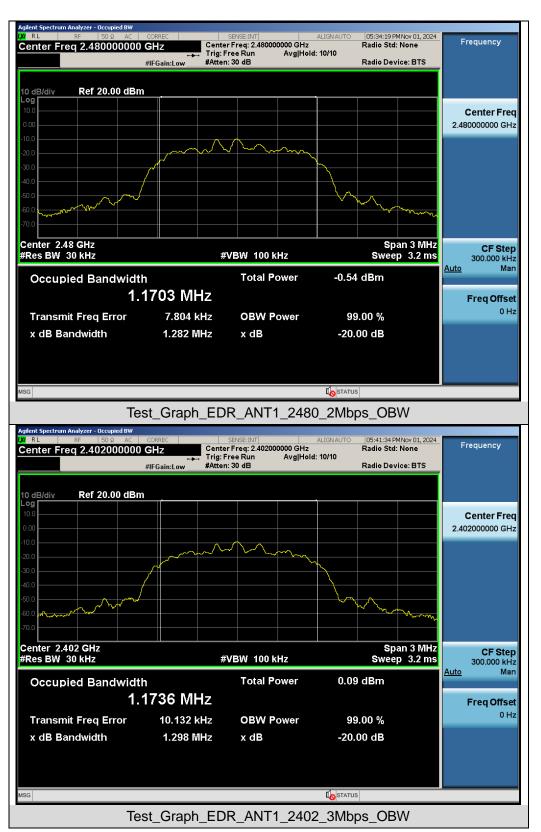



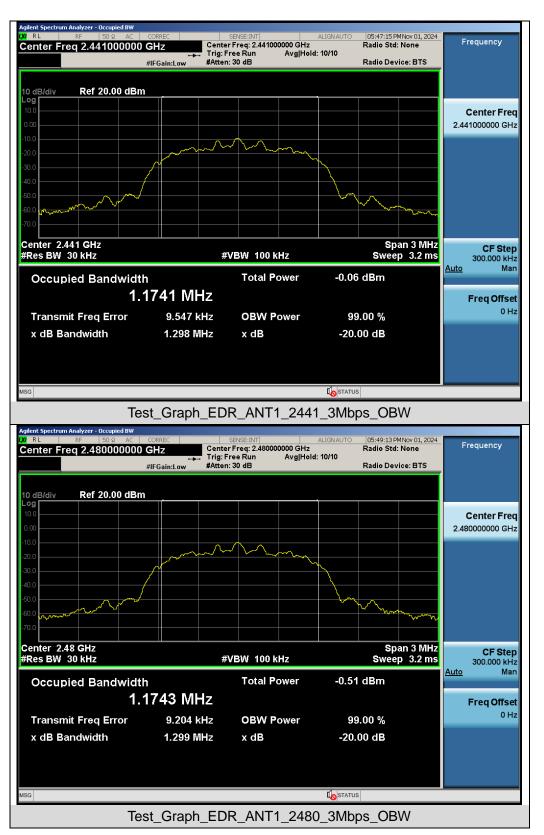



# 8. Conducted Band Edge and Out-of-Band Emissions

#### 8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:

- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

### 8.3 Measurement Setup (Block Diagram of Configuration)

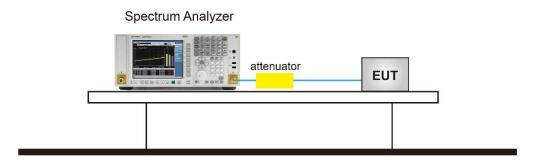




#### **8.4 Measurement Results**




## Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



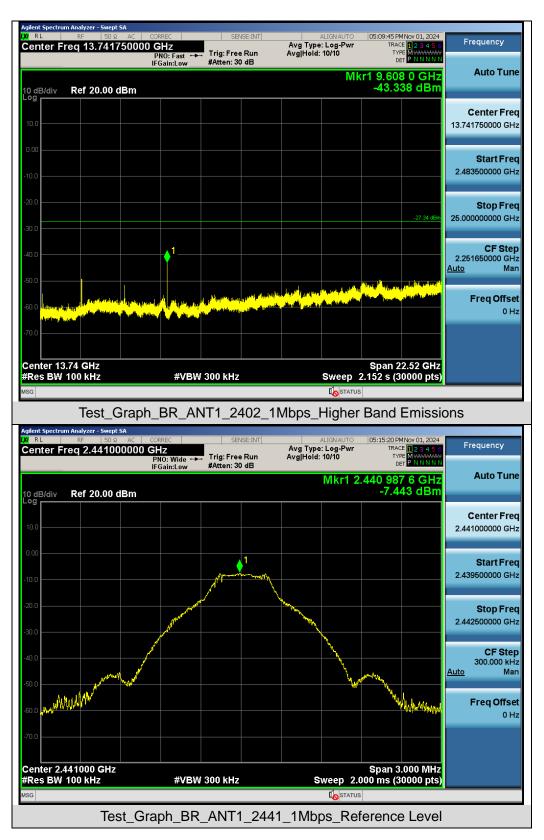




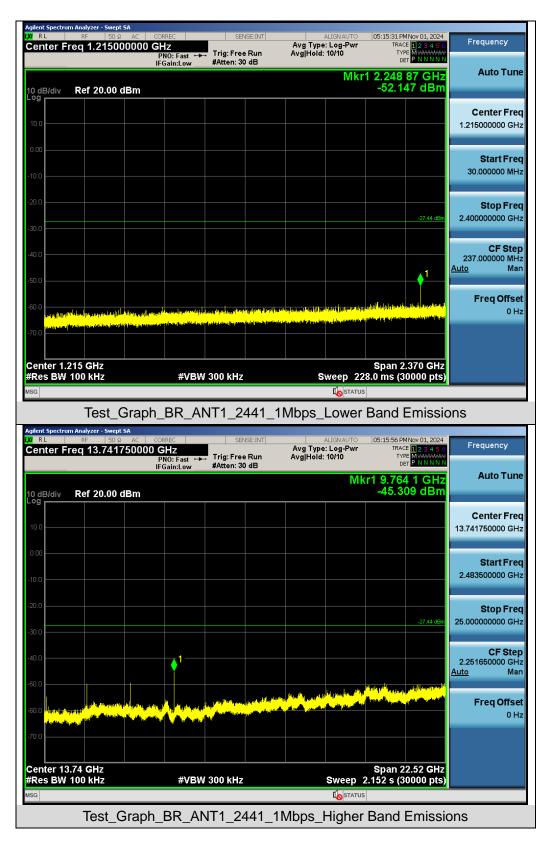








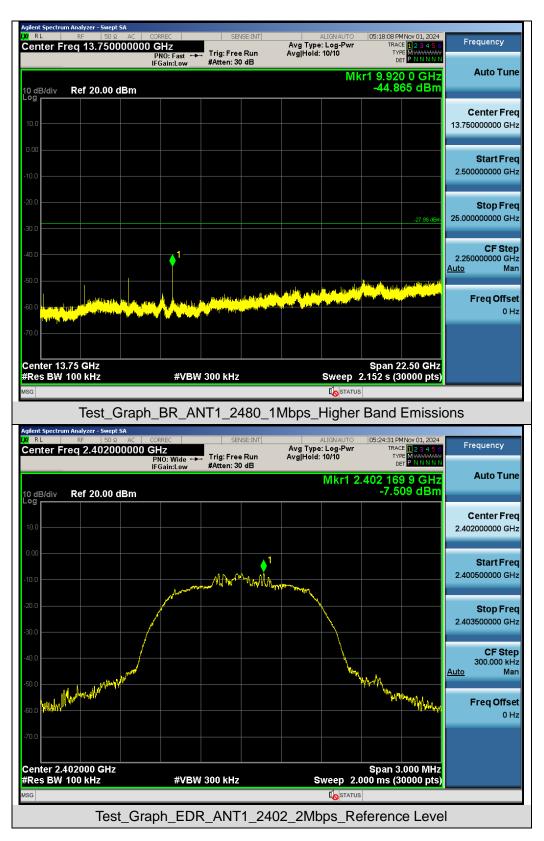




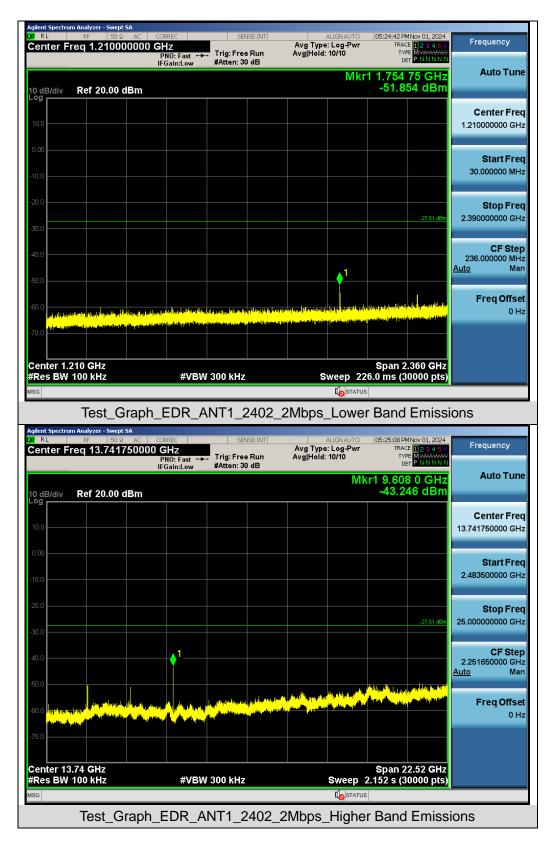








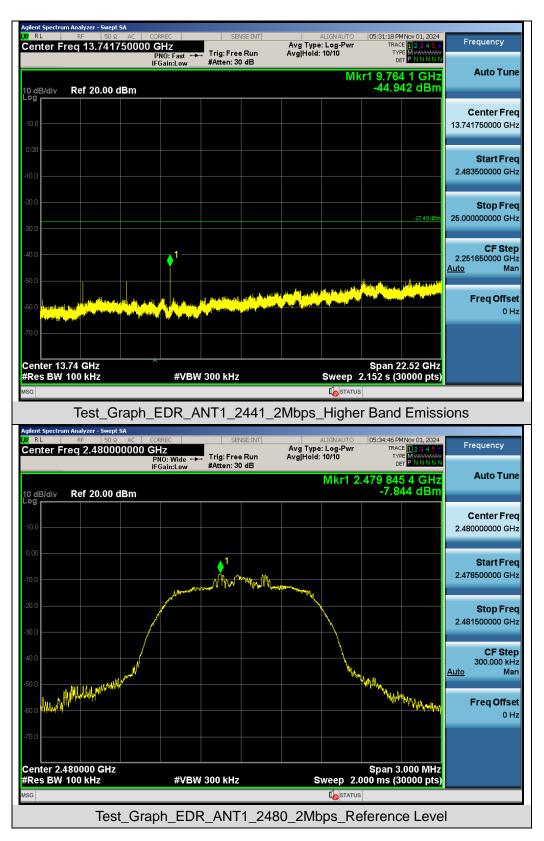




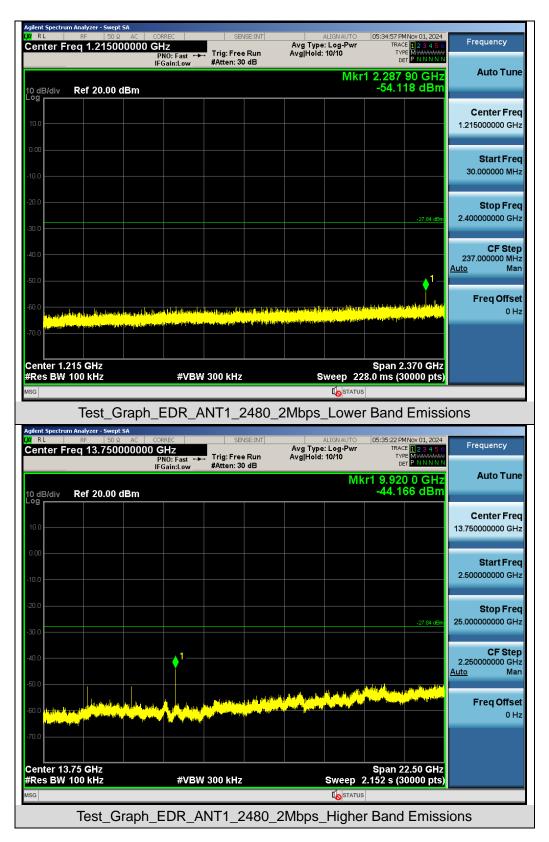








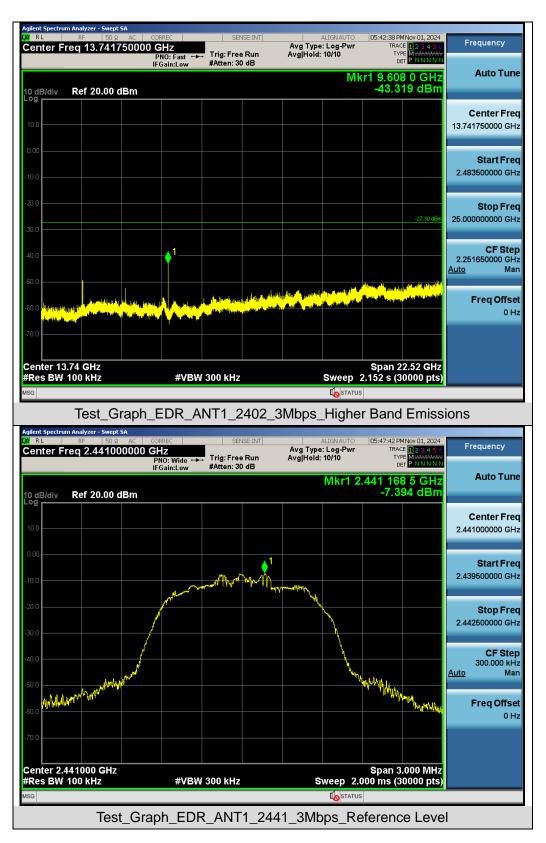




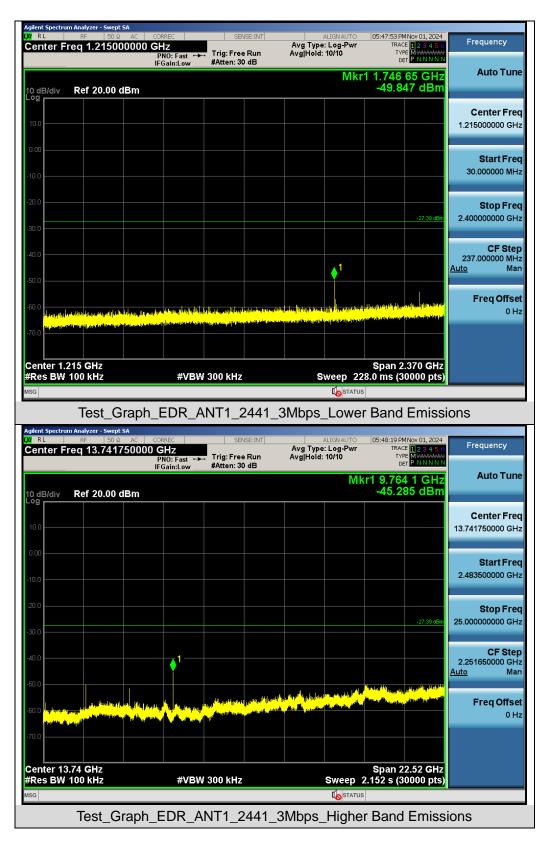








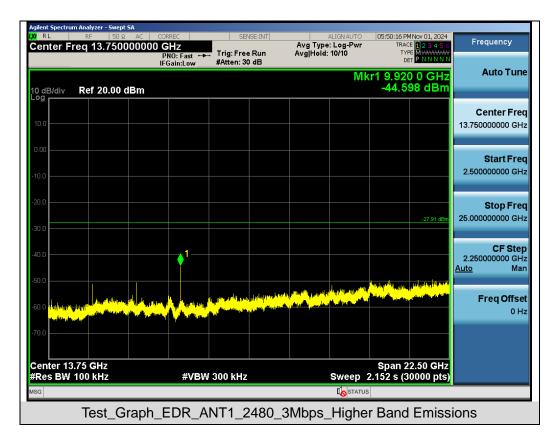




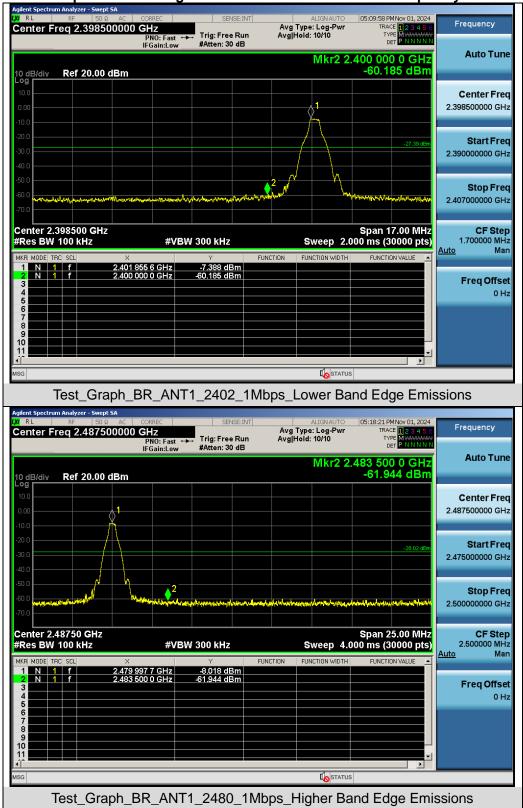


#### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




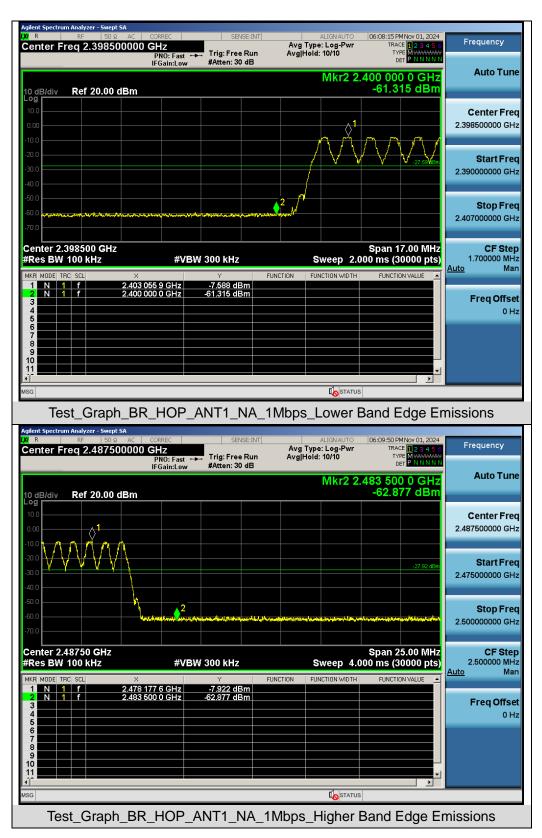




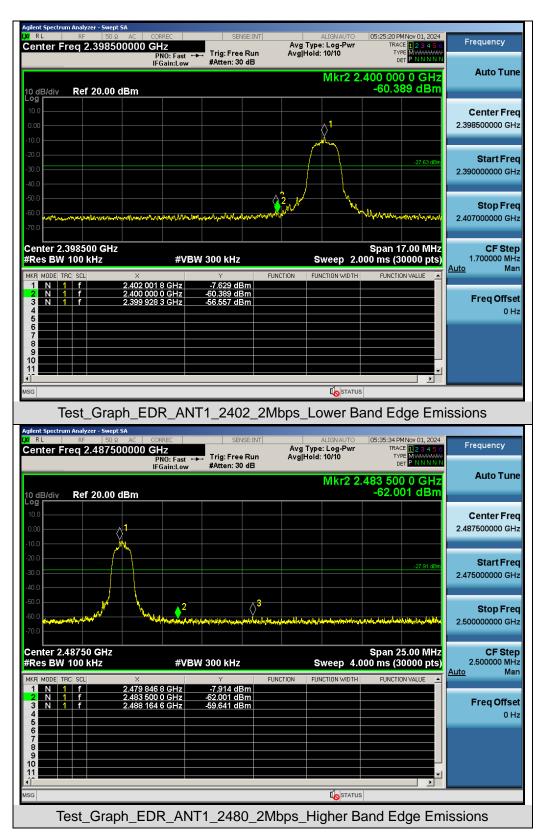




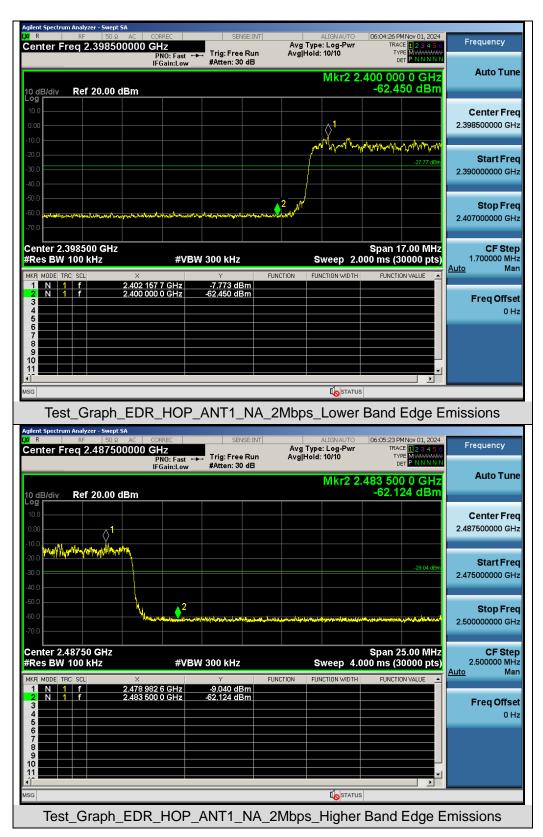



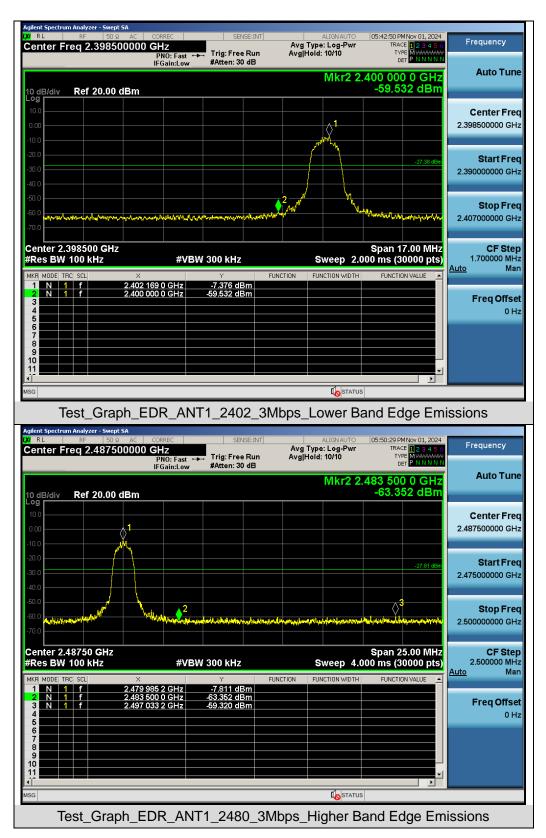



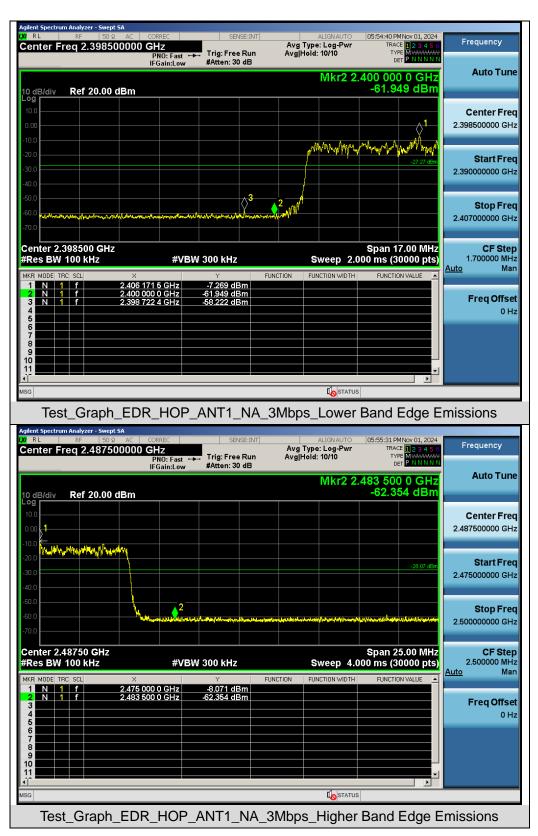



# 9. Radiated Spurious Emission

## 9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start ~Stop T requency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

#### The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



#### • Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### • Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

#### <u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW  $\geq$  [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




#### 9.3 Measurement Setup (Block Diagram of Configuration)

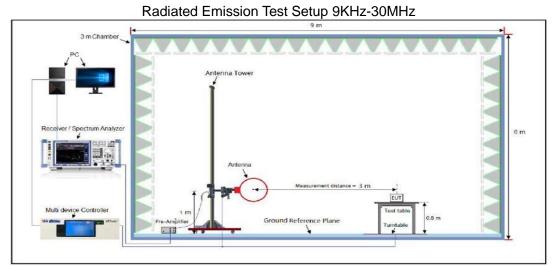

#### Radiated Emission Test Setup 30MHz-1000MHz

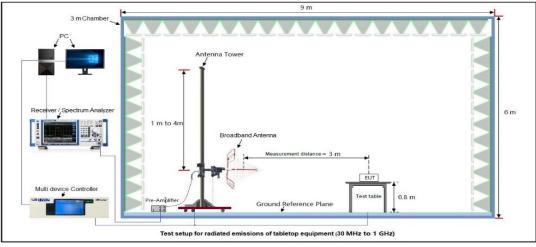

#### Radiated Emission Test Setup Above 1000MHz

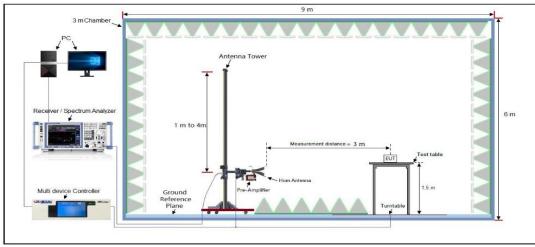

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com




#### 9.4 Measurement Result

#### **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

		Radia	ated Emiss	ion Test R	esults at 30	0MHz-1GH	Ηz		
EUT Name	Wirele	ess Headset			Mode	el Name		RW2 RoadWa	arrior
Temperature	22.4°	2			Relat	tive Humi	dity	58.9%	
Pressure	960hF	Pa			Test	Voltage		Normal Voltag	je
Test Mode	Mode	7			Ante	nna Polai	rity	Horizontal	
32	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			and the start of t	×	houthout		Limit: — Margin: —	
-8 30.000	0 40	50 60 70	80	(MHz)	:	300 400	500 60	0 700 1000.000	
Ν	No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
_		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
	1	41.5670	5.57	13.79	19.36	40.00	-20.64	peak	
	2	109.0286	5.66	16.29	21.95	43.50	-21.55	peak	
	3	239.9874	12.94	15.40	28.34	46.00	-17.66	peak	
		438.6554	5.71	24.81	30.52	46.00	-15.48	peak	
_	4	400.0004							
_	4 5	618.5369	5.73	25.19	30.92	46.00	-15.08	peak	






				Ra	Idia	ted Emiss	ion Test R	esults at 3	BOMHz-10	GHz		
EUT Name	W	irele	ss H	eads	set			Мос	lel Name		RW2 Ro	oadWarrior
Temperature	22	<b>2.4</b> ℃						Rela	ative Hun	nidity	58.9%	
Pressure	96	60hP	a					Test	t Voltage		Normal	Voltage
Test Mode	M	ode	7					Ant	enna Pola	arity	Vertical	
72.0	dBuV/	'm										
											Limit: Margin:	
			_	_								
												r
-			_								5	6
32								2		*	mon Sugar	<i>₩</i> /¥/
					ļ.		3	ž	Marin Marina	manut	~	
hand	Unallant	emploted	handraad	wown	Analy,	human he have a have	man when have been doing	Holydan mark makane	and <sup>en and</sup>			
				_								
-8 30.00	0	40	50	60	70	80	(MH2)		300 40	0 500 6	<b>00 700 1</b>	1000.000
<u></u>						Reading	Correct	Measure				_
N	lo.	Mk.	F	Freq		Level	Factor	ment	Limit	Over		
_				MHz		dBuV	dB	dBuV/m	dBuV/m	n dB	Detecto	r
	1		66.4	4989	9	6.74	17.03	23.77	40.00	-16.23	peak	_
_	2		129.0	014(	6	6.40	17.93	24.33	43.50	-19.17	' peak	_
					-	40.05	40.00	20 / 0	46.00	-17.52	peak	
	3	1	239.9	9874	1	12.25	16.23	28.48	40.00		- poun	
_	3 4		239.9 435.9				25.39				-	_
-	4	4		5898	3	7.04	25.39	32.43		-13.57	peak	_

## **RESULT: Pass**



				Ra	diate	ed E	miss	ion Test Re	esults	at 3	OMH:	z-1Gl	Hz				
EUT Name	N	/irele	ess H	eads	et					Mod	el Na	me		RW	1 Rc	badWa	rrior
Temperature	2	<b>2.4℃</b>	2							Rela	tive	Humi	idity	58.9	9%		
Pressure	9(	60hP	'a							Test	Volta	age		Norr	mal`	Voltage	Э
Test Mode	Μ	lode	7							Ante	enna	Pola	rity	Hori	zoni	tal	
72 0	dBuV/	/m															
														Linit: Margin	- 		
_																f	
_						ſ										6	
32									_			;	<u>ب</u>	5	a Week	Ă.	
							2					2 March	in the second	REALING	C.		
	hardensterred	A HANNA	ntunanallium	Warman	mercual	mitherful	p. dawieros	her should be the should be	ALLANAM	June of the	ANAMA	V.					
-																	
-																1 1	
-8																	
30.	000	40	50	60	70 80	)		(MHz)			300	400	500	600 700	) 1	000.000	
30.1		40 Mk.		60 Freq	F	Read		(мн₂) Correct Factor		sure	-	400 mit	500 Over		) 1	000.000	
30.1			. 1		F	Read	el	Correct		sure- ent	- Li				) 1 tector	_	
30.1			.	Freq	F	Read Lev	el <sub>IV</sub>	Correct Factor	me	sure ent V/m	- Li dB	mit	Over	Det		_	
30.1	No.	Mk.	. I 39.	Freq. MHz	1	Read Lev dBu	el iv 14	Correct Factor dB	me dBu	sure ent V/m 10	- dB 40	mit u∨/m	Over dB	Det 0 pe	tector	_	
30.1	No.	Mk.	. I 39.	Freq. MHz .4371 .9196	1 3	Read Lev dBu 6.4	el iv 14 28	Correct Factor dB 13.66	me dBu 20. 21.	sure ent V/m 10 61	- dB 40 43	mit u∨/m .00 .50	Over dB -19.9	Det Det 9 pe	tector eak eak	r 	
30.1	No.	Mk.	. 1 39. 112.	Freq. MHz 4371 9196 9844	F 1 3	Read Lev dBu 6.4 5.2 5.7	el iv 14 28	Correct Factor dB 13.66 16.33	me dBu 20. 21. 23.	sure ent V/m 10 61	- dB 40 43 46	mit u∨/m .00 .50	Over dB -19.9 -21.8	Det 0 pe 9 pe 5 pe	tector eak eak	r 	
30.1	No.	Mk.	. 1 39. 112. 362.	Freq. MHz 4371 9196 9844 8514	F - 1 3 4	Read Lev dBu 6.4 5.2 5.7	el iv 14 28 76	Correct Factor dB 13.66 16.33 17.69	me dBu 20. 21. 23.	sure- ent 10 61 45 48	- Li dB 40 43 46 46	mit uV/m .00 .50 .00	Over dB -19.9 -21.8 -22.5	Det 0 pe 9 pe 5 pe 2 pe	eak eak eak	- - -	






		Radia	ted Emiss	ion Test Re	esults at 3	0MHz-1GH	łz		
EUT Name	Wire	eless Headset			Mod	lel Name		RW1 Roa	dWarrior
Temperature	22.4	°C			Rela	ative Humi	dity	58.9%	
Pressure	960ł	nPa			Test	Voltage		Normal Vo	oltage
Test Mode	Mod	e 7			Ante	enna Polar	ity	Vertical	
72.0	dBuV/m								
32	ng (sang that the factor	1		Martin Comp				Limit: — Margin: —	
-8	000 40	50 60 70		(MHz)	Measure	300 400	500 60	0 700 100	00.000
	No. M	lk. Freq.	Reading Level	Factor	ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
	1	43.8119	6.45	16.94	23.39	40.00	-16.61	peak	
	2	63.9828	6.60	17.06	23.66	40.00	-16.34	peak	
	3	148.9625	6.50	18.20	24.70			-	
	4	441.7426							
	5			27.79					
	6 *	938.8326	6.12	30.84	36.96	46.00	-9.04	peak	

## **RESULT: Pass**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 7 is the worst case and recorded in the report.





EUT Name	Wireless He	adset	Мо	del Name	RW2 R	loadWarrior
Temperature	<b>22.4</b> ℃		Rel	ative Humidity	58.9%	
Pressure	960hPa		Tes	t Voltage	Norma	I Voltage
Test Mode	Mode 7		Ant	enna Polarity	Horizo	ntal
Frequency	Meter Reading	Factor	Emission Leve	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	47.86	0.08	47.94	74	-26.06	peak
4804.000	38.54	0.08	38.62	54	-15.38	AVG
7206.000	42.31	2.21	44.52	74	-29.48	peak
7206.000	41.35	2.21	43.56	54	-10.44	AVG
Remark: Factor = Anten	na Factor + Cabl	e Loss – Pre-	amplifier.			
	na Factor + Cabl			del Name	RW2 R	RoadWarrior
Factor = Anten			Mo	del Name ative Humidity	RW2 R 58.9%	RoadWarrior
Factor = Anten EUT Name Temperature	Wireless He		Mo		58.9%	RoadWarrior
Factor = Anten EUT Name Temperature Pressure	Wireless He		Moo Rel Tes	ative Humidity	58.9%	I Voltage
Factor = Anten EUT Name Temperature Pressure Test Mode	Wireless He 22.4℃ 960hPa		Moo Rel Tes	ative Humidity t Voltage enna Polarity	58.9% Norma Vertica	I Voltage
Factor = Anten EUT Name Temperature Pressure	Wireless He 22.4℃ 960hPa Mode 7	adset	Moo Rel Tes Ant	ative Humidity t Voltage enna Polarity	58.9% Norma	I Voltage
Factor = Anten	Wireless He 22.4℃ 960hPa Mode 7 Meter Reading	adset Factor	Moo Rel Tes Ant Emission Leve	ative Humidity t Voltage enna Polarity Limits	58.9% Norma Vertica Margin	I Voltage
Factor = Anten	Wireless He 22.4°C 960hPa Mode 7 Meter Reading (dBµV)	adset Factor (dB)	Mod Rel Tes Ant Emission Leve (dBµV/m)	ative Humidity t Voltage enna Polarity Limits (dBµV/m)	58.9% Norma Vertica Margin (dB)	I Voltage I Value Type
Factor = Anten         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4804.000	Wireless He 22.4°C 960hPa Mode 7 Meter Reading (dBµV) 49.65	adset Factor (dB) 0.08	Emission Leve (dBµV/m) 49.73	ative Humidity t Voltage enna Polarity Limits (dBµV/m) 74	58.9% Norma Vertica Margin (dB) -24.27	I Voltage I Value Type peak
Factor = Anten         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4804.000         4804.000	Wireless He           22.4°C           960hPa           Mode 7           Meter Reading           (dBµV)           49.65           38.52	Adset Factor (dB) 0.08 0.08	Mod           Rel           Tes           Ant           Emission Leve           (dBµV/m)           49.73           38.6	ative Humidity t Voltage enna Polarity Limits (dBµV/m) 74 54	58.9% Norma Vertica Margin (dB) -24.27 -15.4	I Voltage I Value Type peak AVG
Factor = Anten         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4804.000         7206.000	Wireless He           22.4 °C           960hPa           Mode 7           Meter Reading           (dBµV)           49.65           38.52           42.14	Adset Factor (dB) 0.08 0.08 2.21	Мос Rel Тез Апт Еmission Leve (dBµV/m) 49.73 38.6 44.35	ative Humidity t Voltage enna Polarity Limits (dBµV/m) 74 54 74	58.9% Norma Vertica Margin (dB) -24.27 -15.4 -29.65	I Voltage I Value Type peak AVG peak

## **Radiated Emissions Test Results Above 1GHz**

## **RESULT: Pass**



EUT Name	Wireless Hea	adset	ſ	Model Name	RW2	RW2 RoadWarrior		
Temperature	<b>22.4</b> °C		F	Relative Humidit	<b>y</b> 58.9	%		
Pressure	960hPa		٦	Test Voltage	Norr	nal Voltage		
Test Mode	Mode 8		1	Antenna Polarity	· Hori	zontal		
Frequency	Meter Reading	Factor	Emission L	_evel Limits	Margin			
(MHz)	(dBµV)	(dB)	(dBµV/m	n) (dBµV/m)	(dB)	Value Type		
4882.000	46.59	0.14	46.73	74	-27.27	peak		
4882.000	37.44	0.14	37.58	54	-16.42	AVG		
7323.000	42.59	2.36	44.95	74	-29.05	peak		
7323.000	31.24	2.36	33.6	54	-20.4	AVG		
Remark:								
Remark.								
	nna Factor + Cable	e Loss – Pre-	amplifier.					
	nna Factor + Cable Wireless Hea			Model Name	RW2	RoadWarrior		
Factor = Anter				Model Name Relative Humidit				
Factor = Anter	Wireless Hea		F		<b>y</b> 58.9			
Factor = Anter EUT Name Temperature Pressure	Wireless Hea 22.4℃		F T	Relative Humidit	y 58.9 Norr	% nal Voltage		
Factor = Anter EUT Name Temperature Pressure Test Mode	Wireless Hea 22.4℃ 960hPa Mode 8	adset	F 7	Relative Humidit Test Voltage Antenna Polarity	y 58.9 Norr	% nal Voltage		
Factor = Anter	Wireless Hea 22.4℃ 960hPa Mode 8 Meter Reading	adset Factor	F Emission L	Relative Humidit Test Voltage Antenna Polarity	y 58.9 Norr Vert	% nal Voltage		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)	Wireless Hea 22.4℃ 960hPa Mode 8 Meter Reading (dBµV)	adset Factor (dB)	F F Z Emission L (dBµV/m	Relative Humidit Test Voltage Antenna Polarity _evel Limits n) (dBµV/m)	y 58.9 Norr v Verti Margin (dB)	% nal Voltage cal Value Type		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000	Wireless Hea 22.4℃ 960hPa Mode 8 Meter Reading (dBµV) 47.53	Adset Factor (dB) 0.14	Emission L (dBµV/m 47.67	Relative Humidit Test Voltage Antenna Polarity Level Limits n) (dBµV/m) 74	y 58.9 Norr v Vert Margin (dB) -26.33	% nal Voltage cal Value Type peak		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         4882.000	Wireless Hea           22.4 °C           960hPa           Mode 8           Meter Reading           (dBµV)           47.53           37.54	Factor (dB) 0.14 0.14	Emission L (dBµV/m 47.67 37.68	Relative Humidit Test Voltage Antenna Polarity Level Limits n) (dBµV/m) 74 54	y 58.9 Norr Verti Margin (dB) -26.33 -16.32	% nal Voltage cal Value Type peak AVG		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         7323.000	Wireless Hea           22.4 ℃           960hPa           Mode 8           Meter Reading           (dBµV)           47.53           37.54           41.56	Factor (dB) 0.14 0.14 2.36	Emission L (dBµV/m 47.67 37.68 43.92	Relative Humidit Test Voltage Antenna Polarity -evel Limits n) (dBµV/m) 74 54 74	y 58.9 Norr v Verti Margin (dB) -26.33 -16.32 -30.08	% nal Voltage cal Value Type peak AVG peak		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         4882.000	Wireless Hea           22.4℃           960hPa           Mode 8           Meter Reading           (dBµV)           47.53           37.54	Factor (dB) 0.14 0.14	Emission L (dBµV/m 47.67 37.68	Relative Humidit Test Voltage Antenna Polarity Level Limits n) (dBµV/m) 74 54	y 58.9 Norr Verti Margin (dB) -26.33 -16.32	% nal Voltage cal Value Type peak AVG		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         7323.000	Wireless Hea           22.4 ℃           960hPa           Mode 8           Meter Reading           (dBµV)           47.53           37.54           41.56	Factor (dB) 0.14 0.14 2.36	Emission L (dBµV/m 47.67 37.68 43.92	Relative Humidit Test Voltage Antenna Polarity -evel Limits n) (dBµV/m) 74 54 74	y 58.9 Norr v Verti Margin (dB) -26.33 -16.32 -30.08	% nal Voltage cal Value Type peak AVG peak		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         7323.000	Wireless Hea           22.4 ℃           960hPa           Mode 8           Meter Reading           (dBµV)           47.53           37.54           41.56	Factor (dB) 0.14 0.14 2.36	Emission L (dBµV/m 47.67 37.68 43.92	Relative Humidit Test Voltage Antenna Polarity -evel Limits n) (dBµV/m) 74 54 74	y 58.9 Norr v Verti Margin (dB) -26.33 -16.32 -30.08	% nal Voltage cal Value Type peak AVG peak		

## **RESULT: Pass**



#### **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Wireless Hea	Idset	Model	l Name	RW2 Ro	RW2 RoadWarrior		
Temperature	<b>22.4</b> ℃		Relati	ve Humidity	58.9%			
Pressure	960hPa		Test V	/oltage	Normal	/oltage		
Test Mode	Mode 9		Anten	na Polarity	Horizont	al		
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
4960.000	47.56	0.22	47.78	74	-26.22	peak		
4960.000	37.54	0.22	37.76	54	-16.24	AVG		
7440.000	41.39	2.64	44.03	74	-29.97	peak		
7440.000	32.56	2.64	35.2	54	-18.8	AVG		
Remark:								
Factor = Ante	nna Factor + Cable	e Loss – Pre-	amplifier.					
	Mireless Hea			l Name	RW2 Ro	adWarrior		
EUT Name Temperature			Model	l Name ve Humidity	RW2 Ro	adWarrior		
EUT Name	Wireless Hea		Model					
EUT Name Temperature	Wireless Hea 22.4℃		Model Relati Test V	ve Humidity	58.9%			
EUT Name Temperature Pressure Test Mode	Wireless Hea 22.4℃ 960hPa Mode 9	ldset	Model Relati Test V Anten	ve Humidity /oltage na Polarity	58.9% Normal Vertical			
EUT Name Temperature Pressure Test Mode	Wireless Hea 22.4℃ 960hPa Mode 9 Meter Reading	idset Factor	Model Relati Test V Anten Emission Level	ve Humidity /oltage na Polarity Limits	58.9% Normal V Vertical Margin			
EUT Name Temperature Pressure Test Mode	Wireless Hea 22.4℃ 960hPa Mode 9 Meter Reading (dBµV)	rdset Factor (dB)	Model Relati Test V Anten Emission Level (dBµV/m)	ve Humidity /oltage na Polarity Limits (dBµV/m)	58.9% Normal Vertical Margin (dB)	Voltage Value Type		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Wireless Hea 22.4℃ 960hPa Mode 9 Meter Reading (dBµV) 47.59	Factor (dB) 0.22	Model Relati Test V Anten Emission Level (dBµV/m) 47.81	ve Humidity foltage na Polarity Limits (dBµV/m) 74	58.9% Solution Soluti	Voltage Value Type peak		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Wireless Hea           22.4°C           960hPa           Mode 9           Meter Reading           (dBµV)           47.59           37.54	Factor (dB) 0.22 0.22	Model Relati Test V Anten Emission Level (dBµV/m) 47.81 37.76	Ve Humidity Voltage na Polarity Limits (dBµV/m) 74 54	58.9% 58.9% Normal Vertical Margin (dB) -26.19 -16.24	Voltage Value Type peak AVG		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	Wireless Hea           22.4 °C           960hPa           Mode 9           Meter Reading           (dBµV)           47.59           37.54           41.36	Factor (dB) 0.22 0.22 2.64	Model Relati Test V Anten Emission Level (dBµV/m) 47.81 37.76 44	ve Humidity /oltage na Polarity Limits (dBµV/m) 74 54 74	58.9% Normal V Vertical Margin (dB) -26.19 -16.24 -30	Voltage Value Type peak AVG peak		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Wireless Hea           22.4°C           960hPa           Mode 9           Meter Reading           (dBµV)           47.59           37.54	Factor (dB) 0.22 0.22	Model Relati Test V Anten Emission Level (dBµV/m) 47.81 37.76	Ve Humidity Voltage na Polarity Limits (dBµV/m) 74 54	58.9% 58.9% Normal Vertical Margin (dB) -26.19 -16.24	Voltage Value Type peak AVG		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000 7440.000	Wireless Hea           22.4 °C           960hPa           Mode 9           Meter Reading           (dBµV)           47.59           37.54           41.36	Factor (dB) 0.22 0.22 2.64	Model Relati Test V Anten Emission Level (dBµV/m) 47.81 37.76 44	ve Humidity /oltage na Polarity Limits (dBµV/m) 74 54 74	58.9% Normal V Vertical Margin (dB) -26.19 -16.24 -30	Voltage Value Type peak AVG peak		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000 7440.000	Wireless Hea           22.4 °C           960hPa           Mode 9           Meter Reading           (dBµV)           47.59           37.54           41.36	Factor (dB) 0.22 0.22 2.64 2.64	Model           Relati           Test V           Anten           Emission Level           (dBμV/m)           47.81           37.76           44           35.13	ve Humidity /oltage na Polarity Limits (dBµV/m) 74 54 74	58.9% Normal V Vertical Margin (dB) -26.19 -16.24 -30	Voltage Value Type peak AVG peak		

#### **RESULT: Pass**



#### **Radiated Emissions Test Results Above 1GHz**

EUT Name	Wireless Hea	adset	N	lodel Name	RW1 F	RoadWarrior
Temperature	<b>22.4</b> ℃		R	Relative Humidity	58.9%	
Pressure	960hPa		Т	est Voltage	Norma	I Voltage
Test Mode	Mode 7		A	Antenna Polarity	Horizo	ntal
Frequency	Meter Reading	Factor	Emission Le	evel Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	) (dBµV/m)	(dB)	value Type
4804.000	48.53	0.08	48.61	74	-25.39	peak
4804.000	37.42	0.08	37.5	54	-16.5	AVG
7206.000	41.56	2.21	43.77	74	-30.23	peak
7206.000	32.36	2.21	34.57	54	-19.43	AVG
Remark:						
Factor = Ante	nna Factor + Cable	e Loss – Pre-	amplifier.			
	nna Factor + Cable Wireless Hea			Nodel Name	RW1 F	RoadWarrior
Factor = Ante			N	Nodel Name Relative Humidity		RoadWarrior
EUT Name	Wireless Hea		R		58.9%	RoadWarrior
EUT Name Temperature Pressure	Wireless Hea		R T	Relative Humidity	58.9%	I Voltage
EUT Name Temperature Pressure Test Mode	Wireless Hea 22.4°C 960hPa Mode 7	adset	R T A	Relative Humidity Test Voltage Antenna Polarity	y 58.9% Norma Vertica	I Voltage
EUT Name Temperature Pressure Test Mode	Wireless Hea 22.4°C 960hPa Mode 7 Meter Reading	adset Factor	R R T A Emission Le	Relative Humidity Test Voltage Antenna Polarity Evel Limits	y 58.9% Norma Vertica Margin	I Voltage
EUT Name Temperature Pressure Test Mode	Wireless Hea 22.4°C 960hPa Mode 7 Meter Reading (dBµV)	adset Factor (dB)	R R T A Emission Le (dBµV/m)	Relative Humidity Test Voltage Antenna Polarity evel Limits ) (dBµV/m)	y 58.9% Norma Vertica Margin (dB)	I Voltage I Value Type
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	Wireless Hea 22.4°C 960hPa Mode 7 Meter Reading (dBµV) 48.61	Adset Factor (dB) 0.08	К К К К К К К К К К К К К К К К К К К	Relative Humidity         Test Voltage         Antenna Polarity         evel       Limits         )       (dBµV/m)         74	y 58.9% Norma Vertica Margin (dB) -25.31	I Voltage I Value Type peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Wireless Hea           22.4°C           960hPa           Mode 7           Meter Reading           (dBµV)           48.61           37.54	Factor (dB) 0.08 0.08	К К К К К К К К К К К К К К К К К К К	Relative Humidity Test Voltage Antenna Polarity evel Limits ) (dBµV/m) 74 54	58.9% Norma Vertica Margin (dB) -25.31 -16.38	I Voltage
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	Wireless Hea           22.4 °C           960hPa           Mode 7           Meter Reading           (dBµV)           48.61           37.54           42.36	Factor (dB) 0.08 0.08 2.21	К К К К К К К К К К К К К К К К К К К	Relative Humidity Test Voltage Antenna Polarity evel Limits ) (dBµV/m) 74 54 74	58.9% Norma Vertica Margin (dB) -25.31 -16.38 -29.43	I Voltage
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Wireless Hea           22.4°C           960hPa           Mode 7           Meter Reading           (dBµV)           48.61           37.54	Factor (dB) 0.08 0.08	К К К К К К К К К К К К К К К К К К К	Relative Humidity Test Voltage Antenna Polarity evel Limits ) (dBµV/m) 74 54	58.9% Norma Vertica Margin (dB) -25.31 -16.38	I Voltage
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	Wireless Hea           22.4 °C           960hPa           Mode 7           Meter Reading           (dBµV)           48.61           37.54           42.36	Factor (dB) 0.08 0.08 2.21	К К К К К К К К К К К К К К К К К К К	Relative Humidity Test Voltage Antenna Polarity evel Limits ) (dBµV/m) 74 54 74	58.9% Norma Vertica Margin (dB) -25.31 -16.38 -29.43	I Voltage
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	Wireless Hea           22.4 °C           960hPa           Mode 7           Meter Reading           (dBµV)           48.61           37.54           42.36	Factor (dB) 0.08 0.08 2.21 2.21	К К К К К К К К К К К К К К К К К К К	Relative Humidity Test Voltage Antenna Polarity evel Limits ) (dBµV/m) 74 54 74	58.9% Norma Vertica Margin (dB) -25.31 -16.38 -29.43	I Voltage

#### **RESULT: Pass**



EUT Name	Wireless Hea	adset	м	odel Name	RW1 R	RoadWarrior	
Temperature			R	elative Humidity	58.9%	58.9%	
Pressure			Те	Test Voltage		Normal Voltage	
Test Mode	Mode 8		Α	ntenna Polarity Horizontal		ntal	
Frequency	Meter Reading	Factor	Emission Le	vel Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4882.000	47.61	0.14	47.75	74	-26.25	peak	
4882.000	37.54	0.14	37.68	54	-16.32	AVG	
7323.000	41.26	2.36	43.62	74	-30.38	peak	
7323.000	31.25	2.36	33.61	54	-20.39	AVG	
-							
Remark:							
	nna Factor + Cable	e Loss – Pre-	amplifier.				
	nna Factor + Cable Wireless Hea			odel Name	RW1 R	coadWarrior	
Factor = Anter			M	odel Name elative Humidity	RW1 R 58.9%	oadWarrior	
Factor = Anter	Wireless Hea		M		58.9%	l Voltage	
Factor = Anter EUT Name Temperature Pressure	Wireless Hea 22.4℃		R Te	elative Humidity	58.9%	I Voltage	
Factor = Anter EUT Name Temperature Pressure Test Mode	Wireless Hea 22.4℃ 960hPa Mode 8	adset	M R Te	elative Humidity est Voltage ntenna Polarity	58.9% Norma Vertica	I Voltage	
Factor = Anter	Wireless Hea 22.4℃ 960hPa Mode 8 Meter Reading	adset Factor	M R Te A Emission Le	elative Humidity est Voltage ntenna Polarity vel Limits	58.9% Norma Vertica Margin	I Voltage	
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)	Wireless Hea 22.4℃ 960hPa Mode 8 Meter Reading (dBµV)	adset Factor (dB)	M R Te A Emission Le (dBµV/m)	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m)	58.9% Norma Vertica Margin (dB)	I Voltage I Value Type	
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000	Wireless Hea 22.4℃ 960hPa Mode 8 Meter Reading (dBµV) 47.53	Factor (dB) 0.14	Μ           R           Te           Δ           Emission Le           (dBµV/m)           47.67	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74	58.9% Norma Vertica Margin (dB) -26.33	I Voltage I Value Type peak	
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         4882.000	Wireless Hea           22.4 °C           960hPa           Mode 8           Meter Reading           (dBµV)           47.53           37.54	Factor (dB) 0.14 0.14	M R Te A Emission Le (dBµV/m) 47.67 37.68	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74 54	58.9% Norma Vertica Margin (dB) -26.33 -16.32	I Voltage I Value Type peak AVG	
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         7323.000	Wireless Hea         22.4 °C         960hPa         Mode 8         Meter Reading         (dBµV)         47.53         37.54         42.19	Factor (dB) 0.14 0.14 2.36	М R Te A Emission Le (dBµV/m) 47.67 37.68 44.55	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74 54 74	58.9% Norma Vertica Margin (dB) -26.33 -16.32 -29.45	I Voltage I Value Type peak AVG peak	
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         4882.000	Wireless Hea           22.4 °C           960hPa           Mode 8           Meter Reading           (dBµV)           47.53           37.54	Factor (dB) 0.14 0.14	M R Te A Emission Le (dBµV/m) 47.67 37.68	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74 54	58.9% Norma Vertica Margin (dB) -26.33 -16.32	I Voltage I Value Type peak AVG	
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         7323.000	Wireless Hea         22.4 °C         960hPa         Mode 8         Meter Reading         (dBµV)         47.53         37.54         42.19	Factor (dB) 0.14 0.14 2.36	М R Te A Emission Le (dBµV/m) 47.67 37.68 44.55	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74 54 74	58.9% Norma Vertica Margin (dB) -26.33 -16.32 -29.45	I Voltage I Value Type peak AVG peak	
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         7323.000	Wireless Hea         22.4 °C         960hPa         Mode 8         Meter Reading         (dBµV)         47.53         37.54         42.19	Factor (dB) 0.14 0.14 2.36	М R Te A Emission Le (dBµV/m) 47.67 37.68 44.55	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74 54 74	58.9% Norma Vertica Margin (dB) -26.33 -16.32 -29.45	I Voltage I Value Type peak AVG peak	

## **RESULT: Pass**



#### **Radiated Emissions Test Results for Above 1GHz**

	Wireless Hea	Wireless Headset		l Name	RW1 Ro	adWarrior	
Temperature	<b>22.4</b> ℃		Relati	Relative Humidity 58.9		58.9%	
Pressure	ure 960hPa		Test V	Test Voltage		Normal Voltage	
Fest Mode	Mode 9	Mode 9		na Polarity	ha Polarity Horizontal		
	i		·		·		
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.000	47.65	0.22	47.87	74	-26.13	peak	
4960.000	37.59	0.22	37.81	54	-16.19	AVG	
7440.000	42.54	2.64	45.18	74	-28.82	peak	
7440.000	31.62	2.64	34.26	54	-19.74	AVG	
Remark: Factor = Anten	na Factor + Cable	e Loss – Pre-	amplifier.				
EUT Name	Wireless Hea	dset	Mode	l Name	RW1 Ro	adWarrior	
<b>Femperature</b>	<b>22.4</b> °C		Relati	ve Humidity	58.9%		
Pressure	960hPa		Test V	Test Voltage		Normal Voltage	
Test Mode	Mode 9	Mode 9 Antenr		na Polarity	ty Vertical		
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4960.000	47.85	0.22	48.07	74	-25.93	peak	
4960.000	37.16	0.22	37.38	54	-16.62	AVG	
7440.000	42.16	2.64	44.8	74	-29.2	peak	
7440.000	31.59	2.64	34.23	54	-19.77	AVG	
	++					+	
Remark:							

#### **RESULT: Pass**


Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




Band Edge Emission Test Results for Restricted Bands
--

EUT Name	Wireless Headset	Model Name	RW2 RoadWarrior
Temperature	<b>25</b> ℃	Relative Humidity	50%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

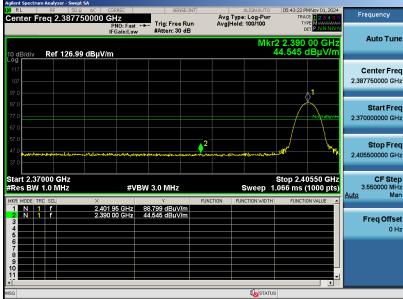


Test Graph for Average Measurement

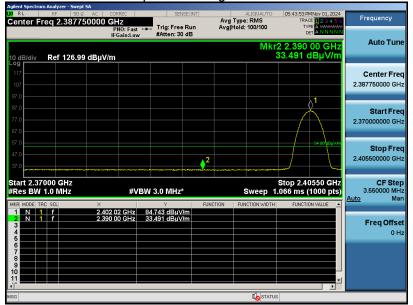


## **RESULT: Pass**



EUT Name	Wireless Headset	Model Name	RW2 RoadWarrior
Temperature	<b>25℃</b>	Relative Humidity	50%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

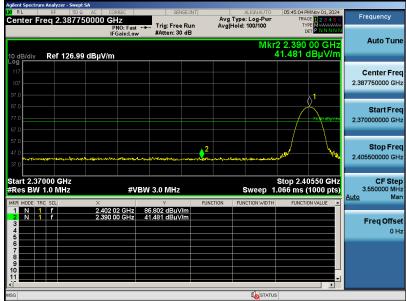

Test Graph for Average Measurement

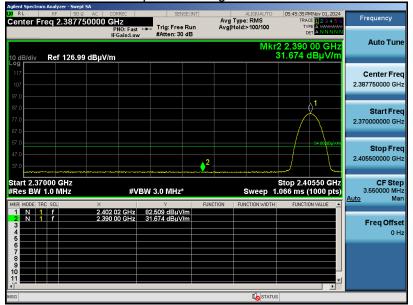


## **RESULT: Pass**




Band Edge Emission Test R	esults for Restricted Bands
---------------------------	-----------------------------

EUT Name	Wireless Headset	Model Name	RW2 RoadWarrior
Temperature	<b>25℃</b>	Relative Humidity	50%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

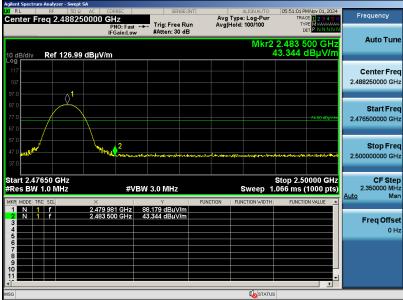

Test Graph for Average Measurement

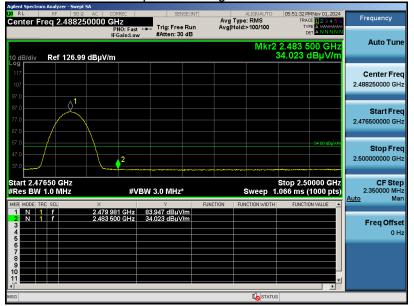


## **RESULT: Pass**



Band Edge Emission Test R	esults for Restricted Bands
---------------------------	-----------------------------

EUT Name	Wireless Headset	Model Name	RW2 RoadWarrior
Temperature	<b>25</b> ℃	Relative Humidity	50%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

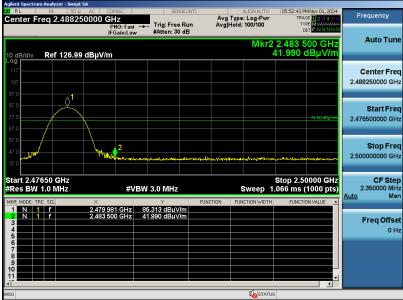

Test Graph for Average Measurement



#### **RESULT: Pass**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



# **10. Number of Hopping Frequency Measurement**

#### **10.1 Provisions Applicable**

This frequency hopping system must employ a minimum of 15 hopping channels.


#### **10.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span = The frequency band of operation. Depending on the number of channels the device

- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW  $\geq$  RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize

## 10.3 Measurement Setup (Block Diagram of Configuration)

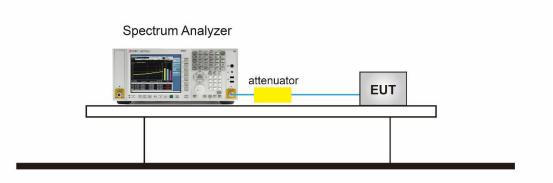

#### **10.4 Measurement Result**

Test Data of Number of Hopping Frequency					
Test Mode Number of Hopping Frequency Limits Pass or Fail					
8DPSK Hopping	79	>=15	Pass		



<mark>Agilent Spectrum Analyzer - Swept SA</mark> L <mark>XI</mark> R L RF 50 Ω AC	CORREC	SENSE:INT		ALIGNAUTO	05:55:53 PM		<b>F</b>
Center Freq 2.44175000	PNO: Fast +++ Trig	: Free Run	Avg Type Avg Hold:		TYPE	123456 M	Frequency
10 dB/div Ref 30.00 dBm	IFGain:Low #Att	en: 40 dB		Mkr	1 2.409		Auto Tune
20.0							Center Freq 2.441750000 GHz
0.00							Start Freq 2.400000000 GHz
-10.0	ᠬᢧᡧᠰᡰᡘᢦᢔᡟᢦᡟᡎᡗᠬᡢᡟᢇ	wwww	- MANY WAY	lv/w/via	UMUNNYY (	VIMV)	Stop Fred 2.483500000 GHz
-30.0							CF Step 8.350000 MHz <u>Auto</u> Mar
50.0							Freq Offse 0 H:
Center 2.44175 GHz #Res BW 200 kHz	#VBW 620	kHz		Sweep 1.	Span 83 .998 ms (1	8.50 MHz 1000 pts)	
MSG STATUS							
Test_Graph_EDR_HOP_ANT1_NA_3Mbps_Number of Hopping							

## Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



# 11. Time of Occupancy (Dwell Time) Measurement

#### **11.1 Provisions Applicable**


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

#### **11.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW  $\geq$  RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.


#### 11.3 Measurement Setup (Block Diagram of Configuration)

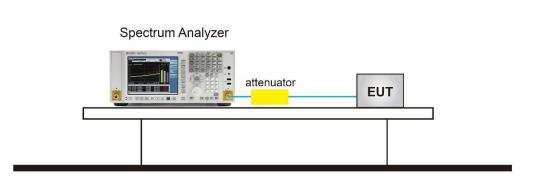

#### **11.4 Measurement Result**


Test Data of Dwell Time					
Channel	Time of Pulse for 3DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.891	31.0*4	358.484	400	Pass
2441	2.891	29.0*4	335.356	400	Pass
2480	2.891	25.0*4	289.100	400	Pass



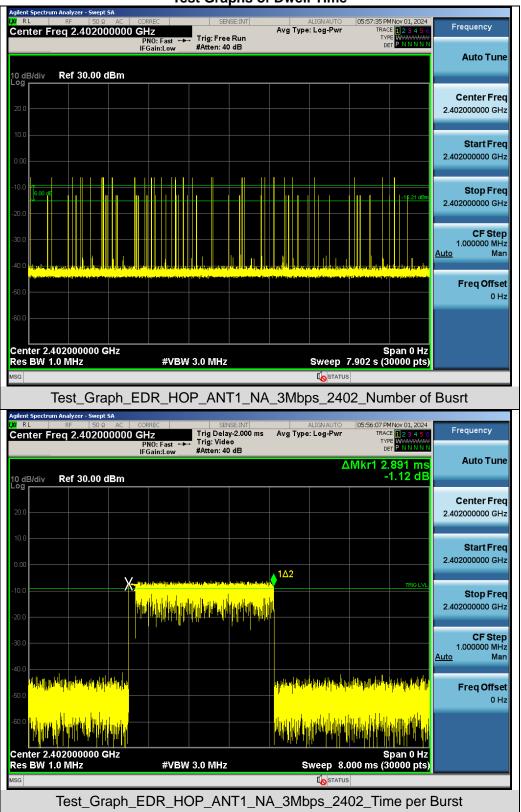


#### **Test Graphs of Dwell Time**



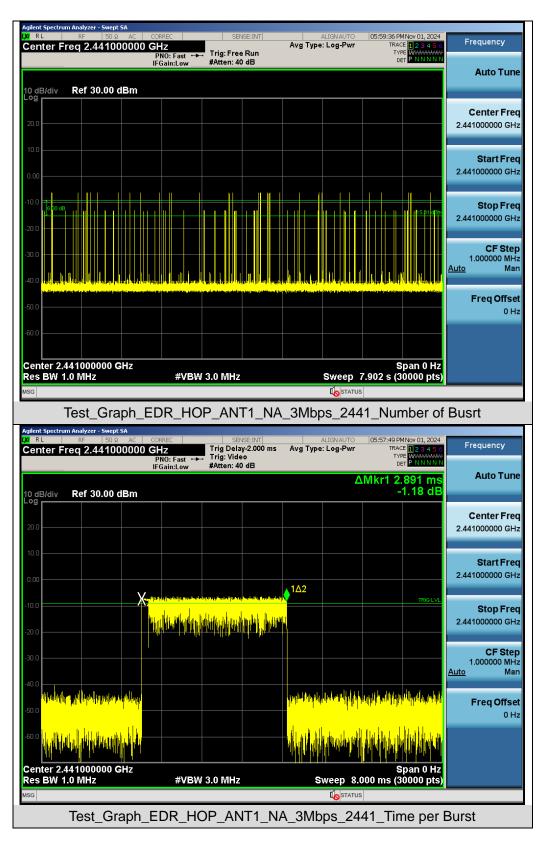



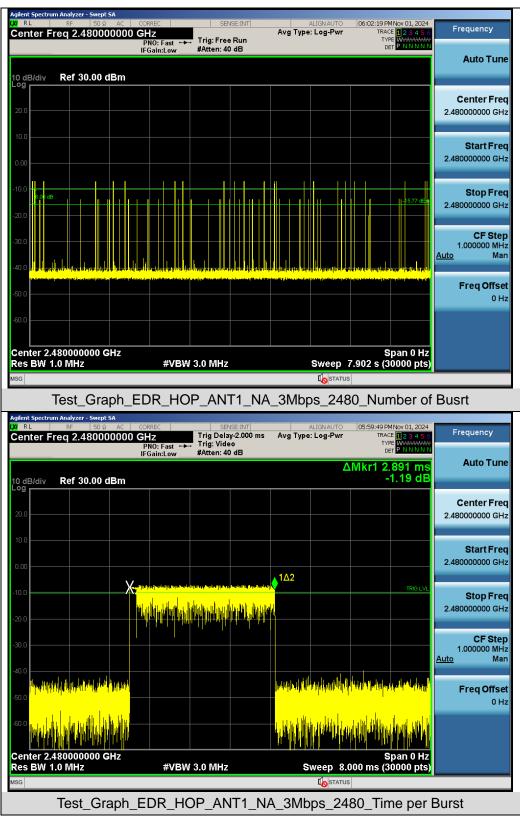

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



## **12. Frequency Separation Measurement**

#### **12.1 Provisions Applicable**

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

#### **12.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW)  $\geq$  RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


## 12.3 Measurement Setup (Block Diagram of Configuration)

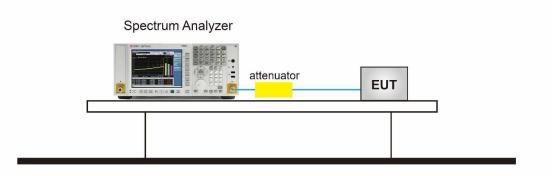

#### 12.4 Measurement Result

Test Data of Frequency Separation					
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail		
8DPSK	0.961	≥0.866	Pass		



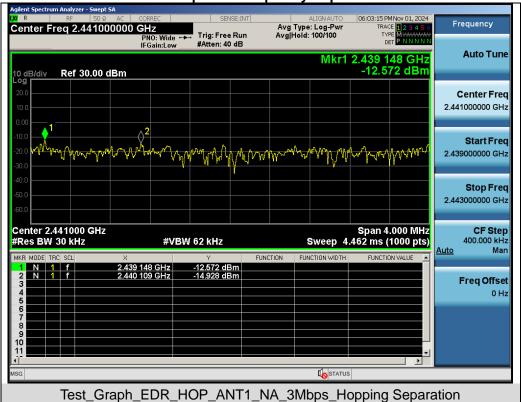

## Test Graphs of Frequency Separation

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



# **13. AC Power Line Conducted Emission Test**

## 13.1 Measurement Limit


Francisco	Maximum RF Line Voltage			
Frequency	Q.P. (dBµV)	Average (dBµV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 13.2 Measurement Setup (Block Diagram of Configuration)

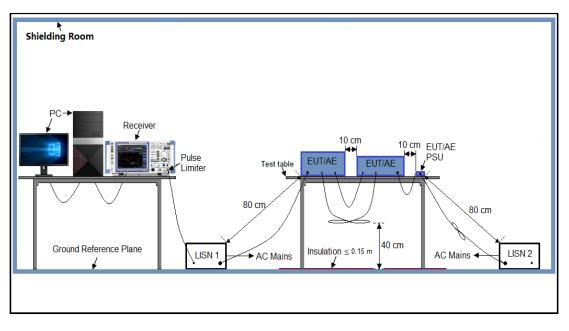



## **13.3 Preliminary Procedure of Line Conducted Emission Test**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## **13.4 Final Procedure of Line Conducted Emission Test**

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

## **13.5 Measurement Results**

N/A

Note: The BT function cannot transmit when charging



Report No.: AGC00429241002FR01 Page 79 of 79

# Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC00429241002AP01

# Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC00429241002AP02

-----End of Report-----



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.