



# RF TEST REPORT

**Report No.:** SET2018-05463

**Product:** Smartphone

**FCC ID:** R38YL3310A

**Model No.:** Coolpad 3310A

**Applicant:** Yulong Computer Telecommunication Scientific (Shenzhen)  
Co., Ltd

**Address:** Coolpad Information Harbor, 2nd Mengxi Road, Northern Part of  
Science&Technology Park, Nanshan, Shenzhen, China.

**Dates of Testing:** 05/15/2018 — 08/06/2018

**Issued by:** CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

**Lab Location:** Building 28/29, East of Shigu Xili Industrial Zone, Nanshan  
District Shenzhen, Guangdong 518055, China

**Tel:** 86 755 26627338      **Fax:** 86 755 26627238

This test report consists of 238 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product** .....: Smartphone

**Brand Name**.....: Coolpad

**Trade Name** .....: Coolpad

**Applicant** .....: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

**Applicant Address** .....: Coolpad Information Harbor, 2nd Mengxi Road, Northern Part of Science&Technology Park, Nanshan, Shenzhen, China.

**Manufacturer** .....: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

**Manufacturer Address**.....: Coolpad Information Harbor, 2nd Mengxi Road, Northern Part of Science&Technology Park, Nanshan, Shenzhen, China.

**Test Standards** .....: 47 CFR Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations  
47 CFR Part 22(H): Cellular Radiotelephone Service  
47 CFR Part 24(E): Personal Communications Services  
47CFR Part 27: Miscellaneous wireless communications services  
47 CFR Part 90 PRIVATE LAND MOBILE RADIO SERVICES

**Test Result**.....: PASS

**Tested by** .....: Shallwe Yang  
2018.08.06.  
Shallwe Yang, Test Engineer

**Reviewed by**.....: Zhu Qi  
2018.08.06.  
Zhu Qi, Senior Engineer

**Approved by**.....: Smart Li  
2018.08.06.  
Smart Li, Manager



## Table of Contents

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
<b>1.1</b>	<b>EUT Description.....</b>	<b>5</b>
<b>1.2</b>	<b>Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator.....</b>	<b>7</b>
<b>1.3</b>	<b>Test Standards and Results.....</b>	<b>10</b>
<b>1.4</b>	<b>Test Configuration of Equipment Under Test .....</b>	<b>12</b>
<b>1.5</b>	<b>Measurement Results Explanation Example.....</b>	<b>14</b>
<b>1.6</b>	<b>Facilities and Accreditations .....</b>	<b>14</b>
<b>2.</b>	<b>47 CFR PART 2, PART 27H REQUIREMENTS .....</b>	<b>16</b>
<b>2.1</b>	<b>Conducted RF Output Power.....</b>	<b>16</b>
<b>2.2</b>	<b>Peak to Average Ratio .....</b>	<b>18</b>
<b>2.3</b>	<b>99% Occupied Bandwidth and 26dB Bandwidth .....</b>	<b>20</b>
<b>2.4</b>	<b>Frequency Stability .....</b>	<b>22</b>
<b>2.5</b>	<b>Conducted Out of Band Emissions.....</b>	<b>25</b>
<b>2.6</b>	<b>Conducted Band Edge .....</b>	<b>28</b>
<b>2.7</b>	<b>Transmitter Radiated Power (EIRP/ERP).....</b>	<b>30</b>
<b>2.8</b>	<b>Radiated Out of Band Emissions .....</b>	<b>46</b>
<b>3.</b>	<b>LIST OF MEASURING EQUIPMENT .....</b>	<b>54</b>
	<b>APPENDIX A .....</b>	<b>55</b>
	<b>Conducted RF Output Power.....</b>	<b>55</b>
	<b>99% Occupied Bandwidth.....</b>	<b>116</b>
	<b>26dB Bandwidth .....</b>	<b>132</b>
	<b>Frequency Stability .....</b>	<b>148</b>
	<b>Conducted Out of Band Emissions.....</b>	<b>159</b>
	<b>Conducted Band Edge .....</b>	<b>182</b>



Change History		
Issue	Date	Reason for change
1.0	2018.8.06	First edition



## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Type	Smartphone
Hardware Version	P0
Software Version	3310A.SPRINT.180608.00
EUT supports Radios application	CDMA2000 BC0/BC1/BC10 WLAN2.4GHz 802.11b/g/n (HT20/HT40) Bluetooth V3.0+EDR / Bluetooth V4.2 LTE Band 2/4/5/12/13/25/26/41
Frequency Range	LTE Band 2: 1850.7MHz~1909.3MHz LTE Band 4: 1710.7MHz~1754.3MHz LTE Band 5: 824.7MHz~848.3MHz LTE Band 12: 699.7MHz~715.3MHz LTE Band 13: 779.5MHz~784.5MHz LTE Band 25: 1850.7MHz~1914.3MHz LTE Band 26: 814.7MHz~848.3MHz LTE Band 41: 2498.5MHz~2687.5MHz
Maximum Output Power to Antenna	LTE Band 2: 23.06dBm LTE Band 4: 22.54dBm LTE Band 5: 22.16dBm LTE Band 12: 22.92dBm LTE Band 13: 22.90dBm LTE Band 25: 23.13dBm LTE Band 26: 23.13dBm LTE Band 41: 23.13dBm
Bandwidth	LTE Band 2: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 4: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 5: 5MHz/10MHz/15MHz/20MHz LTE Band 12: 1.4MHz/3MHz/5MHz/10MHz LTE Band 13: 5MHz/10MHz LTE Band 25: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 26: 1.4MHz/3MHz/5MHz/10MHz/15MHz LTE Band 41: 5MHz/10MHz/15MHz/20MHz
Modulation Type	QPSK/16QAM
Antenna Type	Internal Antenna



Antenna Gain	LTE Band 2:2.04dBi LTE Band 4: 1.37dBi LTE Band 5: 2.04dBi LTE Band 12: -2.71dBi LTE Band 13:-3.13dBi LTE Band 25: 2.04dBi LTE Band 26: -1.59dBi LTE Band 41: 0.63dBi
Power supply	Battery 1 Model No.: CPLD-189 Capacitance: 2150mAh Rated Voltage: 3.8V Charge Limit: 4.35V
	Battery 2 Model No.: CPLD-189 Capacitance: 2150mAh Rated Voltage: 3.8V Charge Limit: 4.35V

## 1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

Band	Type of Modulation	BW (MHz)	Emission Designator	Frequency Tolerance (ppm)	Maximum ERP/EIRP(W)
LTE Band 2	QPSK	1.4	1M10G7D	—	0.245
LTE Band 2	16QAM	1.4	1M10W7D	—	0.192
LTE Band 2	QPSK	3	2M68G7D	—	0.157
LTE Band 2	16QAM	3	2M68W7D	—	0.132
LTE Band 2	QPSK	5	4M49G7D	—	0.158
LTE Band 2	16QAM	5	4M49W7D	—	0.134
LTE Band 2	QPSK	10	8M91G7D	0.004	0.129
LTE Band 2	16QAM	10	8M91W7D	—	0.109
LTE Band 2	QPSK	15	13M4G7D	—	0.130
LTE Band 2	16QAM	15	13M4W7D	—	0.110
LTE Band 2	QPSK	20	17M8G7D	—	0.132
LTE Band 2	16QAM	20	17M8W7D	—	0.112
LTE Band 4	QPSK	1.4	1M10G7D	—	0.113
LTE Band 4	16QAM	1.4	1M10W7D	—	0.096
LTE Band 4	QPSK	3	2M68G7D	—	0.114
LTE Band 4	16QAM	3	2M68W7D	—	0.098
LTE Band 4	QPSK	5	4M49G7D	—	0.115
LTE Band 4	16QAM	5	4M49W7D	—	0.099
LTE Band 4	QPSK	10	8M91G7D	0.003	0.179
LTE Band 4	16QAM	10	8M91W7D	—	0.154
LTE Band 4	QPSK	15	13M4G7D	—	0.180
LTE Band 4	16QAM	15	13M4W7D	—	0.157
LTE Band 4	QPSK	20	17M8G7D	—	0.183
LTE Band 4	16QAM	20	17M8W7D	—	0.160

LTE Band 5	QPSK	1.4	1M09G7D		0.207
LTE Band 5	16QAM	1.4	1M09W7D		0.176
LTE Band 5	QPSK	3	2M68G7D		0.209
LTE Band 5	16QAM	3	2M68W7D		0.177
LTE Band 5	QPSK	5	4M49G7D		0.153
LTE Band 5	16QAM	5	4M49W7D		0.180
LTE Band 5	QPSK	10	8M91G7D	0.005	0.075
LTE Band 5	16QAM	10	8M91W7D	—	0.124
LTE Band 12	QPSK	1.4	1M09G7D	—	0.101
LTE Band 12	16QAM	1.4	1M09W7D	—	0.125
LTE Band 12	QPSK	3	2M68G7D	—	0.102
LTE Band 12	16QAM	3	2M68W7D	—	0.127
LTE Band 12	QPSK	5	4M49G7D	—	0.104
LTE Band 12	16QAM	5	4M49W7D	—	0.140
LTE Band 12	QPSK	10	8M91G7D	0.005	0.115
LTE Band 12	16QAM	10	8M90W7D	—	0.180
LTE Band 13	QPSK	5	4M48G7D	—	0.134
LTE Band 13	16QAM	5	4M49W7D	—	0.111
LTE Band 13	QPSK	10	8M92G7D	0.006	0.135
LTE Band 13	16QAM	10	8M91W7D	—	0.113
LTE Band 25	QPSK	1.4	1M09G7D	—	0.137
LTE Band 25	16QAM	1.4	1M09W7D	—	0.116
LTE Band 25	QPSK	3	2M68G7D	—	0.139
LTE Band 25	16QAM	3	2M67W7D	—	0.123
LTE Band 25	QPSK	5	4M49G7D	—	0.147
LTE Band 25	16QAM	5	4M49W7D	—	0.125
LTE Band 25	QPSK	10	8M92G7D	0.003	0.166
LTE Band 25	16QAM	10	8M91W7D	—	0.140
LTE Band 25	QPSK	15	13M4G7D	—	0.167



LTE Band 25	16QAM	15	13M4W7D	—	0.142
LTE Band 25	QPSK	20	17M8G7D	—	0.169
LTE Band 25	16QAM	20	17M8W7D	—	0.144
LTE Band 26	QPSK	1.4	1M09G7D	—	0.098
LTE Band 26	16QAM	1.4	1M09W7D	—	0.083
LTE Band 26	QPSK	3	2M68G7D	—	0.099
LTE Band 26	16QAM	3	2M68W7D	—	0.083
LTE Band 26	QPSK	5	4M49G7D	—	0.100
LTE Band 26	16QAM	5	4M49W7D	—	0.084
LTE Band 26	QPSK	10	8M92G7D	0.003	0.157
LTE Band 26	16QAM	10	8M91W7D	—	0.133
LTE Band 26	QPSK	15	13M4G7D	—	0.159
LTE Band 26	16QAM	15	13M4W7D	—	0.135
LTE Band 41	QPSK	5	4M49G7D	—	0.140
LTE Band 41	16QAM	5	4M49W7D	—	0.118
LTE Band 41	QPSK	10	8M91G7D	0.009	0.141
LTE Band 41	16QAM	10	8M92W7D	—	0.120
LTE Band 41	QPSK	15	13M4G7D	—	0.143
LTE Band 41	16QAM	15	13M4W7D	—	0.121
LTE Band 41	QPSK	20	17M9G7D	—	0.147
LTE Band 41	16QAM	20	17M8W7D	—	0.114

### 1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part24, Part27 , Part90, for the EUT FCC ID Certification:

1.47 CFR Part 2, 24(E), 27(F), 27(L), 27(H), 27(M), 90

2. ANSI/TIA/EIA-603-D-2010

3. FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Limit	Result
1	2.1046	Conducted RF Output Power	Reporting Only	PASS
2	§24.232(d)	Peak to Average Ratio	<13dB	PASS
3	§22.913(a)(2)	Effective Radiated Power (Band 5) (Band 26)	ERP < 7 Watt	PASS
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13)	ERP < 3 Watt	PASS
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2)(Band 25) (Band 41)	EIRP < 2Watt	PASS
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	
4	2.1049	Occupied Bandwidth	Reporting Only	PASS
5	§2.1051 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(g) §27.53(h) §90.691	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 25) (Band 26)	< $43+10\log_{10}(P[\text{watt}])$	PASS



	27.53(m)(4)	Conducted Band Edge(Band 41)	§27.53(m)(4)	PASS
6	2.1051 §22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 25) (Band 26)	$<$ $43+10\log_{10}(P[\text{watt}])$	PASS
	2.1051 27.53(m)(4)	Conducted Band Edge(Band 41)	$<$ $55+10\log_{10}(P[\text{watt}])$	PASS
7	2.1053 §22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h) §90.691	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 25) (Band 26)	$<$ $43+10\log_{10}(P[\text{watt}])$	PASS
	2.1053 27.53(m)(4) §90.691	Radiated Spurious Emission (Band 41)	$<$ $55+10\log_{10}(P[\text{watt}])$	PASS
8	2.1055 22.335 24.235 27.54 90.691	Frequency Stability	$<2.5\text{ppm}$	PASS

## Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 1.4 Test Configuration of Equipment Under Test

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth(MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	13			✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	25	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	26	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	2	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓
	5	✓	✓	✓	✓				✓	✓		✓	✓	✓	✓
	12	✓	✓	✓	✓				✓	✓		✓	✓	✓	✓
	13			✓	✓				✓	✓		✓	✓	✓	✓
	25	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓
	26	✓	✓	✓	✓	✓			✓	✓		✓	✓	✓	✓
	41			✓	✓	✓	✓		✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	2	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	4	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	5	✓	✓	✓	✓			✓	✓			✓		✓	
	12	✓	✓	✓	✓			✓	✓			✓		✓	
	13			✓	✓			✓	✓			✓		✓	
	25	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	26	✓	✓	✓	✓	✓		✓	✓			✓		✓	
	41			✓	✓	✓	✓	✓	✓			✓		✓	
Conducted Band Edge	2	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	5	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	12	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	13			✓	✓			✓	✓	✓		✓	✓		✓
	25	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓



	26	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓		✓
	41			✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	13			✓	✓			✓	✓	✓			✓	✓	✓
	25	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	26	✓	✓	✓	✓	✓		✓	✓	✓			✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Frequency Stability	2				✓			✓				✓		✓	
	4				✓			✓				✓		✓	
	5				✓			✓				✓		✓	
	12				✓			✓				✓		✓	
	13				✓			✓				✓		✓	
	25				✓			✓				✓		✓	
	26				✓			✓				✓		✓	
	41				✓			✓				✓		✓	
ERP/EIRP	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	13			✓	✓			✓	✓	✓			✓	✓	✓
	25	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	26	✓	✓	✓	✓	✓		✓	✓	✓			✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	13			✓	✓			✓	✓	✓			✓	✓	✓
	25	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	26	✓	✓	✓	✓	✓		✓	✓	✓			✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Note	<p>1. The mark “ ✓ ” means that this configuration is chosen for testing.</p> <p>2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p> <p>3. For E.R.P/E.I.R.P. measurement, the widest bandwidth and the bandwidth with the highest conducted power of each band is chosen for testing. Besides, the lowest bandwidth of each band is</p>														



	also measured for reporting only.
--	-----------------------------------

## 1.5 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.5dB and 10dB attenuator.

Example:

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7 + 10 = 17 \text{ (dB)}\end{aligned}$$

## 1.6 Facilities and Accreditations

### 1.6.1 Test Facilities

#### **CNAS-Lab Code: L1659**

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

#### **FCC-Registration No.: CN5031**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2018.

#### **ISED Registration: 11185A-1**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Aug. 03, 2019.

#### **NVLAP Lab Code: 201008-0**

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.



### 1.6.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% - 60%
Atmospheric Pressure (kPa):	86KPa-106KPa

## 2. 47 CFR PART 2 REQUIREMENTS

### 2.1 Conducted RF Output Power


#### 2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

#### 2.1.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

#### 2.1.3 Test Setup



#### 2.1.4 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.





### **2.1.5 Test Results**

Please refer to Appendix A for detail

## 2.2 Peak to Average Ratio


### 2.2.1 Definition

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 2.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 2.2.3 Test Description

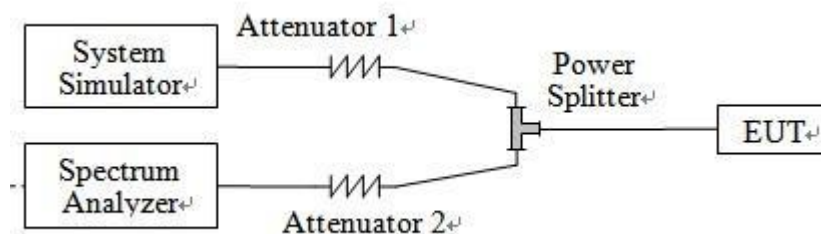

### 2.2.4 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



### **2.2.5 Test Results of Peak-to-Average Ratio**

Please refer to Appendix A for detail

## 2.3 99% Occupied Bandwidth and 26dB Bandwidth

### 2.3.1 Definition


According to FCC section 2.1049, the occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 2.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 2.3.3 Test Setup

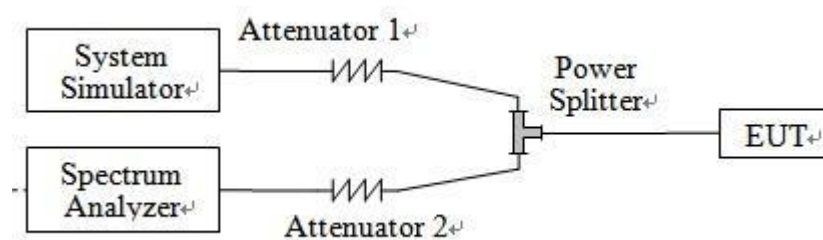

### 2.3.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.



### **2.3.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth**

Please refer to Appendix A for detail

## 2.4 Frequency Stability

### 2.4.1 Requirement


According to FCC requirement, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of not more than  $10^{\circ}\text{C}$ .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

### 2.4.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.4.3 Test Setup

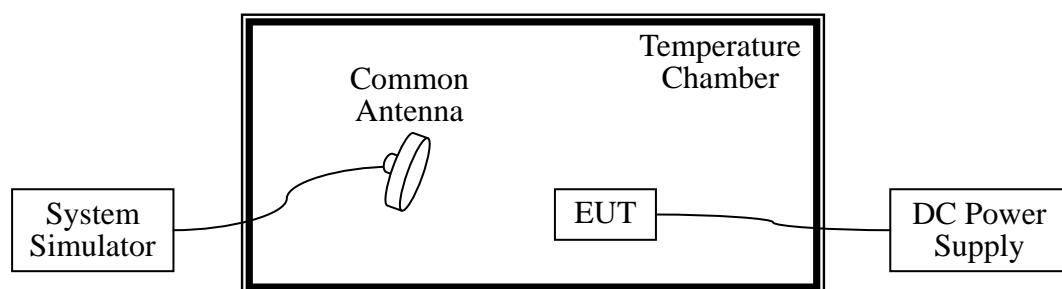

### 2.4.4 Test Procedures

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized



before testing. Power was applied and the maximum change in frequency was recorded within one minute.

3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. The nominal, highest and lowest extreme voltages were tested, which are specified by the applicant; the normal temperature here used is 25°C.
5. The variation in frequency was measured for the worst case.



#### **2.4.5 Test Result of Frequency Stability**

Please refer to Appendix A for detail



## 2.5 Conducted Out of Band Emissions

### 2.5.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 41:


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### 2.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 2.5.3 Test Setup

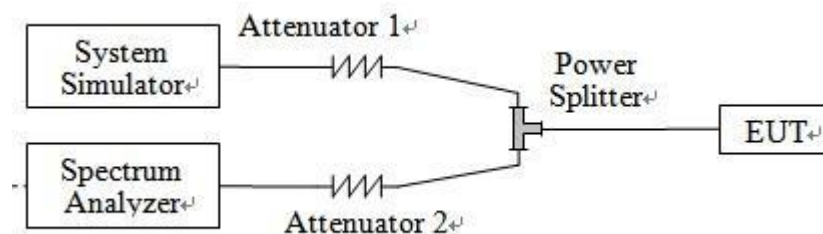

### 2.5.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.

5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13\text{dBm}.$$
8. For Band 41  
The limit line is derived from  $55 + 10\log(P)$  dB below the transmitter power P(Watts)  
$$= P(W) - [55 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$$
$$= -25\text{dBm}.$$
9. For 9KHz to 30MHz: the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



### **2.5.5 Test Result of Conducted Spurious Emission**

Please refer to Appendix A for detail

## 2.6 Conducted Band Edge

### 2.6.1 Description of Conducted Band Edge Measurement

#### 24.238(a)

For operations in the 1850 -1910 MHz band, the FCC limit is  $43 + 10\log_{10}(P [\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 1MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 27.53(h)

For operations in the 1710 – 1755 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power,  $P(\text{dBW})$ , by at least  $65 + 10 \log_{10} p(\text{watts})$ , dB, for mobile and portable equipment.

#### 27.53(g)

For operations in the 698 – 746 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 100 kHz bandwidth. However, in the 100kHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least 30kHz may be employed.


#### 27.53 (m)(4)

For operations in the 776 – 788 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 100 kHz bandwidth. However, in the 100kHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least 30kHz may be employed. In addition, the power of any unwanted emissions in any 6.25kHz bandwidth for all frequency between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power,  $P(\text{dBW})$ , by at least  $65+10\log_{10}(P[\text{Watts}])$ , dB, for mobile and portable equipment.

## 2.6.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

## 2.6.3 Test Setup

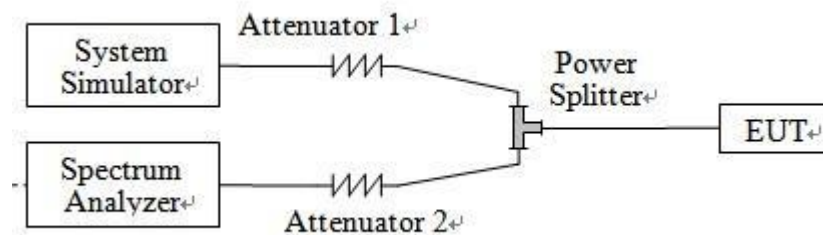

## 2.6.4 Test Procedures

1. The testing follows FCC KDB 971168 v03r01 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.  
The limit line is derived from  $43 + 10\log(P)\text{dB}$  below the transmitter power P(Watts)
9. For LTE Band 38, 41, the other 40 dB, and 55 dB have additionally applied same calculation above.

## 2.6.5 Test Result of Conducted Band Edge

Please refer to Appendix A for detail

## 2.7 Transmitter Radiated Power (EIRP/ERP)

### 2.7.1 Requirement


Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5/26 and 3 watts with LTE band 12 / 13.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 / 25 / 41 and 1 watt with LTE band 4.

### 2.7.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.7.3 Test Setup

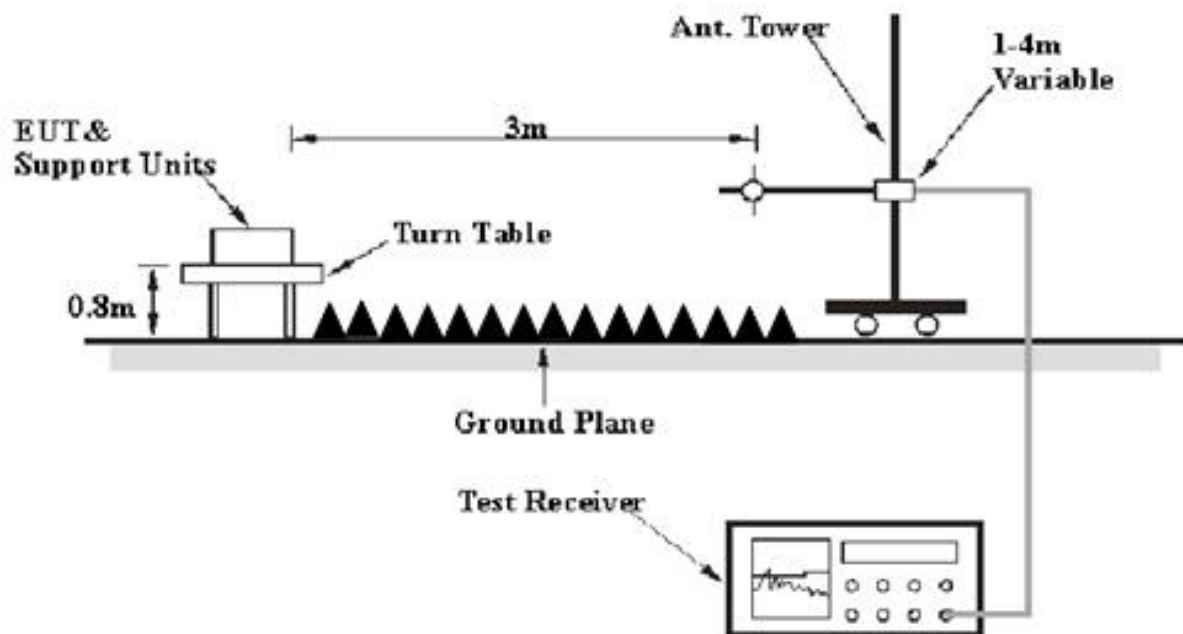

#### 2.7.4 Test Procedures

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer which used a channel power option across EUT's signal bandwidth per section 4.0 of KDB 971168 D01v03r01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm): Input power to substitution antenna.

$G_s$  (dBi or dBd): Substitution antenna Gain.

$E_t = R_t + AF$

$E_s = R_s + AF$

$AF$  (dB/m): Receive antenna factor

$R_t$ : The highest received signal in spectrum analyzer for EUT.

$R_s$ : The highest received signal in spectrum analyzer for substitution antenna.



## 2.7.5 Test Result of ERP/EIRP

### 1. LTE Band 2 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
2	1.4	QPSK	1	3	1850.7	23.52	H	PASS
2	1.4	QPSK	1	3	1880	<b>23.89</b>	H	PASS
2	1.4	QPSK	1	3	1909.3	23.57	H	PASS
2	1.4	QPSK	1	3	1850.7	22.98	V	PASS
2	1.4	QPSK	1	3	1880	23.37	V	PASS
2	1.4	QPSK	1	3	1909.3	23.81	V	PASS
2	1.4	16QAM	1	0	1850.7	21.66	H	PASS
2	1.4	16QAM	1	0	1880	22.16	H	PASS
2	1.4	16QAM	1	0	1909.3	<b>22.83</b>	H	PASS
2	1.4	16QAM	1	0	1850.7	21.26	V	PASS
2	1.4	16QAM	1	0	1880	21.86	V	PASS
2	1.4	16QAM	1	0	1909.3	22.23	V	PASS
2	3	QPSK	1	8	1851.5	<b>21.96</b>	H	PASS
2	3	QPSK	1	8	1880	21.94	H	PASS
2	3	QPSK	1	8	1908.5	21.92	H	PASS
2	3	QPSK	1	8	1851.5	19.20	V	PASS
2	3	QPSK	1	8	1880	19.24	V	PASS
2	3	QPSK	1	8	1908.5	19.22	V	PASS
2	3	16QAM	1	0	1851.5	21.23	H	PASS
2	3	16QAM	1	0	1880	21.18	H	PASS
2	3	16QAM	1	0	1908.5	<b>21.20</b>	H	PASS
2	3	16QAM	1	0	1851.5	18.48	V	PASS
2	3	16QAM	1	0	1880	18.45	V	PASS
2	3	16QAM	1	0	1908.5	18.46	V	PASS
2	5	QPSK	1	0	1852.5	21.98	H	PASS
2	5	QPSK	1	0	1880	<b>22.00</b>	H	PASS
2	5	QPSK	1	0	1907.5	21.97	H	PASS
2	5	QPSK	1	0	1852.5	19.32	V	PASS
2	5	QPSK	1	0	1880	19.29	V	PASS
2	5	QPSK	1	0	1907.5	19.31	V	PASS
2	5	16QAM	1	24	1852.5	21.27	H	PASS
2	5	16QAM	1	24	1880	21.25	H	PASS
2	5	16QAM	1	24	1907.5	<b>21.28</b>	H	PASS
2	5	16QAM	1	24	1852.5	18.35	V	PASS
2	5	16QAM	1	24	1880	18.34	V	PASS
2	5	16QAM	1	24	1907.5	18.32	V	PASS





LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
2	10	QPSK	1	49	1855	<b>21.10</b>	H	PASS
2	10	QPSK	1	49	1880	21.07	H	PASS
2	10	QPSK	1	49	1905	21.09	H	PASS
2	10	QPSK	1	49	1855	18.44	V	PASS
2	10	QPSK	1	49	1880	18.46	V	PASS
2	10	QPSK	1	49	1905	18.43	V	PASS
2	10	16QAM	1	0	1855	<b>20.38</b>	H	PASS
2	10	16QAM	1	0	1880	20.37	H	PASS
2	10	16QAM	1	0	1905	20.35	H	PASS
2	10	16QAM	1	0	1855	17.47	V	PASS
2	10	16QAM	1	0	1880	17.45	V	PASS
2	10	16QAM	1	0	1905	17.48	V	PASS
2	15	QPSK	1	74	1857.5	<b>21.14</b>	H	PASS
2	15	QPSK	1	74	1880	21.12	H	PASS
2	15	QPSK	1	74	1902.5	21.13	H	PASS
2	15	QPSK	1	74	1857.5	18.51	V	PASS
2	15	QPSK	1	74	1880	18.48	V	PASS
2	15	QPSK	1	74	1902.5	18.53	V	PASS
2	15	16QAM	1	0	1857.5	<b>20.42</b>	H	PASS
2	15	16QAM	1	0	1880	20.40	H	PASS
2	15	16QAM	1	0	1902.5	20.41	H	PASS
2	15	16QAM	1	0	1857.5	17.55	V	PASS
2	15	16QAM	1	0	1880	17.53	V	PASS
2	15	16QAM	1	0	1902.5	17.56	V	PASS
2	20	QPSK	1	0	1860	21.17	H	PASS
2	20	QPSK	1	0	1880	<b>21.19</b>	H	PASS
2	20	QPSK	1	0	1900	21.18	H	PASS
2	20	QPSK	1	0	1860	18.58	V	PASS
2	20	QPSK	1	0	1880	18.60	V	PASS
2	20	QPSK	1	0	1900	18.59	V	PASS
2	20	16QAM	1	0	1860	20.47	H	PASS
2	20	16QAM	1	0	1880	<b>20.48</b>	H	PASS
2	20	16QAM	1	0	1900	20.46	H	PASS
2	20	16QAM	1	0	1860	17.63	V	PASS
2	20	16QAM	1	0	1880	17.60	V	PASS
2	20	16QAM	1	0	1900	17.61	V	PASS



## 2. LTE Band 4 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
4	1.4	QPSK	1	0	1710.7	20.52	H	PASS
4	1.4	QPSK	1	0	1732.5	<b>20.54</b>	H	PASS
4	1.4	QPSK	1	0	1754.3	20.51	H	PASS
4	1.4	QPSK	1	0	1710.7	19.24	V	PASS
4	1.4	QPSK	1	0	1732.5	19.32	V	PASS
4	1.4	QPSK	1	0	1754.3	19.27	V	PASS
4	1.4	16QAM	1	3	1710.7	19.73	H	PASS
4	1.4	16QAM	1	3	1732.5	<b>19.82</b>	H	PASS
4	1.4	16QAM	1	3	1754.3	19.79	H	PASS
4	1.4	16QAM	1	3	1710.7	18.34	V	PASS
4	1.4	16QAM	1	3	1732.5	18.37	V	PASS
4	1.4	16QAM	1	3	1754.3	18.34	V	PASS
4	3	QPSK	1	0	1711.5	<b>20.57</b>	H	PASS
4	3	QPSK	1	0	1732.5	20.54	H	PASS
4	3	QPSK	1	0	1753.5	20.55	H	PASS
4	3	QPSK	1	0	1711.5	19.35	V	PASS
4	3	QPSK	1	0	1732.5	19.36	V	PASS
4	3	QPSK	1	0	1753.5	19.34	V	PASS
4	3	16QAM	1	14	1711.5	<b>19.90</b>	H	PASS
4	3	16QAM	1	14	1732.5	19.88	H	PASS
4	3	16QAM	1	14	1753.5	19.86	H	PASS
4	3	16QAM	1	14	1711.5	18.39	V	PASS
4	3	16QAM	1	14	1732.5	18.37	V	PASS
4	3	16QAM	1	14	1753.5	18.42	V	PASS
4	5	QPSK	1	0	1712.5	20.59	H	PASS
4	5	QPSK	1	0	1732.5	20.58	H	PASS
4	5	QPSK	1	0	1752.5	<b>20.61</b>	H	PASS
4	5	QPSK	1	0	1712.5	19.38	V	PASS
4	5	QPSK	1	0	1732.5	19.42	V	PASS
4	5	QPSK	1	0	1752.5	19.40	V	PASS
4	5	16QAM	1	0	1712.5	<b>19.97</b>	H	PASS
4	5	16QAM	1	0	1732.5	19.93	H	PASS
4	5	16QAM	1	0	1752.5	19.95	H	PASS
4	5	16QAM	1	0	1712.5	18.44	V	PASS
4	5	16QAM	1	0	1732.5	18.47	V	PASS
4	5	16QAM	1	0	1752.5	18.46	V	PASS



LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
4	10	QPSK	1	0	1715	<b>22.52</b>	H	PASS
4	10	QPSK	1	0	1732.5	22.50	H	PASS
4	10	QPSK	1	0	1750	22.49	H	PASS
4	10	QPSK	1	0	1715	21.35	V	PASS
4	10	QPSK	1	0	1732.5	21.32	V	PASS
4	10	QPSK	1	0	1750	21.33	V	PASS
4	10	16QAM	1	24	1715	21.86	H	PASS
4	10	16QAM	1	24	1732.5	<b>21.88</b>	H	PASS
4	10	16QAM	1	24	1750	21.85	H	PASS
4	10	16QAM	1	24	1715	20.42	V	PASS
4	10	16QAM	1	24	1732.5	20.45	V	PASS
4	10	16QAM	1	24	1750	20.43	V	PASS
4	15	QPSK	1	74	1717.5	<b>22.55</b>	H	PASS
4	15	QPSK	1	74	1732.5	22.52	H	PASS
4	15	QPSK	1	74	1747.5	22.53	H	PASS
4	15	QPSK	1	74	1717.5	21.42	V	PASS
4	15	QPSK	1	74	1732.5	21.45	V	PASS
4	15	QPSK	1	74	1747.5	21.43	V	PASS
4	15	16QAM	1	74	1717.5	21.94	H	PASS
4	15	16QAM	1	74	1732.5	21.92	H	PASS
4	15	16QAM	1	74	1747.5	<b>21.95</b>	H	PASS
4	15	16QAM	1	74	1717.5	20.56	V	PASS
4	15	16QAM	1	74	1732.5	20.51	V	PASS
4	15	16QAM	1	74	1747.5	20.53	V	PASS
4	20	QPSK	1	0	1720	<b>22.62</b>	H	PASS
4	20	QPSK	1	0	1732.5	22.60	H	PASS
4	20	QPSK	1	0	1745	22.59	H	PASS
4	20	QPSK	1	0	1720	21.49	V	PASS
4	20	QPSK	1	0	1732.5	21.52	V	PASS
4	20	QPSK	1	0	1745	21.54	V	PASS
4	20	16QAM	1	0	1720	<b>22.03</b>	H	PASS
4	20	16QAM	1	0	1732.5	21.96	H	PASS
4	20	16QAM	1	0	1745	21.99	H	PASS
4	20	16QAM	1	0	1720	20.63	V	PASS
4	20	16QAM	1	0	1732.5	20.66	V	PASS
4	20	16QAM	1	0	1745	20.65	V	PASS



## 3. LTE Band 5 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	H/V	Verdict
			RB Size	RB Offset				
5	1.4	QPSK	1	3	824.7	23.16	H	PASS
5	1.4	QPSK	1	3	836.5	<b>23.17</b>	H	PASS
5	1.4	QPSK	1	3	848.3	23.15	H	PASS
5	1.4	QPSK	1	3	824.7	20.38	V	PASS
5	1.4	QPSK	1	3	836.5	20.41	V	PASS
5	1.4	QPSK	1	3	848.3	20.40	V	PASS
5	1.4	16QAM	1	3	824.7	<b>22.45</b>	H	PASS
5	1.4	16QAM	1	3	836.5	22.43	H	PASS
5	1.4	16QAM	1	3	848.3	22.42	H	PASS
5	1.4	16QAM	1	3	824.7	19.65	V	PASS
5	1.4	16QAM	1	3	836.5	19.63	V	PASS
5	1.4	16QAM	1	3	848.3	19.62	V	PASS
5	3	QPSK	1	0	825.5	<b>23.21</b>	H	PASS
5	3	QPSK	1	0	836.5	23.19	H	PASS
5	3	QPSK	1	0	847.5	23.17	H	PASS
5	3	QPSK	1	0	825.5	20.45	V	PASS
5	3	QPSK	1	0	836.5	20.49	V	PASS
5	3	QPSK	1	0	847.5	20.47	V	PASS
5	3	16QAM	1	0	825.5	<b>22.48</b>	H	PASS
5	3	16QAM	1	0	836.5	22.43	H	PASS
5	3	16QAM	1	0	847.5	22.45	H	PASS
5	3	16QAM	1	0	825.5	19.73	V	PASS
5	3	16QAM	1	0	836.5	19.70	V	PASS
5	3	16QAM	1	0	847.5	19.71	V	PASS
5	5	QPSK	1	0	826.5	<b>21.86</b>	H	PASS
5	5	QPSK	1	0	836.5	21.83	H	PASS
5	5	QPSK	1	0	846.5	21.85	H	PASS
5	5	QPSK	1	0	826.5	20.38	V	PASS
5	5	QPSK	1	0	836.5	20.35	V	PASS
5	5	QPSK	1	0	846.5	20.36	V	PASS
5	5	16QAM	1	0	826.5	21.05	H	PASS
5	5	16QAM	1	0	836.5	21.03	H	PASS
5	5	16QAM	1	0	846.5	21.04	H	PASS
5	5	16QAM	1	0	826.5	19.53	V	PASS
5	5	16QAM	1	0	836.5	19.50	V	PASS
5	5	16QAM	1	0	846.5	19.51	V	PASS
5	10	QPSK	1	49	829.0	22.16	H	PASS



LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	H/V	Verdict
			RB Size	RB Offset				
5	10	QPSK	1	49	836.5	<b>22.55</b>	H	PASS
5	10	QPSK	1	49	844.0	22.54	H	PASS
5	10	QPSK	1	49	829.0	18.08	V	PASS
5	10	QPSK	1	49	836.5	18.09	V	PASS
5	10	QPSK	1	49	844.0	18.35	V	PASS
5	10	16QAM	1	0	829.0	18.25	H	PASS
5	10	16QAM	1	0	836.5	<b>18.75</b>	H	PASS
5	10	16QAM	1	0	844.0	18.51	H	PASS
5	10	16QAM	1	0	829.0	17.68	V	PASS
5	10	16QAM	1	0	836.5	17.27	V	PASS
5	10	16QAM	1	0	844.0	17.14	V	PASS

#### 4. LTE Band 12 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
12	1.4	QPSK	1	0	699.7	<b>20.94</b>	H	PASS
12	1.4	QPSK	1	0	707.5	20.90	H	PASS
12	1.4	QPSK	1	0	715.3	20.92	H	PASS
12	1.4	QPSK	1	0	699.7	19.42	V	PASS
12	1.4	QPSK	1	0	707.5	19.40	V	PASS
12	1.4	QPSK	1	0	715.3	19.43	V	PASS
12	1.4	16QAM	1	0	699.7	<b>20.06</b>	H	PASS
12	1.4	16QAM	1	0	707.5	20.04	H	PASS
12	1.4	16QAM	1	0	715.3	20.03	H	PASS
12	1.4	16QAM	1	0	699.7	18.58	V	PASS
12	1.4	16QAM	1	0	707.5	18.57	V	PASS
12	1.4	16QAM	1	0	715.3	18.55	V	PASS
12	3	QPSK	1	0	700.5	<b>20.98</b>	H	PASS
12	3	QPSK	1	0	707.5	20.97	H	PASS
12	3	QPSK	1	0	714.5	20.95	H	PASS
12	3	QPSK	1	0	700.5	19.46	V	PASS
12	3	QPSK	1	0	707.5	19.48	V	PASS
12	3	QPSK	1	0	714.5	19.47	V	PASS
12	3	16QAM	1	8	700.5	20.07	H	PASS
12	3	16QAM	1	8	707.5	<b>20.10</b>	H	PASS
12	3	16QAM	1	8	714.5	20.08	H	PASS
12	3	16QAM	1	8	700.5	18.63	V	PASS
12	3	16QAM	1	8	707.5	18.65	V	PASS



LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
12	3	16QAM	1	8	714.5	18.66	V	PASS
12	5	QPSK	1	24	701.5	21.04	H	PASS
12	5	QPSK	1	24	707.5	<b>21.05</b>	H	PASS
12	5	QPSK	1	24	713.5	21.01	H	PASS
12	5	QPSK	1	24	701.5	19.58	V	PASS
12	5	QPSK	1	24	707.5	19.56	V	PASS
12	5	QPSK	1	24	713.5	19.54	V	PASS
12	5	16QAM	1	0	701.5	20.15	H	PASS
12	5	16QAM	1	0	707.5	<b>20.17</b>	H	PASS
12	5	16QAM	1	0	713.5	20.14	H	PASS
12	5	16QAM	1	0	701.5	18.68	V	PASS
12	5	16QAM	1	0	707.5	18.71	V	PASS
12	5	16QAM	1	0	713.5	18.70	V	PASS
LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
12	10	QPSK	1	49	704	21.45	H	PASS
12	10	QPSK	1	49	707.5	<b>21.47</b>	H	PASS
12	10	QPSK	1	49	711	21.46	H	PASS
12	10	QPSK	1	49	704	19.99	V	PASS
12	10	QPSK	1	49	707.5	20.01	V	PASS
12	10	QPSK	1	49	711	20.03	V	PASS
12	10	16QAM	1	0	704	<b>20.60</b>	H	PASS
12	10	16QAM	1	0	707.5	20.57	H	PASS
12	10	16QAM	1	0	711	20.59	H	PASS
12	10	16QAM	1	0	704	19.16	V	PASS
12	10	16QAM	1	0	707.5	19.15	V	PASS
12	10	16QAM	1	0	711	19.12	V	PASS



## 5. LTE Band 13 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	H/V	Verdict
			RB Size	RB Offset				
13	5	QPSK	1	0	779.5	21.21	H	PASS
13	5	QPSK	1	0	782	<b>21.26</b>	H	PASS
13	5	QPSK	1	0	784.5	21.24	H	PASS
13	5	QPSK	1	0	779.5	19.68	V	PASS
13	5	QPSK	1	0	782	19.71	V	PASS
13	5	QPSK	1	0	784.5	19.70	V	PASS
13	5	16QAM	1	24	779.5	<b>20.45</b>	H	PASS
13	5	16QAM	1	24	782	20.41	H	PASS
13	5	16QAM	1	24	784.5	20.42	H	PASS
13	5	16QAM	1	24	779.5	18.88	V	PASS
13	5	16QAM	1	24	782	18.84	V	PASS
13	5	16QAM	1	24	784.5	18.86	V	PASS
13	10	QPSK	1	49	782	<b>21.29</b>	H	PASS
13	10	QPSK	1	49	782	21.27	H	PASS
13	10	QPSK	1	49	782	21.25	H	PASS
13	10	QPSK	1	49	782	19.79	V	PASS
13	10	QPSK	1	49	782	19.74	V	PASS
13	10	QPSK	1	49	782	19.77	V	PASS
13	10	16QAM	1	0	782	20.49	H	PASS
13	10	16QAM	1	0	782	<b>20.52</b>	H	PASS
13	10	16QAM	1	0	782	20.51	H	PASS
13	10	16QAM	1	0	782	18.95	V	PASS
13	10	16QAM	1	0	782	18.92	V	PASS
13	10	16QAM	1	0	782	18.94	V	PASS



## 6. LTE Band 25 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
25	1.4	QPSK	1	0	1850.7	21.37	H	PASS
25	1.4	QPSK	1	0	1882.5	<b>21.38</b>	H	PASS
25	1.4	QPSK	1	0	1914.3	21.36	H	PASS
25	1.4	QPSK	1	0	1850.7	18.59	V	PASS
25	1.4	QPSK	1	0	1882.5	18.62	V	PASS
25	1.4	QPSK	1	0	1914.3	18.61	V	PASS
25	1.4	16QAM	1	3	1850.7	<b>20.66</b>	H	PASS
25	1.4	16QAM	1	3	1882.5	20.64	H	PASS
25	1.4	16QAM	1	3	1914.3	20.63	H	PASS
25	1.4	16QAM	1	3	1850.7	17.86	V	PASS
25	1.4	16QAM	1	3	1882.5	17.84	V	PASS
25	1.4	16QAM	1	3	1914.3	17.83	V	PASS
25	3	QPSK	1	0	1851.5	<b>21.42</b>	H	PASS
25	3	QPSK	1	0	1882.5	21.40	H	PASS
25	3	QPSK	1	0	1913.5	21.38	H	PASS
25	3	QPSK	1	0	1851.5	18.66	V	PASS
25	3	QPSK	1	0	1882.5	18.70	V	PASS
25	3	QPSK	1	0	1913.5	18.68	V	PASS
25	3	16QAM	1	0	1851.5	<b>20.91</b>	H	PASS
25	3	16QAM	1	0	1882.5	20.86	H	PASS
25	3	16QAM	1	0	1913.5	20.88	H	PASS
25	3	16QAM	1	0	1851.5	18.16	V	PASS
25	3	16QAM	1	0	1882.5	18.13	V	PASS
25	3	16QAM	1	0	1913.5	18.14	V	PASS
25	5	QPSK	1	0	1852.5	21.66	H	PASS
25	5	QPSK	1	0	1882.5	<b>21.68</b>	H	PASS
25	5	QPSK	1	0	1912.5	21.65	H	PASS
25	5	QPSK	1	0	1852.5	19.00	V	PASS
25	5	QPSK	1	0	1882.5	18.97	V	PASS
25	5	QPSK	1	0	1912.5	18.99	V	PASS
25	5	16QAM	1	24	1852.5	20.95	H	PASS
25	5	16QAM	1	24	1882.5	20.93	H	PASS
25	5	16QAM	1	24	1912.5	<b>20.96</b>	H	PASS
25	5	16QAM	1	24	1852.5	18.03	V	PASS
25	5	16QAM	1	24	1882.5	18.02	V	PASS
25	5	16QAM	1	24	1912.5	18.00	V	PASS
25	10	QPSK	1	0	1855.0	<b>22.19</b>	H	PASS





LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
25	10	QPSK	1	0	1882.5	22.16	H	PASS
25	10	QPSK	1	0	1910.0	22.18	H	PASS
25	10	QPSK	1	0	1855.0	19.53	V	PASS
25	10	QPSK	1	0	1882.5	19.55	V	PASS
25	10	QPSK	1	0	1910.0	19.52	V	PASS
25	10	16QAM	1	0	1855.0	<b>21.47</b>	H	PASS
25	10	16QAM	1	0	1882.5	21.46	H	PASS
25	10	16QAM	1	0	1910.0	21.44	H	PASS
25	10	16QAM	1	0	1855.0	18.56	V	PASS
25	10	16QAM	1	0	1882.5	18.54	V	PASS
25	10	16QAM	1	0	1910.0	18.57	V	PASS
25	15	QPSK	1	74	1857.5	<b>22.23</b>	H	PASS
25	15	QPSK	1	74	1882.5	22.21	H	PASS
25	15	QPSK	1	74	1907.5	22.22	H	PASS
25	15	QPSK	1	74	1857.5	19.60	V	PASS
25	15	QPSK	1	74	1882.5	19.57	V	PASS
25	15	QPSK	1	74	1907.5	19.62	V	PASS
25	15	16QAM	1	0	1857.5	<b>21.51</b>	H	PASS
25	15	16QAM	1	0	1882.5	21.49	H	PASS
25	15	16QAM	1	0	1907.5	21.50	H	PASS
25	15	16QAM	1	0	1857.5	18.64	V	PASS
25	15	16QAM	1	0	1882.5	18.62	V	PASS
25	15	16QAM	1	0	1907.5	18.65	V	PASS
25	20	QPSK	1	0	1860.0	22.26	H	PASS
25	20	QPSK	1	0	1882.5	<b>22.28</b>	H	PASS
25	20	QPSK	1	0	1905.0	22.27	H	PASS
25	20	QPSK	1	0	1860.0	19.67	V	PASS
25	20	QPSK	1	0	1882.5	19.69	V	PASS
25	20	QPSK	1	0	1905.0	19.68	V	PASS
25	20	16QAM	1	0	1860.0	21.56	H	PASS
25	20	16QAM	1	0	1882.5	<b>21.57</b>	H	PASS
25	20	16QAM	1	0	1905.0	21.55	H	PASS
25	20	16QAM	1	0	1860.0	18.72	V	PASS
25	20	16QAM	1	0	1882.5	18.69	V	PASS
25	20	16QAM	1	0	1905.0	18.70	V	PASS



## LTE Band 26 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
26	1.4	QPSK	1	0	814.7	19.89	H	PASS
26	1.4	QPSK	1	0	819.0	<b>19.90</b>	H	PASS
26	1.4	QPSK	1	0	823.3	19.88	H	PASS
26	1.4	QPSK	1	0	814.7	17.11	V	PASS
26	1.4	QPSK	1	0	819.0	17.14	V	PASS
26	1.4	QPSK	1	0	823.3	17.13	V	PASS
26	1.4	16QAM	1	0	814.7	<b>19.18</b>	H	PASS
26	1.4	16QAM	1	0	819.0	19.16	H	PASS
26	1.4	16QAM	1	0	823.3	19.15	H	PASS
26	1.4	16QAM	1	0	814.7	16.38	V	PASS
26	1.4	16QAM	1	0	819.0	16.36	V	PASS
26	1.4	16QAM	1	0	823.3	16.35	V	PASS
26	3	QPSK	1	8	815.5	<b>19.94</b>	H	PASS
26	3	QPSK	1	8	819.0	19.92	H	PASS
26	3	QPSK	1	8	822.5	19.90	H	PASS
26	3	QPSK	1	8	815.5	17.18	V	PASS
26	3	QPSK	1	8	819.0	17.22	V	PASS
26	3	QPSK	1	8	822.5	17.20	V	PASS
26	3	16QAM	1	0	815.5	<b>19.21</b>	H	PASS
26	3	16QAM	1	0	819.0	19.16	H	PASS
26	3	16QAM	1	0	822.5	19.18	H	PASS
26	3	16QAM	1	0	815.5	16.46	V	PASS
26	3	16QAM	1	0	819.0	16.43	V	PASS
26	3	16QAM	1	0	822.5	16.44	V	PASS
26	5	QPSK	1	24	816.5	19.96	H	PASS
26	5	QPSK	1	24	819.0	<b>19.98</b>	H	PASS
26	5	QPSK	1	24	821.5	19.95	H	PASS
26	5	QPSK	1	24	816.5	17.30	V	PASS
26	5	QPSK	1	24	819.0	17.27	V	PASS
26	5	QPSK	1	24	821.5	17.29	V	PASS
26	5	16QAM	1	0	816.5	19.25	H	PASS
26	5	16QAM	1	0	819.0	19.23	H	PASS
26	5	16QAM	1	0	821.5	<b>19.26</b>	H	PASS
26	5	16QAM	1	0	816.5	16.33	V	PASS
26	5	16QAM	1	0	819.0	16.32	V	PASS
26	5	16QAM	1	0	821.5	16.30	V	PASS
26	10	QPSK	1	0	819.0	21.91	H	PASS



LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
26	10	QPSK	1	0	831.5	21.94	H	PASS
26	10	QPSK	1	0	844.0	<b>21.96</b>	H	PASS
26	10	QPSK	1	0	819.0	19.31	V	PASS
26	10	QPSK	1	0	831.5	19.33	V	PASS
26	10	QPSK	1	0	844.0	19.30	V	PASS
26	10	16QAM	1	49	819.0	<b>21.25</b>	H	PASS
26	10	16QAM	1	49	831.5	21.24	H	PASS
26	10	16QAM	1	49	844.0	21.22	H	PASS
26	10	16QAM	1	49	819.0	18.34	V	PASS
26	10	16QAM	1	49	831.5	18.32	V	PASS
26	10	16QAM	1	49	844.0	18.35	V	PASS
26	15	QPSK	1	74	821.5	<b>22.01</b>	H	PASS
26	15	QPSK	1	74	831.5	21.99	H	PASS
26	15	QPSK	1	74	841.5	22.00	H	PASS
26	15	QPSK	1	74	821.5	19.38	V	PASS
26	15	QPSK	1	74	831.5	19.35	V	PASS
26	15	QPSK	1	74	841.5	19.40	V	PASS
26	15	16QAM	1	0	821.5	<b>21.29</b>	H	PASS
26	15	16QAM	1	0	831.5	21.27	H	PASS
26	15	16QAM	1	0	841.5	21.28	H	PASS
26	15	16QAM	1	0	821.5	18.42	V	PASS
26	15	16QAM	1	0	831.5	18.40	V	PASS
26	15	16QAM	1	0	841.5	18.43	V	PASS



## LTE Band 41 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
41	5	QPSK	1	0	2498.5	21.43	H	PASS
41	5	QPSK	1	0	2593.0	<b>21.45</b>	H	PASS
41	5	QPSK	1	0	2687.5	21.42	H	PASS
41	5	QPSK	1	0	2498.5	18.77	V	PASS
41	5	QPSK	1	0	2593.0	18.74	V	PASS
41	5	QPSK	1	0	2687.5	18.76	V	PASS
41	5	16QAM	1	0	2498.5	20.72	H	PASS
41	5	16QAM	1	0	2593.0	20.70	H	PASS
41	5	16QAM	1	0	2687.5	<b>20.73</b>	H	PASS
41	5	16QAM	1	0	2498.5	17.80	V	PASS
41	5	16QAM	1	0	2593.0	17.79	V	PASS
41	5	16QAM	1	0	2687.5	17.77	V	PASS
41	10	QPSK	1	49	2501.0	<b>21.50</b>	H	PASS
41	10	QPSK	1	49	2593.0	21.47	H	PASS
41	10	QPSK	1	49	2685.0	21.49	H	PASS
41	10	QPSK	1	49	2501.0	18.84	V	PASS
41	10	QPSK	1	49	2593.0	18.86	V	PASS
41	10	QPSK	1	49	2685.0	18.83	V	PASS
41	10	16QAM	1	0	2501.0	<b>20.78</b>	H	PASS
41	10	16QAM	1	0	2593.0	20.77	H	PASS
41	10	16QAM	1	0	2685.0	20.75	H	PASS
41	10	16QAM	1	0	2501.0	17.87	V	PASS
41	10	16QAM	1	0	2593.0	17.85	V	PASS
41	10	16QAM	1	0	2685.0	17.88	V	PASS
41	15	QPSK	1	0	2503.5	<b>21.54</b>	H	PASS
41	15	QPSK	1	0	2593.0	21.52	H	PASS
41	15	QPSK	1	0	2682.5	21.53	H	PASS
41	15	QPSK	1	0	2503.5	18.91	V	PASS
41	15	QPSK	1	0	2593.0	18.88	V	PASS
41	15	QPSK	1	0	2682.5	18.93	V	PASS
41	15	16QAM	1	74	2503.5	<b>20.82</b>	H	PASS
41	15	16QAM	1	74	2593.0	20.80	H	PASS
41	15	16QAM	1	74	2682.5	20.81	H	PASS
41	15	16QAM	1	74	2503.5	17.95	V	PASS
41	15	16QAM	1	74	2593.0	17.93	V	PASS
41	15	16QAM	1	74	2682.5	17.96	V	PASS
25	20	QPSK	1	0	2506.0	<b>21.66</b>	H	PASS



LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	H/V	Verdict
			RB Size	RB Offset				
41	20	QPSK	1	0	2593.0	21.27	H	PASS
41	20	QPSK	1	0	2680.0	21.26	H	PASS
41	20	QPSK	1	0	2506.0	18.66	V	PASS
41	20	QPSK	1	0	2593.0	18.68	V	PASS
41	20	QPSK	1	0	2680.0	18.67	V	PASS
41	20	16QAM	1	49	2506.0	20.55	H	PASS
41	20	16QAM	1	49	2593.0	<b>20.56</b>	H	PASS
41	20	16QAM	1	49	2680.0	20.54	H	PASS
41	20	16QAM	1	49	2506.0	17.71	V	PASS
41	20	16QAM	1	49	2593.0	17.68	V	PASS
41	20	16QAM	1	49	2680.0	17.69	V	PASS

## 2.8 Radiated Out of Band Emissions

### 2.8.1 Requirement

The radiated spurious emission was measured by substitution method according to ANSI / TIA /EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

### 2.8.2 Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

### 2.8.3 Test Setup


For radiated emissions from 9kHz to 30MHz

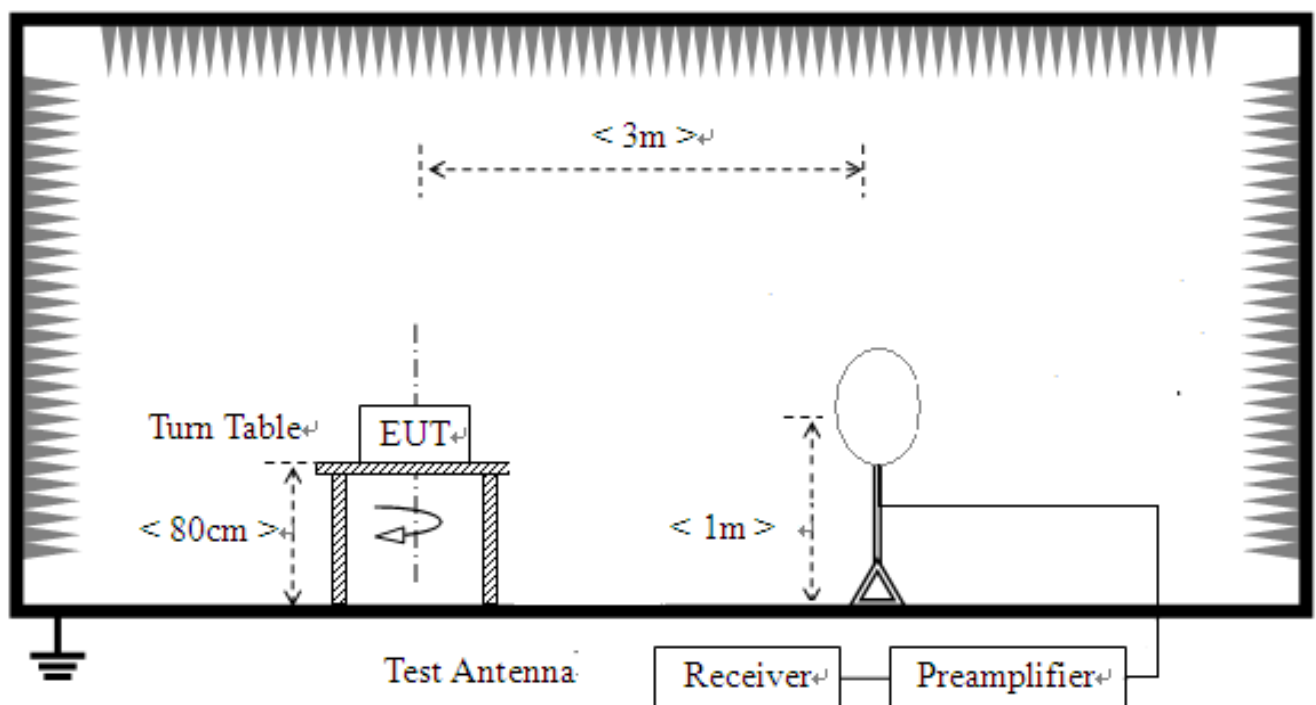

For radiated emissions from 30MHz to 1GHz

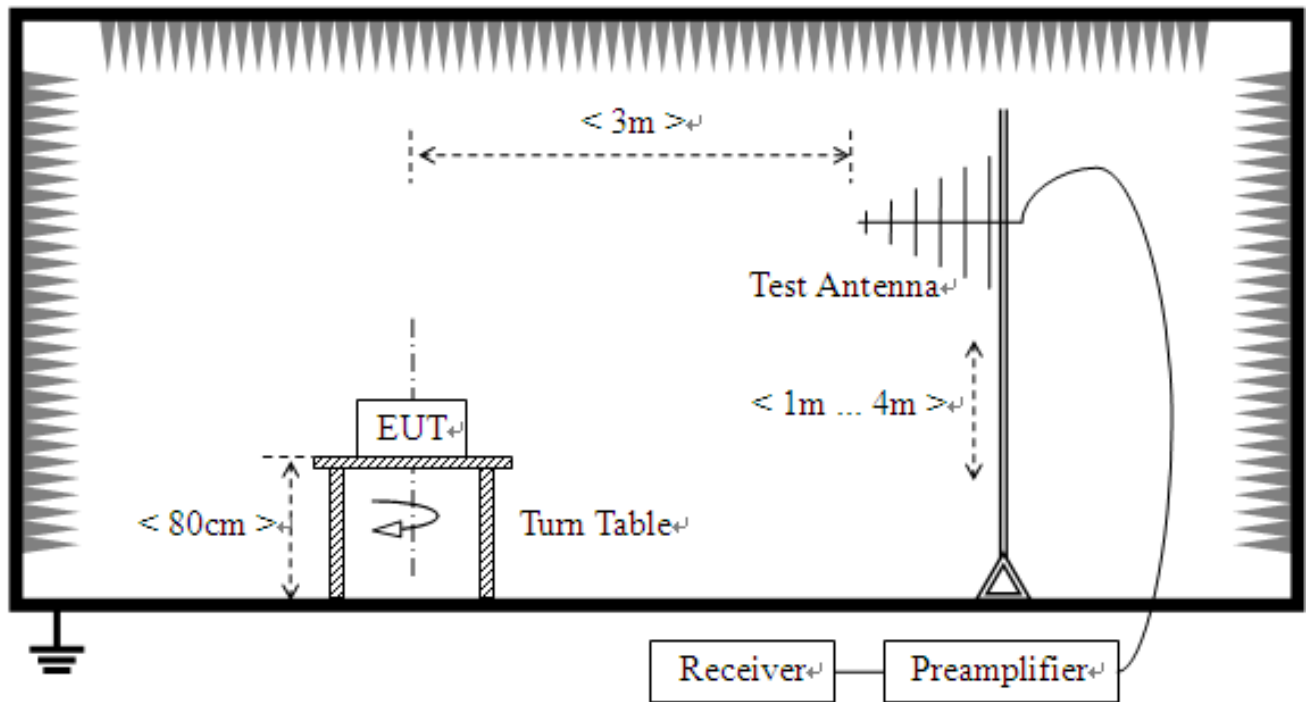

For radiated emissions above 1GHz

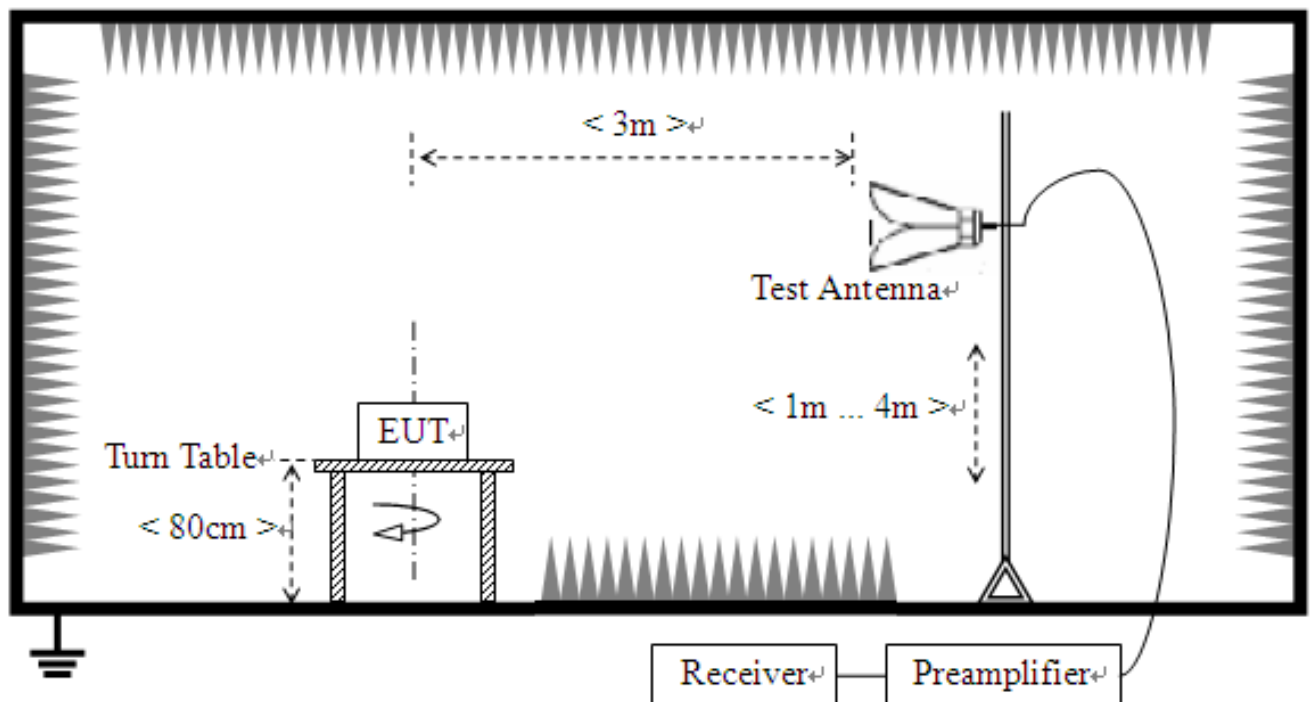

#### 2.8.4 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power  $P$  (Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$  dBm.

<For Band 41>

The limit line is derived from  $55 + 10\log(P)$  dB below the transmitter power  $P$  (Watts)  
 $= P(W) - [55 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)  
 $= -25$  dBm.

11. All Spurious Emission tests were performed in X, Y, Z axis direction and low, middle, high channel. And only the worst axis test condition was recorded in this test report.
12. The spectrum is measured from 9 KHz to the 10<sup>th</sup> harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.





13. The maximum RB configurations of the Radiated Spurious Emissions as RB Size 1,  
RB Offset 0

## 2.8.5 Test Result (Plots) of Radiated Spurious Emission

Note: 1. within 30MHz-1GHz were found more than 20dB below limit line

Note: 2. Absolute Level=Reading Level + Factor

### LTE Band 2 QPSK 20MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	2461.1537	-50.91	-57.90	-13.00	44.90	-6.99	Horizontal
2	2909.9700	-51.26	-55.42	-13.00	42.42	-4.16	Horizontal
3	3741.1482	-43.57	-48.27	-13.00	35.27	-4.70	Horizontal
4	15212.442	-63.05	-31.38	-13.00	18.38	31.67	Horizontal
5	17681.936	-64.86	-26.33	-13.00	13.33	38.53	Horizontal

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	3741.1482	-45.87	-50.03	-13.00	37.03	-4.16	Vertical
2	7482.8966	-56.28	-54.52	-13.00	41.52	1.76	Vertical
3	10507.501	-60.58	-52.51	-13.00	39.51	8.07	Vertical
4	16088.617	-59.57	-28.55	-13.00	15.55	31.02	Vertical
5	17675.935	-64.34	-23.88	-13.00	10.88	40.46	Vertical

### LTE Band 4 QPSK 20MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	3117.0234	-53.44	-54.77	-13.00	41.77	-1.33	Horizontal
2	4023.9548	-54.91	-58.73	-13.00	45.73	-3.82	Horizontal
3	5200.0400	-49.22	-52.74	-13.00	39.74	-3.52	Horizontal
4	6883.2266	-58.53	-56.75	-13.00	43.75	1.78	Horizontal
5	10518.753	-60.72	-52.60	-13.00	39.60	8.12	Horizontal

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	3095.5691	-54.23	-55.27	-13.00	42.27	-1.04	Vertical
2	5200.0400	-48.89	-52.41	-13.00	39.41	-3.52	Vertical
3	10509.001	-60.01	-51.93	-13.00	38.93	8.08	Vertical



## LTE Band 5 QPSK 10MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1763.3527	-55.86	-65.38	-13.00	52.38	-9.52	Horizontal
2	3526.9054	-56.08	-60.69	-13.00	47.69	-4.61	Horizontal
3	7052.4105	-62.01	-60.62	-13.00	47.62	1.39	Horizontal

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1763.3527	-56.81	-65.89	-13.00	52.89	-9.08	Vertical
2	3526.9054	-55.25	-59.40	-13.00	46.40	-4.15	Vertical
3	7052.4105	-61.48	-59.93	-13.00	46.93	1.55	Vertical

## LTE Band 12 QPSK 10MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1418.3837	-44.98	-55.48	-13.00	42.48	-10.50	Horizontal
2	1825.0150	-52.76	-61.85	-13.00	48.85	-9.09	Horizontal
3	2414.9830	-53.22	-61.23	-13.00	48.23	-8.01	Horizontal
4	3000.2501	-53.72	-57.28	-13.00	44.28	-3.56	Horizontal

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1688.6877	-53.01	-62.22	-13.00	49.22	-9.21	Vertical
2	3108.3717	-55.12	-57.06	-13.00	44.06	-1.94	Vertical
3	3994.4989	-55.43	-58.79	-13.00	45.79	-3.36	Vertical
4	5785.5571	-55.77	-55.41	-13.00	42.41	0.36	Vertical

### LTE Band 13 QPSK 10MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1258.5517	-52.29	-62.50	-13.00	49.50	-10.21	Horizontal
2	1900.2300	-52.17	-61.38	-13.00	48.38	-9.21	Horizontal
3	3075.4651	-54.19	-57.21	-13.00	44.21	-3.02	Horizontal
4	3829.9660	-54.38	-58.54	-13.00	45.54	-4.16	Horizontal

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1305.5611	-53.11	-63.27	-13.00	50.27	-10.16	Vertical
2	1839.1178	-54.11	-63.22	-13.00	50.22	-9.11	Vertical
3	2443.1886	-53.09	-61.03	-13.00	48.03	-7.94	Vertical
4	3084.8670	-54.53	-57.49	-13.00	44.49	-2.96	Vertical

### LTE Band 25 QPSK 20MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	2241.6208	-53.70	-62.27	-13.00	49.27	-8.57	Horizont
2	3044.8590	-53.87	-56.16	-13.00	43.16	-2.29	Horizont
3	3823.0646	-45.56	-50.19	-13.00	37.19	-4.63	Horizont
4	5787.1074	-56.58	-57.69	-13.00	44.69	-1.11	Horizont
5	7240.1480	-58.32	-56.33	-13.00	43.33	1.99	Horizont
6	8829.7159	-59.60	-57.72	-13.00	44.72	1.88	Horizont
7	10559.711	-61.35	-53.77	-13.00	40.77	7.58	Horizont
8	12385.277	-61.56	-50.37	-13.00	37.37	11.19	Horizont

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1912.4562	-7.39	-16.61	-13.00	3.61	-9.22	Vertical
2	3095.5691	-54.44	-55.48	-13.00	42.48	-1.04	Vertical
3	3823.0646	-45.05	-48.84	-13.00	35.84	-3.79	Vertical
4	5822.2144	-56.71	-57.53	-13.00	44.53	-0.82	Vertical
5	7335.7171	-58.25	-56.44	-13.00	43.44	1.81	Vertical
6	8800.4601	-59.59	-57.47	-13.00	44.47	2.12	Vertical
7	10581.166	-60.55	-52.11	-13.00	39.11	8.44	Vertical
8	12463.292	-61.26	-52.75	-13.00	39.75	8.51	Vertical

## ` LTE Band 26 QPSK 15MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1317.3135	-52.61	-62.80	-13.00	49.80	-10.19	Horizontal
2	1820.3141	-53.14	-62.22	-13.00	49.22	-9.08	Horizontal
3	2471.3943	-54.30	-62.18	-13.00	49.18	-7.88	Horizontal
4	3108.3717	-55.04	-57.93	-13.00	44.93	-2.89	Horizontal
5	4626.7754	-54.27	-59.54	-13.00	46.54	-5.27	Horizontal
6	7278.1056	-58.35	-55.40	-13.00	42.40	2.95	Horizontal
7	11572.414	-60.67	-50.43	-13.00	37.43	10.24	Horizontal

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1881.4263	-53.24	-62.42	-13.00	49.42	-9.18	Vertical
2	3054.3109	-54.12	-57.29	-13.00	44.29	-3.17	Vertical
3	3935.7371	-54.52	-58.72	-13.00	45.72	-4.20	Vertical
4	5806.7113	-55.90	-55.82	-13.00	42.82	0.08	Vertical
5	7233.4467	-57.98	-55.53	-13.00	42.53	2.45	Vertical
6	9189.0378	-59.40	-57.35	-13.00	44.35	2.05	Vertical
7	11382.026	-61.00	-51.29	-13.00	38.29	9.71	Vertical

## ` LTE Band 41 QPSK 20MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	3107.2715	-54.30	-56.39	-25.00	31.39	-2.09	Horizont
2	3782.1064	-54.48	-59.03	-25.00	34.03	-4.55	Horizont
3	4392.5785	-56.17	-60.83	-25.00	35.83	-4.66	Horizont
4	6106.9714	-56.89	-57.12	-25.00	32.12	-0.23	Horizont
5	7331.8164	-58.77	-56.41	-25.00	31.41	2.36	Horizont

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	3076.0652	-54.59	-55.90	-25.00	30.90	-1.31	Vertical
2	3825.0150	-55.32	-59.14	-25.00	34.14	-3.82	Vertical
3	4414.0328	-55.71	-59.95	-25.00	34.95	-4.24	Vertical
4	5792.9586	-56.48	-57.23	-25.00	32.23	-0.75	Vertical
5	7214.7930	-58.92	-56.96	-25.00	31.96	1.96	Vertical



### 3. LIST OF MEASURING EQUIPMENT

Description	Manufacturer	Model	Serial No.	Cal. Date	Due Date	Remark
EMI Test Receiver	R&S	ESIB26	A0304218	2018.05.25	2019.05.24	Radiation
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2018.05.25	2019.05.24	Radiation
Bilog Antenna	Schwarzbeck	VULB 9163	9163-274	2018.05.25	2019.05.24	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HL562	101341	2018.05.25	2019.05.24	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HL562	101339	2018.05.25	2019.05.24	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100150	2018.05.25	2019.05.24	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100148	2018.05.25	2019.05.24	Radiation
Horn antenna (18GHz~26.5GHz)	R&S	HM118	101286	2018.05.25	2019.05.24	Radiation
Horn antenna (18GHz~26.5GHz)	R&S	HM118	101284	2018.05.25	2019.05.24	Radiation
Amplifier 20M~3GHz	R&S	PAP-0203H	22018	2018.05.25	2019.05.24	Radiation
Ampilier 1G~18GHz	R&S	MITEQ AFS42-00101800	25-S-42	2018.05.25	2019.05.24	Radiation
Ampilier 18G~40GHz	R&S	JS42-18002600-2 8-5A	12111.0980.00	2018.05.25	2019.05.24	Radiation
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2017.11.12	2018.11.11	Conducted
LISN	ROHDE&SCH WARZ	ESH2-Z5	A0304221	2018.05.25	2019.05.24	Conducted
Test Receiver	R&S	ESCS30	A0304260	2018.05.25	2019.05.24	Conducted
Cable	SUNHNER	SUCOFLEX 100	/	2018.05.25	2019.05.24	Radiation
Cable	SUNHNER	SUCOFLEX 104	/	2018.05.25	2019.05.24	Radiation
Temperature chamber	espec	SU-642	93008519	2017.08.25	2018.08.24	Conducted
Wideband Radio Communication tester	R&S	CMW500	149332	2018.05.04	2019.05.03	Conducted
Power Supply	R&S	NGMO1	101037	2018.05.04	2019.05.03	Conducted