

FCC Test Report

Product Name	LVL50 Wireless Stereo Headset for PS4
Model No	051-049R
FCC ID.	X5B-051049R

Applicant	Performance Designed Products, LLC
Address	14144 Ventura Blvd., Suite 200 Sherman Oaks, CA91423 USA

Date of Receipt	Oct. 02, 2018
Issue Date	Oct. 23, 2018
Report No.	18A0013R-RFUSP25V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report


Issue Date: Oct. 23, 2018

Report No.: 18A0013R-RFUSP25V00




Product Name	LVL50 Wireless Stereo Headset for PS4
Applicant	Performance Designed Products, LLC
Address	14144 Ventura Blvd., Suite 200 Sherman Oaks, CA91423 USA
Manufacturer	Performance Designed Products, LLC
Model No.	051-049R
EUT Rated Voltage	DC 5V (Power by USB) or DC 3.7V (Power by Battery)
EUT Test Voltage	DC 5V (Power by USB)
Trade Name	PDP
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2017 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v05
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Rita Huang)

Tested By :



(Assistant Engineer / Boris Hsu)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
1.7. List of Test Equipment	10
2. Conducted Emission.....	11
2.1. Test Setup	11
2.2. Limits	12
2.3. Test Procedure	12
2.4. Uncertainty	12
2.5. Test Result of Conducted Emission.....	13
3. Peak Power Output	15
3.1. Test Setup	15
3.2. Limits	15
3.3. Test Procedure	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output.....	16
4. Radiated Emission.....	17
4.1. Test Setup	17
4.2. Limits	18
4.3. Test Procedure	19
4.4. Uncertainty	20
4.5. Test Result of Radiated Emission.....	21
5. RF Antenna Conducted Test.....	25
5.1. Test Setup	25
5.2. Limits	25
5.3. Test Procedure	25
5.4. Uncertainty	25
5.5. Test Result of RF antenna conducted test.....	26
6. Band Edge	29
6.1. Test Setup	29
6.2. Limits	29
6.3. Test Procedure	30
6.4. Uncertainty	31
6.5. Test Result of Band Edge	32
7. Occupied Bandwidth.....	36
7.1. Test Setup	36
7.2. Limits	36

7.3.	Test Procedure	36
7.4.	Uncertainty	36
7.5.	Test Result of Occupied Bandwidth	37
8.	Power Density	40
8.1.	Test Setup	40
8.2.	Limits	40
8.3.	Test Procedure	40
8.4.	Uncertainty	40
8.5.	Test Result of Power Density	41
9.	EMI Reduction Method During Compliance Testing	46
Attachment 1:	EUT Test Photographs	
Attachment 2:	EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	LVL50 Wireless Stereo Headset for PS4
Trade Name	PDP
Model No.	051-049R
FCC ID.	X5B-051049R
Frequency Range	2405.35 – 2477.35MHz
Channel Control	Auto
Channel Separation	2MHz
Antenna Gain	Refer to the table “Antenna List”
Channel Number	37
Type of Modulation	Pi/4 DQPSK
Antenna Type	Printed on PCB
USB Cable	Non-Shielded, 2.0m

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	TATUNG	051-044R (Ant 1) 051-044R (Ant 2)	5.48dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2405.35 MHz	Channel 11:	2425.35 MHz	Channel 21:	2445.35 MHz	Channel 31:	2465.35 MHz
Channel 2:	2407.35 MHz	Channel 12:	2427.35 MHz	Channel 22:	2447.35 MHz	Channel 32:	2467.35 MHz
Channel 3:	2409.35 MHz	Channel 13:	2429.35 MHz	Channel 23:	2449.35 MHz	Channel 33:	2469.35 MHz
Channel 4:	2411.35 MHz	Channel 14:	2431.35 MHz	Channel 24:	2451.35 MHz	Channel 34:	2471.35 MHz
Channel 5:	2413.35 MHz	Channel 15:	2433.35 MHz	Channel 25:	2453.35 MHz	Channel 35:	2473.35 MHz
Channel 6:	2415.35 MHz	Channel 16:	2435.35 MHz	Channel 26:	2455.35 MHz	Channel 36:	2475.35 MHz
Channel 7:	2417.35 MHz	Channel 17:	2437.35 MHz	Channel 27:	2457.35 MHz	Channel 37:	2477.35 MHz
Channel 8:	2419.35 MHz	Channel 18:	2439.35 MHz	Channel 28:	2459.35 MHz		
Channel 9:	2421.35 MHz	Channel 19:	2441.35 MHz	Channel 29:	2461.35 MHz		
Channel 10:	2423.35 MHz	Channel 20:	2443.35 MHz	Channel 30:	2463.35 MHz		

Note:

1. The EUT is an LVL50 Wireless Stereo Headset for PS4 with a built-in 2.4GHz transceiver.
2. Device contains a diversity function, only worst case is shown in the report.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
5. The EUT is using two the same SISO antennas(Ant1&Ant2) and only the worst case(Ant1) is shown in the report.
6. These tests are conducted on a sample for the purpose of demonstrating compliance of 2.4GHz transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices

Test Mode:	Mode 1: Transmit
------------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	Latitude E5440	HG26TZ1	Non-shielded, 0.8m

Signal Cable Type	Signal cable Description
A USB Cable	Non-Shielded, 1.7m

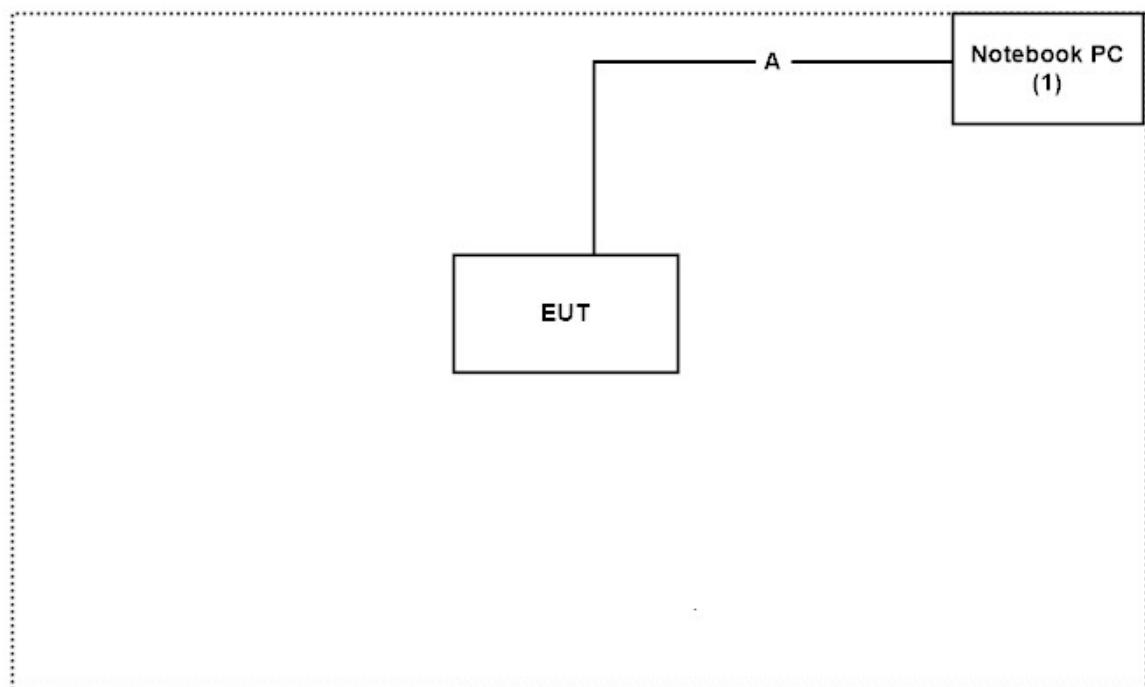1.4. Configuration of Tested System



1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute “Avnrea Continue Power (v2018.5.18.1)” on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW3023

1.7. List of Test Equipment

For Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2018/02/12	2019/02/11
X	Spectrum Analyzer	Agilent	N9010A	MY48030495	2018/10/13	2019/10/12
X	Peak Power Analyzer	Keysight	8990B	MY51000410	2018/08/01	2019/07/31
X	Wideband Power Sensor	Keysight	N1923A	MY56080003	2018/07/25	2019/07/24
X	Wideband Power Sensor	Keysight	N1923A	MY56080004	2018/07/25	2019/07/24
X	EMI Test Receiver	R&S	ESCS 30	100369	2017/11/07	2018/11/06
X	LISN	R&S	ESH3-Z5	836679/017	2018/02/09	2019/02/08
X	LISN	R&S	ENV216	100097	2018/02/09	2019/02/08

For Radiated measurements /Site3/CB8


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Spectrum Analyzer	R&S	FSP40	100170	2018/03/12	2019/03/11
X	Loop Antenna	Teseq	HLA6121	37133	2018/10/13	2019/10/12
X	Bilog Antenna	Schaffner Chase	CBL6112B	2707	2018/06/24	2019/06/23
X	Coaxial Cable	DEKRA	RG 214	LC003-RG	2018/06/14	2019/06/13
X	Pre-Amplifier	Jet-Power	JPA-10M1G33	170101000330010	2018/06/14	2019/06/13
X	Horn Antenna	ETS-Lindgren	3117	00135205	2018/05/03	2019/05/02
X	Horn Antenna	SCHWARZBECK	9120D	576	2017/11/30	2018/11/29
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2018/04/10	2019/04/09
X	Horn Antenna	Com-Power	AH-840	101043	2018/01/09	2019/01/08
X	Amplifier + Cable	EMCI	EMC184045SE	980370	2018/03/21	2019/03/20
X	Filter	MICRO-TRONICS	BRM50702	G270	2018/08/06	2019/08/05
X	Filter	MICRO-TRONICS	BRM50716	G196	2018/08/06	2019/08/05

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version :QuieTek EMI 2.0 V2.1.113.

2. Conducted Emission

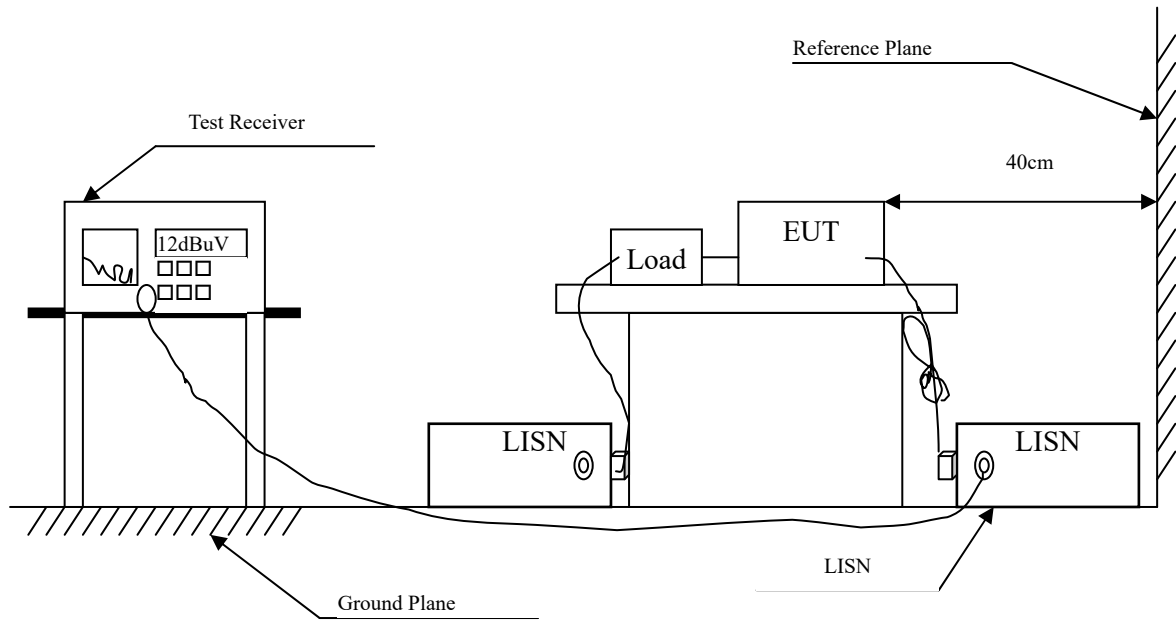2.1. Test Setup



2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Uncertainty

± 2.26 dB

2.5. Test Result of Conducted Emission

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Date : 2018/10/09
 Test Mode : Mode 1: Transmit

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.173	9.742	35.120	44.862	-20.481	65.343
0.287	9.741	24.880	34.621	-27.465	62.086
0.513	9.751	32.200	41.951	-14.049	56.000
1.779	9.812	12.780	22.592	-33.408	56.000
3.478	9.869	15.880	25.749	-30.251	56.000
9.607	10.065	16.360	26.425	-33.575	60.000
Average					
0.173	9.742	22.500	32.242	-23.101	55.343
0.287	9.741	18.130	27.871	-24.215	52.086
0.513	9.751	24.060	33.811	-12.189	46.000
1.779	9.812	6.560	16.372	-29.628	46.000
3.478	9.869	5.780	15.649	-30.351	46.000
9.607	10.065	12.070	22.135	-27.865	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Date : 2018/10/09
 Test Mode : Mode 1: Transmit

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.185	9.737	32.080	41.817	-23.183	65.000
0.283	9.740	24.320	34.060	-28.140	62.200
0.513	9.741	28.580	38.321	-17.679	56.000
1.232	9.780	13.620	23.400	-32.600	56.000
3.693	9.874	21.040	30.914	-25.086	56.000
9.611	10.077	11.600	21.676	-38.324	60.000
Average					
0.185	9.737	19.990	29.727	-25.273	55.000
0.283	9.740	17.200	26.940	-25.260	52.200
0.513	9.741	21.180	30.921	-15.079	46.000
1.232	9.780	6.480	16.260	-29.740	46.000
3.693	9.874	9.200	19.074	-26.926	46.000
9.611	10.077	5.780	15.856	-34.144	50.000
0.185	9.737	19.990	29.727	-25.273	55.000

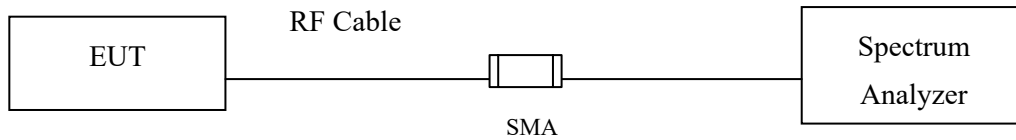
Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

Conducted Measurement



3.2. Limits

The maximum peak power shall be less 1 Watt.

3.3. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 section 8.3.1.3 PKPM1 Peak-reading power meter method for compliance to FCC 47CFR 15.247 requirements.

3.4. Uncertainty

± 1.19 dB

3.5. Test Result of Peak Power Output

Product : LVL50 Wireless Stereo Headset for PS4
Test Item : Peak Power Output Data
Test Site : No.3 OATS
Test Date : 2018/10/08
Test Mode : Mode 1: Transmit


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
01	2405.35	4.55	<30dBm	Pass
19	2441.35	4.32	<30dBm	Pass
37	2477.35	3.66	<30dBm	Pass

Note: Measurement Level = Reading value on power meter + cable loss


4. Radiated Emission

4.1. Test Setup

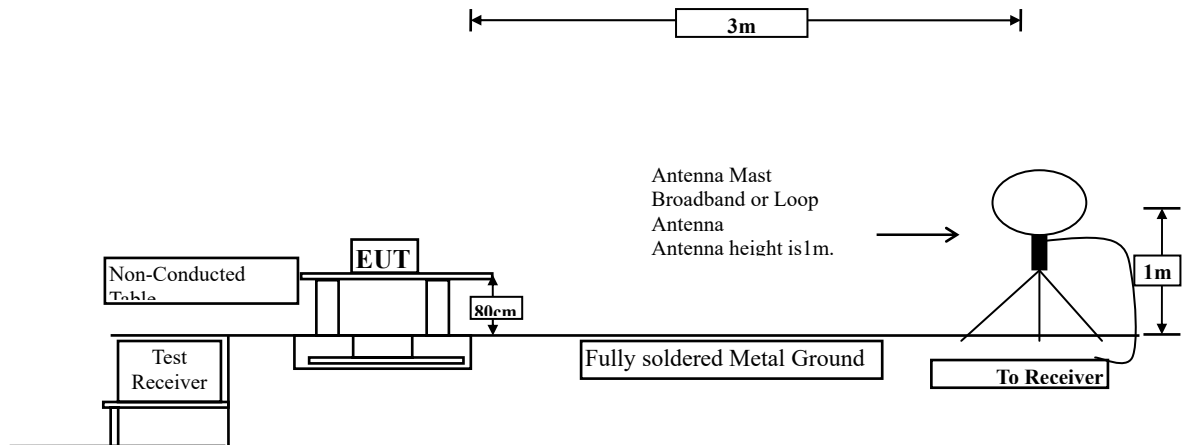
Radiated Emission Under 30MHz



Radiated Emission Below 1GHz

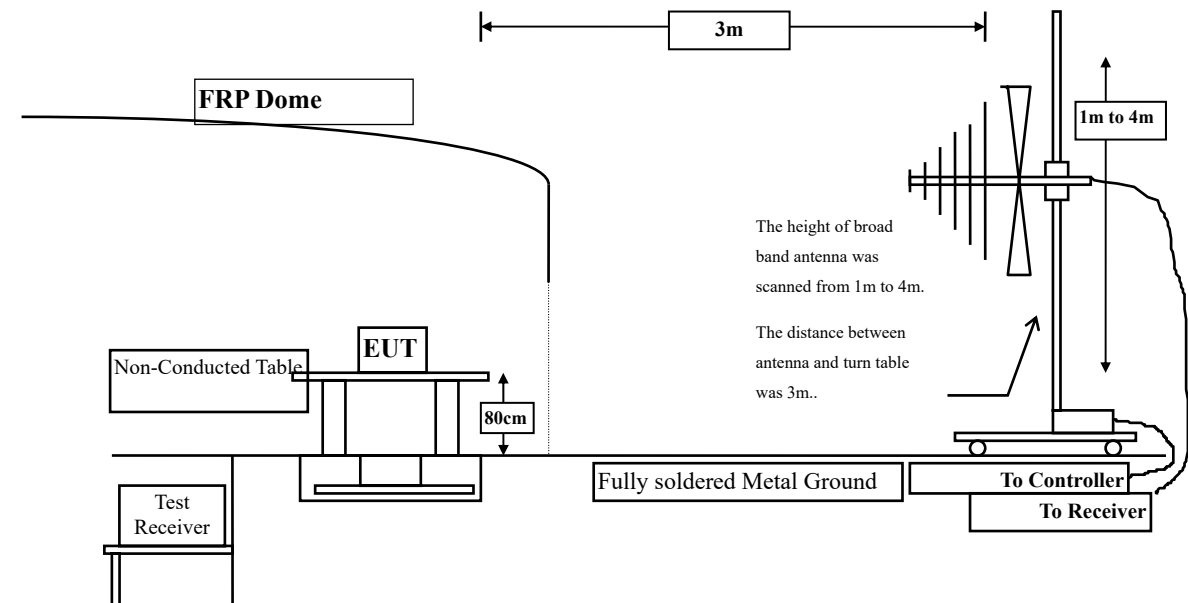

Radiated Emission Above 1GHz

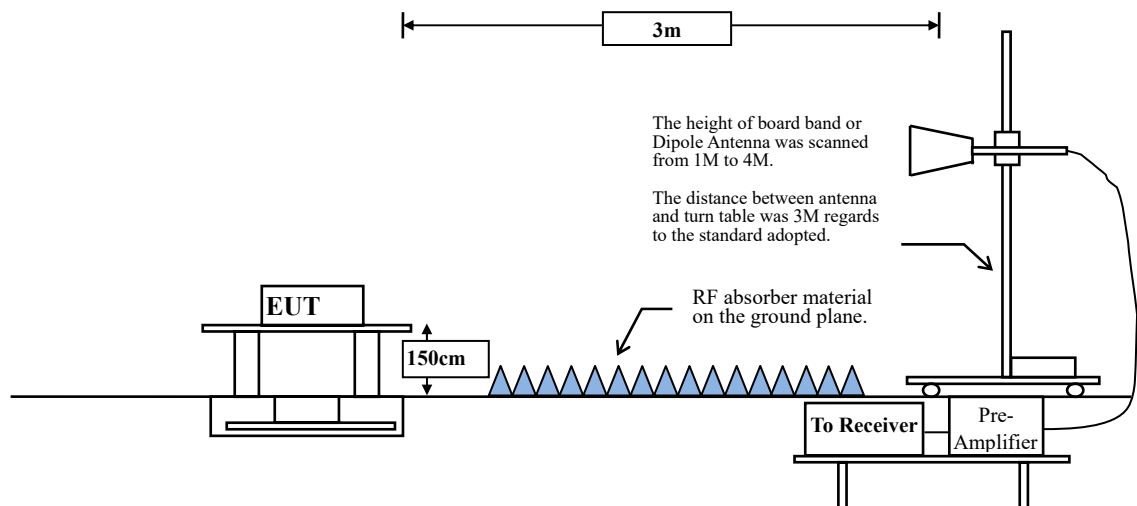

4.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to KDB 558074 section 8.3.2.1 Peak power measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 section 8.3.2.1 Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
Pi/4 DQPSK	100	--	--	10

Note: Duty Cycle Refer to Section 9

4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

4.5. Test Result of Radiated Emission

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2018/10/12
 Test Mode : Mode 1: Transmit (2405.35MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4810.700	2.526	43.406	45.933	-28.067	74.000
7216.050	9.399	39.892	49.291	-24.709	74.000
9621.400	10.269	38.951	49.220	-24.780	74.000
Vertical					
Peak Detector:					
4810.700	2.922	41.049	43.972	-30.028	74.000
7216.050	9.884	38.894	48.778	-25.222	74.000
9621.400	10.750	38.114	48.864	-25.136	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2018/10/12
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4882.700	2.021	41.708	43.729	-30.271	74.000
7324.050	9.783	38.114	47.897	-26.103	74.000
9765.400	9.687	40.151	49.838	-24.162	74.000
Vertical					
Peak Detector:					
4882.700	2.484	40.841	43.325	-30.675	74.000
7324.050	10.399	39.268	49.667	-24.333	74.000
9765.400	10.320	39.589	49.909	-24.091	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2018/10/12
 Test Mode : Mode 1: Transmit (2477.35MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4954.700	2.529	42.724	45.254	-28.746	74.000
7432.050	10.524	38.673	49.197	-24.803	74.000
9909.400	10.189	39.807	49.996	-24.004	74.000
Vertical					
Peak Detector:					
4954.700	3.316	43.302	46.618	-27.382	74.000
7432.050	11.221	38.070	49.291	-24.709	74.000
9909.400	11.240	39.845	51.085	-22.915	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2018/10/15
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
229.820	-8.001	42.281	34.280	-11.720	46.000
351.070	-1.296	34.616	33.320	-12.680	46.000
491.720	1.521	34.522	36.043	-9.957	46.000
559.620	2.147	36.432	38.579	-7.421	46.000
632.370	1.388	32.961	34.349	-11.651	46.000
842.860	6.248	31.622	37.870	-8.130	46.000
Vertical					
175.500	-1.842	34.225	32.383	-11.117	43.500
342.340	-0.936	27.086	26.150	-19.850	46.000
519.850	0.954	25.630	26.584	-19.416	46.000
608.120	2.175	23.668	25.843	-20.157	46.000
833.160	1.716	29.632	31.348	-14.652	46.000
933.070	3.209	28.633	31.842	-14.158	46.000

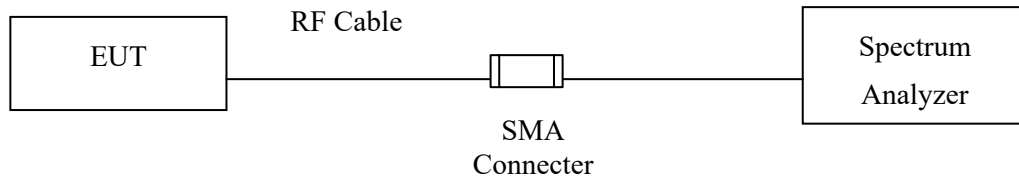
Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

5. RF Antenna Conducted Test

5.1. Test Setup

RF antenna Conducted Measurement:



5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

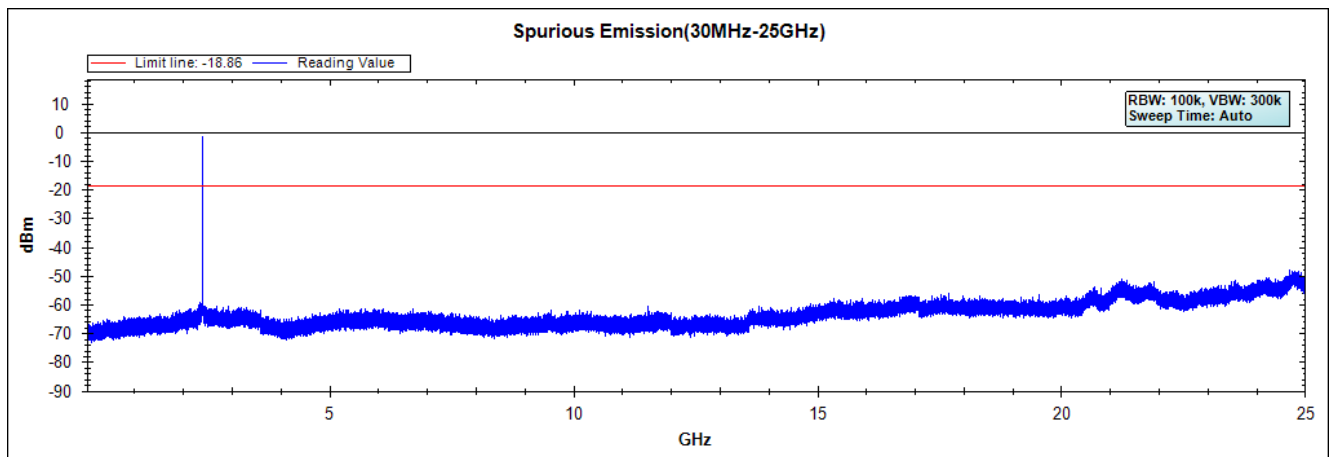
The measurement uncertainty

Conducted is defined as $\pm 1.20\text{dB}$

5.5. Test Result of RF antenna conducted test

Product : LVL50 Wireless Stereo Headset for PS4
Test Item : RF antenna conducted test
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit


Channel 01 (2405.35MHz) 30M-25GHz



Note: The above test pattern is synthesized by multiple of the frequency range.

Product : LVL50 Wireless Stereo Headset for PS4
Test Item : RF antenna conducted test
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit

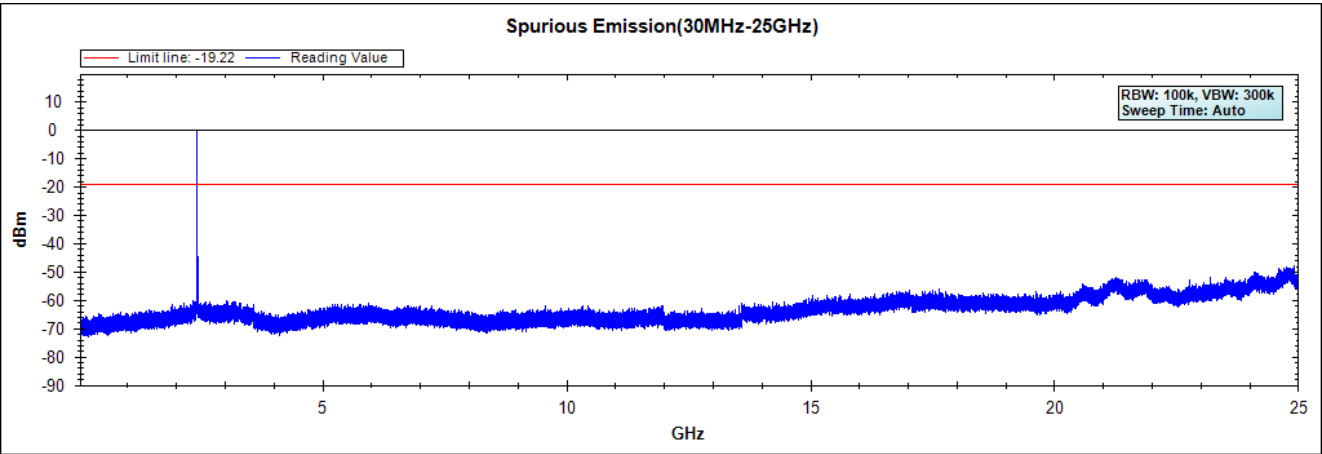
Channel 19 (2441.35MHz) 30M-25GHz



Note: The above test pattern is synthesized by multiple of the frequency range.

Product : LVL50 Wireless Stereo Headset for PS4
Test Item : RF antenna conducted test
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit

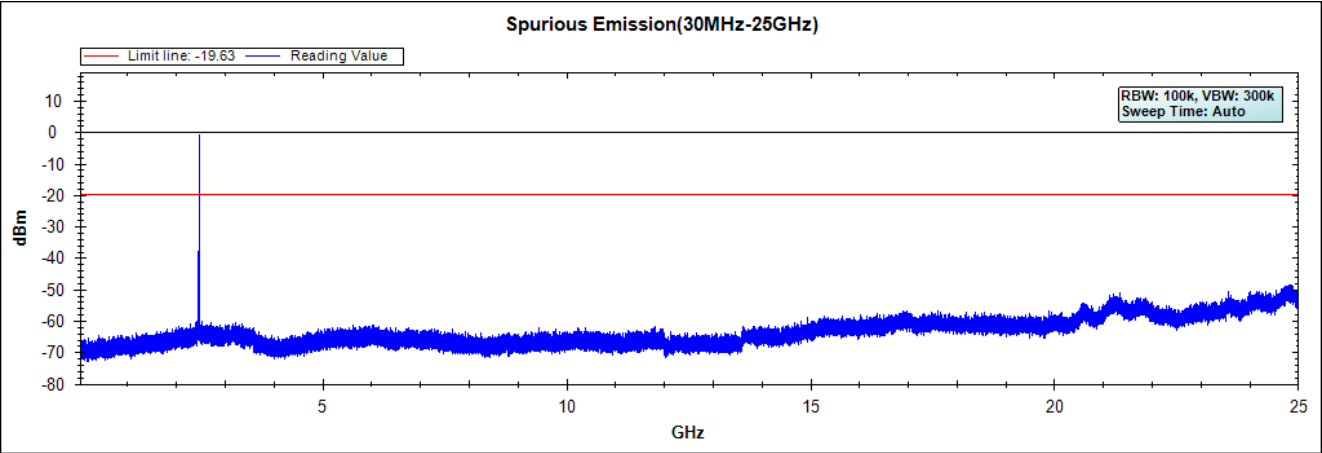Channel 37 (2477.35MHz) 30M-25GHz




Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

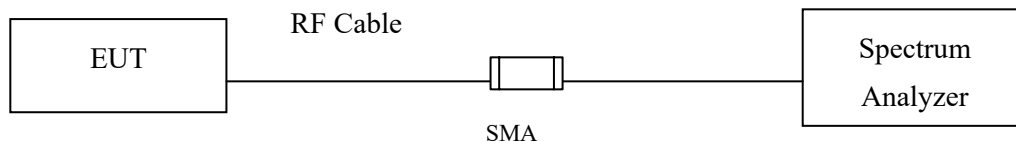RF Conducted Measurement



RF Radiated Measurement:

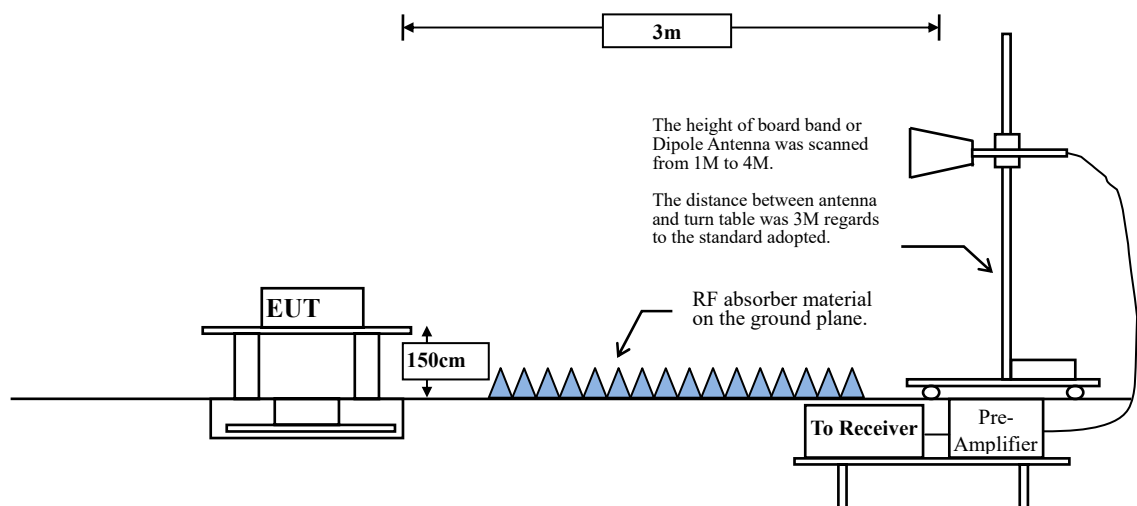

6.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to KDB 558074 section 8.3.2.1 Peak power measurement procedure

RBW = as specified in Table 1.

VBW $\geq 3 \times$ RBW.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 section 8.3.2.1 Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98 \%$

VBW $\geq 1/T$, when duty cycle $< 98 \%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
Pi/4 DQPSK	100	--	--	10

Note: Duty Cycle Refer to Section 9

6.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

6.5. Test Result of Band Edge

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test date : 2018/10/09
 Test Mode : Mode 1: Transmit (2405.35MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2388.116	6.467	42.863	49.329	74.00	54.00	Pass
01 (Peak)	2390.000	6.474	41.897	48.372	74.00	54.00	Pass
01 (Peak)	2400.000	6.528	56.962	63.490	--	--	Pass
01 (Peak)	2405.507	6.562	89.817	96.379	--	--	--
01 (Average)	2387.101	6.462	27.404	33.866	74.00	54.00	Pass
01 (Average)	2390.000	6.474	26.819	33.294	74.00	54.00	Pass
01 (Average)	2400.000	6.528	50.136	56.664	--	--	Pass
01 (Average)	2405.362	6.561	89.036	95.597	--	--	--

Figure Channel 01: Horizontal (Peak)


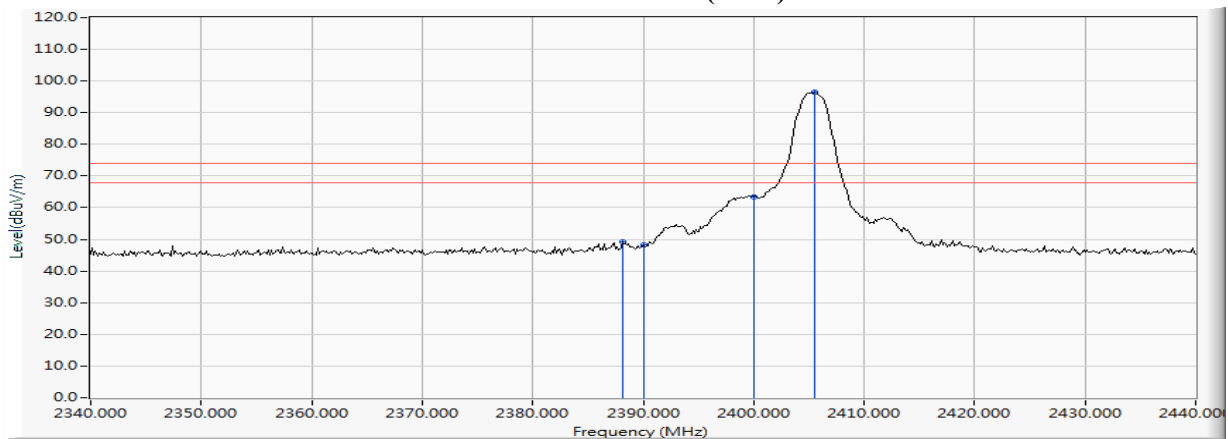


Figure Channel 01: Horizontal (Average)

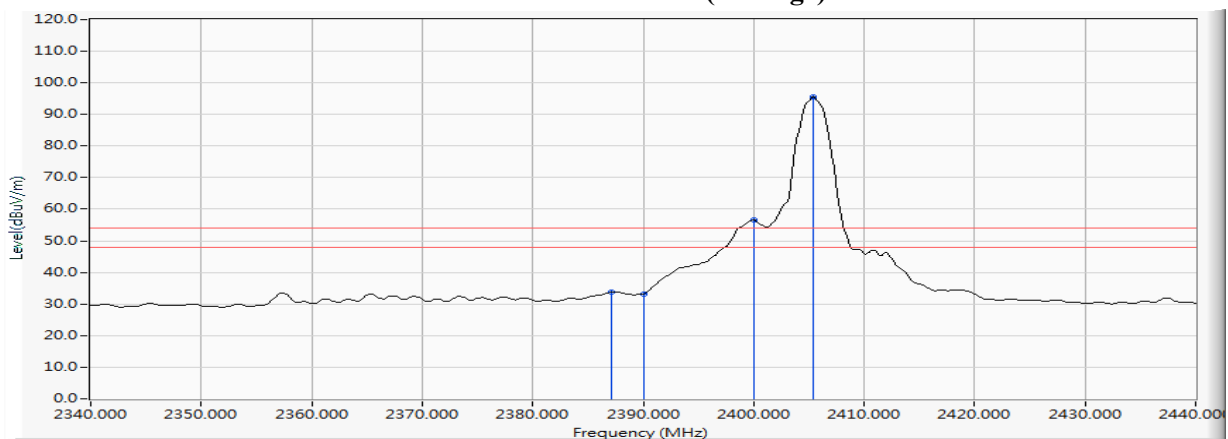



Note :

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test date : 2018/10/09
 Test Mode : Mode 1: Transmit (2405.35MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2385.362	5.901	41.185	47.085	74.00	54.00	Pass
01 (Peak)	2390.000	5.880	39.749	45.630	74.00	54.00	Pass
01 (Peak)	2400.000	5.879	50.750	56.629	--	--	Pass
01 (Peak)	2405.652	5.893	83.481	89.375	--	--	--
01 (Average)	2390.000	5.880	24.124	30.005	74.00	54.00	Pass
01 (Average)	2400.000	5.879	43.590	49.469	--	--	Pass
01 (Average)	2405.362	5.893	82.561	88.454	--	--	--

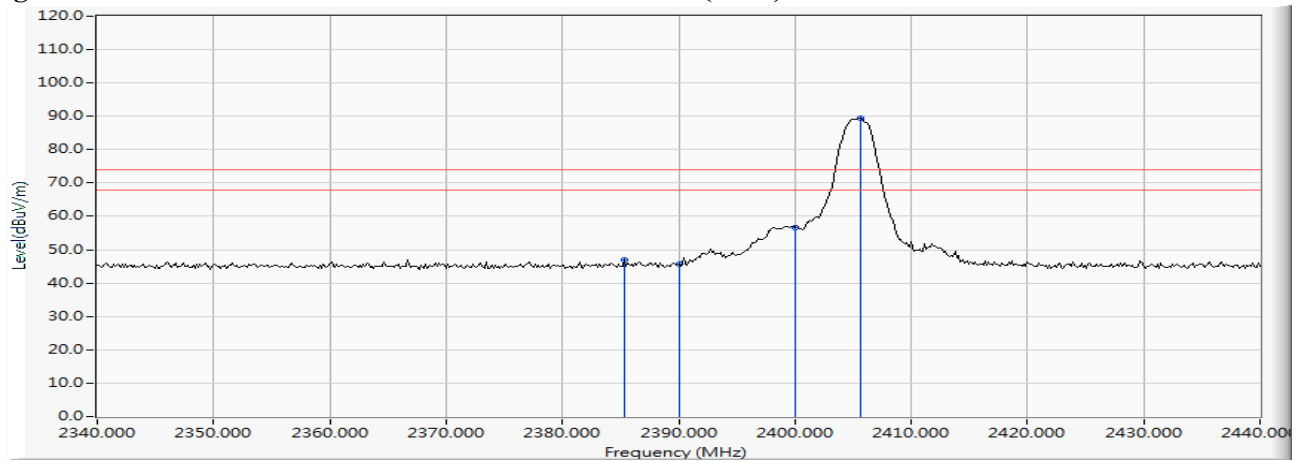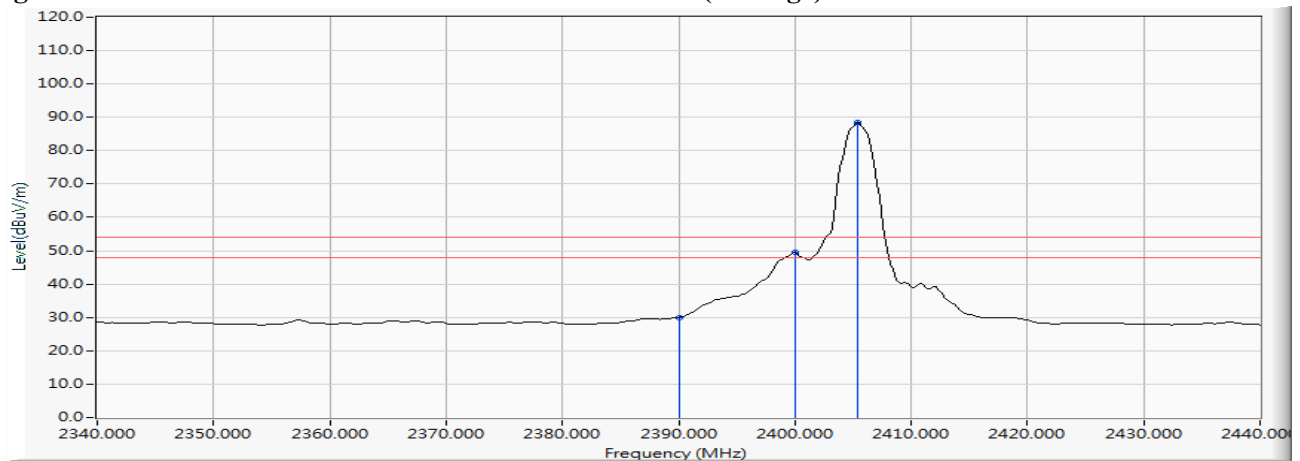Figure Channel 01:
Vertical (Peak)

Figure Channel 01:
Vertical (Average)


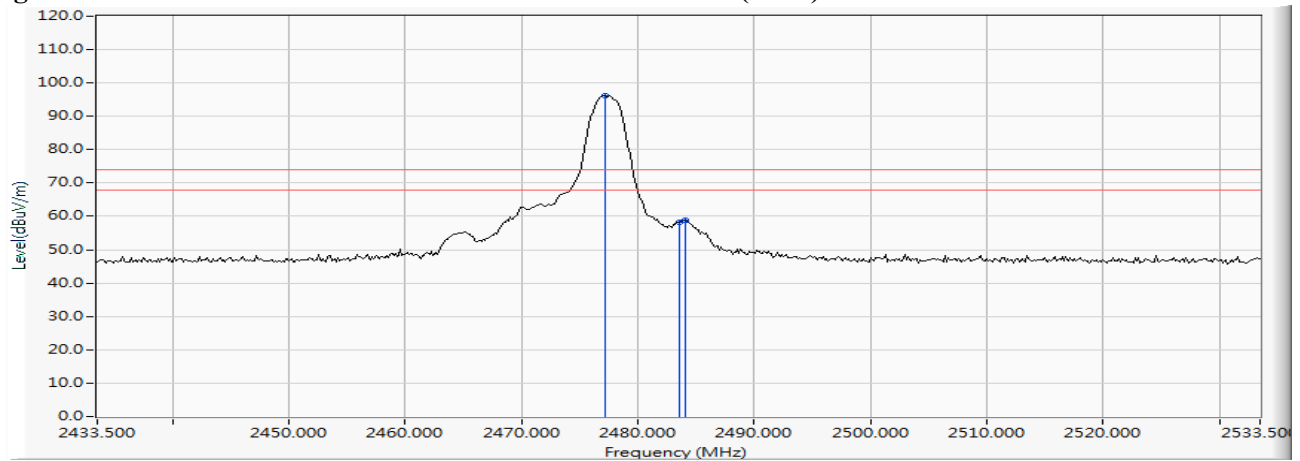
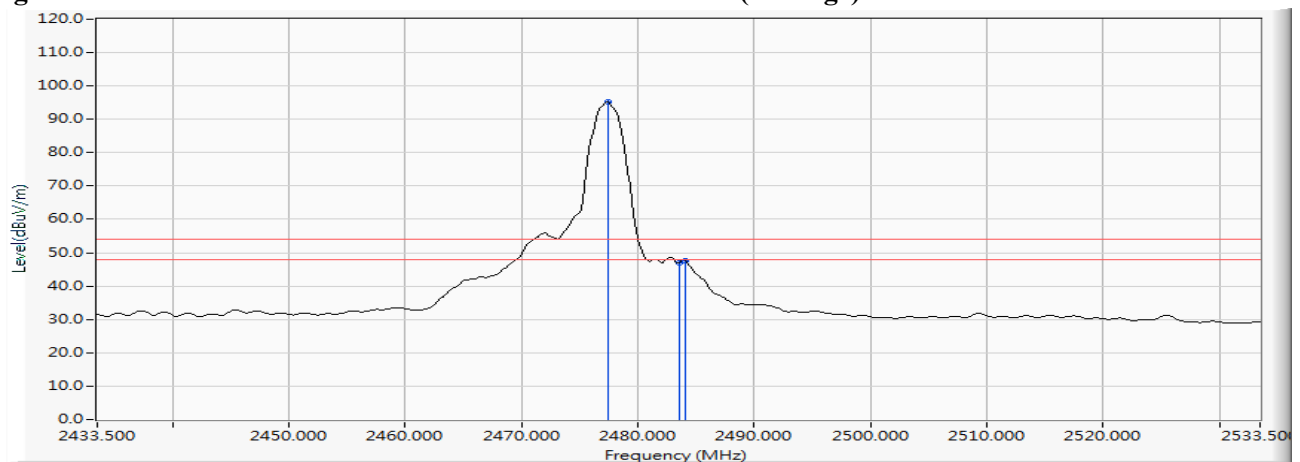
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test date : 2018/10/09
 Test Mode : Mode 1: Transmit (2477.35MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2477.123	7.065	89.029	96.094	--	--	--
39 (Peak)	2483.500	7.110	51.244	58.354	74.00	54.00	Pass
39 (Peak)	2484.080	7.114	51.672	58.786	74.00	54.00	Pass
39 (Average)	2477.413	7.067	88.187	95.254	--	--	--
39 (Average)	2483.500	7.110	39.822	46.932	74.00	54.00	Pass
39 (Average)	2484.080	7.114	40.658	47.772	74.00	54.00	Pass

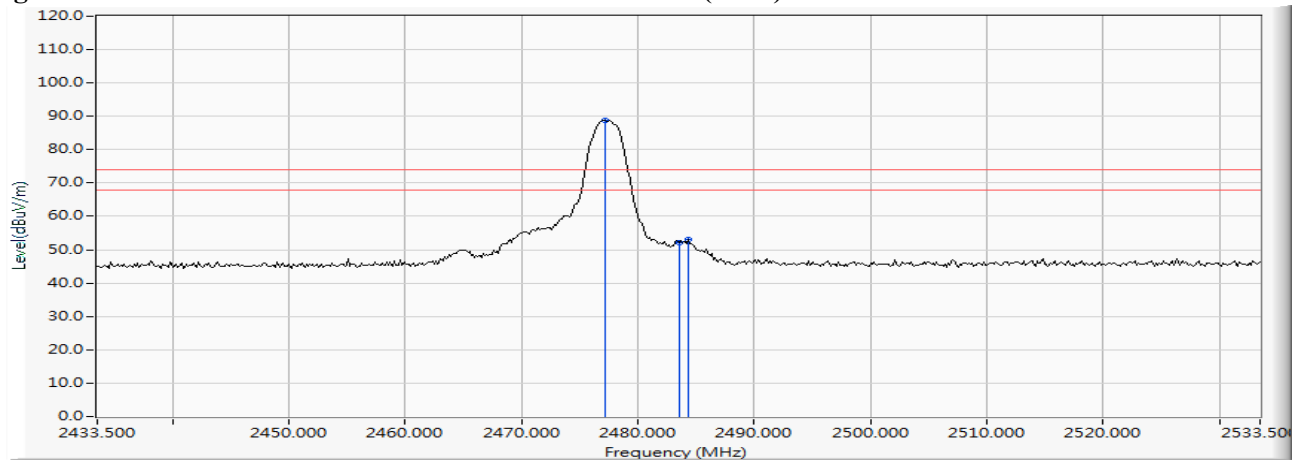
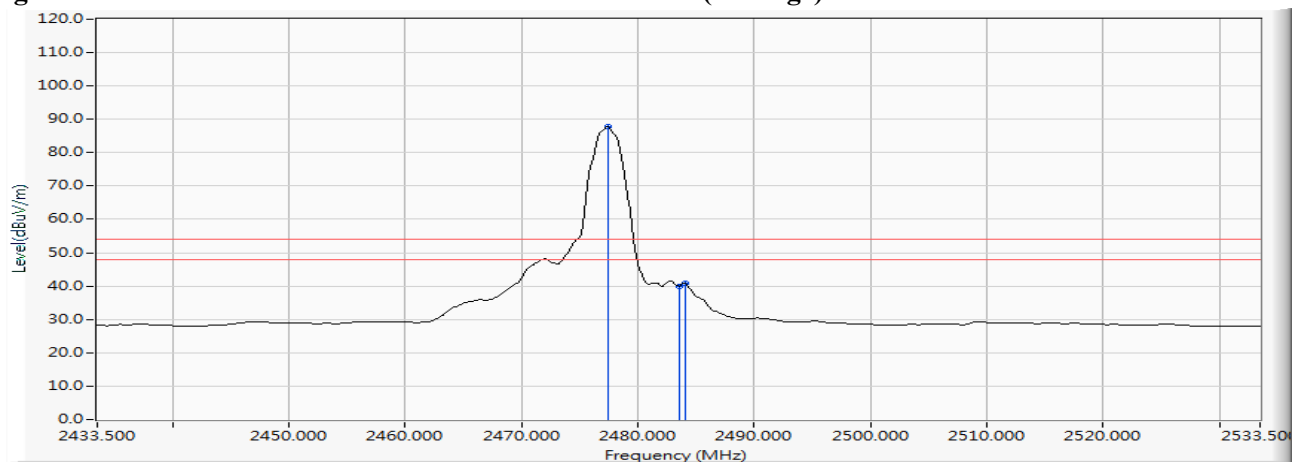
Figure Channel 39: Horizontal (Peak)

Figure Channel 39: Horizontal (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test date : 2018/10/09
 Test Mode : Mode 1: Transmit (2477.35MHz)

RF Radiated Measurement (Vertical):

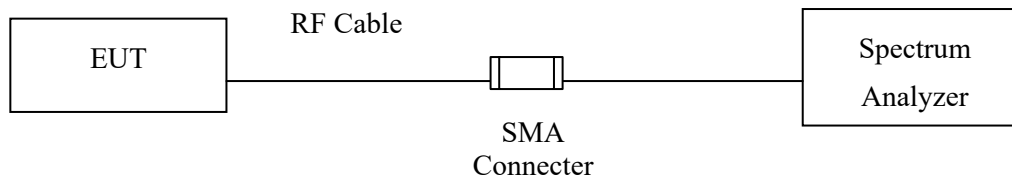
Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2477.123	6.323	82.373	88.696	--	--	--
39 (Peak)	2483.500	6.363	45.770	52.133	74.00	54.00	Pass
39 (Peak)	2484.370	6.368	46.579	52.948	74.00	54.00	Pass
39 (Average)	2477.413	6.325	81.452	87.777	--	--	--
39 (Average)	2483.500	6.363	33.551	39.914	74.00	54.00	Pass
39 (Average)	2484.080	6.367	34.451	40.818	74.00	54.00	Pass

Figure Channel 39: Vertical (Peak)

Figure Channel 39: Vertical (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

7. Occupied Bandwidth

7.1. Test Setup



7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 * RBW$

7.4. Uncertainty


$\pm 283\text{Hz}$

7.5. Test Result of Occupied Bandwidth

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2405.35	1640	>500	Pass

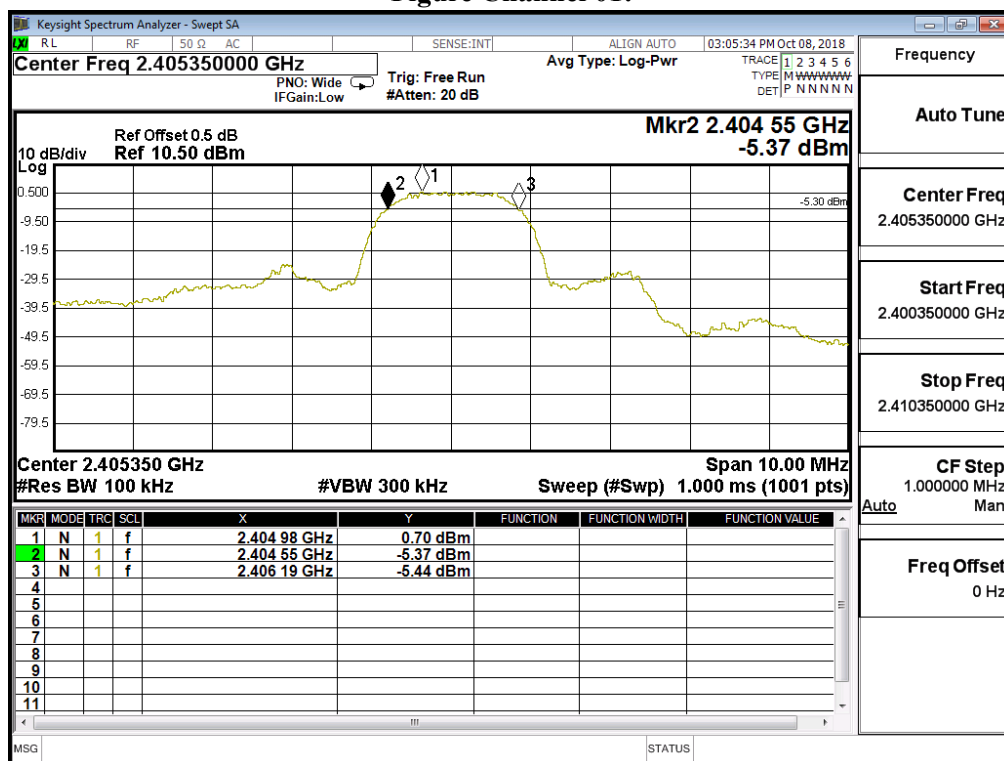
Figure Channel 01:



Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2441.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
19	2441.35	1700	>500	Pass

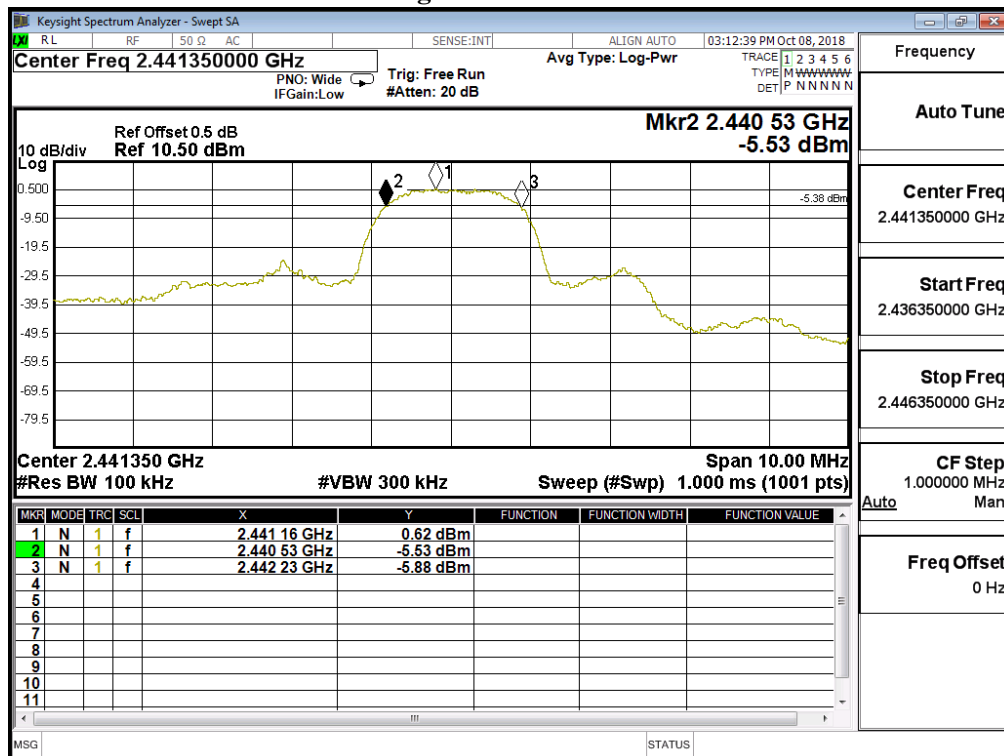
Figure Channel 19:



Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2477.35MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
37	2477.35	1670	>500	Pass

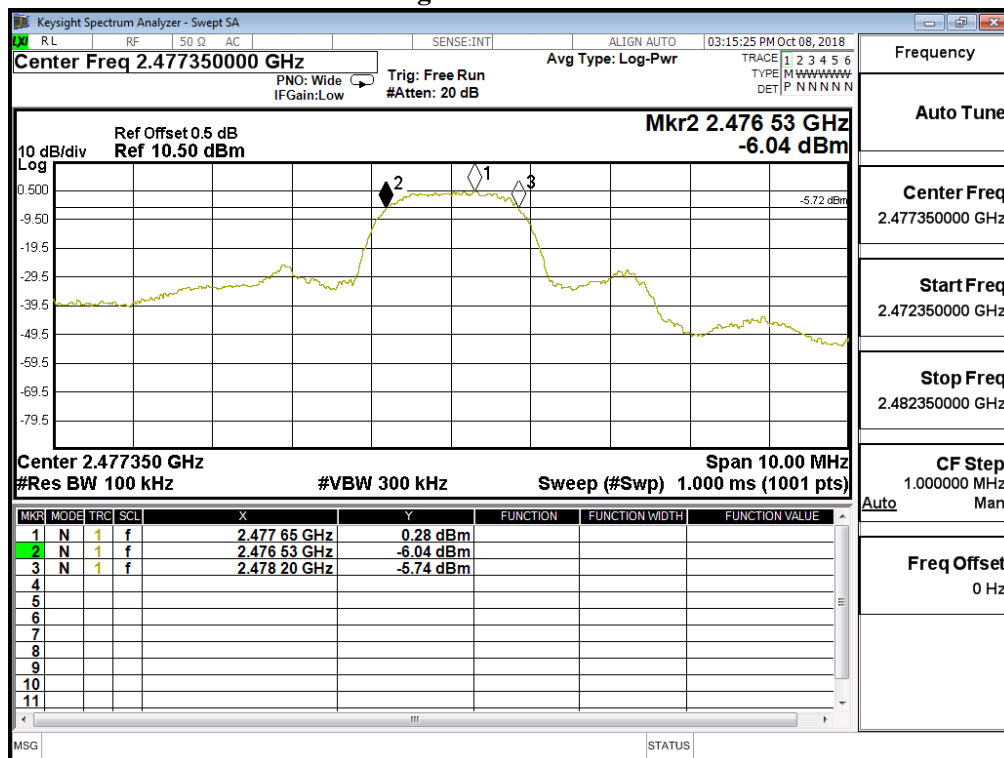Figure Channel 37:



8. Power Density

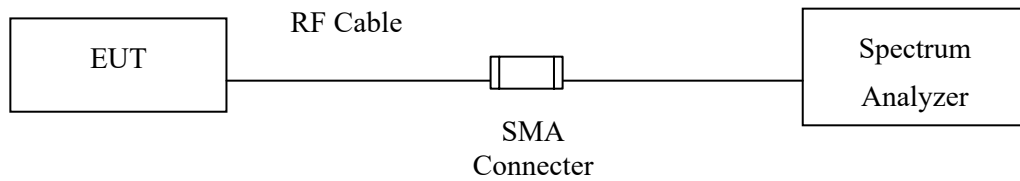8.1. Test Setup



8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013, the maximum power spectral density using KDB 558074 section 8.4 PKPSD (peak PSD) method.

8.4. Uncertainty


± 1.20 dB

8.5. Test Result of Power Density

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit(2405.35MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2405.35	1.14	< 8dBm	Pass

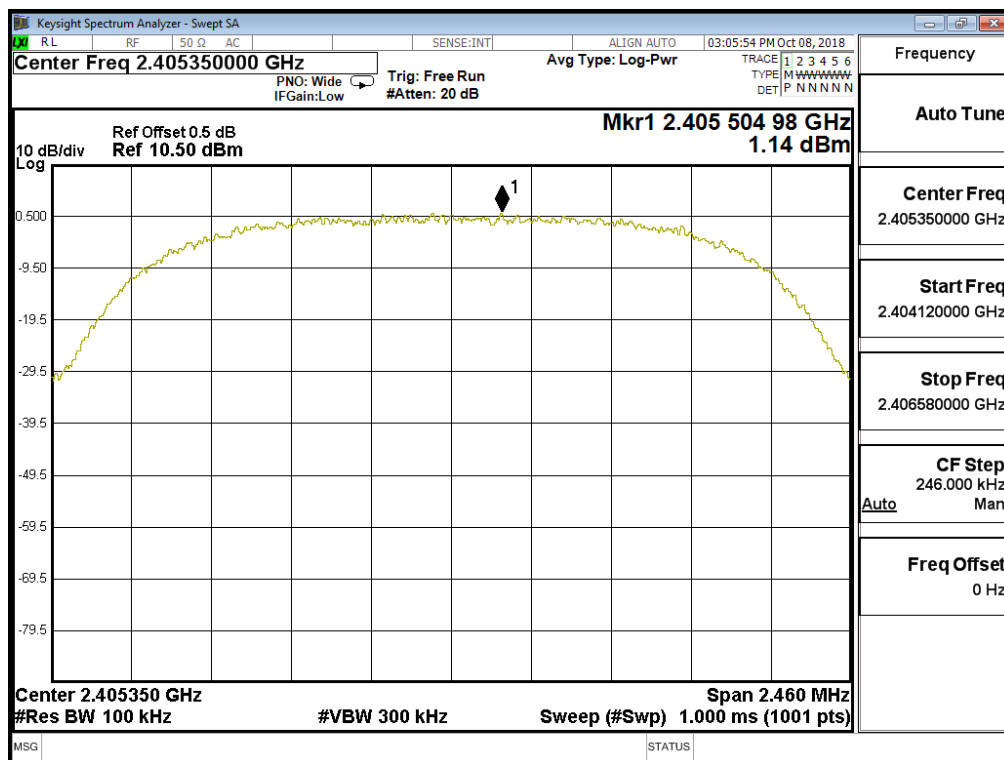
Figure Channel 01:



Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (2441.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
19	2441.35	0.78	< 8dBm	Pass

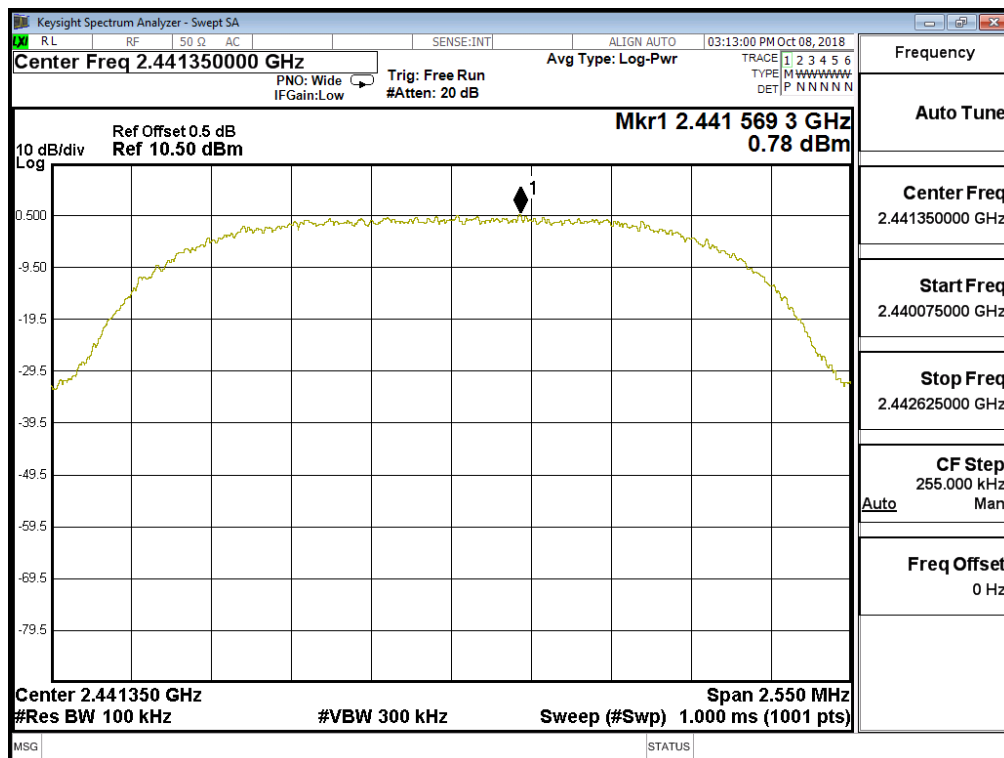
Figure Channel 19:



Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2477.35MHz)


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
37	2477.35	0.37	< 8dBm	Pass

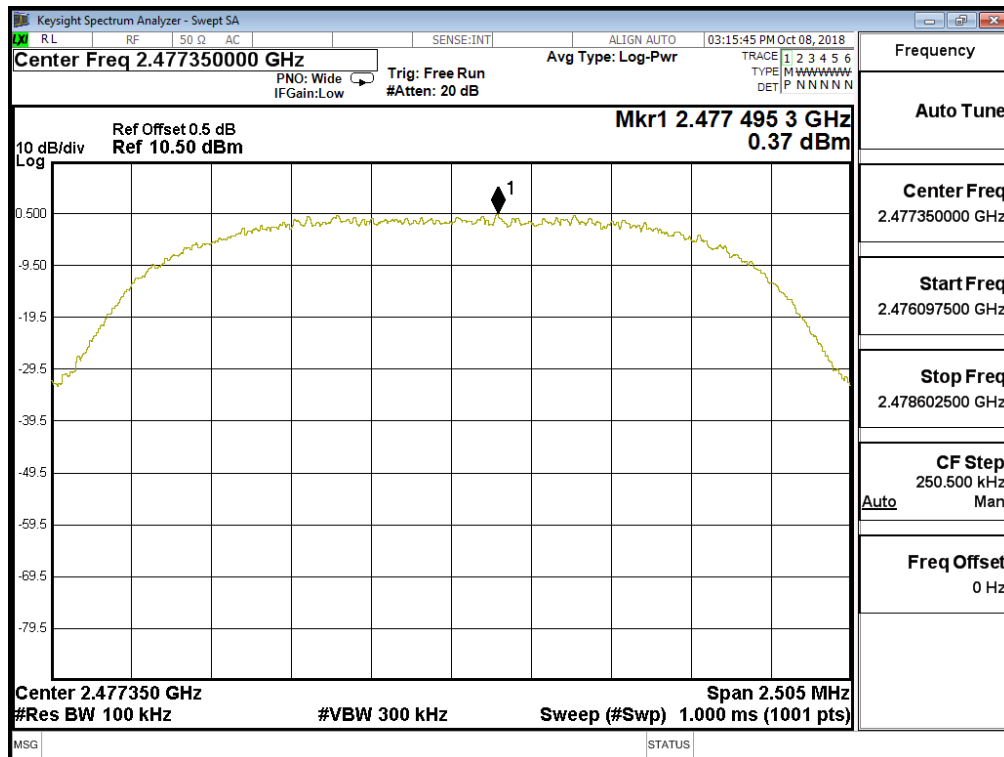Figure Channel 37:



9. Duty Cycle

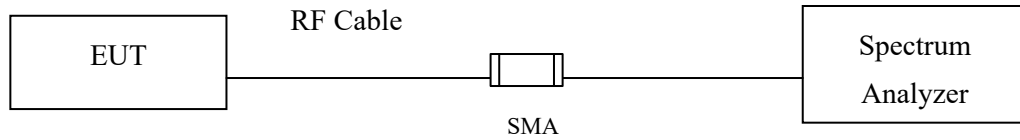9.1. Test Setup



9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

9.3. Uncertainty

$\pm 2.31\text{msec}$

9.4. Test Result of Duty Cycle

Product : LVL50 Wireless Stereo Headset for PS4
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit


Duty Cycle Formula:

Duty Cycle = $\text{Ton} / (\text{Ton} + \text{Toff})$

Duty Factor = $10 \text{ Log} (1/\text{Duty Cycle})$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
Pi/4 DQPSK	--	--	100	0

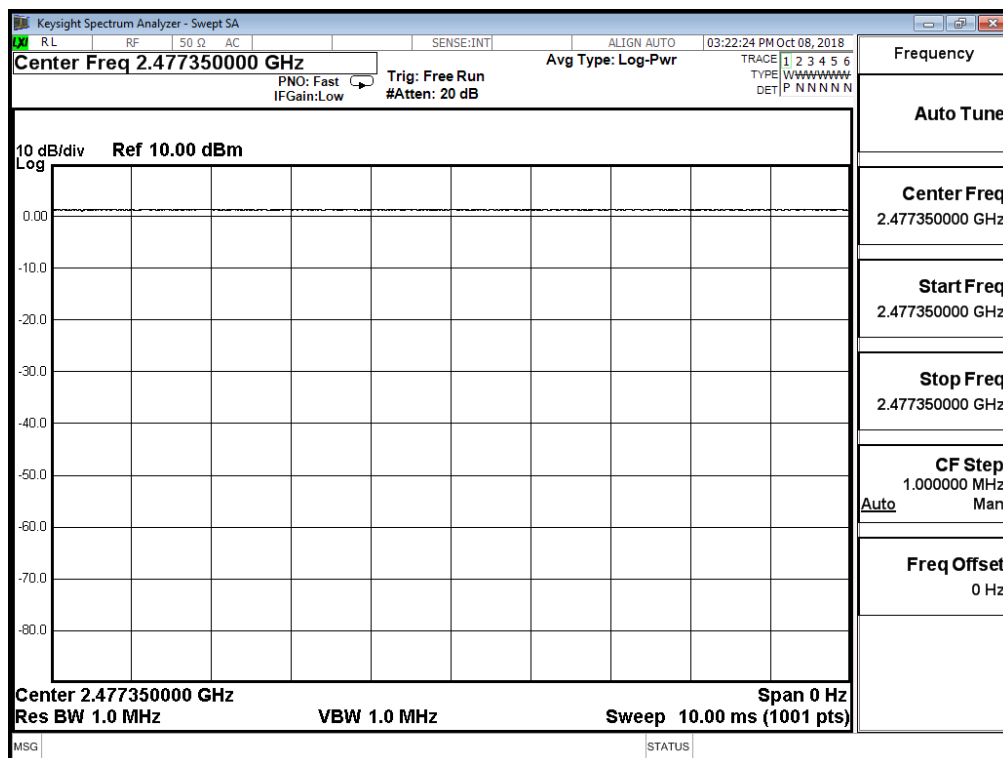

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.