

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM150800482503 Page: 1 of 52

FCC REPORT

Application No:	SZEM1508004825CR
Applicant:	Creative Labs Inc.
Manufacturer:	CREATIVE LABS PTE. LTD.
Product Name:	CREATIVE T15 WIRELESS
Model No.(EUT):	MF1671
Trade Mark:	Creative
FCC ID:	IBAMF1671
Standards:	47 CFR Part 15, Subpart C (2014)
Date of Receipt:	2015-08-10
Date of Test:	2015-08-13 to 2015-08-20
Date of Issue:	2015-08-25
Test Result:	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150800482503 Page: 2 of 52

2 Version

Revision Record					
Version	Chapter	Date	Modifier	Remark	
00		2014-08-25		Original	

Authorized for issue by:		
Tested By	Eric Fu (Eric Fu) /Project Engineer	2015-08-20
Prepared By	Joyce Shi (Joyce Shi) /Clerk	2015-08-25
Checked By	Owen Zhou	2015-08-25
	(Owen Zhou) /Reviewer	Date

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 3 of 52

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2009	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2009	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2009	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 4 of 52

4 Contents

Page

1	CC	OVER PAGE	1
2	VE	ERSION	2
3	ТЕ	EST SUMMARY	
4	С	ONTENTS	
5	GI	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5 5.6	TEST LOCATION TEST FACILITY	
	5.0 5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	
6	TE	EST RESULTS AND MEASUREMENT DATA	
	6.1	ANTENNA REQUIREMENT	
	6.1 6.2	Antenna Requirement Conducted Emissions	
	6.2 6.3	Conducted Emissions Conducted Peak Output Power	
	6.2 6.3 6.4	Conducted Emissions Conducted Peak Output Power 6dB Occupy Bandwidth	
	6.2 6.3 6.4 6.5	Conducted Emissions Conducted Peak Output Power 6dB Occupy Bandwidth Power Spectral Density	
	 6.2 6.3 6.4 6.5 6.6 	Conducted Emissions Conducted Peak Output Power 6dB Occupy Bandwidth Power Spectral Density Band-edge for RF Conducted Emissions	
	 6.2 6.3 6.4 6.5 6.6 6.7 	Conducted Emissions Conducted Peak Output Power	13 17 20 23 26 28
	 6.2 6.3 6.4 6.5 6.6 6.7 6.8 	Conducted Emissions Conducted Peak Output Power	
	 6.2 6.3 6.4 6.5 6.6 6.7 6.8 	Conducted Emissions Conducted Peak Output Power	13 17 20 23 23 26 28 34 34 34
7	6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9	CONDUCTED EMISSIONS CONDUCTED PEAK OUTPUT POWER 6DB OCCUPY BANDWIDTH POWER SPECTRAL DENSITY BAND-EDGE FOR RF CONDUCTED EMISSIONS SPURIOUS RF CONDUCTED EMISSIONS RADIATED SPURIOUS EMISSION 8.1 Spurious Emissions	13 17 20 23 26 28 28 34 34 41
7	6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9	Conducted Emissions Conducted Peak Output Power 6dB Occupy Bandwidth Power Spectral Density Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Radiated Spurious Emission 8.1 Spurious Emissions Restricted Bands around fundamental frequency	13 17 20 23 26 28 34 34 34 41 51
7	6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9 PH	CONDUCTED EMISSIONS CONDUCTED PEAK OUTPUT POWER 6DB OCCUPY BANDWIDTH POWER SPECTRAL DENSITY BAND-EDGE FOR RF CONDUCTED EMISSIONS SPURIOUS RF CONDUCTED EMISSIONS RADIATED SPURIOUS EMISSION 8.1 Spurious Emissions RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY HOTOGRAPHS - EUT TEST SETUP	13 17 20 23 26 28 34 34 34 51
7	6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9 PH 7.1	CONDUCTED EMISSIONS CONDUCTED PEAK OUTPUT POWER 6DB OCCUPY BANDWIDTH POWER SPECTRAL DENSITY BAND-EDGE FOR RF CONDUCTED EMISSIONS SPURIOUS RF CONDUCTED EMISSIONS RADIATED SPURIOUS EMISSION 8.1 Spurious Emissions RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY HOTOGRAPHS - EUT TEST SETUP CONDUCTED EMISSION	13 17 20 23 26 28 34 34 34 51 51



5 General Information

5.1 Client Information

Applicant:	Creative Labs Inc.
Address of Applicant:	1901, McCarthy Boulevard, Milpitas, CA 95035, United States
Manufacturer:	CREATIVE LABS PTE. LTD.
Address of Manufacturer:	31 International Business Park, #03-01 Creative Resource, Singapore 609921

5.2 General Description of EUT

Product Name:	CREATIVE T15 WIRELESS
Model No.:	MF1671
Trade Mark:	Creative
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.0 Dual mode
	This report is for BLE mode.
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Fixed production
Test Power Grade:	0, 50 (Class II)
Test Software of EUT:	Blue Test 3
Antenna Type:	Integral
Antenna Gain:	-0.61dBi
EUT power supply (Adapter)	Adapter 1 MODEL:GPE125-130100-Z INPUT:AC 100-240V~ 50/60Hz 0.4A OUTPUT:DC 13V 1A 13W Adapter 2 MODEL:FJ-SW1301000N INPUT:AC 100-240V~ 50/60Hz 0.6A MAX OUTPUT:DC 13V 1.0A Remark: This product have two adapters, adapter 1 and adapter 2. Pre-scan two adapters, and found the adapter 1 was the worst case, so only the data about adapter 1 had been displayed in this report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 6 of 52

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 7 of 52

5.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	55 % RH	
Atmospheric Pressure:	1010 mbar	

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM150800482503 Page: 8 of 52

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.





Report No.: SZEM150800482503 Page: 9 of 52

5.10Equipment List

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2016-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2016-05-13	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2016-05-13	
8	Coaxial Cable	SGS	N/A	SEL0025	2016-05-13	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 10 of 52

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2016-05-13
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2016-05-13

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 11 of 52

	RF connected test						
Item	Test Equipment	Manufacturer Model No.		Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24		
4	Coaxial cable	SGS	N/A	SEL0178	2016-05-13		
5	Coaxial cable	SGS	N/A	SEL0179	2016-05-13		
6	Barometer	ChangChun	DYM3	SEL0088	2016-05-13		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2016-04-25		
8	Band filter	amideon	82346	SEL0094	2016-05-13		
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24		
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2016-04-25		
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 12 of 52

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

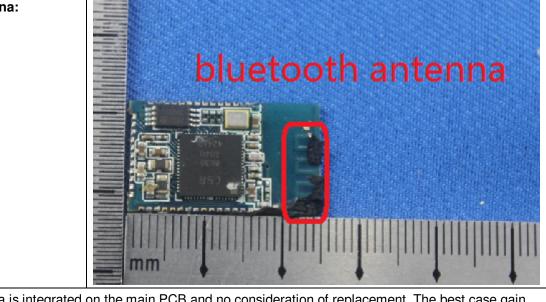

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is-0.61dBi.




Report No.: SZEM150800482503 Page: 13 of 52

Test Requirement:	47 CFR Part 15C Section 15.207						
Test Method:	ANSI C63.10: 2009						
Test Frequency Range:	150kHz to 30MHz						
Limit:		Limit (dBuV)					
	Frequency range (MHz)	Quasi-peak	Average				
	0.15-0.5	66 to 56*	56 to 46*				
	0.5-5	56	46				
	5-30	60	50				
	* Decreases with the logarithn	n of the frequency.					
Test Procedure:	 The mains terminal disturt room. 	bance voltage test was	s conducted in a shielded				
	 2) The EUT was connected to Impedance Stabilization N impedance. The power cal connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded. 3) The tabletop EUT was place ground reference plane. A placed on the horizontal gr 4) The test was performed wi of the EUT shall be 0.4 m f vertical ground reference p reference plane. The LISN unit under test and bonded mounted on top of the grou between the closest points the EUT and associated ed 5) In order to find the maximu equipment and all of the in ANSI C63.10: 2009 on cor 	etwork) which provides oles of all other units of SN 2, which was bonder are way as the LISN 1 for et outlet strip was used ISN provided the rating ced upon a non-metalling and for floor-standing ar round reference plane, th a vertical ground ref from the vertical ground ref from the vertical ground ref a vertical ground ref a vertical ground ref blane was bonded to th 1 was placed 0.8 m from to a ground reference and reference plane. The of the LISN 1 and the quipment was at least (an emission, the relative terface cables must be	s a $50\Omega/50\mu$ H + 5Ω linear f the EUT were d to the ground or the unit being d to connect multiple g of the LISN was not c table 0.8m above the rangement, the EUT was erence plane. The rear d reference plane. The re horizontal ground om the boundary of the plane for LISNs his distance was EUT. All other units of 0.8 m from the LISN 2.				

6.2 Conducted Emissions



Report No.: SZEM150800482503 Page: 14 of 52

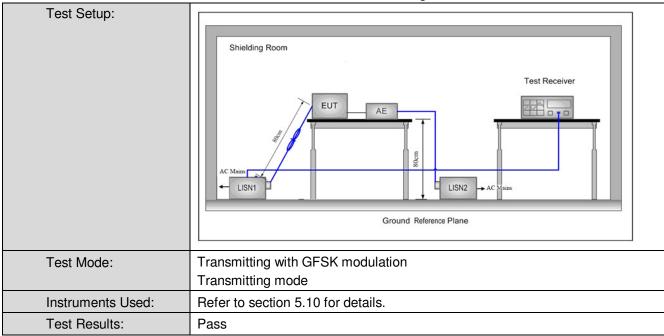

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150800482503 15 of 52 Page:

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

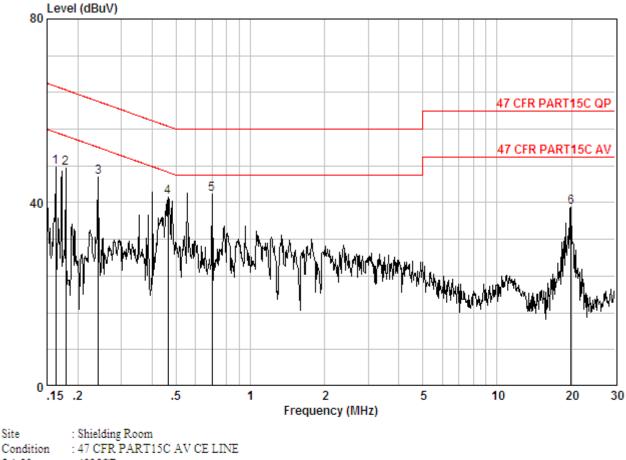

Job No. : 4825CR

Site


Test Mode: : TX

	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16241	0.02	9.82	38.00	47.84	55.34	-7.50	Peak
2	0.17866	0.02	9.83	37.59	47.44	54.55	-7.11	Peak
3	0.24165	0.02	9.84	35.69	45.54	52.04	-6.50	Peak
4	0.46367	0.01	9.86	31.26	41.13	46.63	-5.50	Peak
5	0.70096	0.02	9.88	31.97	41.87	46.00	-4.13	Peak
6	19.950	0.02	10.30	28.67	38.99	50.00	-11.01	Peak



Report No.: SZEM150800482503 Page: 16 of 52

Neutral line:

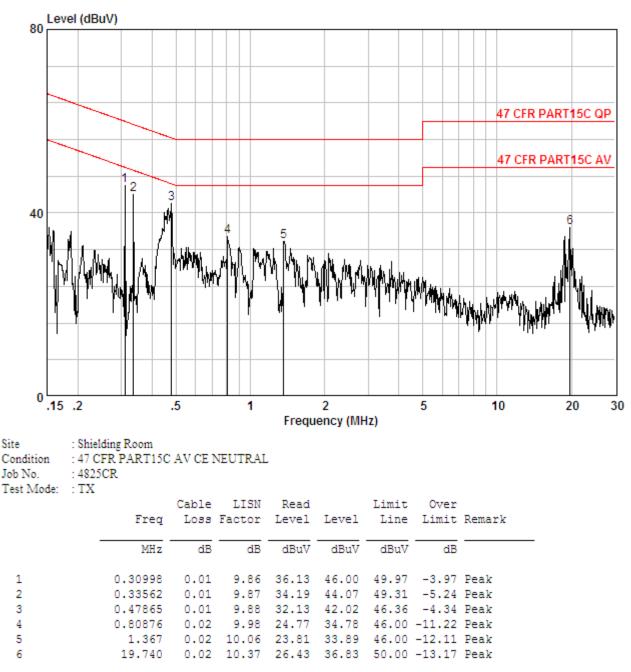

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM150800482503 Page: 17 of 52

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10 2009
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table
	Ground Reference Plane
	Remark:
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	30dBm
Test Mode:	Transmitting with GFSK modulation
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass


Measurement Data

GFSK mode						
Test channel	Test channel Peak Output Power (dBm) Limit (dBm)					
Lowest	-2.45	30.00	Pass			
Middle	0.63	30.00	Pass			
Highest	1.14	30.00	Pass			

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150800482503 Page: 18 of 52

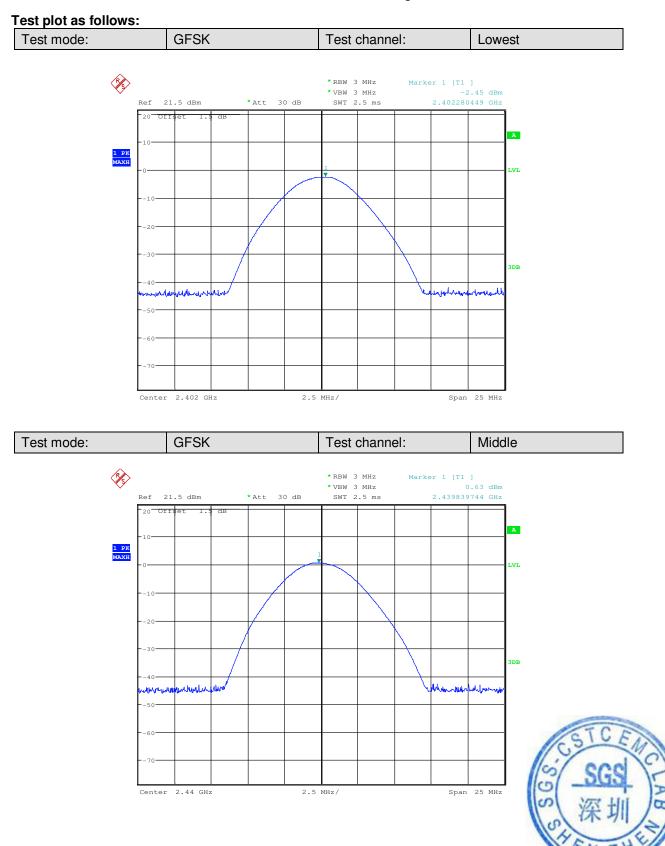



Report No.: SZEM150800482503 Page: 19 of 52

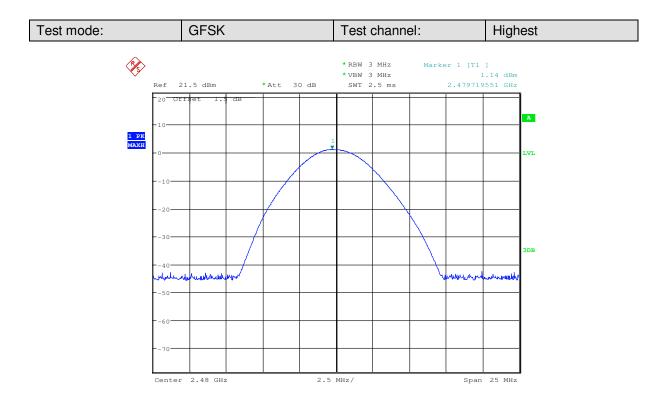



Report No.: SZEM150800482503 Page: 20 of 52

6.4 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)					
Test Method:	ANSI C63.10 2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
Limit:	≥ 500 kHz					
Test Mode:	Transmitting with GFSK modulation					
Instruments Used:	Refer to section 5.10 for details.					
Test Results:	Pass					


Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.707	≥500	Pass
Middle	0.707	≥500	Pass
Highest	0.707	≥500	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150800482503 Page: 21 of 52

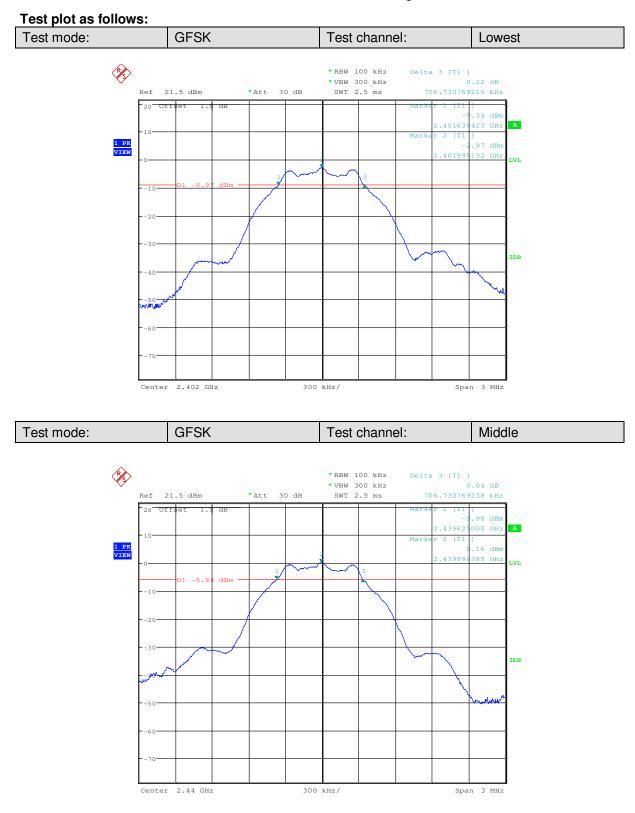



Report No.: SZEM150800482503 Page: 22 of 52

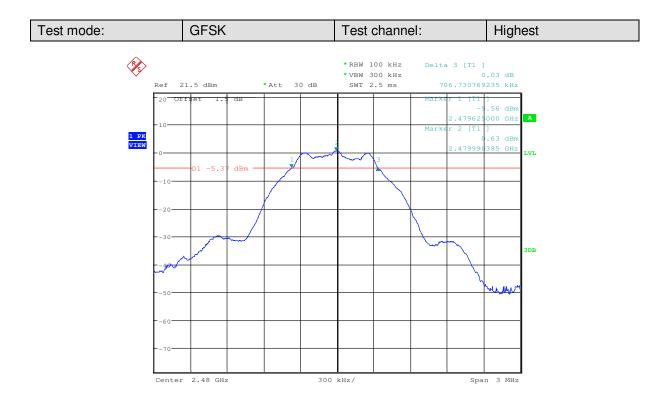



Report No.: SZEM150800482503 Page: 23 of 52

6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)					
Test Method:	ANSI C63.10 2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
Limit:	≤8.00dBm/3kHz					
Test Mode:	Transmitting with GFSK modulation					
Instruments Used:	Refer to section 5.10 for details.					
Test Results:	Pass					


Measurement Data

GFSK mode							
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result				
Lowest	-18.53	≤8.00	Pass				
Middle	-15.38	≤8.00	Pass				
Highest	-14.83	≤8.00	Pass				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150800482503 Page: 24 of 52

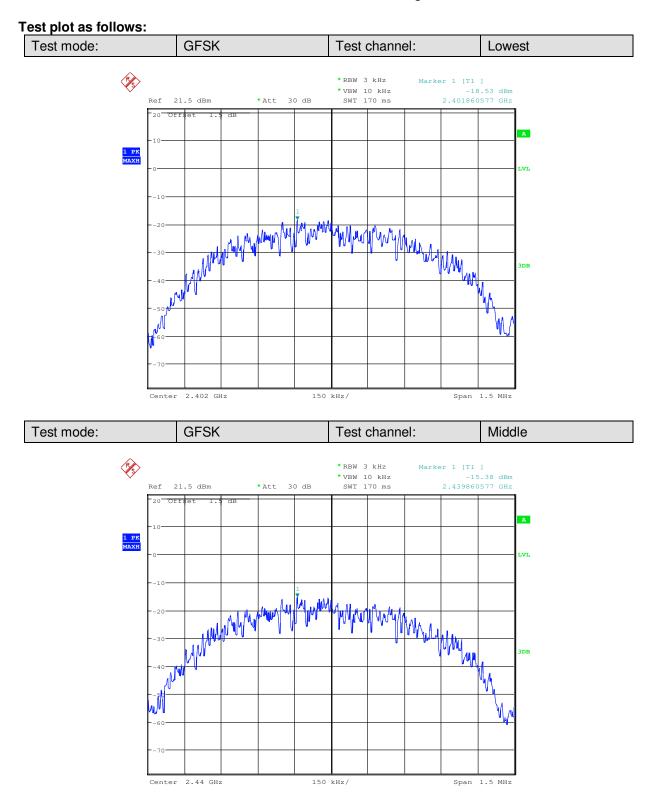



Report No.: SZEM150800482503 Page: 25 of 52

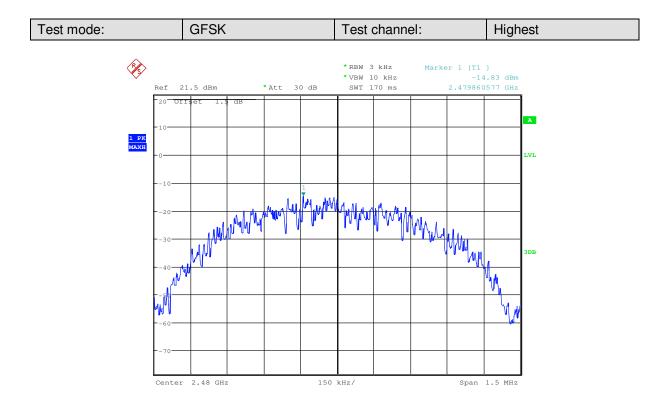



Report No.: SZEM150800482503 Page: 26 of 52


6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10 2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test Mode:	Transmitting with GFSK modulation				
Instruments Used:	Refer to section 5.10 for details.				
Test Results:	Pass				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 27 of 52

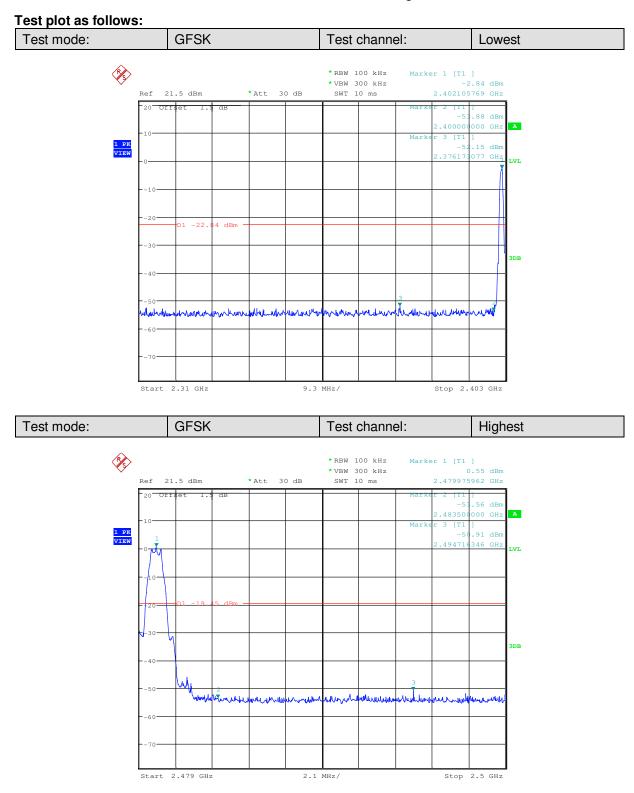



Report No.: SZEM150800482503 Page: 28 of 52


6.7 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10 2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test Mode:	Transmitting with GFSK modulation				
Instruments Used:	Refer to section 5.10 for details.				
Test Results:	Pass				






Report No.: SZEM150800482503 Page: 29 of 52

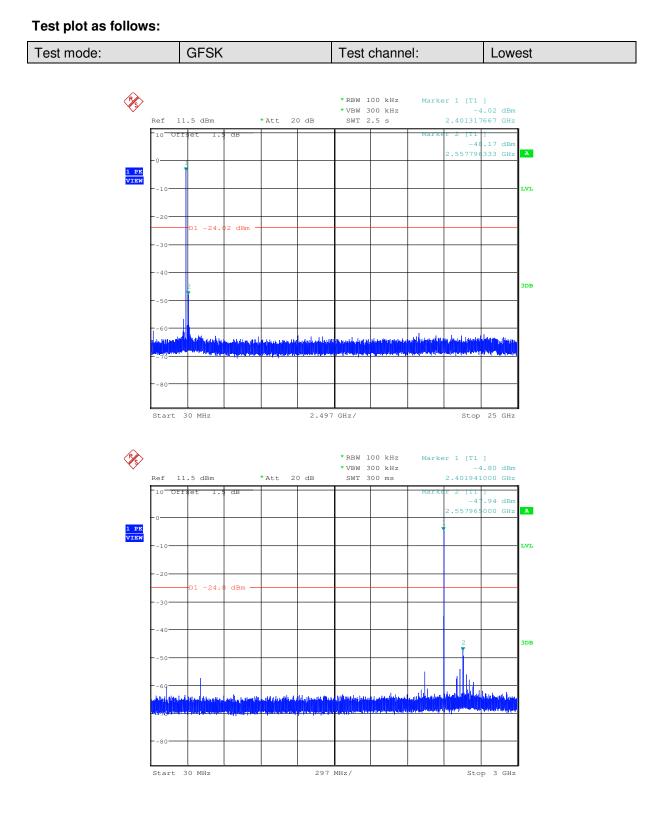




Report No.: SZEM150800482503 Page: 30 of 52

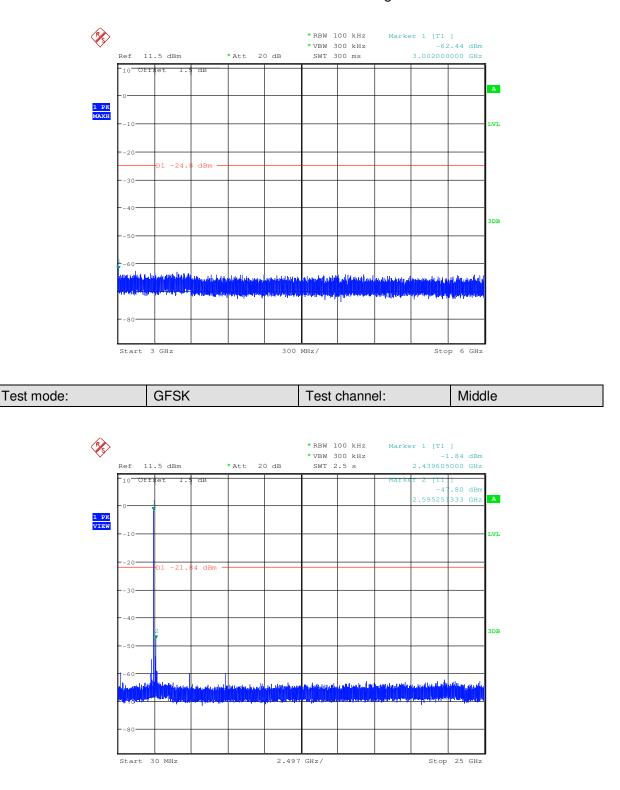




Report No.: SZEM150800482503 Page: 31 of 52

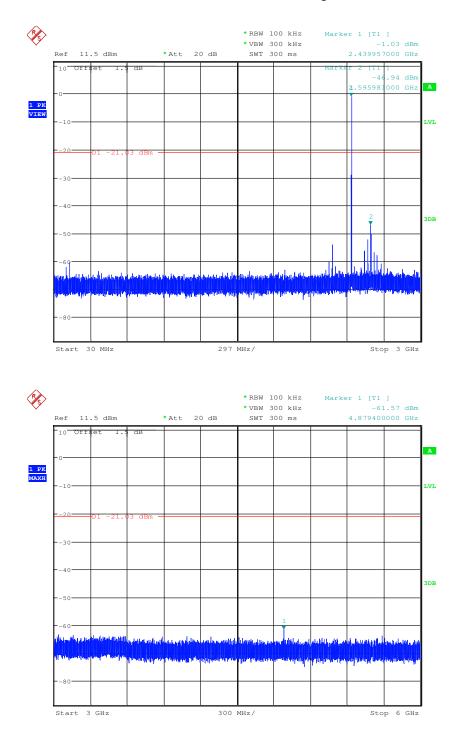




Report No.: SZEM150800482503 Page: 32 of 52

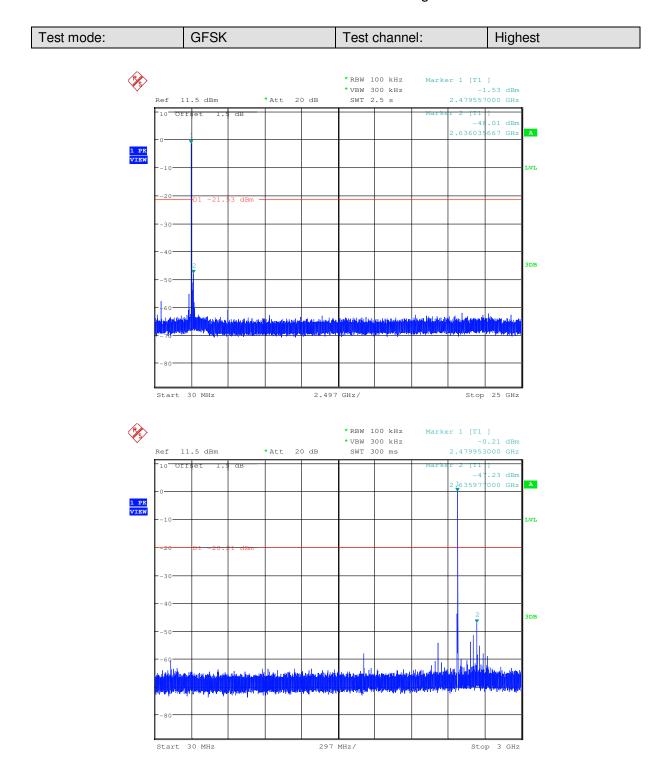



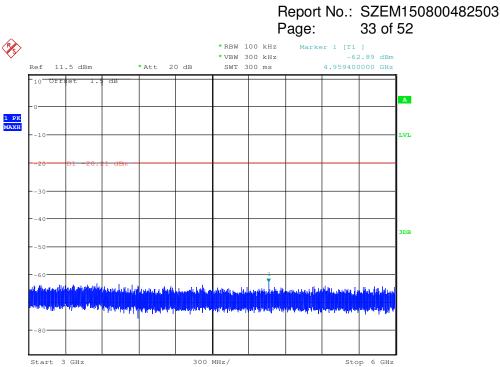

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 34 of 52

6.8 Radiated Spurious Emission

6.8.1 Spurious Emissions									
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency		Detector	RBW		VBW	Remark		
	0.009MHz-0.090MH	z	Peak	10kHz	Z	30kHz	Peak		
	0.009MHz-0.090MH	z	Average	10kHz	Z	30kHz	Average		
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	Z	30kHz	Quasi-peak		
	0.110MHz-0.490MH	z	Peak	10kHz	2	30kHz	Peak		
	0.110MHz-0.490MH	z	Average	10kHz	2	30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	z	30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	lz	300kHz	Quasi-peak		
	Above 1GHz		Peak	1MHz	2	3MHz	Peak		
			Peak	1MHz	2	10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)		Remark	Measureme distance (r		
	0.009MHz-0.490MHz	2	400/F(kHz)	-		-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-		30		
	1.705MHz-30MHz		30	-	-		30		
	30MHz-88MHz		100	40.0	Quasi-peak		3		
	88MHz-216MHz		150	43.5	43.5 Quasi-peak		3		
	216MHz-960MHz		200	46.0	Quasi-peak		3		
	960MHz-1GHz		500	54.0	54.0 Quasi-pe		3		
	Above 1GHz 500		500	54.0		Average	3		
	Note: 15.35(b), Unless otherwise specified, the limit on performing frequency emissions is 20dB above the maximum permitted average limit applicable to the equipment under test. This peak limit applies to peak emission level radiated by the device.						erage emissio	n	
Test Setup:									



Report No.: SZEM150800482503

		Page: 35 of 52	
AE EUT (Turntable) Ground Reference P Test Receiver	Antenna Tower	AE EUT Antenna Tower (Turntable) Test Receiver Test Receiver Test Receiver	
Figure 1. Below 30N	1Hz	Figure 2. 30MHz to 1GHz	
Horn Antenna Tower Horn Antenna Tower Antenna Tower Test Receiver Plane Test Receiver			
Figure 3. Above 1 GHz			
Test Procedure:	ground at a 3 m degrees to deterr b. The EUT was	aced on the top of a rotating table 0.8 meters above the eter semi-anechoic camber. The table was rotated 360 mine the position of the highest radiation. set 3 meters away from the interference-receiving was mounted on the top of a variable-height antenna	
	ground to deter	ght is varied from one meter to four meters above the mine the maximum value of the field strength. Both ertical polarizations of the antenna are set to make the	
	d. For each suspec and then the ante the test frequenc meter) and the		
		system was set to Peak Detect Function and Specified Maximum Hold Mode.	
	f. If the emission le limit specified, th EUT would be re margin would b average method	evel of the EUT in peak mode was 10dB lower than the en testing could be stopped and the peak values of the ported. Otherwise the emissions that did not have 10dB e re-tested one by one using peak, quasi-peak or as specified and then reported in a data sheet.	
	(2440MHz),the H	n the lowest channel (2402MHz),the middle channel lighest channel (2480MHz) easurements are performed in X, Y, Z axis positioning	
		mode, and found the X axis positioning which it is the	



Report No.: SZEM150800482503 Page: 36 of 52


	worst case.	
	i. Repeat above procedures until all frequencies measured was complete.	
Exploratory Test Mode:	Transmitting with GFSK modulation Transmitting mode	
Final Test Mode:	Transmitting with GFSK modulation Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 37 of 52

Radiated Emission below	1GHz	
30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

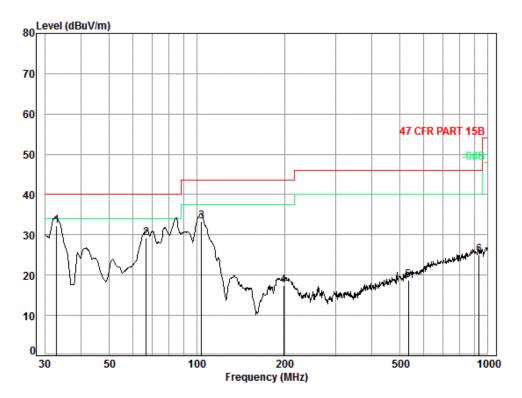


Condition: 47 CFR PART 15B 3m 3142C Vertical Job No. : 4825CR Test mode:

	Freq	Cable Loss		Preamp Factor		Level		Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	32.86	0.60	17.10	27.35	41.97	32.32	40.00	-7.68
2	66.97	0.80	6.99	27.25	48.77	29.31	40.00	-10.69
3	103.81	1.21	8.91	27.17	50.45	33.40	43.50	-10.10
4	198.59	1.40	10.19	26.70	32.60	17.49	43.50	-26.01
5	533.83	2.64	18.64	27.64	25.13	18.77	46.00	-27.23
6	935.55	3.64	23.30	26.61	24.71	25.04	46.00	-20.96



Report No.: SZEM150800482503 Page: 38 of 52

Test mode:	Transmitting	Horizontal	
------------	--------------	------------	--

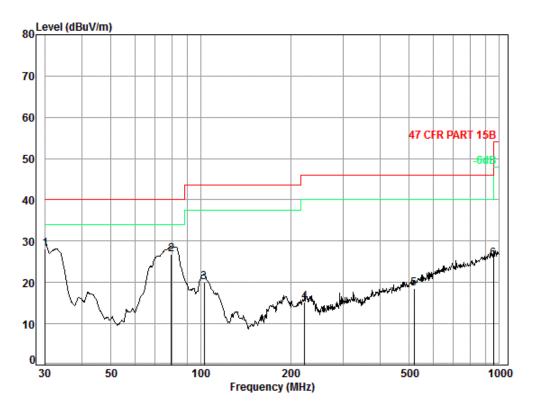

Condition: 47 CFR PART 15B 3m 3142C Horizontal Job No. : 4825CR Test mode:

	Freq	Cable Loss		Preamp Factor		Level		Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5	30.00 79.52 102.72 222.95 519.06	0.60 1.08 1.21 1.53 2.62	7.66 8.96 11.39	27.36 27.23 27.18 26.62 27.67	45.24 37.04 29.04	26.75 20.03 15.34	40.00 43.50 46.00	-13.25 -23.47 -30.66
6	958.79	3.66	23.30	26.51	25.29	25.74	46.00	-20.26





Report No.: SZEM150800482503 Page: 39 of 52

					ιu	ye.	39 01 32	
Test mo	de:	GFSK	K Test channel:		Lowest Rei		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Lin (dBuV/m		Polarization
1750.702	2.83	29.89	38.40	45.49	39.81	74	-34.19	Vertical
3616.451	4.15	33.01	38.79	45.73	44.10	74	-29.90	Vertical
4804.000	4.29	34.70	39.24	44.04	43.79	74	-30.21	Vertical
7206.000	5.30	35.63	39.07	45.05	46.91	74	-27.09	Vertical
9608.000	6.52	37.33	37.93	42.48	48.40	74	-25.60	Vertical
11457.210	7.74	38.19	38.45	43.16	50.64	74	-23.36	Vertical
1814.218	2.89	30.22	38.41	46.60	41.30	74	-32.70	Horizontal
3472.118	3.89	32.86	38.73	46.95	44.97	74	-29.03	Horizontal
4804.000	4.29	34.70	39.24	44.99	44.74	74	-29.26	Horizontal
7206.000	5.30	35.63	39.07	44.97	46.83	74	-27.17	Horizontal
9608.000	6.52	37.33	37.93	42.84	48.76	74	-25.24	Horizontal
11283.550	7.60	38.13	38.36	43.52	50.89	74	-23.11	Horizontal

Test mo	de:	GFSK	Те	st channel:	Middle	Middle Remark: Peak		Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
1750.702	2.83	29.89	38.40	47.13	41.45	74	-32.55	Vertical
3653.463	4.12	33.04	38.81	46.76	45.11	74	-28.89	Vertical
4880.000	4.36	34.78	39.26	45.48	45.36	74	-28.64	Vertical
7320.000	5.21	35.51	39.06	45.25	46.91	74	-27.09	Vertical
9760.000	6.49	37.80	37.84	41.52	47.97	74	-26.03	Vertical
11399.030	7.86	38.15	38.42	44.33	51.92	74	-22.08	Vertical
1724.166	2.81	29.77	38.40	46.70	40.88	74	-33.12	Horizontal
3653.463	4.12	33.04	38.81	46.76	45.11	74	-28.89	Horizontal
4880.000	4.36	34.78	39.26	44.62	44.50	74	-29.50	Horizontal
7320.000	5.21	35.51	39.06	45.25	46.91	74	-27.09	Horizontal
9760.000	6.49	37.80	37.84	42.86	49.31	74	-24.69	Horizontal
11515.680	7.62	38.24	38.47	43.96	51.35	74	-22.65	Horizontal



Report No.: SZEM150800482503 Page: 40 of 52

Test mo	de:	GFSK	Tes	t channel:	Highes	t	Remark:		Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)		mit ιV/m)	Over limit (dB)	Polarization
1933.424	2.97	31.19	38.42	45.96	41.70	7	'4	-32.30	Vertical
3728.625	4.05	33.10	38.84	46.83	45.14	7	'4	-28.86	Vertical
4960.000	4.43	34.86	39.29	45.42	45.42	7	'4	-28.58	Vertical
7440.000	5.15	35.43	39.05	42.26	43.79	7	'4	-30.21	Vertical
9920.000	6.83	38.27	37.75	41.60	48.95	7	'4	-25.05	Vertical
11933.470	7.25	38.63	38.67	44.20	51.41	7	'4	-22.59	Vertical
1880.038	2.93	30.76	38.41	45.19	40.47	7	'4	-33.53	Horizontal
3719.146	4.06	33.09	38.84	45.15	43.46	7	'4	-30.54	Horizontal
4960.000	4.43	34.86	39.29	43.74	43.74	7	'4	-30.26	Horizontal
7440.000	5.15	35.43	39.05	43.12	44.65	7	'4	-29.35	Horizontal
9920.000	6.83	38.27	37.75	39.88	47.23	7	'4	-26.77	Horizontal
12556.750	6.82	39.24	39.17	44.50	51.39	7	'4	-22.61	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800482503 Page: 41 of 52

6.9 Restricted bands around fundamental frequency

0.9 Restricted ball		intal inequelley			
Test Requirement:	47 CFR Part 15C Section 15	5.209 and 15.205			
Test Method:	ANSI C63.10 2009				
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		
Test Setup:					
Figure 1. 30MHz to 10 Test Procedure:	 a. The EUT was place the ground at a 3 rotated 360 degree radiation. b. The EUT was set antenna, which was tower. c. The antenna height the ground to deter Both horizontal and make the measuren d. For each suspected case and then the a meters and the rota degrees to find the results of the specified Bandwidth f. Place a marker at transmit frequency emissions in the results of the results of the specified Bandwidth frequency emissions in the results of the results of the specified Bandwidth frequency emissions in the results of the results of the specified Bandwidth frequency emissions in the results of the specified Bandwidth frequency emissions frequen	d emission, the EUT was antenna was tuned to hei atable table was turned f	Ar to four meters above e of the field strength. the antenna are set to s arranged to its worst ghts from 1 meter to 4 from 0 degrees to 360 a Detect Function and le. d band closest to the Also measure any spectrum analyzer plot.		



Report No.: SZEM150800482503 Page: 42 of 52


	channelg. Test the EUT in the lowest channel , the Highest channelh. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation
	Transmitting mode
Final Test Mode:	Transmitting with GFSK modulation
	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM150800482503 Page: 43 of 52

Test plot as follows:


Test mode: GFSK Test channel: Lowest Remark: Peak Vertical							
	Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Vertical

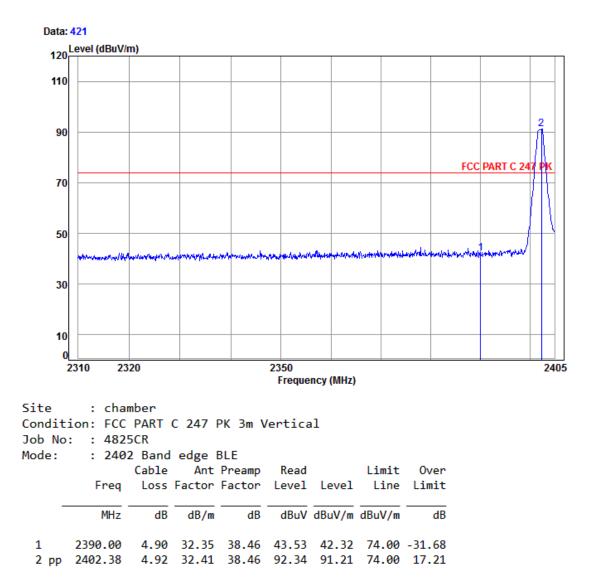



Report No.: SZEM150800482503 Page: 44 of 52


Test mode: GFSK Test channel: Lowest Rem	nark: Peak Horizontal
--	-----------------------

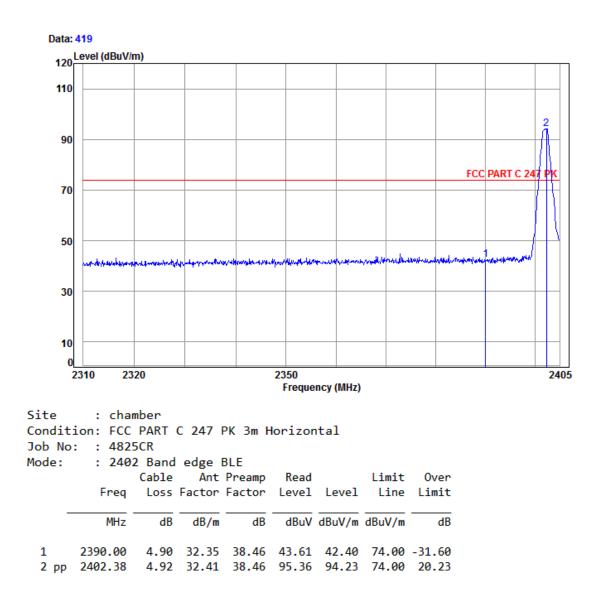



Report No.: SZEM150800482503 Page: 45 of 52


Test mode: GFSK Test channel: Lowest	Remark:	Average	Vertical
--------------------------------------	---------	---------	----------

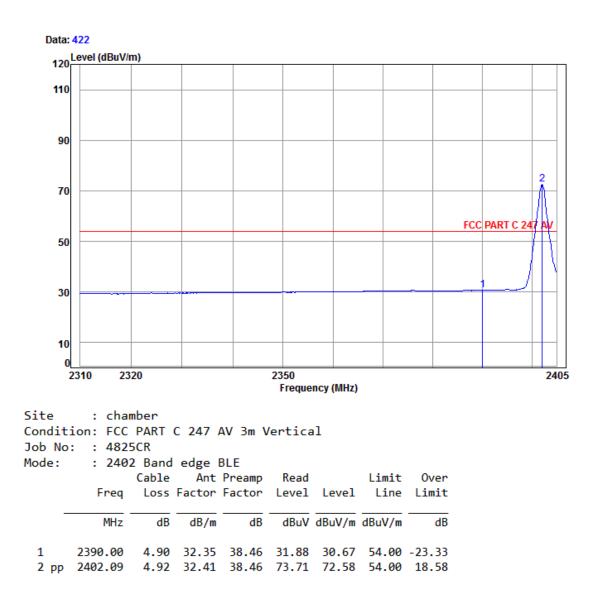



Report No.: SZEM150800482503 Page: 46 of 52


Test mode: GFSK Test channel:	Lowest	Remark:	Average	Horizontal
-------------------------------	--------	---------	---------	------------

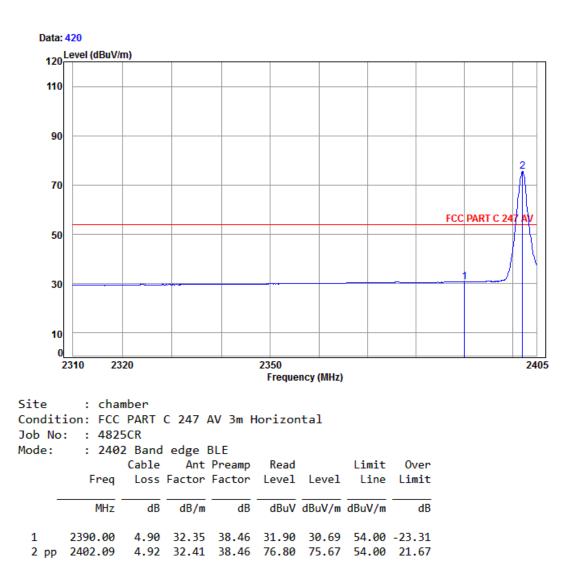



Report No.: SZEM150800482503 Page: 47 of 52


Test mode: GFSK Test channel: Highest Remark: Peak Ver	cal
--	-----

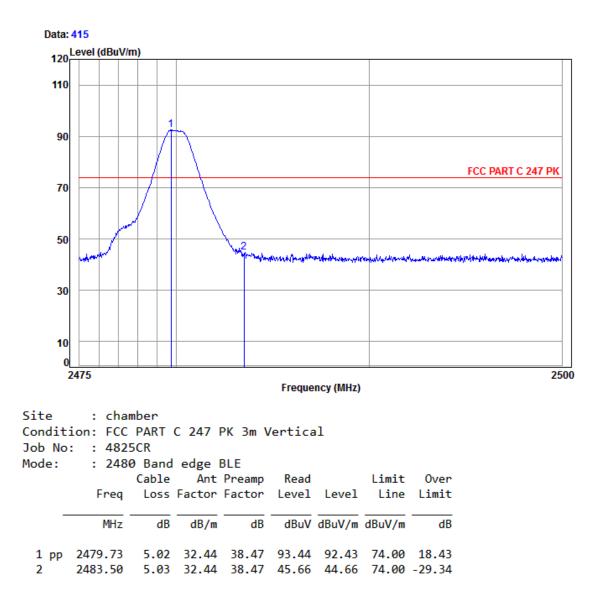



Report No.: SZEM150800482503 Page: 48 of 52

Test mode: GFSK	Test channel:	Highest	Remark:	Peak	Horizontal
-----------------	---------------	---------	---------	------	------------

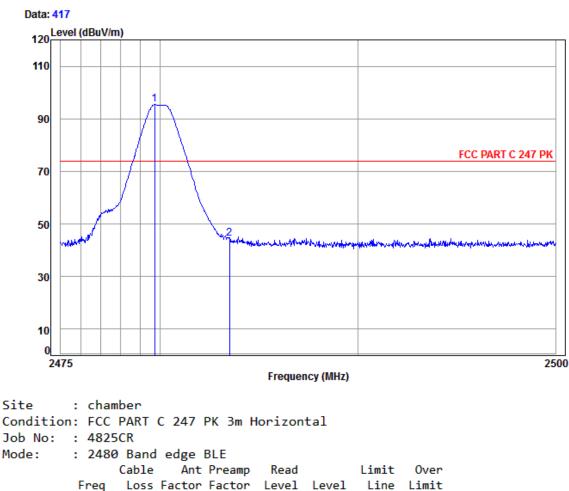


_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2479.73 2483.50							





Report No.: SZEM150800482503 Page: 49 of 52


Test mode: GFSK Test channel:	Highest	Remark:	Average	Vertical
-------------------------------	---------	---------	---------	----------

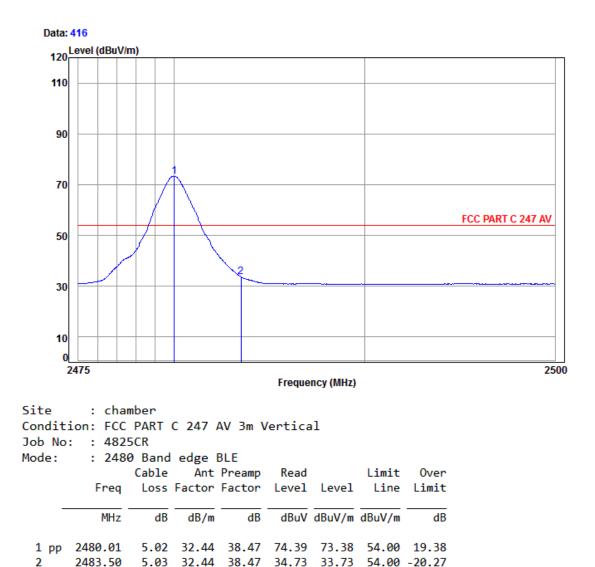



Report No.: SZEM150800482503 Page: 50 of 52

Test mode: GFSK Test channel:	Highest	Remark:	Average	Horizontal
-------------------------------	---------	---------	---------	------------

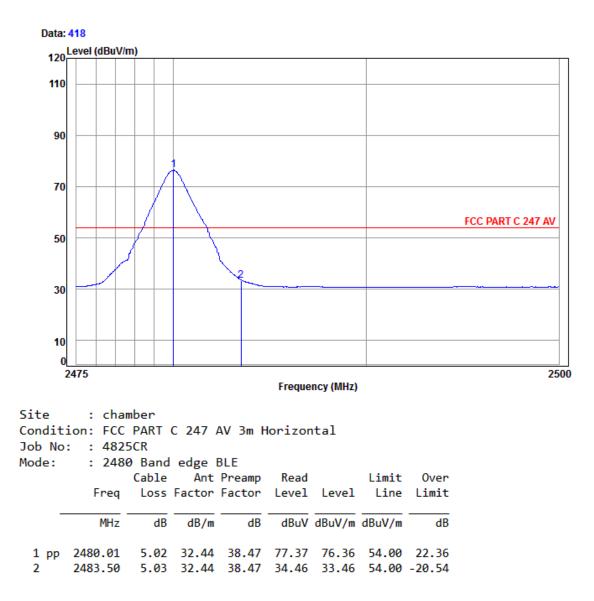

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor



Report No.: SZEM150800482503 Page: 51 of 52


7 Photographs - EUT Test Setup

Test model No.: MF1671

7.1 Conducted Emission




7.2 Radiated Emission

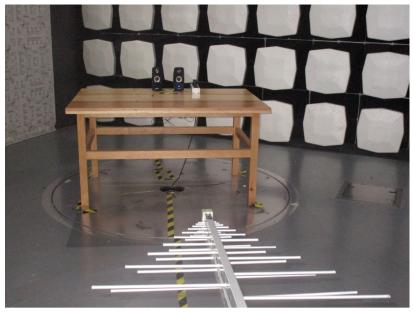



Report No.: SZEM150800482503 Page: 52 of 52

7.3 Radiated Spurious Emission

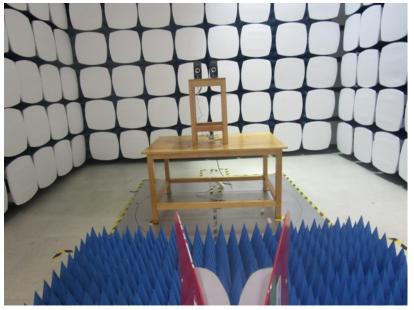

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1508004825CR.