

Prüfbericht-Nr.: <i>Test report no.:</i>	CN23PCGH 001	Auftrags-Nr.: <i>Order no.:</i>	168435042	Seite 1 von 15 Page 1 of 15
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2023-07-13	
Auftraggeber: <i>Client:</i>	Xiamen R&T Plumbing Technology Co., LTD. No.18, HouXiang Road, HaiCang District, Xiamen, 361028 Fujian, China			
Prüfgegenstand: <i>Test item:</i>	Touchless Flush Mechanism (Sensor module)			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	D7020 (Trademark: R&T)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.249 CFR47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2023-07-20	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003521309-001 A003521309-003~004			
Prüfzeitraum: <i>Testing period:</i>	2023-07-27			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: <i>Date:</i>	2023-08-03	Ausstellungsdatum: <i>Issue date:</i>		2023-08-03
Stellung / Position:		Department Manager	Stellung / Position: Reviewer	
Sonstiges / <i>Other:</i>	FCC ID: 2AW23-D7020-04			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

Prüfbericht-Nr.: CN23PCGH 001
Test report no.:

Seite 2 von 15
Page 2 of 15

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN23PCGH 001
Test Report No.:

Seite 3 von 15
Page 3 of 15

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.3 20dB AND 99% BANDWIDTH

RESULT: Pass

5.1.4 BAND EDGE

RESULT: Pass

Table of Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
4.5	TEST SETUP DIAGRAM	10
5	TEST RESULTS	11
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	11
5.1.1	<i>Antenna Requirement</i>	<i>11</i>
5.1.2	<i>Field strength of fundamental and harmonics</i>	<i>12</i>
5.1.3	<i>20dB and 99% Bandwidth</i>	<i>13</i>
5.1.4	<i>Band Edge.....</i>	<i>14</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	15
7	LIST OF TABLES.....	15

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

FCC Registration No.: 694916

IC Registration No.: 25069 and the CAB identifier is CN0078.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2024-07-25
OSP	R&S	OSP 150	101017	2023-11-21
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	2023-11-21
Wideband Power Sensor	R&S	NRP-Z81	105677	2024-07-25
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2024-07-25
Signal Analyzer	R&S	FSV 40	101439	2024-07-25
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2024-07-25
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2024-07-25
Amplifier	R&S	SCU-18F	180070	2024-07-25
Amplifier	R&S	SCU40A	100475	2024-07-25
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-08-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (K=2)
Occupied Channel Bandwidth	$\pm 2.08 \%$
RF output power, conducted	$\pm 0.99 \text{ dB}$
RF power density, conducted	$\pm 0.99 \text{ dB}$
Unwanted Emissions, conducted	$\pm 0.89 \text{ dB}$
All emissions, radiated	$\pm 4.17 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Sensor module of one of the Touchless Flush Mechanism, which operating in 2460MHz.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Touchless Flush Mechanism (Sensor module)
Type Designation:	D7020
Trademark:	R&T
FCC ID:	2AW23-D7020-04
Operating Voltage:	Internal battery operated (4.5Vdc, 3*AAA battery)
Technical Specification of 2.4GHz	
Frequency Range:	2460 MHz
Type of Modulation:	GFSK
Channel Number:	1 channel
Antenna Type:	PCB layout antenna
Antenna Gain:	-2.0 dBi (Provided by the Client)

3.3 Independent Operation Modes

The basic operation modes are:

- A. 2.4GHz transmitting mode
- B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- ID Label and Location Info
- Schematics
- Operation Description
- Block Diagram
- PCB Layout

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model D7020 (Sensor module) in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: Auxiliary Equipment Used During Test

Description	Manufacturer	Model	S/N	Rating
DC power Supply	Topward	3303D	809332	0-30 Volts, 0-3 Amps

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

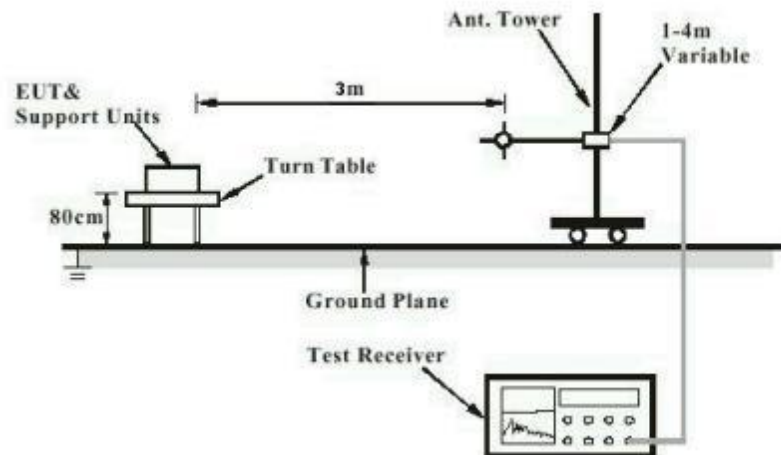


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


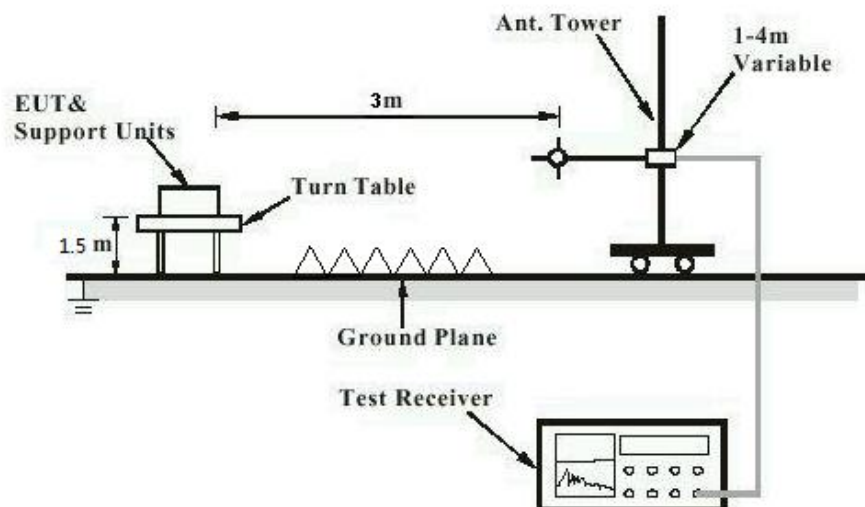


Diagram of Measurement Configuration for Conducted Transmitter Measurement

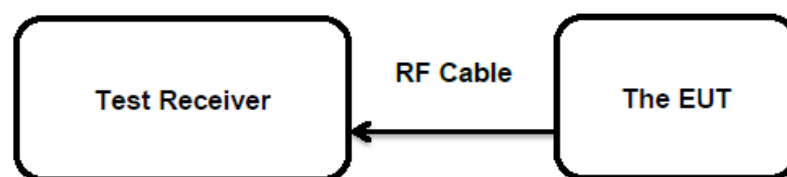

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.203

According to the manufacturer declared, the EUT has a PCB layout antenna, the gain of antenna is -2.0 dBi, which that permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: **CN23PCGH 001**
Test Report No.:Seite 12 von 15
Page 12 of 15

5.1.2 Field strength of fundamental and harmonics

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.249(a) (d) (e)
Basic standard	: ANSI C63.10: 2013
Limits	: FCC Part 15.249(a) (d) (e) & 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2023-07-27
Input voltage	: DC 4.5V
Operation mode	: A
Test channel	: 2460MHz
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23PCGH 001
Test Report No.:

Seite 13 von 15
Page 13 of 15

5.1.3 20dB and 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215
Basic standard	: ANSI C63.10: 2013
Limits	: Within assigned band
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-07-27
Input voltage	: DC 4.5V
Operation mode	: A
Test channel	: 2460MHz
Ambient temperature	: 25.1 °C
Relative humidity	: 43 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23PCGH 001
Test Report No.:

Seite 14 von 15
Page 14 of 15

5.1.4 Band Edge

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.249(a) (d) (e) & 15.209 & 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: FCC Part 15.249(a) (d) (e) & 15.209 & 15.205
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2023-07-27
Input voltage	: DC 4.5V
Operation mode	: A
Test channel	: 2460MHz
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT	8
Table 4: Auxiliary Equipment Used During Test.....	9

Appendix A: Test Results

APPENDIX A: TEST RESULTS	1
APPENDIX A.1: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL & HARMONICS	2
30MHz - 1GHz	2
1GHz - 18GHz	4
APPENDIX A.2: TEST RESULTS OF 20dB BANDWIDTH	8
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH.....	9
APPENDIX A.4: TEST RESULTS OF BAND EDGE	10


Appendix A.1: Test Results of Field Strength of Fundamental & Harmonics

Note: The testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz to 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	Touchless Flush Mechanism (Sensor module)
Model:	D7020
Test Mode:	2.4GHz transmitting mode
Order No/Sample No:	168435042/A003521309-001
Test Voltage:	DC 4.5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

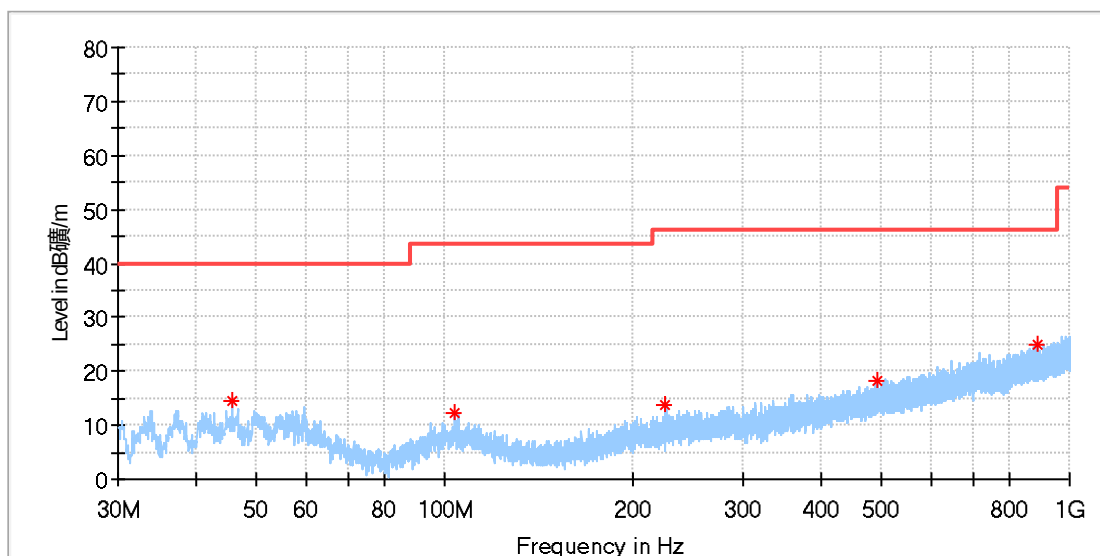

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.631923	14.60	40.00	25.40	100.0	H	168.0	-19.0
103.346923	12.22	43.50	31.28	100.0	H	265.0	-19.2
225.790769	13.63	46.00	32.37	100.0	H	337.0	-18.6
492.690000	18.16	46.00	27.84	100.0	H	9.0	-12.3
885.390769	25.10	46.00	20.90	100.0	H	0.0	-5.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Touchless Flush Mechanism (Sensor module)
Model:	D7020
Test Mode:	2.4GHz transmitting mode
Order No/Sample No:	168435042/A003521309-001
Test Voltage:	DC 4.5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

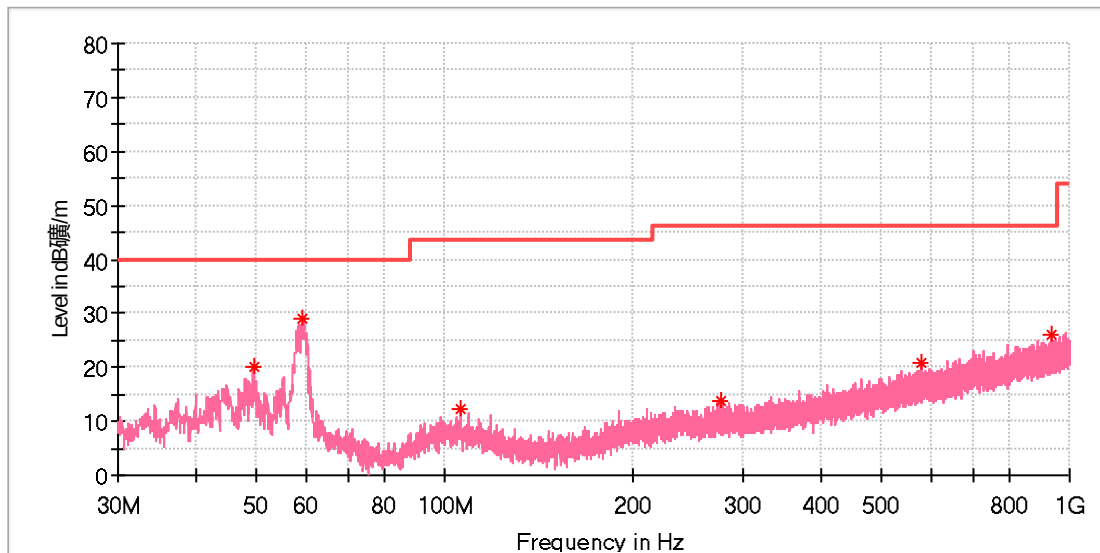

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.400000	20.05	40.00	19.95	100.0	V	317.0	-18.6
59.323846	29.15	40.00	10.85	100.0	V	142.0	-19.2
105.771923	12.36	43.50	31.14	100.0	V	111.0	-19.1
276.491923	13.78	46.00	32.22	100.0	V	0.0	-17.1
580.698846	20.98	46.00	25.02	100.0	V	193.0	-10.6
938.293077	25.93	46.00	20.07	100.0	V	342.0	-5.0

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is 2.4GHz Fundamental.

EUT Information

EUT Name:	Touchless Flush Mechanism (Sensor module)
Model:	D7020
Test Mode:	2.4GHz transmitting mode
Order No/Sample No:	168435042/A003521309-004
Test Voltage:	DC 4.5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

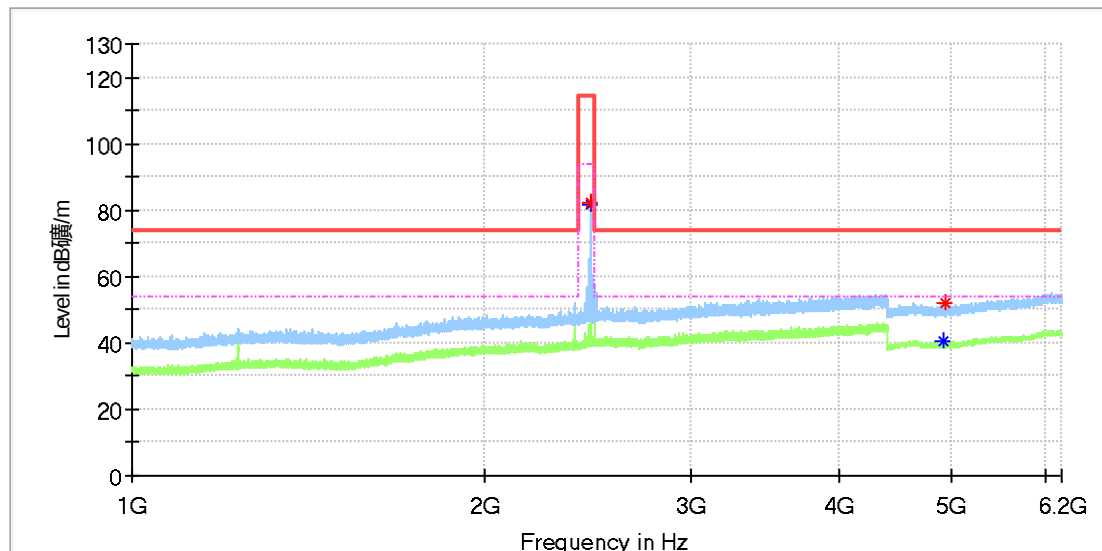

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2459.790000	82.10	---	114.00	31.90	150.0	H	138.0	7.5
2459.960000	---	81.71	94.00	12.29	150.0	H	138.0	7.5
4920.000000	---	40.74	54.00	13.26	150.0	H	26.0	11.8
4944.500000	51.71	---	74.00	22.29	150.0	H	23.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Touchless Flush Mechanism (Sensor module)
Model: D7020
Test Mode: 2.4GHz transmitting mode
Order No/Sample No: 168435042/A003521309-004
Test Voltage: DC 4.5V
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

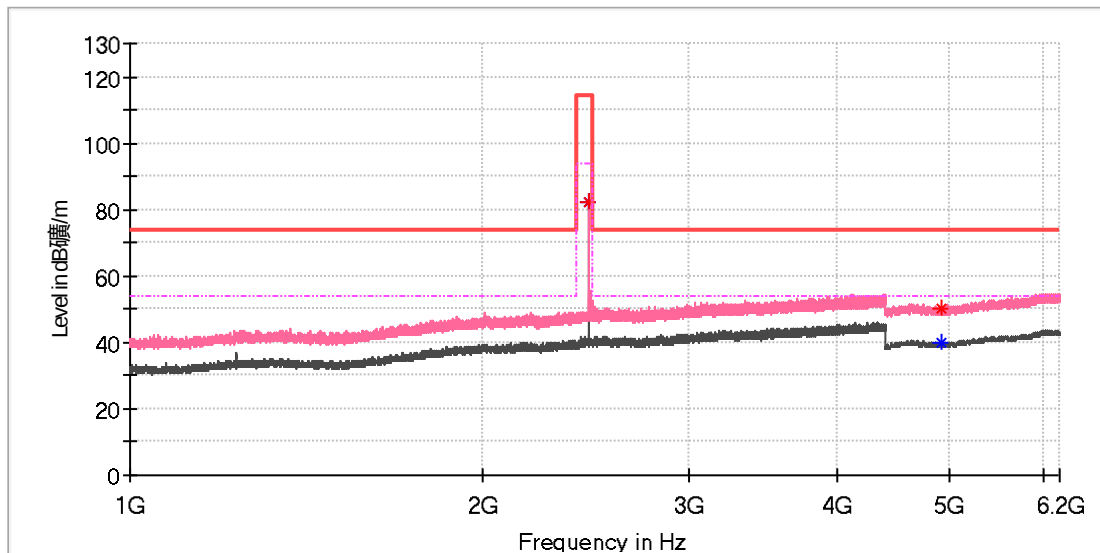

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2459.790000	---	81.99	94.00	12.01	150.0	V	358.0	7.5
2460.130000	82.32	---	114.00	31.68	150.0	V	358.0	7.5
4916.000000	50.36	---	74.00	23.64	150.0	V	262.0	11.8
4918.000000	---	39.68	54.00	14.32	150.0	V	64.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Touchless Flush Mechanism (Sensor module)
Model: D7020
Test Mode: 2.4GHz transmitting mode
Order No/Sample No: 168435042/A003521309-004
Test Voltage: DC 4.5V
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

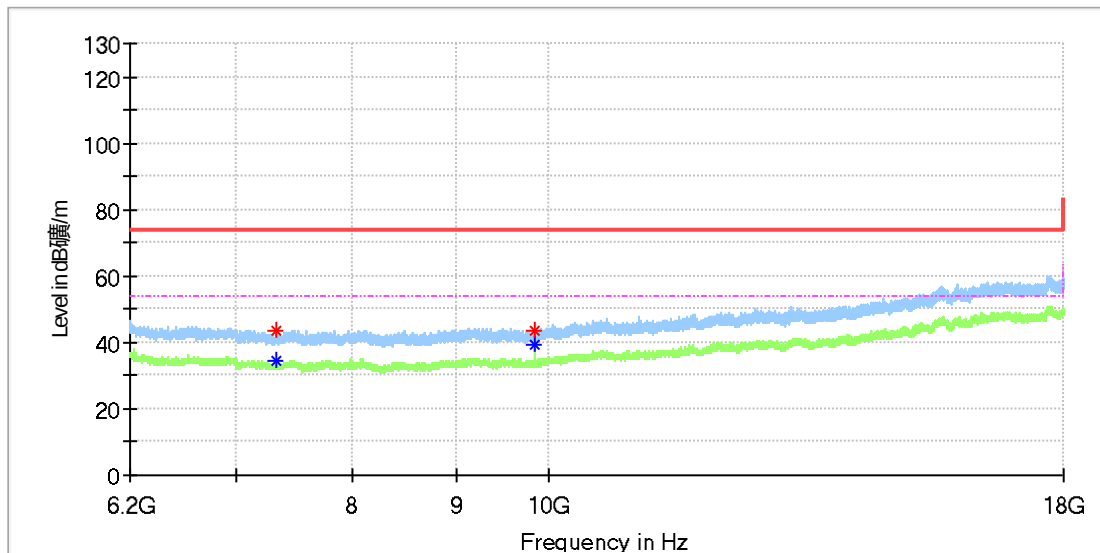

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7323.458333	---	34.33	54.00	19.67	150.0	H	85.0	8.2
7331.325000	43.42	---	74.00	30.58	150.0	H	263.0	8.1
9839.808333	---	39.23	54.00	14.77	150.0	H	104.0	10.5
9843.741667	43.35	---	74.00	30.65	150.0	H	55.0	10.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Touchless Flush Mechanism (Sensor module)
Model: D7020
Test Mode: 2.4GHz transmitting mode
Order No/Sample No: 168435042/A003521309-004
Test Voltage: DC 4.5V
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

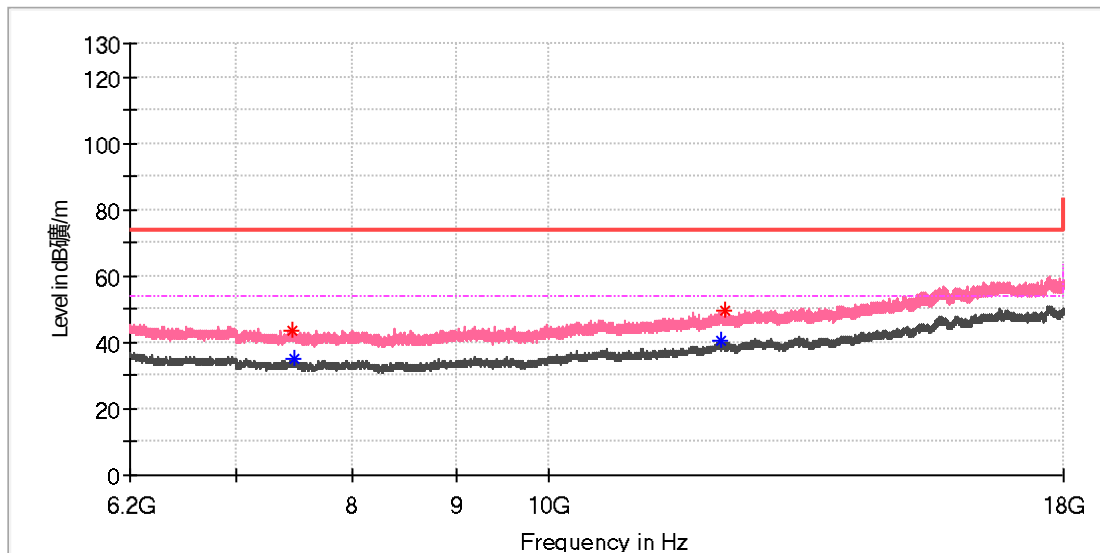


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7456.700000	43.28	---	74.00	30.72	150.0	V	149.0	8.5
7478.825000	---	35.04	54.00	18.96	150.0	V	23.0	8.7
12186.041667	---	40.21	54.00	13.79	150.0	V	300.0	14.6
12243.075000	49.36	---	74.00	24.64	150.0	V	83.0	14.7

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.2: Test Results of 20dB Bandwidth

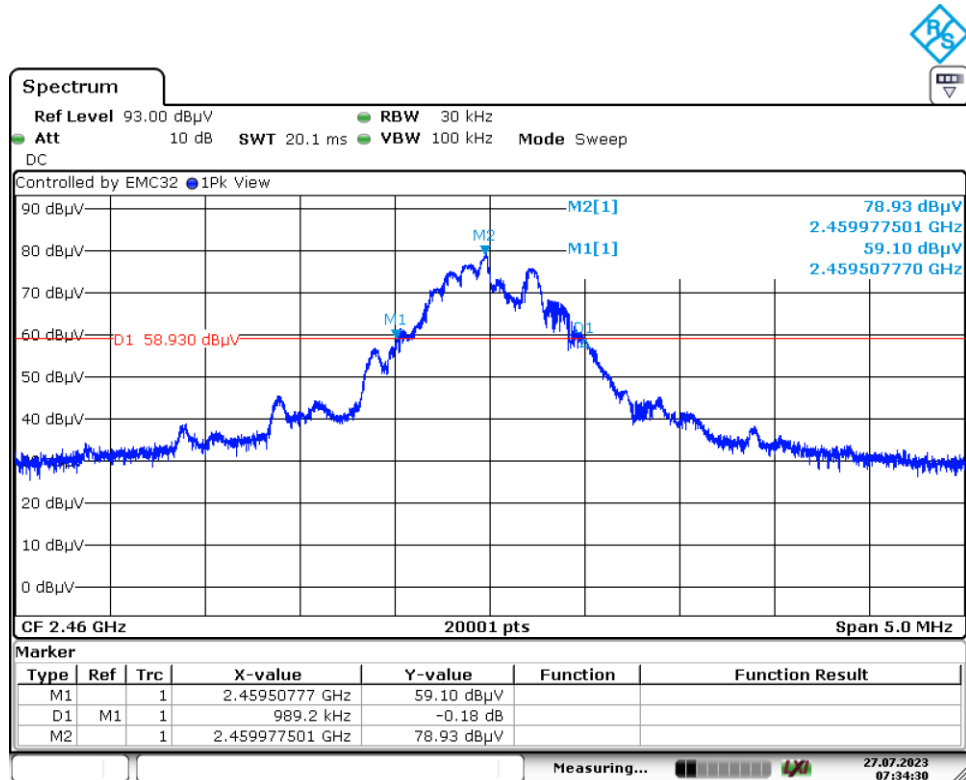

Date: 27.JUL.2023 07:34:30

Appendix A.3: Test Results of 99% Bandwidth




Date: 27.JUL.2023 07:31:13

Appendix A.4: Test Results of Band Edge

EUT Information

EUT Name:	Touchless Flush Mechanism (Sensor module)
Model:	D7020
Test Mode:	2.4GHz transmitting mode
Order No/Sample No:	168435042/A003521309-004
Test Voltage:	DC 4.5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

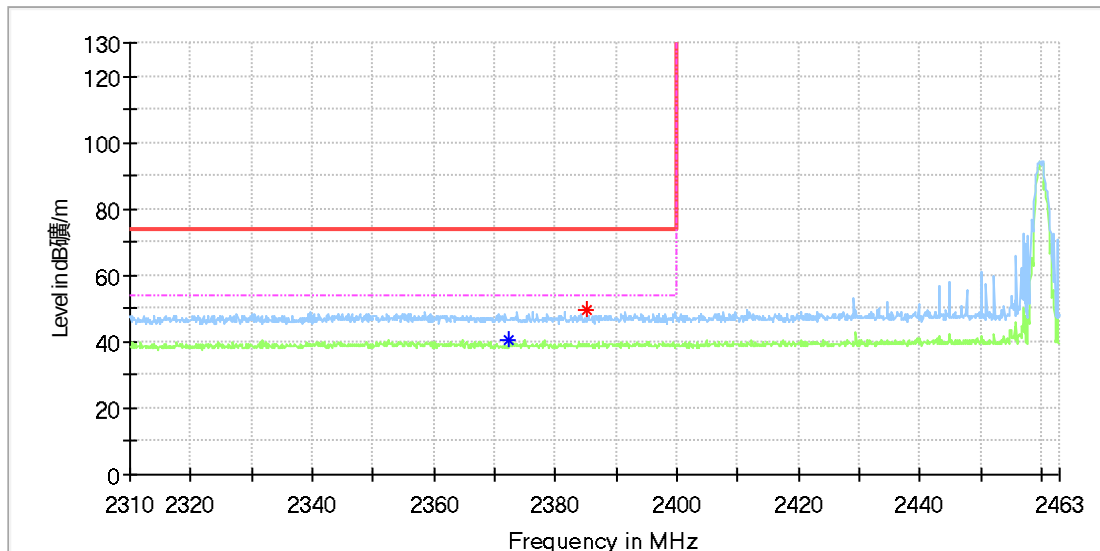

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2372.300000	---	40.60	54.00	13.41	150.0	H	211.0	6.9
2385.200000	49.40	---	74.00	24.60	150.0	H	137.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Touchless Flush Mechanism (Sensor module)
Model:	D7020
Test Mode:	2.4GHz transmitting mode
Order No/Sample No:	168435042/A003521309-004
Test Voltage:	DC 4.5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

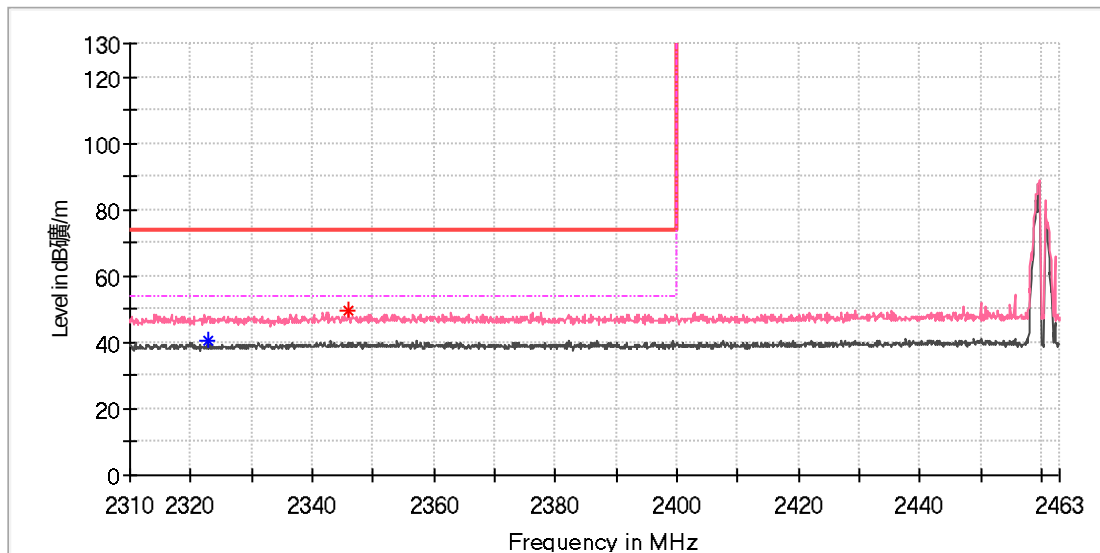

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2322.700000	---	40.69	54.00	13.31	150.0	V	278.0	6.6
2345.900000	49.40	---	74.00	24.60	150.0	V	166.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Touchless Flush Mechanism (Sensor module)
Model:	D7020
Test Mode:	2.4GHz transmitting mode
Order No/Sample No:	168435042/A003521309-004
Test Voltage:	DC 4.5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

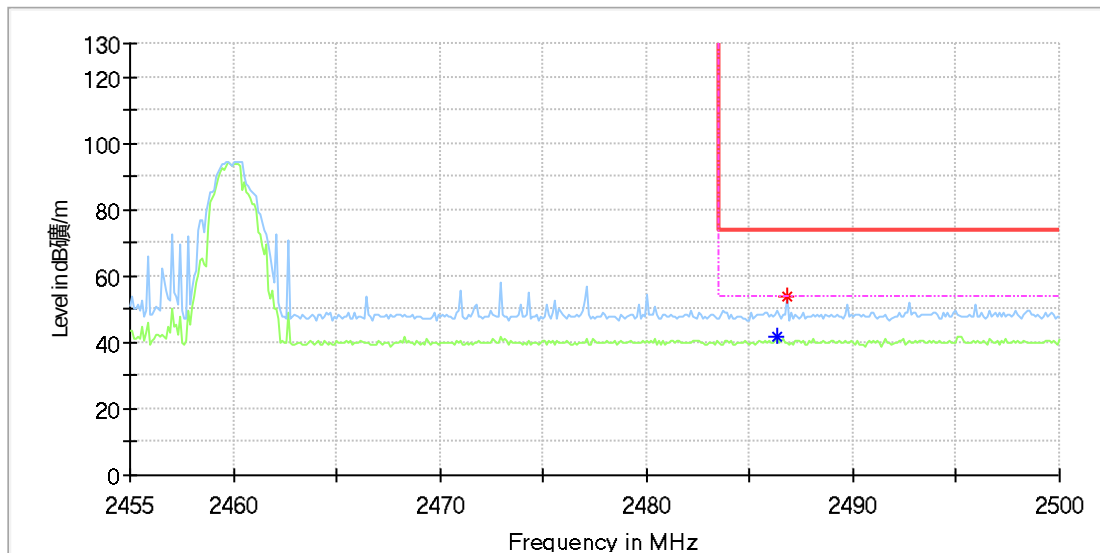

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.300000	---	41.84	54.00	12.16	150.0	H	141.0	7.4
2486.800000	53.74	---	74.00	20.26	150.0	H	16.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Touchless Flush Mechanism (Sensor module)
Model:	D7020
Test Mode:	2.4GHz transmitting mode
Order No/Sample No:	168435042/A003521309-004
Test Voltage:	DC 4.5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

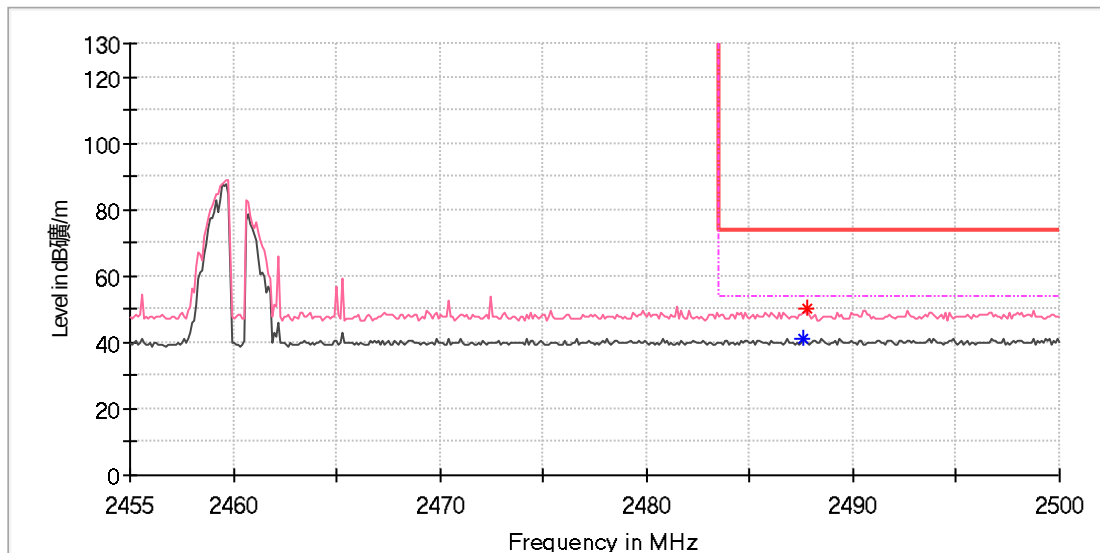

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.600000	---	40.85	54.00	13.15	150.0	V	345.0	7.4
2487.800000	50.39	---	74.00	23.61	150.0	V	183.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---