

Bluetooth

Frequency: 2402 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 40.024$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(8.16, 8.16, 8.16) @ 2402 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

Body-Worn Camera/Rear_0mm/Bluetooth/Ch 0_With CHEST CLIP/Area Scan (9x11x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0332 W/kg

Body-Worn Camera/Rear_0mm/Bluetooth/Ch 0_With CHEST CLIP/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5690 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00751 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.0352 W/kg

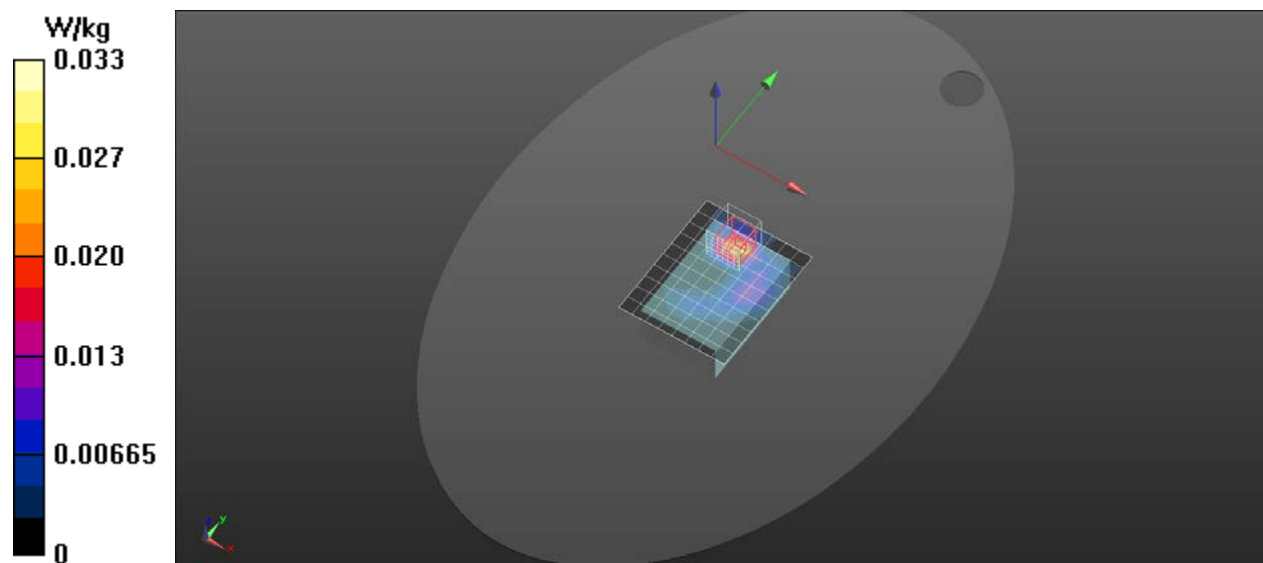

WiFi 2.4G

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.844$ S/m; $\epsilon_r = 39.893$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(8.16, 8.16, 8.16) @ 2462 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

Body-Worn Camera/Rear_0mm/802.11g/Ch 11_With CHEST CLIP/Area

Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.134 W/kg

Body-Worn Camera/Rear_0mm/802.11g/Ch 11_With CHEST CLIP/Zoom

Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.445 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.169 W/kg

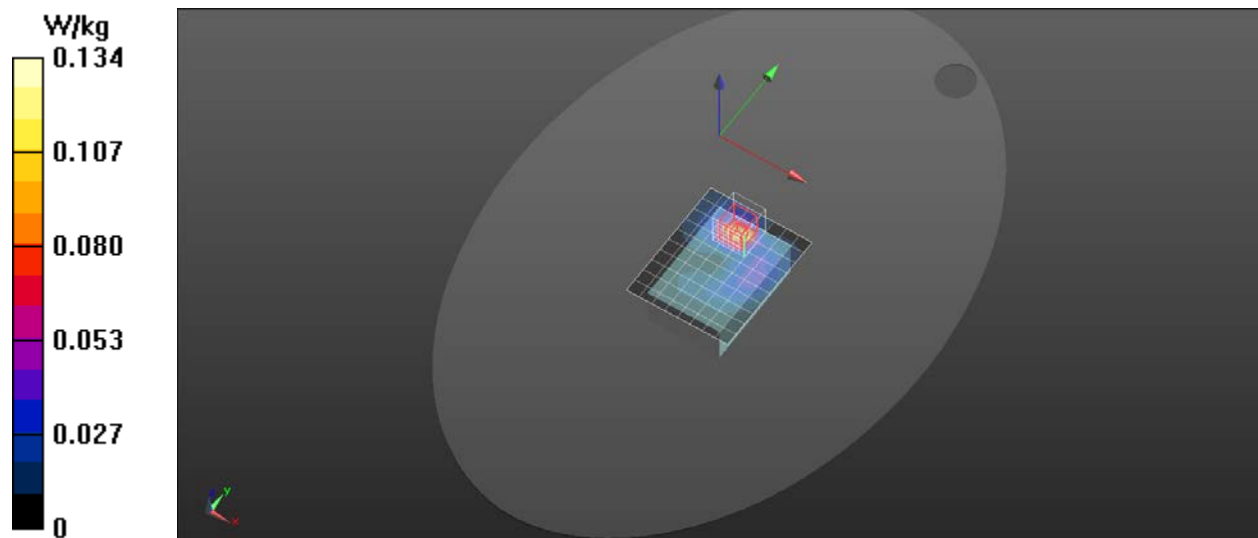

WiFi 5G

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.788$ S/m; $\epsilon_r = 35.52$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(5.48, 5.48, 5.48) @ 5320 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

**Body-Worn Camera/Rear_0mm/802.11a/Ch 64_With ADJUSTABLE
POCKET MOUNT/Area Scan (10x13x1):** Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.606 W/kg

**Body-Worn Camera/Rear_0mm/802.11a/Ch 64_With ADJUSTABLE
POCKET MOUNT/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm,
dy=4mm, dz=2mm

Reference Value = 6.363 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 0.678 W/kg

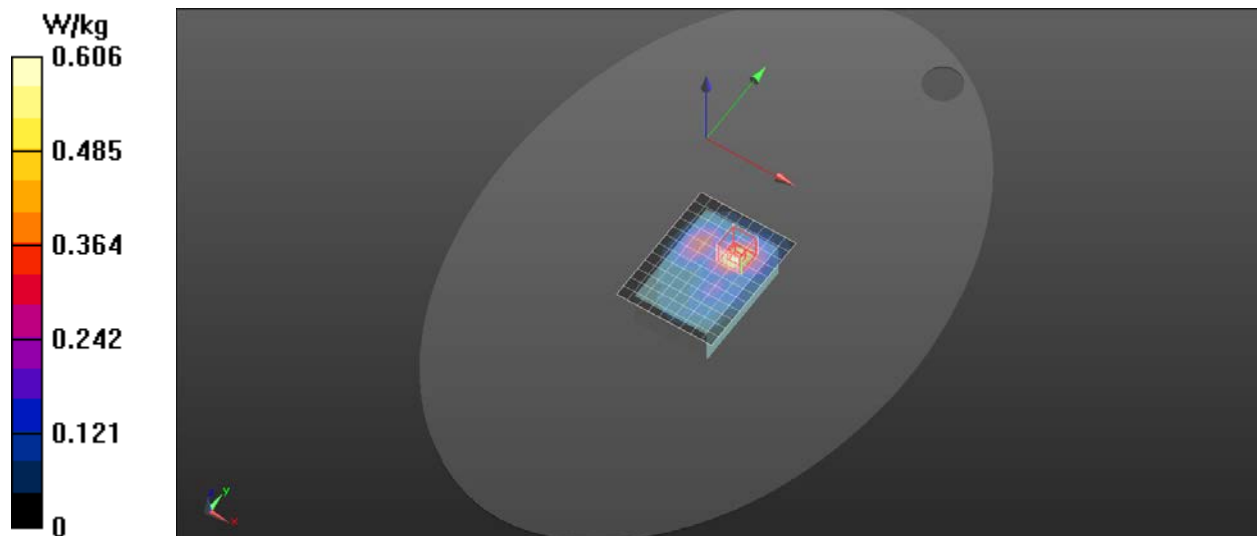

WiFi 5G

Frequency: 5500 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.065$ S/m; $\epsilon_r = 34.846$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(4.99, 4.99, 4.99) @ 5500 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

Body-Worn Camera/Rear_0mm/802.11a/Ch 100_With ADJUSTABLE POCKET MOUNT/Area Scan (10x13x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.899 W/kg

Body-Worn Camera/Rear_0mm/802.11a/Ch 100_With ADJUSTABLE POCKET MOUNT/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.136 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 1.08 W/kg

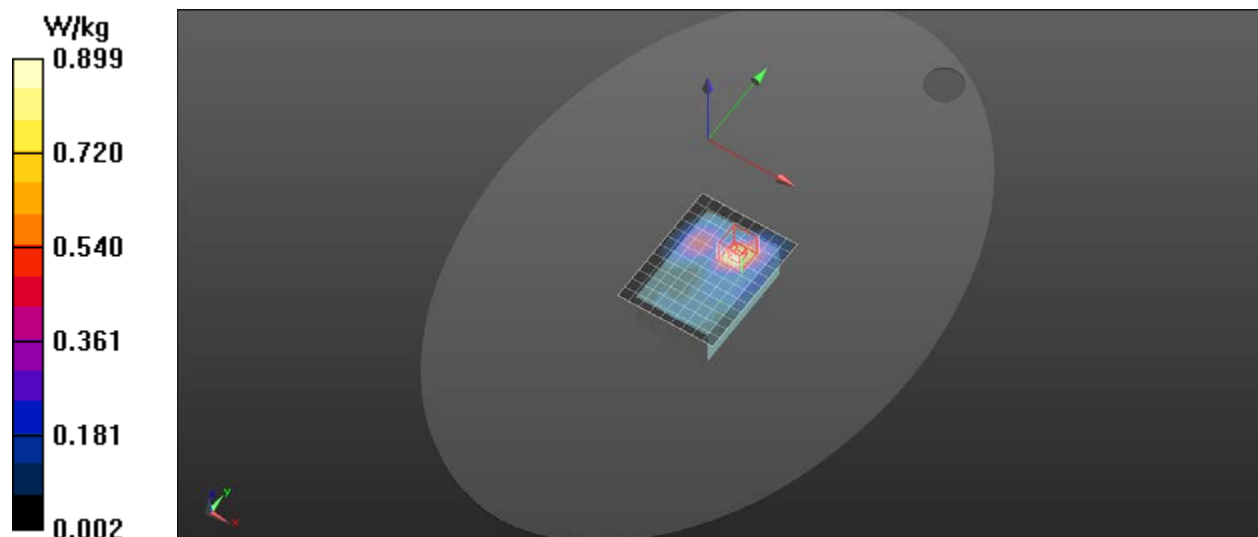

WiFi 5G

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.356$ S/m; $\epsilon_r = 34.327$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(5.05, 5.05, 5.05) @ 5745 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

Body-Worn Camera/Rear_0mm/802.11a/Ch 149_With ADJUSTABLE POCKET MOUNT/Area Scan (10x13x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.612 W/kg

Body-Worn Camera/Rear_0mm/802.11a/Ch 149_With ADJUSTABLE POCKET MOUNT/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.466 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.765 W/kg

