



**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

Panic Button

MODEL NUMBER: 5F55E9

FCC ID: 2AB2Q5F55E9

IC: 10256A-5F55E9

REPORT NUMBER: 4790434809.1-2

ISSUE DATE: September 21, 2022

Prepared for

LEEDARSON LIGHTING CO., LTD.

Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	06/27/2022	Initial Issue	Kebo Zhang
V1	09/21/2022	Updating the antenna gain	Kebo Zhang



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (i) RSS-247 Clause 5.1 (c) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (2) RSS-247 Clause 5.4 (a)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (c)	Pass
4	Number of Hopping Frequency	15.247 (a)(1)(i) RSS-247 Clause 5.1 (c)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a)(1)(i) RSS-247 Clause 5.1 (c)	Pass
6	Conducted Bandedge	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass
<p>Note:</p> <p>1.This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >> ISED RSS-247 > when <Accuracy Method> decision rule is applied.</p>			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>MAXIMUM PEAK OUTPUT POWER</i>	<i>9</i>
5.3. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>9</i>
5.4. <i>CHANNEL LIST.....</i>	<i>10</i>
5.5. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>12</i>
5.6. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>12</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.8. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>13</i>
6. MEASURING INSTRUMENT AND SOFTWARE USED	14
7. ANTENNA PORT TEST RESULTS	16
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>16</i>
7.2. <i>20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i>	<i>17</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>19</i>
7.4. <i>CARRIER FREQUENCY SEPARATION.....</i>	<i>20</i>
7.5. <i>NUMBER OF HOPPING FREQUENCIES</i>	<i>22</i>
7.6. <i>TIME OF OCCUPANCY (DWELL TIME).....</i>	<i>24</i>
7.7. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....</i>	<i>26</i>
8. RADIATED TEST RESULTS.....	28
8.1. <i>SPURIOUS EMISSIONS (1 GHz ~ 10 GHz).....</i>	<i>34</i>
8.1.1. <i>FSK - 50 kbps MODE</i>	<i>34</i>
8.1.1. <i>FSK - 150 kbps MODE</i>	<i>40</i>
8.1.2. <i>FSK - 250 kbps MODE</i>	<i>46</i>
8.2. <i>SPURIOUS EMISSIONS (30 MHz ~ 1 GHz).....</i>	<i>52</i>
8.2.1. <i>FSK - 250 kbps MODE</i>	<i>52</i>
8.3. <i>SPURIOUS EMISSIONS BELOW 30 MHz</i>	<i>54</i>
8.3.1. <i>FSK - 250 kbps MODE</i>	<i>54</i>



9. ANTENNA REQUIREMENTS.....57

APPENDIX A: DUTY CYCLE58

APPENDIX B: 20DB BANDWIDTH.....61

APPENDIX C: OCCUPIED CHANNEL BANDWIDTH.....67

APPENDIX D: PEAK CONDUCTED OUTPUT POWER.....68

APPENDIX E: CARRIER FREQUENCY SEPARATION69

APPENDIX F: NUMBER OF HOPPING FREQUENCIES71

APPENDIX G: TIME OF OCCUPANCY (DWELL TIME).....73

APPENDIX H: CONDUCTED SPURIOUS EMISSION77



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD.
Address: Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China

Manufacturer Information

Company Name: LEEDARSON LIGHTING CO., LTD.
Address: Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China

EUT Information

EUT Name: Panic Button
Model: 5F55E9
Brand: ring
Sample Received Date: June 13, 2022
Sample Status: Normal
Sample ID: 5027349
Date of Tested: June 14~June 27, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Checked By:

Kebo Zhang
Senior Project Engineer

Denny Huang
Senior Project Engineer

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
20dB Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Carrier Frequency Separation	±1.9%
Maximum Conducted Output Power	±0.743 dB
Number of Hopping Channel	±1.9%
Time of Occupancy	±0.028%
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Panic Button
Model	5F55E9
Battery	DC 3 V

Transmit Frequency Range	902.2 ~ 927.8 MHz	902.4 ~ 927.6 MHz	902.5 ~ 927.5 MHz
Bit Rate	50 kbps	150 kbps	250 kbps
Number of Channels	129	64	51
Channel Separation (kHz)	200	400	500
Modulation	FSK		

5.2. MAXIMUM PEAK OUTPUT POWER

Data Rate	Number of Channels	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
50 kbps	129	14.43	15.83
150 kbps	64	14.43	15.83
250 kbps	51	14.43	15.83

5.3. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
FSK-50 kbps	CH 0(Low Channel), CH 64(MID Channel), CH 128(High Channel)	902.2 MHz, 915 MHz, 927.8 MHz
FSK-150 kbps	CH 129(Low Channel), CH 161(MID Channel), CH 192(High Channel)	902.4 MHz, 915.2 MHz, 927.6MHz
FSK-250 kbps	CH 193(Low Channel), CH 218(MID Channel), CH 243(High Channel)	902.5 MHz, 915 MHz, 927.5 MHz
FSK-50 kbps	Hopping	902.2 - 927.8 MHz
FSK-150 kbps	Hopping	902.4 - 927.6 MHz
FSK-250 kbps	Hopping	902.5 - 927.5 MHz

5.4. CHANNEL LIST

Data Rate: 50 kbps							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	902.2	33	908.8	66	915.4	99	922.0
1	902.4	34	909.0	67	915.6	100	922.2
2	902.6	35	909.2	68	915.8	101	922.4
3	902.8	36	909.4	69	916.0	102	922.6
4	903.0	37	909.6	70	916.2	103	922.8
5	903.2	38	909.8	71	916.4	104	923.0
6	903.4	39	910.0	72	916.6	105	923.2
7	903.6	40	910.2	73	916.8	106	923.4
8	903.8	41	910.4	74	917.0	107	923.6
9	904.0	42	910.6	75	917.2	108	923.8
10	904.2	43	910.8	76	917.4	109	924.0
11	904.4	44	911.0	77	917.6	110	924.2
12	904.6	45	911.2	78	917.8	111	924.4
13	904.8	46	911.4	79	918.0	112	924.6
14	905.0	47	911.6	80	918.2	113	924.8
15	905.2	48	911.8	81	918.4	114	925.0
16	905.4	49	912.0	82	918.6	115	925.2
17	905.6	50	912.2	83	918.8	116	925.4
18	905.8	51	912.4	84	919.0	117	925.6
19	906.0	52	912.6	85	919.2	118	925.8
20	906.2	53	912.8	86	919.4	119	926.0
21	906.4	54	913.0	87	919.6	120	926.2
22	906.6	55	913.2	88	919.8	121	926.4
23	906.8	56	913.4	89	920.0	122	926.6
24	907.0	57	913.6	90	920.2	123	926.8
25	907.2	58	913.8	91	920.4	124	927.0
26	907.4	59	914.0	92	920.6	125	927.2
27	907.6	60	914.2	93	920.8	126	927.4
28	907.8	61	914.4	94	921.0	127	927.6
29	908.0	62	914.6	95	921.2	128	927.8
30	908.2	63	914.8	96	921.4	/	/
31	908.4	64	915.0	97	921.6	/	/
32	908.6	65	915.2	98	921.8	/	/



Data Rate: 150 kbps							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
129	902.4	145	908.8	161	915.2	177	921.6
130	902.8	146	909.2	162	915.6	178	922.0
131	903.2	147	909.6	163	916.0	179	922.4
132	903.6	148	910.0	164	916.4	180	922.8
133	904.0	149	910.4	165	916.8	181	923.2
134	904.4	150	910.8	166	917.2	182	923.6
135	904.8	151	911.2	167	917.6	183	924.0
136	905.2	152	911.6	168	918.0	184	924.4
137	905.6	153	912.0	169	918.4	185	924.8
138	906.0	154	912.4	170	918.8	186	925.2
139	906.4	155	912.8	171	919.2	187	925.6
140	906.8	156	913.2	172	919.6	188	926.0
141	907.2	157	913.6	173	920.0	189	926.4
142	907.6	158	914.0	174	920.4	190	926.8
143	908.0	159	914.4	175	920.8	191	927.2
144	908.4	160	914.8	176	921.2	192	927.6

Data Rate: 250 kbps							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
193	902.5	206	909.0	219	915.5	232	922.0
194	903.0	207	909.5	220	916.0	233	922.5
195	903.5	208	910.0	221	916.5	234	923.0
196	904.0	209	910.5	222	917.0	235	923.5
197	904.5	210	911.0	223	917.5	236	924.0
198	905.0	211	911.5	224	918.0	237	924.5
199	905.5	212	912.0	225	918.5	238	925.0
200	906.0	213	912.5	226	919.0	239	925.5
201	906.5	214	913.0	227	919.5	240	926.0
202	907.0	215	913.5	228	920.0	241	926.5
203	907.5	216	914.0	229	920.5	242	927.0
204	908.0	217	914.5	230	921.0	243	927.5
205	908.5	218	915.0	231	921.5	/	/



5.5. WORST-CASE CONFIGURATIONS

Modulation Technology	Modulation Type	Data Rate
FHSS	FSK	50 kbps
FHSS	FSK	150 kbps
FHSS	FSK	250 kbps

5.6. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter				
Test Software		sscom5.13.1		
Test Mode	Transmit Antenna Number	Test Software Setting Value		
		Low	Middle	High
FSK-50 kbps	1	200(raw)	200(raw)	200(raw)
FSK-150 kbps	1	200(raw)	200(raw)	200(raw)
FSK-250 kbps	1	200(raw)	200(raw)	200(raw)

Note: raw is the test software setting description provide by customer.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency Band (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	902-928	IFA Antenna	1.4

Modulation	Transmit and Receive Mode	Description
FSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	Lenovo	TP00094A	/
2	USB TO UART	/	/	/

I/O PORT

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/

ACCESSORY


Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

New battery is used during the testing.

SETUP DIAGRAM FOR TESTS

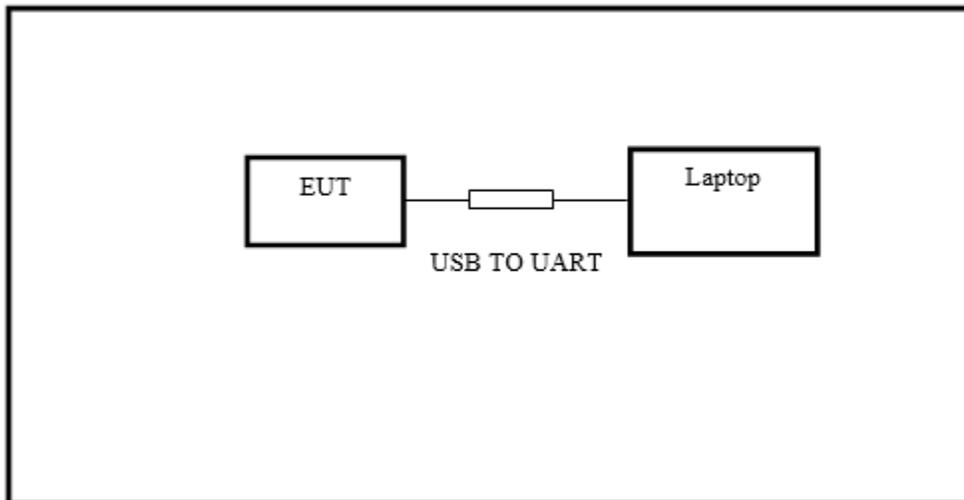

**6. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Two-Line V-Network	R&S	ENV216	101983	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description		Manufacturer	Name	Version	
Test Software for Conducted Emissions		Farad	EZ-EMC	Ver. UL-3A1	

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
Software					
Description		Manufacturer	Name	Version	
Test Software for Radiated Emissions		Farad	EZ-EMC	Ver. UL-3A1	



Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Keysight	N9030A	MY55410512	Oct.30, 2021	Oct.29, 2022
Signal Analyzer	R&S	FSV40	101118	Oct.30, 2021	Oct.29, 2022
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Oct.30, 2021	Oct.29, 2022
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Oct.30, 2021	Oct.29, 2022

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only.

PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

RESULTS

Please refer to appendix A.

7.2. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (i) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	≤ 500 kHz	902 - 928
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	902 - 928


TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

TEST SETUP





TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

RESULTS

Please refer to appendix B and C.

7.3. CONDUCTED OUTPUT POWER


LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (2) ISED RSS-247 Clause 5.4 (a)	Peak Conducted Output Power	1 watt for systems employing at least 50 hopping channels	902 - 928

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth). Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

RESULTS

Please refer to appendix D.

7.4. CARRIER FREQUENCY SEPARATION

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISSED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISSED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	at least 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	902 - 928

TEST PROCEDURE


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	\geq RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

TEST SETUP





TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

RESULTS

Please refer to Appendix E.

7.5. NUMBER OF HOPPING FREQUENCIES

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (i) ISED RSS-247 Clause 5.1 (c)	Number of Hopping Frequency	1. if the 20 dB bandwidth of the hopping channel is less than 250 kHz, at least 50 hopping channels 2. if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, at least 25 hopping channels


TEST PROCEDURE

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

TEST SETUP





TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

RESULTS

Please refer to appendix F.

7.6. TIME OF OCCUPANCY (DWELL TIME)

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (i) ISED RSS-247 Clause 5.1 (c)	Time of Occupancy (Dwell Time)	1.If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period. 2. if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


TEST PROCEDURE

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Measure the maximum time duration of one single pulse.
A Period Time = (channel number)*0.4

TEST SETUP

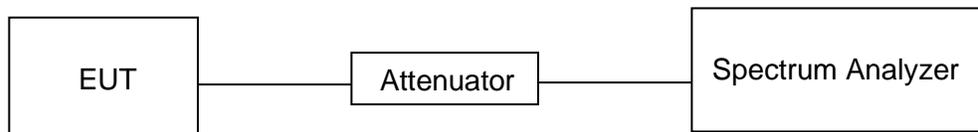



TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

RESULTS

Please refer to appendix G.



7.7. CONDUCTED BANDEdge AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.



TEST SETUP



TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

RESULTS

Please refer to appendix H.

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz		
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
		Quasi-Peak
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54
Above 1000	500	Peak
		Average
		74
		54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

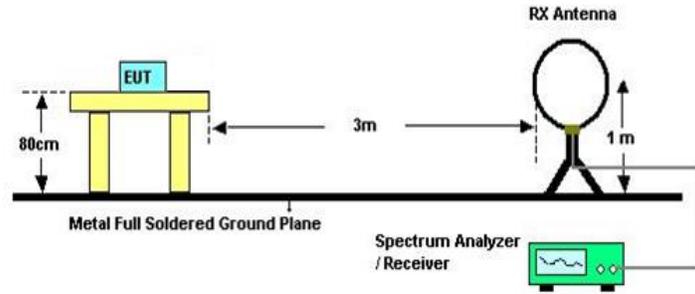


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

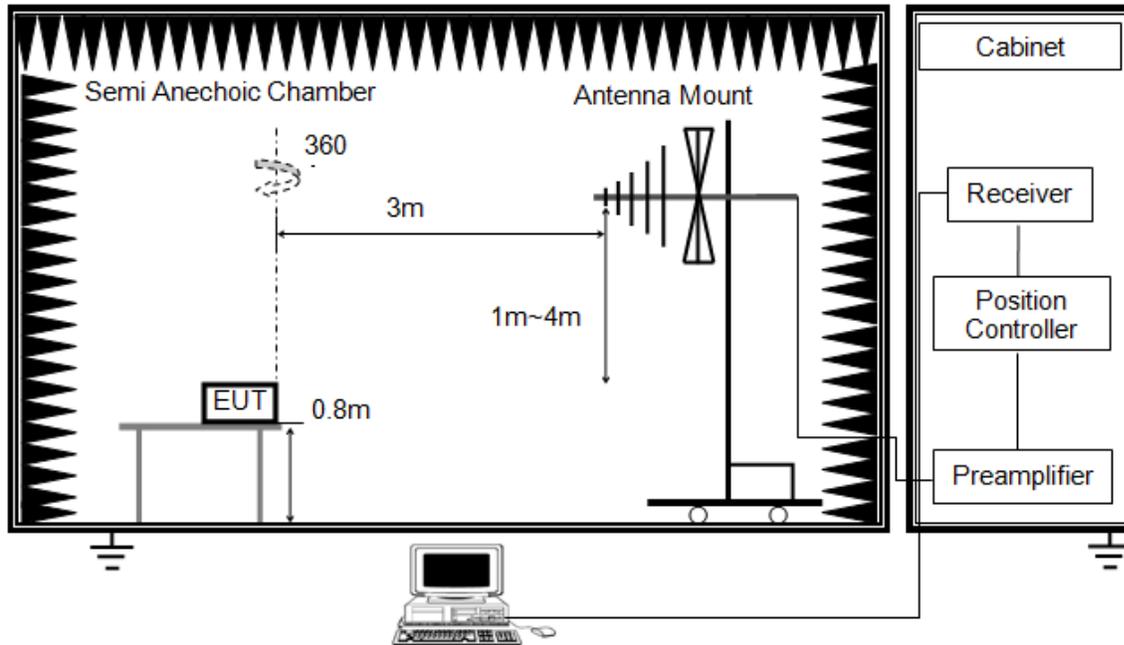


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

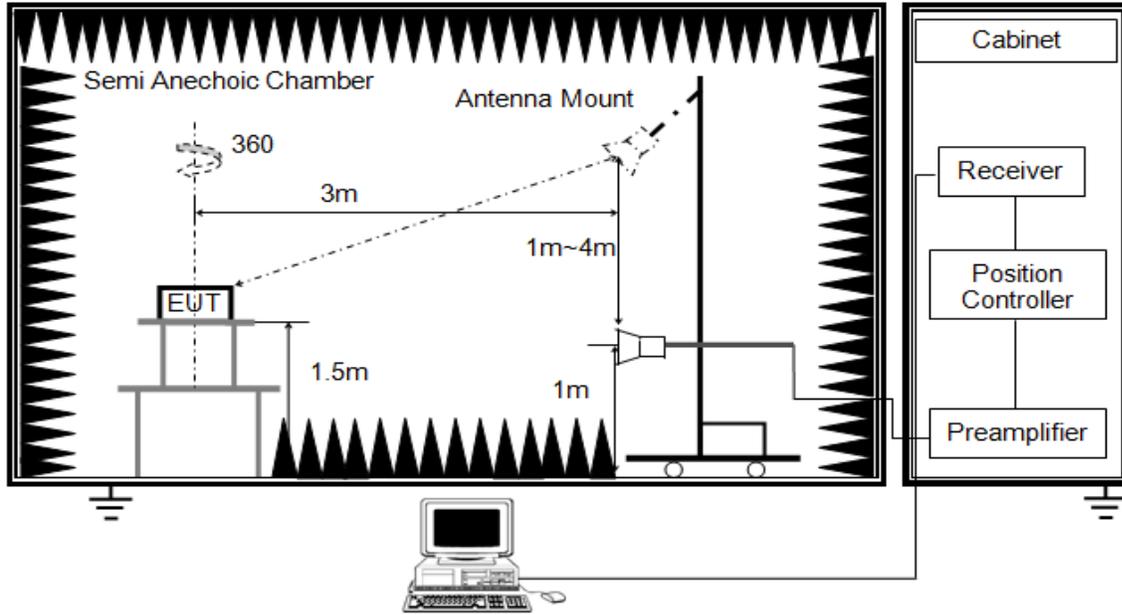


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

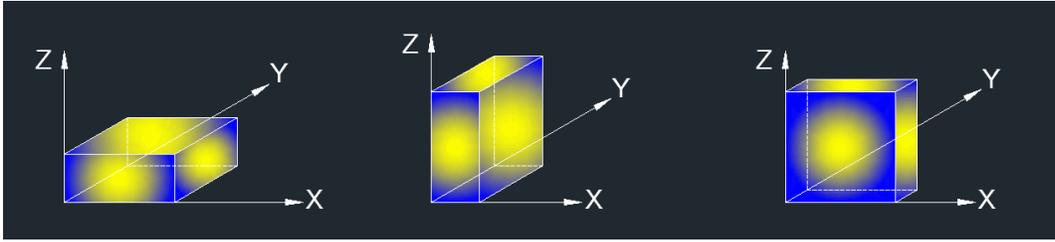

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: For the radiated restricted bandedge, a pre-scan was performed, and the result was 20 dB lower than the limit line, the test data was not shown in the report.

TEST ENVIRONMENT


Temperature	24.3 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

RESULTS

8.1. SPURIOUS EMISSIONS (1 GHz ~ 10 GHz)

8.1.1. FSK - 50 kbps MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

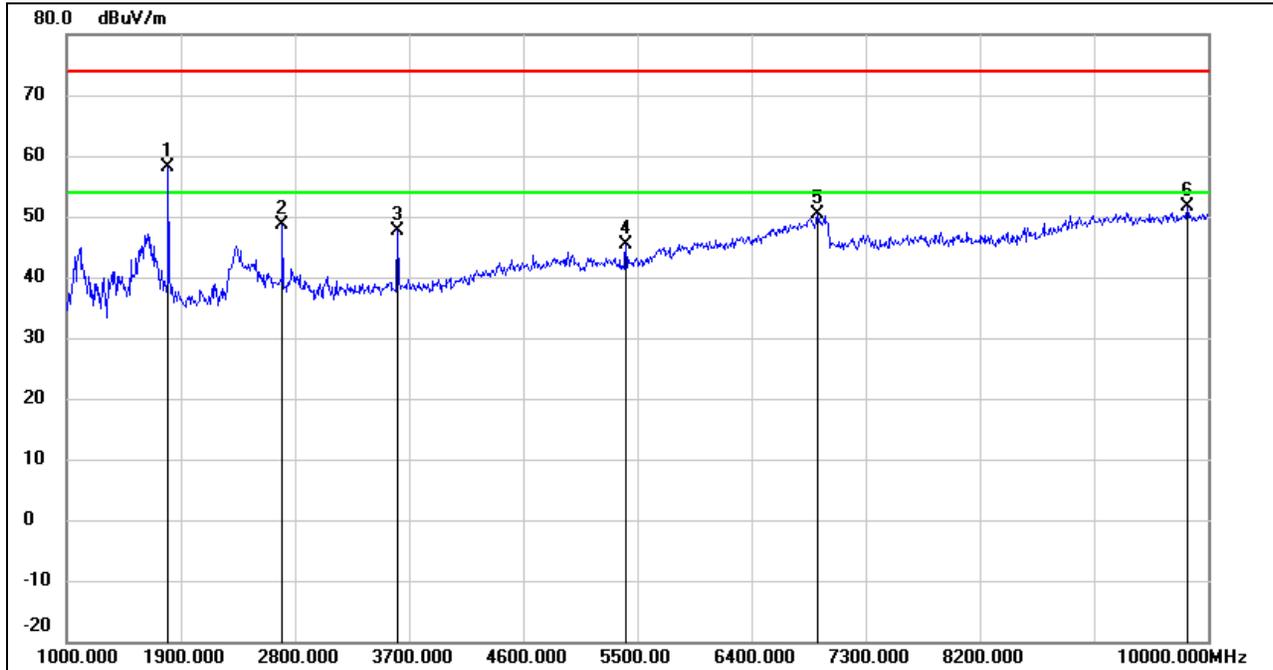

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1801.000	69.71	-11.61	58.10	/	/	peak
2	2701.000	56.41	-7.78	48.63	74.00	-25.37	peak
3	3610.000	53.19	-5.47	47.72	74.00	-26.28	peak
4	5410.000	44.80	0.53	45.33	74.00	-28.67	peak
5	6922.000	44.92	5.46	50.38	74.00	-23.62	peak
6	9838.000	40.84	10.74	51.58	74.00	-22.42	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

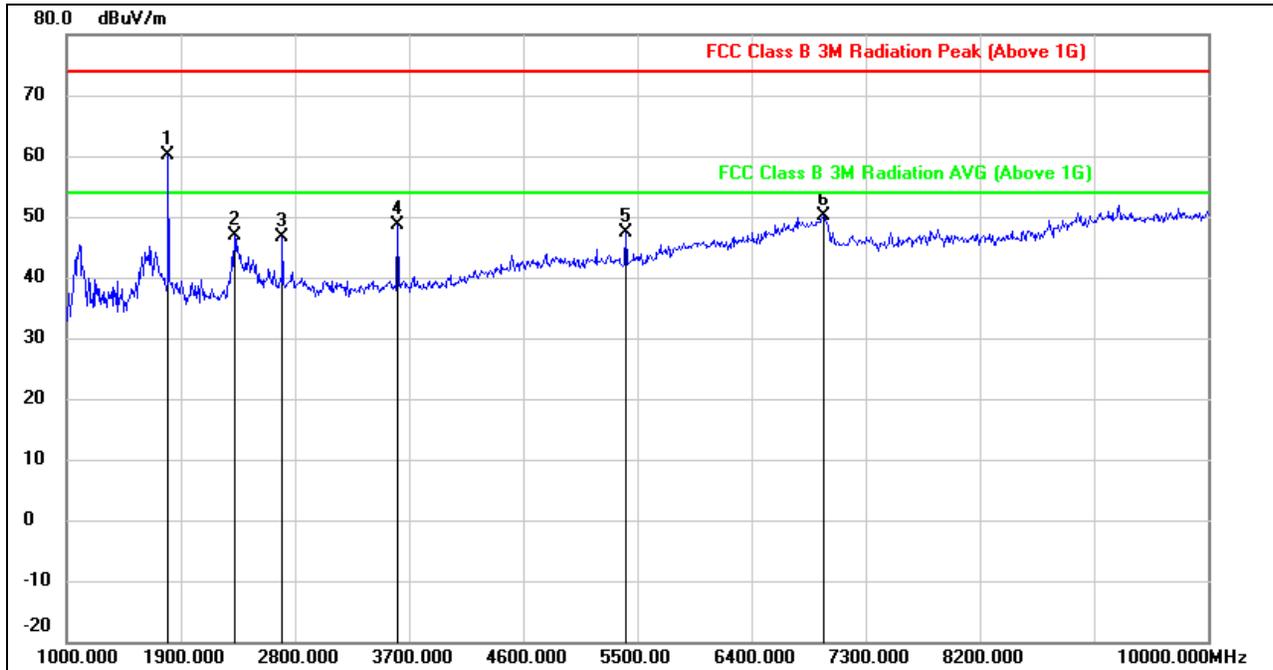**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1801.000	71.84	-11.61	60.23	/	/	peak
2	2323.000	56.11	-9.26	46.85	74.00	-27.15	peak
3	2701.000	54.39	-7.78	46.61	74.00	-27.39	peak
4	3610.000	54.00	-5.47	48.53	74.00	-25.47	peak
5	5410.000	46.95	0.53	47.48	74.00	-26.52	peak
6	6967.000	44.50	5.67	50.17	74.00	-23.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

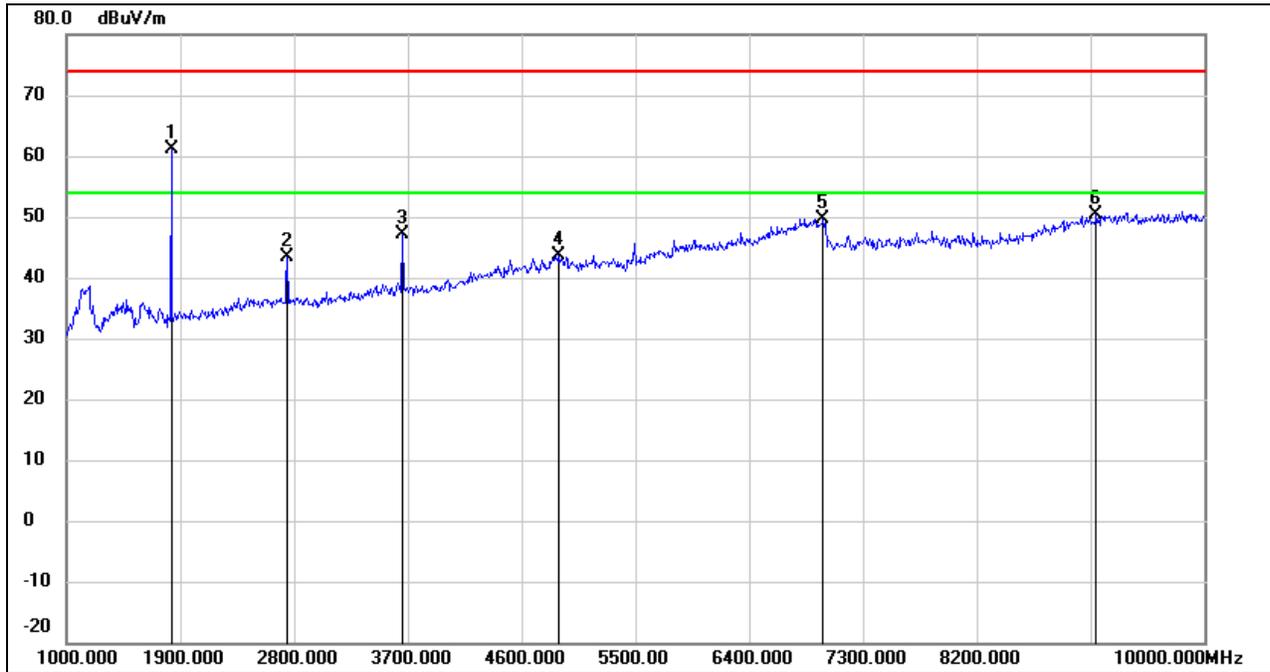

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1828.000	72.72	-11.52	61.20	/	/	peak
2	2746.000	51.07	-7.67	43.40	74.00	-30.60	peak
3	3655.000	52.56	-5.35	47.21	74.00	-26.79	peak
4	4888.000	44.06	-0.54	43.52	74.00	-30.48	peak
5	6985.000	43.90	5.76	49.66	74.00	-24.34	peak
6	9145.000	40.68	9.75	50.43	74.00	-23.57	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

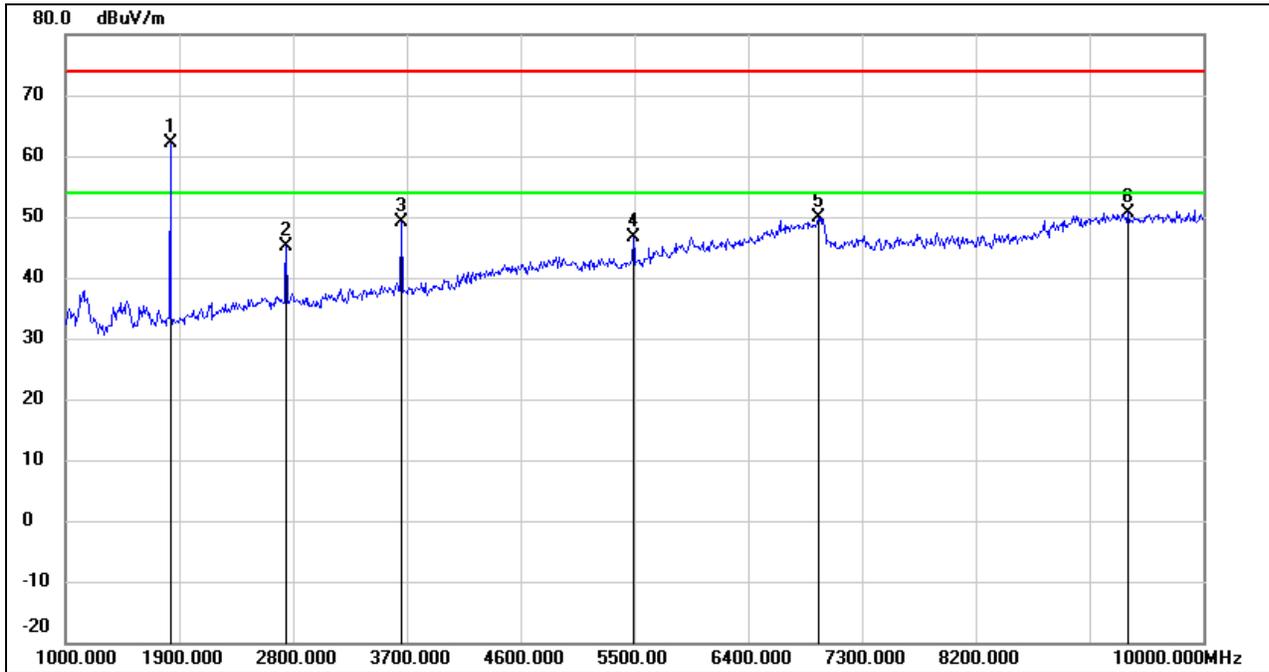

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1828.000	73.75	-11.52	62.23	/	/	peak
2	2746.000	52.74	-7.67	45.07	74.00	-28.93	peak
3	3655.000	54.58	-5.35	49.23	74.00	-24.77	peak
4	5491.000	45.97	0.65	46.62	74.00	-27.38	peak
5	6958.000	44.33	5.62	49.95	74.00	-24.05	peak
6	9406.000	40.70	10.00	50.70	74.00	-23.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

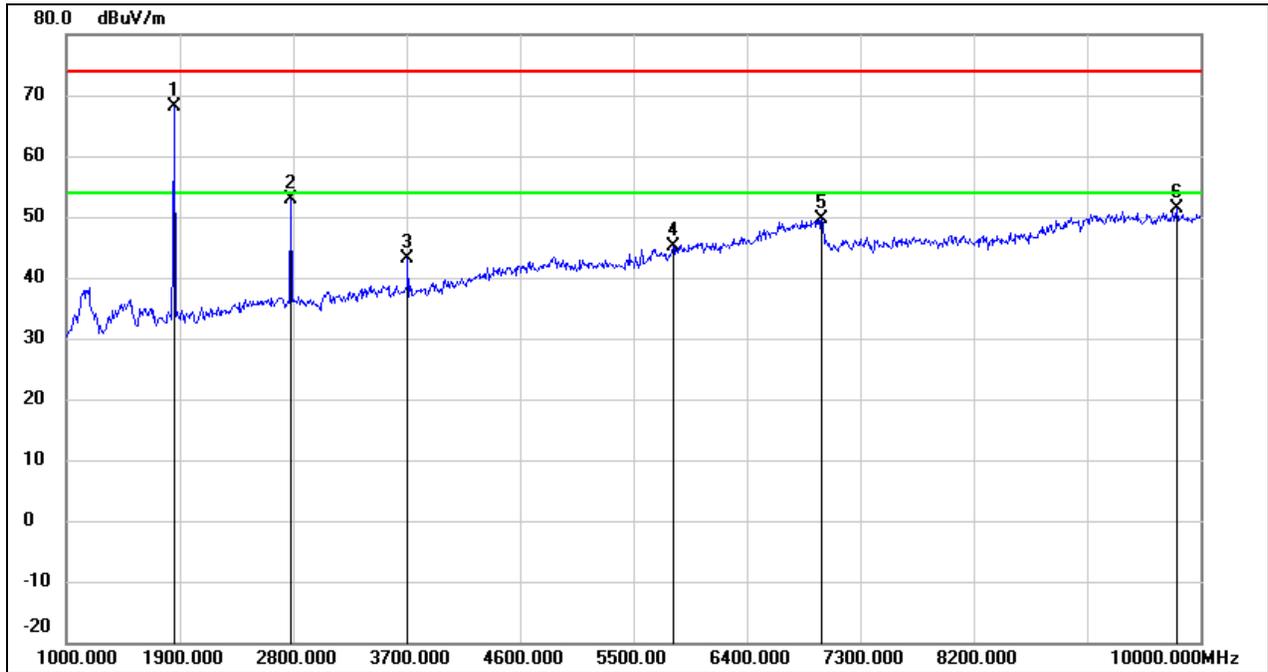

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1855.000	79.67	-11.45	68.22	/	/	peak
2	2782.000	60.35	-7.56	52.79	74.00	-21.21	peak
3	3709.000	48.29	-5.20	43.09	74.00	-30.91	peak
4	5815.000	43.51	1.73	45.24	74.00	-28.76	peak
5	6994.000	43.79	5.81	49.60	74.00	-24.40	peak
6	9811.000	40.74	10.68	51.42	74.00	-22.58	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 7.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

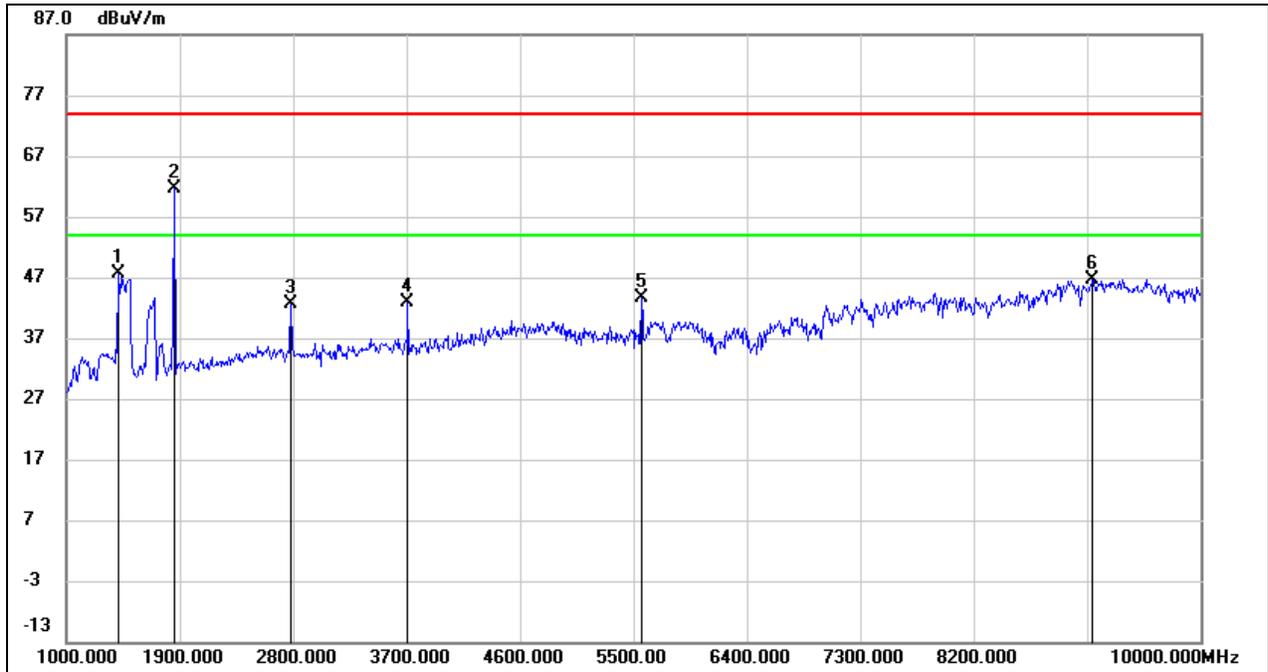


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1414.000	60.48	-12.96	47.52	74.00	-26.48	peak
2*	1855.000	73.07	-11.45	61.62	/	/	peak
3	2782.000	50.23	-7.56	42.67	74.00	-31.33	peak
4	3709.000	48.02	-5.20	42.82	74.00	-31.18	peak
5	5563.000	42.74	0.88	43.62	74.00	-30.38	peak
6	9145.000	36.82	9.75	46.57	74.00	-27.43	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

8.1.1. FSK - 150 kbps MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

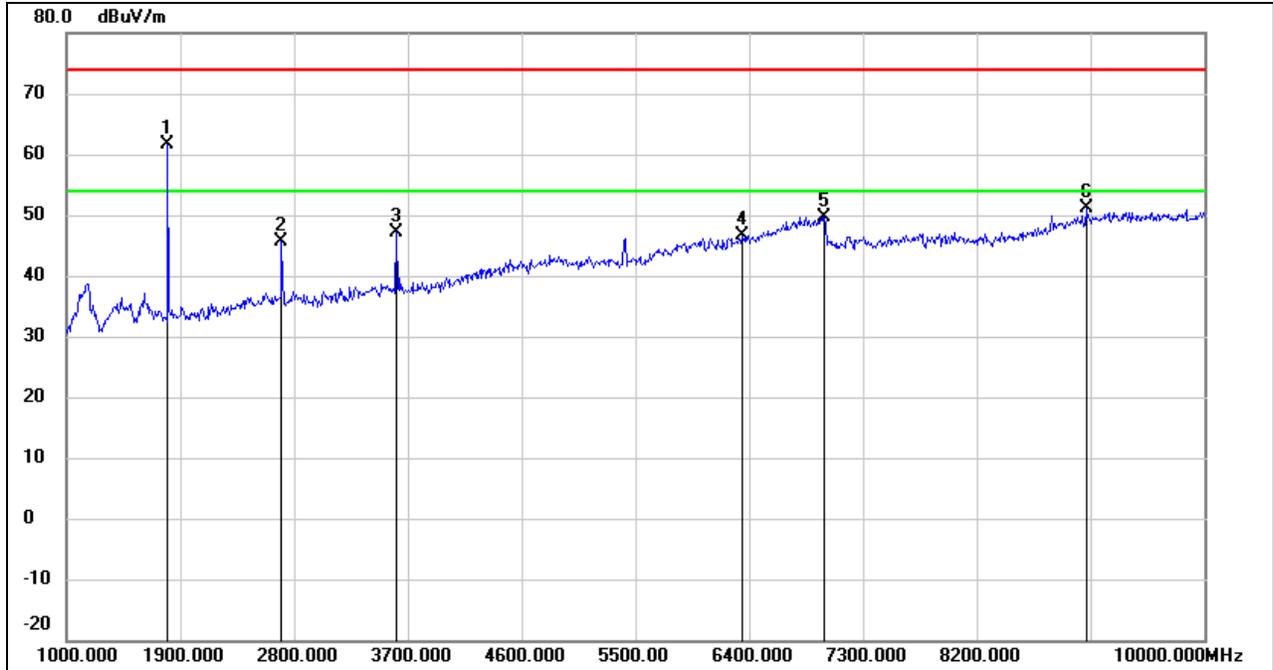

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1801.000	73.14	-11.61	61.53	/	/	peak
2	2701.000	53.44	-7.78	45.66	74.00	-28.34	peak
3	3610.000	52.64	-5.47	47.17	74.00	-26.83	peak
4	6346.000	43.53	3.12	46.65	74.00	-27.35	peak
5	6994.000	43.86	5.81	49.67	74.00	-24.33	peak
6	9064.000	41.43	9.67	51.10	74.00	-22.90	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

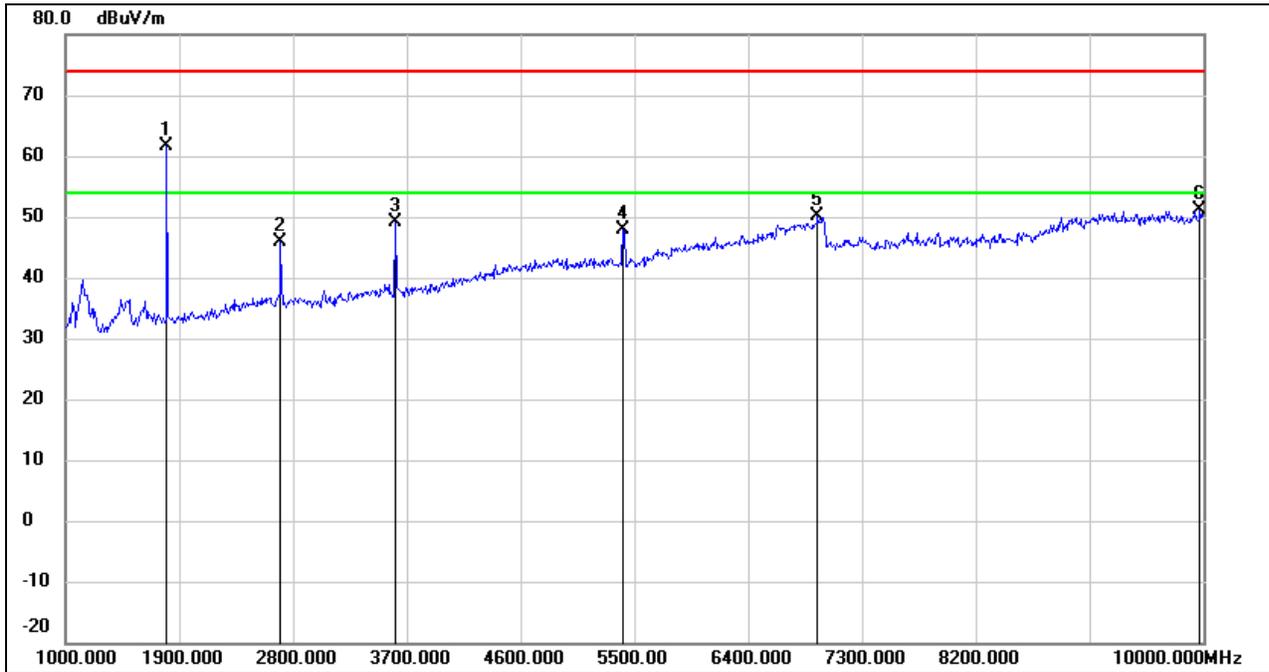


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1801.000	73.17	-11.61	61.56	/	/	peak
2	2701.000	53.63	-7.78	45.85	74.00	-28.15	peak
3	3610.000	54.69	-5.47	49.22	74.00	-24.78	peak
4	5410.000	47.26	0.53	47.79	74.00	-26.21	peak
5	6949.000	44.59	5.59	50.18	74.00	-23.82	peak
6	9973.000	40.07	10.98	51.05	74.00	-22.95	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

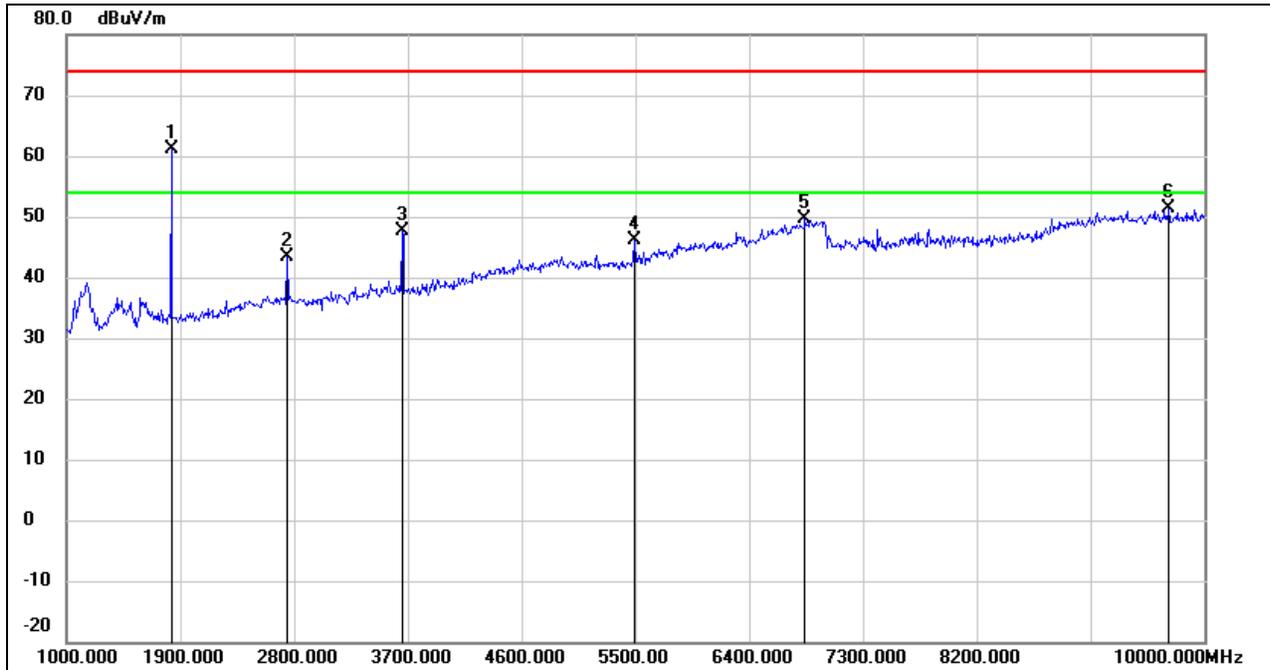

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1828.000	72.72	-11.52	61.20	/	/	peak
2	2746.000	50.96	-7.67	43.29	74.00	-30.71	peak
3	3655.000	52.86	-5.35	47.51	74.00	-26.49	peak
4	5491.000	45.43	0.65	46.08	74.00	-27.92	peak
5	6841.000	44.48	5.07	49.55	74.00	-24.45	peak
6	9721.000	40.83	10.51	51.34	74.00	-22.66	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

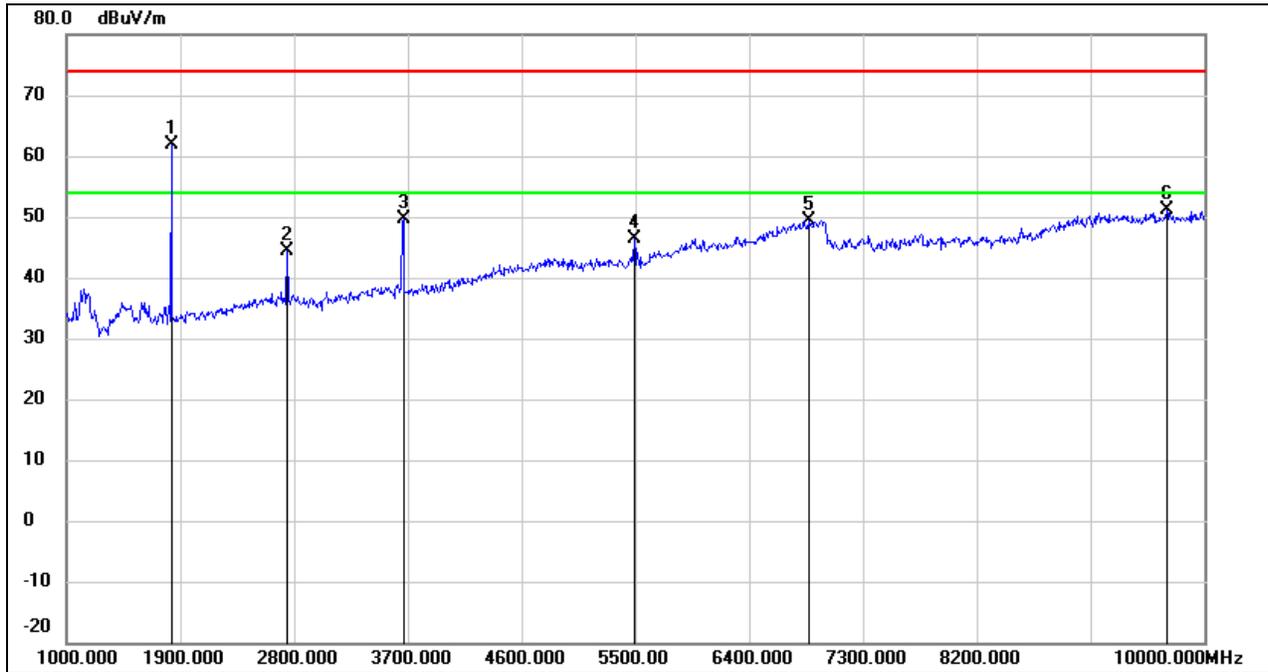HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1828.000	73.29	-11.52	61.77	/	/	peak
2	2746.000	52.16	-7.67	44.49	74.00	-29.51	peak
3	3664.000	54.89	-5.32	49.57	74.00	-24.43	peak
4	5491.000	45.66	0.65	46.31	74.00	-27.69	peak
5	6868.000	44.27	5.20	49.47	74.00	-24.53	peak
6	9703.000	40.62	10.47	51.09	74.00	-22.91	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

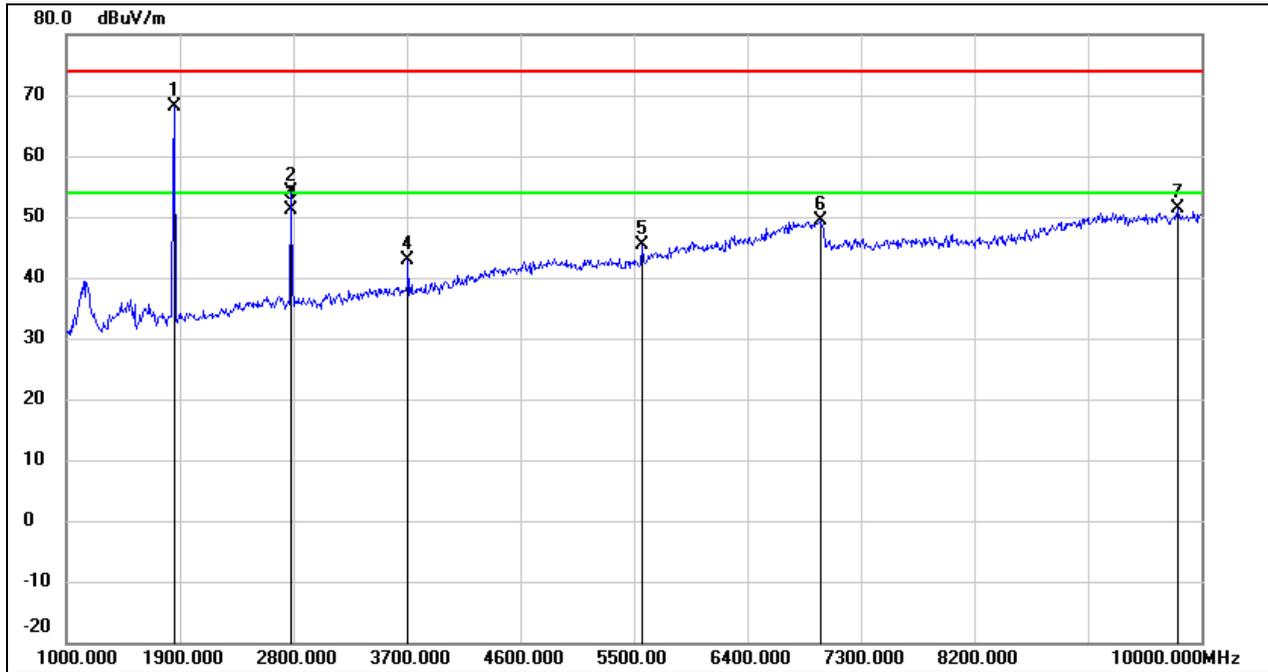

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1855.000	79.53	-11.45	68.08	74.00	-5.92	peak
2	2782.000	61.72	-7.56	54.16	74.00	-19.84	peak
3	2782.000	58.69	-7.56	51.13	54.00	-2.87	AVG
4	3709.000	47.96	-5.20	42.76	74.00	-31.24	peak
5	5563.000	44.45	0.88	45.33	74.00	-28.67	peak
6	6976.000	43.55	5.72	49.27	74.00	-24.73	peak
7	9811.000	40.82	10.68	51.50	74.00	-22.50	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: VBW=1/Ton where: ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 7.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

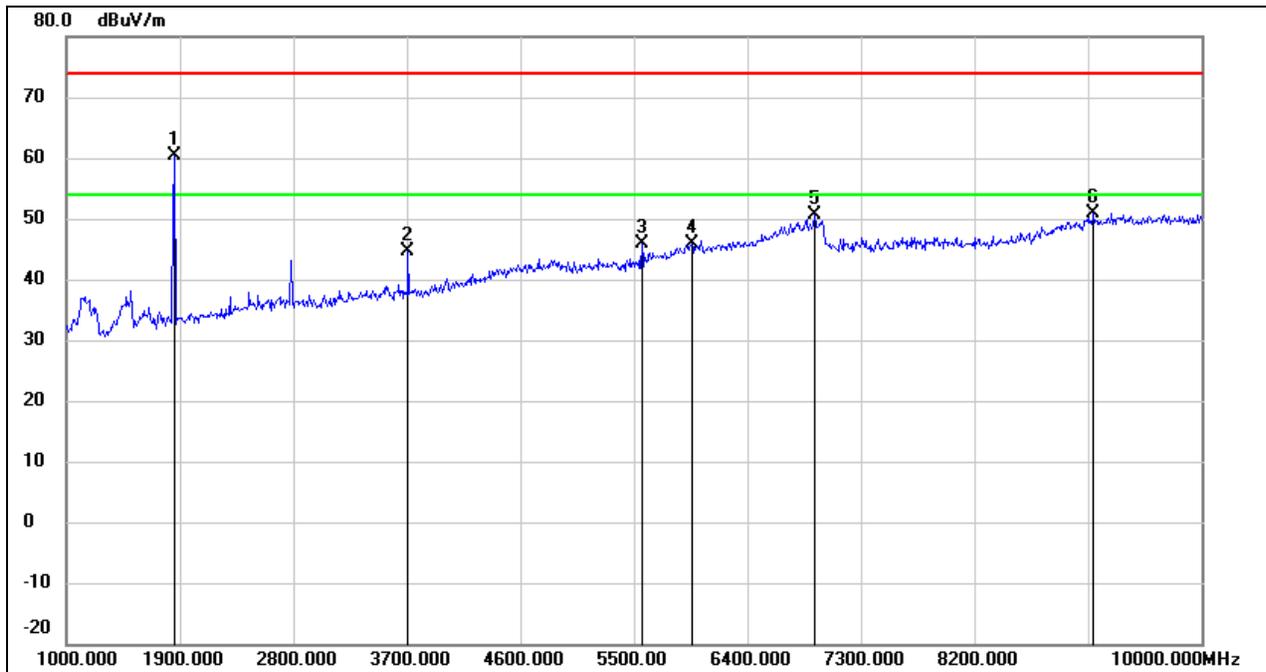HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1855.000	71.94	-11.45	60.49	74.00	-13.51	peak
2	3709.000	49.72	-5.20	44.52	74.00	-29.48	peak
3	5563.000	45.07	0.88	45.95	74.00	-28.05	peak
4	5959.000	43.75	2.21	45.96	74.00	-28.04	peak
5	6931.000	45.06	5.51	50.57	74.00	-23.43	peak
6	9145.000	41.01	9.75	50.76	74.00	-23.24	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

8.1.2. FSK - 250 kbps MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

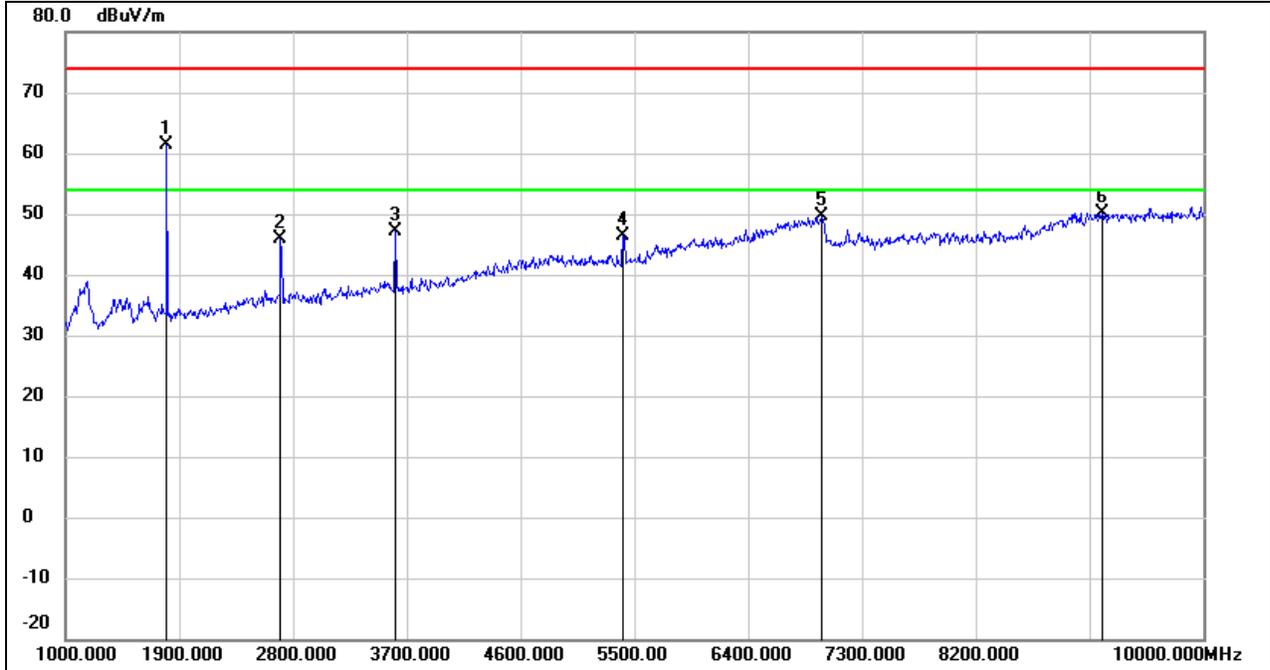

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1801.000	72.98	-11.61	61.37	/	/	peak
2	2701.000	53.73	-7.78	45.95	74.00	-28.05	peak
3	3610.000	52.63	-5.47	47.16	74.00	-26.84	peak
4	5410.000	45.76	0.53	46.29	74.00	-27.71	peak
5	6985.000	43.76	5.76	49.52	74.00	-24.48	peak
6	9199.000	40.41	9.80	50.21	74.00	-23.79	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

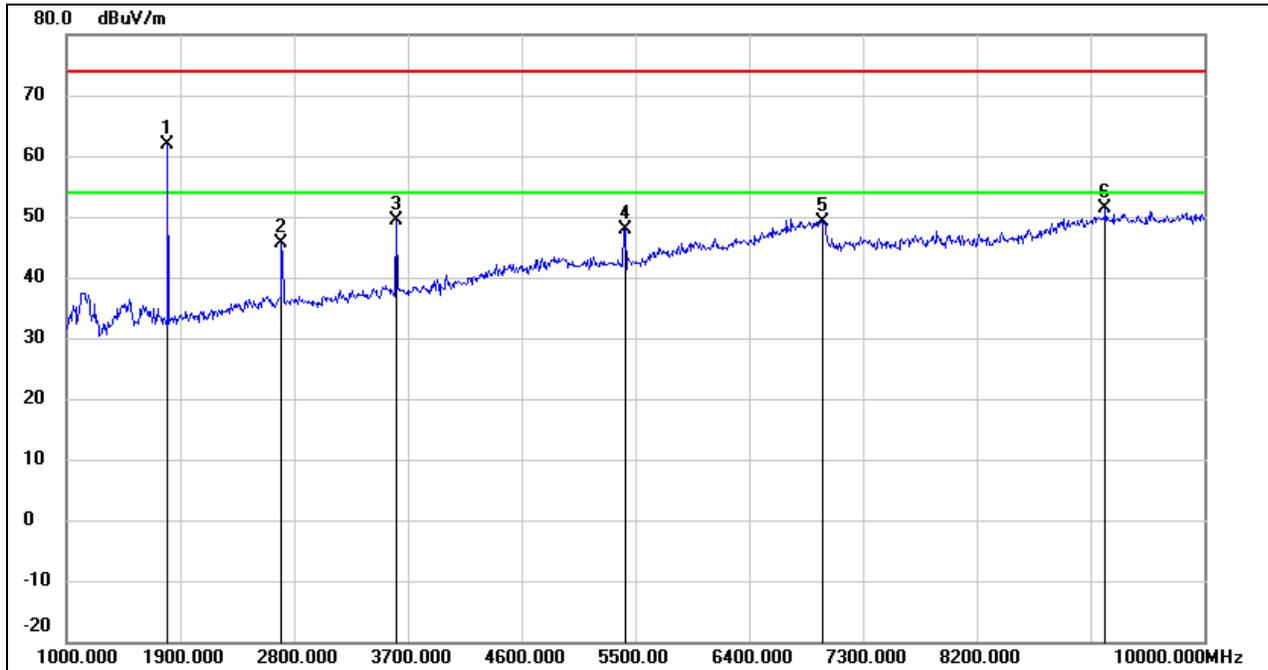**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1801.000	73.45	-11.61	61.84	/	/	peak
2	2701.000	53.50	-7.78	45.72	74.00	-28.28	peak
3	3610.000	54.91	-5.47	49.44	74.00	-24.56	peak
4	5419.000	47.30	0.55	47.85	74.00	-26.15	peak
5	6976.000	43.46	5.72	49.18	74.00	-24.82	peak
6	9217.000	41.53	9.82	51.35	74.00	-22.65	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

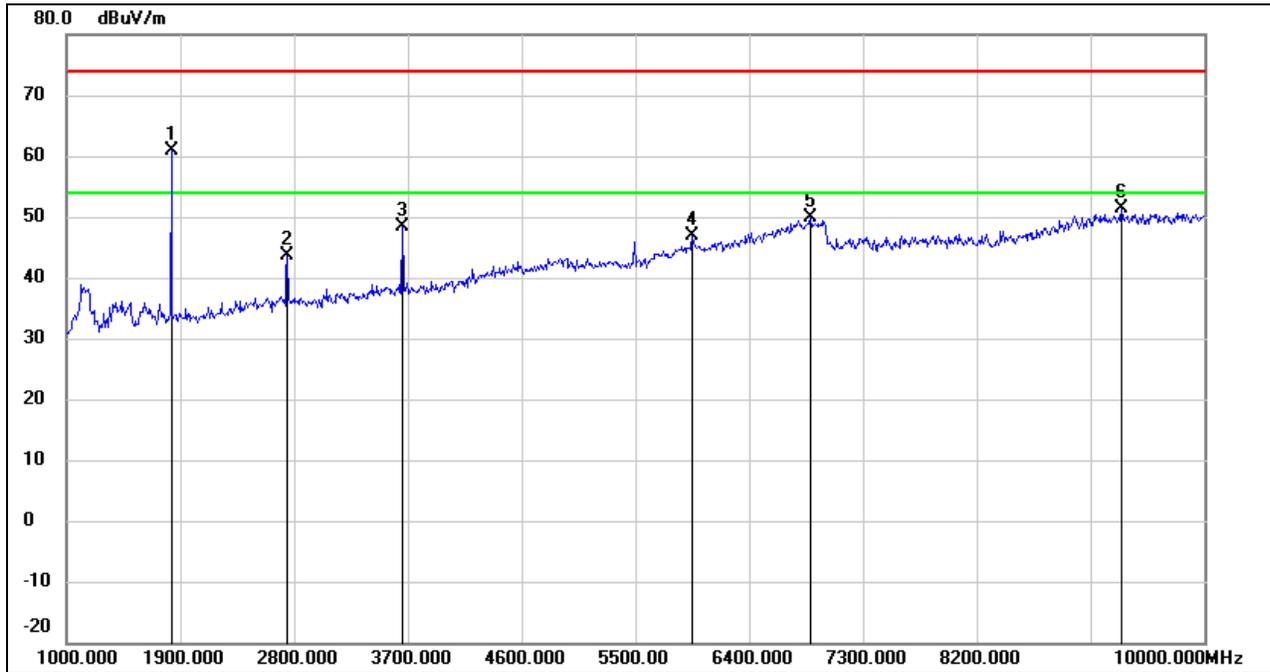

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1828.000	72.51	-11.52	60.99	/	/	peak
2	2746.000	51.28	-7.67	43.61	74.00	-30.39	peak
3	3655.000	53.61	-5.35	48.26	74.00	-25.74	peak
4	5950.000	44.64	2.17	46.81	74.00	-27.19	peak
5	6886.000	44.68	5.29	49.97	74.00	-24.03	peak
6	9343.000	41.44	9.94	51.38	74.00	-22.62	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

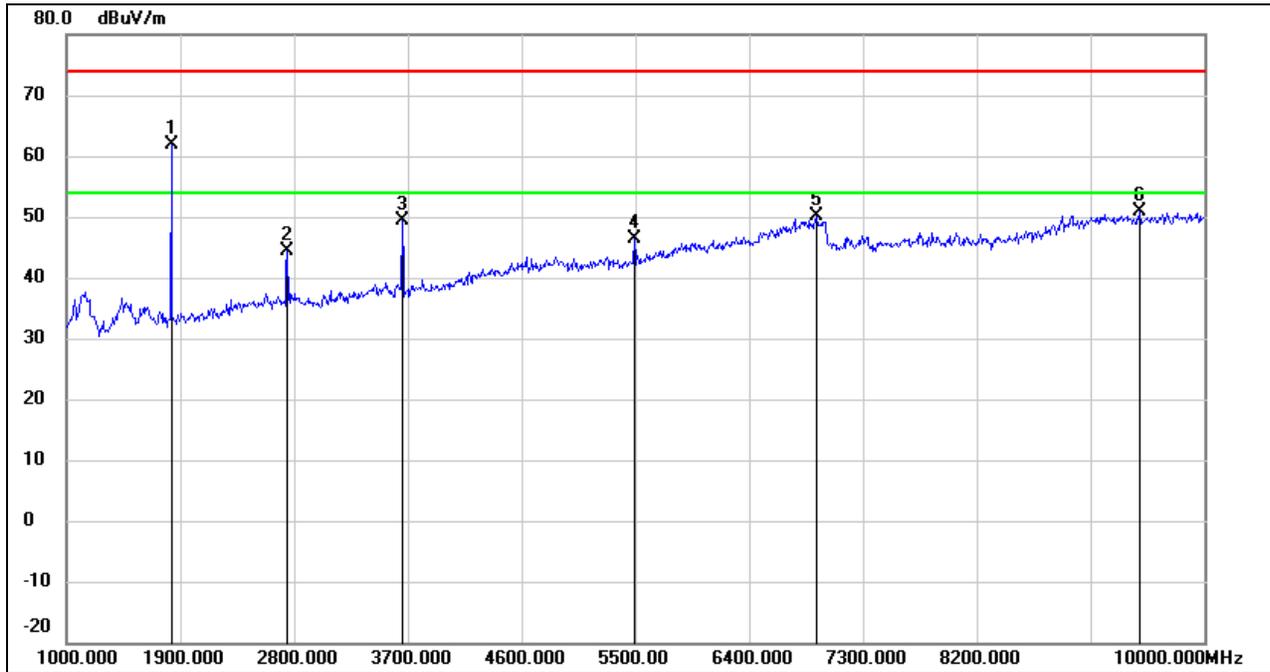

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1828.000	73.50	-11.52	61.98	/	/	peak
2	2746.000	52.15	-7.67	44.48	74.00	-29.52	peak
3	3655.000	54.76	-5.35	49.41	74.00	-24.59	peak
4	5491.000	45.70	0.65	46.35	74.00	-27.65	peak
5	6931.000	44.54	5.51	50.05	74.00	-23.95	peak
6	9487.000	40.70	10.08	50.78	74.00	-23.22	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

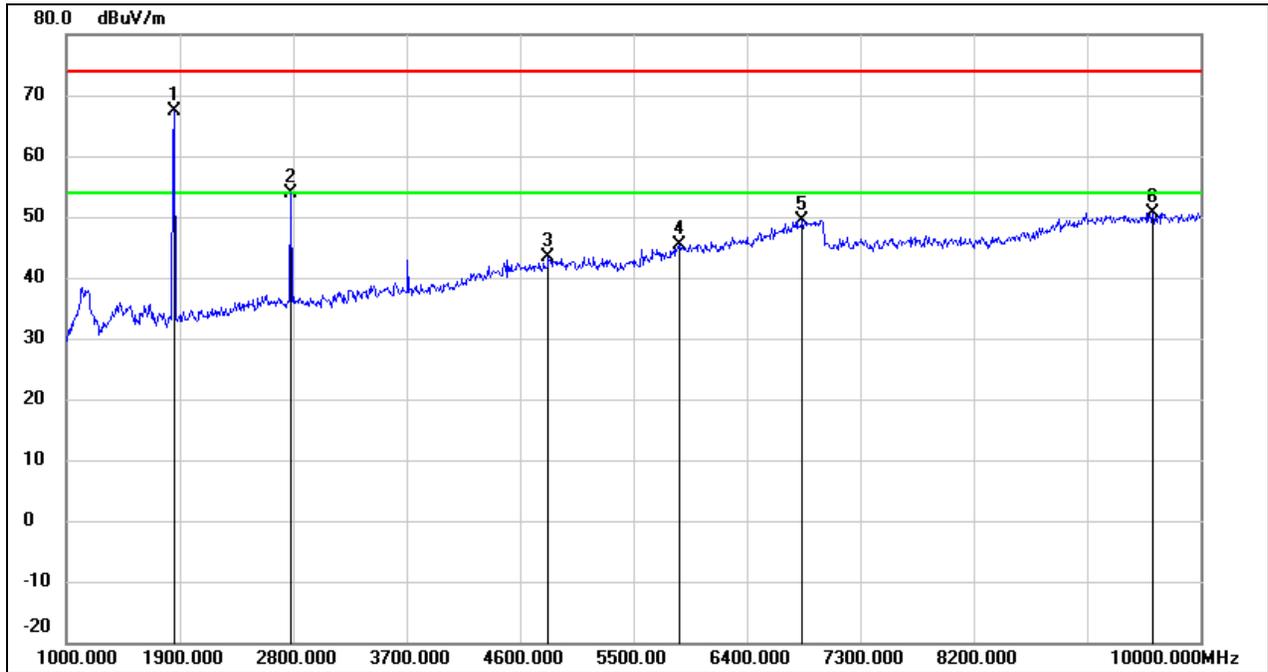

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1855.000	78.95	-11.45	67.50	74.00	-6.50	peak
2	2782.000	61.36	-7.56	53.80	74.00	-20.20	peak
3	4825.000	44.15	-0.77	43.38	74.00	-30.62	peak
4	5860.000	43.49	1.88	45.37	74.00	-28.63	peak
5	6841.000	44.38	5.07	49.45	74.00	-24.55	peak
6	9622.000	40.40	10.32	50.72	74.00	-23.28	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

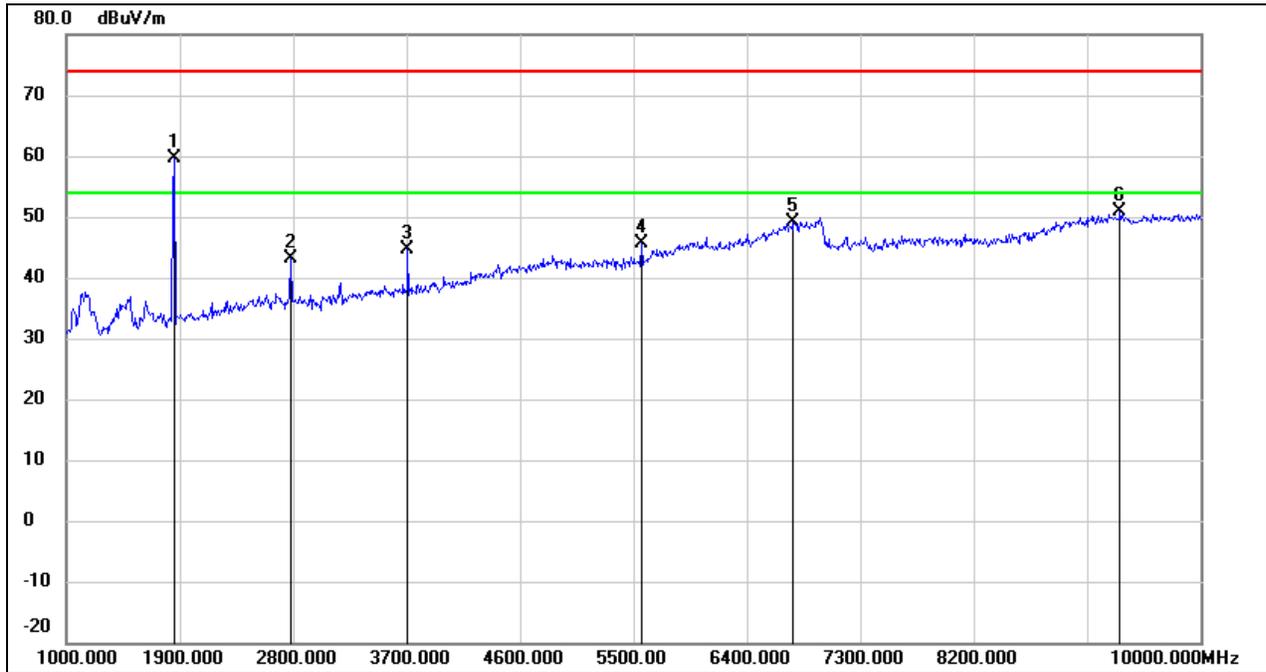HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1855.000	70.96	-11.45	59.51	74.00	-14.49	peak
2	2782.000	50.70	-7.56	43.14	74.00	-30.86	peak
3	3709.000	49.88	-5.20	44.68	74.00	-29.32	peak
4	5563.000	44.74	0.88	45.62	74.00	-28.38	peak
5	6769.000	44.50	4.73	49.23	74.00	-24.77	peak
6	9361.000	40.82	9.96	50.78	74.00	-23.22	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


5.*-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.7.

Note: All the modes and channels have been tested, only the worst data was recorded in the report.

8.2. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

8.2.1. FSK - 250 kbps MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

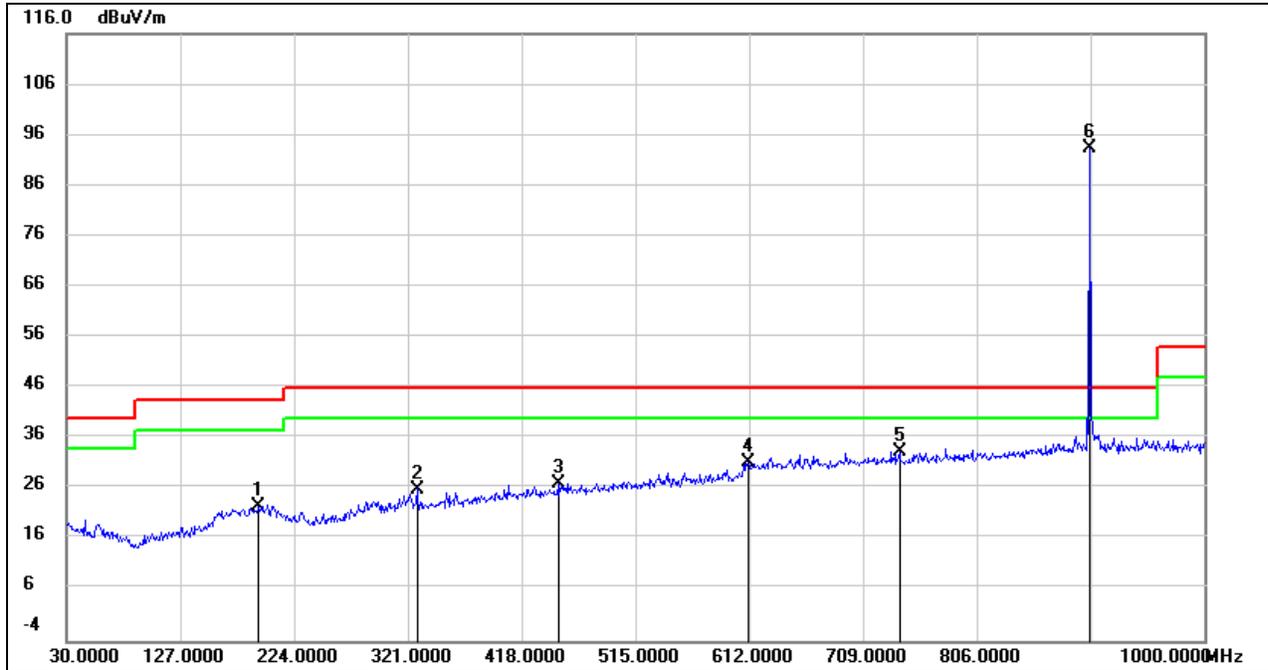


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	193.9299	39.21	-16.51	22.70	43.50	-20.80	QP
2	328.7600	40.69	-14.69	26.00	46.00	-20.00	QP
3	449.0400	39.65	-12.50	27.15	46.00	-18.85	QP
4	611.0300	40.58	-9.41	31.17	46.00	-14.83	QP
5	740.0400	41.17	-7.90	33.27	46.00	-12.73	QP
6	902.0300	98.41	-5.16	93.25	/	/	Fundamental

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

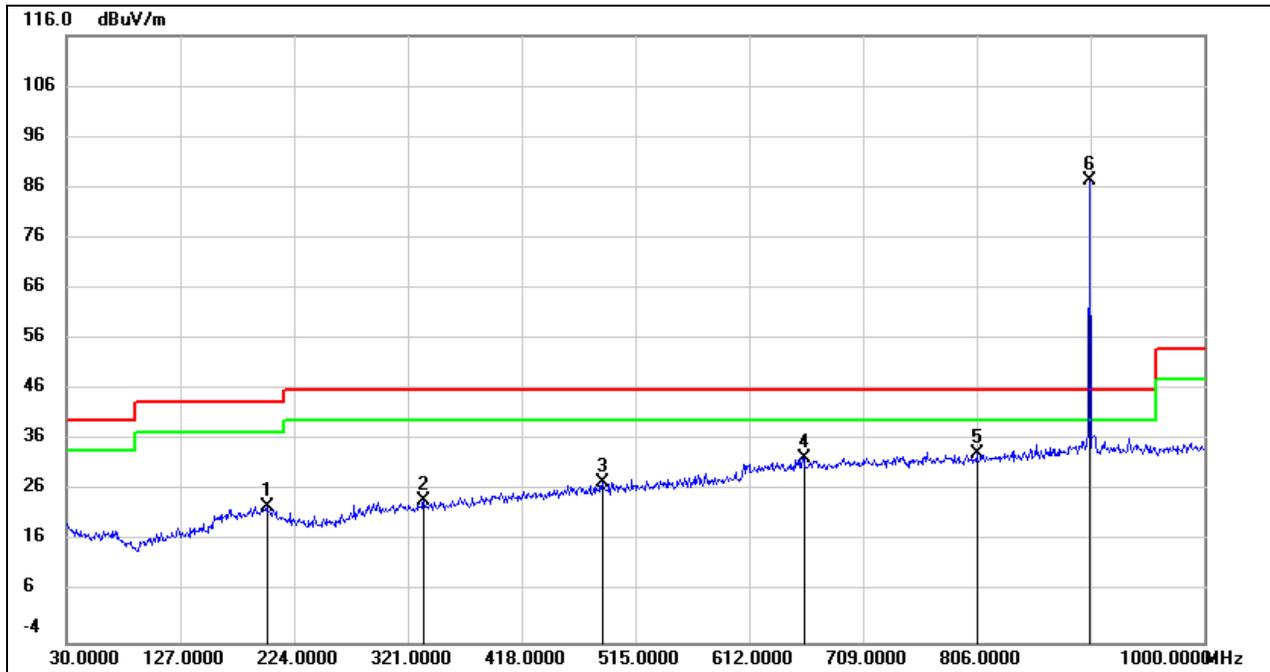

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	200.7200	39.39	-16.43	22.96	43.50	-20.54	QP
2	334.5799	38.66	-14.57	24.09	46.00	-21.91	QP
3	486.8700	39.40	-11.74	27.66	46.00	-18.34	QP
4	658.5600	41.32	-8.73	32.59	46.00	-13.41	QP
5	806.0000	40.53	-7.22	33.31	46.00	-12.69	QP
6	902.0300	95.60	-5.16	90.44	/	/	Fundamental

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes and channels have been tested, only the worst data was recorded in the report.

8.3. SPURIOUS EMISSIONS BELOW 30 MHz

8.3.1. FSK - 250 kbps MODE

SPURIOUS EMISSIONS (HIGH CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

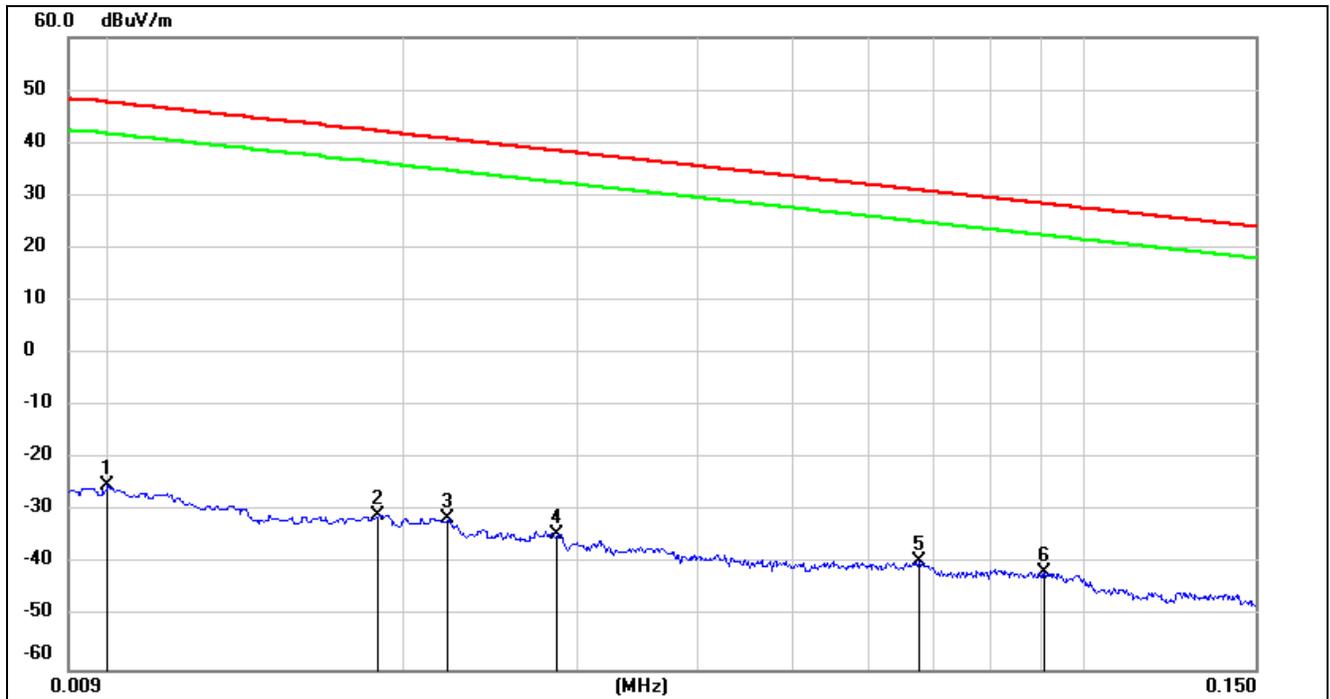


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	76.22	-101.40	-25.18	47.6	-76.68	-3.90	-72.78	peak
2	0.0188	70.64	-101.35	-30.71	42.12	-82.21	-9.38	-72.83	peak
3	0.0221	70.13	-101.35	-31.22	40.71	-82.72	-10.79	-71.93	peak
4	0.0286	66.96	-101.38	-34.42	38.47	-85.92	-13.03	-72.89	peak
5	0.0675	62.14	-101.56	-39.42	31.02	-90.92	-20.48	-70.44	peak
6	0.0911	60.11	-101.72	-41.61	28.41	-93.11	-23.09	-70.02	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150 kHz ~ 490 kHz

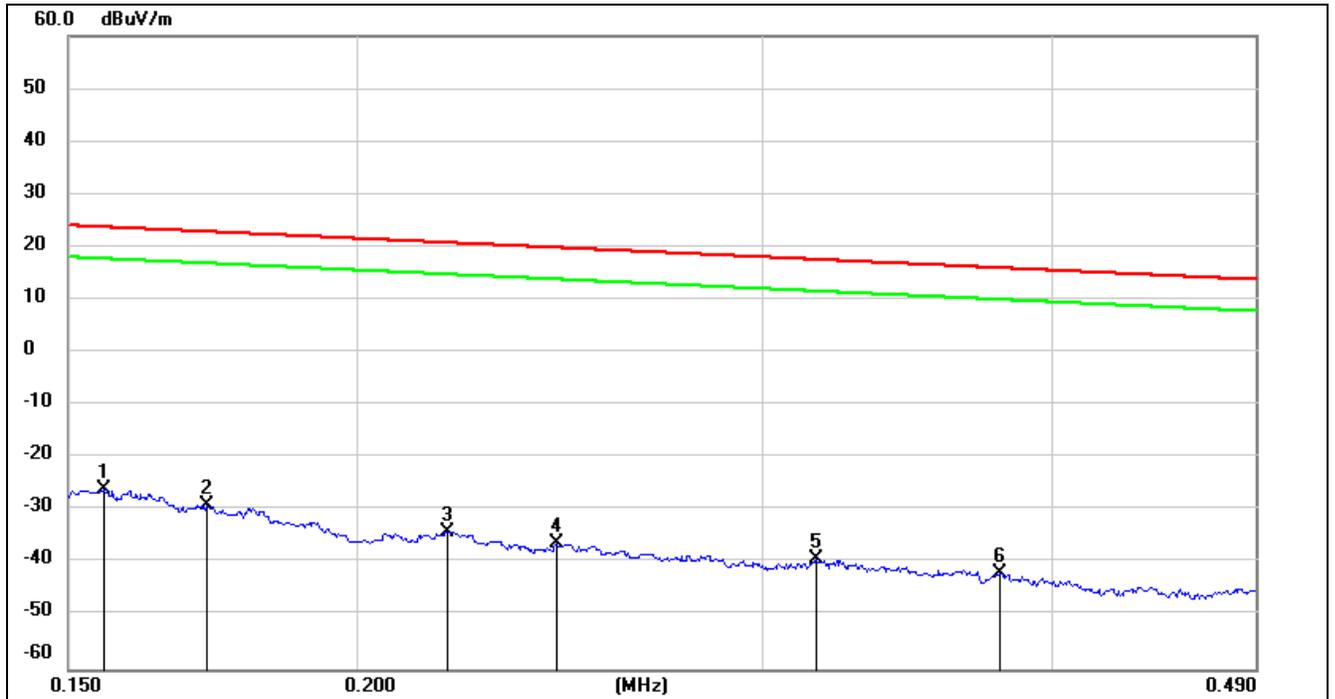


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	75.77	-101.65	-25.88	23.77	-77.38	-27.73	-49.65	peak
2	0.1720	72.69	-101.67	-28.98	22.9	-80.48	-28.60	-51.88	peak
3	0.2190	67.77	-101.75	-33.98	20.79	-85.48	-30.71	-54.77	peak
4	0.2442	65.53	-101.79	-36.26	19.85	-87.76	-31.65	-56.11	peak
5	0.3163	62.70	-101.87	-39.17	17.6	-90.67	-33.90	-56.77	peak
6	0.3800	60.02	-101.94	-41.92	16.01	-93.42	-35.49	-57.93	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

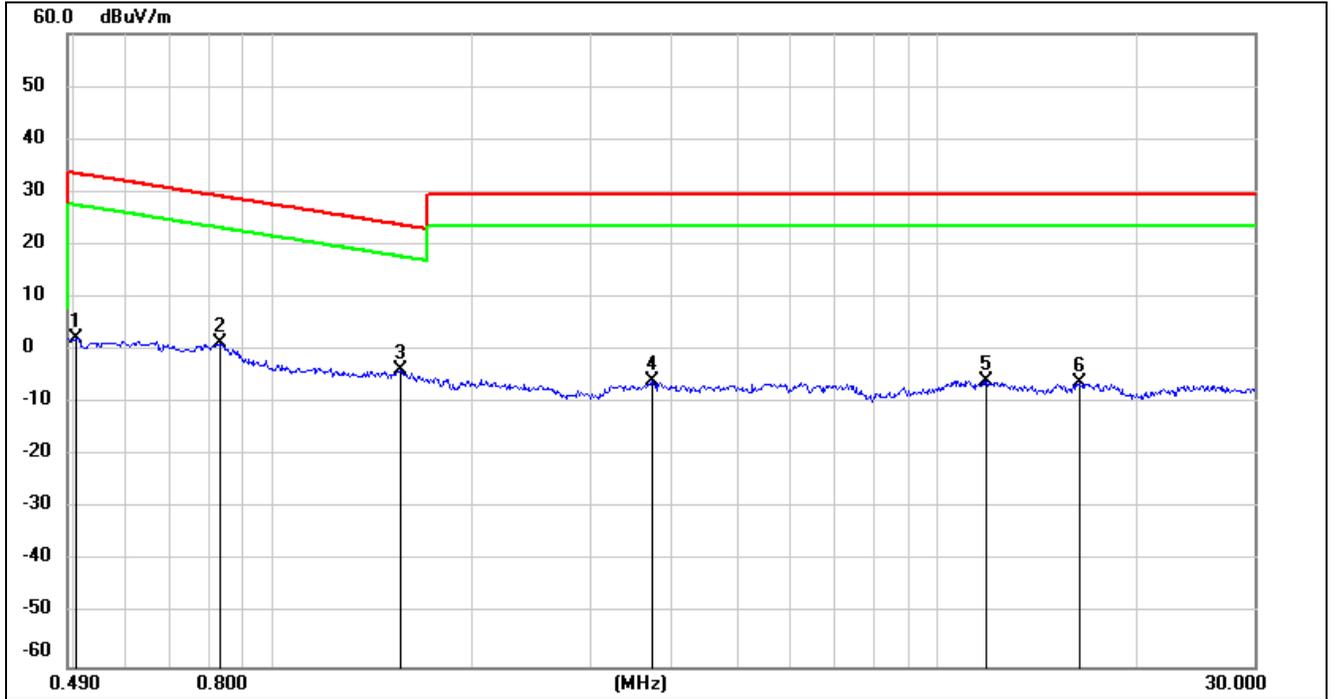

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	64.43	-62.07	2.36	33.56	-49.14	-17.94	-31.20	peak
2	0.8296	63.44	-62.17	1.27	29.23	-50.23	-22.27	-27.96	peak
3	1.5564	58.18	-62.02	-3.84	23.76	-55.34	-27.74	-27.60	peak
4	3.7100	55.70	-61.41	-5.71	29.54	-57.21	-21.96	-35.25	peak
5	11.8513	55.06	-60.88	-5.82	29.54	-57.32	-21.96	-35.36	peak
6	16.3959	54.67	-60.96	-6.29	29.54	-57.79	-21.96	-35.83	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes and channels have been tested, only the worst data was recorded in the report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies



APPENDIX A: DUTY CYCLE

Test Result

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
FSK-50 kbps	100	100	0.1	100	0	0.01	0.01
FSK-150 kbps	100	100	0.1	100	0	0.01	0.01
FSK-250 kbps	100	100	0.1	100	0	0.01	0.01

Note:

Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)


Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.




Test Graphs

FSK-50 kbps

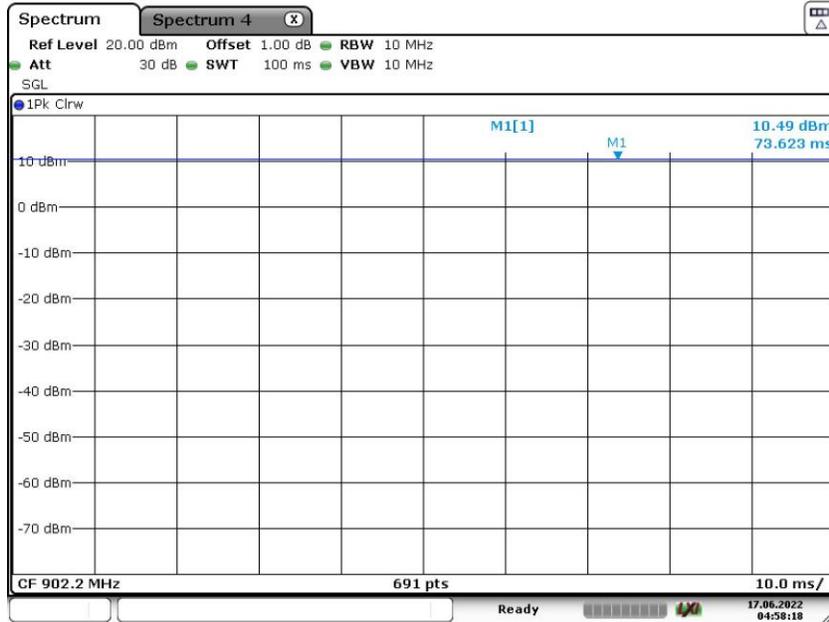

Date: 17.JUN.2022 04:58:18


FSK-150 kbps

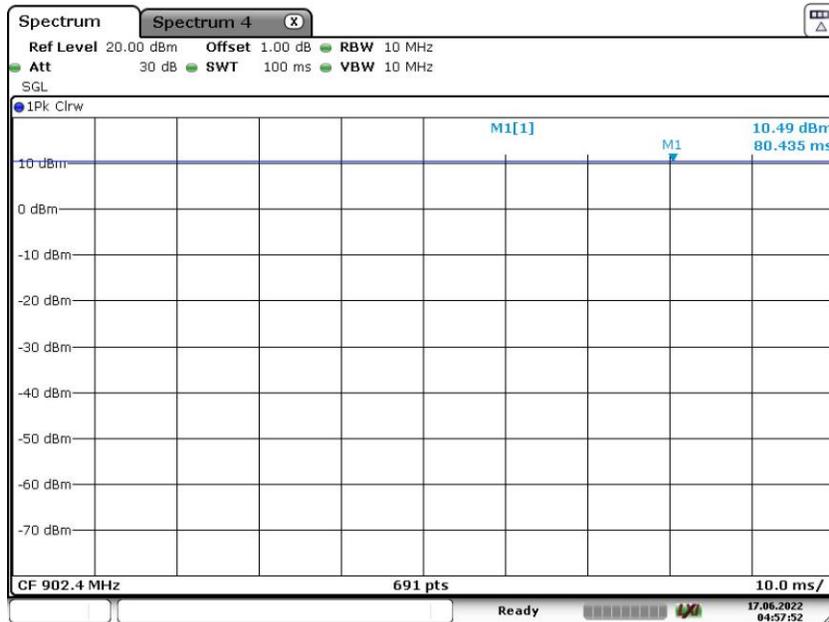

Date: 17.JUN.2022 04:57:52



FSK-250 kbps

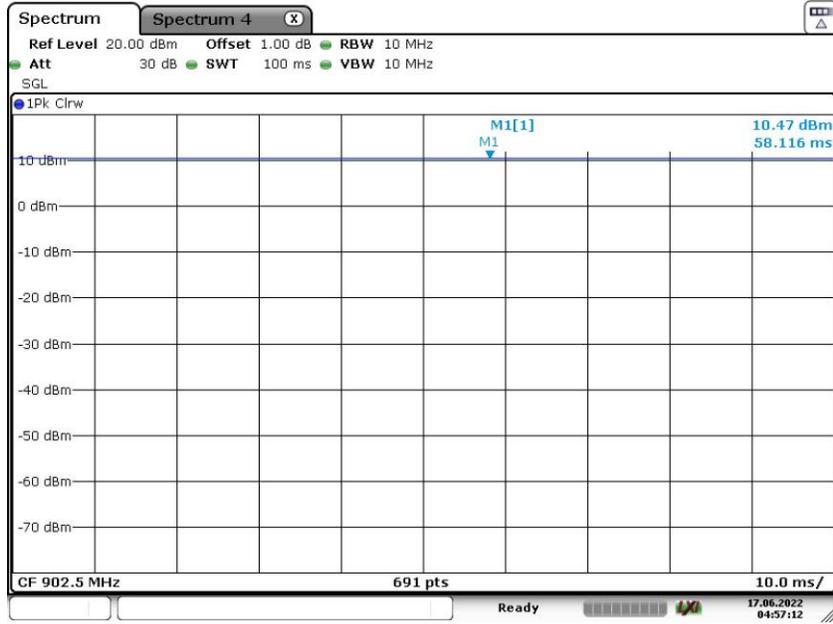

Date: 17.JUN.2022 04:57:13




APPENDIX B: 20DB BANDWIDTH

Test Result


Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[kHz]	Verdict
FSK-50 kbps	Ant1	Low	0.08833	≤500	PASS
		Mid	0.08821	≤500	PASS
		High	0.08814	≤500	PASS
FSK-150 kbps	Ant1	Low	0.3457	≤500	PASS
		Mid	0.3454	≤500	PASS
		High	0.3430	≤500	PASS
FSK-250 kbps	Ant1	Low	0.3741	≤500	PASS
		Mid	0.3714	≤500	PASS
		High	0.3714	≤500	PASS

Test Graphs

FSK-50 kbps-Low CH

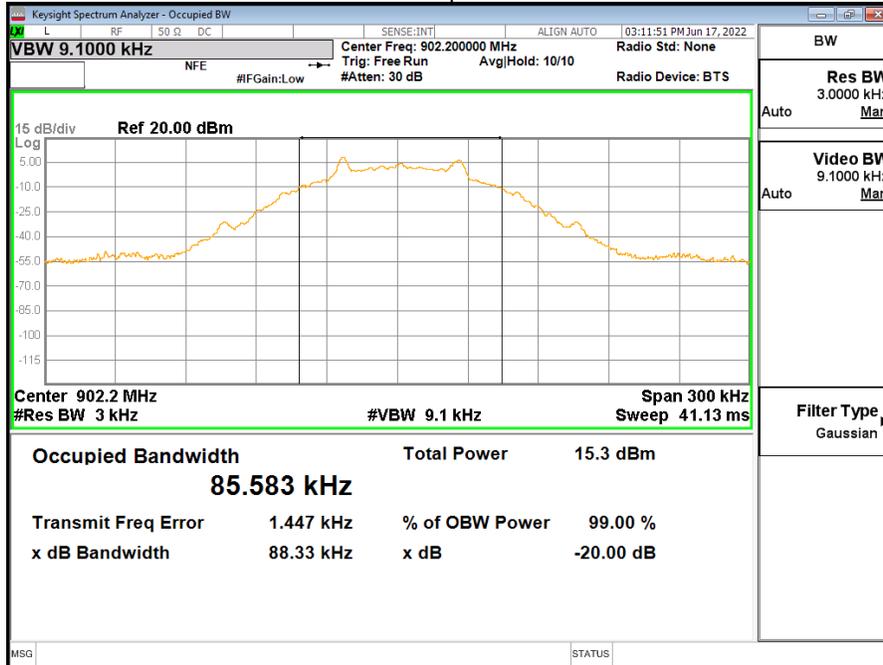


FSK-50 kbps-Mid CH

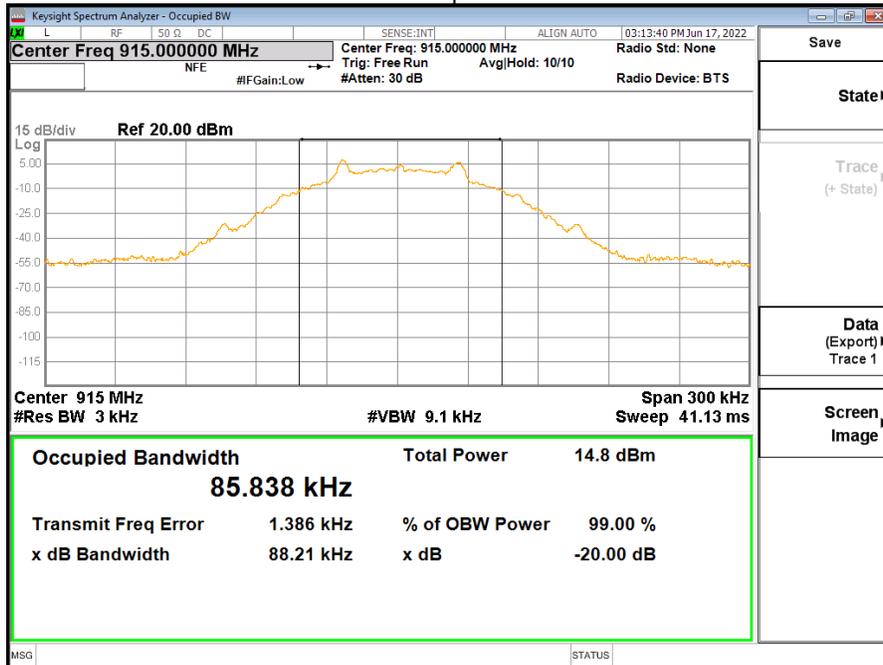




FSK-50 kbps-High CH

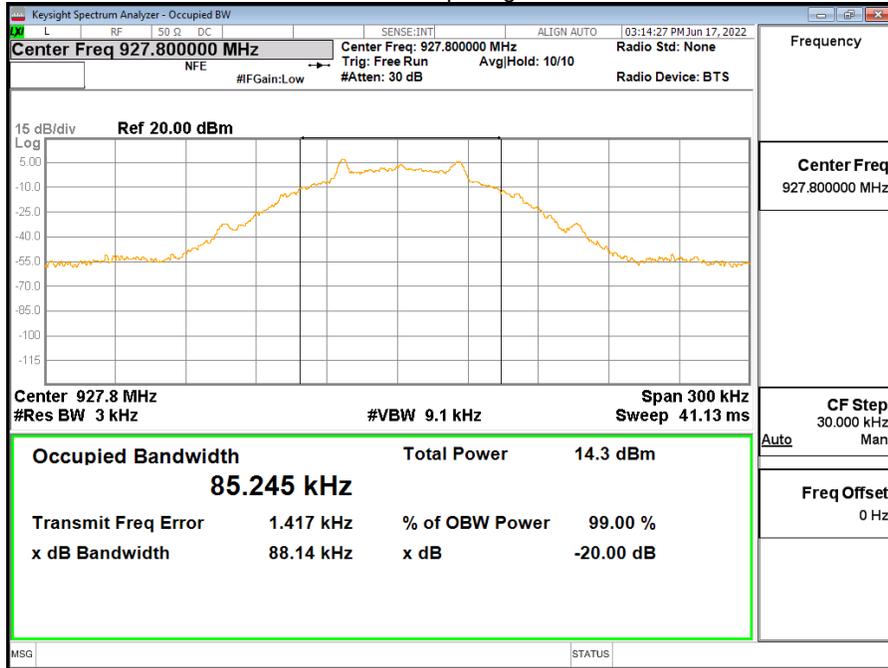


FSK-150 kbps-Low CH

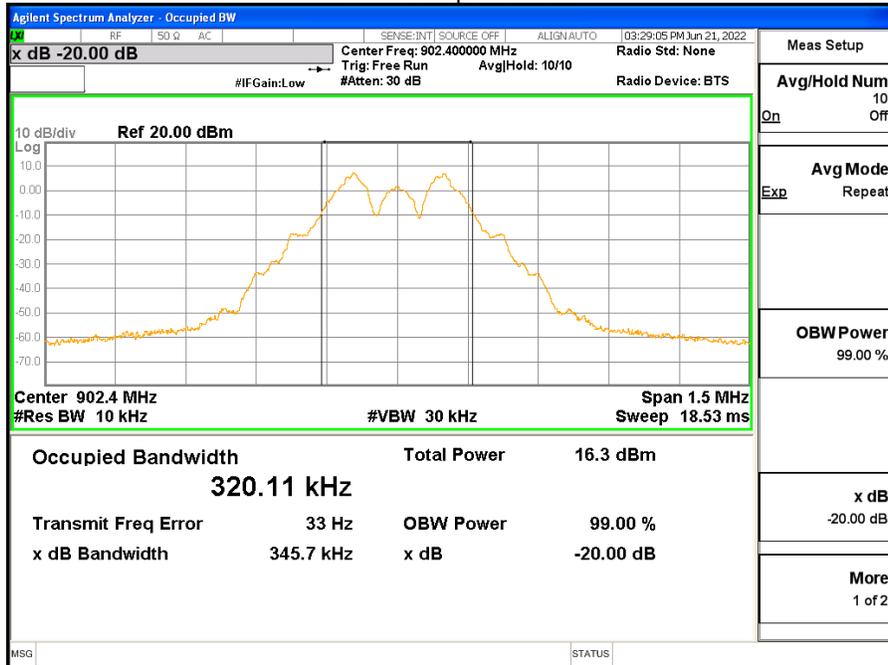




FSK-150 kbps-Mid CH

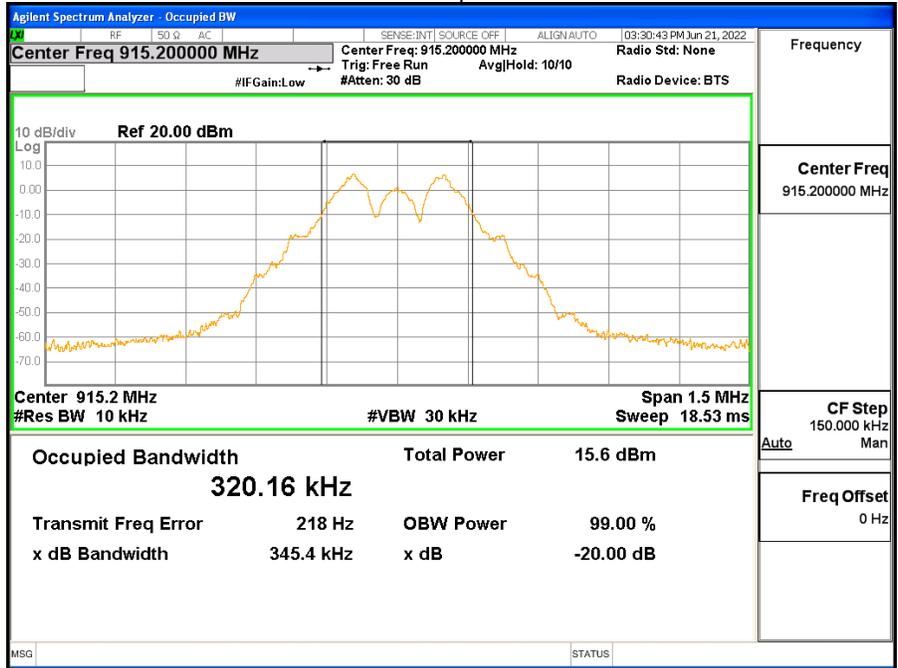


FSK-150 kbps-High CH

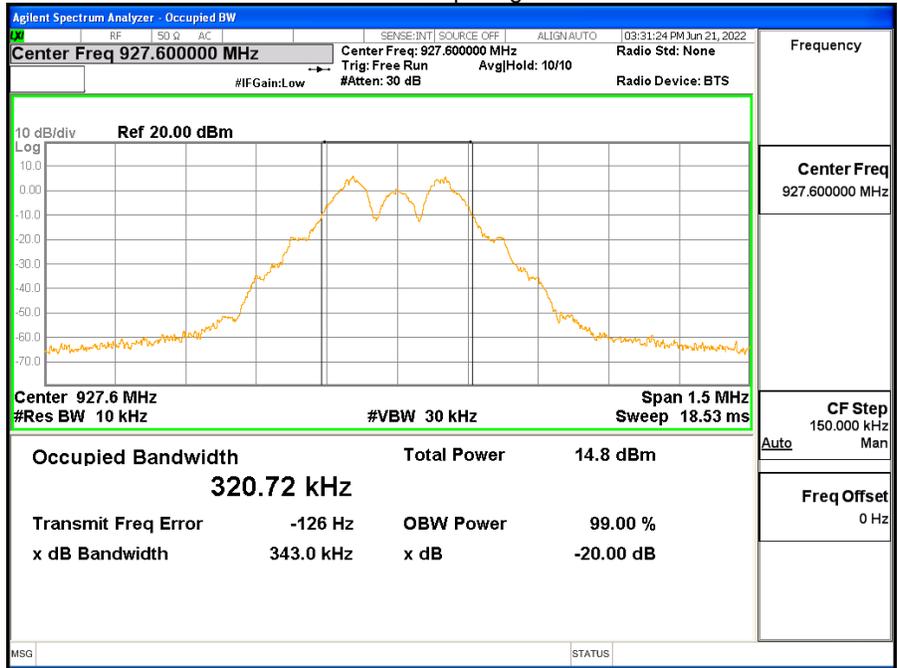




FSK-250 kbps-Low CH

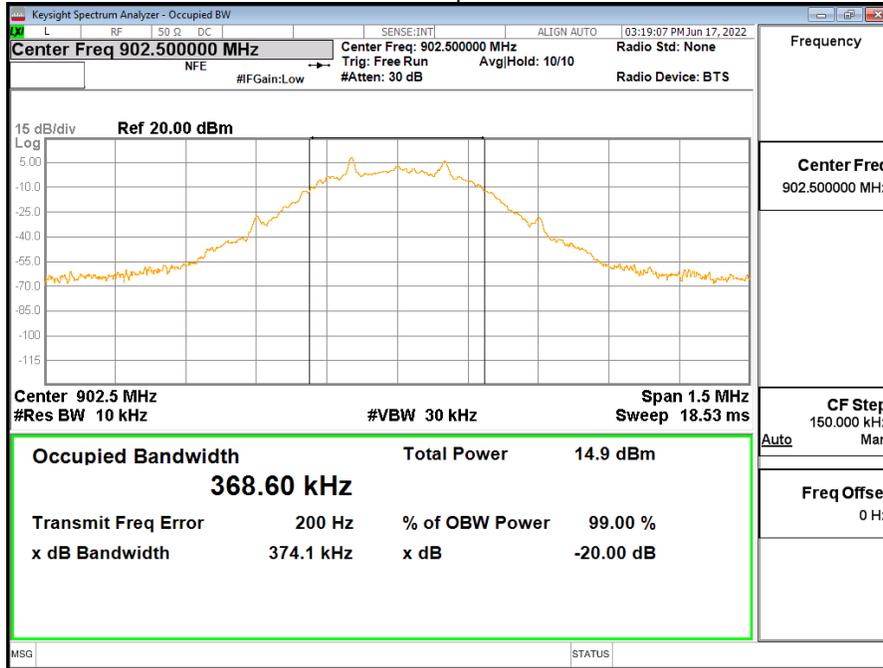


FSK-250 kbps-Mid CH

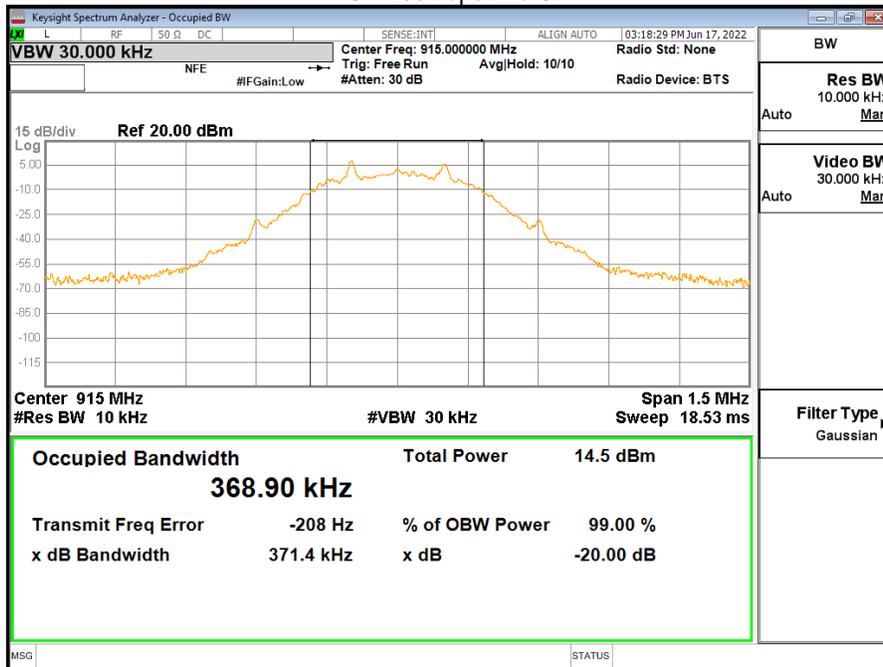



FSK-250 kbps-High CH

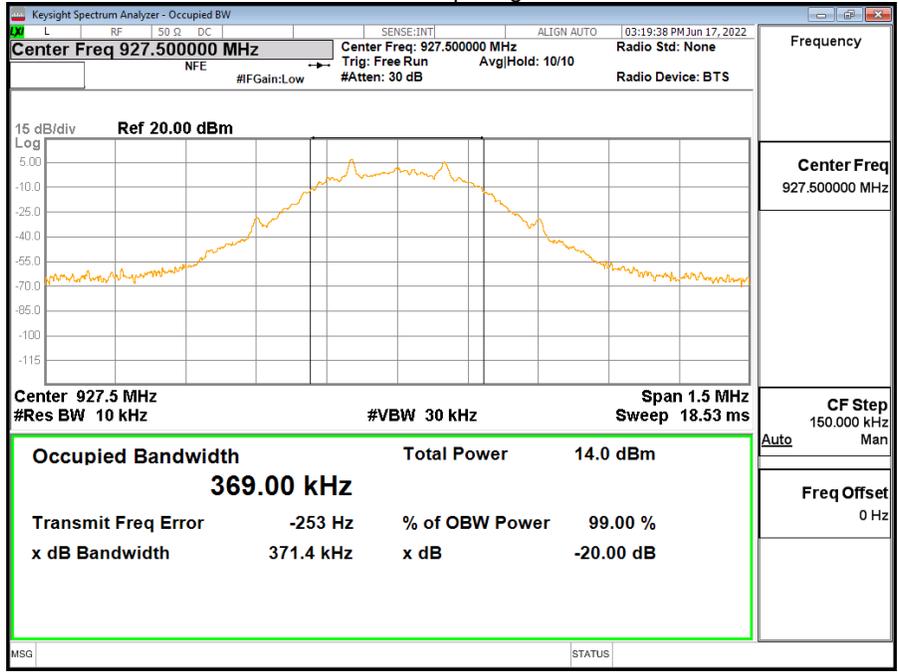



APPENDIX C: OCCUPIED CHANNEL BANDWIDTH

Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Verdict
FSK-50 kbps	Ant1	Low	0.08558	PASS
		Mid	0.08584	PASS
		High	0.08525	PASS
FSK-150 kbps	Ant1	Low	0.32011	PASS
		Mid	0.32016	PASS
		High	0.32072	PASS
FSK-250 kbps	Ant1	Low	0.36860	PASS
		Mid	0.36890	PASS
		High	0.36900	PASS

Note: For the test graphs, please refer to appendix B




APPENDIX D: PEAK CONDUCTED OUTPUT POWER

Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
FSK-50 kbps	Ant1	Low	14.43	<=30	PASS
		Mid	14.00	<=30	PASS
		High	13.51	<=30	PASS
FSK-150 kbps	Ant1	Low	14.43	<=30	PASS
		Mid	14.01	<=30	PASS
		High	13.53	<=30	PASS
FSK-250 kbps	Ant1	Low	14.43	<=30	PASS
		Mid	14.02	<=30	PASS
		High	13.53	<=30	PASS



FSK-150 kbps

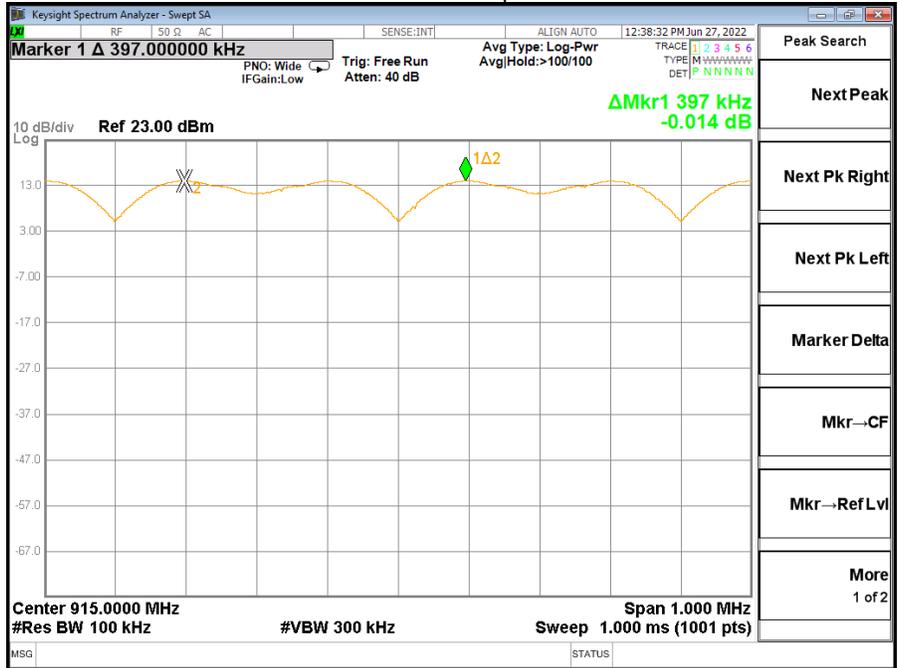

FSK-250 kbps




APPENDIX F: NUMBER OF HOPPING FREQUENCIES

Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
FSK-50 kbps	Ant1	Hop	129	>=50	PASS
FSK-150 kbps	Ant1	Hop	64	>=25	PASS
FSK-250 kbps	Ant1	Hop	51	>=25	PASS


Test Graphs

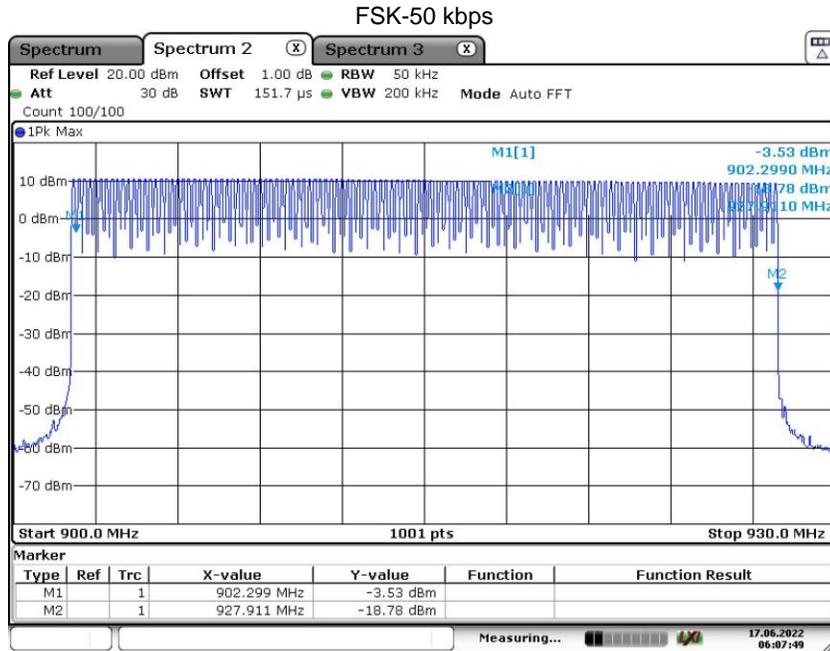

Date: 17.JUN.2022 06:07:49




FSK-150 kbps

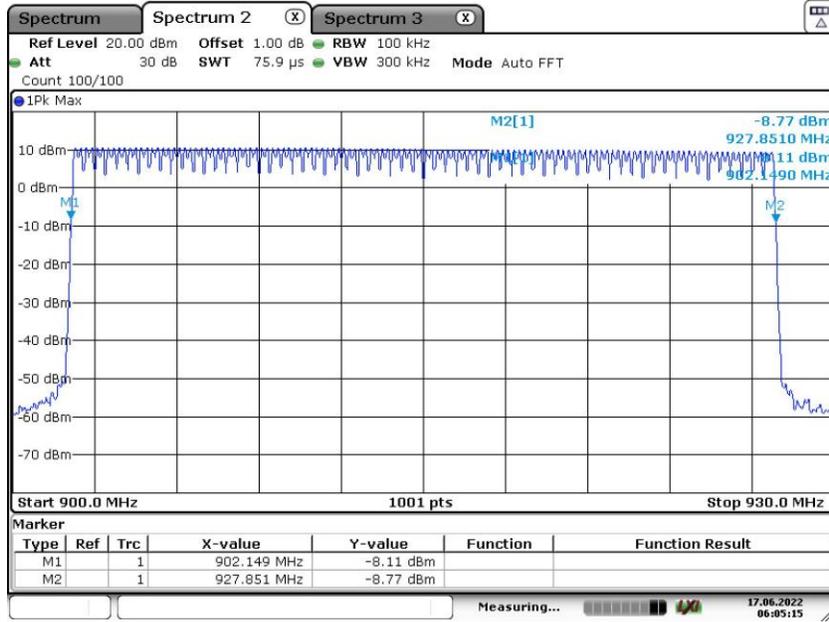

Date: 17 JUN.2022 06:05:16

FSK-250 kbps

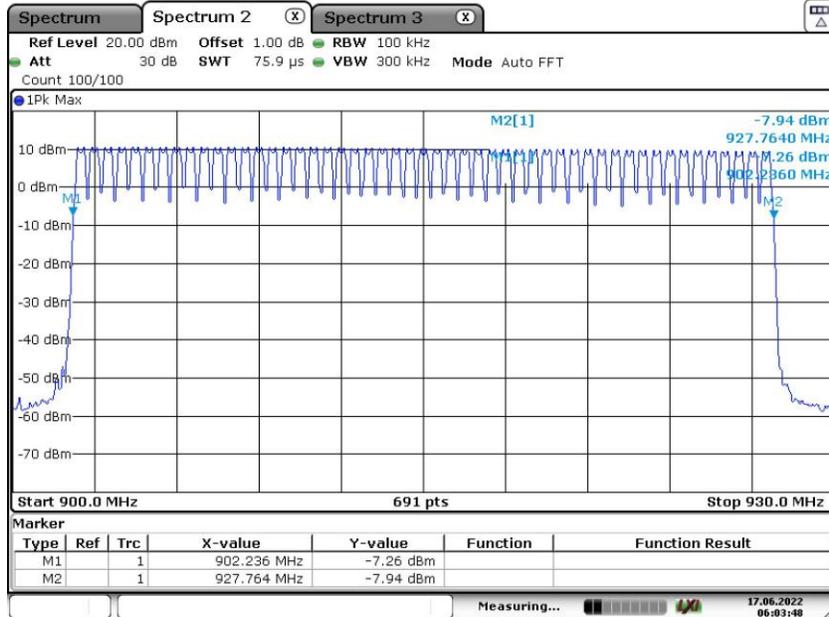

Date: 17 JUN.2022 06:03:49



APPENDIX G: TIME OF OCCUPANCY (DWELL TIME)

Test Result

Test Mode	Antenna	Channel	Burst Width [ms/hop/ch]	The number of hop channel appear	Dwell Time [s]	Limit [s]	Results
FSK-50 kbps	Ant1	Hop	63.188	2	0.13	0.4	PASS
FSK-150 kbps	Ant1	Hop	63.188	3	0.19	0.4	PASS
FSK-250 kbps	Ant1	Hop	63.188	4	0.25	0.4	PASS


Note:

FSK-50 kbps: The dwell time = Time of single slot * The number of hop channel appear within 20s

FSK-150 kbps & FSK-250 kbps: The dwell time = Time of single slot * The number of hop channel appear within 10s


Test Graphs

Time of single slot, FSK-50 kbps

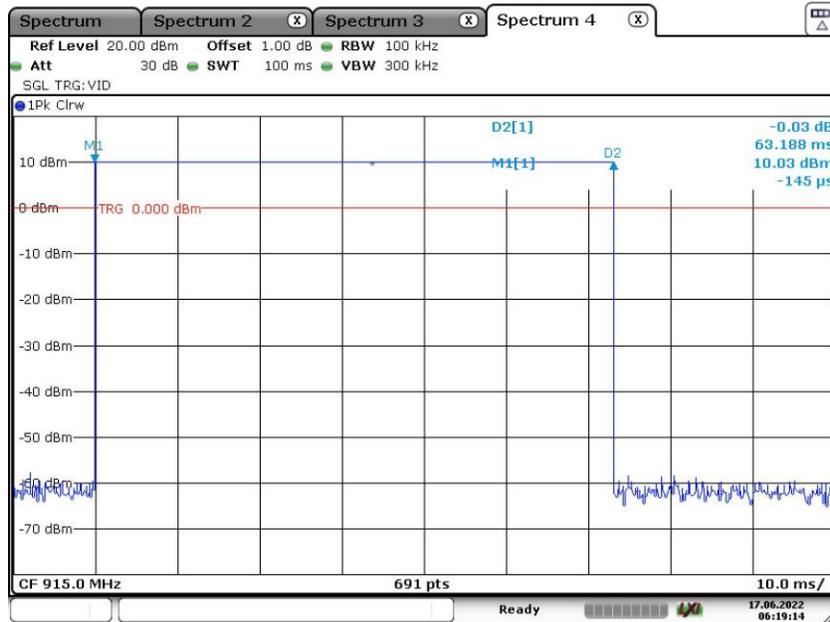

Date: 17.JUN.2022 06:19:14


The number of hop channel appear, FSK-50 kbps

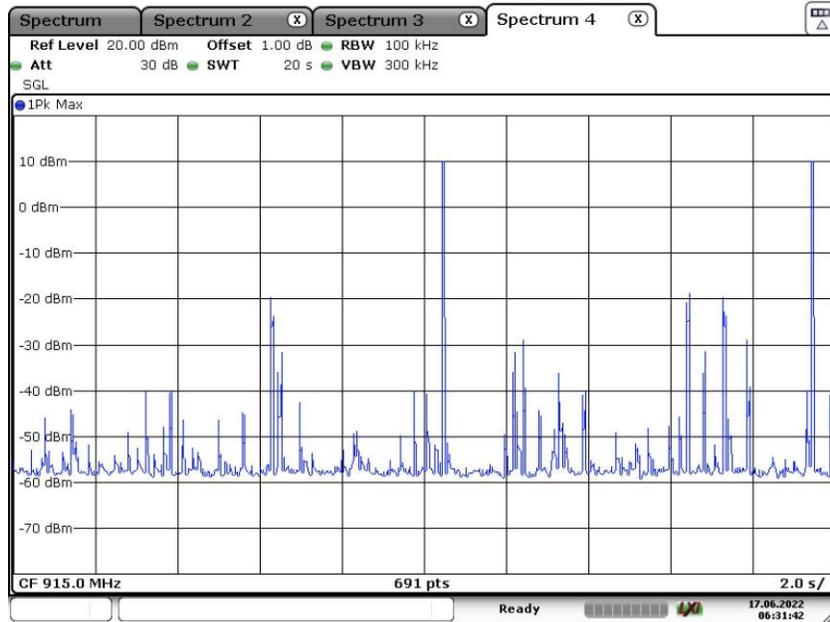

Date: 17.JUN.2022 06:31:43




Time of single slot, FSK-150 kbps

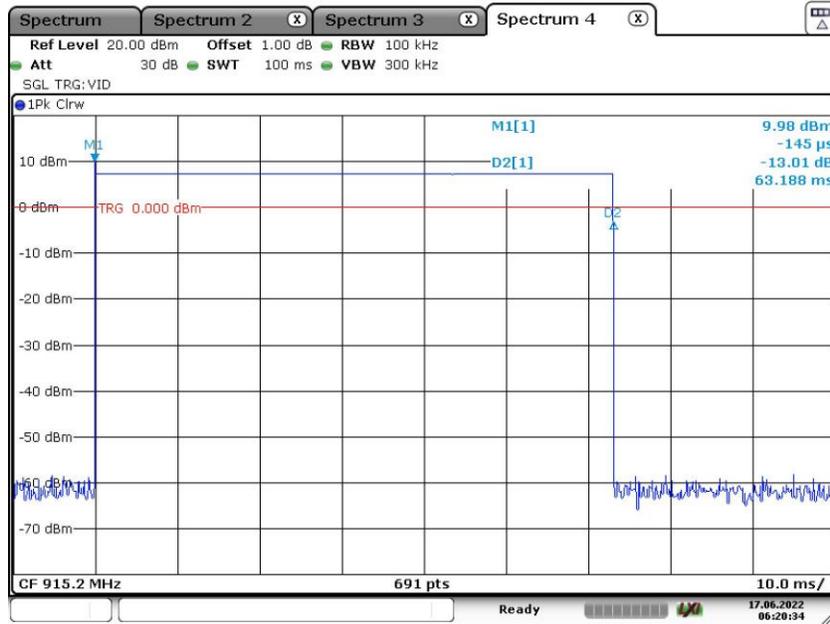


Date: 17 JUN.2022 06:20:34

The number of hop channel appear, FSK-150 kbps

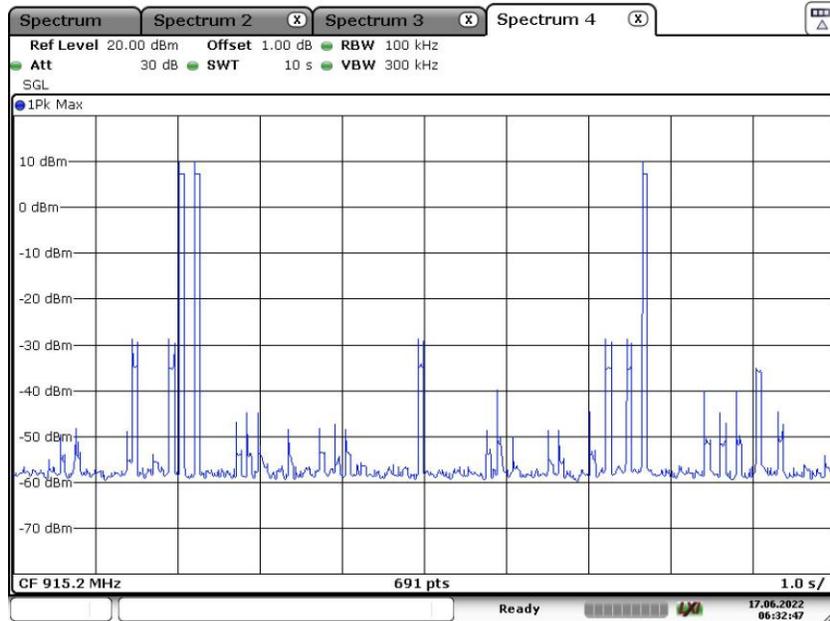


Date: 17 JUN.2022 06:32:48

Time of single slot, FSK-250 kbps

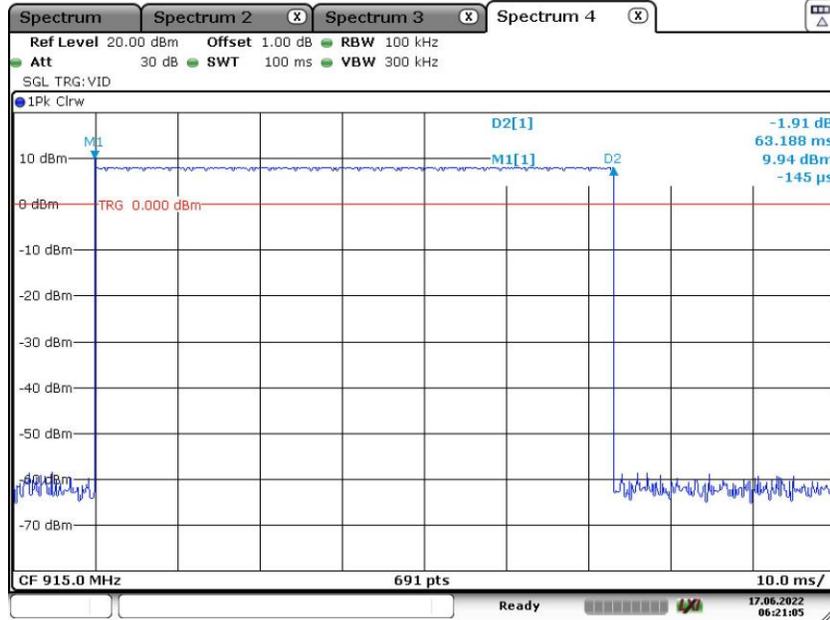

Date: 17. JUN.2022 06:21:06

The number of hop channel appear, FSK-250 kbps

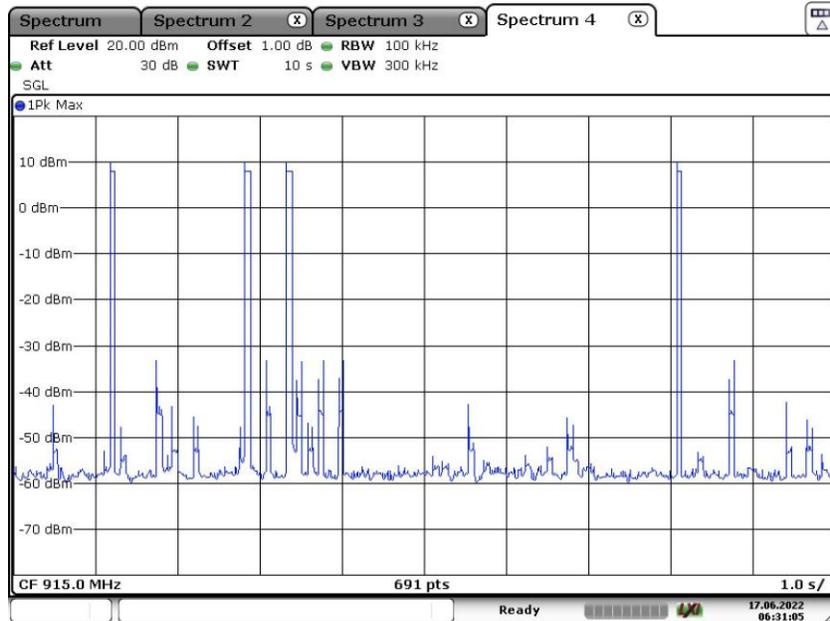

Date: 17. JUN.2022 06:31:05


**APPENDIX H: CONDUCTED SPURIOUS EMISSION****Test Result**

Test Mode	Antenna	ChName	Test Result	Verdict
FSK-50 kbps	Ant1	Low	See the below graphs	PASS
		High		PASS
		Hop_Low		PASS
		Hop_High		PASS
FSK-150 kbps	Ant1	Low		PASS
		High		PASS
		Hop_Low		PASS
		Hop_High		PASS
FSK-250 kbps	Ant1	Low		PASS
		High		PASS
		Hop_Low		PASS
		Hop_High		PASS




Test Graphs

FSK-50 kbps, Low CH, Reference

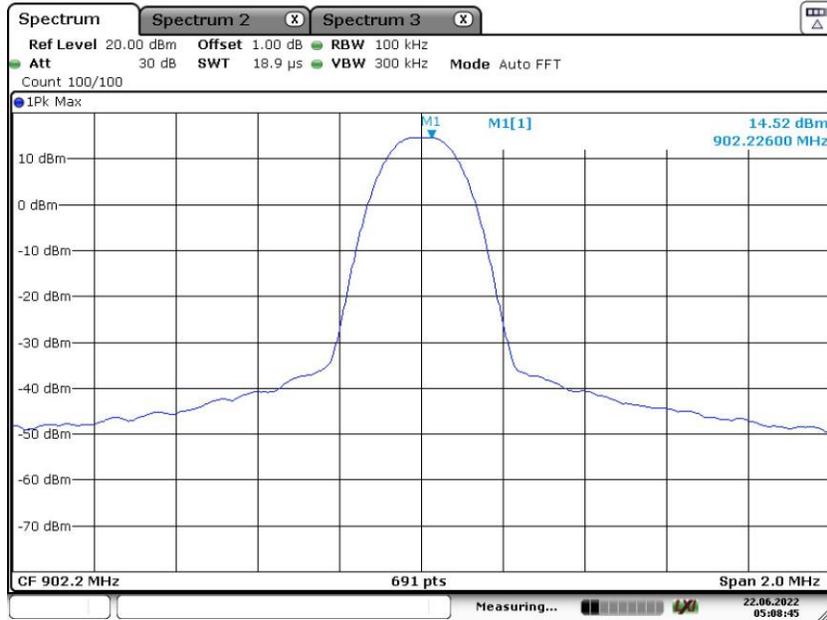

Date: 22 JUN 2022 05:08:44


FSK-50 kbps, Low CH, Bandedge

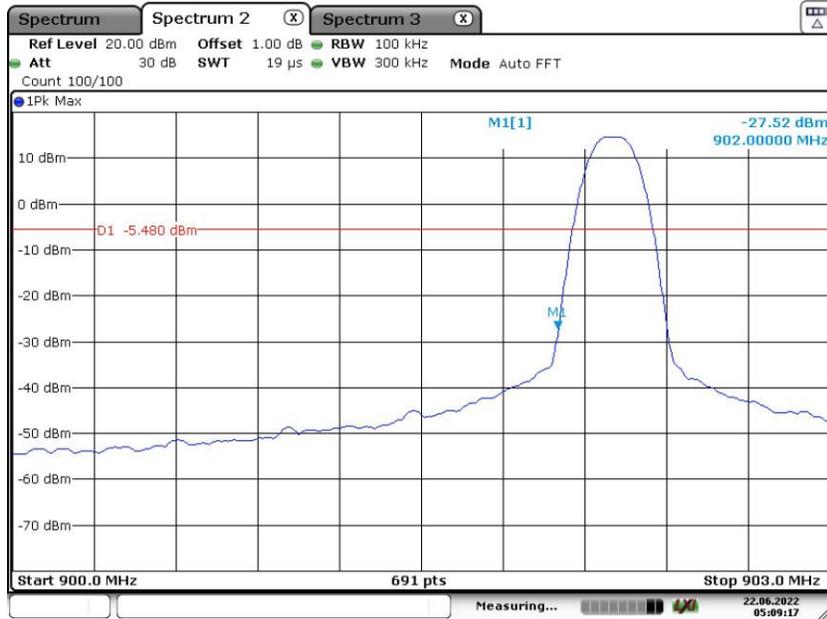

Date: 22 JUN 2022 05:09:17




FSK-50 kbps, Low CH, Hopping on

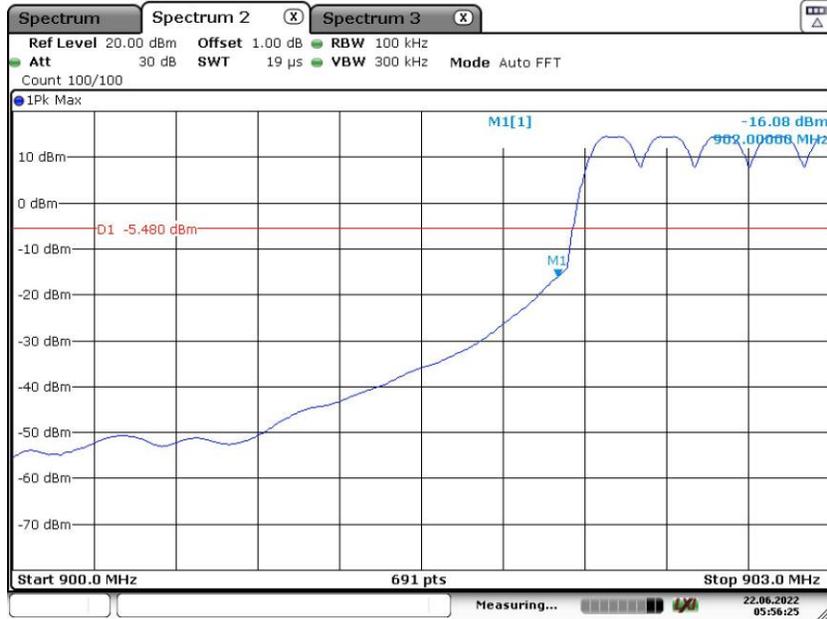

Date: 22 JUN 2022 05:56:25


FSK-50 kbps, Low CH, Spurious

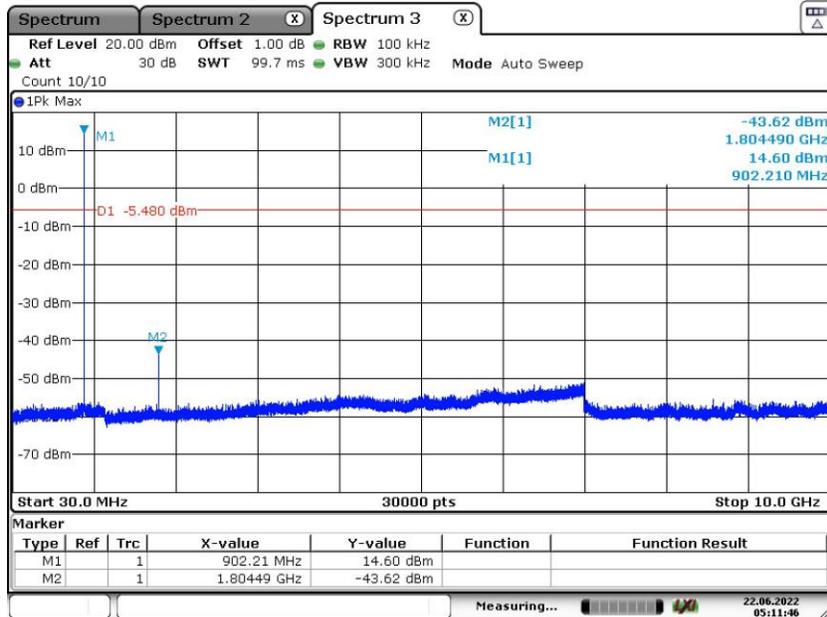

Date: 22 JUN 2022 05:11:46




FSK-50 kbps, Mid CH, Reference

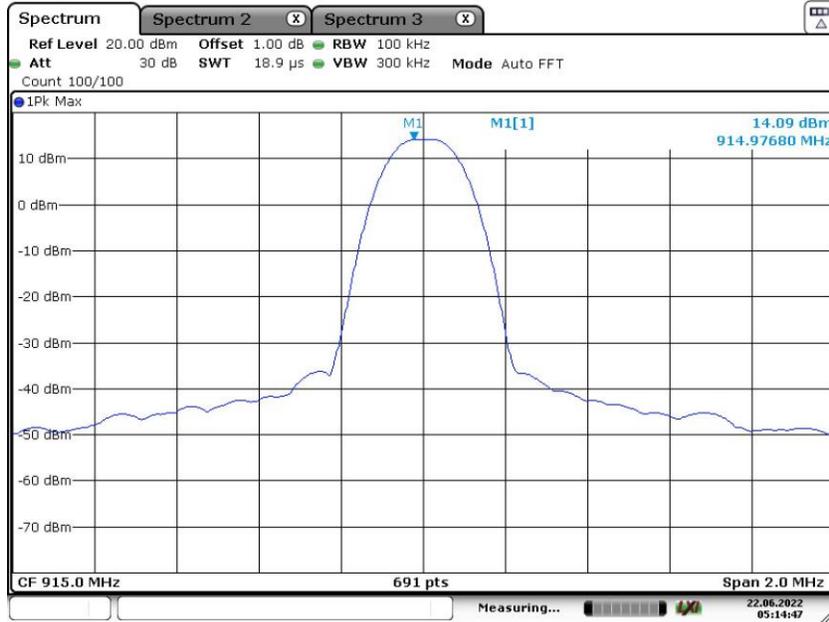

Date: 22 JUN 2022 05:14:47


FSK-50 kbps, Mid CH, Spurious

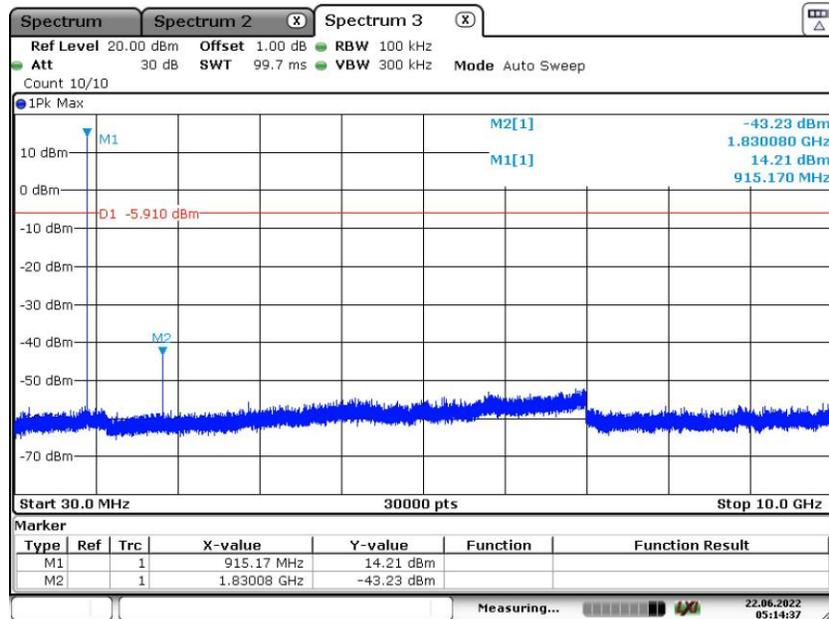

Date: 22 JUN 2022 05:14:38




FSK-50 kbps, High CH, Reference

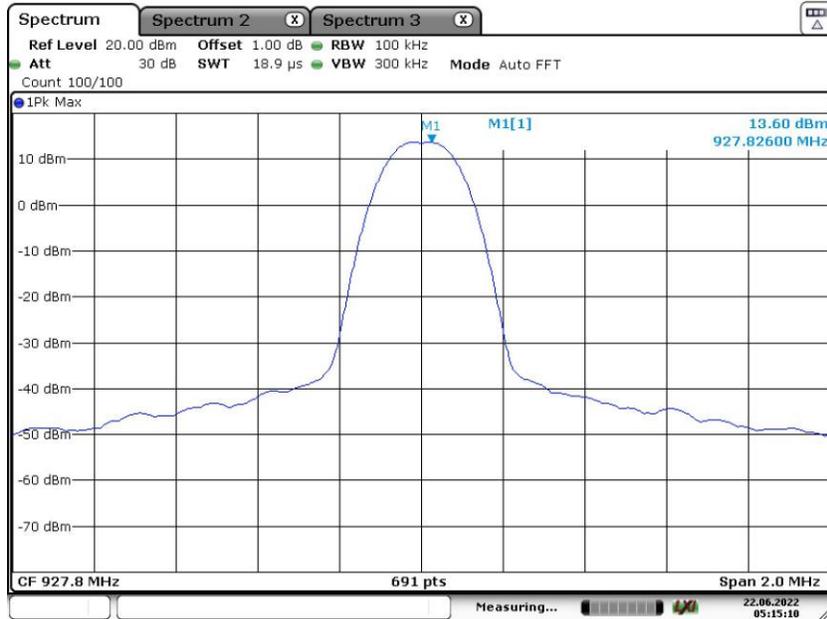

Date: 22 JUN 2022 05:15:10


FSK-50 kbps, High CH, Bandedge

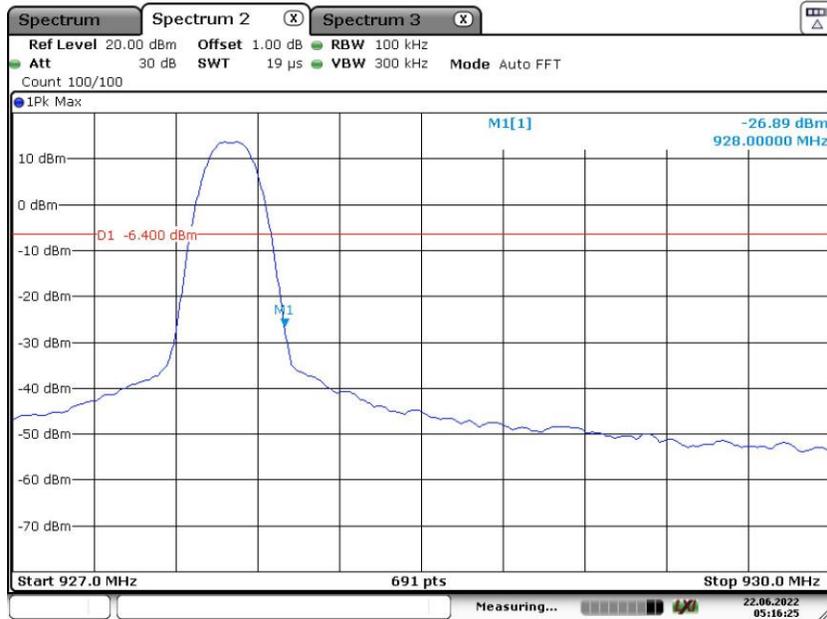

Date: 22 JUN 2022 05:16:25




FSK-50 kbps, High CH, Hopping on

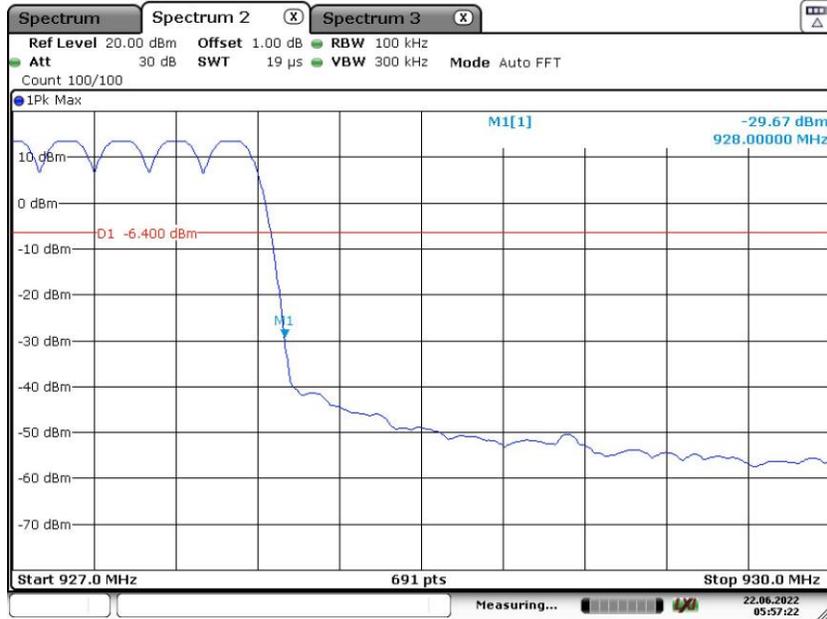

Date: 22 JUN 2022 05:57:22

FSK-50 kbps, High CH, Spurious

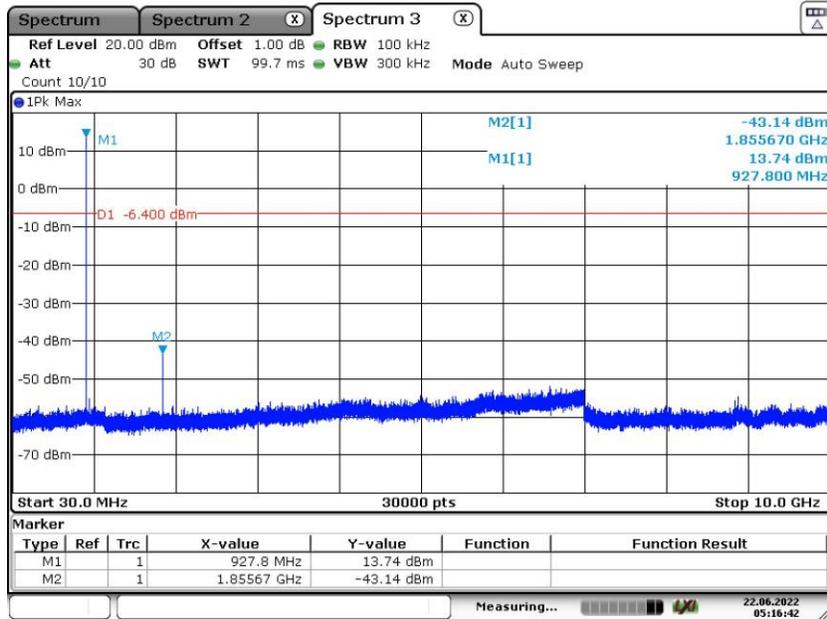

Date: 22 JUN 2022 05:16:43



FSK-150 kbps, Low CH, Reference



Date: 22 JUN 2022 05:23:03

FSK-150 kbps, Low CH, Bandedge



Date: 22 JUN 2022 05:23:42




FSK-150 kbps, Low CH, Hopping on



Date: 22 JUN 2022 05:59:05

FSK-150 kbps, Low CH, Spurious

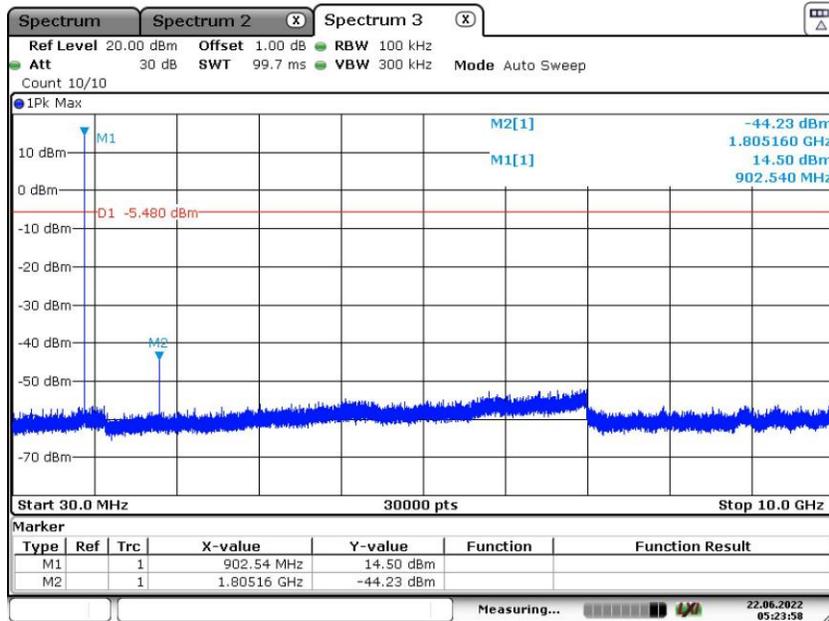

Date: 22 JUN 2022 05:23:58




FSK-150 kbps, Mid CH, Reference



Date: 22 JUN 2022 05:24:25

FSK-150 kbps, Mid CH, Spurious

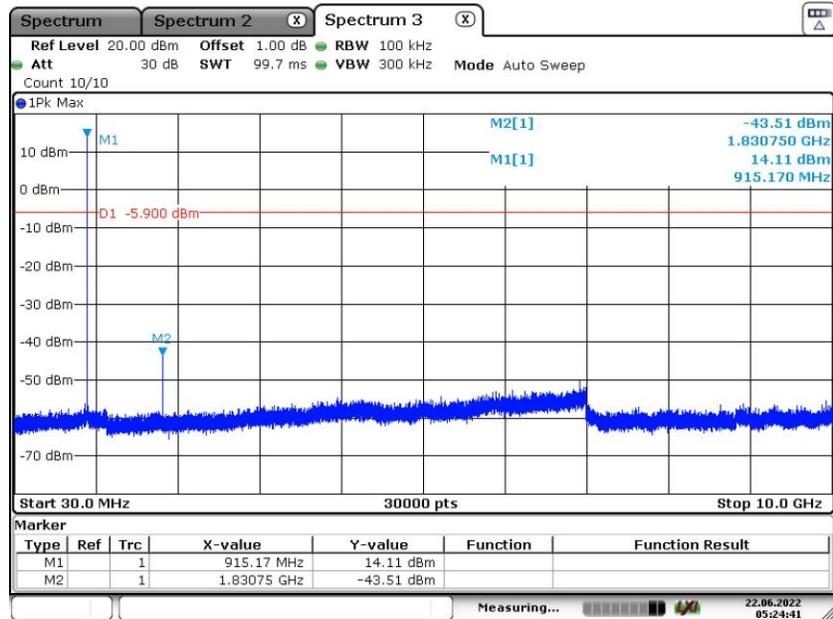

Date: 22 JUN 2022 05:24:41




FSK-150 kbps, High CH, Reference



Date: 22 JUN 2022 05:25:10

FSK-150 kbps, High CH, Bandedge

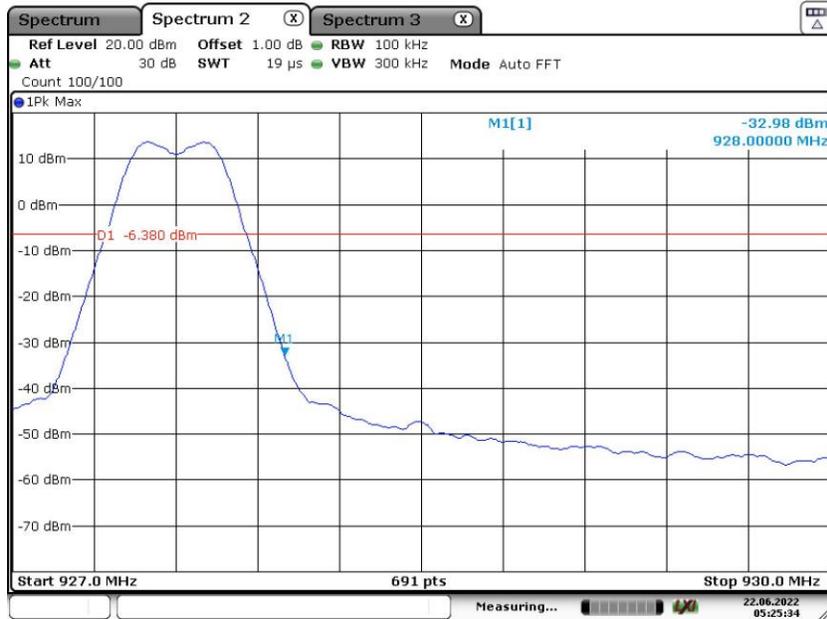

Date: 22 JUN 2022 05:25:35




FSK-150 kbps, High CH, Hopping on



Date: 22 JUN 2022 05:58:12

FSK-150 kbps, High CH, Spurious

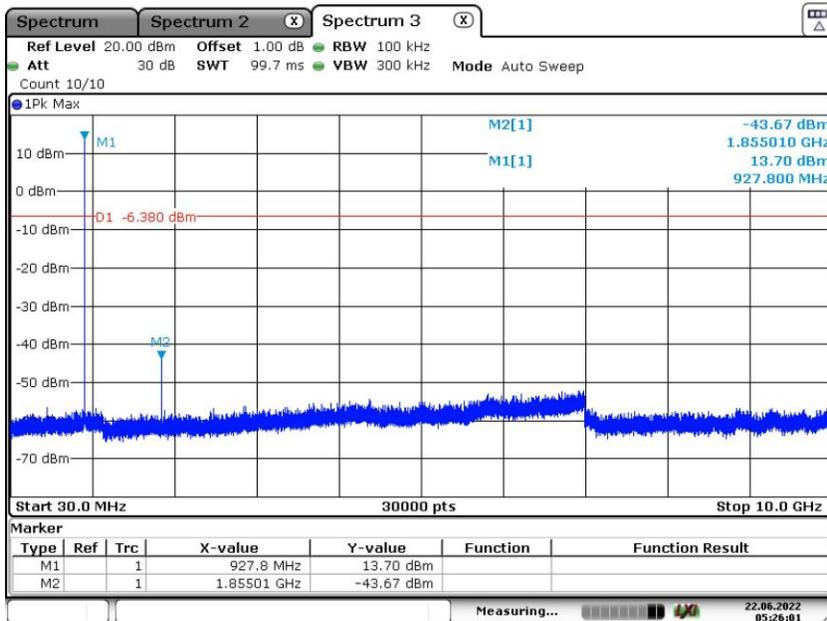

Date: 22 JUN 2022 05:26:01



FSK-250 kbps, Low CH, Reference



Date: 22 JUN 2022 05:29:20

FSK-250 kbps, Low CH, Bandedge



Date: 22 JUN 2022 05:29:48




FSK-250 kbps, Low CH, Hopping on



Date: 22 JUN 2022 06:00:07


FSK-250 kbps, Low CH, Spurious

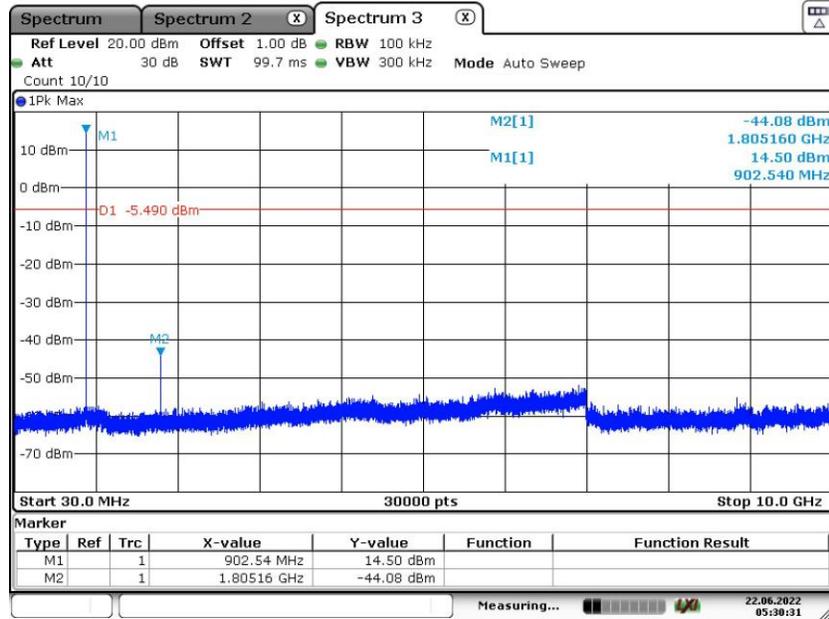

Date: 22 JUN 2022 05:30:31




FSK-250 kbps, Mid CH, Reference

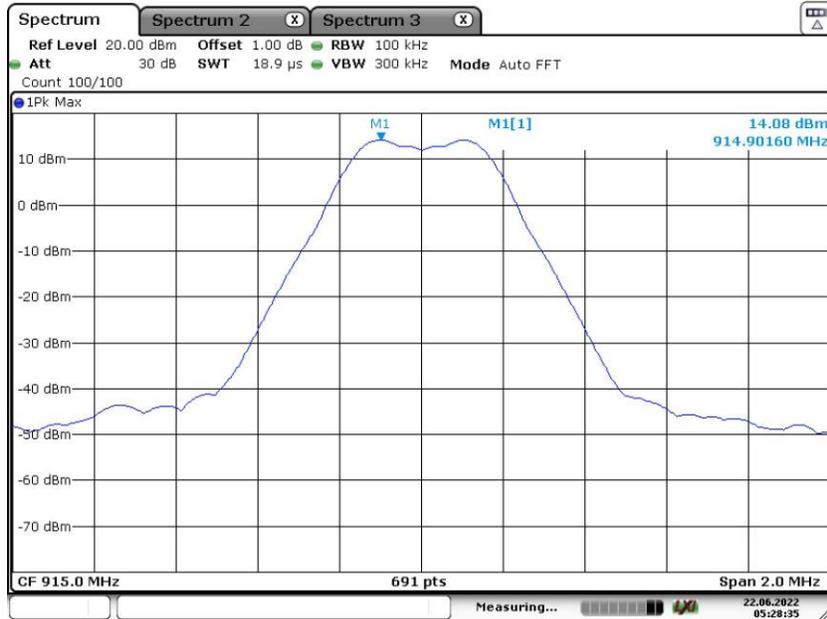

Date: 22 JUN 2022 05:28:35

FSK-250 kbps, Mid CH, Spurious

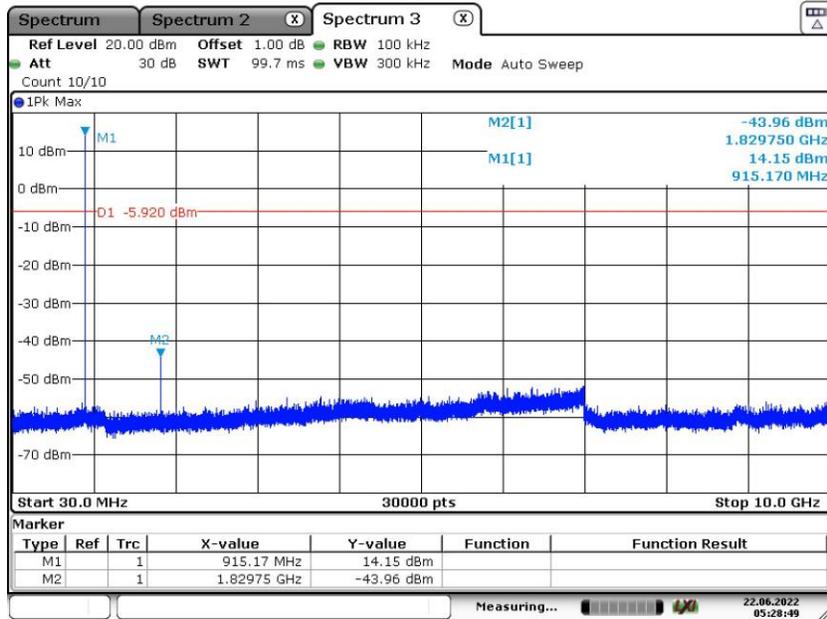

Date: 22 JUN 2022 05:28:50



FSK-250 kbps, High CH, Reference



Date: 22 JUN 2022 05:27:34


FSK-250 kbps, High CH, Bandedge



Date: 22 JUN 2022 05:27:54




FSK-250 kbps, High CH, Hopping on

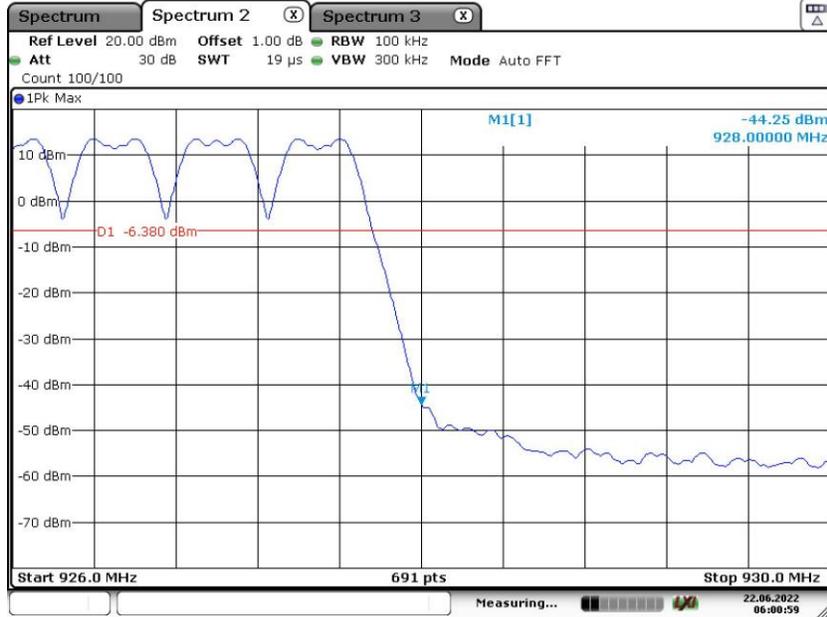

Date: 22 JUN 2022 06:00:59

FSK-250 kbps, High CH, Spurious

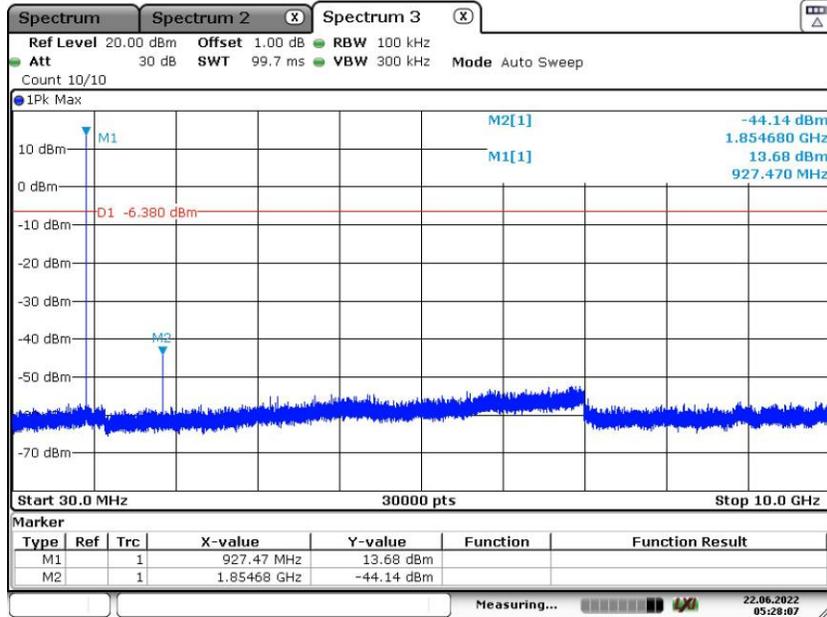

Date: 22 JUN 2022 05:28:07

END OF REPORT