



No. I221Z60885-SEM13

For

Razer Inc.

Gaming Tablet

Model Name: RZ45-0461

With

Hardware Version: V1.0

Software Version: Razer Edge WiFi-12-user

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.


Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

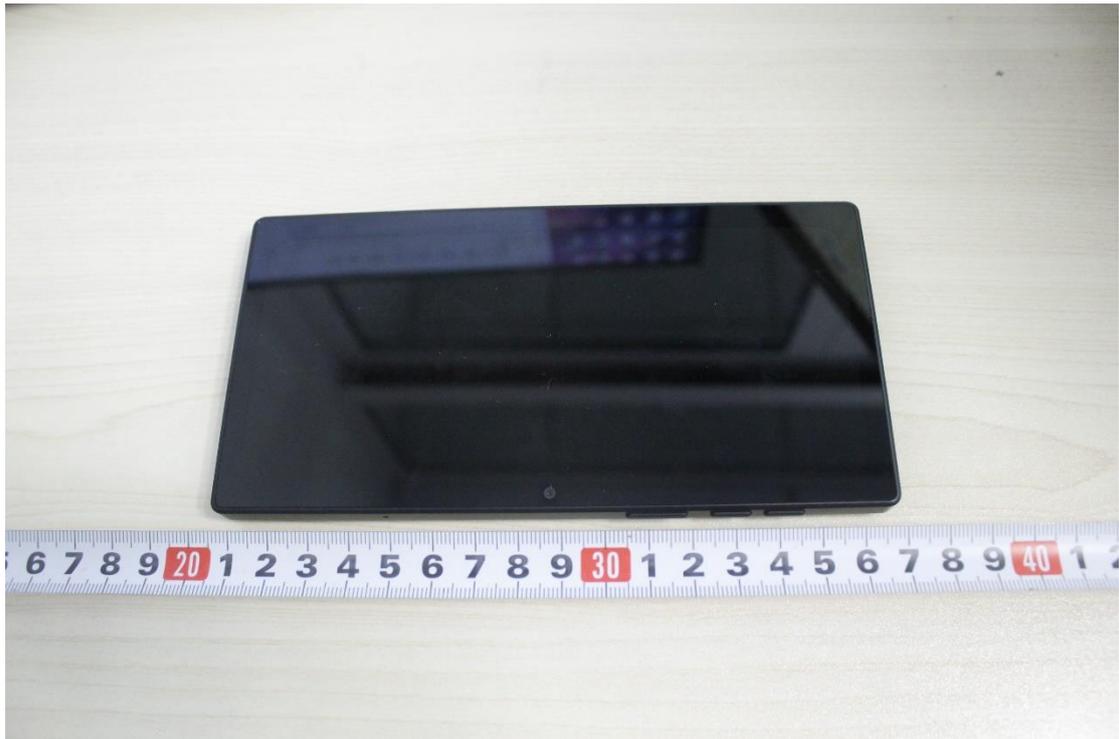


Picture 1: Constituents of the sample

Test positions for body:


The Body SAR is tested at the following 19 test positions all with the distance =5/10/14/15/17/19/20/24/25mm between the EUT and the phantom bottom:

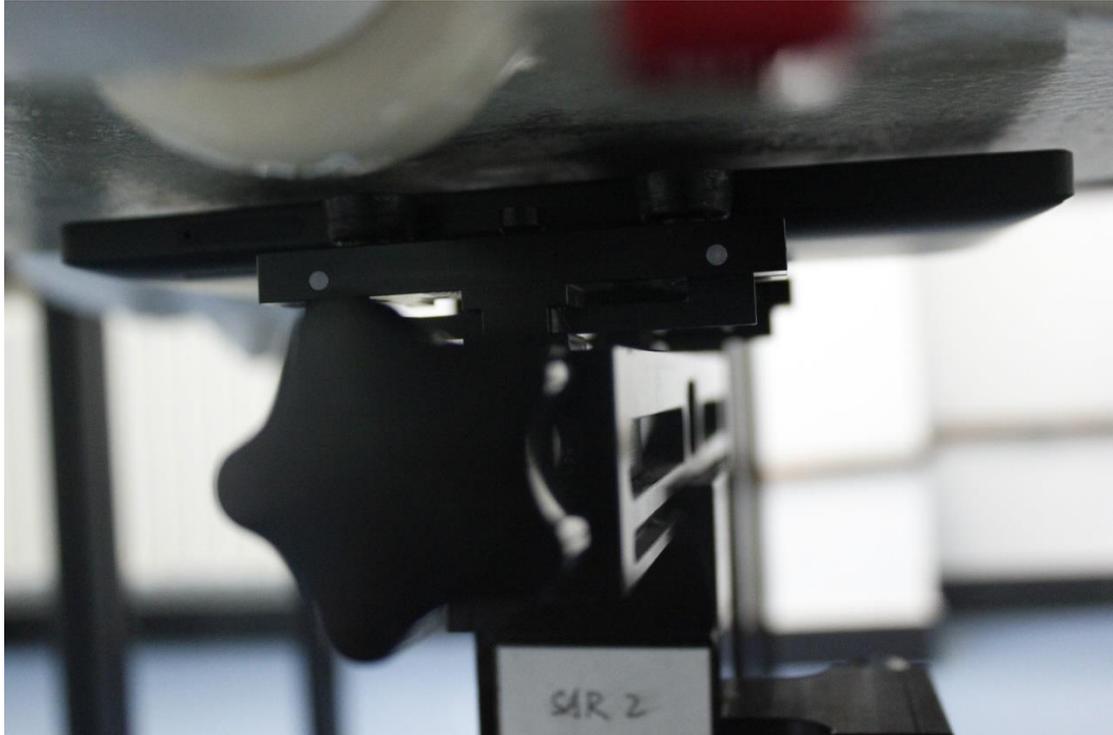


Picture 2: Front 5mm

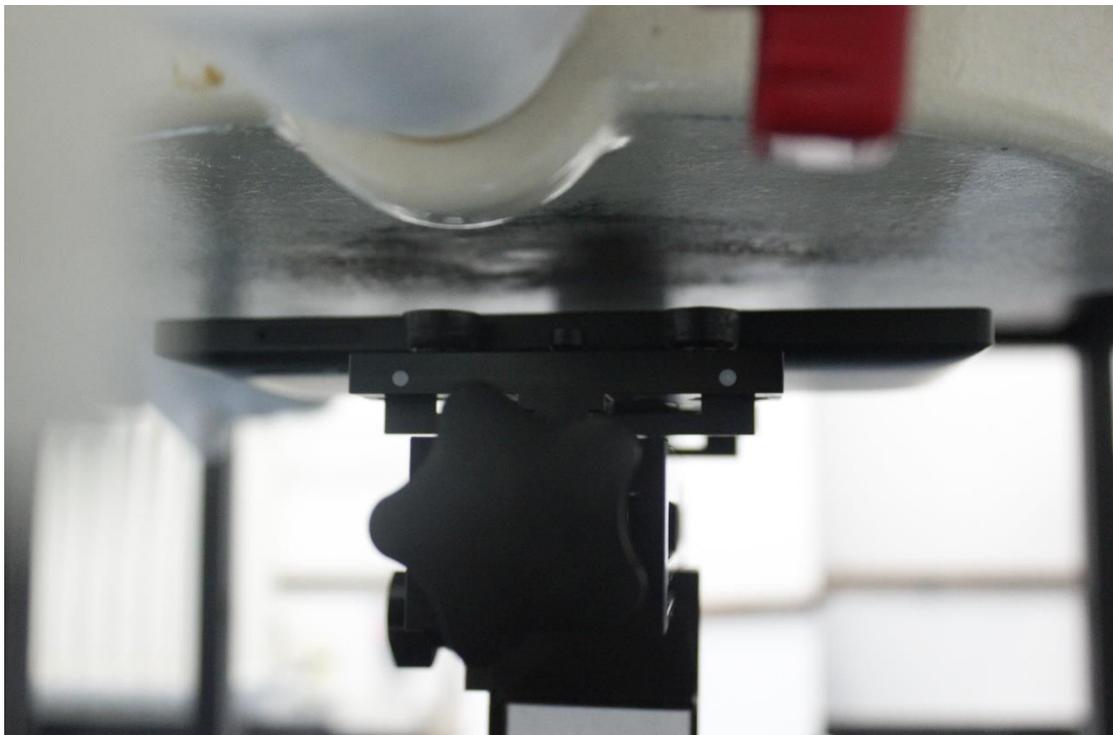


Picture 3: Front 17mm

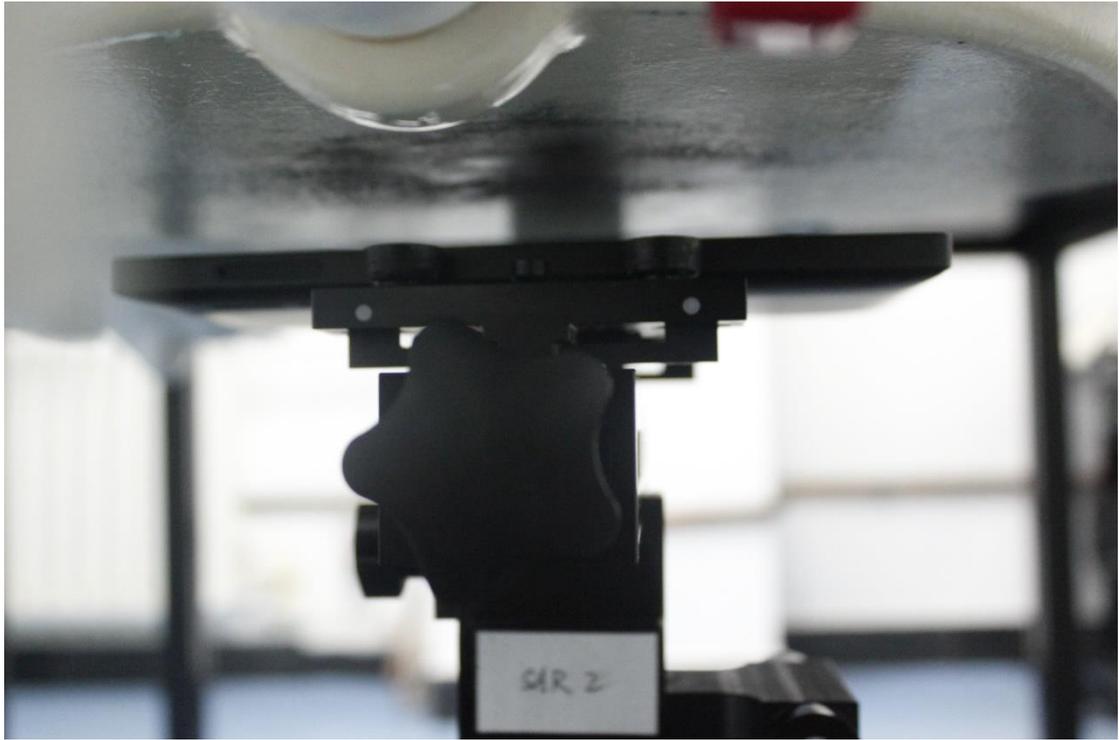


Picture 4: Front 19mm

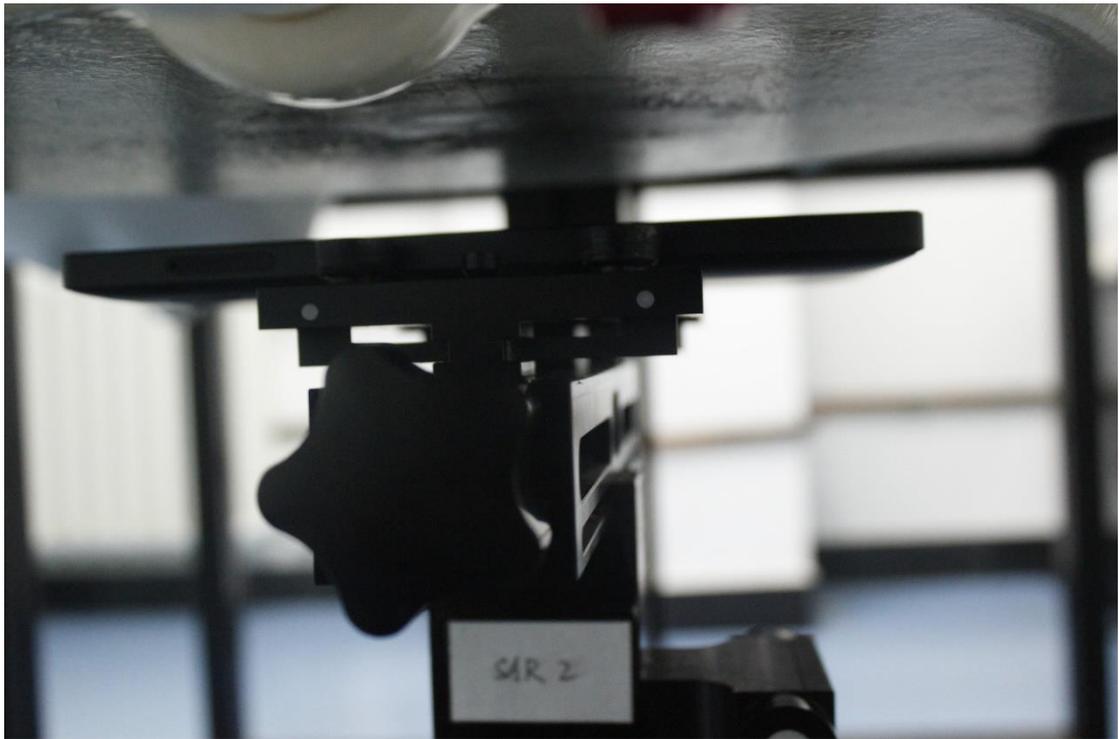


Picture 5: Front 25mm

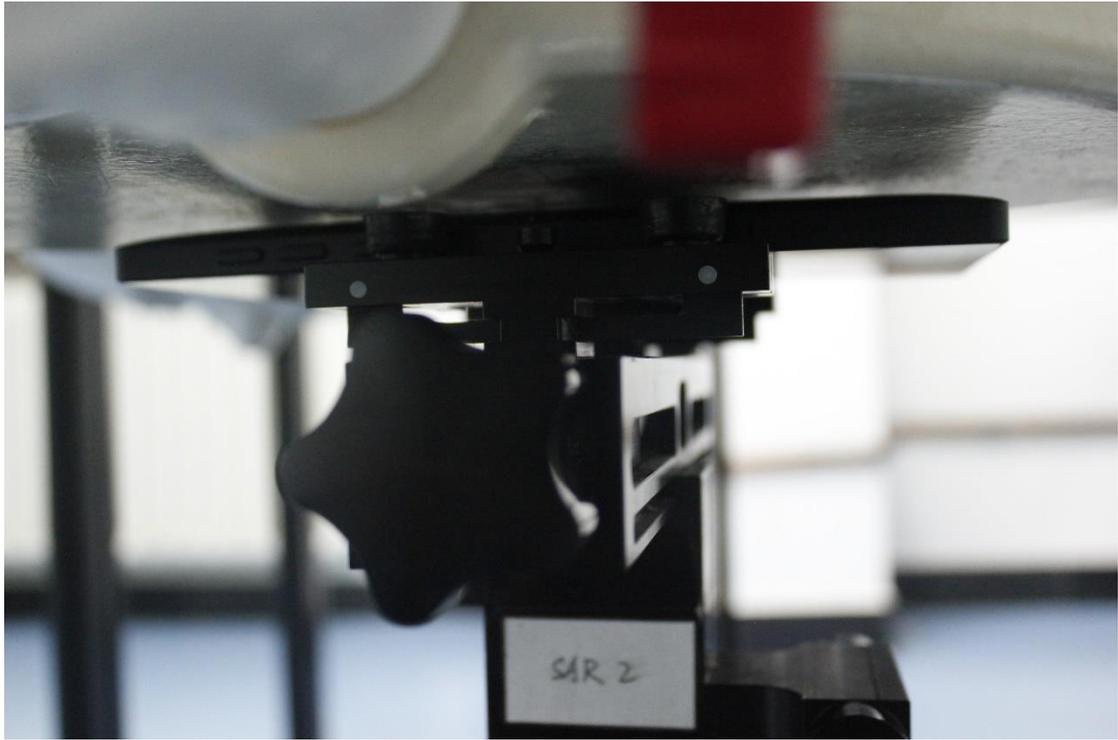

Picture 6: Rear 5mm

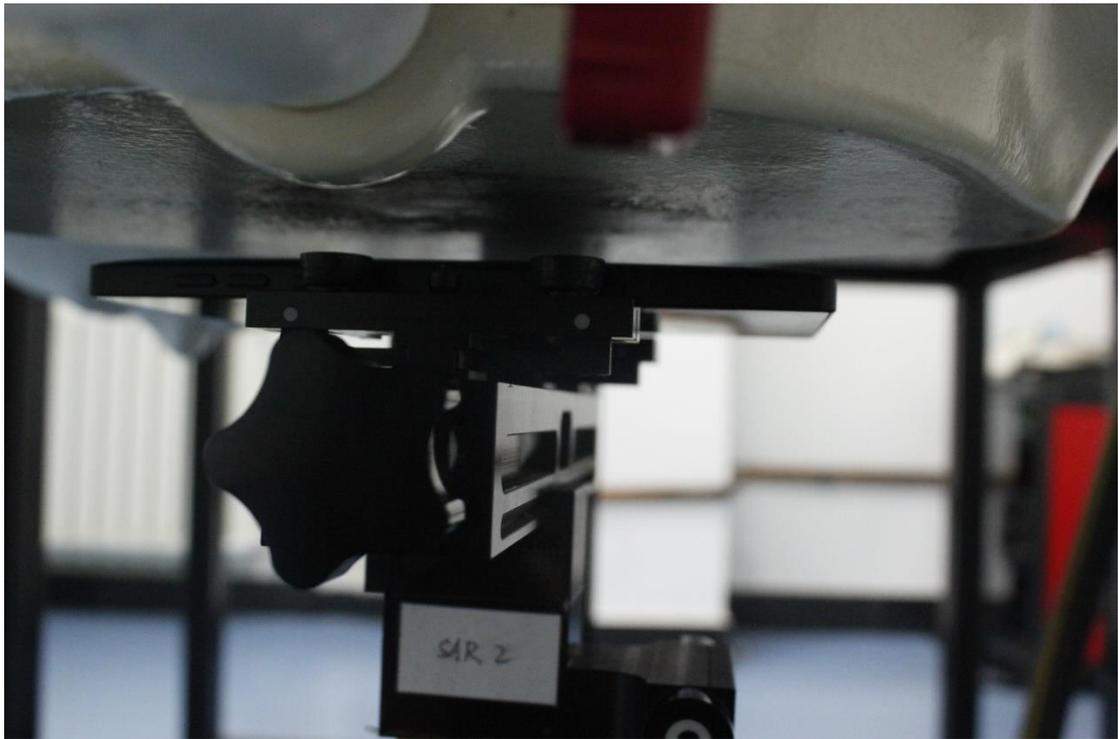

Picture 7: Rear 15mm

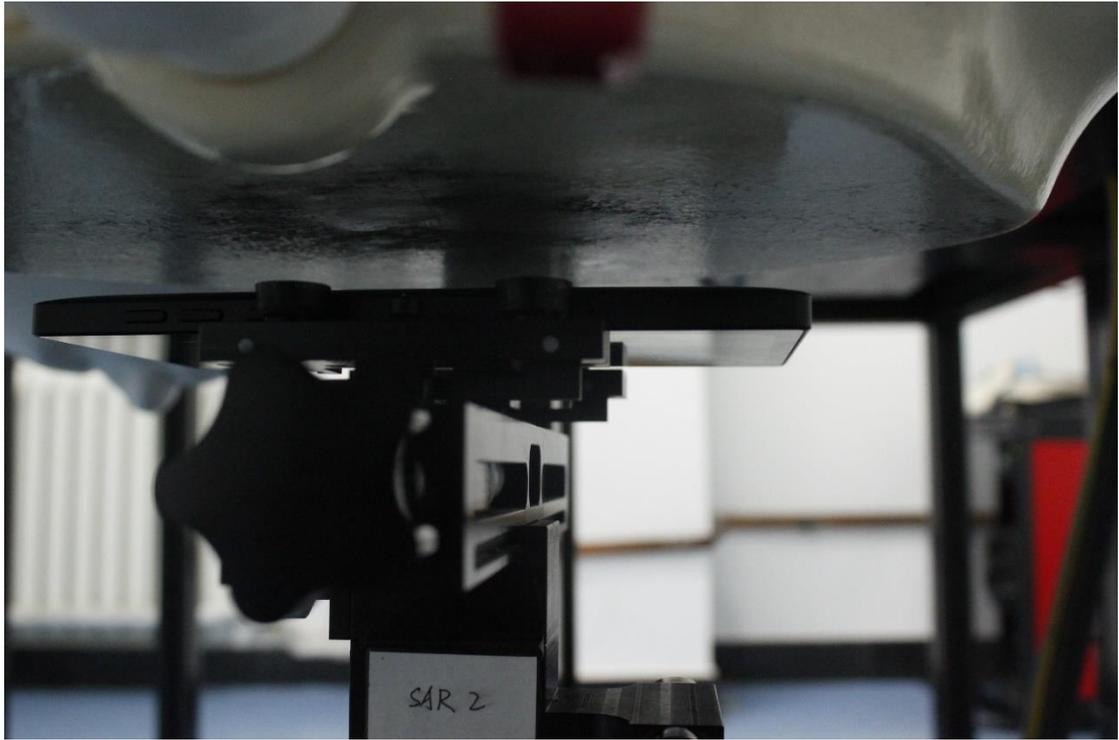

Picture 8: Rear 19mm



Picture 9: Left 5mm



Picture 10: Left 14mm




Picture 11: Left 15mm



Picture 12: Left 25mm




Picture 13: Right 5mm

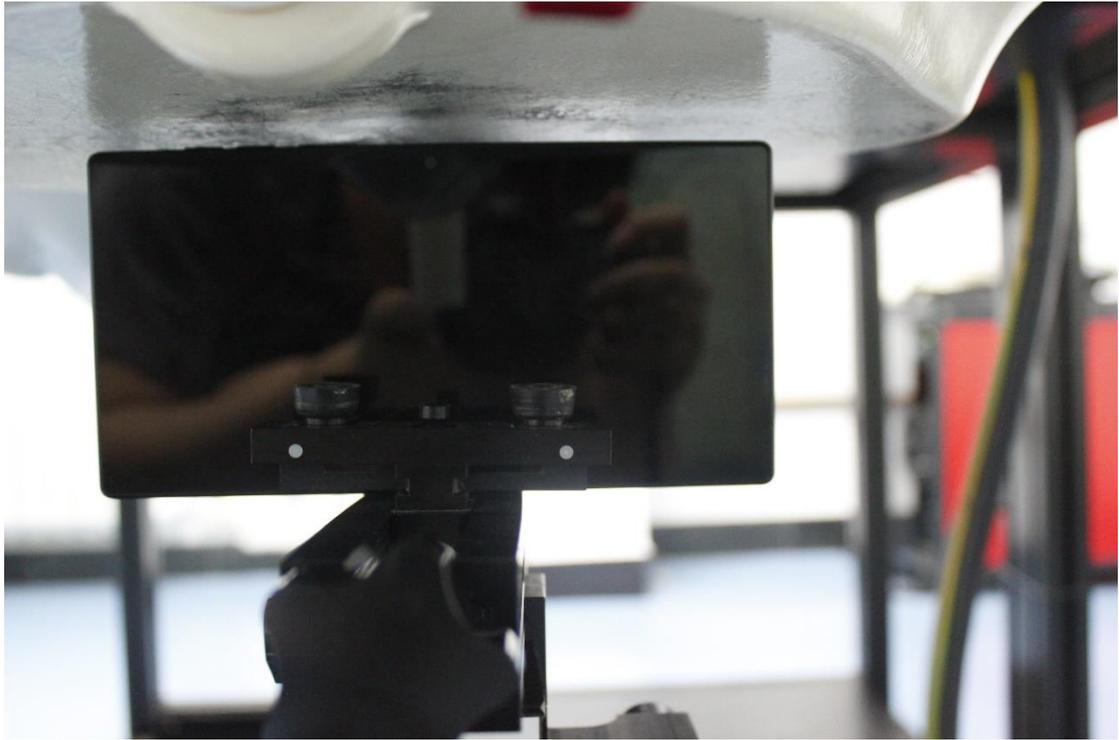


Picture 14: Right 10mm



Picture 15: Right 25mm

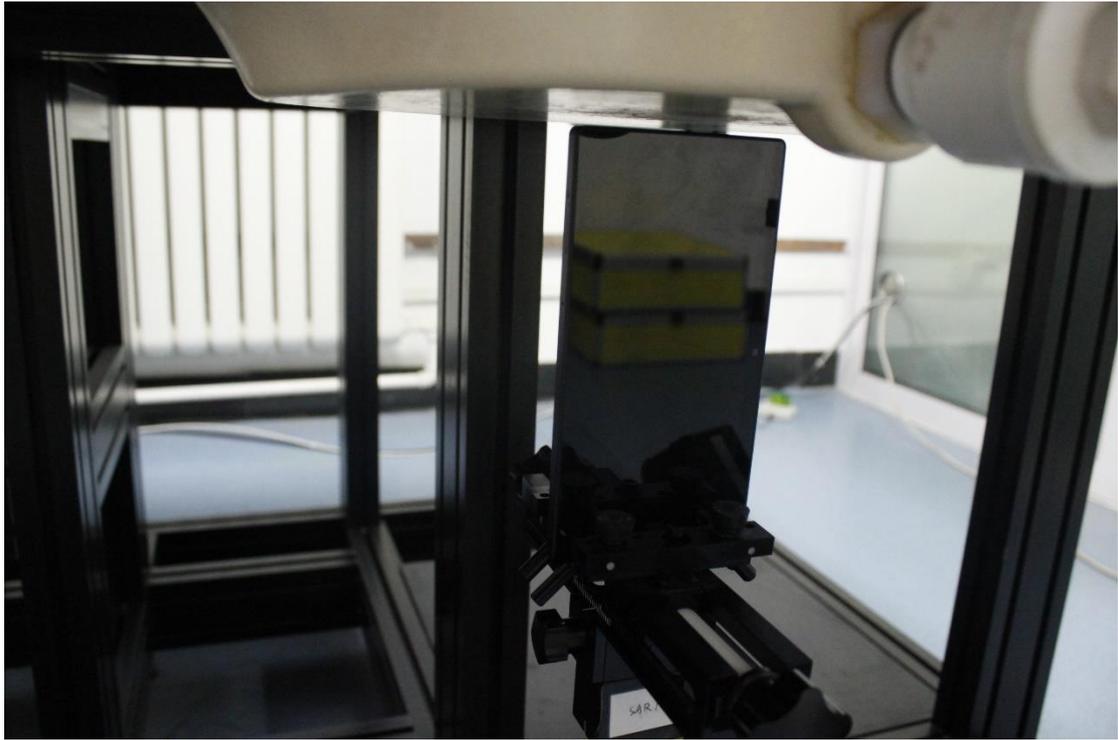

Picture 16: Top 5mm

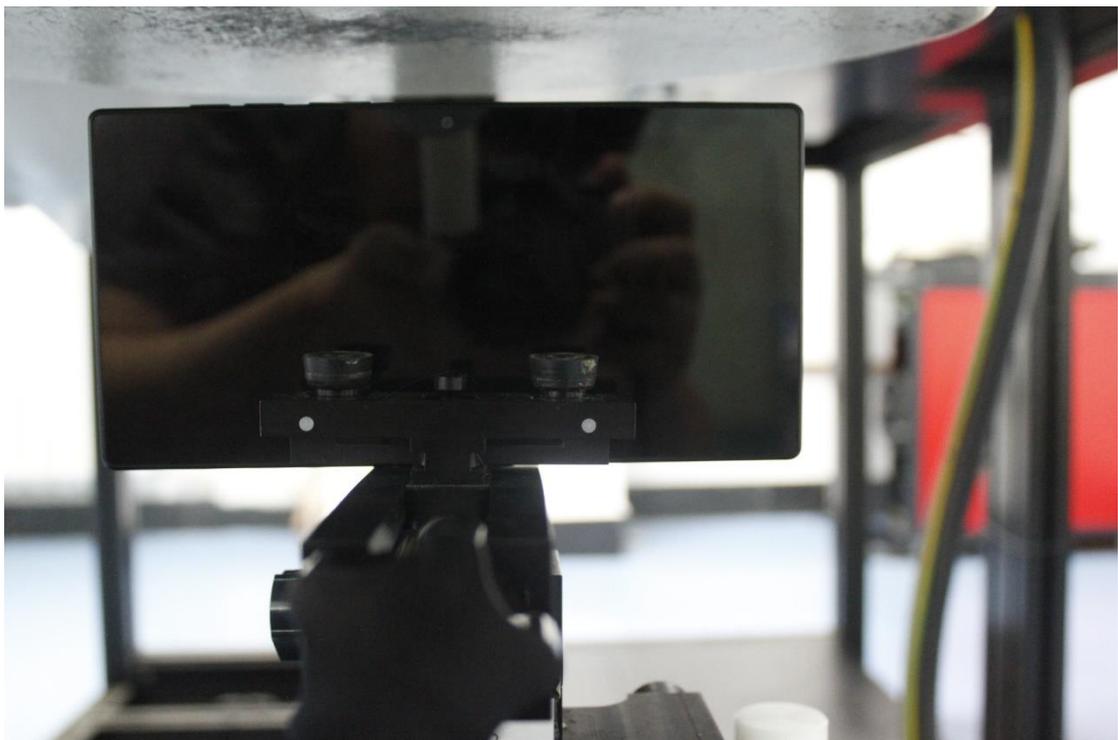

Picture 17: Top 20mm




Picture 18: Top 24mm



Picture 19: Bottom 5mm



Picture 20: Bottom 14mm

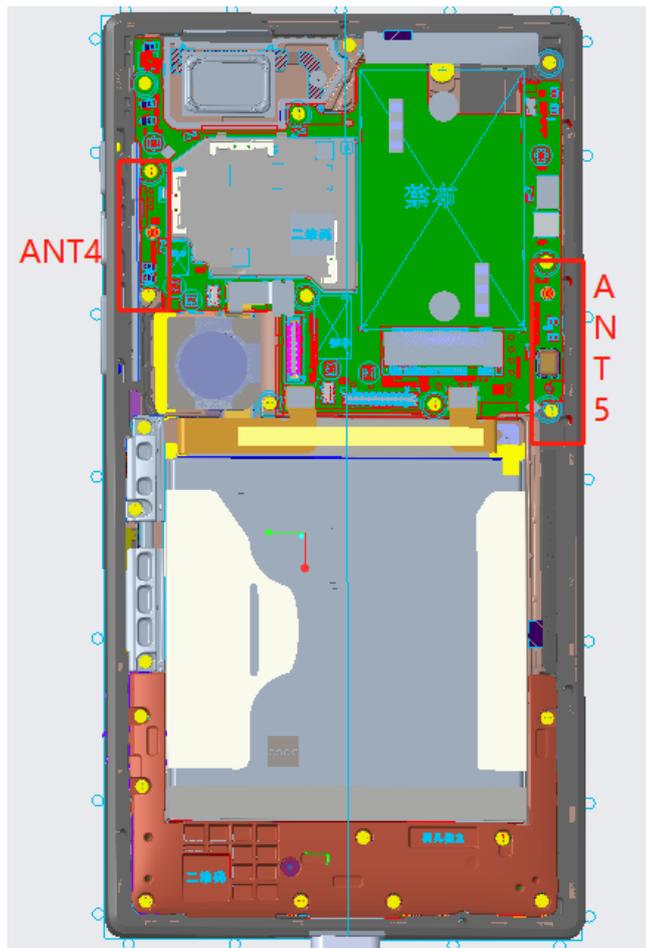

Picture 21: Antenna Locations