

# TEST REPORT

Report No.: BCTC2408052960-1E

---

Applicant: LEPRO INNOVATION INC.

---

Product Name: Smart LED Strip lights

---

Test Model: SE1-20

---

Tested Date: 2024-08-02 to 2024-08-13

---

Issued Date: 2024-08-14

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID:2A3MASE1

Product Name: Smart LED Strip lights  
Trademark: N/A  
Model/Type Reference: SE1-20  
SE1-5, SE1-10, SE1-15  
Prepared For: LEPRO INNOVATION INC.  
Address: 3651 Lindell Road Suite D1048, Las Vegas, NV 89103, USA  
Manufacturer: LEPRO INNOVATION INC.  
Address: 3651 Lindell Road Suite D1048, Las Vegas, NV 89103, USA  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,  
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2024-08-02  
Sample Tested Date: 2024-08-02 to 2024-08-13  
Issue Date: 2024-08-14  
Report No.: BCTC2408052960-1E  
Test Standards: FCC Part15.247  
ANSI C63.10-2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Kelsey Tan/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.



## Table Of Content


Test Report Declaration	Page
1. Version .....	5
2. Test Summary .....	6
3. Measurement Uncertainty .....	7
4. Product Information And Test Setup .....	8
4.1 Product Information.....	8
4.2 Test Setup Configuration .....	9
4.3 Support Equipment .....	9
4.4 Channel List.....	10
4.5 Test Mode .....	10
4.6 Table Of Parameters Of Text Software Setting.....	11
5. Test Facility And Test Instrument Used.....	12
5.1 Test Facility.....	12
5.2 Test Instrument Used.....	12
6. Conducted Emissions.....	14
6.1 Block Diagram Of Test Setup.....	14
6.2 Limit .....	14
6.3 Test procedure.....	14
6.4 EUT operating Conditions .....	14
6.5 Test Result.....	15
7. Radiated Emissions.....	23
7.1 Block Diagram Of Test Setup.....	23
7.2 Limit .....	24
7.3 Test procedure.....	25
7.4 EUT Operating Conditions .....	26
7.5 Test Result.....	26
8. Radiated Band Emission Measurement And Restricted Bands Of Operation ....	38
8.1 Block Diagram Of Test Setup.....	38
8.2 Limit .....	38
8.3 Test procedure.....	39
8.4 EUT Operating Conditions .....	39
8.5 Test Result.....	40
9. Power Spectral Density Test .....	41
9.1 Block Diagram Of Test Setup.....	41
9.2 Limit .....	41
9.3 Test procedure.....	41
9.4 EUT Operating Conditions .....	41
9.5 Test Result.....	42
10. Bandwidth Test.....	48
10.1 Block Diagram Of Test Setup.....	48
10.2 Limit .....	48
10.3 Test procedure.....	48
10.4 EUT Operating Conditions .....	48
10.5 Test Result.....	49
11. Peak Output Power Test .....	55
11.1 Block Diagram Of Test Setup.....	55
11.2 Limit .....	55

BCTC  
 3C  
 PPR  
 Report

11.3	Test Procedure .....	55
11.4	EUT Operating Conditions .....	55
11.5	Test Result .....	56
12.	100 kHz Bandwidth Of Frequency Band Edge .....	57
12.1	Block Diagram Of Test Setup.....	57
12.2	Limit .....	57
12.3	Test Procedure .....	57
12.4	EUT Operating Conditions .....	57
12.5	Test Result.....	57
13.	Duty Cycle Of Test Signal .....	73
13.1	Standard Requirement .....	73
13.2	Formula.....	73
13.3	Test Procedure .....	73
13.4	Test Result.....	73
14.	Antenna Requirement .....	76
14.1	Limit .....	76
14.1	Test Result.....	76
15.	EUT Photographs.....	77
16.	EUT Test Setup Photographs.....	78


(Note: N/A Means Not Applicable)

TE  
TC  
OV  
t See

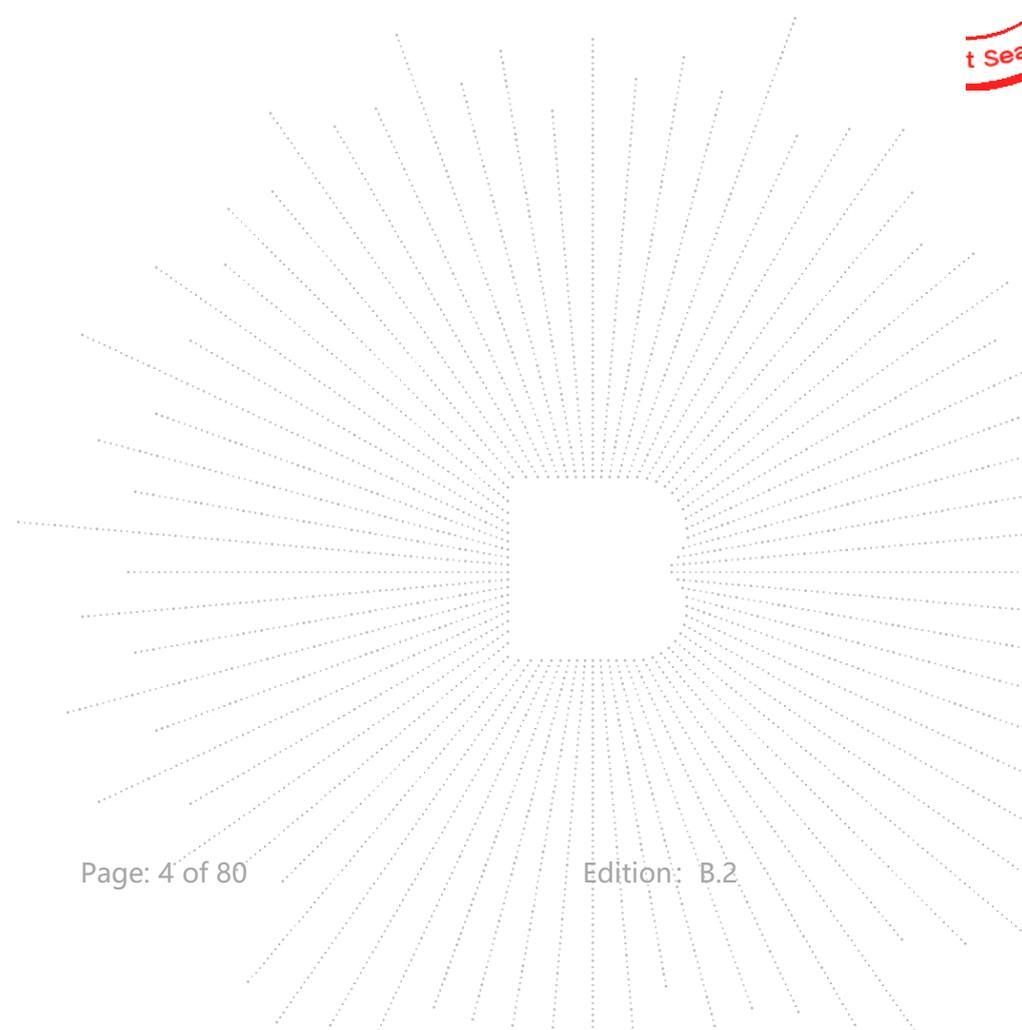

**1. Version**

Report No.	Issue Date	Description	Approved
BCTC2408052960-1E	2024-08-14	Original	Valid

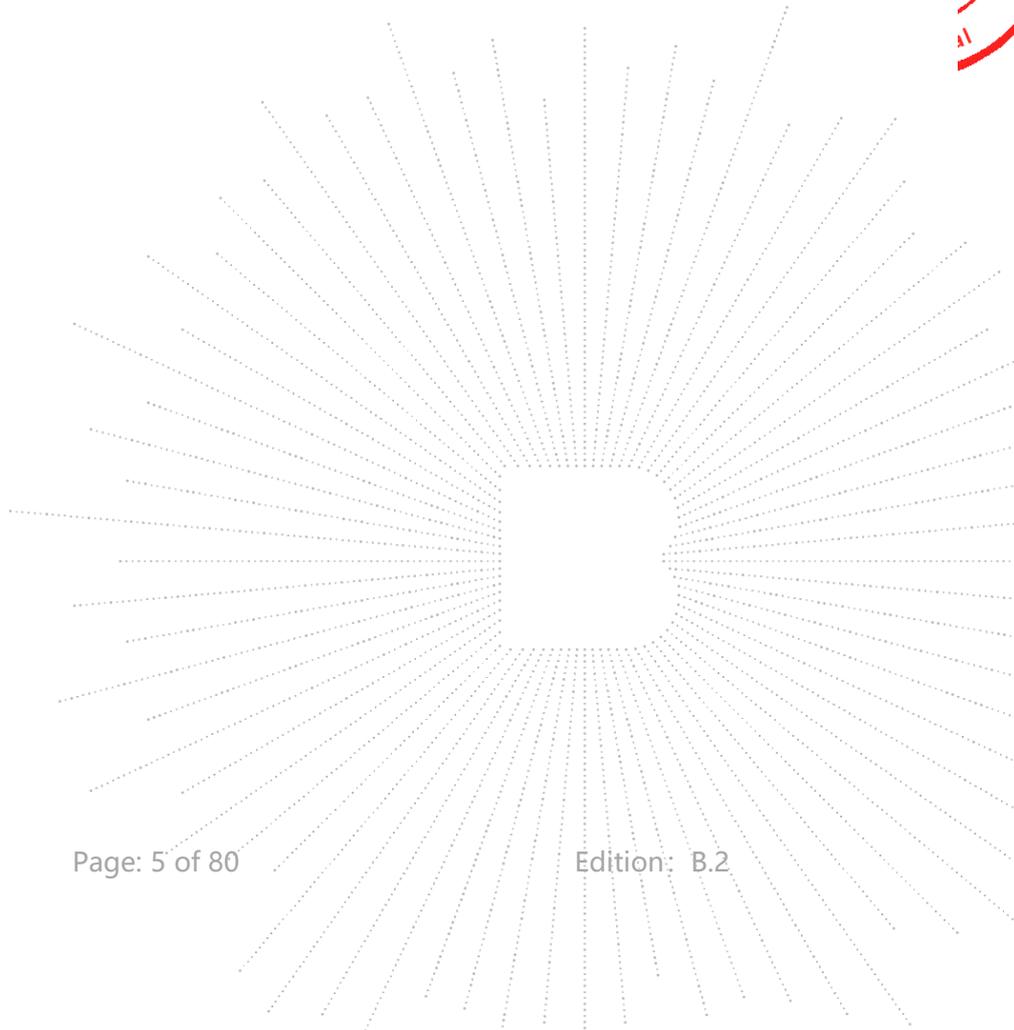

## 2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS

A red circular stamp or watermark is located on the right side of the page, partially cut off. It contains the text "CO. LTD" in a curved arrangement.

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-200MHz)	U=4.60dB
2	3m chamber Radiated spurious emission(200MHz-1GHz)	U=5.20dB
3	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.70dB
4	3m chamber Radiated spurious emission(1GHz-6GHz)	U=5.20dB
5	3m chamber Radiated spurious emission(6GHz-18GHz)	U=5.50dB
7	Conducted Emission (9kHz-150kHz)	U=3.50dB
8	Conducted Emission (150kHz-30MHz)	U=3.10dB
9	Conducted Adjacent channel power	U=1.38dB
10	Conducted output power uncertainty Above 1G	U=1.576dB
11	Conducted output power uncertainty below 1G	U=1.28dB
12	humidity uncertainty	U=5.3%
13	Temperature uncertainty	U=0.59°C

## 4. Product Information And Test Setup

### 4.1 Product Information

Model/Type reference:	SE1-20 SE1-5, SE1-10, SE1-15
Model Differences:	All the model are the same circuit and RF module, except model names and length of light strip. SE1-5 is 5m, SE1-10 is 10m, SE1-15 is 15m, SE1-20 is 20m.
Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz
Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
Type of Modulation:	WIFI: OFDM/DSSS
Number Of Channel:	802.11b/g/n20MHz:11 CH
Antenna installation:	PCB antenna
Antenna Gain:	3.75 dBi Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC24V 0.5A
Adapter Information:	Manufacture:XING YUAN ELECTRONICS CO., LTD Model No.:XY15SQ-240050VQ-UW Input: AC100-240V 50/60Hz 0.3A Max Output: DC24V 0.5A



## 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission and Radiated Spurious Emission:



## 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Smart LED Strip lights	N/A	SE1-20 SE1-5 SE1-10 SE1-15	N/A	EUT
E-2	Adapter	N/A	XY15SQ-240050VQ-UW	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	1m	DC cable unshielded

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

BCTC  
 3C  
 PPR  
 Report

#### 4.4 Channel List

Channel List for 802.11b/g/n(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	802.11g
Mode 5	CH 06	
Mode 6	CH 11	
Mode 7	CH 01	802.11n20
Mode 8	CH 06	
Mode 9	CH 11	
Mode 10	Link mode (Conducted Emission & Radiated emission)	

**Notes:**


1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
3. According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 11Mbps for 802.11b,6Mbps for 802.11g,13Mbps for 802.11n(H20), 54Mbps for 802.11n(H40)

TEST  
 TO  
 OVER  
 t See

#### 4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

<b>Test software Version</b>	<b>RF_Test_EN_V3.6</b>		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF

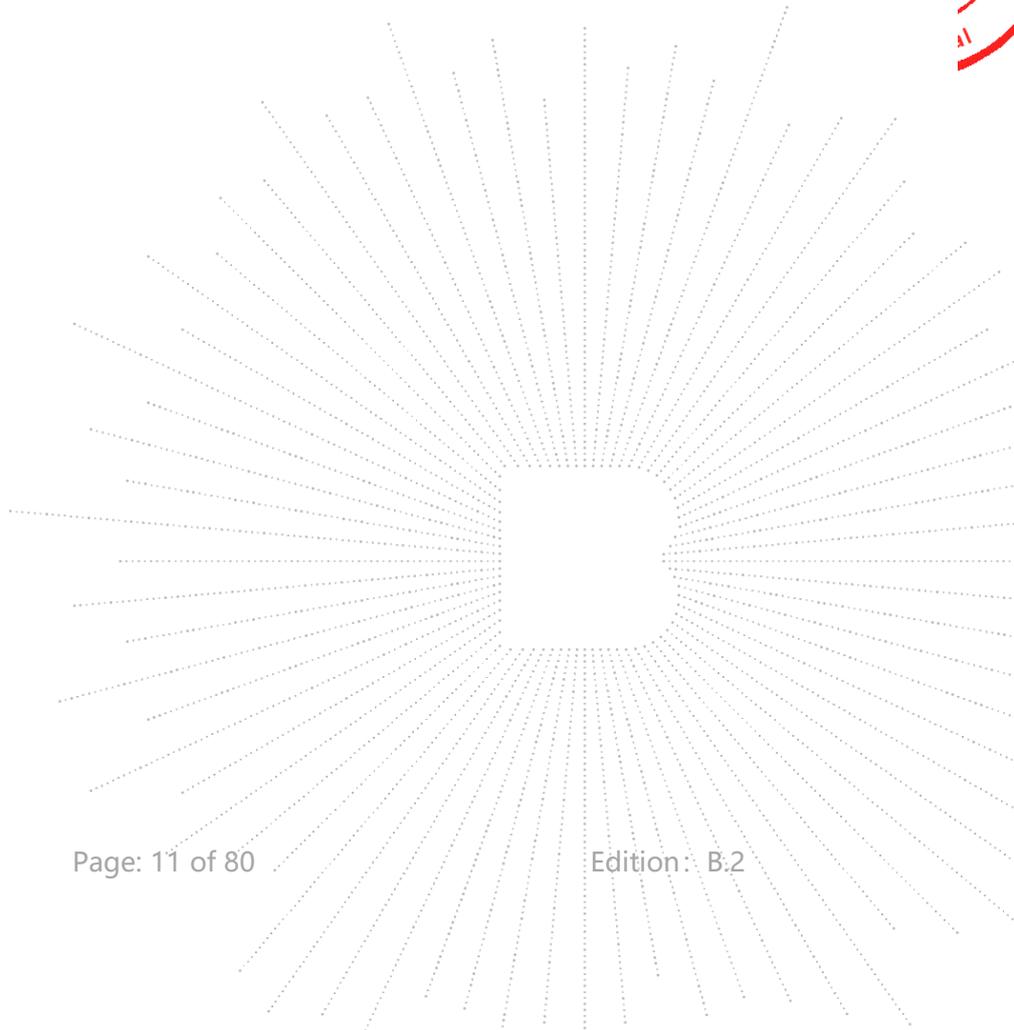

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

### 5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GH z-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\
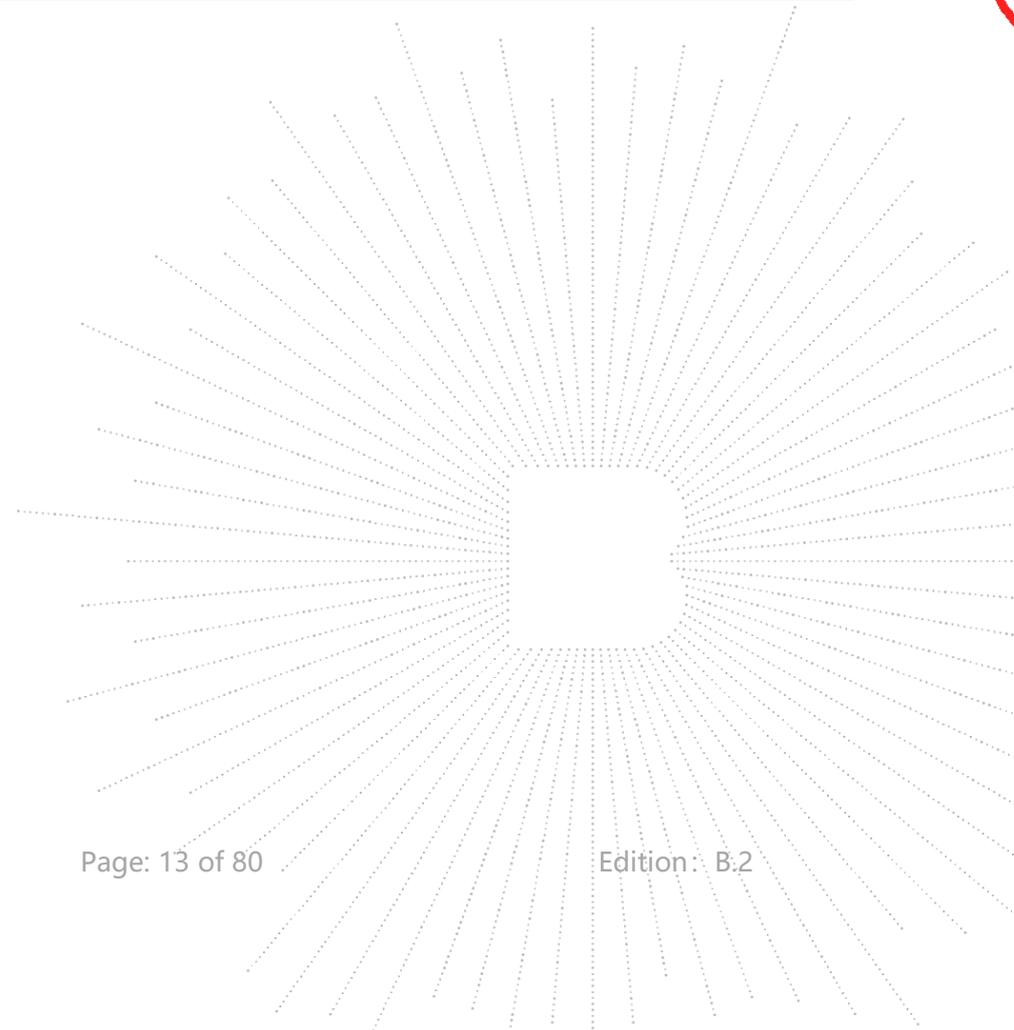
## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

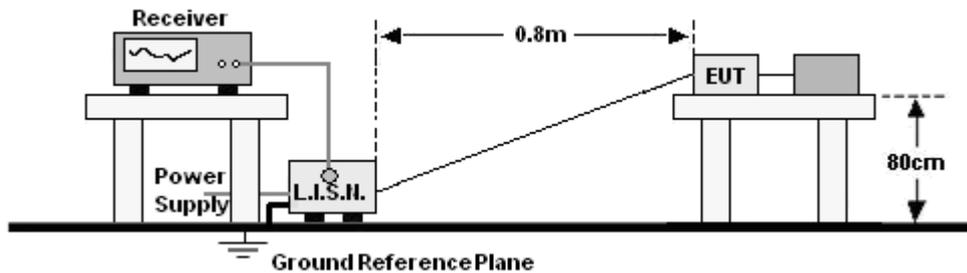

### 6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:  
 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


### 6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 6.5 Test Result

#### SE1-20

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	L

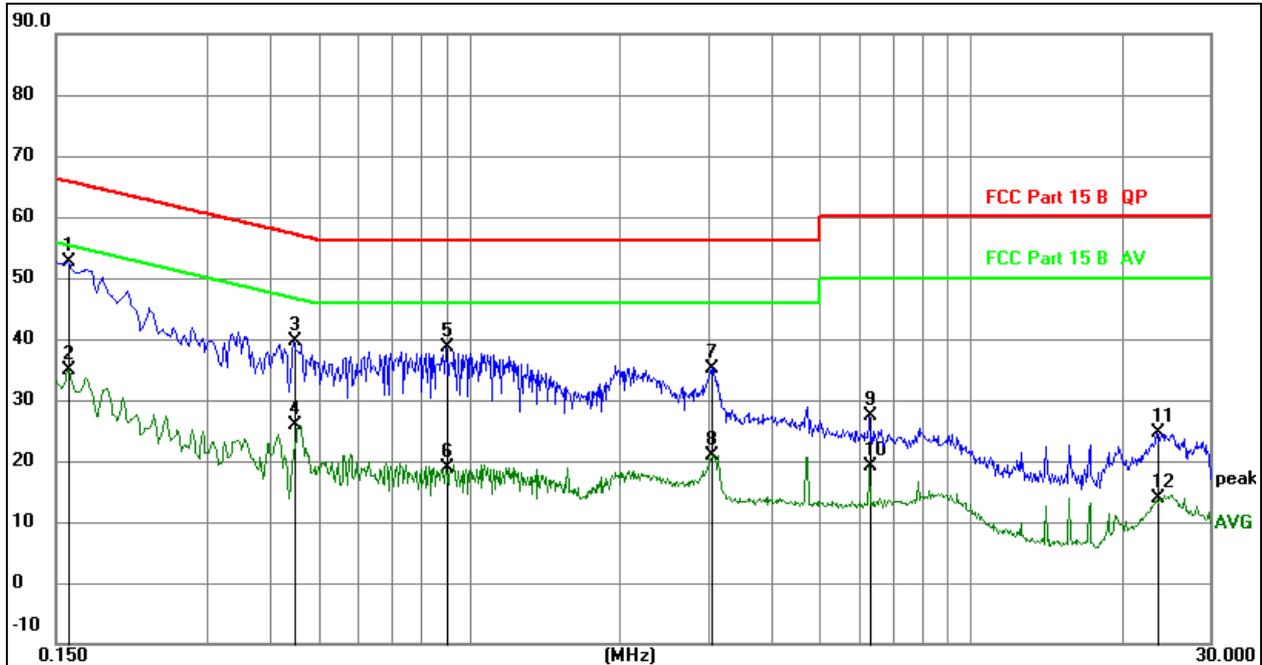


**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1590	32.52	20.07	52.59	65.52	-12.93	QP
2		0.1590	14.87	20.07	34.94	55.52	-20.58	AVG
3		0.4470	19.48	20.08	39.56	56.93	-17.37	QP
4		0.4470	5.82	20.08	25.90	46.93	-21.03	AVG
5		0.9015	18.52	20.09	38.61	56.00	-17.39	QP
6		0.9015	-1.25	20.09	18.84	46.00	-27.16	AVG
7		3.0480	15.13	20.12	35.25	56.00	-20.75	QP
8		3.0480	0.72	20.12	20.84	46.00	-25.16	AVG
9		6.2970	7.21	20.16	27.37	60.00	-32.63	QP
10		6.2970	-1.04	20.16	19.12	50.00	-30.88	AVG
11		23.5725	4.28	20.31	24.59	60.00	-35.41	QP
12		23.5725	-6.43	20.31	13.88	50.00	-36.12	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	N

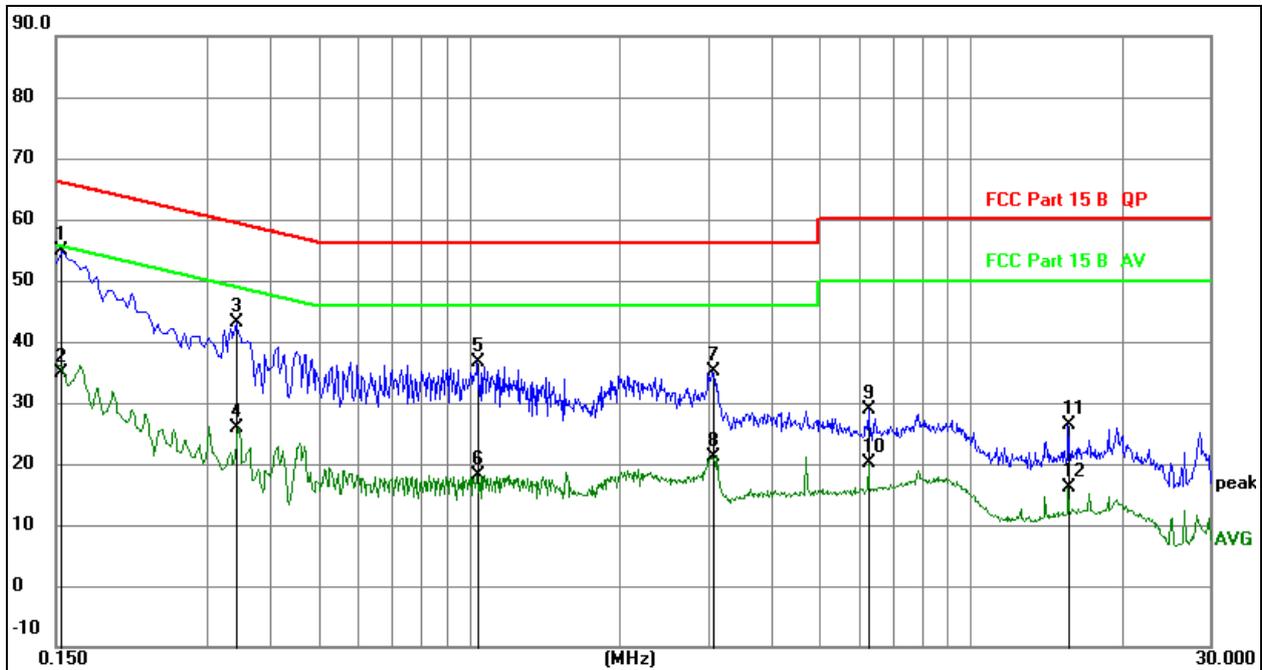

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	34.92	20.07	54.99	65.79	-10.80	QP
2		0.1539	14.77	20.07	34.84	55.79	-20.95	AVG
3		0.3428	22.97	20.07	43.04	59.14	-16.10	QP
4		0.3428	5.88	20.07	25.95	49.14	-23.19	AVG
5		1.0375	16.51	20.09	36.60	56.00	-19.40	QP
6		1.0375	-1.90	20.09	18.19	46.00	-27.81	AVG
7		3.0576	14.97	20.12	35.09	56.00	-20.91	QP
8		3.0576	0.98	20.12	21.10	46.00	-24.90	AVG
9		6.2520	8.83	20.16	28.99	60.00	-31.01	QP
10		6.2520	-0.04	20.16	20.12	50.00	-29.88	AVG
11		15.6349	6.13	20.31	26.44	60.00	-33.56	QP
12		15.6349	-4.17	20.31	16.14	50.00	-33.86	AVG

**SE1-5**


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	L

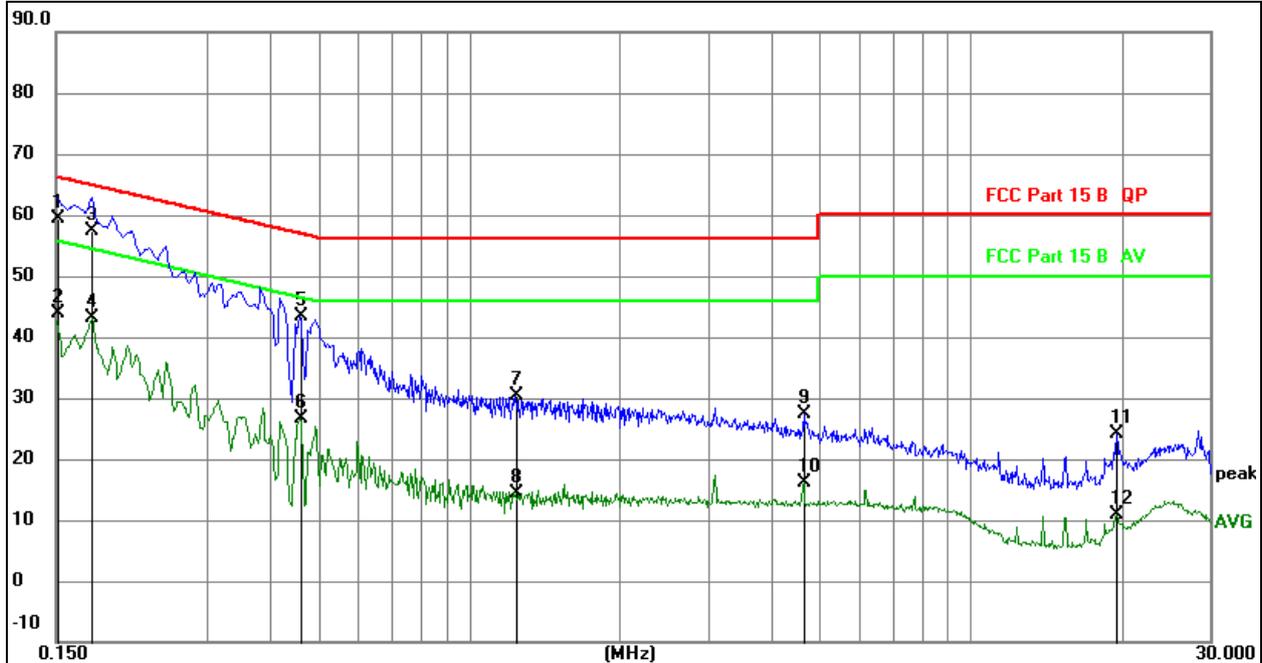
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1510	39.28	20.07	59.35	65.94	-6.59	QP
2		0.1510	23.71	20.07	43.78	55.94	-12.16	AVG
3		0.1760	37.23	20.07	57.30	64.67	-7.37	QP
4		0.1760	23.09	20.07	43.16	54.67	-11.51	AVG
5		0.4588	23.30	20.08	43.38	56.71	-13.33	QP
6		0.4588	6.65	20.08	26.73	46.71	-19.98	AVG
7		1.2357	10.34	20.09	30.43	56.00	-25.57	QP
8		1.2357	-5.74	20.09	14.35	46.00	-31.65	AVG
9		4.6469	7.21	20.14	27.35	56.00	-28.65	QP
10		4.6469	-4.01	20.14	16.13	46.00	-29.87	AVG
11		19.5316	3.82	20.33	24.15	60.00	-35.85	QP
12		19.5316	-9.51	20.33	10.82	50.00	-39.18	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	N

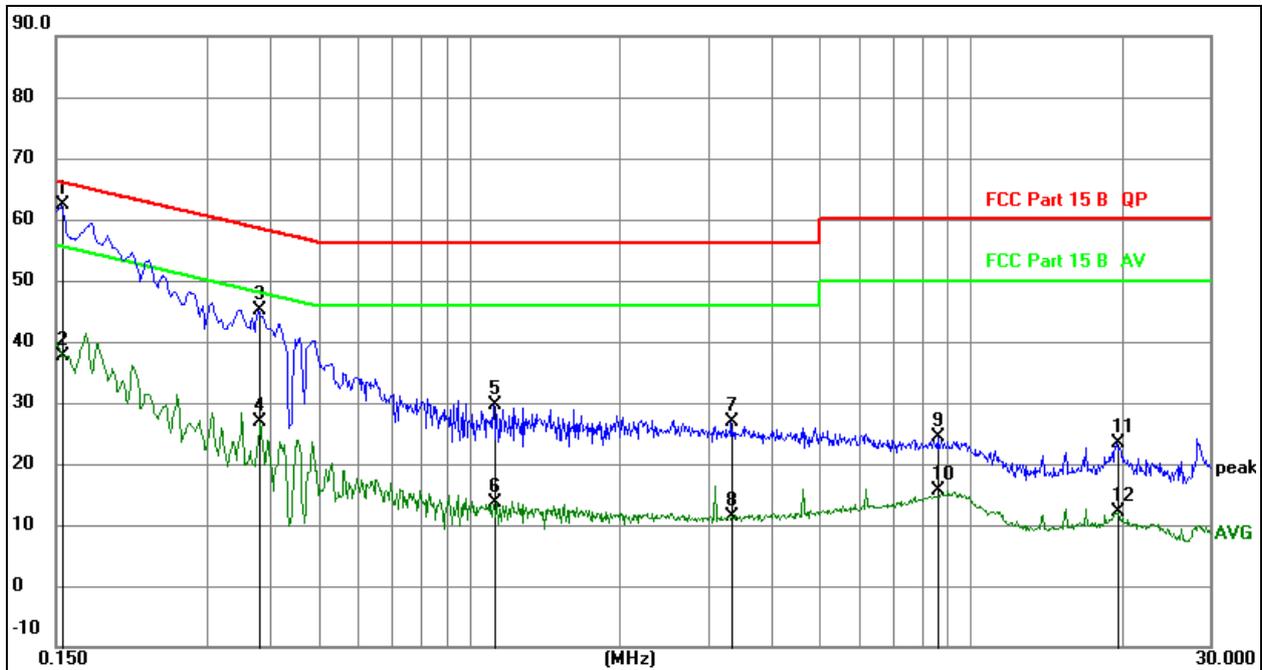

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1544	42.21	20.07	62.28	65.76	-3.48	QP
2		0.1544	17.60	20.07	37.67	55.76	-18.09	AVG
3		0.3795	25.13	20.08	45.21	58.29	-13.08	QP
4		0.3795	6.87	20.08	26.95	48.29	-21.34	AVG
5		1.1219	9.46	20.09	29.55	56.00	-26.45	QP
6		1.1219	-6.47	20.09	13.62	46.00	-32.38	AVG
7		3.3450	6.81	20.13	26.94	56.00	-29.06	QP
8		3.3450	-8.63	20.13	11.50	46.00	-34.50	AVG
9		8.6190	4.12	20.17	24.29	60.00	-35.71	QP
10		8.6190	-4.46	20.17	15.71	50.00	-34.29	AVG
11		19.6305	2.94	20.33	23.27	60.00	-36.73	QP
12		19.6305	-8.26	20.33	12.07	50.00	-37.93	AVG

**SE1-10**

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	L

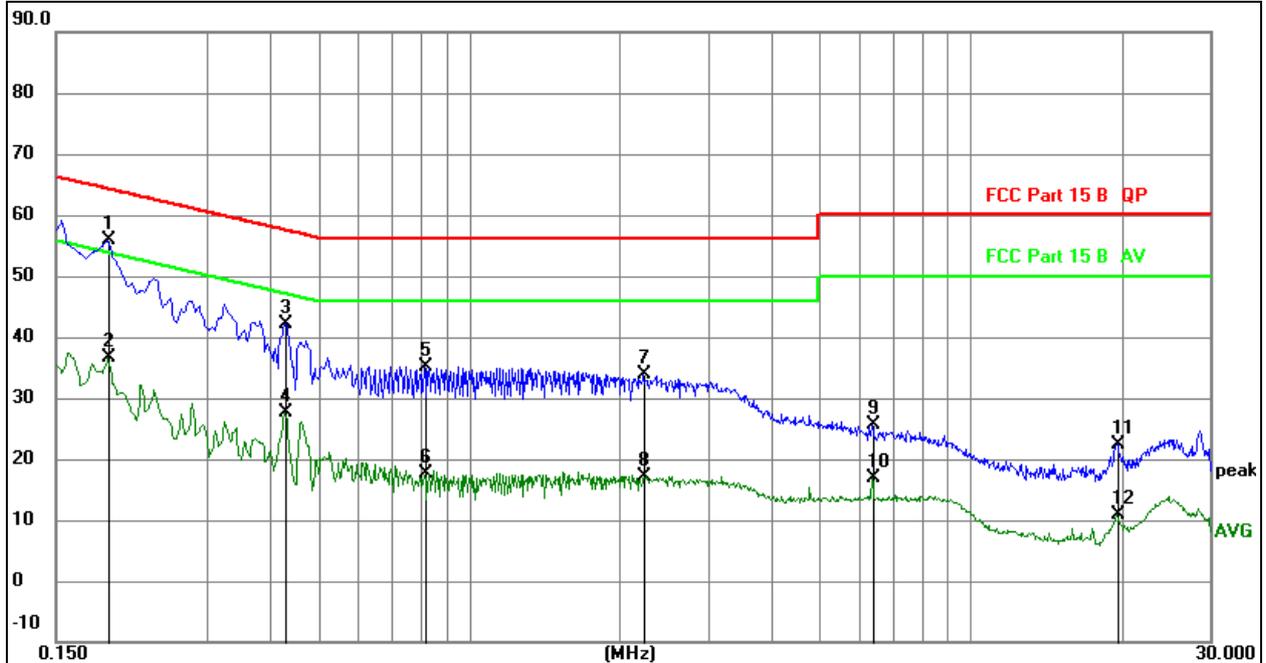

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1905	35.90	20.07	55.97	64.01	-8.04	QP
2		0.1905	16.48	20.07	36.55	54.01	-17.46	AVG
3		0.4290	22.15	20.08	42.23	57.27	-15.04	QP
4		0.4290	7.58	20.08	27.66	47.27	-19.61	AVG
5		0.8160	15.00	20.09	35.09	56.00	-20.91	QP
6		0.8160	-2.40	20.09	17.69	46.00	-28.31	AVG
7		2.2335	13.80	20.10	33.90	56.00	-22.10	QP
8		2.2335	-2.99	20.10	17.11	46.00	-28.89	AVG
9		6.3690	5.36	20.16	25.52	60.00	-34.48	QP
10		6.3690	-3.16	20.16	17.00	50.00	-33.00	AVG
11		19.5495	2.10	20.33	22.43	60.00	-37.57	QP
12		19.5495	-9.49	20.33	10.84	50.00	-39.16	AVG

SHENZHEN

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	N

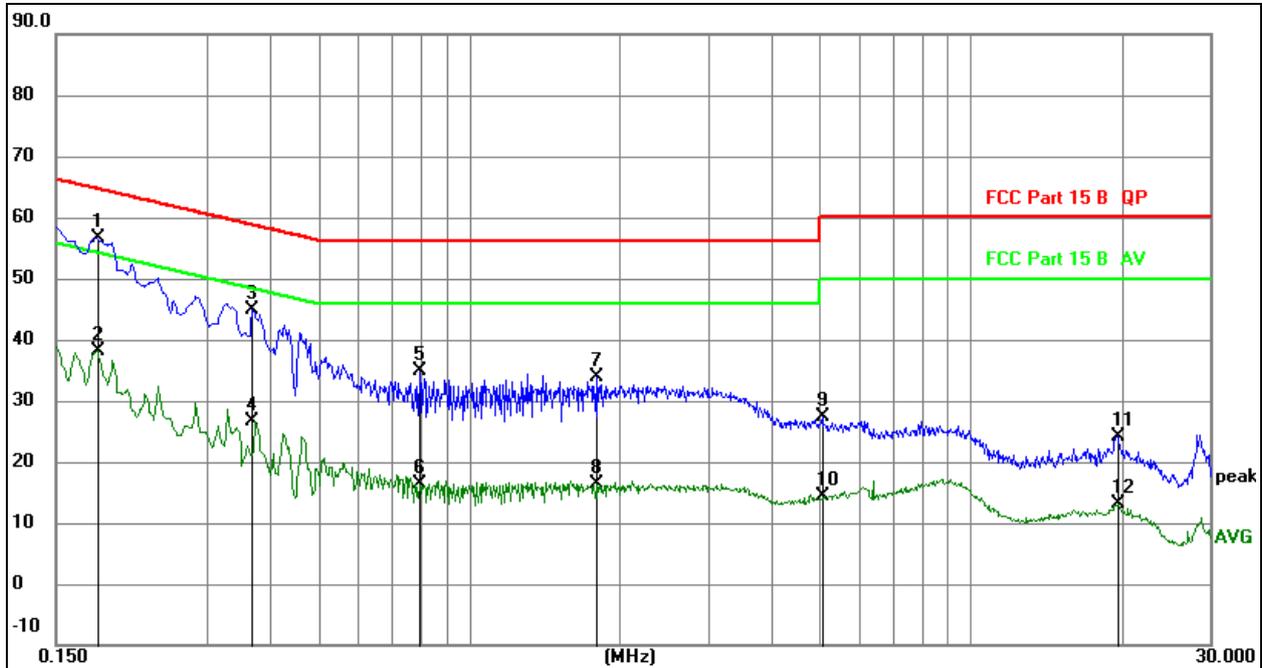

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1806	36.54	20.07	56.61	64.46	-7.85	QP
2		0.1806	18.18	20.07	38.25	54.46	-16.21	AVG
3		0.3692	24.72	20.08	44.80	58.52	-13.72	QP
4		0.3692	6.60	20.08	26.68	48.52	-21.84	AVG
5		0.7960	14.90	20.09	34.99	56.00	-21.01	QP
6		0.7960	-3.63	20.09	16.46	46.00	-29.54	AVG
7		1.7905	13.86	20.10	33.96	56.00	-22.04	QP
8		1.7905	-3.61	20.10	16.49	46.00	-29.51	AVG
9		5.0580	7.27	20.15	27.42	60.00	-32.58	QP
10		5.0580	-5.65	20.15	14.50	50.00	-35.50	AVG
11		19.6354	3.90	20.33	24.23	60.00	-35.77	QP
12		19.6354	-7.27	20.33	13.06	50.00	-36.94	AVG

**SE1-15**


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	L

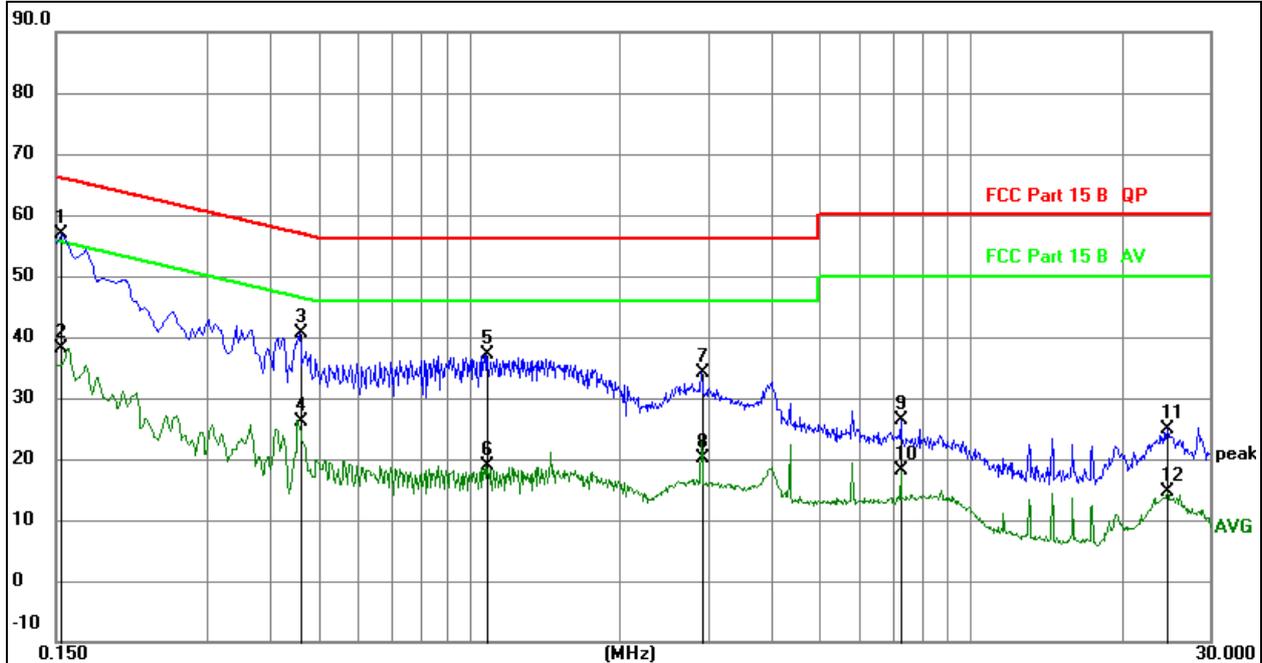
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	36.89	20.07	56.96	65.79	-8.83	QP
2		0.1539	17.95	20.07	38.02	55.79	-17.77	AVG
3		0.4588	20.48	20.08	40.56	56.71	-16.15	QP
4		0.4588	6.12	20.08	26.20	46.71	-20.51	AVG
5		1.0824	17.09	20.09	37.18	56.00	-18.82	QP
6		1.0824	-1.22	20.09	18.87	46.00	-27.13	AVG
7		2.8998	14.06	20.12	34.18	56.00	-21.82	QP
8		2.8998	0.11	20.12	20.23	46.00	-25.77	AVG
9		7.2518	6.29	20.16	26.45	60.00	-33.55	QP
10		7.2518	-2.07	20.16	18.09	50.00	-31.91	AVG
11		24.6594	4.49	20.30	24.79	60.00	-35.21	QP
12		24.6594	-5.66	20.30	14.64	50.00	-35.36	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	N

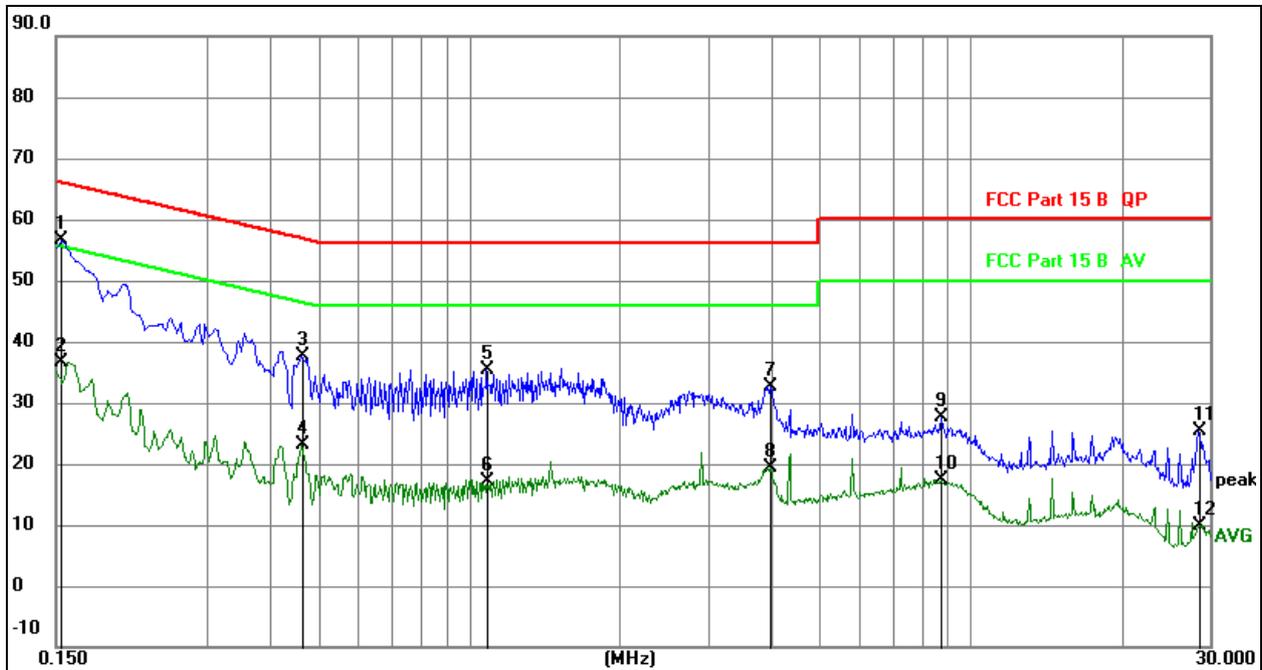
**Remark:**


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	36.63	20.07	56.70	65.79	-9.09	QP
2		0.1539	16.48	20.07	36.55	55.79	-19.24	AVG
3		0.4637	17.59	20.08	37.67	56.63	-18.96	QP
4		0.4637	2.93	20.08	23.01	46.63	-23.62	AVG
5		1.0824	15.19	20.09	35.28	56.00	-20.72	QP
6		1.0824	-2.88	20.09	17.21	46.00	-28.79	AVG
7		3.9850	12.56	20.14	32.70	56.00	-23.30	QP
8		3.9850	-0.84	20.14	19.30	46.00	-26.70	AVG
9		8.7293	7.42	20.17	27.59	60.00	-32.41	QP
10		8.7293	-2.70	20.17	17.47	50.00	-32.53	AVG
11		28.4519	5.08	20.28	25.36	60.00	-34.64	QP
12		28.4519	-10.37	20.28	9.91	50.00	-40.09	AVG


## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

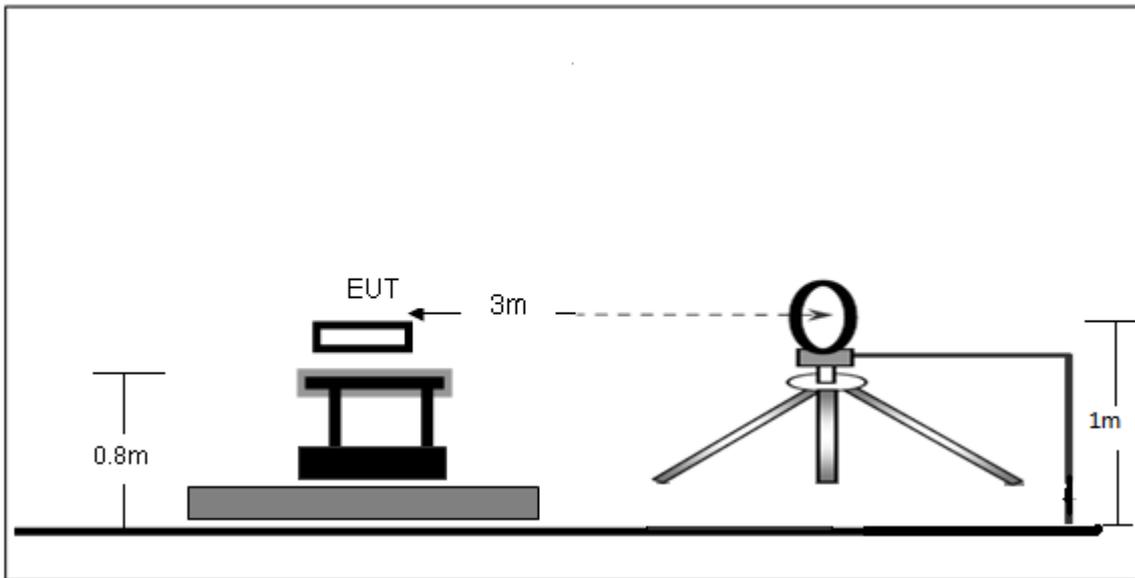

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

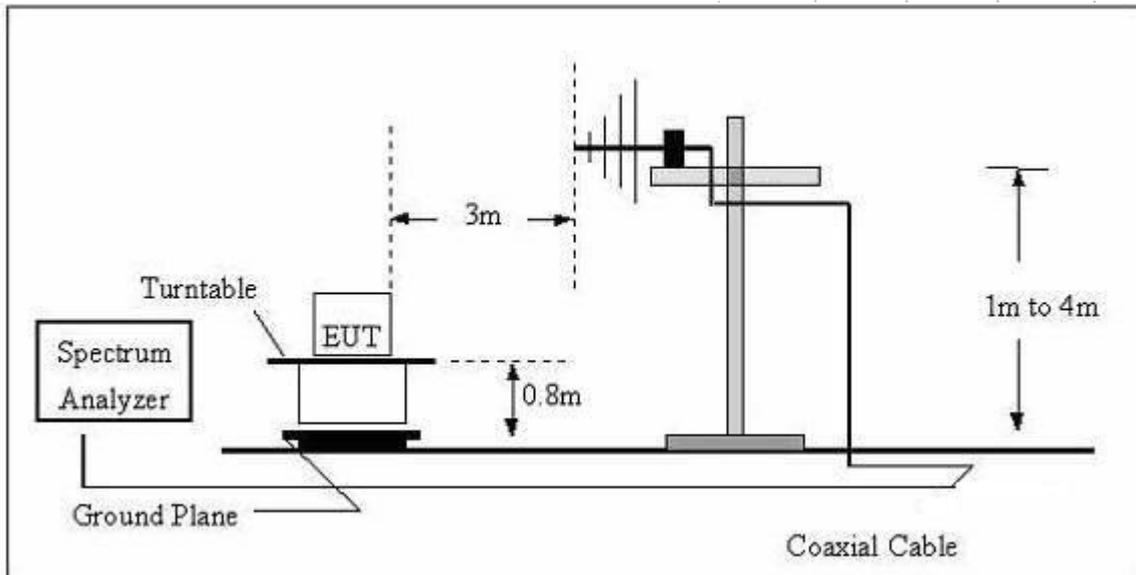

## (C) Radiated Emission Test-Up Frequency Above 1GHz

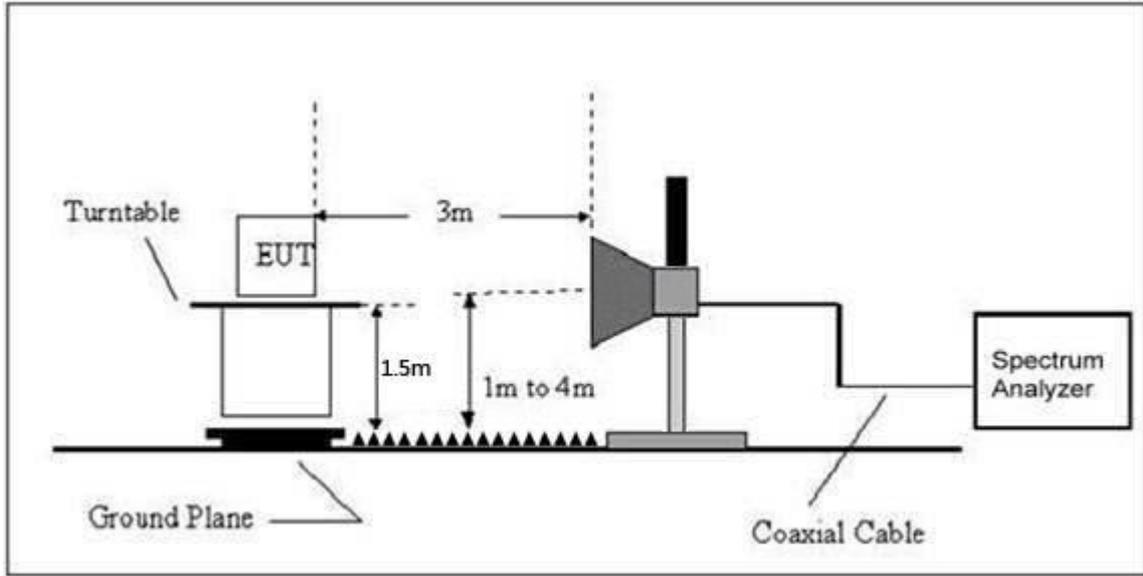
**7.2 Limit**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

### 7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

## 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);


Limit line = specific limits(dBuv) + distance extrapolation factor.



Between 30MHz – 1GHz

**SE1-20**


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	Horizontal

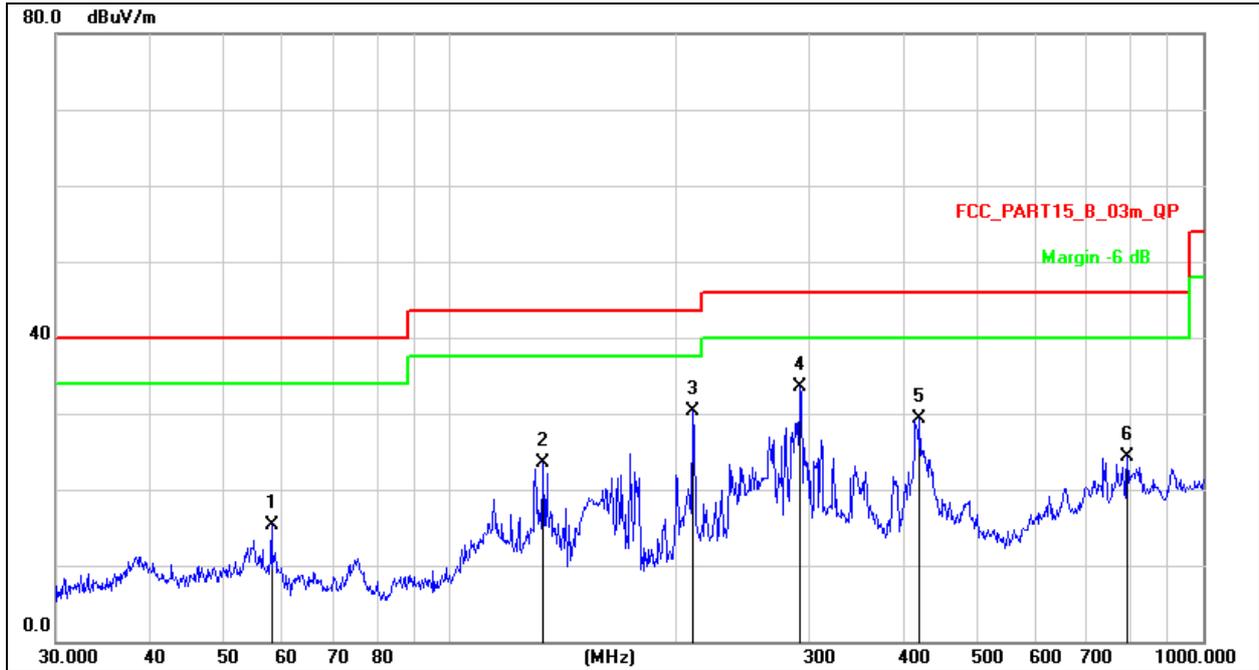

Remark:  
 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 2. Measurement = Reading Level + Correct Factor  
 3. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		57.9993	30.28	-14.98	15.30	40.00	-24.70	QP
2		133.1511	41.84	-18.25	23.59	43.50	-19.91	QP
3		210.0482	45.76	-15.43	30.33	43.50	-13.17	QP
4	*	292.0583	46.94	-13.41	33.53	46.00	-12.47	QP
5		420.5803	39.65	-10.44	29.21	46.00	-16.79	QP
6		793.3960	28.73	-4.48	24.25	46.00	-21.75	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	Vertical

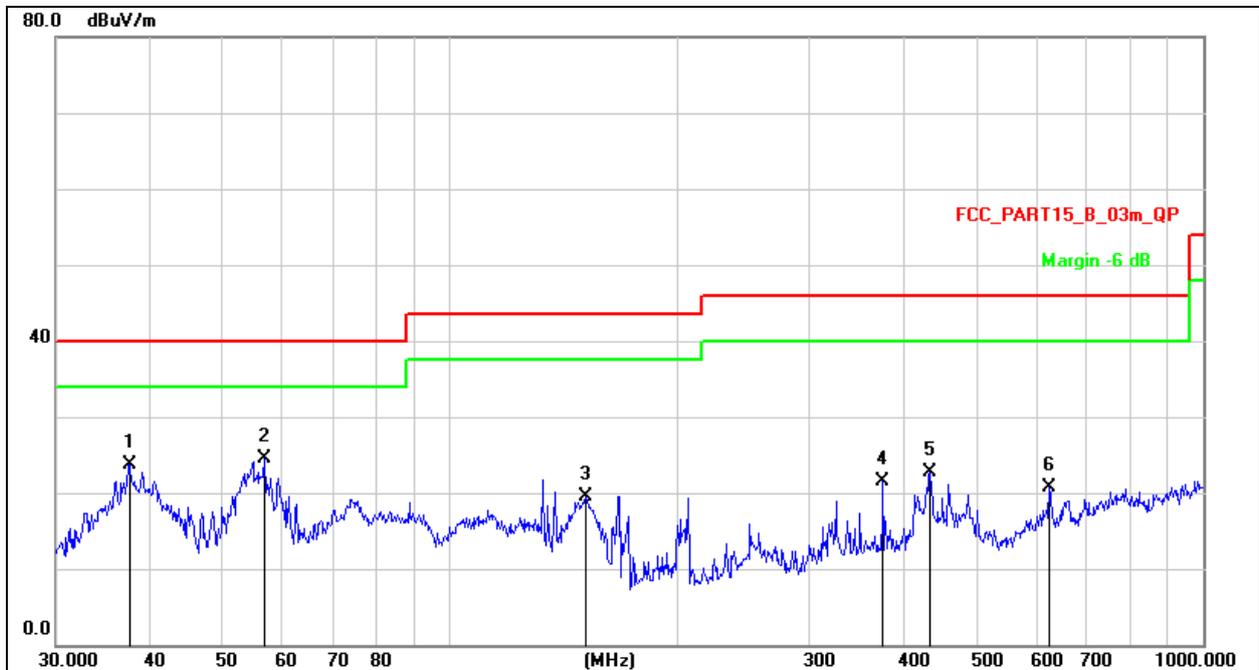

**Remark:**

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		37.5479	38.92	-15.19	23.73	40.00	-16.27	QP
2	*	56.7917	39.27	-14.82	24.45	40.00	-15.55	QP
3		151.5972	38.87	-19.31	19.56	43.50	-23.94	QP
4		375.9385	32.68	-11.15	21.53	46.00	-24.47	QP
5		434.0651	32.85	-10.17	22.68	46.00	-23.32	QP
6		625.0780	27.39	-6.59	20.80	46.00	-25.20	QP

**SE1-5**


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	Horizontal

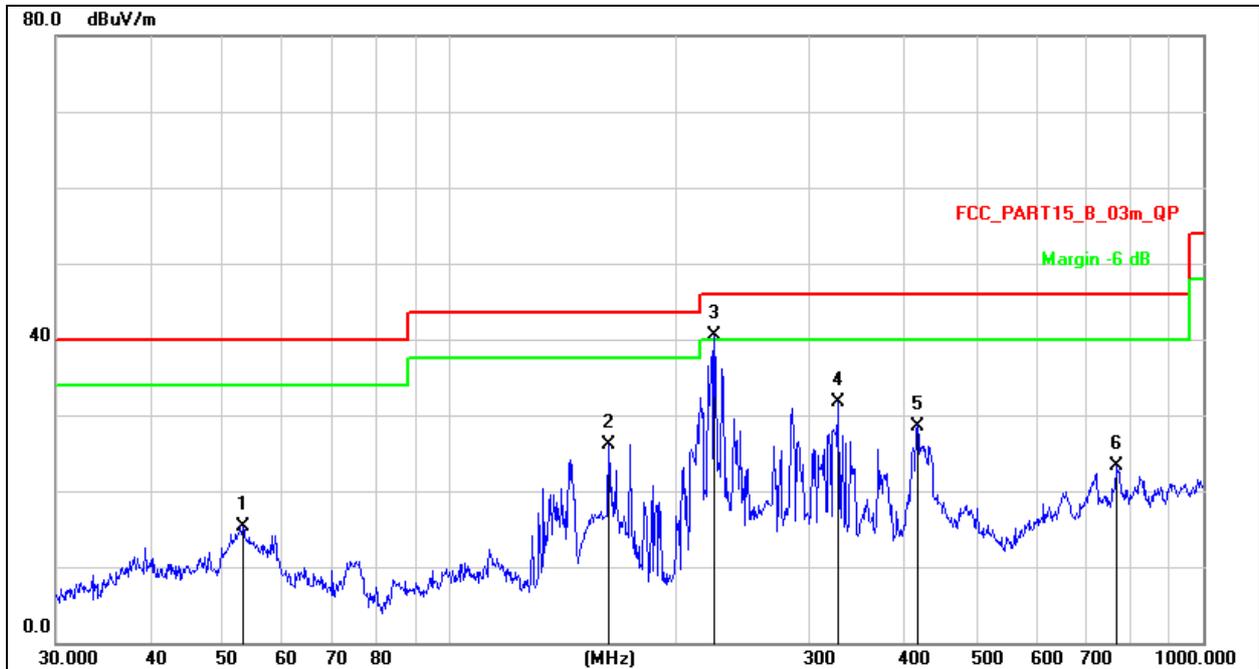
**Remark:**

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		53.1313	29.63	-14.32	15.31	40.00	-24.69	QP
2		162.6106	44.67	-18.49	26.18	43.50	-17.32	QP
3	*	224.5193	55.43	-15.02	40.41	46.00	-5.59	QP
4		327.8873	43.97	-12.26	31.71	46.00	-14.29	QP
5		417.6411	39.09	-10.49	28.60	46.00	-17.40	QP
6		768.7481	28.10	-4.77	23.33	46.00	-22.67	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	Vertical

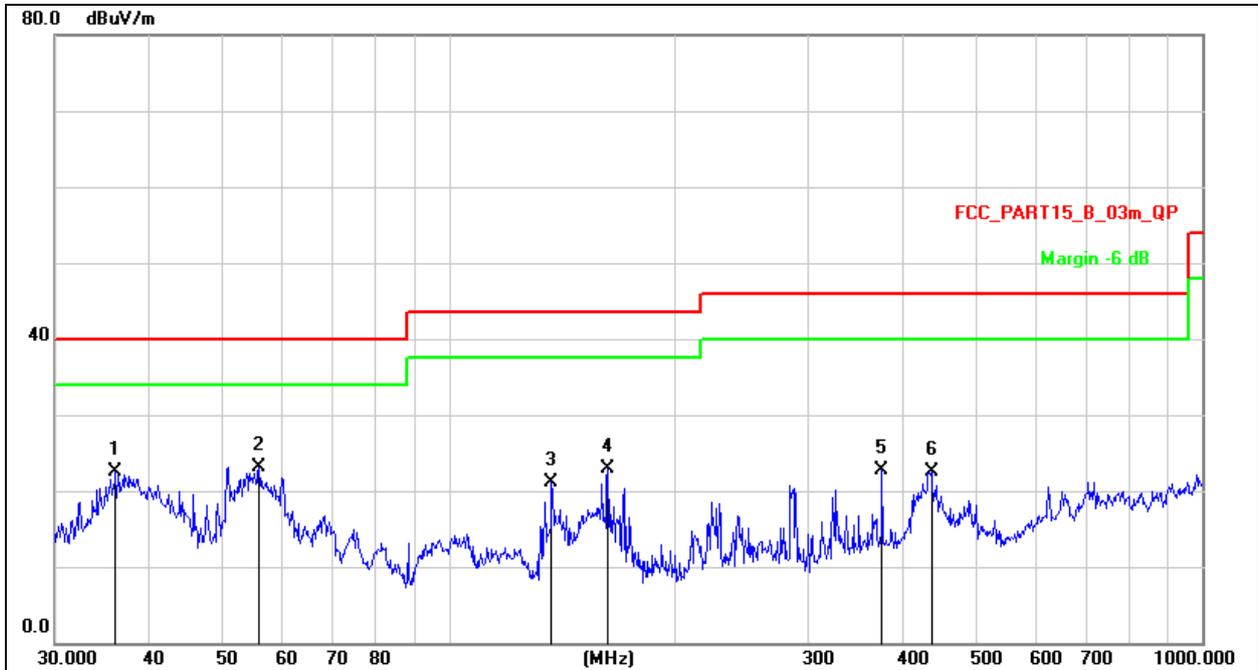
**Remark:**


- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		36.1272	37.88	-15.47	22.41	40.00	-17.59	QP
2	*	56.0007	37.85	-14.71	23.14	40.00	-16.86	QP
3		136.9391	39.72	-18.52	21.20	43.50	-22.30	QP
4		162.6106	41.46	-18.49	22.97	43.50	-20.53	QP
5		375.9385	33.85	-11.15	22.70	46.00	-23.30	QP
6		437.1199	32.65	-10.11	22.54	46.00	-23.46	QP

CO.,LTD

**SE1-10**

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	Horizontal

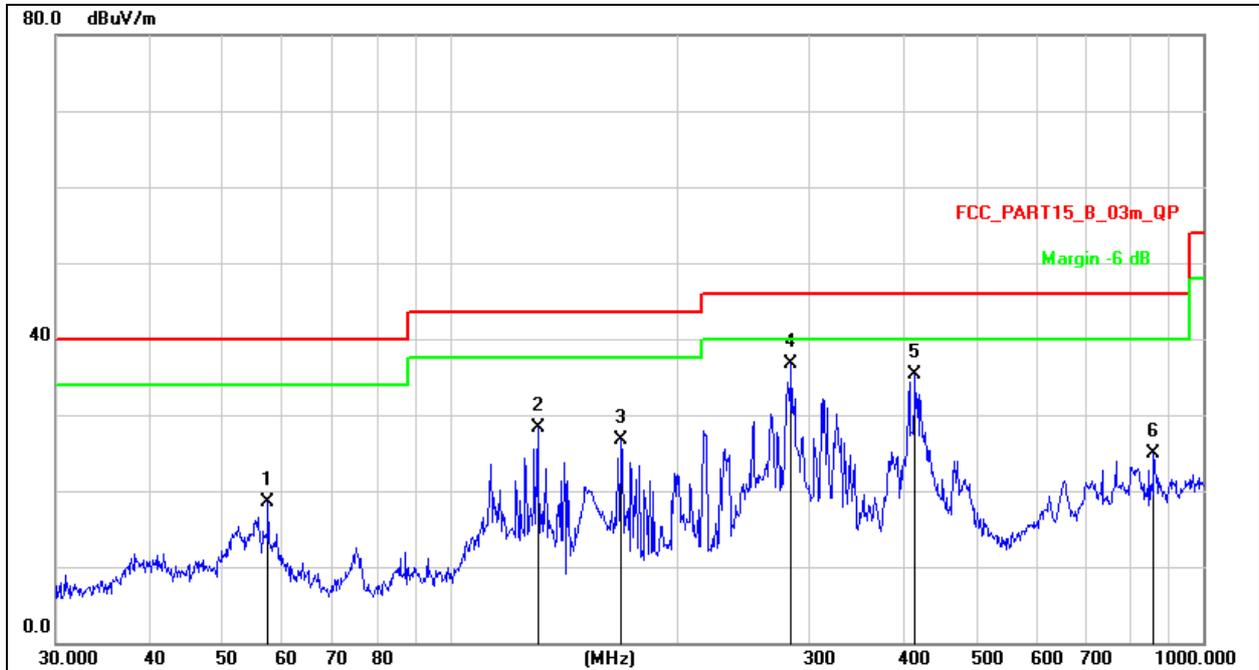

**Remark:**

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		57.3923	33.46	-14.90	18.56	40.00	-21.44	QP
2		130.8369	46.42	-18.09	28.33	43.50	-15.17	QP
3		169.0054	44.75	-18.02	26.73	43.50	-16.77	QP
4	*	283.9791	50.22	-13.58	36.64	46.00	-9.36	QP
5		414.7223	45.92	-10.55	35.37	46.00	-10.63	QP
6		860.0352	28.67	-3.81	24.86	46.00	-21.14	QP

SHENZHEN

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	Vertical

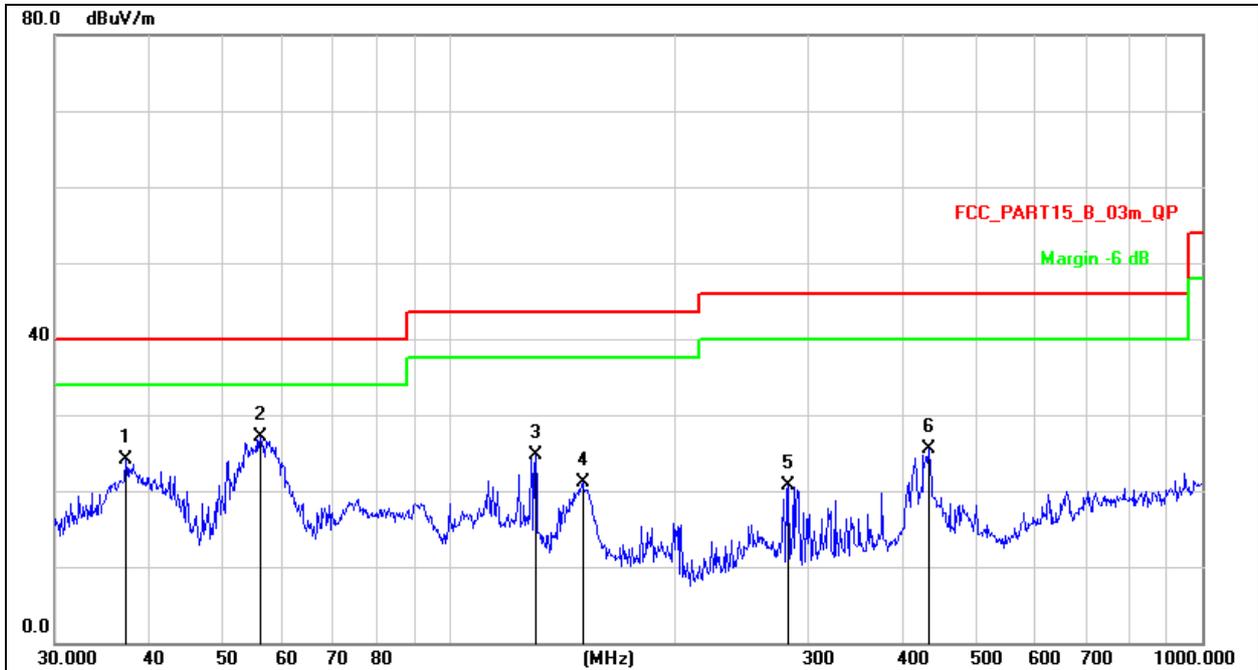

**Remark:**

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		37.2855	39.34	-15.24	24.10	40.00	-15.90	QP
2	*	56.1974	41.82	-14.74	27.08	40.00	-12.92	QP
3		130.3789	42.83	-18.06	24.77	43.50	-18.73	QP
4		150.5378	40.48	-19.39	21.09	43.50	-22.41	QP
5		281.9946	34.31	-13.62	20.69	46.00	-25.31	QP
6		434.0651	35.75	-10.17	25.58	46.00	-20.42	QP

**SE1-15**


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	Horizontal

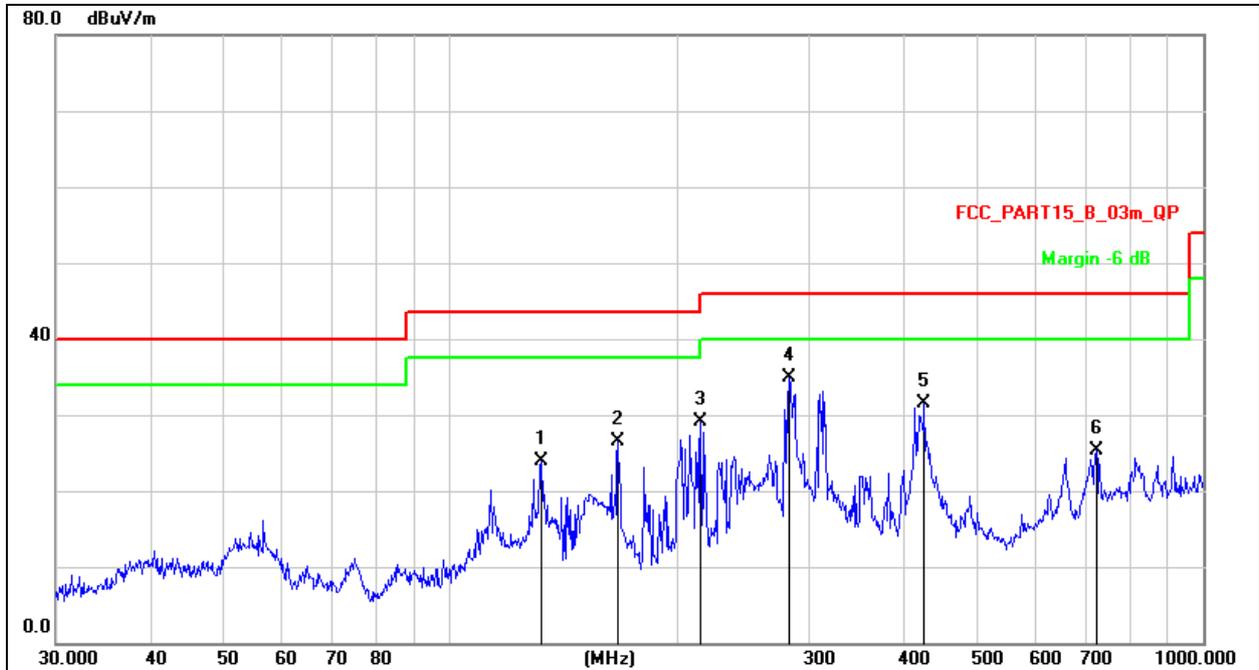

- Remark:
- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
  - Measurement = Reading Level + Correct Factor
  - Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		132.2206	42.11	-18.19	23.92	43.50	-19.58	QP
2		167.2368	44.67	-18.15	26.52	43.50	-16.98	QP
3		215.2678	44.30	-15.28	29.02	43.50	-14.48	QP
4	*	281.9946	48.49	-13.62	34.87	46.00	-11.13	QP
5		426.5210	41.78	-10.32	31.46	46.00	-14.54	QP
6		721.7259	30.63	-5.40	25.23	46.00	-20.77	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 10	Polarization:	Vertical

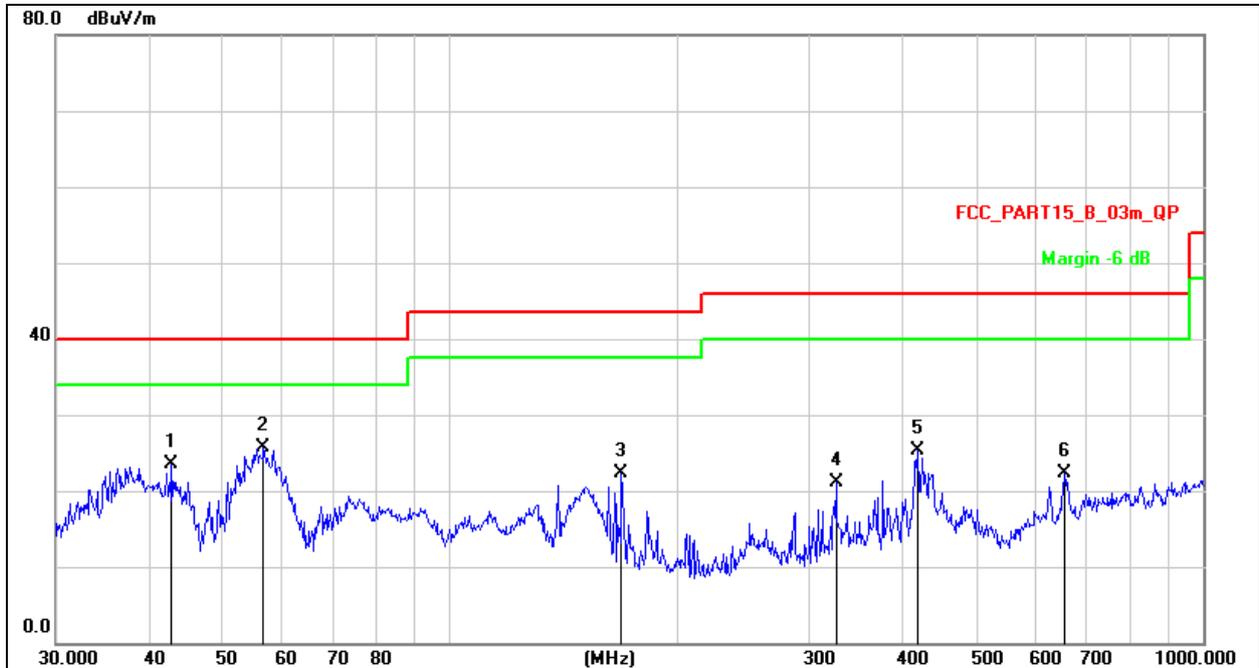
**Remark:**

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		42.7496	37.91	-14.49	23.42	40.00	-16.58	QP
2	*	56.5929	40.51	-14.79	25.72	40.00	-14.28	QP
3		169.0054	40.35	-18.02	22.33	43.50	-21.17	QP
4		325.5958	33.44	-12.34	21.10	46.00	-24.90	QP
5		417.6411	35.81	-10.49	25.32	46.00	-20.68	QP
6		654.2318	28.34	-6.12	22.22	46.00	-23.78	QP

**Between 1GHz – 25GHz**
**802.11b**

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low channel:2412MHz</b>							
V	4824.00	72.78	-19.95	52.83	74.00	-21.17	PK
V	4824.00	62.65	-19.95	42.70	54.00	-11.30	AV
V	7236.00	63.01	-14.14	48.87	74.00	-25.13	PK
V	7236.00	52.85	-14.14	38.71	54.00	-15.29	AV
H	4824.00	71.29	-19.95	51.34	74.00	-22.66	PK
H	4824.00	60.96	-19.95	41.01	54.00	-12.99	AV
H	7236.00	61.46	-14.14	47.32	74.00	-26.68	PK
H	7236.00	53.75	-14.14	39.61	54.00	-14.39	AV
<b>Middle channel:2437MHz</b>							
V	4874.00	70.40	-19.85	50.55	74.00	-23.45	PK
V	4874.00	61.94	-19.85	42.09	54.00	-11.91	AV
V	7311.00	63.07	-13.93	49.14	74.00	-24.86	PK
V	7311.00	53.89	-13.93	39.96	54.00	-14.04	AV
H	4874.00	68.34	-19.85	48.49	74.00	-25.51	PK
H	4874.00	58.98	-19.85	39.13	54.00	-14.87	AV
H	7311.00	61.69	-13.93	47.76	74.00	-26.24	PK
H	7311.00	52.99	-13.93	39.06	54.00	-14.94	AV
<b>High channel:2462MHz</b>							
V	4924.00	71.77	-19.75	52.02	74.00	-21.98	PK
V	4924.00	61.70	-19.75	41.95	54.00	-12.05	AV
V	7386.00	64.56	-13.72	50.84	74.00	-23.16	PK
V	7386.00	55.04	-13.72	41.32	54.00	-12.68	AV
H	4924.00	69.55	-19.75	49.80	74.00	-24.20	PK
H	4924.00	58.92	-19.75	39.17	54.00	-14.83	AV
H	7386.00	62.00	-13.72	48.28	74.00	-25.72	PK
H	7386.00	53.22	-13.72	39.50	54.00	-14.50	AV

**Remark:**

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low channel:2412MHz</b>							
V	4824.00	70.59	-19.95	50.64	74.00	-23.36	PK
V	4824.00	61.92	-19.95	41.97	54.00	-12.03	AV
V	7236.00	62.70	-14.14	48.56	74.00	-25.44	PK
V	7236.00	52.85	-14.14	38.71	54.00	-15.29	AV
H	4824.00	68.93	-19.95	48.98	74.00	-25.02	PK
H	4824.00	59.13	-19.95	39.18	54.00	-14.82	AV
H	7236.00	60.05	-14.14	45.91	74.00	-28.09	PK
H	7236.00	51.68	-14.14	37.54	54.00	-16.46	AV
<b>Middle channel:2437MHz</b>							
V	4874.00	68.60	-19.85	48.75	74.00	-25.25	PK
V	4874.00	62.19	-19.85	42.34	54.00	-11.66	AV
V	7311.00	61.55	-13.93	47.62	74.00	-26.38	PK
V	7311.00	53.34	-13.93	39.41	54.00	-14.59	AV
H	4874.00	64.86	-19.85	45.01	74.00	-28.99	PK
H	4874.00	54.45	-19.85	34.60	54.00	-19.40	AV
H	7311.00	60.31	-13.93	46.38	74.00	-27.62	PK
H	7311.00	51.67	-13.93	37.74	54.00	-16.26	AV
<b>High channel:2462MHz</b>							
V	4924.00	71.46	-19.75	51.71	74.00	-22.29	PK
V	4924.00	63.39	-19.75	43.64	54.00	-10.36	AV
V	7386.00	64.26	-13.72	50.54	74.00	-23.46	PK
V	7386.00	53.94	-13.72	40.22	54.00	-13.78	AV
H	4924.00	69.76	-19.75	50.01	74.00	-23.99	PK
H	4924.00	58.87	-19.75	39.12	54.00	-14.88	AV
H	7386.00	62.72	-13.72	49.00	74.00	-25.00	PK
H	7386.00	54.35	-13.72	40.63	54.00	-13.37	AV

## Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11n20**

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low channel:2412MHz</b>							
V	4824.00	70.38	-19.95	50.43	74.00	-23.57	PK
V	4824.00	59.89	-19.95	39.94	54.00	-14.06	AV
V	7236.00	60.54	-14.14	46.40	74.00	-27.60	PK
V	7236.00	50.20	-14.14	36.06	54.00	-17.94	AV
H	4824.00	67.55	-19.95	47.60	74.00	-26.40	PK
H	4824.00	58.51	-19.95	38.56	54.00	-15.44	AV
H	7236.00	59.43	-14.14	45.29	74.00	-28.71	PK
H	7236.00	51.85	-14.14	37.71	54.00	-16.29	AV
<b>Middle channel:2437MHz</b>							
V	4874.00	66.53	-19.85	46.68	74.00	-27.32	PK
V	4874.00	59.99	-19.85	40.14	54.00	-13.86	AV
V	7311.00	58.51	-13.93	44.58	74.00	-29.42	PK
V	7311.00	48.80	-13.93	34.87	54.00	-19.13	AV
H	4874.00	62.36	-19.85	42.51	74.00	-31.49	PK
H	4874.00	52.80	-19.85	32.95	54.00	-21.05	AV
H	7311.00	56.86	-13.93	42.93	74.00	-31.07	PK
H	7311.00	47.98	-13.93	34.05	54.00	-19.95	AV
<b>High channel:2462MHz</b>							
V	4924.00	68.70	-19.75	48.95	74.00	-25.05	PK
V	4924.00	57.95	-19.75	38.20	54.00	-15.80	AV
V	7386.00	59.75	-13.72	46.03	74.00	-27.97	PK
V	7386.00	50.68	-13.72	36.96	54.00	-17.04	AV
H	4924.00	67.23	-19.75	47.48	74.00	-26.52	PK
H	4924.00	57.56	-19.75	37.81	54.00	-16.19	AV
H	7386.00	57.10	-13.72	43.38	74.00	-30.62	PK
H	7386.00	48.19	-13.72	34.47	54.00	-19.53	AV

**Remark:**


1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

SHENZHEN

## 8. Radiated Band Emission Measurement And Restricted Bands Of Operation

### 8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

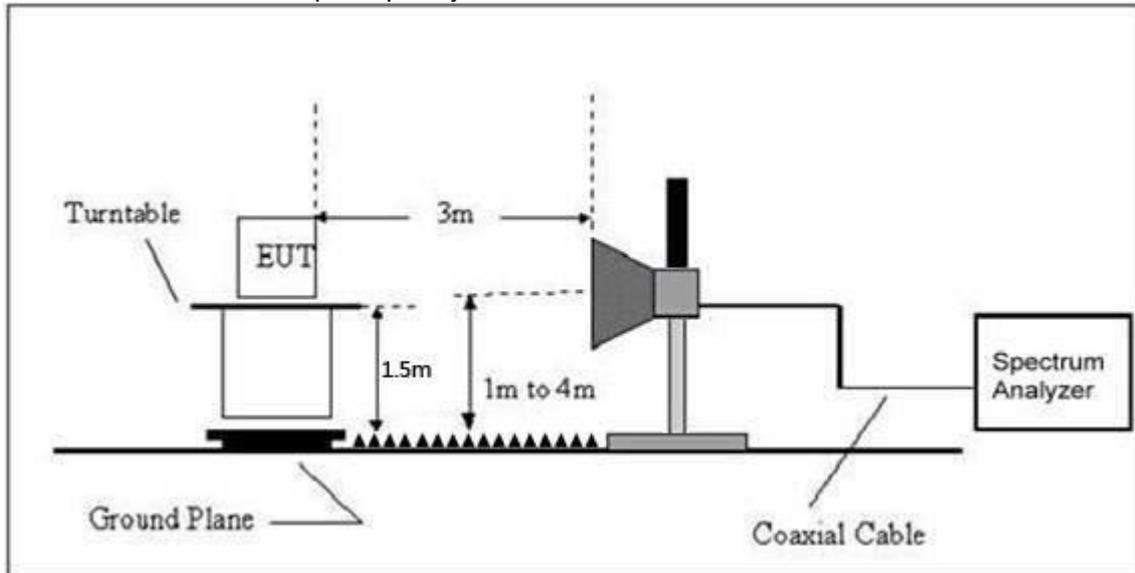

### 8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

## Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

## Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

### 8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel.

## Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 8.5 Test Result


Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Measurement (dBuV/m)		Over	Result	
					PK	PK	AV			
802.11b	<b>Low Channel 2412MHz</b>									
	H	2390.00	73.20	-25.43	47.77	74.00	54.00	-26.23	PASS	
	H	2400.00	76.06	-25.40	50.66	74.00	54.00	-23.34	PASS	
	V	2390.00	72.27	-25.43	46.84	74.00	54.00	-27.16	PASS	
	V	2400.00	73.05	-25.40	47.65	74.00	54.00	-26.35	PASS	
	<b>High Channel 2462MHz</b>									
	H	2483.50	71.78	-25.15	46.63	74.00	54.00	-27.37	PASS	
	H	2500.00	68.31	-25.10	43.21	74.00	54.00	-30.79	PASS	
	V	2483.50	70.89	-25.15	45.74	74.00	54.00	-28.26	PASS	
	V	2500.00	67.57	-25.10	42.47	74.00	54.00	-31.53	PASS	
	802.11g	<b>Low Channel 2412MHz</b>								
		H	2390.00	72.32	-25.43	46.89	74.00	54.00	-27.11	PASS
H		2400.00	75.26	-25.40	49.86	74.00	54.00	-24.14	PASS	
V		2390.00	72.96	-25.43	47.53	74.00	54.00	-26.47	PASS	
V		2400.00	72.90	-25.40	47.50	74.00	54.00	-26.50	PASS	
<b>High Channel 2462MHz</b>										
H		2483.50	71.14	-25.15	45.99	74.00	54.00	-28.01	PASS	
H		2500.00	68.02	-25.10	42.92	74.00	54.00	-31.08	PASS	
V		2483.50	72.37	-25.15	47.22	74.00	54.00	-26.78	PASS	
V		2500.00	68.31	-25.10	43.21	74.00	54.00	-30.79	PASS	
802.11n20		<b>Low Channel 2412MHz</b>								
		H	2390.00	73.00	-25.43	47.57	74.00	54.00	-26.43	PASS
	H	2400.00	75.86	-25.40	50.46	74.00	54.00	-23.54	PASS	
	V	2390.00	72.88	-25.43	47.45	74.00	54.00	-26.55	PASS	
	V	2400.00	74.51	-25.40	49.11	74.00	54.00	-24.89	PASS	
	<b>High Channel 2462MHz</b>									
	H	2483.50	72.93	-25.15	47.78	74.00	54.00	-26.22	PASS	
	H	2500.00	68.79	-25.10	43.69	74.00	54.00	-30.31	PASS	
	V	2483.50	71.61	-25.15	46.46	74.00	54.00	-27.54	PASS	
	V	2500.00	67.72	-25.10	42.62	74.00	54.00	-31.38	PASS	

**Remark:**

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 9. Power Spectral Density Test

### 9.1 Block Diagram Of Test Setup

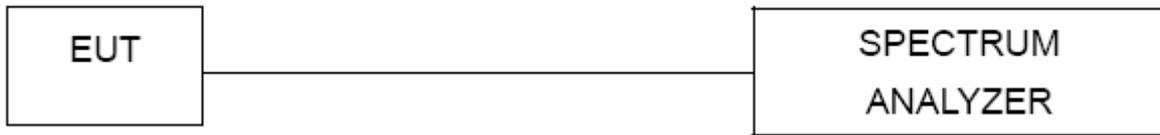

### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

### 9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss





## 9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage :	DC 24V


Test Mode	Frequency	Power Spectral Density (dBm/10kHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-5.60	-10.83	8	PASS
	2437 MHz	-5.30	-10.53	8	PASS
	2462 MHz	-4.53	-9.76	8	PASS
TX g Mode	2412 MHz	-8.95	-14.18	8	PASS
	2437 MHz	-8.32	-13.55	8	PASS
	2462 MHz	-8.68	-13.91	8	PASS
TX n Mode(20M)	2412 MHz	-9.57	-14.80	8	PASS
	2437 MHz	-7.72	-12.95	8	PASS
	2462 MHz	-8.02	-13.25	8	PASS



Note: Correction Factor =  $10\log(3\text{KHz}/\text{RBW in measurement}) = -5.23$   
 Power Spectral Density (dBm/3kHz= Power Spectral Density (dBm/10kHz)-5.23


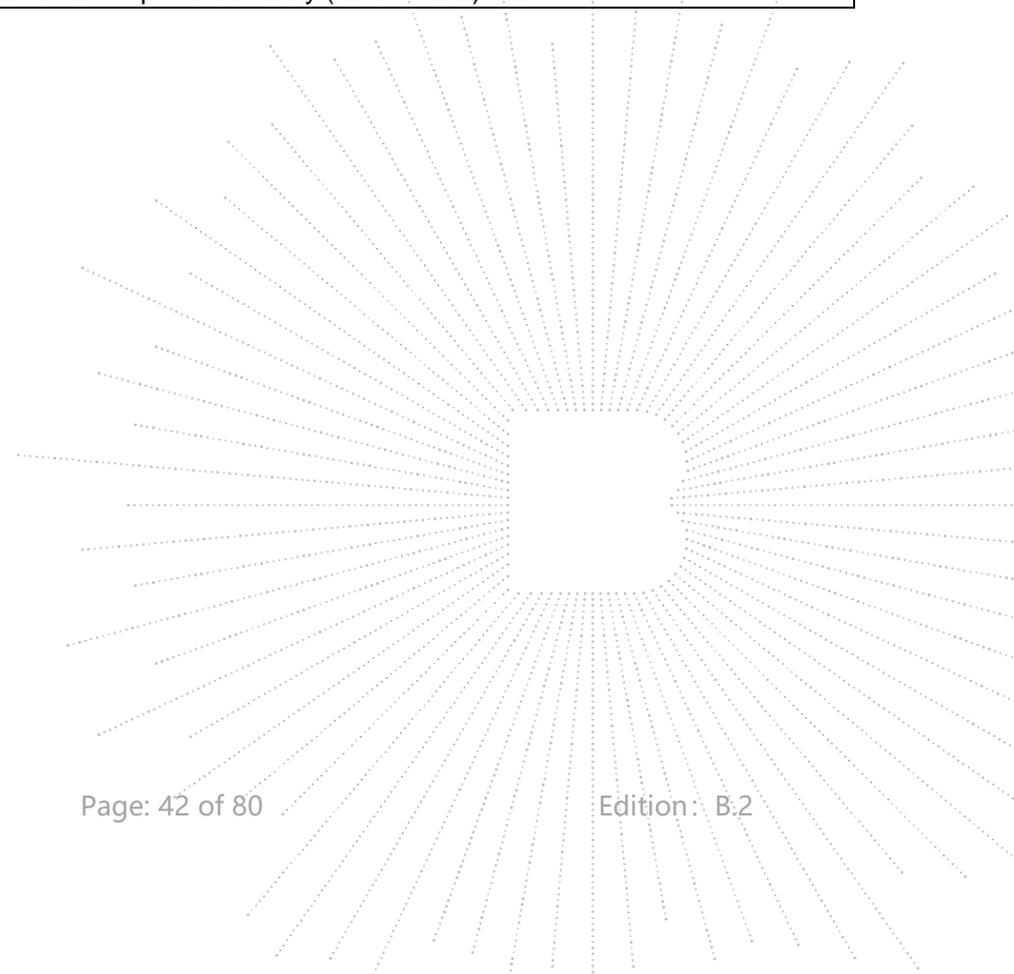


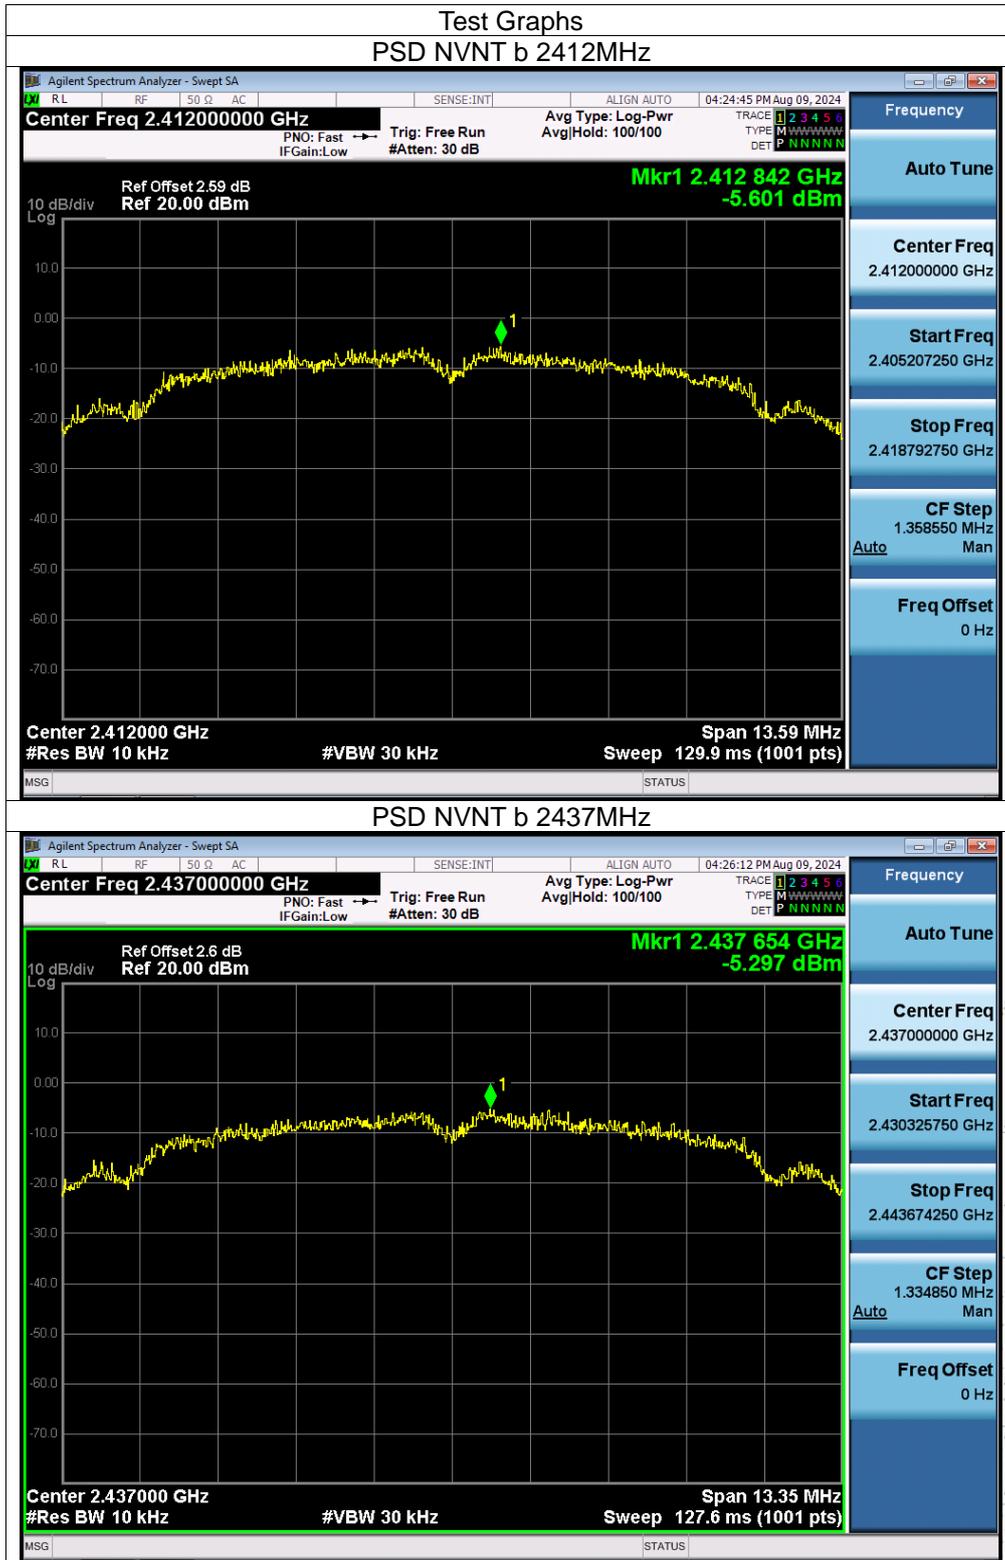
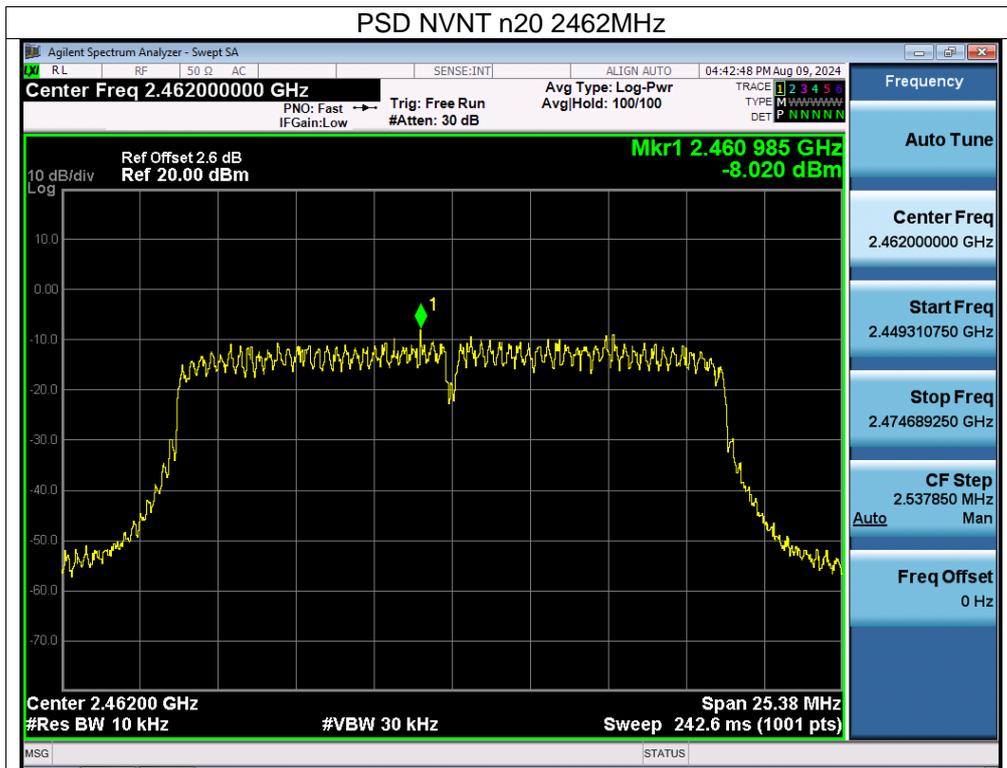


SHENZHEN

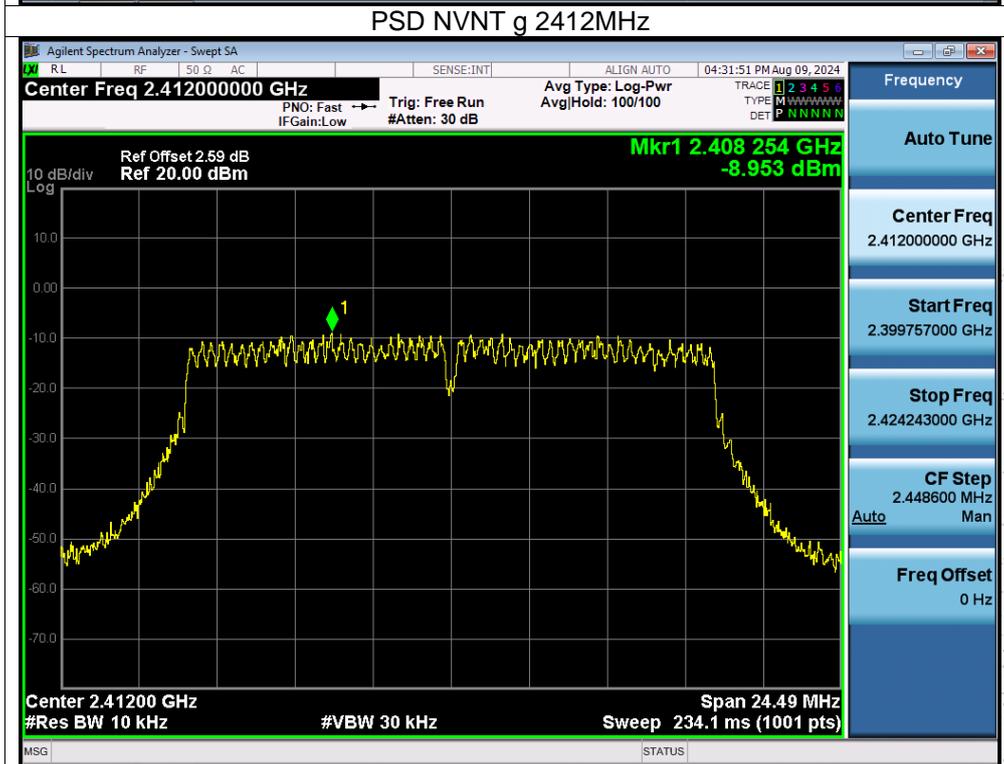

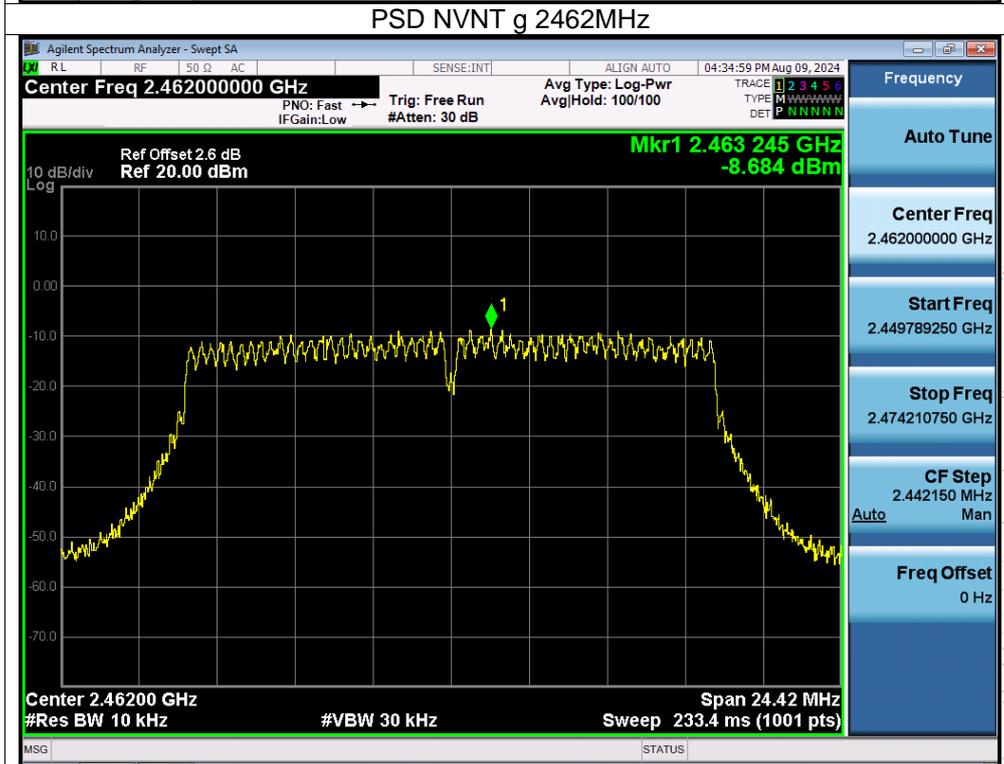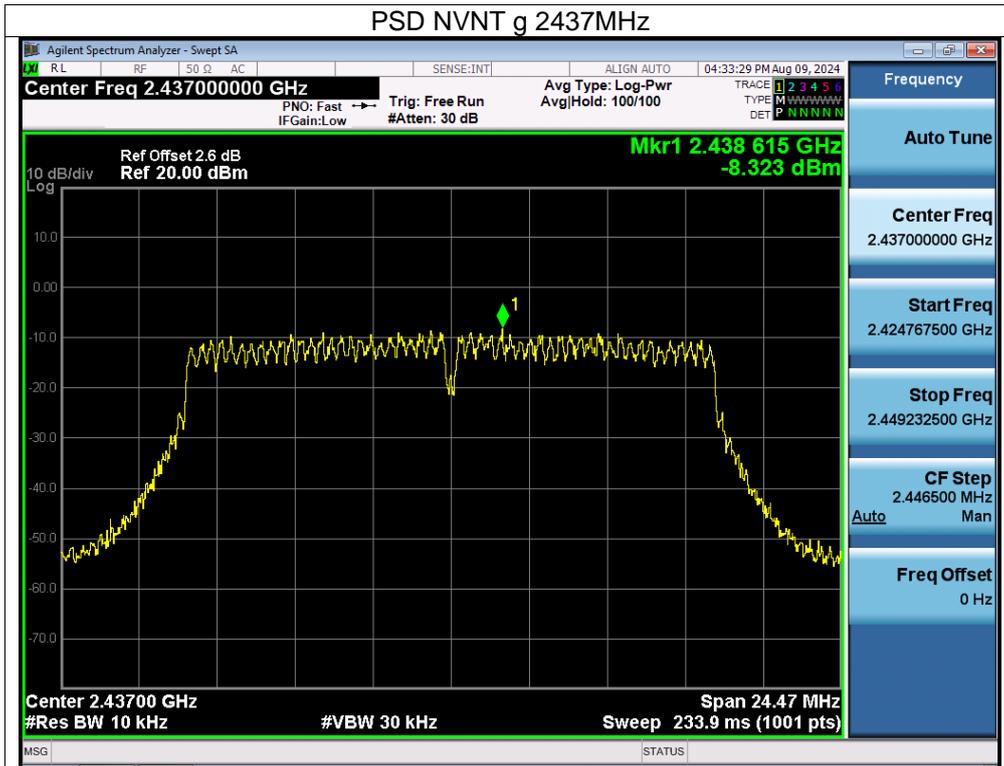


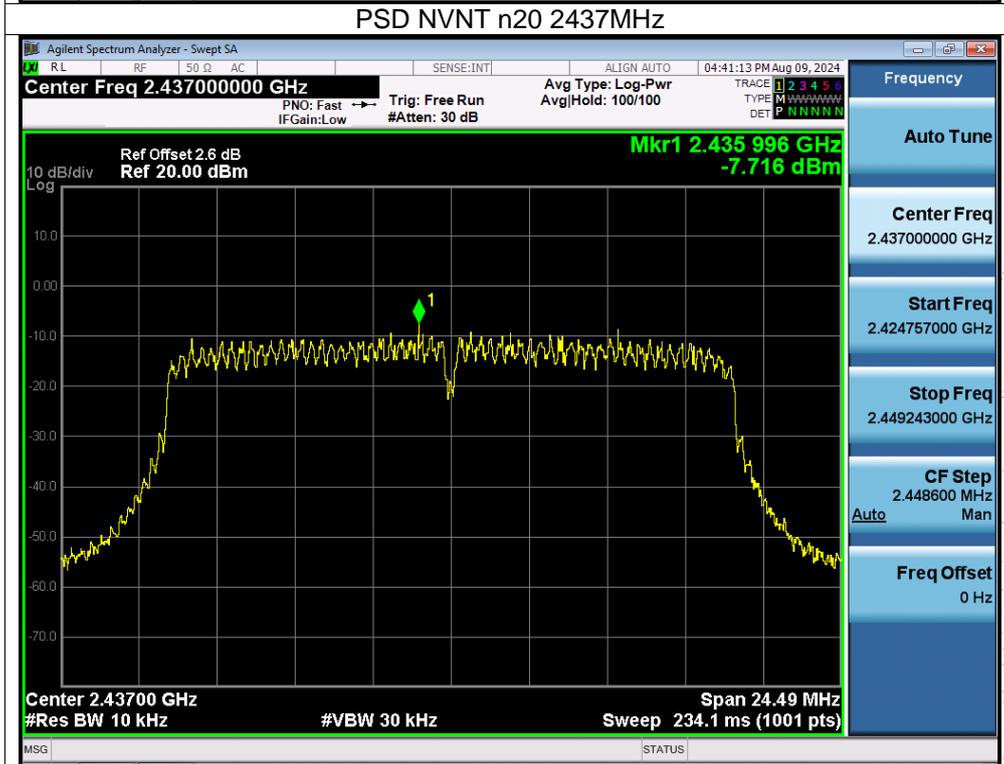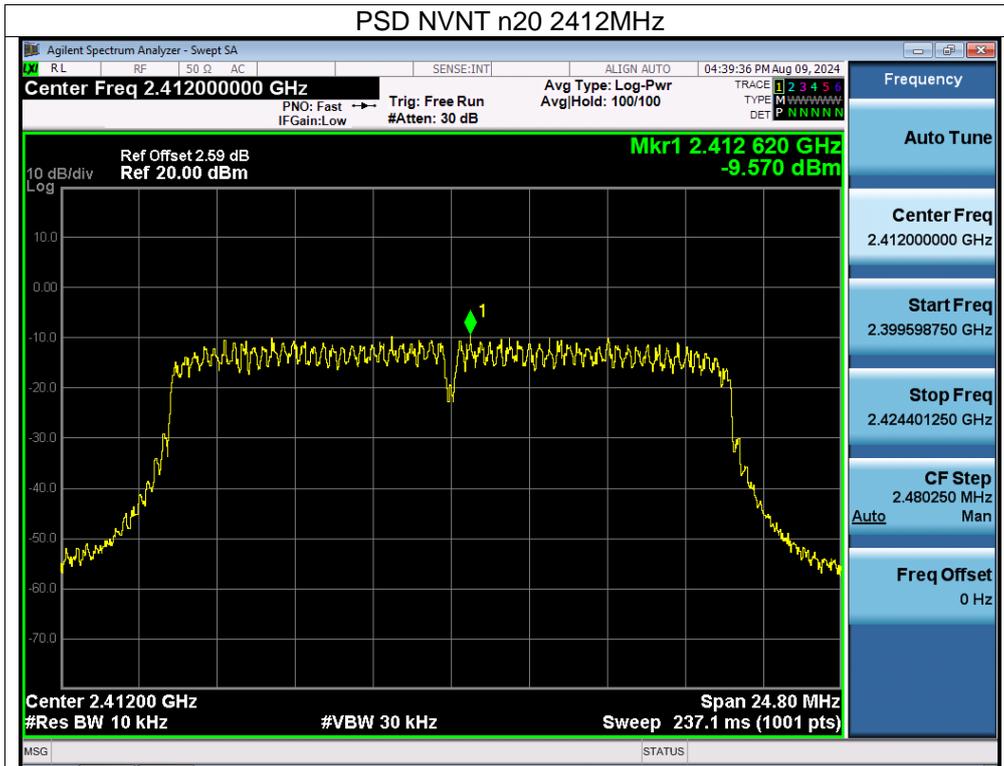



## 10. Bandwidth Test

### 10.1 Block Diagram Of Test Setup

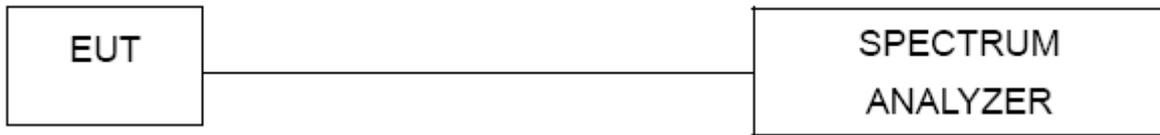

### 10.2 Limit

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

### 10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss



## 10.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage :	DC 24V



Test Mode	Frequency (MHz)	-6dB bandwidth (MHz)	Limit (kHz)	Result
TX b Mode	2412	9.057	500	Pass
	2437	8.899	500	Pass
	2462	9.536	500	Pass
TX g Mode	2412	16.324	500	Pass
	2437	16.310	500	Pass
	2462	16.281	500	Pass
TX n Mode(20M)	2412	16.535	500	Pass
	2437	16.324	500	Pass
	2462	16.919	500	Pass

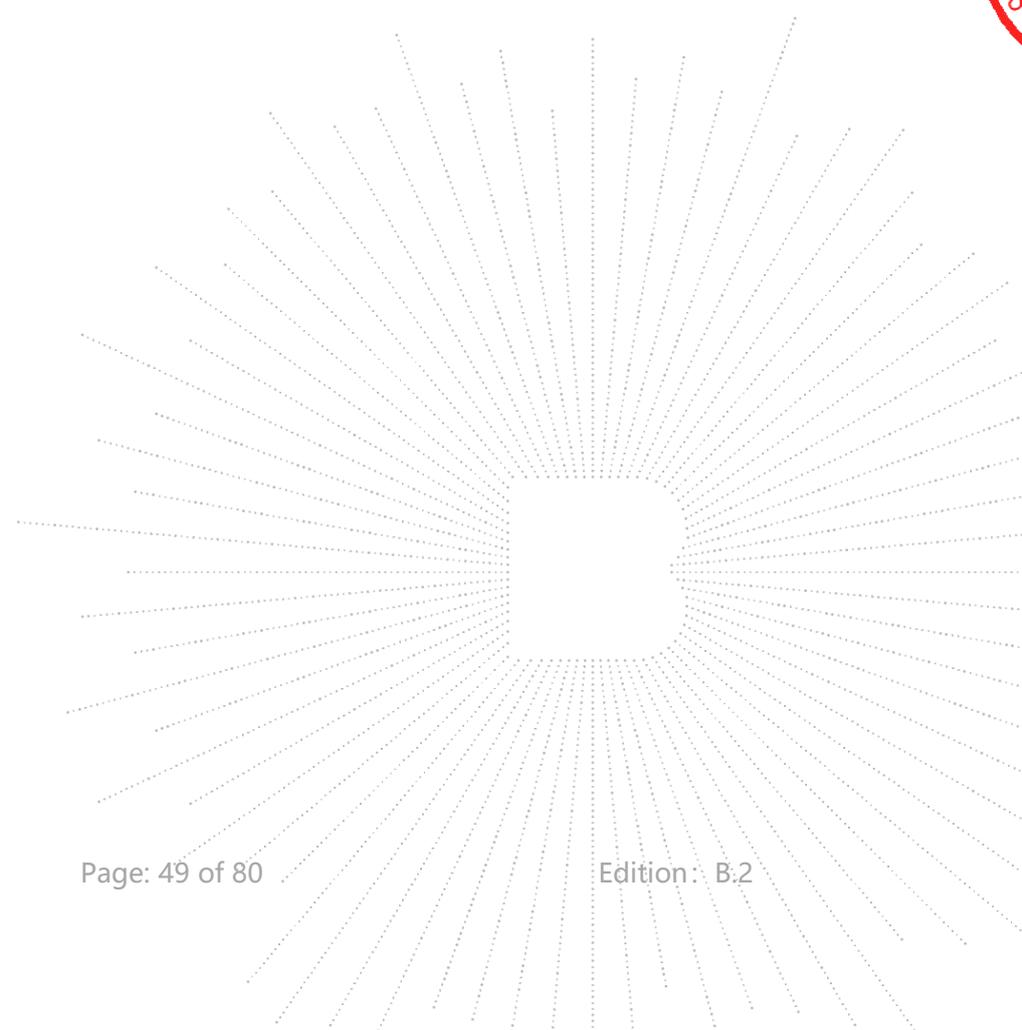


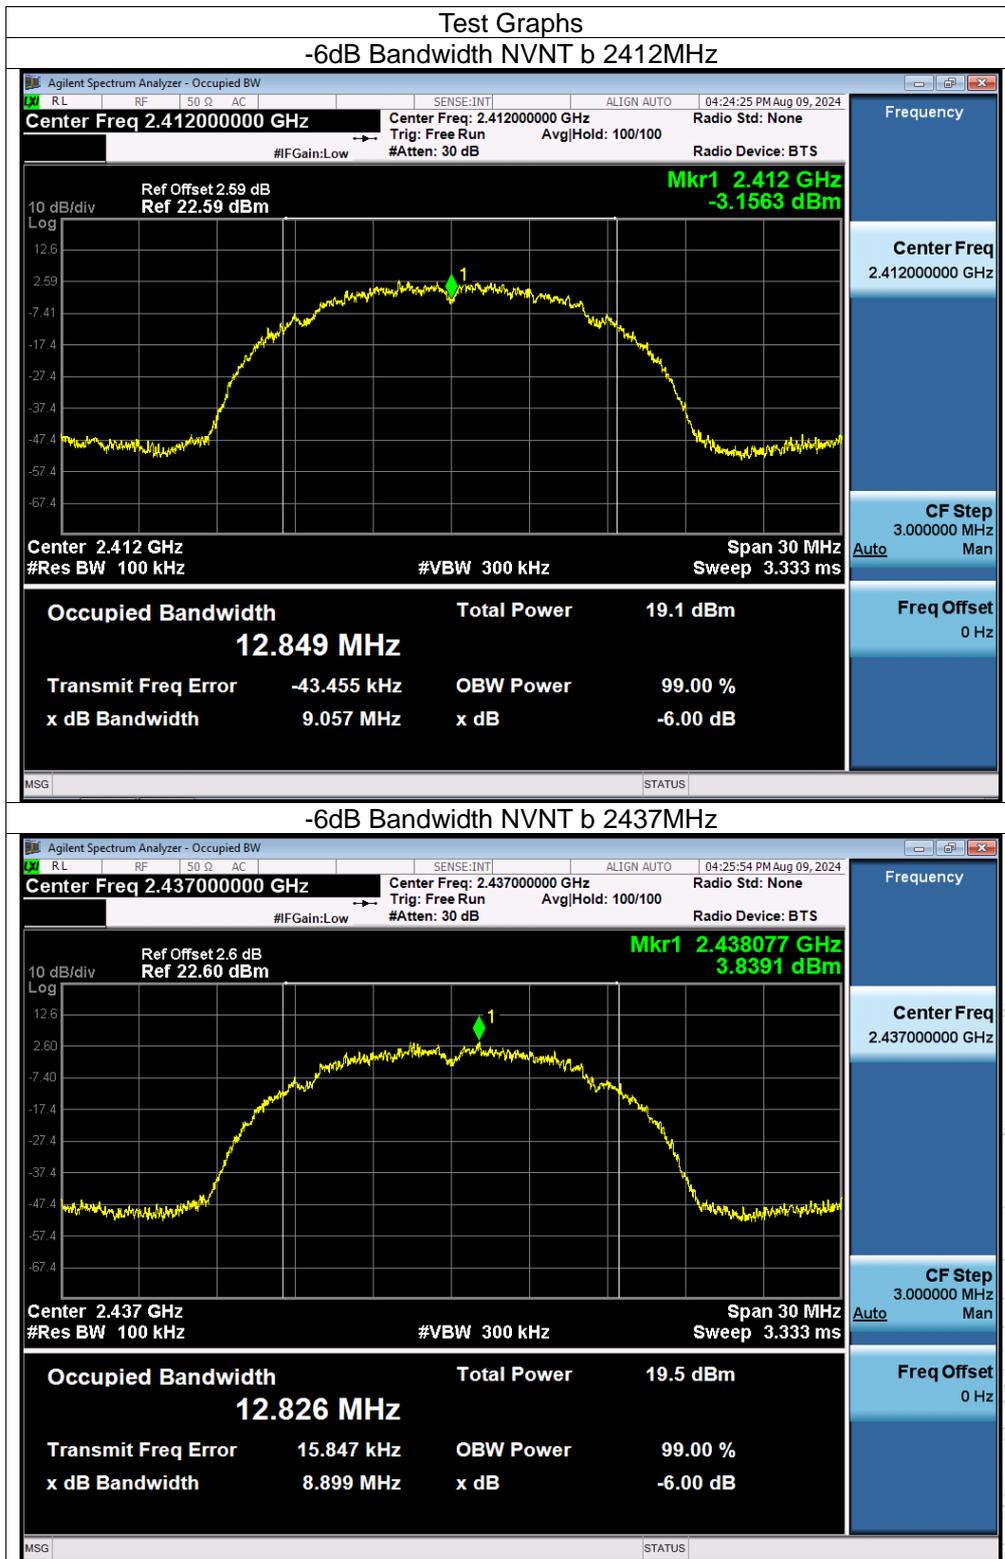

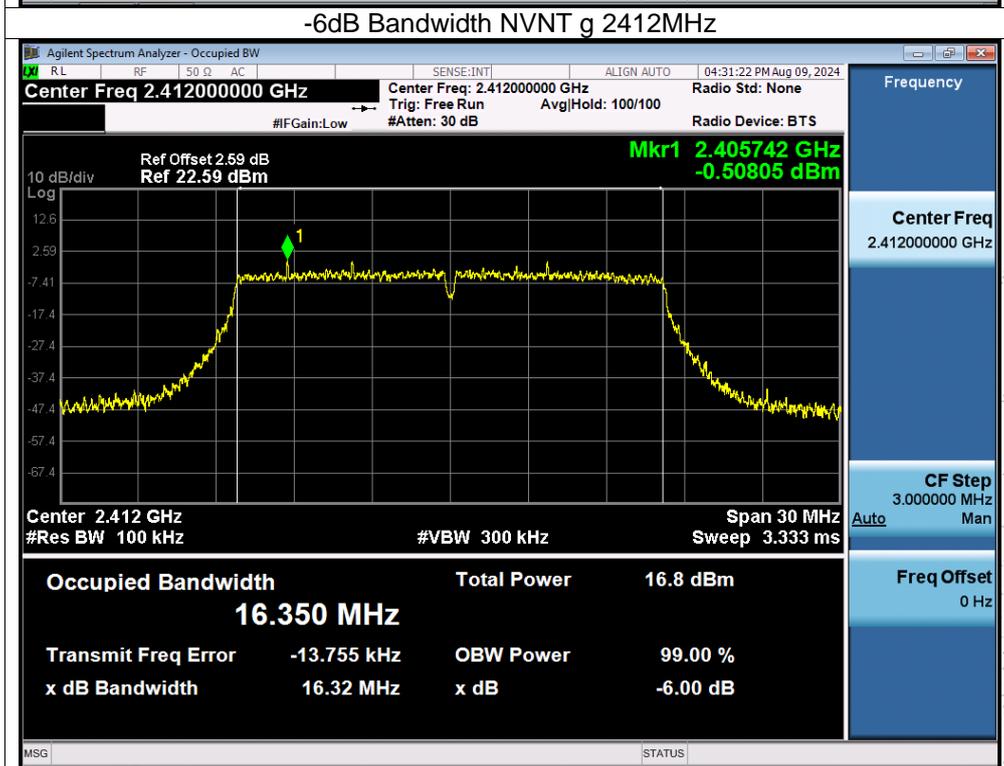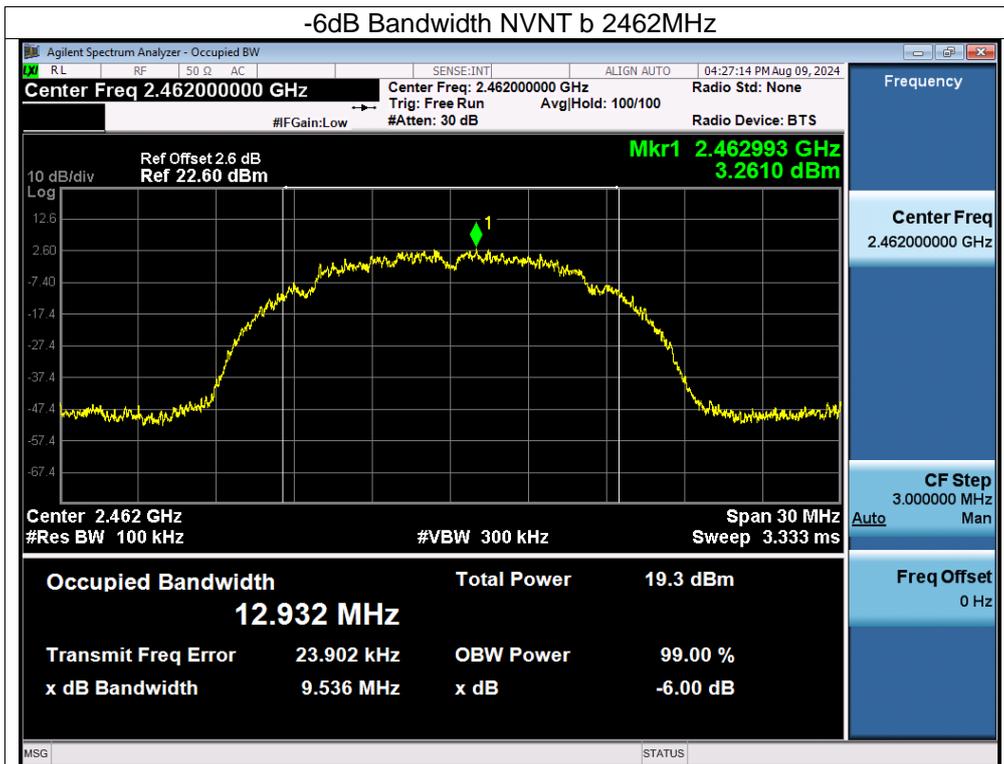
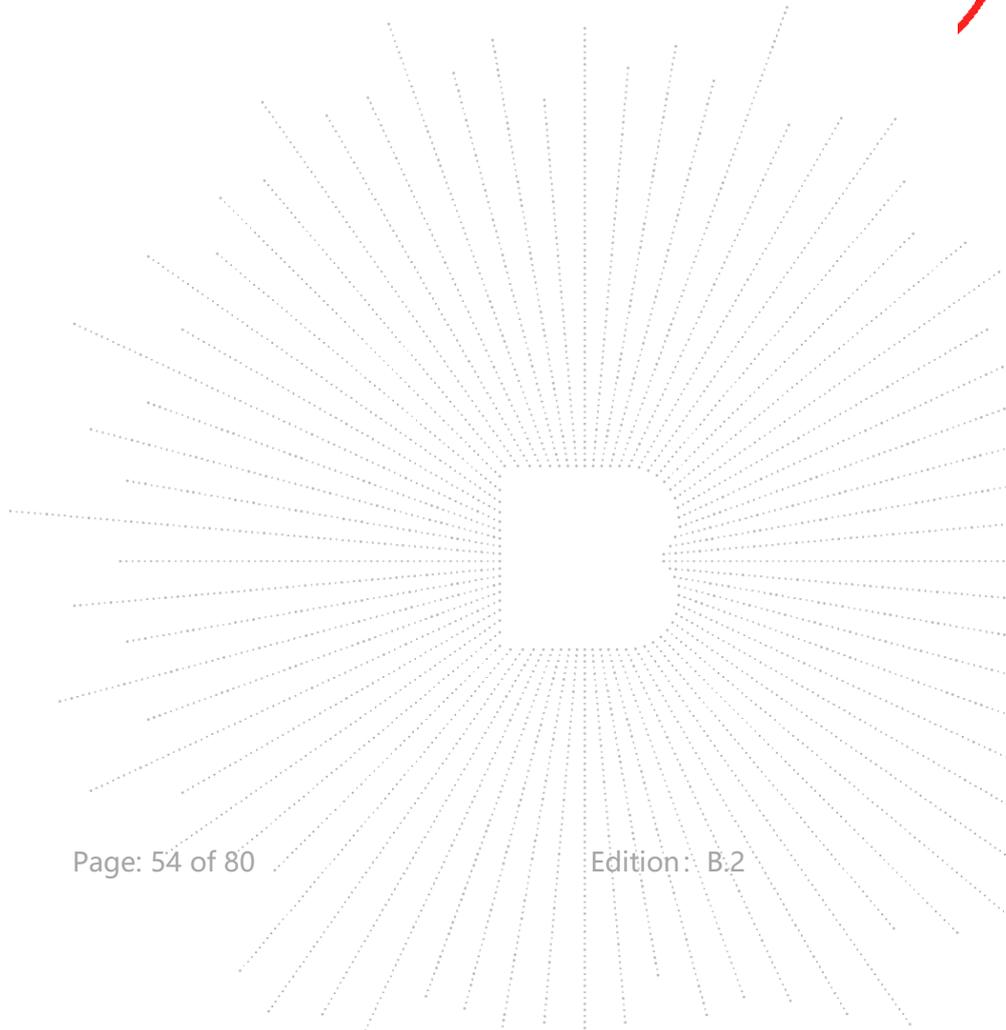


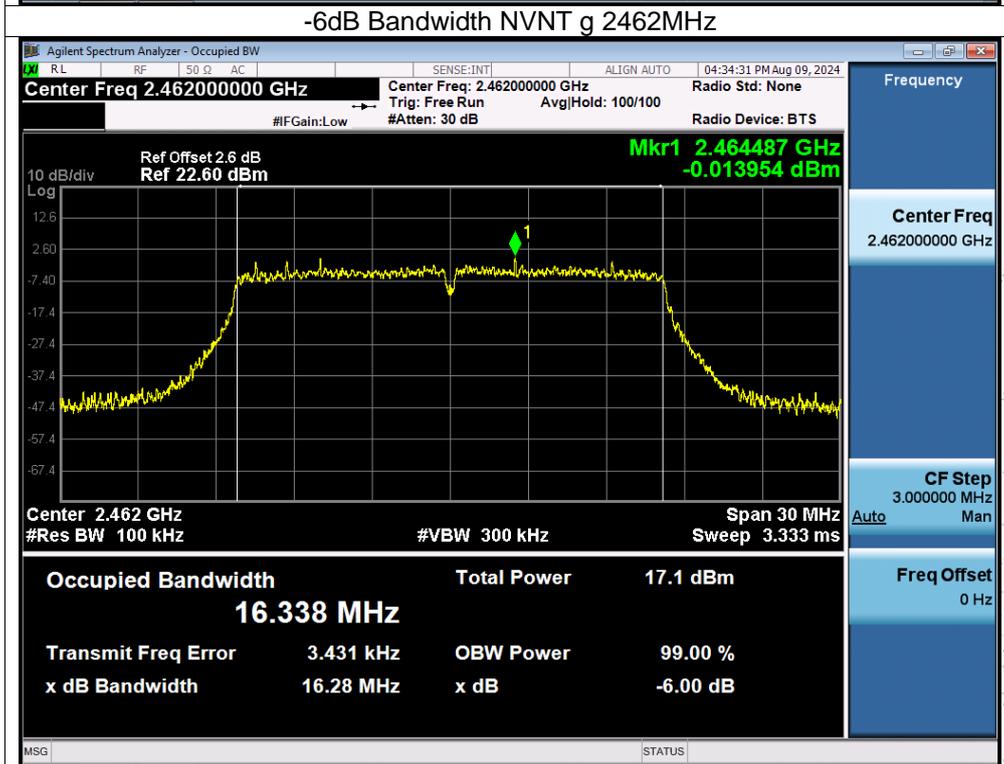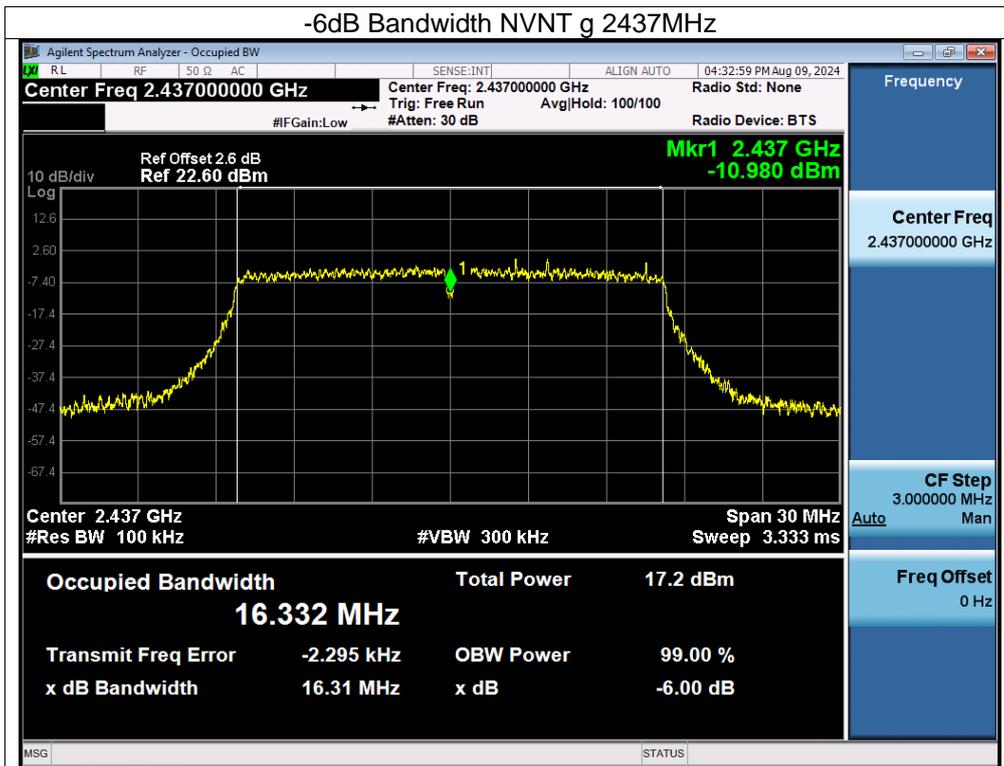

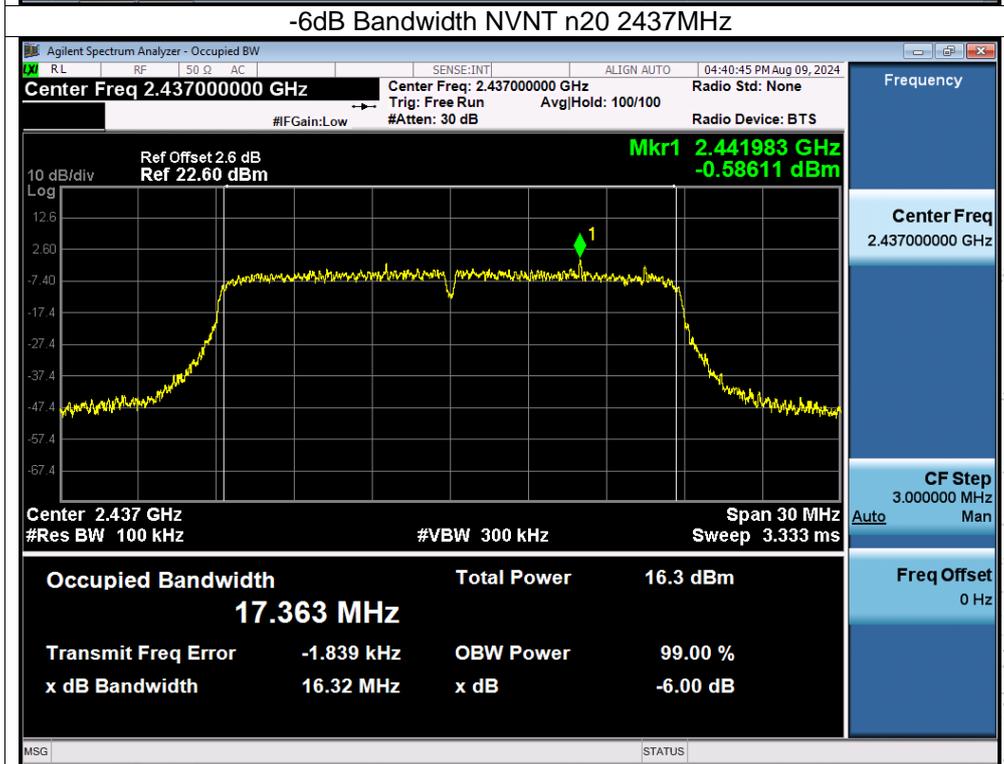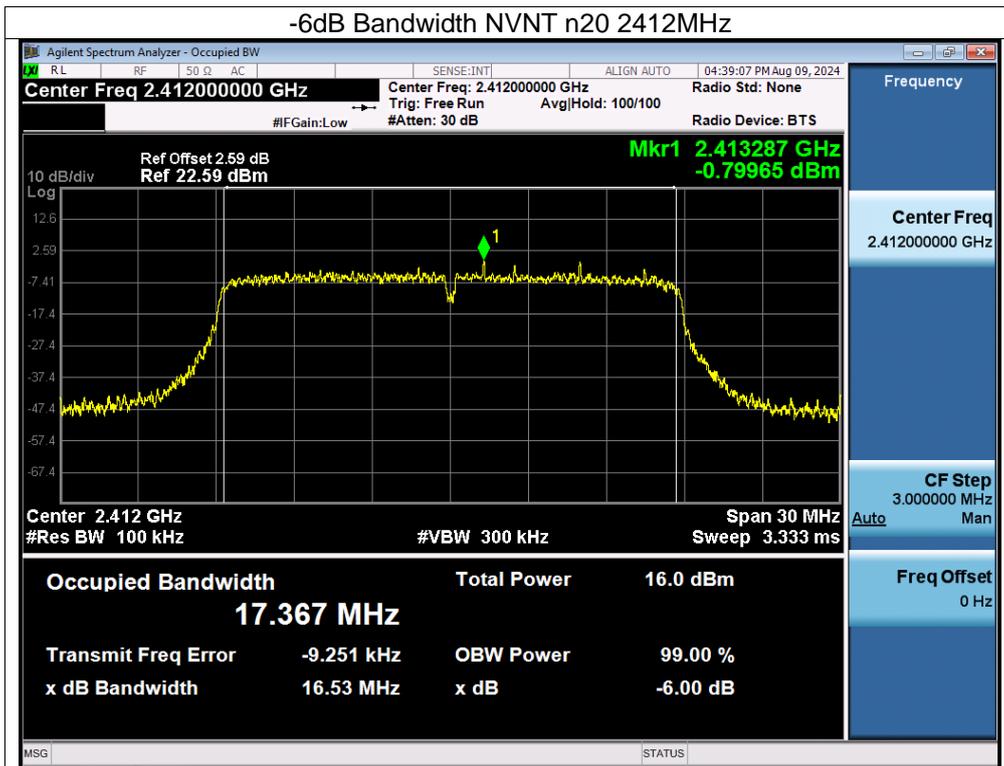

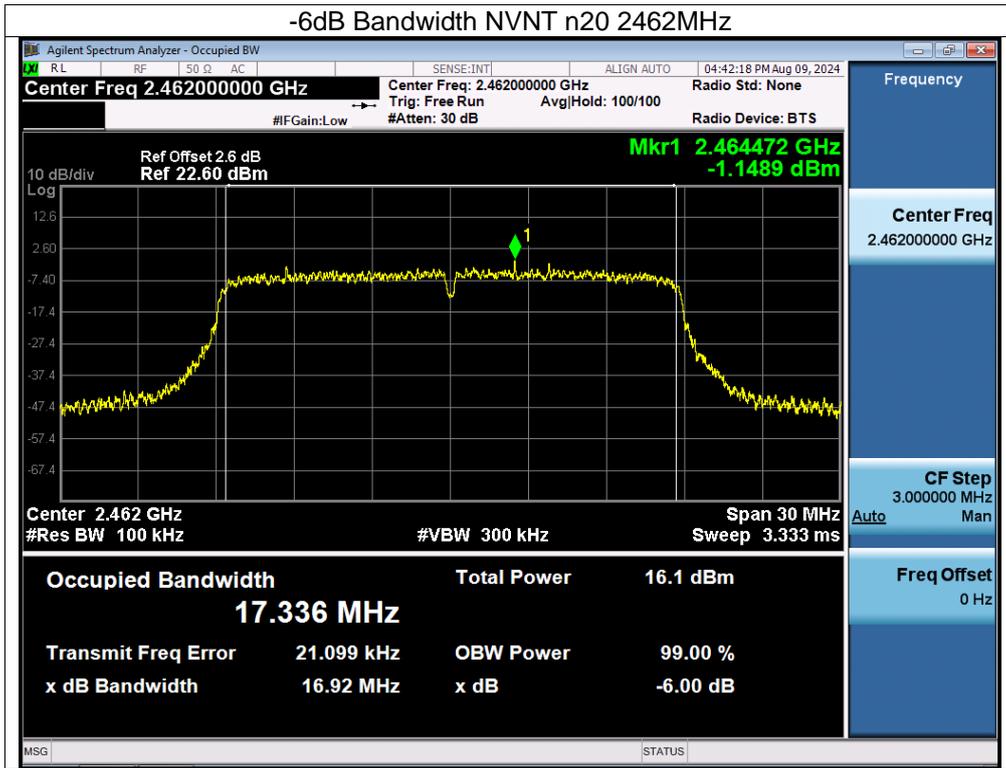

CO., LTD



## 11. Peak Output Power Test

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 11.3 Test Procedure

- a. The EUT was directly connected to the Power meter

### 11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss



## 11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 24V

Test Mode	Frequency(MHz)	Maximum Conducted Output Power(PK) (dBm)	Limit (dBm)
802.11b	2412	14.99	30
	2437	15.08	30
	2462	14.82	30
802.11g	2412	13.97	30
	2437	14.38	30
	2462	14.15	30
802.11n20	2412	13.21	30
	2437	13.53	30
	2462	13.41	30

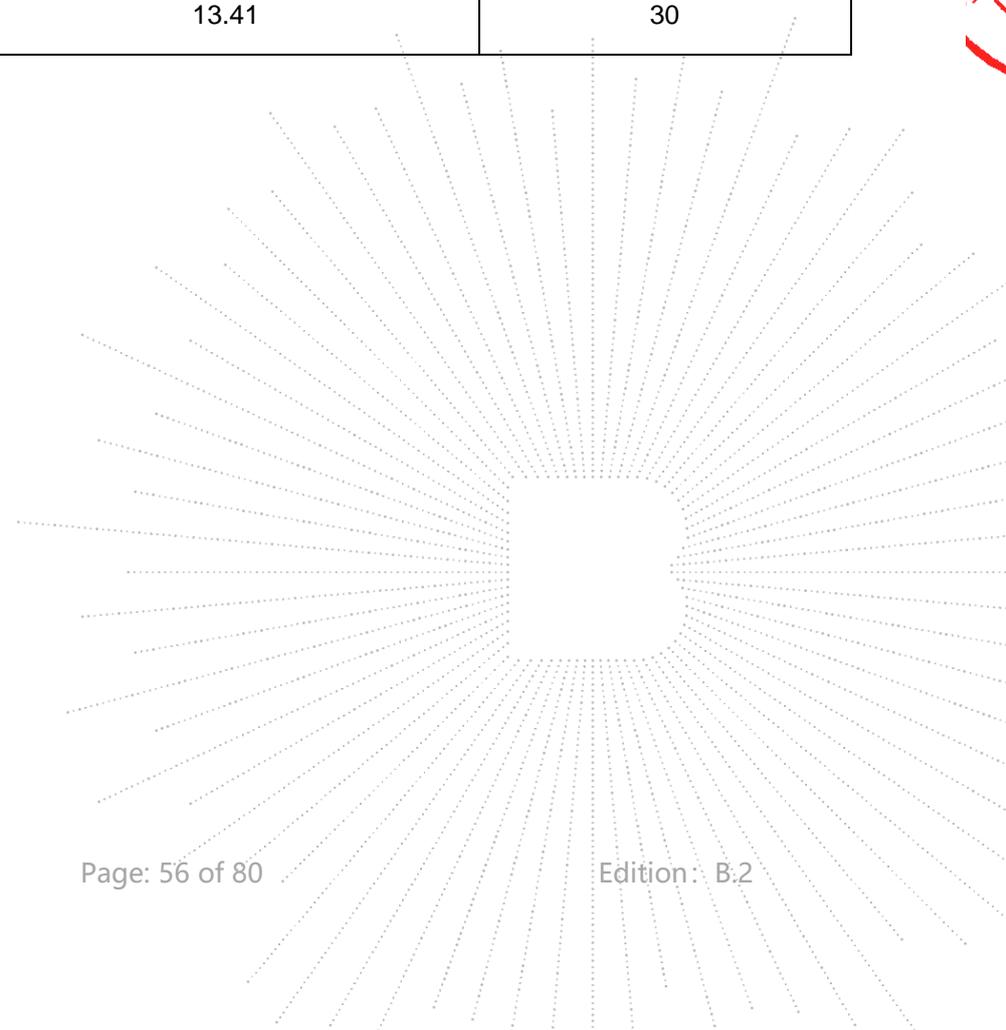

## 12. 100 kHz Bandwidth Of Frequency Band Edge

### 12.1 Block Diagram Of Test Setup



### 12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 12.3 Test Procedure

Using the following spectrum analyzer setting:

- Set the RBW = 100KHZ.
- Set the VBW = 300KHZ.
- Sweep time = auto couple.
- Detector function = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize..


### 12.4 EUT Operating Conditions



The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss

### 12.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage :	DC 24V

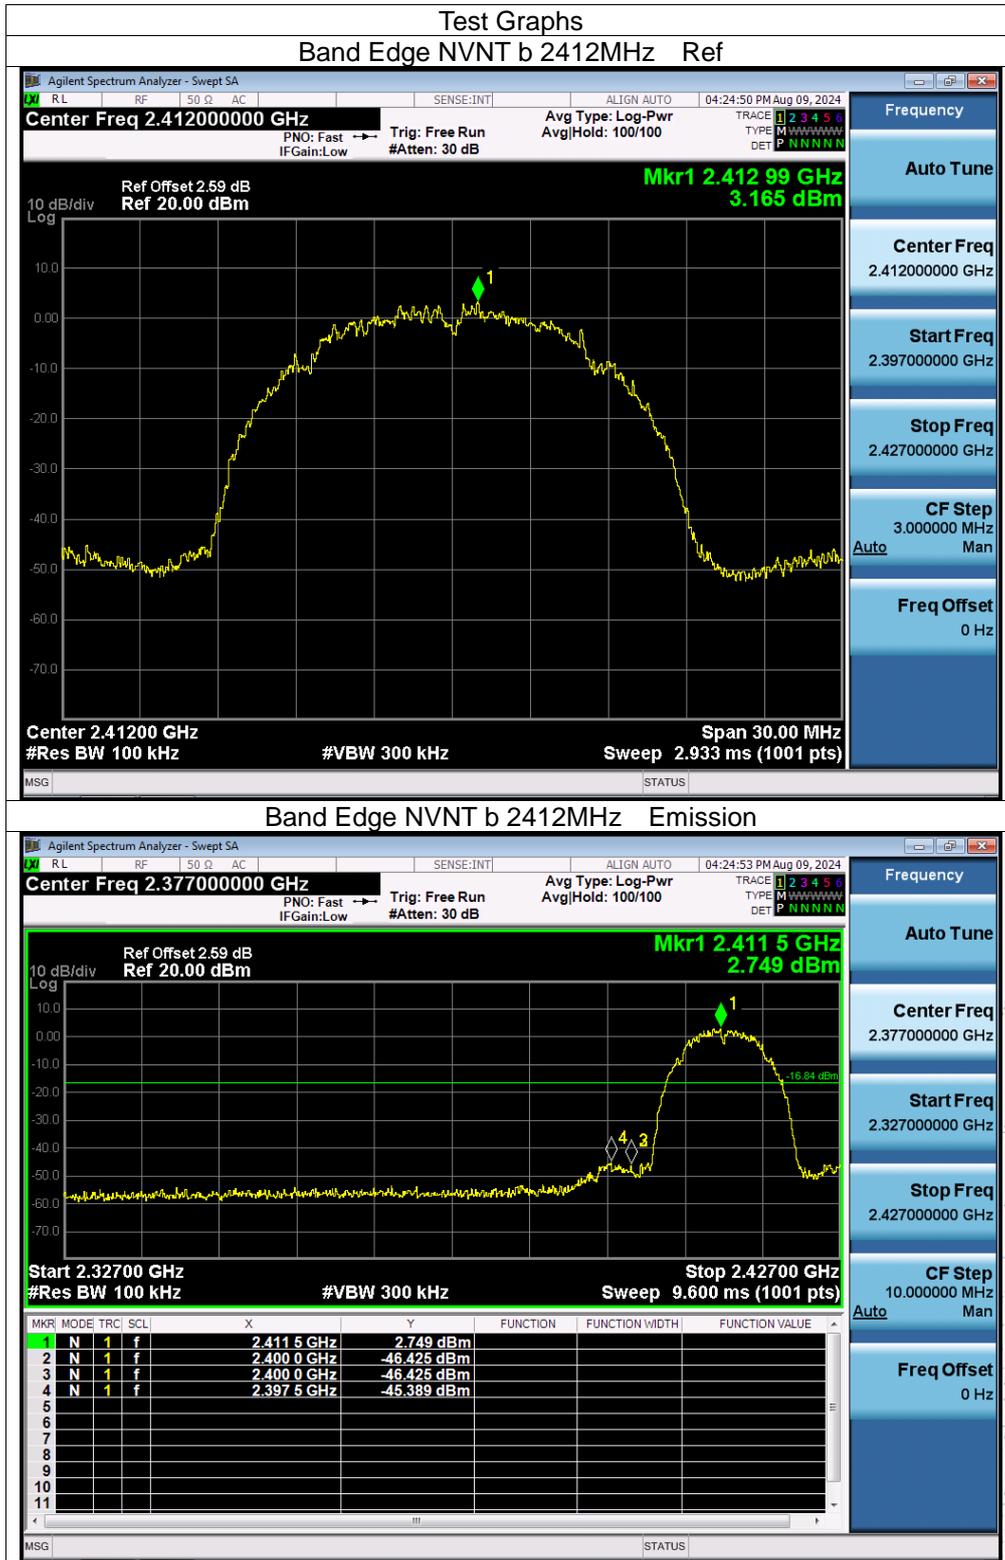


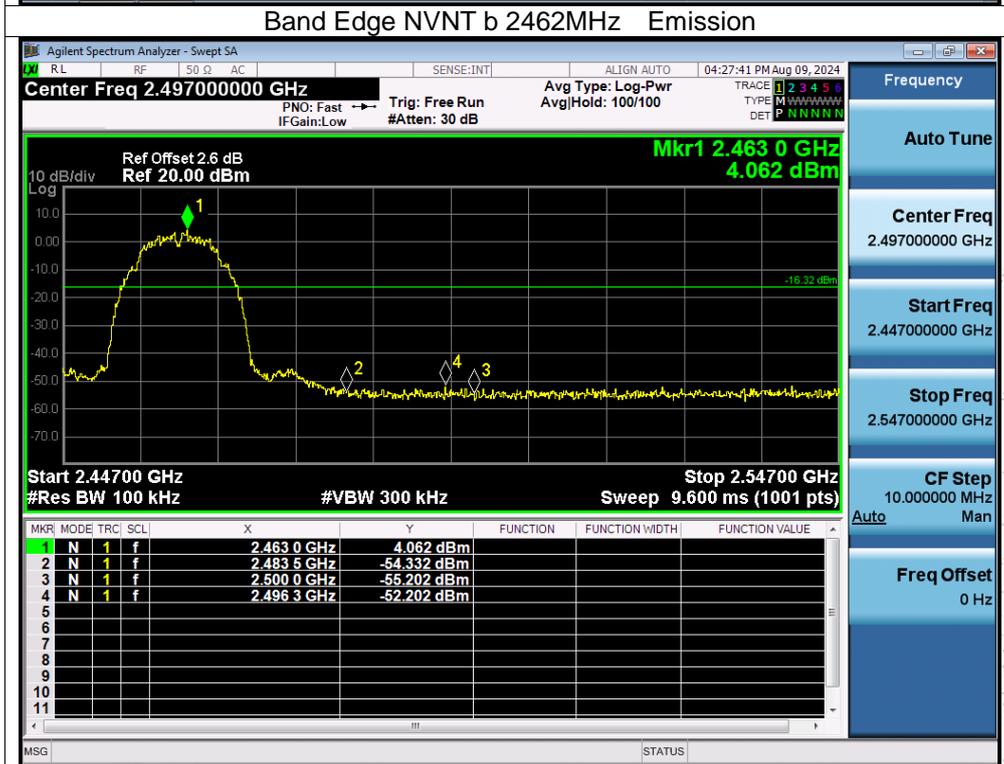
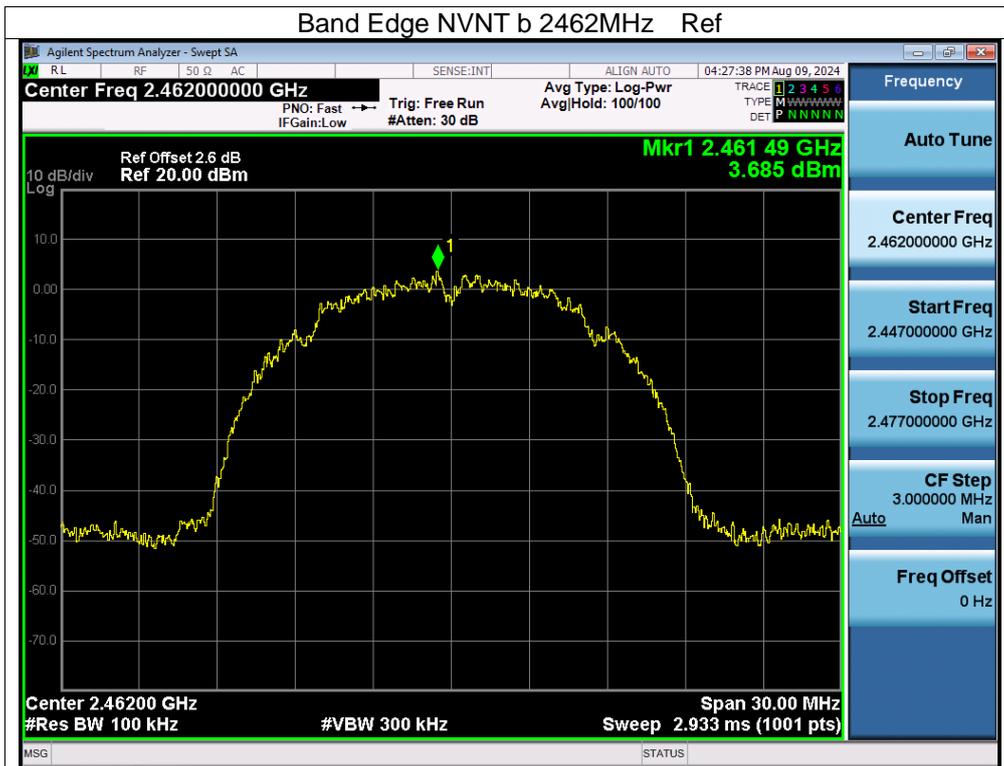


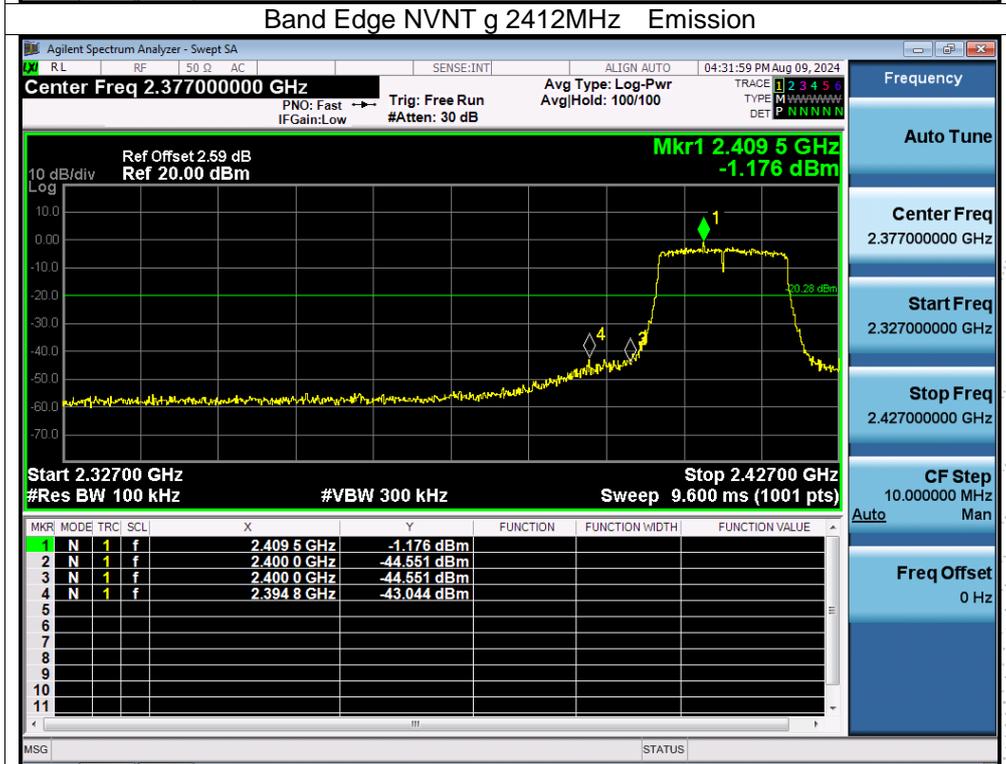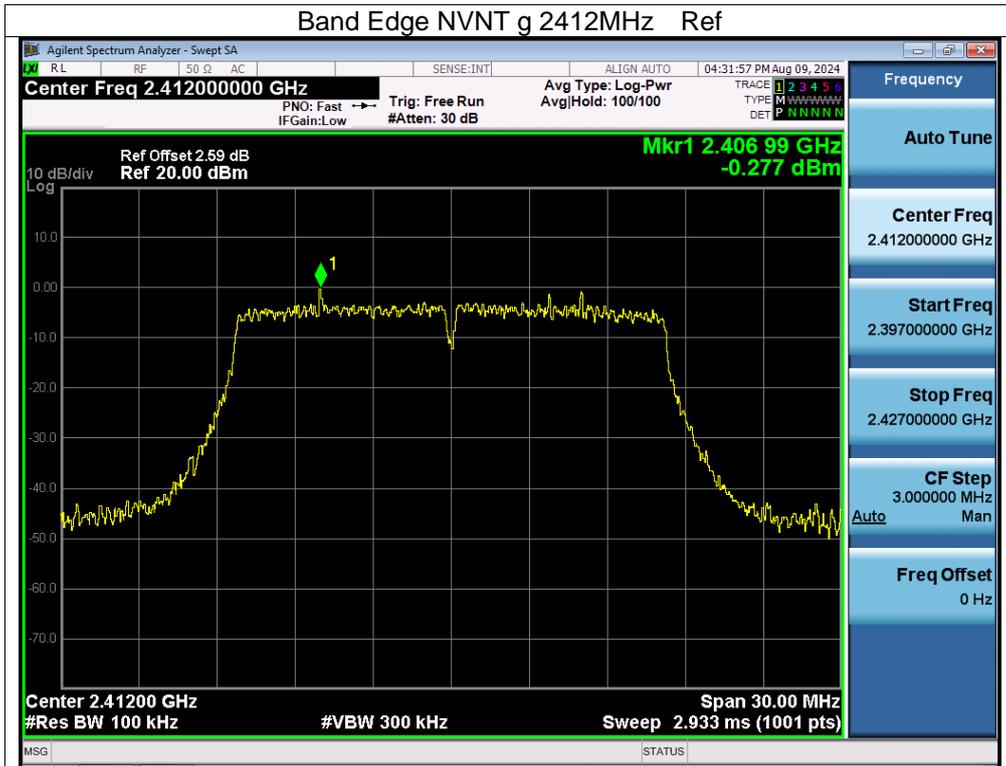

CO., LTD.

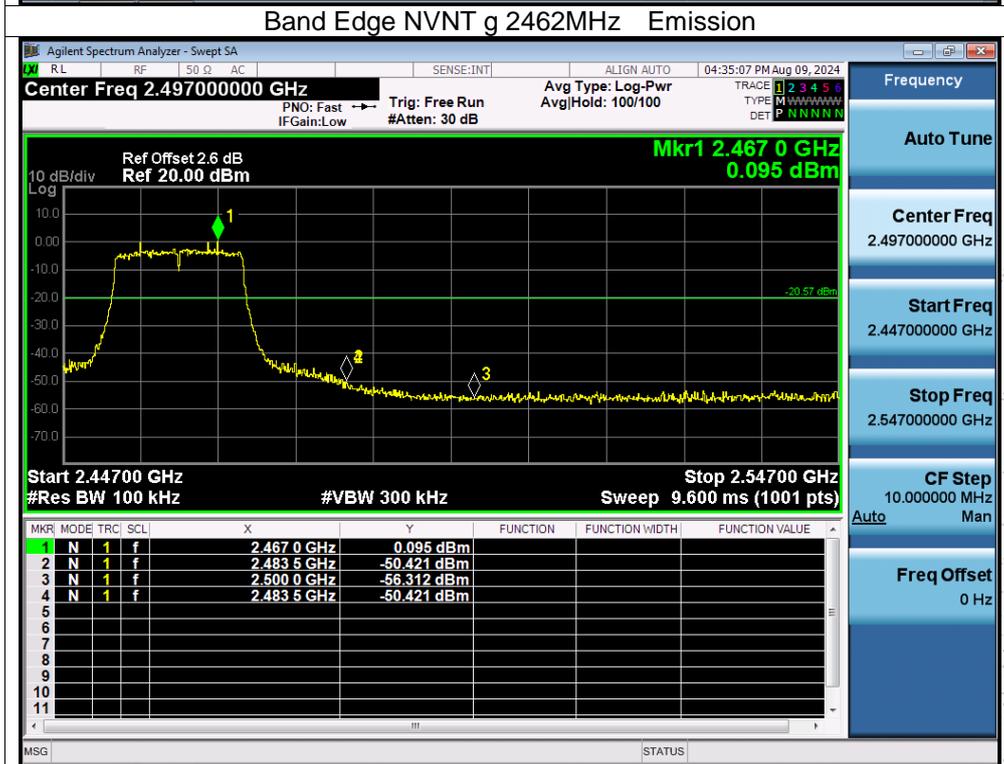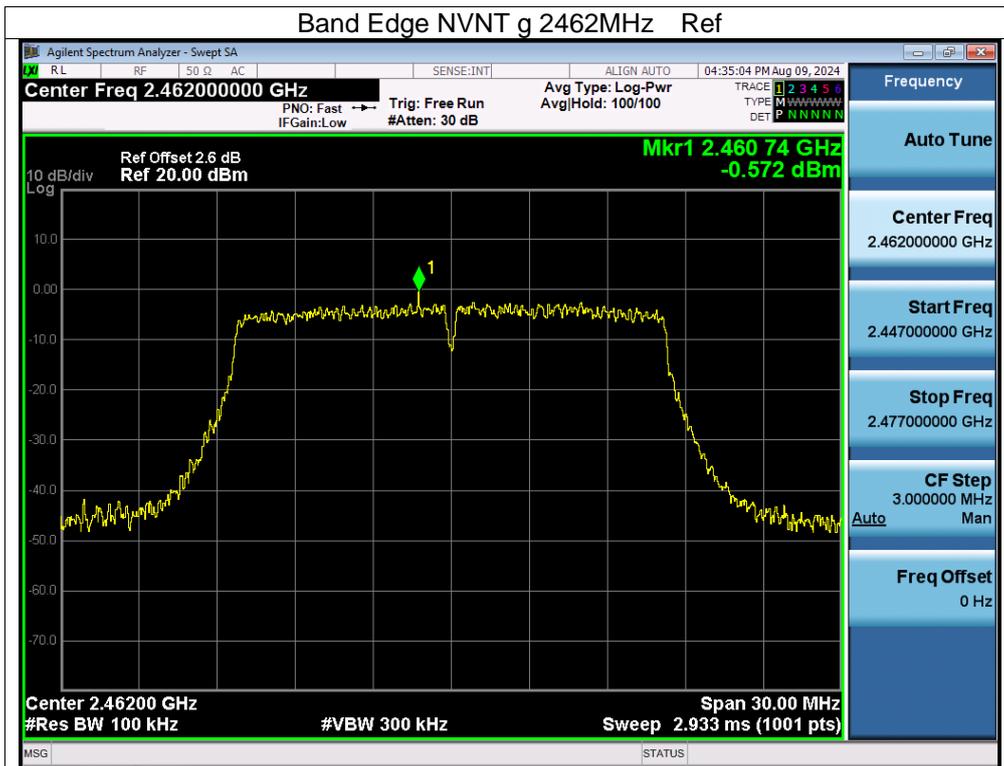

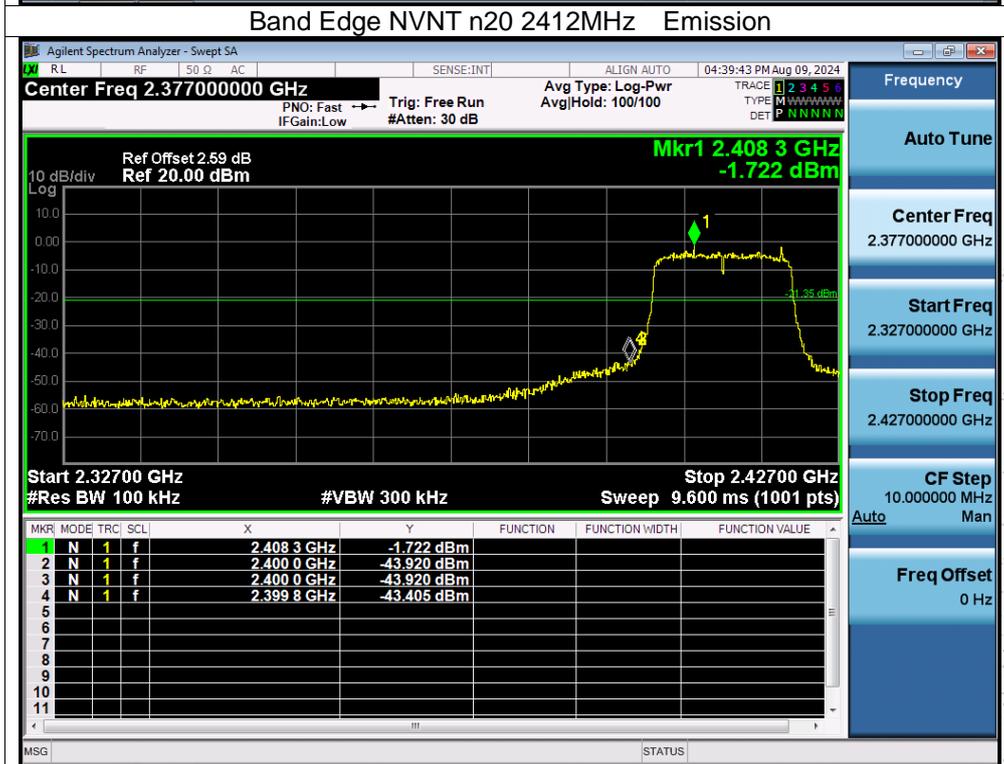

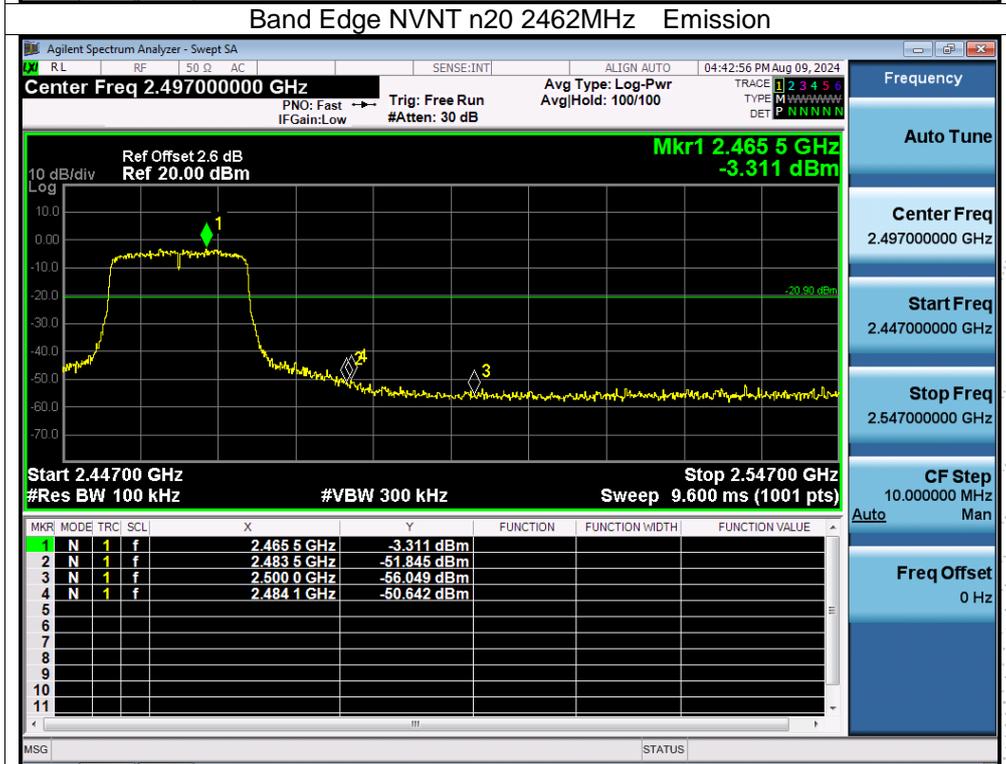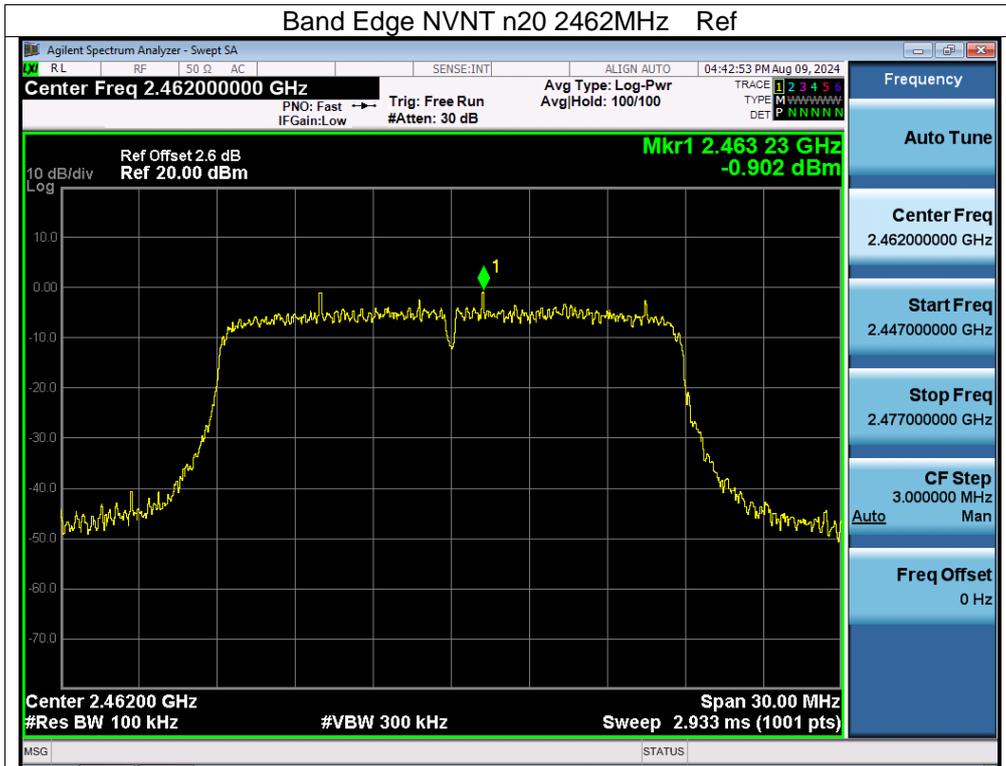

## Conducted Emission Measurement

