



# SAR TEST REPORT

**Applicant** Guangdong OPPO Mobile  
Telecommunications Corp., Ltd.

**FCC ID** R9C-CPH2125

**Product** Mobile Phone

**Brand** OPPO

**Model** CPH2125

**Report No.** R2008A0550-S1

**Issue Date** September 15, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **IEEE 1528- 2013, ANSI C95.1: 1992, IEEE C95.1: 1991**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Prepared by: Yu Wang*

*Approved by: Guangchang Fan*

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## Table of Contents

|       |                                                                      |     |
|-------|----------------------------------------------------------------------|-----|
| 1     | Test Laboratory.....                                                 | 4   |
| 1.1   | Notes of the Test Report .....                                       | 4   |
| 1.2   | Test facility .....                                                  | 4   |
| 1.3   | Testing Location.....                                                | 4   |
| 1.4   | Laboratory Environment.....                                          | 5   |
| 2     | Statement of Compliance .....                                        | 6   |
| 3     | Description of Equipment under Test.....                             | 8   |
| 4     | Test Specification, Methods and Procedures .....                     | 10  |
| 5     | Operational Conditions during Test .....                             | 11  |
| 5.3   | Test Positions.....                                                  | 11  |
| 5.3.1 | Against Phantom Head .....                                           | 11  |
| 5.3.2 | Body Worn Configuration.....                                         | 11  |
| 5.3.3 | Phablet SAR test considerations .....                                | 12  |
| 5.4   | Measurement Variability .....                                        | 13  |
| 5.5   | Test Configuration .....                                             | 14  |
| 5.5.1 | GSM Test Configuration .....                                         | 14  |
| 5.5.2 | UMTS Test Configuration.....                                         | 14  |
| 5.5.3 | LTE Test Configuration .....                                         | 17  |
| 5.5.3 | LTE CA specification .....                                           | 19  |
| 5.5.4 | Additional requirements for TDD LTE specification .....              | 20  |
| 5.5.5 | Wi-Fi Test Configuration.....                                        | 23  |
| 5.5.6 | BT Test Configuration .....                                          | 24  |
| 5.5.7 | Power Reduction Configuration .....                                  | 24  |
| 6     | SAR Measurements System Configuration .....                          | 30  |
| 6.3   | SAR Measurement Set-up .....                                         | 30  |
| 6.4   | DASY5 E-field Probe System.....                                      | 31  |
| 6.5   | SAR Measurement Procedure .....                                      | 32  |
| 7     | Main Test Equipment.....                                             | 34  |
| 8     | Tissue Dielectric Parameter Measurements & System Verification ..... | 36  |
| 8.3   | Tissue Verification.....                                             | 36  |
| 8.4   | System Performance Check.....                                        | 38  |
| 8.5   | SAR System Validation .....                                          | 41  |
| 9     | Normal and Maximum Output Power .....                                | 42  |
| 9.3   | GSM Mode .....                                                       | 42  |
| 9.4   | WCDMA Mode .....                                                     | 45  |
| 9.5   | LTE Mode.....                                                        | 49  |
| 9.6   | WLAN Mode.....                                                       | 116 |
| 9.7   | Bluetooth Mode .....                                                 | 129 |
| 10    | Measured and Reported (Scaled) SAR Results .....                     | 130 |
| 10.3  | EUT Antenna Locations .....                                          | 130 |
| 10.4  | Measured SAR Results .....                                           | 132 |



|                                                       |                                          |     |
|-------------------------------------------------------|------------------------------------------|-----|
| 10.5                                                  | Simultaneous Transmission Analysis ..... | 179 |
| 11                                                    | Measurement Uncertainty .....            | 187 |
| ANNEX A: Test Layout.....                             |                                          | 188 |
| ANNEX B: System Check Results.....                    |                                          | 190 |
| ANNEX C: Highest Graph Results.....                   |                                          | 210 |
| ANNEX D: Probe Calibration Certificate.....           |                                          | 317 |
| ANNEX E: D750V3 Dipole Calibration Certificate.....   |                                          | 326 |
| ANNEX F: D835V2 Dipole Calibration Certificate.....   |                                          | 334 |
| ANNEX G: D1750V2 Dipole Calibration Certificate ..... |                                          | 342 |
| ANNEX H: D1900V2 Dipole Calibration Certificate ..... |                                          | 350 |
| ANNEX I: D2450V2 Dipole Calibration Certificate ..... |                                          | 358 |
| ANNEX J: D2600V2 Dipole Calibration Certificate ..... |                                          | 366 |
| ANNEX K: D5GHzV2 Dipole Calibration Certificate ..... |                                          | 374 |
| ANNEX L:DAE4 Calibration Certificate.....             |                                          | 388 |



## 1 Test Laboratory

### 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Fan Guangchang  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [fanguangchang@ta-shanghai.com](mailto:fanguangchang@ta-shanghai.com)



## 1.4 Laboratory Environment

|                                                                                                                                                                                                 |                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Temperature                                                                                                                                                                                     | Min. = 18°C, Max. = 25 °C |
| Relative humidity                                                                                                                                                                               | Min. = 30%, Max. = 70%    |
| Ground system resistance                                                                                                                                                                        | < 0.5 $\Omega$            |
| Ambient noise is checked and found very low and in compliance with requirement of standards.<br>Reflection of surrounding objects is minimized and in compliance with requirement of standards. |                           |

## 2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for the EUT are as follows:

Table 1: Highest Reported SAR

| Mode                                                                                                                                                                                                                                                                                  | Highest Reported SAR (W/kg)        |                                    |                                  |                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|----------------------------------|--------------------------------------------|
|                                                                                                                                                                                                                                                                                       | 1g SAR Head                        | 1g SAR Body-worn (Separation 15mm) | 1g SAR Hotspot (Separation 10mm) | Product Specific 10-g SAR (Separation 0mm) |
| GSM 850                                                                                                                                                                                                                                                                               | 0.634                              | 0.148                              | 0.293                            | NA                                         |
| GSM 1900                                                                                                                                                                                                                                                                              | 0.718                              | 0.295                              | 0.991                            | NA                                         |
| WCDMA Band II                                                                                                                                                                                                                                                                         | 0.956                              | 0.351                              | 0.943                            | NA                                         |
| WCDMA Band IV                                                                                                                                                                                                                                                                         | 1.059                              | 0.642                              | 0.737                            | NA                                         |
| WCDMA Band V                                                                                                                                                                                                                                                                          | 0.561                              | 0.200                              | 0.243                            | NA                                         |
| LTE FDD 2                                                                                                                                                                                                                                                                             | 1.064                              | 0.296                              | <b>1.165</b>                     | NA                                         |
| LTE FDD 4                                                                                                                                                                                                                                                                             | 1.134                              | 0.511                              | 0.858                            | NA                                         |
| LTE FDD 5                                                                                                                                                                                                                                                                             | 0.587                              | 0.206                              | 0.270                            | NA                                         |
| LTE FDD 7                                                                                                                                                                                                                                                                             | 0.423                              | 0.580                              | 1.082                            | NA                                         |
| LTE FDD 12                                                                                                                                                                                                                                                                            | 0.082                              | 0.129                              | 0.143                            | NA                                         |
| LTE FDD 17                                                                                                                                                                                                                                                                            | 0.090                              | 0.126                              | 0.113                            | NA                                         |
| LTE FDD 26                                                                                                                                                                                                                                                                            | 0.576                              | 0.220                              | 0.301                            | NA                                         |
| LTE TDD 38                                                                                                                                                                                                                                                                            | 0.769                              | 0.235                              | 0.410                            | NA                                         |
| LTE TDD 41                                                                                                                                                                                                                                                                            | 0.869                              | 0.198                              | 0.462                            | NA                                         |
| LTE FDD 66                                                                                                                                                                                                                                                                            | 1.027                              | 0.341                              | 0.738                            | NA                                         |
| Wi-Fi (2.4G)                                                                                                                                                                                                                                                                          | 0.716                              | 0.245                              | 0.158                            | NA                                         |
| Wi-Fi (5G)                                                                                                                                                                                                                                                                            | <b>1.179</b>                       | <b>1.030</b>                       | 0.806                            | <b>1.374</b>                               |
| BT                                                                                                                                                                                                                                                                                    | 0.463                              | NA                                 | 0.105                            | NA                                         |
| Date of Testing:                                                                                                                                                                                                                                                                      | August 17, 2020~ September 7, 2020 |                                    |                                  |                                            |
| Date of Sample Receiving:                                                                                                                                                                                                                                                             | August 17, 2020                    |                                    |                                  |                                            |
| Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. |                                    |                                    |                                  |                                            |



Table 2: Highest Simultaneous Transmission SAR

| Exposure Configuration                                                                        | 1g SAR Head | 1g SAR Body-worn (Separation 15mm) | 1g SAR Hotspot (Separation 10mm) | Product Specific 10-g SAR (Separation 0mm) |
|-----------------------------------------------------------------------------------------------|-------------|------------------------------------|----------------------------------|--------------------------------------------|
| Highest Simultaneous Transmission SAR (W/kg)                                                  | 1.494       | 1.272                              | 1.494                            | 1.374                                      |
| Note: 1. The detail for simultaneous transmission consideration is described in chapter 10.5. |             |                                    |                                  |                                            |

### 3 Description of Equipment under Test

#### Client Information

|                             |                                                                                  |
|-----------------------------|----------------------------------------------------------------------------------|
| <b>Applicant</b>            | Guangdong OPPO Mobile Telecommunications Corp., Ltd.                             |
| <b>Applicant address</b>    | NO.18 HaiBin Road, Wusha village, Chang An Town, DongGuan City, GuangDong, China |
| <b>Manufacturer</b>         | Guangdong OPPO Mobile Telecommunications Corp., Ltd.                             |
| <b>Manufacturer address</b> | NO.18 HaiBin Road, Wusha village, Chang An Town, DongGuan City, GuangDong, China |

#### General Technologies

|                                                                                                             |                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Application Purpose:                                                                                        | Original Grant                                                                                                                           |
| EUT Stage:                                                                                                  | Identical Prototype                                                                                                                      |
| Model:                                                                                                      | CPH2125                                                                                                                                  |
| IMEI:                                                                                                       | 866018050626014                                                                                                                          |
| Hardware Version:                                                                                           | 11                                                                                                                                       |
| Software Version:                                                                                           | ColorOS 7.2                                                                                                                              |
| Antenna Type:                                                                                               | Internal Antenna                                                                                                                         |
| Device Class:                                                                                               | B                                                                                                                                        |
| Wi-Fi Hotspot:                                                                                              | Wi-Fi 2.4G<br>Wi-Fi 5G U-NII-1&U-NII-3                                                                                                   |
| Power Class:                                                                                                | GSM 850:4<br>GSM 1900:1<br>UMTS Band II/IV/V:3<br>LTE FDD 2/4/5/7/12/17/26/66:3<br>LTE TDD 38/41:3                                       |
| Power Level:                                                                                                | GSM 850:level 5<br>GSM 1900:level 0<br>UMTS Band II/IV/V:all up bits<br>LTE FDD 2/4/5/7/12/17/26/66:max power<br>LTE TDD 38/41:max power |
| EUT Accessory                                                                                               |                                                                                                                                          |
| Battery                                                                                                     | Manufacturer: TWS Technology (Guangzhou) Limited<br>Model: BLP779(ATL cell)                                                              |
| Earphone                                                                                                    | Manufacturer: Guangdong OPPO Mobile Telecommunications Corp., Ltd.<br>Model: MH156                                                       |
| Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. |                                                                                                                                          |

## Wireless Technology and Frequency Range

| Wireless Technology |                                                                                                                        | Modulation                | Operating mode                                                                                                  | Tx (MHz)                   |
|---------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------|
| GSM                 | 850                                                                                                                    | Voice(GMSK)<br>GPRS(GMSK) | <input type="checkbox"/> Multi-slot Class:8-1UP<br><input type="checkbox"/> Multi-slot Class:10-2UP             | 824 ~ 849                  |
|                     | 1900                                                                                                                   | EGPRS(GMSK,8PSK)          | <input checked="" type="checkbox"/> Multi-slot Class:12-4UP<br><input type="checkbox"/> Multi-slot Class:33-4UP | 1850 ~ 1910                |
|                     | Does this device support DTM (Dual Transfer Mode)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |                           |                                                                                                                 |                            |
| UMTS                | Band II                                                                                                                | QPSK                      | HSDPA UE Category:24<br>HSUPA UE Category:7                                                                     | 1850 ~ 1910                |
|                     | Band IV                                                                                                                |                           |                                                                                                                 | 1710 ~ 1755                |
|                     | Band V                                                                                                                 |                           |                                                                                                                 | 824 ~ 849                  |
| LTE                 | FDD 2                                                                                                                  | QPSK, 16QAM,<br>64QAM     | Rel.12 /Category 12                                                                                             | 1850 ~ 1910                |
|                     | FDD 4                                                                                                                  |                           |                                                                                                                 | 1710 ~ 1755                |
|                     | FDD 5                                                                                                                  |                           |                                                                                                                 | 824 ~ 849                  |
|                     | FDD 7                                                                                                                  |                           |                                                                                                                 | 2500 ~ 2570                |
|                     | FDD 12                                                                                                                 |                           |                                                                                                                 | 699 ~ 716                  |
|                     | FDD 17                                                                                                                 |                           |                                                                                                                 | 704 ~ 716                  |
|                     | FDD 26                                                                                                                 |                           |                                                                                                                 | 814 ~ 849                  |
|                     | TDD 38                                                                                                                 |                           |                                                                                                                 | 2570 ~ 2620                |
|                     | TDD 41                                                                                                                 |                           |                                                                                                                 | 2496 ~ 2690                |
|                     | FDD 66                                                                                                                 |                           |                                                                                                                 | 1710~ 1780                 |
|                     | Does this device support Carrier Aggregation (CA) <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No  |                           |                                                                                                                 |                            |
|                     | Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No       |                           |                                                                                                                 |                            |
|                     | BT                                                                                                                     | 2.4G                      | Version 5.1 LE                                                                                                  |                            |
| Wi-Fi               | 2.4G                                                                                                                   | DSSS,OFDM                 | 802.11b/g/n HT20                                                                                                | 2412 ~ 2462                |
|                     | 5G                                                                                                                     | OFDM                      | 802.11a/n HT20/ HT40/<br>ac VHT20/ VHT40/ VHT80                                                                 | 5150 ~ 5350<br>5470 ~ 5850 |
|                     | Does this device support MIMO <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No                      |                           |                                                                                                                 |                            |



## 4 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528- 2013, ANSI C95.1: 1992, IEEE C95.1: 1991, the following FCC Published RF exposure KDB procedures:

IEC 62209-1

### Reference Standards

KDB 248227 D01 802.11Wi-Fi SAR v02r02

KDB 447498 D01 General RF Exposure Guidance v06

KDB 648474 D04 Handset SAR v01r03

KDB 690783 D01 SAR Listings on Grants v01r03

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04

KDB 865664 D02 RF Exposure Reporting v01r02

KDB 941225 D01 3G SAR Procedures v03r01

KDB 941225 D05 SAR for LTE Devices v02r05

KDB 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02

KDB 941225 D06 Hotspot Mode v02r01

## 5 Operational Conditions during Test

### 5.3 Test Positions

#### 5.3.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

#### 5.3.2 Body Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

### 5.3.3 Phablet SAR test considerations

For smart phones, with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance.

- a) The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
- b) The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions. The 1-g SAR at 5 mm for UMPC mini-tablets is not required. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. The normal tablet procedures in KDB Publication 616217 are required when the overall diagonal dimension of the device is  $> 20.0$  cm. Hotspot mode SAR is not required when normal tablet procedures are applied. Product specific 10-g SAR is also not required for the front (top) surface of larger form factor full size tablets. The more conservative normal tablet SAR results can be used to support phablet mode product specific 10-g SAR.
- c) The simultaneous transmission operating configurations applicable to voice and data transmissions for both phone and mini-tablet modes must be taken into consideration separately for 1-g and 10-g SAR to determine the simultaneous transmission SAR test exclusion and measurement requirements for the relevant wireless modes and exposure conditions.

## 5.4 Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

## 5.5 Test Configuration

### 5.5.1 GSM Test Configuration

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

**Table 3: The allowed power reduction in the multi-slot configuration**

| Number of timeslots in uplink assignment | Permissible nominal reduction of maximum output power,(dB) |
|------------------------------------------|------------------------------------------------------------|
| 1                                        | 0                                                          |
| 2                                        | 0 to 3,0                                                   |
| 3                                        | 1,8 to 4,8                                                 |
| 4                                        | 3,0 to 6,0                                                 |

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

### 5.5.2 UMTS Test Configuration

#### 5.5.2.1 3G SAR Test Reduction Procedure

The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations modes according to output power, exposure conditions and device operating capabilities. Maximum output power is verified by applying the applicable versions of 3GPP TS 34.121.

#### 5.5.2.2 Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest SAR configuration in 12.2 kbps RMC for head exposure.

#### 5.5.2.3 Body-worn accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits

configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the EUT with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the EUT, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC

#### 5.5.2.4 Release 5 HSDPA Test Configuration

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest SAR body-worn accessory exposure configuration in 12.2 kbps RMC. EUT with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

**Table 4: Subtests for UMTS Release 5 HSDPA**

| Sub-set                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $\beta_c$         | $\beta_d$         | $\beta_d$<br>(SF) | $\beta_c/\beta_d$ | $\beta_{hs}$<br>(note 1, note 2) | CM(dB)<br>(note 3) | MPR(dB) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------|-------------------|-------------------|----------------------------------|--------------------|---------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2/15              | 15/15             | 64                | 2/15              | 4/15                             | 0.0                | 0.0     |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 12/15<br>(note 4) | 15/15<br>(note 4) | 64                | 12/15<br>(note 4) | 24/15                            | 1.0                | 0.0     |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 15/15             | 8/15              | 64                | 15/8              | 30/15                            | 1.5                | 0.5     |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 15/15             | 4/15              | 64                | 15/4              | 30/15                            | 1.5                | 0.5     |
| <p>Note1: <math>\Delta_{ACK}</math>, <math>\Delta_{NACK}</math> and <math>\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Rightarrow \beta_{hs} = 30/15 * \beta_c</math></p> <p>Note2: CM=1 for <math>\beta_c/\beta_d = 12/15</math>, <math>\beta_{hs}/\beta_c = 24/15</math>.</p> <p>Note3: For subtest 2 the <math>\beta_c/\beta_d</math> ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to <math>\beta_c = 11/15</math> and <math>\beta_d = 15/15</math>.</p> |                   |                   |                   |                   |                                  |                    |         |

#### 5.5.2.5 Release 6 HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, for the highest body-worn accessory exposure SAR configuration in 12.2 kbps RMC.



When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in Table 2 and other applicable procedures described in the 'WCDMA EUT and 'Release 5 HSDPA Data Devices' sections of this document

**Table 5: Sub-Test 5 Setup for Release 6 HSUPA**

| Sub-set | $\beta_c$            | $\beta_d$            | $\beta_d$<br>(SF) | $\beta_c/\beta_d$    | $\beta_{hs}^{(1)}$ | $\beta_{ec}$ | $\beta_{ed}$                               | $\beta_{ed}$<br>(SF) | $\beta_{ed}$<br>(codes) | CM<br>(2)<br>(dB) | MPR<br>(dB) | AG <sup>(4)</sup><br>Index | E-TFCI |
|---------|----------------------|----------------------|-------------------|----------------------|--------------------|--------------|--------------------------------------------|----------------------|-------------------------|-------------------|-------------|----------------------------|--------|
| 1       | 11/15 <sup>(3)</sup> | 15/15 <sup>(3)</sup> | 64                | 11/15 <sup>(3)</sup> | 22/15              | 209/225      | 1039/225                                   | 4                    | 1                       | 1.0               | 0.0         | 20                         | 75     |
| 2       | 6/15                 | 15/15                | 64                | 6/15                 | 12/15              | 12/15        | 94/75                                      | 4                    | 1                       | 3.0               | 2.0         | 12                         | 67     |
| 3       | 15/15                | 9/15                 | 64                | 15/9                 | 30/15              | 30/15        | $\beta_{ed1}$ 47/15<br>$\beta_{ed2}$ 47/15 | 4                    | 2                       | 2.0               | 1.0         | 15                         | 92     |
| 4       | 2/15                 | 15/15                | 64                | 2/15                 | 4/15               | 2/15         | 56/75                                      | 4                    | 1                       | 3.0               | 2.0         | 17                         | 71     |
| 5       | 15/15 <sup>(4)</sup> | 15/15 <sup>(4)</sup> | 64                | 15/15 <sup>(4)</sup> | 30/15              | 24/15        | 134/15                                     | 4                    | 1                       | 1.0               | 0.0         | 21                         | 81     |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

**Table 6: HSUPA UE category**

| UE<br>E-DCH<br>Category | Maximum<br>E-DCH<br>Codes<br>Transmitted | Number<br>of HARQ<br>Processes | E-<br>DCH<br>TTI<br>(ms) | Minimum<br>Spreading<br>Factor | Maximum<br>E-DCH<br>Transport<br>Block Bits | Max<br>Rate<br>(Mbps) |
|-------------------------|------------------------------------------|--------------------------------|--------------------------|--------------------------------|---------------------------------------------|-----------------------|
| 1                       | 1                                        | 4                              | 10                       | 4                              | 7110                                        | 0.7296                |
| 2                       | 2                                        | 8                              | 2                        | 4                              | 2798                                        | 1.4592                |
|                         | 2                                        | 4                              | 10                       | 4                              | 14484                                       |                       |
| 3                       | 2                                        | 4                              | 10                       | 4                              | 14484                                       | 1.4592                |
| 4                       | 2                                        | 8                              | 2                        | 2                              | 5772                                        | 2.9185                |
|                         | 2                                        | 4                              | 10                       | 2                              | 20000                                       | 2.00                  |
| 5                       | 2                                        | 4                              | 10                       | 2                              | 20000                                       | 2.00                  |
| 6                       | 4                                        | 8                              | 2                        | 2 SE2 & 2 SE4                  | 11484                                       | 5.76                  |



|                                                                                                                                                                                                                  |   |   |    |               |       |      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|----|---------------|-------|------|
| (No DPDCH)                                                                                                                                                                                                       | 4 | 4 | 10 |               | 20000 | 2.00 |
| 7                                                                                                                                                                                                                | 4 | 8 | 2  | 2 SF2 & 2 SF4 | 22996 | ?    |
| (No DPDCH)                                                                                                                                                                                                       | 4 | 4 | 10 |               | 20000 | ?    |
| NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.<br>UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM.<br>(TS25.306-7.3.0) |   |   |    |               |       |      |

### 5.5.3 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

#### A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

#### C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

#### D) Largest channel bandwidth standalone SAR test requirements

##### 1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

##### 2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

##### 3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the



remaining required test channels must also be tested.

#### 4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

#### **E) Other channel bandwidth standalone SAR test requirements**

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the *reported* SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

### 5.2.3 LTE CA specification

The device supports LTE advanced Rel. 12, Carrier Aggregation (CA) on downlink for Intra band and inter-band. Uplink CA is supported for Intra band only, more details information is provided in tables below:

#### 1) DL CA Intra band contiguous

| E-UTRA CA configuration / Bandwidth combination set |                          |                                                             |                                      |                                      |                           |   |
|-----------------------------------------------------|--------------------------|-------------------------------------------------------------|--------------------------------------|--------------------------------------|---------------------------|---|
| E-UTRA CA configuration                             | Uplink CA configurations | Component carriers in order of increasing carrier frequency |                                      |                                      | Bandwidth combination set |   |
|                                                     |                          | Channel bandwidths for carrier [MHz]                        | Channel bandwidths for carrier [MHz] | Channel bandwidths for carrier [MHz] |                           |   |
| CA_7C                                               | CA_7C                    | 15                                                          | 15                                   |                                      | 40                        | 0 |
|                                                     |                          | 20                                                          | 20                                   |                                      |                           |   |
|                                                     |                          | 10                                                          | 20                                   |                                      | 40                        | 1 |
|                                                     |                          | 15                                                          | 15, 20                               |                                      |                           |   |
|                                                     |                          | 20                                                          | 10, 15, 20                           |                                      |                           |   |
|                                                     |                          | 15                                                          | 10, 15                               |                                      | 40                        | 2 |
|                                                     |                          | 20                                                          | 15, 20                               |                                      |                           |   |
|                                                     |                          | 15                                                          | 15                                   |                                      |                           |   |
|                                                     |                          | 20                                                          | 10, 15, 20                           |                                      |                           |   |
| CA_38C                                              | CA_38C                   | 15                                                          | 15                                   |                                      | 40                        | 0 |
|                                                     |                          | 20                                                          | 20                                   |                                      |                           |   |
| CA_41C                                              | CA_41C                   | 10                                                          | 20                                   |                                      | 40                        | 0 |
|                                                     |                          | 15                                                          | 15, 20                               |                                      |                           |   |
|                                                     |                          | 20                                                          | 10, 15, 20                           |                                      |                           |   |
|                                                     |                          | 5, 10                                                       | 20                                   |                                      | 40                        | 1 |
|                                                     |                          | 15                                                          | 15, 20                               |                                      |                           |   |
|                                                     |                          | 20                                                          | 5, 10, 15, 20                        |                                      |                           |   |
|                                                     |                          | 10                                                          | 15, 20                               |                                      | 40                        | 2 |
|                                                     |                          | 15                                                          | 10, 15, 20                           |                                      |                           |   |
|                                                     |                          | 20                                                          | 10, 15, 20                           |                                      |                           |   |
|                                                     |                          | 10                                                          | 20                                   |                                      | 40                        | 3 |
|                                                     |                          | 20                                                          | 20                                   |                                      |                           |   |

NOTE 1: The CA configuration refers to an operating band and a CA bandwidth class specified in Table 5.6A-1 (the indexing letter). Absence of a CA bandwidth class for an operating band implies support of all classes.

#### 5.5.4 Additional requirements for TDD LTE specification

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

TDD LTE Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table: Uplink-downlink configurations for uplink-downlink configurations and Table: Configuration of special subframe (lengths of DwPTS/GP/UpPTS) for Special subframe configurations.

Figure 1: Frame structure type 2

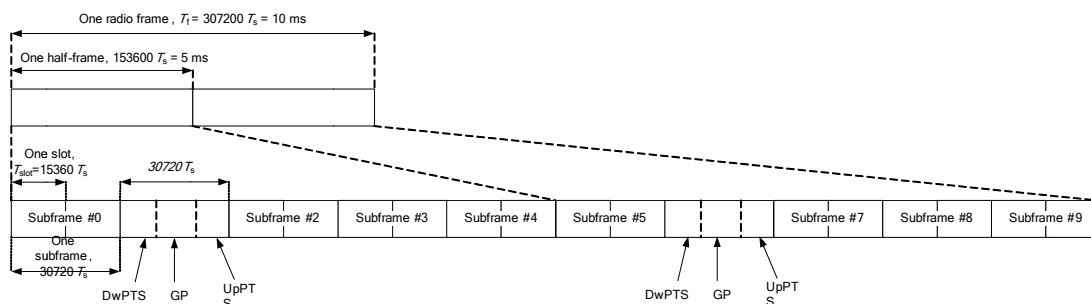


Table 7: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

| Special subframe configuration | Normal cyclic prefix in downlink |                                |                                  | Extended cyclic prefix in downlink |                                |                                  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                                    | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0                              | $6592 \cdot T_s$                 | $2192 \cdot T_s$               | $2560 \cdot T_s$                 | $7680 \cdot T_s$                   | $2192 \cdot T_s$               | $2560 \cdot T_s$                 |
| 1                              | $19760 \cdot T_s$                |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 2                              | $21952 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 3                              | $24144 \cdot T_s$                |                                |                                  | $25600 \cdot T_s$                  |                                |                                  |
| 4                              | $26336 \cdot T_s$                | $4384 \cdot T_s$               | $5120 \cdot T_s$                 | $7680 \cdot T_s$                   | $4384 \cdot T_s$               | $5120 \cdot T_s$                 |
| 5                              | $6592 \cdot T_s$                 |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 6                              | $19760 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 7                              | $21952 \cdot T_s$                |                                |                                  | $12800 \cdot T_s$                  |                                |                                  |
| 8                              | $24144 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |
| 9                              | $13168 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |

**Table 8: Uplink-downlink configurations**

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D |

According to Figure 1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below. The count of Uplink subframes are according to Table: Uplink-downlink configurations:

$$\text{Duty cycle} = (30720\text{Ts} \times \text{Ups} + \text{Uplink Component} \times \text{Specials}) / (307200\text{Ts})$$

About the uplink component of Special subframes, we can figure out by Table: Configuration of special subframe (lengths of DwPTS/GP/UpPTS):

$$\text{Uplink Component} = \text{UpPTS}$$

In conclusion, for the TDD LTE Band, Duty Cycle can be calculated with formula as below .all these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720\text{Ts} \times \text{Ups}) + \text{UpPTS} \times \text{Specials}] / (307200\text{Ts})$$

And we can get different Duty cycles under different configurations:

| Uplink-downlink configuration | Subframe number |   |   | Configuration of special subframe |                   |                                  |                   |                                    |                   |                                  |                   |
|-------------------------------|-----------------|---|---|-----------------------------------|-------------------|----------------------------------|-------------------|------------------------------------|-------------------|----------------------------------|-------------------|
|                               |                 |   |   | Normal cyclic prefix in downlink  |                   |                                  |                   | Extended cyclic prefix in downlink |                   |                                  |                   |
|                               |                 |   |   | Normal cyclic prefix in uplink    |                   | Extended cyclic prefix in uplink |                   | Normal cyclic prefix in uplink     |                   | Extended cyclic prefix in uplink |                   |
|                               | D               | S | U | configuration 0~4                 | configuration 5~9 | configuration 0~4                | configuration 5~9 | configuration 0~3                  | configuration 4~7 | configuration 0~3                | configuration 4~7 |
| 0                             | 2               | 2 | 6 | 61.43%                            | 62.85%            | 61.67%                           | 63.33%            | 61.43%                             | 62.85%            | 61.67%                           | 63.33%            |
| 1                             | 4               | 2 | 4 | 41.43%                            | 42.85%            | 41.67%                           | 43.33%            | 41.43%                             | 42.85%            | 41.67%                           | 43.33%            |
| 2                             | 6               | 2 | 2 | 21.43%                            | 22.85%            | 21.67%                           | 23.33%            | 21.43%                             | 22.85%            | 21.67%                           | 23.33%            |
| 3                             | 6               | 1 | 3 | 30.71%                            | 31.43%            | 30.83%                           | 31.67%            | 30.71%                             | 31.43%            | 30.83%                           | 31.67%            |
| 4                             | 7               | 1 | 2 | 20.71%                            | 21.43%            | 20.83%                           | 21.67%            | 20.71%                             | 21.43%            | 20.83%                           | 21.67%            |
| 5                             | 8               | 1 | 1 | 10.71%                            | 11.43%            | 10.83%                           | 11.67%            | 10.71%                             | 11.43%            | 10.83%                           | 11.67%            |
| 6                             | 3               | 2 | 5 | 51.43%                            | 52.85%            | 51.67%                           | 53.33%            | 51.43%                             | 52.85%            | 51.67%                           | 53.33%            |

SAR test Plan: For TDD LTE, SAR should be tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type

**Physical Cell Setup**

- DL Cell Bandwidth: 20.0 MHz
- UL Cell Bandwidth: 20.0 MHz
- Physical Cell ID: 0
- Cyclic Prefix: Normal
- Sounding RS (SRS): ☐
- SRS: ☐
- TDD: ☐
  - Use Carrier Specific: ☐
  - Uplink Downlink Configurat...: 0
  - Subframe Number: 0 1 2 3 4 5 6 7 8 9
  - Direction: ↓ S ↑ ↑ ↑ ↓ S ↑ ↑ ↑
  - Special Subframe: 7
- PRACH: ☐
- Network: ☐
- Connection: ☐
- COL Reporting: ☐

**LTE**

LTE 1 TX Meas.

LTE 1 RX Meas.

Go to...

Routing

**LTE Signaling**

**ON**

Config ...

### 5.5.5 Wi-Fi Test Configuration

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported SAR* for the *initial test position* is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the *initial test position* to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the *reported SAR* is  $\leq 0.8$  W/kg or all required test positions are tested.
  - ✧ For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - ✧ When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported SAR* is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported SAR* is  $\leq 1.2$  W/kg or all required test channels are considered.
  - ✧ The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

### 5.5.6 BT Test Configuration

For BT SAR testing, BT engineering testing software installed on the EUT can provide continuous transmitting RF signal with maximum output power. And the CBT control the EUT operating with hopping off and data rate set for max output power mode.

### 5.5.7 Power Reduction Configuration

This mobile phone device supports the receiver detection mechanism. This device uses the receiver to indicate whether the user is making a call in head or body.

When there is a voice call (including VOIP) and the audio is actively routed through the earpiece receiver, which indicating the head exposure condition it will trigger the head exposure reduced the power.

When there is a voice call (including VOIP), and the audio is actively routed through the headset or speaker, which indicating the body exposure conditions will trigger the body exposure reduced the power.

When this device used data mode only, and the receiver will not work too, the reduced the power are same as body exposure.

WWAN Reduced power level table

| Receiver state         | Antenna | Transmitting conditions | Power reduced bands                                      | / |
|------------------------|---------|-------------------------|----------------------------------------------------------|---|
| On<br>(head scenario)  | Up      | WWAN Use Only           | GSM1900;<br>WCDMA B2/4;<br>LTE B2/4/7/66/38/41           | / |
| On<br>(head scenario)  | Up      | WWAN + WLAN 2.4G        | GSM 850/GSM1900;<br>WCDMA B2/4;<br>LTE B2/4/5/7/66/38/41 | / |
| On<br>(head scenario)  | Up      | WWAN + WLAN 5G          | GSM 850/GSM1900;<br>WCDMA B2/4;<br>LTE B2/4/5/7/66/38/41 | / |
| Off<br>(Body scenario) | Up      | WWAN Use Only           | GSM1900;<br>WCDMA B2/4;<br>LTE B2/4/7/66                 | / |
| Off<br>(Body scenario) | Up      | WWAN + WLAN 2.4G        | GSM1900;<br>WCDMA B2/4;<br>LTE B2/4/7/66                 | / |
| Off<br>(Body scenario) | Up      | WWAN + WLAN 5G          | GSM1900;<br>WCDMA B2/4;<br>LTE B2/4/7/66                 | / |
| Off<br>(Body scenario) | Down    | WWAN Use Only           | WCDMA B4;<br>LTE B4/66                                   | / |



|                        |      |                  |                          |   |
|------------------------|------|------------------|--------------------------|---|
| Off<br>(Body scenario) | Down | WWAN + WLAN 2.4G | WCDMA B2/4;<br>LTE B4/66 | / |
| Off<br>(Body scenario) | Down | WWAN + WLAN 5G   | WCDMA B2/4;<br>LTE B4/66 | / |

WLAN Reduced power level table

| Reduced level | Receiver state         | Transmitting conditions | Power reduced bands |               |
|---------------|------------------------|-------------------------|---------------------|---------------|
| Level 1       | On<br>(head scenario)  | WLAN Use Only           | WWLAN 2.4G          |               |
| Level 2&4     |                        | WWAN + WLAN             |                     |               |
|               |                        | Off<br>(Body scenario)  |                     | WLAN Use Only |
|               |                        |                         |                     | WWAN + WLAN   |
| Level 4       | On<br>(head scenario)  | WLAN Use Only           | WLAN 5G             |               |
| Level 2       |                        | WWAN + WLAN             |                     |               |
| Level 1       | Off<br>(Body scenario) | WLAN Use Only           |                     |               |
| Level 4       |                        | WWAN + WLAN             |                     |               |

WWAN Antenna Up Power table

| Mode                | WWAN Antenna |             |                           |          |              |                           |          |
|---------------------|--------------|-------------|---------------------------|----------|--------------|---------------------------|----------|
|                     | Full Power   | Head        |                           |          | Body         |                           |          |
|                     |              | Receiver on |                           |          | Receiver off |                           |          |
|                     |              | Standalone  | Simultaneous transmission |          | Standalone   | Simultaneous transmission |          |
|                     |              |             | Body-worn&Hotspot         |          |              | Body-worn&Hotspot         |          |
|                     |              |             | +2.4G WLAN                | +5G WLAN |              | +2.4G WLAN                | +5G WLAN |
| GSM 850             | 33.30        | 33.30       | 30.30                     | 30.30    | 30.30        | 30.30                     | 30.30    |
| GPRS850 1 Tx Slot   | 33.30        | 33.30       | 30.30                     | 30.30    | 30.30        | 30.30                     | 30.30    |
| GPRS850 2 Tx Slots  | 31.30        | 31.30       | 27.80                     | 27.80    | 27.80        | 27.80                     | 27.80    |
| GPRS850 3 Tx Slots  | 30.30        | 30.30       | 25.80                     | 25.80    | 25.80        | 25.80                     | 25.80    |
| GPRS850 4 Tx Slots  | 29.30        | 29.30       | 24.80                     | 24.80    | 24.80        | 24.80                     | 24.80    |
| EGPRS850 1 Tx Slot  | 30.80        | 30.80       | 24.30                     | 24.30    | 24.30        | 24.30                     | 24.30    |
| EGPRS850 2 Tx Slots | 28.30        | 28.30       | 22.30                     | 22.30    | 22.30        | 22.30                     | 22.30    |
| EGPRS850 3 Tx Slots | 26.80        | 26.80       | 19.30                     | 19.30    | 19.30        | 19.30                     | 19.30    |
| EGPRS850 4 Tx Slots | 25.80        | 25.80       | 17.80                     | 17.80    | 17.80        | 17.80                     | 17.80    |



|                      |       |       |       |       |       |       |       |
|----------------------|-------|-------|-------|-------|-------|-------|-------|
| GSM 1900             | 30.30 | 25.80 | 23.80 | 23.80 | 29.30 | 28.30 | 28.30 |
| GPRS1900 1 Tx Slot   | 30.30 | 25.80 | 23.80 | 23.80 | 29.30 | 28.30 | 28.30 |
| GPRS1900 2 Tx Slots  | 28.30 | 22.80 | 20.80 | 20.80 | 26.30 | 25.30 | 25.30 |
| GPRS1900 3 Tx Slots  | 27.30 | 20.80 | 18.80 | 18.80 | 24.30 | 23.30 | 23.30 |
| GPRS1900 4 Tx Slots  | 26.30 | 19.80 | 17.80 | 17.80 | 23.30 | 22.30 | 22.30 |
| EGPRS1900 1 Tx Slot  | 28.30 | 19.80 | 18.80 | 18.80 | 24.30 | 23.30 | 23.30 |
| EGPRS1900 2 Tx Slots | 26.30 | 15.80 | 15.80 | 15.80 | 21.30 | 20.30 | 20.30 |
| EGPRS1900 3 Tx Slots | 25.30 | 14.80 | 13.80 | 13.80 | 19.30 | 18.30 | 18.30 |
| EGPRS1900 4 Tx Slots | 24.30 | 12.80 | 11.80 | 11.80 | 17.30 | 16.30 | 16.30 |
| WCDMA Band2 RMC      | 24.10 | 17.10 | 14.10 | 19.10 | 19.10 | 18.60 | 18.60 |
| HSDPA Subtest-1      | 23.10 | 15.10 | 13.10 | 13.10 | 18.10 | 17.60 | 17.60 |
| HSDPA Subtest-2      | 23.10 | 15.10 | 13.10 | 13.10 | 18.10 | 17.60 | 17.60 |
| HSDPA Subtest-3      | 22.60 | 15.60 | 12.60 | 12.60 | 17.60 | 17.10 | 17.10 |
| HSDPA Subtest-4      | 22.60 | 14.60 | 12.60 | 12.60 | 17.60 | 17.10 | 17.10 |
| HSUPA Subtest-1      | 21.10 | 15.60 | 12.60 | 12.60 | 17.60 | 17.10 | 17.10 |
| HSUPA Subtest-2      | 20.10 | 16.80 | 12.10 | 12.10 | 17.10 | 16.60 | 16.60 |
| HSUPA Subtest-3      | 21.10 | 16.80 | 13.10 | 13.10 | 18.10 | 17.60 | 17.60 |
| HSUPA Subtest-4      | 20.10 | 15.80 | 11.60 | 11.60 | 16.60 | 16.10 | 16.10 |
| HSUPA Subtest-5      | 22.10 | 15.80 | 13.10 | 13.10 | 18.10 | 17.60 | 17.60 |
| WCDMA Band4 RMC      | 24.10 | 17.60 | 14.60 | 14.60 | 20.10 | 19.60 | 19.60 |
| HSDPA Subtest-1      | 23.10 | 16.60 | 13.60 | 13.60 | 19.10 | 18.60 | 18.60 |
| HSDPA Subtest-2      | 23.10 | 16.60 | 13.60 | 13.60 | 19.10 | 18.60 | 18.60 |
| HSDPA Subtest-3      | 22.60 | 16.10 | 13.10 | 13.10 | 18.60 | 18.10 | 18.10 |
| HSDPA Subtest-4      | 22.60 | 16.10 | 13.10 | 13.10 | 18.60 | 18.10 | 18.10 |
| HSUPA Subtest-1      | 22.60 | 16.10 | 13.10 | 13.10 | 18.60 | 18.10 | 18.10 |
| HSUPA Subtest-2      | 22.60 | 15.60 | 12.60 | 12.60 | 18.10 | 17.60 | 17.60 |
| HSUPA Subtest-3      | 23.60 | 16.60 | 13.60 | 13.60 | 19.10 | 18.60 | 18.60 |
| HSUPA Subtest-4      | 22.10 | 15.10 | 12.10 | 12.10 | 17.60 | 17.10 | 17.10 |
| HSUPA Subtest-5      | 23.60 | 16.60 | 13.60 | 13.60 | 19.10 | 18.60 | 18.60 |
| WCDMA Band5 RMC      | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 |
| HSDPA Subtest-1      | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 |
| HSDPA Subtest-2      | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 |
| HSDPA Subtest-3      | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 |
| HSDPA Subtest-4      | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 |
| HSUPA Subtest-1      | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 |
| HSUPA Subtest-2      | 22.30 | 22.30 | 22.30 | 22.30 | 22.30 | 22.30 | 22.30 |
| HSUPA Subtest-3      | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 |
| HSUPA Subtest-4      | 21.80 | 21.80 | 21.80 | 21.80 | 21.80 | 21.80 | 21.80 |
| HSUPA Subtest-5      | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 |
| LTE Band2            | 23.80 | 17.30 | 16.30 | 16.30 | 18.30 | 17.80 | 17.80 |
| LTE Band4            | 23.80 | 18.30 | 15.30 | 15.30 | 19.80 | 19.30 | 19.30 |
| LTE Band5            | 24.30 | 24.30 | 23.30 | 23.30 | 24.30 | 24.30 | 24.30 |
| LTE Band7            | 23.80 | 15.80 | 14.80 | 14.80 | 22.80 | 21.80 | 21.80 |



|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| LTE Band12 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 |
| LTE Band17 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 |
| LTE Band26 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 |
| LTE Band66 | 24.10 | 17.60 | 14.60 | 14.60 | 20.10 | 20.10 | 20.10 |
| LTE Band38 | 23.80 | 20.80 | 20.30 | 20.30 | 23.80 | 23.80 | 23.80 |
| LTE Band41 | 23.80 | 20.80 | 20.30 | 20.30 | 23.80 | 23.80 | 23.80 |

WWAN Antenna Down Power table

| Mode                 | WWAN Antenna |             |                           |          |              |                           |          |
|----------------------|--------------|-------------|---------------------------|----------|--------------|---------------------------|----------|
|                      | Full Power   | Head        |                           |          | Body         |                           |          |
|                      |              | Receiver on |                           |          | Receiver off |                           |          |
|                      |              | Standalone  | Simultaneous transmission |          | Standalone   | Simultaneous transmission |          |
|                      |              |             | +2.4G WLAN                | +5G WLAN |              | +2.4G WLAN                | +5G WLAN |
| GSM 850              | 33.30        | 33.30       | 33.30                     | 33.30    | 33.30        | 33.30                     | 33.30    |
| GPRS850 1 Tx Slot    | 33.30        | 33.30       | 33.30                     | 33.30    | 33.30        | 33.30                     | 33.30    |
| GPRS850 2 Tx Slots   | 31.30        | 31.30       | 31.30                     | 31.30    | 31.30        | 31.30                     | 31.30    |
| GPRS850 3 Tx Slots   | 30.30        | 30.30       | 30.30                     | 30.30    | 30.30        | 30.30                     | 30.30    |
| GPRS850 4 Tx Slots   | 29.30        | 29.30       | 29.30                     | 29.30    | 29.30        | 29.30                     | 29.30    |
| EGPRS850 1 Tx Slot   | 30.80        | 30.80       | 30.80                     | 30.80    | 30.80        | 30.80                     | 30.80    |
| EGPRS850 2 Tx Slots  | 28.30        | 28.30       | 28.30                     | 28.30    | 28.30        | 28.30                     | 28.30    |
| EGPRS850 3 Tx Slots  | 26.80        | 26.80       | 26.80                     | 26.80    | 26.80        | 26.80                     | 26.80    |
| EGPRS850 4 Tx Slots  | 25.80        | 25.80       | 25.80                     | 25.80    | 25.80        | 25.80                     | 25.80    |
| GSM 1900             | 30.30        | 30.30       | 30.30                     | 30.30    | 30.30        | 30.30                     | 30.30    |
| GPRS1900 1 Tx Slot   | 30.30        | 30.30       | 30.30                     | 30.30    | 30.30        | 30.30                     | 30.30    |
| GPRS1900 2 Tx Slots  | 28.30        | 28.30       | 28.30                     | 28.30    | 28.30        | 28.30                     | 28.30    |
| GPRS1900 3 Tx Slots  | 27.30        | 27.30       | 27.30                     | 27.30    | 27.30        | 27.30                     | 27.30    |
| GPRS1900 4 Tx Slots  | 26.30        | 26.30       | 26.30                     | 26.30    | 26.30        | 26.30                     | 26.30    |
| EGPRS1900 1 Tx Slot  | 28.30        | 25.30       | 25.30                     | 25.30    | 25.30        | 25.30                     | 25.30    |
| EGPRS1900 2 Tx Slots | 26.30        | 23.30       | 23.30                     | 23.30    | 23.30        | 23.30                     | 23.30    |
| EGPRS1900 3 Tx Slots | 25.30        | 22.30       | 22.30                     | 22.30    | 22.30        | 22.30                     | 22.30    |
| EGPRS1900 4 Tx Slots | 24.30        | 21.30       | 21.30                     | 21.30    | 21.30        | 21.30                     | 21.30    |
| WCDMA Band2 RMC      | 24.10        | 24.10       | 24.10                     | 24.10    | 24.10        | 23.10                     | 23.10    |
| HSDPA Subtest-1      | 23.10        | 23.10       | 23.10                     | 23.10    | 23.10        | 23.10                     | 23.10    |
| HSDPA Subtest-2      | 23.10        | 23.10       | 23.10                     | 23.10    | 23.10        | 23.10                     | 23.10    |
| HSDPA Subtest-3      | 22.60        | 22.60       | 22.60                     | 22.60    | 22.60        | 22.60                     | 22.60    |
| HSDPA Subtest-4      | 22.60        | 22.60       | 22.60                     | 22.60    | 22.60        | 22.60                     | 22.60    |
| HSUPA Subtest-1      | 21.10        | 22.60       | 22.60                     | 22.60    | 22.60        | 21.60                     | 21.60    |
| HSUPA Subtest-2      | 20.10        | 22.10       | 22.10                     | 22.10    | 22.10        | 21.10                     | 21.10    |
| HSUPA Subtest-3      | 21.10        | 23.10       | 23.10                     | 23.10    | 23.10        | 22.10                     | 22.10    |
| HSUPA Subtest-4      | 20.10        | 21.60       | 21.60                     | 21.60    | 21.60        | 20.60                     | 20.60    |
| HSUPA Subtest-5      | 22.10        | 23.10       | 23.10                     | 23.10    | 23.10        | 22.10                     | 22.10    |



|                 |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|
| WCDMA Band4 RMC | 24.10 | 24.10 | 24.10 | 24.10 | 23.10 | 22.10 | 22.10 |
| HSDPA Subtest-1 | 23.10 | 23.10 | 23.10 | 23.10 | 22.10 | 22.10 | 22.10 |
| HSDPA Subtest-2 | 23.10 | 23.10 | 23.10 | 23.10 | 22.10 | 22.10 | 22.10 |
| HSDPA Subtest-3 | 22.60 | 22.60 | 22.60 | 22.60 | 21.60 | 21.60 | 21.60 |
| HSDPA Subtest-4 | 22.60 | 22.60 | 22.60 | 22.60 | 21.60 | 21.60 | 21.60 |
| HSUPA Subtest-1 | 22.60 | 22.60 | 22.60 | 22.60 | 21.60 | 20.60 | 20.60 |
| HSUPA Subtest-2 | 22.60 | 22.10 | 22.10 | 22.10 | 21.10 | 20.10 | 20.10 |
| HSUPA Subtest-3 | 23.60 | 23.10 | 23.10 | 23.10 | 22.10 | 21.10 | 21.10 |
| HSUPA Subtest-4 | 22.10 | 21.60 | 21.60 | 21.60 | 20.60 | 19.60 | 19.60 |
| HSUPA Subtest-5 | 23.60 | 23.10 | 23.10 | 23.10 | 22.10 | 21.10 | 21.10 |
| WCDMA Band5 RMC | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 |
| HSDPA Subtest-1 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 |
| HSDPA Subtest-2 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 |
| HSDPA Subtest-3 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 |
| HSDPA Subtest-4 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 |
| HSUPA Subtest-1 | 22.30 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 | 22.80 |
| HSUPA Subtest-2 | 22.30 | 22.30 | 22.30 | 22.30 | 22.30 | 22.30 | 22.30 |
| HSUPA Subtest-3 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 |
| HSUPA Subtest-4 | 21.80 | 21.80 | 21.80 | 21.80 | 21.80 | 21.80 | 21.80 |
| HSUPA Subtest-5 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 | 23.30 |
| LTE Band2       | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 |
| LTE Band4       | 23.80 | 23.80 | 23.80 | 23.80 | 22.30 | 21.80 | 21.80 |
| LTE Band5       | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 |
| LTE Band7       | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 |
| LTE Band12      | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 |
| LTE Band17      | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 |
| LTE Band26      | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 | 24.30 |
| LTE Band66      | 24.10 | 24.10 | 24.10 | 24.10 | 22.10 | 22.10 | 22.10 |
| LTE Band38      | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 |
| LTE Band41      | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 | 23.80 |

WLAN and Bluetooth Antenna Power table

| Mode                   | WLAN Antenna |             |                           |              |                           |
|------------------------|--------------|-------------|---------------------------|--------------|---------------------------|
|                        | Full Power   | Head        |                           | Body         |                           |
|                        |              | Receiver on |                           | Receiver off |                           |
|                        |              | Standalone  | Simultaneous transmission | Standalone   | Simultaneous transmission |
|                        |              |             | +WWAN                     |              | +WWAN                     |
| 2.4G WLAN 802.11b      | 20.00        | 16.00       | 14.50                     | 20.00        | 14.50                     |
| 2.4G WLAN 802.11g      | 18.00        | 15.50       | 14.50                     | 18.00        | 14.50                     |
| 2.4G WLAN 802.11n20    | 18.00        | 15.50       | 14.50                     | 18.00        | 14.50                     |
| 5.2G&5.3G WLAN 802.11a | 20.00        | 14.50       | 12.50                     | 17.00        | 14.50                     |




|                             |       |       |       |       |       |
|-----------------------------|-------|-------|-------|-------|-------|
| 5.2G&5.3G WLAN 802.11nHT20  | 20.00 | 14.50 | 12.50 | 17.00 | 14.50 |
| 5.2G&5.3G WLAN 802.11nHT40  | 19.00 | 14.50 | 12.50 | 17.00 | 14.50 |
| 5.2G&5.3G WLAN 802.11acHT20 | 20.00 | 14.50 | 12.50 | 17.00 | 14.50 |
| 5.2G&5.3G WLAN 802.11acHT40 | 19.00 | 14.50 | 12.50 | 17.00 | 14.50 |
| 5.2G&5.3G WLAN 802.11acHT80 | 19.00 | 14.50 | 12.50 | 17.00 | 14.50 |
| 5.6G WLAN 802.11a           | 20.00 | 14.50 | 11.50 | 15.50 | 14.50 |
| 5.6G WLAN 802.11nHT20       | 20.00 | 14.50 | 11.50 | 15.50 | 14.50 |
| 5.6G WLAN 802.11nHT40       | 19.00 | 14.50 | 11.50 | 15.50 | 14.50 |
| 5.6G WLAN 802.11acHT20      | 20.00 | 14.50 | 11.50 | 15.50 | 14.50 |
| 5.6G WLAN 802.11acHT40      | 19.00 | 14.50 | 11.50 | 15.50 | 14.50 |
| 5.6G WLAN 802.11acHT80      | 19.00 | 14.50 | 11.50 | 15.50 | 14.50 |
| 5.8G WLAN 802.11a           | 20.00 | 14.50 | 11.50 | 14.50 | 14.50 |
| 5.8G WLAN 802.11nHT20       | 20.00 | 14.50 | 11.50 | 14.50 | 14.50 |
| 5.8G WLAN 802.11nHT40       | 19.00 | 14.50 | 11.50 | 14.50 | 14.50 |
| 5.8G WLAN 802.11acHT20      | 20.00 | 14.50 | 11.50 | 14.50 | 14.50 |
| 5.8G WLAN 802.11acHT40      | 19.00 | 14.50 | 11.50 | 14.50 | 14.50 |
| 5.8G WLAN 802.11acHT80      | 19.00 | 14.50 | 11.50 | 14.50 | 14.50 |
| Bluetooth                   | 13.00 | 13.00 | 13.00 | 13.00 | 13.00 |

## 6 SAR Measurements System Configuration

### 6.3 SAR Measurement Set-up

The DASY system for performing compliance tests consists of the following items:

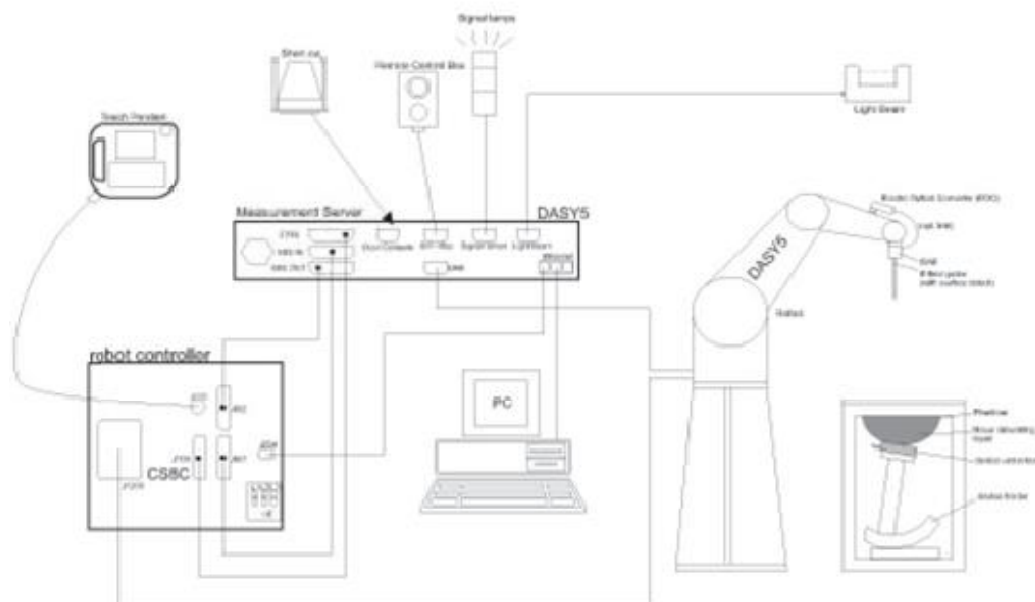

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 6.4 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4(manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### EX3DV4 Probe Specification

|               |                                                                                                                                                                                                            |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE)                                                |
| Calibration   | ISO/IEC 17025 calibration<br>service available                                                                                                                                                             |
| Frequency     | 10 MHz to > 6 GHz<br>Linearity: $\pm 0.2$ dB<br>(30 MHz to 6 GHz)                                                                                                                                          |
| Directivity   | $\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                                                                           |
| Dynamic Range | 10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)                                                                                                                        |
| Dimensions    | Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                                                                          |
| Application   | High precision dosimetric measurements in any exposure Scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |



### E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25$ dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.



$$SAR = C \Delta T / \Delta t$$

Where:  $\Delta t$  = Exposure time (30 seconds),

$C$  = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

Or

$$SAR = |E|^2 \sigma / \rho$$

Where:  $\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density ( $\text{kg/m}^3$ ).

## 6.5 SAR Measurement Procedure

### Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

|                                                                                                        | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                              |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | $5 \pm 1$ mm                                                                                                                                                                                                                                                           | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm     |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                 |
| Maximum area scan spatial resolution:<br>$\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$              | $\leq 2$ GHz: $\leq 15$ mm<br>$2 - 3$ GHz: $\leq 12$ mm                                                                                                                                                                                                                | $3 - 4$ GHz: $\leq 12$ mm<br>$4 - 6$ GHz: $\leq 10$ mm |
|                                                                                                        | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                        |

## Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

|                                                                                                                                                                                                                                                                            |                                           |                                                                                             | ≤3GHz                               | > 3 GHz                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{zoom}}\Delta y_{\text{zoom}}$                                                                                                                                                                                       |                                           |                                                                                             | ≤2GHz: ≤8mm<br>2 – 3GHz: ≤5mm*      | 3 – 4GHz: ≤5mm*<br>4 – 6GHz: ≤4mm*                    |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                            | Uniform grid: $\Delta z_{\text{zoom}}(n)$ |                                                                                             | ≤5mm                                | 3 – 4GHz: ≤4mm<br>4 – 5GHz: ≤3mm<br>5 – 6GHz: ≤2mm    |
|                                                                                                                                                                                                                                                                            | Graded grid                               | $\Delta z_{\text{zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | ≤4mm                                | 3 – 4GHz: ≤3mm<br>4 – 5GHz: ≤2.5mm<br>5 – 6GHz: ≤2mm  |
|                                                                                                                                                                                                                                                                            |                                           | $\Delta z_{\text{zoom}}(n>1)$ : between subsequent points                                   | ≤1.5• $\Delta z_{\text{zoom}}(n-1)$ |                                                       |
| Minimum zoom scan volume                                                                                                                                                                                                                                                   | X, y, z                                   |                                                                                             | ≥30mm                               | 3 – 4GHz: ≥28mm<br>4 – 5GHz: ≥25mm<br>5 – 6GHz: ≥22mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.                                                                                                                          |                                           |                                                                                             |                                     |                                                       |
| * When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4W/kg, ≤8mm, ≤7mm and ≤5mm zoom scan resolution may be applied, respectively, for 2GHz to 3GHz, 3GHz to 4GHz and 4GHz to 6GHz. |                                           |                                                                                             |                                     |                                                       |

## Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



## 7 Main Test Equipment

| Name of Equipment                   | Manufacturer    | Type/Model        | Serial Number | Last Cal.  | Cal. Due Date |
|-------------------------------------|-----------------|-------------------|---------------|------------|---------------|
| Network analyzer                    | Agilent         | E5071B            | MY42404014    | 2020-05-17 | 2021-05-16    |
| Dielectric Probe Kit                | Agilent         | 85070E            | US44020115    | 2020-05-17 | 2021-05-16    |
| Power meter                         | Agilent         | E4417A            | GB41291714    | 2020-05-17 | 2021-05-16    |
| Power sensor                        | Agilent         | N8481H            | MY50350004    | 2020-05-17 | 2021-05-16    |
| Power sensor                        | Agilent         | E9327A            | US40441622    | 2020-05-17 | 2021-05-16    |
| Signal Generator                    | Agilent         | N5181A            | MY50140143    | 2020-05-17 | 2021-05-16    |
| Dual directional coupler            | Agilent         | 778D-012          | 50519         | /          | /             |
| Dual directional coupler            | Agilent         | 777D              | 50146         | /          | /             |
| Dual directional coupler            | UCL             | UCL-DDC0<br>56G-S | 20010600118   | /          | /             |
| Amplifier                           | INDEXSAR        | IXA-020           | 0401          | 2020-05-17 | 2021-05-16    |
| Wireless communication tester       | Anritsu         | MT8820C           | 6201342015    | 2020-05-17 | 2021-05-16    |
| Wireless communication tester       | Key sight       | E5515C            | MY48360988    | 2019-12-15 | 2020-12-14    |
| Wideband radio communication tester | R&S             | CMW 500           | 113645        | 2020-05-17 | 2021-05-16    |
| Base Station Simulator              | R&S             | CMW270            | 100673        | 2020-05-17 | 2021-05-16    |
| E-field Probe                       | SPEAG           | EX3DV4            | 3677          | 2020-07-06 | 2021-07-05    |
| DAE                                 | SPEAG           | DAE4              | 1317          | 2019-10-23 | 2020-10-22    |
| Validation Kit 750MHz               | SPEAG           | D750V3            | 1045          | 2017-08-27 | 2020-08-26    |
| Validation Kit 835MHz               | SPEAG           | D835V2            | 4d020         | 2017-08-28 | 2020-08-27    |
| Validation Kit 1750MHz              | SPEAG           | D1750V2           | 1033          | 2020-02-25 | 2023-02-24    |
| Validation Kit 1900MHz              | SPEAG           | D1900V2           | 5d060         | 2017-08-26 | 2020-08-25    |
| Validation Kit 2450MHz              | SPEAG           | D2450V2           | 786           | 2017-08-29 | 2020-08-28    |
| Validation Kit 2600MHz              | SPEAG           | D2600V2           | 1025          | 2018-05-02 | 2021-05-01    |
| Validation Kit 5GHz                 | SPEAG           | D5GHzV2           | 1151          | 2020-02-27 | 2023-02-26    |
| Temperature Probe                   | Tianjin jinming | JM222             | 381           | 2020-05-25 | 2021-05-24    |
| Hygrothermograph                    | Anymetr         | NT-311            | 20150731      | 2020-05-17 | 2021-05-16    |



|                     |         |        |         |   |   |
|---------------------|---------|--------|---------|---|---|
| Twin SAM Phantom    | Speag   | SAM1   | TP-1534 | / | / |
| Software for Test   | Speag   | DASY52 | /       | / | / |
| Software for Tissue | Agilent | 85070  | /       | / | / |

## 8 Tissue Dielectric Parameter Measurements & System Verification

### 8.3 Tissue Verification

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 24 hours of use; or earlier if the dielectric parameters can become out of tolerance.

#### Target values

| Frequency (MHz) | Water (%) | Salt (%)                       | Sugar (%) | Glycol (%) | Preventol (%) | Cellulose (%) | $\epsilon_r$ | $\sigma(\text{s/m})$ |
|-----------------|-----------|--------------------------------|-----------|------------|---------------|---------------|--------------|----------------------|
| 750             | 41.448    | 1.452                          | 56        | 0          | 0.1           | 1.0           | 41.9         | 0.89                 |
| 835             | 41.45     | 1.45                           | 56        | 0          | 0.1           | 1.0           | 41.5         | 0.90                 |
| 1750            | 55.24     | 0.31                           | 0         | 44.45      | 0             | 0             | 40.1         | 1.37                 |
| 1900            | 55.242    | 0.306                          | 0         | 44.452     | 0             | 0             | 40.0         | 1.40                 |
| 2450            | 62.7      | 0.5                            | 0         | 36.8       | 0             | 0             | 39.2         | 1.80                 |
| 2600            | 55.242    | 0.306                          | 0         | 44.452     | 0             | 0             | 39.0         | 1.96                 |
| Frequency (MHz) | Water (%) | Diethylenglycol monohexylether |           |            | Triton X-100  |               | $\epsilon_r$ | $\sigma(\text{s/m})$ |
| 5250            | 65.53     | 17.24                          |           |            | 17.23         |               | 35.9         | 4.71                 |
| 5600            | 65.53     | 17.24                          |           |            | 17.23         |               | 35.5         | 5.07                 |
| 5750            | 65.53     | 17.24                          |           |            | 17.23         |               | 35.4         | 5.22                 |

## Measurements results

| Frequency<br>(MHz)                                                                                                                                               | Test Date | Temp<br>℃ | Measured Dielectric<br>Parameters |                | Target Dielectric<br>Parameters |                | Limit<br>(Within ±5%)   |                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------------------------------|----------------|---------------------------------|----------------|-------------------------|---------------------|
|                                                                                                                                                                  |           |           | $\epsilon_r$                      | $\sigma$ (s/m) | $\epsilon_r$                    | $\sigma$ (s/m) | Dev<br>$\epsilon_r$ (%) | Dev<br>$\sigma$ (%) |
| 750                                                                                                                                                              | 8/18/2020 | 21.5      | 42.3                              | 0.88           | 41.9                            | 0.89           | 0.95                    | -1.12               |
|                                                                                                                                                                  | 8/20/2020 | 21.5      | 42.0                              | 0.87           | 41.9                            | 0.89           | 0.24                    | -2.25               |
| 835                                                                                                                                                              | 8/17/2020 | 21.5      | 41.4                              | 0.88           | 41.5                            | 0.90           | -0.24                   | -2.22               |
|                                                                                                                                                                  | 8/19/2020 | 21.5      | 41.3                              | 0.87           | 41.5                            | 0.90           | -0.48                   | -3.33               |
|                                                                                                                                                                  | 8/21/2020 | 21.5      | 41.4                              | 0.92           | 41.5                            | 0.90           | -0.24                   | 2.22                |
| 1750                                                                                                                                                             | 8/25/2020 | 21.5      | 40.2                              | 1.34           | 40.1                            | 1.37           | 0.25                    | -2.19               |
|                                                                                                                                                                  | 8/26/2020 | 21.5      | 40.1                              | 1.34           | 40.1                            | 1.37           | 0.00                    | -2.19               |
|                                                                                                                                                                  | 8/28/2020 | 21.5      | 40.2                              | 1.36           | 40.1                            | 1.37           | 0.25                    | -0.73               |
|                                                                                                                                                                  | 8/30/2020 | 21.5      | 40.3                              | 1.38           | 40.1                            | 1.37           | 0.50                    | 0.73                |
| 1900                                                                                                                                                             | 8/22/2020 | 21.5      | 40.1                              | 1.41           | 40.0                            | 1.40           | 0.25                    | 0.71                |
|                                                                                                                                                                  | 8/23/2020 | 21.5      | 40.2                              | 1.43           | 40.0                            | 1.40           | 0.50                    | 2.14                |
|                                                                                                                                                                  | 8/24/2020 | 21.5      | 40.3                              | 1.42           | 40.0                            | 1.40           | 0.75                    | 1.43                |
| 2450                                                                                                                                                             | 8/27/2020 | 21.5      | 38.6                              | 1.81           | 39.2                            | 1.80           | -1.53                   | 0.56                |
| 2600                                                                                                                                                             | 9/1/2020  | 21.5      | 38.2                              | 2.01           | 39.0                            | 1.96           | -2.05                   | 2.55                |
|                                                                                                                                                                  | 9/3/2020  | 21.5      | 38.4                              | 1.94           | 39.0                            | 1.96           | -1.54                   | -1.02               |
|                                                                                                                                                                  | 9/4/2020  | 21.5      | 38.3                              | 1.99           | 39.0                            | 1.96           | -1.79                   | 1.53                |
|                                                                                                                                                                  | 9/7/2020  | 21.5      | 38.5                              | 1.95           | 39.0                            | 1.96           | -1.28                   | -0.51               |
| 5250                                                                                                                                                             | 9/2/2020  | 21.5      | 35.5                              | 4.80           | 35.9                            | 4.71           | -1.11                   | 1.91                |
| 5600                                                                                                                                                             | 9/5/2020  | 21.5      | 34.2                              | 5.21           | 35.5                            | 5.07           | -3.66                   | 2.76                |
| 5750                                                                                                                                                             | 9/5/2020  | 21.5      | 34.9                              | 5.21           | 35.4                            | 5.22           | -1.41                   | -0.19               |
| Note: The depth of tissue-equivalent liquid in a phantom must be $\geq 15.0$ cm for SAR measurements $\leq 3$ GHz and $\geq 10.0$ cm for measurements $> 3$ GHz. |           |           |                                   |                |                                 |                |                         |                     |

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured using the dielectric probe kit and the network analyzer. A system check measurement for every day was made following the determination of the dielectric parameters of the Tissue simulates, using the dipole validation kit. The dipole antenna was placed under the flat section of the twin SAM phantom.

The diagram illustrates the experimental setup for measuring the radiation pattern of a dipole antenna. The setup includes a Signal Generator, an Amplifier (Amp), a Low Pass Filter, a 3dB coupler, and Attenuators (Att1, Att2). The antenna is a dipole mounted on a Flat Phantom, with a Gold probe and a 3D Probe positioner. A computer is connected to the system for data acquisition. Two circular insets show detailed views of the 'Spacer' and 'Tuning element' components.

*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Justification for Extended SAR Dipole Calibrations**

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss ( $< -20$  dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

| Dipole                      |             | Date of Measurement | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
|-----------------------------|-------------|---------------------|-----------------|------------|------------------------|----------------|
| Dipole D750V3<br>SN: 1045   | Head Liquid | 8/27/2017           | -28.5           | /          | 52.5                   | /              |
|                             |             | 8/26/2018           | -27.6           | 3.3        | 53.2                   | -0.7           |
|                             |             | 8/25/2019           | -27.5           | 0.4        | 54.1                   | -0.9           |
| Dipole D835V2<br>SN: 4d020  | Head Liquid | 8/28/2017           | -31.9           | /          | 50.3                   | /              |
|                             |             | 8/27/2018           | -29.0           | 10.0       | 46.6                   | 3.7            |
|                             |             | 8/26/2019           | -29.4           | -1.4       | 45.9                   | 0.7            |
| Dipole D1900V2<br>SN: 5d060 | Head Liquid | 8/26/2017           | -23.4           | /          | 52.0                   | /              |
|                             |             | 8/25/2018           | -24.7           | -5.3       | 54.4                   | -2.4           |
|                             |             | 8/24/2019           | -24.9           | -0.8       | 56.2                   | -1.8           |
| Dipole D2450V2<br>SN: 786   | Head Liquid | 8/29/2017           | -25.5           | /          | 53.4                   | /              |
|                             |             | 8/28/2018           | -23.0           | 10.9       | 57.2                   | -3.8           |
|                             |             | 8/27/2019           | -22.2           | 3.6        | 56.4                   | 0.8            |
| Dipole D2600V2<br>SN: 1025  | Head Liquid | 5/2/2018            | -22.0           | /          | 48.1                   | /              |
|                             |             | 5/1/2019            | -22.5           | -2.2       | 48.7                   | -0.6           |

**System Check results**

| Frequency (MHz) | Test Date | Temp $^{\circ}\text{C}$ | 250mW /100mW Measured SAR <sub>1g</sub> (W/kg) | 1W Normalized SAR <sub>1g</sub> (W/kg) | 1W Target SAR <sub>1g</sub> (W/kg) | $\Delta$ % (Limit $\pm 10\%$ ) | Plot No. |
|-----------------|-----------|-------------------------|------------------------------------------------|----------------------------------------|------------------------------------|--------------------------------|----------|
| 750             | 8/18/2020 | 21.5                    | 2.13                                           | 8.52                                   | 8.34                               | 2.16                           | 1        |
|                 | 8/20/2020 | 21.5                    | 2.10                                           | 8.40                                   | 8.34                               | 0.72                           | 2        |
| 835             | 8/17/2020 | 21.5                    | 2.44                                           | 9.76                                   | 9.45                               | 3.28                           | 3        |
|                 | 8/19/2020 | 21.5                    | 2.46                                           | 9.84                                   | 9.45                               | 4.13                           | 4        |
|                 | 8/21/2020 | 21.5                    | 2.43                                           | 9.72                                   | 9.45                               | 2.86                           | 5        |
| 1750            | 8/25/2020 | 21.5                    | 8.95                                           | 35.80                                  | 35.90                              | -0.28                          | 6        |
|                 | 8/26/2020 | 21.5                    | 9.11                                           | 36.44                                  | 35.90                              | 1.50                           | 7        |
|                 | 8/28/2020 | 21.5                    | 8.96                                           | 35.84                                  | 35.90                              | -0.17                          | 8        |
|                 | 8/30/2020 | 21.5                    | 8.92                                           | 35.68                                  | 35.90                              | -0.61                          | 9        |
| 1900            | 8/22/2020 | 21.5                    | 9.88                                           | 39.52                                  | 40.10                              | -1.45                          | 10       |
|                 | 8/23/2020 | 21.5                    | 9.85                                           | 39.40                                  | 40.10                              | -1.75                          | 11       |
|                 | 8/24/2020 | 21.5                    | 10.55                                          | 42.20                                  | 40.10                              | 5.24                           | 12       |
| 2450            | 8/27/2020 | 21.5                    | 13.70                                          | 54.80                                  | 52.60                              | 4.18                           | 13       |
| 2600            | 9/1/2020  | 21.5                    | 13.90                                          | 55.60                                  | 54.10                              | 2.77                           | 14       |
|                 | 9/3/2020  | 21.5                    | 13.88                                          | 55.52                                  | 54.10                              | 2.62                           | 15       |



|                                                                                               |          |      |       |       |       |       |    |
|-----------------------------------------------------------------------------------------------|----------|------|-------|-------|-------|-------|----|
|                                                                                               | 9/4/2020 | 21.5 | 13.94 | 55.76 | 54.10 | 3.07  | 16 |
|                                                                                               | 9/7/2020 | 21.5 | 13.90 | 55.60 | 54.10 | 2.77  | 17 |
| 5250                                                                                          | 9/2/2020 | 21.5 | 7.87  | 78.70 | 78.00 | 0.90  | 18 |
| 5600                                                                                          | 9/5/2020 | 21.5 | 7.67  | 76.70 | 80.50 | -4.72 | 19 |
| 5750                                                                                          | 9/5/2020 | 21.5 | 7.66  | 76.60 | 77.40 | -1.03 | 20 |
| Note: Target Values used derive from the calibration certificate Data Storage and Evaluation. |          |      |       |       |       |       |    |



## 8.5 SAR System Validation

Per FCC KDB 865664 D02v01, SAR system verification is required to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles are used with the required tissue-equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point must be validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

a tabulated summary of the system validation status, measurement frequencies, SAR probes, calibrated signal type(s) and tissue dielectric parameters has been included.

| Frequency [MHz] | Date      | Probe SN | Probe Type | Probe Cal Point |      | PERM (Er) | COND (Σ) | CW Validation |                 |                | Mod. Validation |             |      |
|-----------------|-----------|----------|------------|-----------------|------|-----------|----------|---------------|-----------------|----------------|-----------------|-------------|------|
|                 |           |          |            |                 |      |           |          | Sensitivity   | Probe Linearity | Probe Isotropy | Mod. Type       | Duty Factor | PAR  |
| 750             | 6/25/2019 | 3677     | EX3DV4     | 750             | Head | 42.81     | 0.85     | PASS          | PASS            | PASS           | FDD             | PASS        | N/A  |
| 835             | 6/25/2019 | 3677     | EX3DV4     | 835             | Head | 42.22     | 0.90     | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| 1750            | 6/25/2019 | 3677     | EX3DV4     | 1750            | Head | 39.91     | 1.32     | PASS          | PASS            | PASS           | NA              | N/A         | N/A  |
| 1900            | 6/25/2019 | 3677     | EX3DV4     | 1900            | Head | 39.43     | 1.42     | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| 2450            | 6/25/2019 | 3677     | EX3DV4     | 2450            | Head | 38.19     | 1.83     | PASS          | PASS            | PASS           | OFDM            | PASS        | PASS |
| 2600            | 6/25/2019 | 3677     | EX3DV4     | 2600            | Head | 37.60     | 1.99     | PASS          | PASS            | PASS           | TDD             | PASS        | N/A  |
| 5250            | 6/25/2019 | 3677     | EX3DV4     | 5250            | Head | 35.36     | 4.83     | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| 5600            | 6/25/2019 | 3677     | EX3DV4     | 5600            | Head | 34.43     | 5.29     | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| 5750            | 6/25/2019 | 3677     | EX3DV4     | 5750            | Head | 34.07     | 5.47     | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| 750             | 6/25/2019 | 3677     | EX3DV4     | 750             | Body | 55.35     | 0.99     | PASS          | PASS            | PASS           | FDD             | PASS        | N/A  |
| 835             | 6/25/2019 | 3677     | EX3DV4     | 835             | Body | 54.88     | 0.98     | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| 1750            | 6/25/2019 | 3677     | EX3DV4     | 1750            | Body | 51.24     | 1.44     | PASS          | PASS            | PASS           | NA              | N/A         | N/A  |
| 1900            | 6/25/2019 | 3677     | EX3DV4     | 1900            | Body | 50.98     | 1.56     | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| 2450            | 6/25/2019 | 3677     | EX3DV4     | 2450            | Body | 50.59     | 1.95     | PASS          | PASS            | PASS           | OFDM            | PASS        | PASS |
| 2600            | 6/25/2019 | 3677     | EX3DV4     | 2600            | Body | 50.14     | 2.13     | PASS          | PASS            | PASS           | TDD             | PASS        | N/A  |
| 5250            | 6/25/2019 | 3677     | EX3DV4     | 5250            | Body | 47.37     | 5.44     | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| 5600            | 6/25/2019 | 3677     | EX3DV4     | 5600            | Body | 46.42     | 5.99     | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| 5750            | 6/25/2019 | 3677     | EX3DV4     | 5750            | Body | 46.02     | 6.23     | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5dB), such as OFDM according to KDB 865664.



## 9 Normal and Maximum Output Power

KDB 447498 D01 at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

### 9.3 GSM Mode

#### WWAN Antenna Down & WWAN Antenna Up

| GSM 850                                                                                                                                                                                                                                                                         |            | Burst-Averaged output power(dBm) |                       |            |             | Division Factors | Frame-Averaged output power(dBm) |                       |              |              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------|-----------------------|------------|-------------|------------------|----------------------------------|-----------------------|--------------|--------------|
|                                                                                                                                                                                                                                                                                 |            | Tune-up                          | Channel/Frenqucy(MHz) |            |             |                  | Tune-up                          | Channel/Frenqucy(MHz) |              |              |
|                                                                                                                                                                                                                                                                                 |            | MAX                              | 128 /824.2            | 190 /836.6 | 251 /848.8  |                  | MAX                              | 128 /824.2            | 190 /836.6   | 251 /848.8   |
| GSM                                                                                                                                                                                                                                                                             | CS         | 33.30                            | 31.90                 | 32.24      | 32.56       | 9.03             | 24.27                            | 22.87                 | 23.21        | 23.53        |
| GPRS/EGPRS (GMSK)                                                                                                                                                                                                                                                               | 1 Tx Slot  | 33.30                            | 31.98                 | 32.33      | 32.57       | 9.03             | 24.27                            | 22.95                 | 23.30        | 23.54        |
|                                                                                                                                                                                                                                                                                 | 2 Tx Slots | 31.30                            | 29.56                 | 29.91      | 30.20       | 6.02             | 25.28                            | 23.54                 | 23.89        | 24.18        |
|                                                                                                                                                                                                                                                                                 | 3 Tx Slots | 30.30                            | 28.51                 | 28.89      | 29.19       | 4.26             | 26.04                            | 24.25                 | 24.63        | 24.93        |
|                                                                                                                                                                                                                                                                                 | 4 Tx Slots | 29.30                            | 27.51                 | 27.93      | 28.19       | 3.01             | <b>26.29</b>                     | <b>24.50</b>          | <b>24.92</b> | <b>25.18</b> |
| EGPRS (8PSK)                                                                                                                                                                                                                                                                    | 1 Tx Slot  | 30.80                            | 29.21                 | 29.68      | 29.77       | 9.03             | 21.77                            | 20.18                 | 20.65        | 20.74        |
|                                                                                                                                                                                                                                                                                 | 2 Tx Slots | 28.30                            | 26.46                 | 26.71      | 27.24       | 6.02             | 22.28                            | 20.44                 | 20.69        | 21.22        |
|                                                                                                                                                                                                                                                                                 | 3 Tx Slots | 26.80                            | 25.35                 | 25.58      | 26.10       | 4.26             | 22.54                            | 21.09                 | 21.32        | 21.84        |
|                                                                                                                                                                                                                                                                                 | 4 Tx Slots | 25.80                            | 24.06                 | 24.37      | 24.74       | 3.01             | 22.79                            | 21.05                 | 21.36        | 21.73        |
| GSM 1900                                                                                                                                                                                                                                                                        |            | Burst-Averaged output power(dBm) |                       |            |             | Division Factors | Frame-Averaged output power(dBm) |                       |              |              |
|                                                                                                                                                                                                                                                                                 |            | Tune-up                          | Channel/Frenqucy(MHz) |            |             |                  | Tune-up                          | Channel/Frenqucy(MHz) |              |              |
|                                                                                                                                                                                                                                                                                 |            | MAX                              | 512 /1850.2           | 661 /1880  | 810 /1909.8 |                  | MAX                              | 512 /1850.2           | 661 /1880    | 810 /1909.8  |
| GSM                                                                                                                                                                                                                                                                             | CS         | 30.30                            | 29.28                 | 29.22      | 29.19       | 9.03             | 21.27                            | 20.25                 | 20.19        | 20.16        |
| GPRS/EGPRS (GMSK)                                                                                                                                                                                                                                                               | 1 Tx Slot  | 30.30                            | 29.29                 | 29.21      | 29.21       | 9.03             | 21.27                            | 20.26                 | 20.18        | 20.18        |
|                                                                                                                                                                                                                                                                                 | 2 Tx Slots | 28.30                            | 27.07                 | 26.97      | 26.92       | 6.02             | 22.28                            | 21.05                 | 20.95        | 20.90        |
|                                                                                                                                                                                                                                                                                 | 3 Tx Slots | 27.30                            | 26.07                 | 25.95      | 25.90       | 4.26             | 23.04                            | 21.81                 | 21.69        | 21.64        |
|                                                                                                                                                                                                                                                                                 | 4 Tx Slots | 26.30                            | 25.05                 | 24.93      | 24.88       | 3.01             | <b>23.29</b>                     | <b>22.04</b>          | <b>21.92</b> | <b>21.87</b> |
| EGPRS (8PSK)                                                                                                                                                                                                                                                                    | 1 Tx Slot  | 28.30                            | 27.64                 | 27.54      | 27.41       | 9.03             | 19.27                            | 18.61                 | 18.51        | 18.38        |
|                                                                                                                                                                                                                                                                                 | 2 Tx Slots | 26.30                            | 26.01                 | 25.96      | 25.99       | 6.02             | 20.28                            | 19.99                 | 19.94        | 19.97        |
|                                                                                                                                                                                                                                                                                 | 3 Tx Slots | 25.30                            | 24.84                 | 24.80      | 24.71       | 4.26             | 21.04                            | 20.58                 | 20.54        | 20.45        |
|                                                                                                                                                                                                                                                                                 | 4 Tx Slots | 24.30                            | 23.87                 | 23.77      | 23.57       | 3.01             | 21.29                            | 20.86                 | 20.76        | 20.56        |
| Notes:The worst-case configuration and mode for SAR testing is determined to be as follows:<br>1. Standalone: GSM 850 GMSK (GPRS) mode with 4 time slots for Max power, GSM 1900 GMSK (GPRS) mode with 4 time slots for Max power,based on the output power measurements above. |            |                                  |                       |            |             |                  |                                  |                       |              |              |



## WWAN Antenna Up

| GSM 850<br>head(WWAN+2.4G/<br>5G) |            | Burst-Averaged output power(dBm) |                       |               |               | Division<br>Factors | Frame-Averaged output power(dBm) |                       |               |               |
|-----------------------------------|------------|----------------------------------|-----------------------|---------------|---------------|---------------------|----------------------------------|-----------------------|---------------|---------------|
|                                   |            | Tune-up                          | Channel/Frenqucy(MHz) |               |               |                     | Tune-up                          | Channel/Frenqucy(MHz) |               |               |
|                                   |            | MAX                              | 128<br>/824.2         | 190<br>/836.6 | 251<br>/848.8 |                     | MAX                              | 128<br>/824.2         | 190<br>/836.6 | 251<br>/848.8 |
| GSM                               | CS         | 30.30                            | 29.87                 | 30.04         | 30.10         | 9.03                | 21.27                            | 20.84                 | 21.01         | 21.07         |
| GPRS/<br>EGPRS<br>(GMSK)          | 1 Tx Slot  | 30.30                            | 29.86                 | 30.02         | 30.10         | 9.03                | 21.27                            | 20.83                 | 20.99         | 21.07         |
|                                   | 2 Tx Slots | 27.30                            | 26.82                 | 26.98         | 27.05         | 6.02                | 21.28                            | 20.80                 | 20.96         | 21.03         |
|                                   | 3 Tx Slots | 25.80                            | 25.08                 | 25.27         | 25.34         | 4.26                | 21.54                            | 20.82                 | 21.01         | 21.08         |
|                                   | 4 Tx Slots | 24.80                            | 23.82                 | 24.03         | 24.11         | 3.01                | <b>21.79</b>                     | <b>20.81</b>          | <b>21.02</b>  | <b>21.10</b>  |
| EGPRS<br>(8PSK)                   | 1 Tx Slot  | 24.30                            | 23.58                 | 23.97         | 24.14         | 9.03                | 15.27                            | 14.55                 | 14.94         | 15.11         |
|                                   | 2 Tx Slots | 21.30                            | 20.40                 | 20.64         | 21.01         | 6.02                | 15.28                            | 14.38                 | 14.62         | 14.99         |
|                                   | 3 Tx Slots | 19.30                            | 18.37                 | 18.67         | 18.93         | 4.26                | 15.04                            | 14.11                 | 14.41         | 14.67         |
|                                   | 4 Tx Slots | 17.80                            | 17.03                 | 17.32         | 17.50         | 3.01                | 14.79                            | 14.02                 | 14.31         | 14.49         |

Notes: The worst-case configuration and mode for SAR testing is determined to be as follows:

1. Standalone: GSM 850 GMSK (GPRS) mode with 4 time slots for Max power, based on the output power measurements above.

| GSM 1900<br>head(standalone)       |            | Burst-Averaged output power(dBm) |                       |              |                | Division<br>Factors | Frame-Averaged output power(dBm) |                       |              |                |
|------------------------------------|------------|----------------------------------|-----------------------|--------------|----------------|---------------------|----------------------------------|-----------------------|--------------|----------------|
|                                    |            | Tune-up                          | Channel/Frenqucy(MHz) |              |                |                     | Tune-up                          | Channel/Frenqucy(MHz) |              |                |
|                                    |            | MAX                              | 512<br>/1850.2        | 661<br>/1880 | 810<br>/1909.8 |                     | MAX                              | 512<br>/1850.2        | 661<br>/1880 | 810<br>/1909.8 |
| GSM                                | CS         | 25.80                            | 24.99                 | 24.95        | 24.97          | 9.03                | 16.77                            | 15.96                 | 15.92        | 15.94          |
| GPRS/<br>EGPRS<br>(GMSK)           | 1 Tx Slot  | 25.80                            | 24.98                 | 24.93        | 24.92          | 9.03                | 16.77                            | 15.95                 | 15.90        | 15.89          |
|                                    | 2 Tx Slots | 22.80                            | 21.94                 | 21.87        | 21.87          | 6.02                | 16.78                            | 15.92                 | 15.85        | 15.85          |
|                                    | 3 Tx Slots | 20.80                            | 20.17                 | 20.10        | 20.06          | 4.26                | 16.54                            | 15.91                 | 15.84        | 15.80          |
|                                    | 4 Tx Slots | 19.80                            | 18.90                 | 18.82        | 18.78          | 3.01                | <b>16.79</b>                     | <b>15.89</b>          | <b>15.81</b> | <b>15.77</b>   |
| EGPRS<br>(8PSK)                    | 1 Tx Slot  | 19.80                            | 18.48                 | 18.47        | 18.56          | 9.03                | 10.77                            | 9.45                  | 9.44         | 9.53           |
|                                    | 2 Tx Slots | 15.80                            | 15.17                 | 15.04        | 15.16          | 6.02                | 9.78                             | 9.15                  | 9.02         | 9.14           |
|                                    | 3 Tx Slots | 14.80                            | 13.17                 | 13.77        | 13.27          | 4.26                | 10.54                            | 8.91                  | 9.51         | 9.01           |
|                                    | 4 Tx Slots | 12.80                            | 11.79                 | 11.73        | 11.84          | 3.01                | 9.79                             | 8.78                  | 8.72         | 8.83           |
| GSM 1900<br>head(WWAN+2.4G/<br>5G) |            | Burst-Averaged output power(dBm) |                       |              |                | Division<br>Factors | Frame-Averaged output power(dBm) |                       |              |                |
|                                    |            | Tune-up                          | Channel/Frenqucy(MHz) |              |                |                     | Tune-up                          | Channel/Frenqucy(MHz) |              |                |
|                                    |            | MAX                              | 512<br>/1850.2        | 661<br>/1880 | 810<br>/1909.8 |                     | MAX                              | 512<br>/1850.2        | 661<br>/1880 | 810<br>/1909.8 |
| GSM                                | CS         | 23.80                            | 22.92                 | 22.88        | 22.90          | 9.03                | 14.77                            | 13.89                 | 13.85        | 13.87          |
| GPRS/<br>EGPRS<br>(GMSK)           | 1 Tx Slot  | 23.80                            | 22.92                 | 22.88        | 22.91          | 9.03                | 14.77                            | 13.89                 | 13.85        | 13.88          |
|                                    | 2 Tx Slots | 20.80                            | 19.89                 | 19.84        | 19.84          | 6.02                | 14.78                            | 13.87                 | 13.82        | 13.82          |
|                                    | 3 Tx Slots | 18.80                            | 18.11                 | 18.04        | 18.03          | 4.26                | 14.54                            | 13.85                 | 13.78        | 13.77          |
|                                    | 4 Tx Slots | 17.80                            | 16.85                 | 16.77        | 16.77          | 3.01                | <b>14.79</b>                     | <b>13.84</b>          | <b>13.76</b> | <b>13.76</b>   |
| EGPRS                              | 1 Tx Slot  | 18.80                            | 17.86                 | 17.96        | 18.03          | 9.03                | 9.77                             | 8.83                  | 8.93         | 9.00           |



|                                    |            |                                  |                       |              |                |                     |                                  |                       |              |                |
|------------------------------------|------------|----------------------------------|-----------------------|--------------|----------------|---------------------|----------------------------------|-----------------------|--------------|----------------|
| (8PSK)                             | 2 Tx Slots | 15.80                            | 15.52                 | 14.66        | 14.95          | 6.02                | 9.78                             | 9.50                  | 8.64         | 8.93           |
|                                    | 3 Tx Slots | 13.80                            | 12.47                 | 12.53        | 12.97          | 4.26                | 9.54                             | 8.21                  | 8.27         | 8.71           |
|                                    | 4 Tx Slots | 11.80                            | 11.04                 | 11.29        | 11.50          | 3.01                | 8.79                             | 8.03                  | 8.28         | 8.49           |
| GSM 1900<br>Body(standalone)       |            | Burst-Averaged output power(dBm) |                       |              |                | Division<br>Factors | Frame-Averaged output power(dBm) |                       |              |                |
|                                    |            | Tune-up                          | Channel/Frenqucy(MHz) |              |                |                     | Tune-up                          | Channel/Frenqucy(MHz) |              |                |
|                                    |            | MAX                              | 512<br>/1850.2        | 661<br>/1880 | 810<br>/1909.8 |                     | MAX                              | 512<br>/1850.2        | 661<br>/1880 | 810<br>/1909.8 |
| GSM                                | CS         | 29.30                            | 28.41                 | 28.40        | 28.41          | 9.03                | 20.27                            | 19.38                 | 19.37        | 19.38          |
| GPRS/<br>EGPRS<br>(GMSK)           | 1 Tx Slot  | 29.30                            | 28.42                 | 28.43        | 28.43          | 9.03                | 20.27                            | 19.39                 | 19.40        | 19.40          |
|                                    | 2 Tx Slots | 26.30                            | 25.38                 | 25.32        | 25.30          | 6.02                | 20.28                            | 19.36                 | 19.30        | 19.28          |
|                                    | 3 Tx Slots | 24.30                            | 23.61                 | 23.54        | 23.53          | 4.26                | 20.04                            | 19.35                 | 19.28        | 19.27          |
|                                    | 4 Tx Slots | 23.30                            | 22.39                 | 22.32        | 22.31          | 3.01                | <b>20.29</b>                     | <b>19.38</b>          | <b>19.31</b> | <b>19.30</b>   |
| EGPRS<br>(8PSK)                    | 1 Tx Slot  | 24.30                            | 23.18                 | 23.03        | 23.35          | 9.03                | 15.27                            | 14.15                 | 14.00        | 14.32          |
|                                    | 2 Tx Slots | 21.30                            | 20.08                 | 20.03        | 20.07          | 6.02                | 15.28                            | 14.06                 | 14.01        | 14.05          |
|                                    | 3 Tx Slots | 19.30                            | 18.08                 | 18.10        | 18.15          | 4.26                | 15.04                            | 13.82                 | 13.84        | 13.89          |
|                                    | 4 Tx Slots | 17.30                            | 16.50                 | 16.67        | 16.81          | 3.01                | 14.29                            | 13.49                 | 13.66        | 13.80          |
| GSM 1900<br>Body(WWAN+2.4G/<br>5G) |            | Burst-Averaged output power(dBm) |                       |              |                | Division<br>Factors | Frame-Averaged output power(dBm) |                       |              |                |
|                                    |            | Tune-up                          | Channel/Frenqucy(MHz) |              |                |                     | Tune-up                          | Channel/Frenqucy(MHz) |              |                |
|                                    |            | MAX                              | 512<br>/1850.2        | 661<br>/1880 | 810<br>/1909.8 |                     | MAX                              | 512<br>/1850.2        | 661<br>/1880 | 810<br>/1909.8 |
| GSM                                | CS         | 28.30                            | 27.46                 | 27.41        | 27.43          | 9.03                | 19.27                            | 18.43                 | 18.38        | 18.40          |
| GPRS/<br>EGPRS<br>(GMSK)           | 1 Tx Slot  | 28.30                            | 27.43                 | 27.39        | 27.40          | 9.03                | 19.27                            | 18.40                 | 18.36        | 18.37          |
|                                    | 2 Tx Slots | 25.30                            | 24.43                 | 24.36        | 24.37          | 6.02                | 19.28                            | 18.41                 | 18.34        | 18.35          |
|                                    | 3 Tx Slots | 23.30                            | 22.65                 | 22.57        | 22.59          | 4.26                | 19.04                            | 18.39                 | 18.31        | 18.33          |
|                                    | 4 Tx Slots | 22.30                            | 21.34                 | 21.28        | 21.25          | 3.01                | <b>19.29</b>                     | <b>18.33</b>          | <b>18.27</b> | <b>18.24</b>   |
| EGPRS<br>(8PSK)                    | 1 Tx Slot  | 23.30                            | 22.26                 | 22.44        | 22.48          | 9.03                | 14.27                            | 13.23                 | 13.41        | 13.45          |
|                                    | 2 Tx Slots | 20.30                            | 19.07                 | 19.11        | 19.05          | 6.02                | 14.28                            | 13.05                 | 13.09        | 13.03          |
|                                    | 3 Tx Slots | 18.30                            | 17.76                 | 17.12        | 17.29          | 4.26                | 14.04                            | 13.50                 | 12.86        | 13.03          |
|                                    | 4 Tx Slots | 16.30                            | 15.52                 | 16.26        | 15.84          | 3.01                | 13.29                            | 12.51                 | 13.25        | 12.83          |

Notes:The worst-case configuration and mode for SAR testing is determined to be as follows:

1. Standalone: GSM 1900 GMSK (GPRS) mode with 4 time slots for Max power, based on the output power measurements above.



## 9.4 WCDMA Mode

The following tests were completed according to the test requirements outlined in the 3GPP TS34.121 specification.

### WWAN Antenna Down & WWAN Antenna Up

| WCDMA          |          | Band II(dBm) |              |              |                  | Band IV(dBm) |              |              |                  | Band V(dBm)  |              |              |                  |
|----------------|----------|--------------|--------------|--------------|------------------|--------------|--------------|--------------|------------------|--------------|--------------|--------------|------------------|
| Tx Channel     |          | 9262         | 9400         | 9538         | Tune-up<br>Limit | 1312         | 1413         | 1513         | Tune-up<br>Limit | 4132         | 4183         | 4233         | Tune-up<br>Limit |
| Frequency(MHz) |          | 1852.4       | 1880         | 1907.6       |                  | 1712.4       | 1732.6       | 1752.6       |                  | 826.4        | 836.6        | 846.6        |                  |
| RMC            | 12.2kbps | <b>23.19</b> | <b>23.00</b> | <b>23.16</b> | <b>24.10</b>     | <b>22.83</b> | <b>22.96</b> | <b>23.00</b> | <b>24.10</b>     | <b>23.81</b> | <b>23.79</b> | <b>23.87</b> | <b>24.30</b>     |
| HSDPA          | Sub 1    | 22.98        | 22.85        | 23.01        | 23.10            | 22.86        | 23.04        | 23.03        | 23.10            | 22.80        | 22.84        | 22.91        | 23.30            |
|                | Sub 2    | 22.96        | 22.84        | 22.94        | 23.10            | 22.81        | 22.98        | 23.02        | 23.10            | 22.80        | 22.75        | 22.84        | 23.30            |
|                | Sub 3    | 22.52        | 22.32        | 22.45        | 22.60            | 22.34        | 22.50        | 22.49        | 22.60            | 22.27        | 22.26        | 22.34        | 22.80            |
|                | Sub 4    | 22.52        | 22.32        | 22.44        | 22.60            | 22.28        | 22.51        | 22.52        | 22.60            | 22.30        | 22.28        | 22.29        | 22.80            |
| HSUPA          | Sub 1    | 20.91        | 20.78        | 20.87        | 21.10            | 22.10        | 22.14        | 22.21        | 22.60            | 21.69        | 21.62        | 21.67        | 22.30            |
|                | Sub 2    | 19.97        | 19.73        | 19.89        | 20.10            | 22.06        | 22.15        | 22.19        | 22.60            | 21.69        | 21.68        | 21.71        | 22.30            |
|                | Sub 3    | 20.95        | 20.75        | 20.89        | 21.10            | 23.11        | 23.13        | 23.18        | 23.60            | 22.71        | 22.68        | 22.68        | 23.30            |
|                | Sub 4    | 19.44        | 19.23        | 19.36        | 20.10            | 21.59        | 21.63        | 21.72        | 22.10            | 21.21        | 21.22        | 21.23        | 21.80            |
|                | Sub 5    | 21.92        | 21.72        | 21.86        | 22.10            | 23.08        | 23.14        | 23.19        | 23.60            | 22.69        | 22.63        | 22.68        | 23.30            |

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

### WWAN Antenna Down

| WCDMA          |          | Band IV(dBm)     |              |              |                  |
|----------------|----------|------------------|--------------|--------------|------------------|
| Tx Channel     |          | Body(standalone) |              |              | Tune-up<br>Limit |
| Frequency(MHz) |          | 1312             | 1413         | 1513         |                  |
|                |          | 1712.4           | 1732.6       | 1752.6       | Limit            |
| RMC            | 12.2kbps | <b>21.59</b>     | <b>21.56</b> | <b>21.54</b> | <b>23.10</b>     |
| HSDPA          | Sub 1    | 21.82            | 21.59        | 21.66        | 22.10            |
|                | Sub 2    | 21.78            | 21.82        | 21.78        | 22.10            |
|                | Sub 3    | 21.37            | 21.35        | 21.12        | 21.60            |
|                | Sub 4    | 21.14            | 21.37        | 21.13        | 21.60            |
| HSUPA          | Sub 1    | 21.13            | 21.07        | 21.03        | 21.60            |
|                | Sub 2    | 20.83            | 20.73        | 20.81        | 21.10            |
|                | Sub 3    | 21.69            | 21.59        | 21.63        | 22.10            |
|                | Sub 4    | 20.27            | 20.31        | 20.33        | 20.60            |
|                | Sub 5    | 21.76            | 21.87        | 21.60        | 22.10            |

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

| WCDMA          |          | Band II(dBm)<br>Body(WWAN+2.4G/5G) |              |              |                  | Band IV(dBm)<br>Body(WWAN+2.4G/5G) |              |              |                   |
|----------------|----------|------------------------------------|--------------|--------------|------------------|------------------------------------|--------------|--------------|-------------------|
| Tx Channel     |          | 9262                               | 9400         | 9538         | Tune-up<br>Limit | 1312                               | 1413         | 1513         | Tune-u<br>p Limit |
| Frequency(MHz) |          | 1852.4                             | 1880         | 1907.6       |                  | 1712.4                             | 1732.6       | 1752.6       |                   |
| RMC            | 12.2kbps | <b>21.90</b>                       | <b>21.71</b> | <b>21.88</b> | <b>23.10</b>     | <b>20.54</b>                       | <b>20.52</b> | <b>20.58</b> | <b>22.10</b>      |
| HSDPA          | Sub 1    | 21.54                              | 21.34        | 21.51        | 23.10            | 20.47                              | 20.48        | 20.54        | 22.10             |
|                | Sub 2    | 21.38                              | 21.26        | 21.34        | 23.10            | 20.67                              | 20.69        | 20.51        | 22.10             |
|                | Sub 3    | 21.12                              | 20.81        | 20.89        | 22.60            | 20.00                              | 20.09        | 20.10        | 21.60             |
|                | Sub 4    | 21.04                              | 20.89        | 20.98        | 22.60            | 20.21                              | 20.08        | 20.06        | 21.60             |
| HSUPA          | Sub 1    | 19.78                              | 19.76        | 19.84        | 21.60            | 19.03                              | 19.10        | 18.81        | 20.60             |
|                | Sub 2    | 19.57                              | 19.22        | 19.36        | 21.10            | 18.54                              | 18.53        | 18.47        | 20.10             |
|                | Sub 3    | 20.61                              | 20.22        | 20.36        | 22.10            | 19.60                              | 19.69        | 19.61        | 21.10             |
|                | Sub 4    | 19.13                              | 18.76        | 19.03        | 20.60            | 18.09                              | 18.22        | 18.17        | 19.60             |
|                | Sub 5    | 20.56                              | 20.15        | 20.43        | 22.10            | 19.55                              | 19.60        | 19.55        | 21.10             |

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

#### WWAN Antenna Up

| WCDMA          |          | Band II(dBm)<br>head(standalone) |              |              |                  | Band IV(dBm)<br>head(standalone) |              |              |                   |
|----------------|----------|----------------------------------|--------------|--------------|------------------|----------------------------------|--------------|--------------|-------------------|
| Tx Channel     |          | 9262                             | 9400         | 9538         | Tune-up<br>Limit | 1312                             | 1413         | 1513         | Tune-u<br>p Limit |
| Frequency(MHz) |          | 1852.4                           | 1880         | 1907.6       |                  | 1712.4                           | 1732.6       | 1752.6       |                   |
| RMC            | 12.2kbps | <b>15.73</b>                     | <b>15.59</b> | <b>15.79</b> | <b>17.10</b>     | <b>16.21</b>                     | <b>15.88</b> | <b>15.95</b> | <b>17.60</b>      |
| HSDPA          | Sub 1    | 14.36                            | 14.29        | 14.27        | 15.10            | 15.81                            | 15.80        | 15.83        | 16.60             |
|                | Sub 2    | 14.13                            | 13.68        | 13.83        | 15.10            | 15.72                            | 15.56        | 15.67        | 16.60             |
|                | Sub 3    | 15.16                            | 14.72        | 15.01        | 15.60            | 15.19                            | 15.10        | 15.18        | 16.10             |
|                | Sub 4    | 13.51                            | 13.23        | 13.27        | 14.60            | 15.05                            | 15.17        | 15.29        | 16.10             |
| HSUPA          | Sub 1    | 15.11                            | 14.96        | 14.86        | 15.60            | 15.17                            | 14.93        | 15.01        | 16.10             |
|                | Sub 2    | 15.79                            | 15.82        | 15.99        | 16.80            | 14.45                            | 14.82        | 14.75        | 15.60             |
|                | Sub 3    | 16.06                            | 16.03        | 15.75        | 16.80            | 15.63                            | 15.68        | 15.49        | 16.60             |
|                | Sub 4    | 15.41                            | 15.32        | 15.27        | 15.80            | 14.20                            | 14.18        | 14.18        | 15.10             |
|                | Sub 5    | 15.53                            | 15.50        | 15.37        | 15.80            | 15.60                            | 15.37        | 15.75        | 16.60             |

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

| WCDMA                                                                                                                      |          | Band II(dBm)<br>Body(standalone) |              |              |                  | Band IV(dBm)<br>Body(standalone) |              |              |                   |
|----------------------------------------------------------------------------------------------------------------------------|----------|----------------------------------|--------------|--------------|------------------|----------------------------------|--------------|--------------|-------------------|
| Tx Channel                                                                                                                 |          | 9262                             | 9400         | 9538         | Tune-up<br>Limit | 1312                             | 1413         | 1513         | Tune-u<br>p Limit |
| Frequency(MHz)                                                                                                             |          | 1852.4                           | 1880         | 1907.6       |                  | 1712.4                           | 1732.6       | 1752.6       |                   |
| RMC                                                                                                                        | 12.2kbps | <b>18.14</b>                     | <b>18.02</b> | <b>18.23</b> | <b>19.10</b>     | <b>18.36</b>                     | <b>18.36</b> | <b>18.43</b> | <b>20.10</b>      |
| HSDPA                                                                                                                      | Sub 1    | 17.30                            | 17.11        | 17.02        | 18.10            | 18.28                            | 18.21        | 18.31        | 19.10             |
|                                                                                                                            | Sub 2    | 17.15                            | 17.18        | 17.01        | 18.10            | 17.97                            | 17.99        | 18.15        | 19.10             |
|                                                                                                                            | Sub 3    | 16.60                            | 16.79        | 16.55        | 17.60            | 17.64                            | 17.89        | 17.73        | 18.60             |
|                                                                                                                            | Sub 4    | 16.61                            | 16.28        | 16.58        | 17.60            | 17.68                            | 17.74        | 17.61        | 18.60             |
| HSUPA                                                                                                                      | Sub 1    | 16.45                            | 16.20        | 16.36        | 17.60            | 17.74                            | 17.49        | 17.41        | 18.60             |
|                                                                                                                            | Sub 2    | 16.26                            | 16.09        | 16.03        | 17.10            | 17.21                            | 17.18        | 16.96        | 18.10             |
|                                                                                                                            | Sub 3    | 17.10                            | 17.09        | 16.92        | 18.10            | 18.15                            | 18.06        | 18.14        | 19.10             |
|                                                                                                                            | Sub 4    | 15.75                            | 15.26        | 15.36        | 16.60            | 16.84                            | 16.47        | 16.45        | 17.60             |
|                                                                                                                            | Sub 5    | 17.09                            | 17.02        | 17.28        | 18.10            | 17.98                            | 18.25        | 17.93        | 19.10             |
| Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". |          |                                  |              |              |                  |                                  |              |              |                   |

| WCDMA                                                                                                                      |          | Band II(dBm)<br>head(WWAN+2.4G/5G) |              |              |                  | Band IV(dBm)<br>head(WWAN+2.4G/5G) |              |              |                   |
|----------------------------------------------------------------------------------------------------------------------------|----------|------------------------------------|--------------|--------------|------------------|------------------------------------|--------------|--------------|-------------------|
| Tx Channel                                                                                                                 |          | 9262                               | 9400         | 9538         | Tune-up<br>Limit | 1312                               | 1413         | 1513         | Tune-u<br>p Limit |
| Frequency(MHz)                                                                                                             |          | 1852.4                             | 1880         | 1907.6       |                  | 1712.4                             | 1732.6       | 1752.6       |                   |
| RMC                                                                                                                        | 12.2kbps | <b>12.63</b>                       | <b>12.53</b> | <b>12.72</b> | <b>14.10</b>     | <b>12.88</b>                       | <b>12.85</b> | <b>12.91</b> | <b>14.60</b>      |
| HSDPA                                                                                                                      | Sub 1    | 12.17                              | 11.82        | 12.05        | 13.10            | 12.70                              | 12.65        | 12.84        | 13.60             |
|                                                                                                                            | Sub 2    | 12.25                              | 12.01        | 12.13        | 13.10            | 12.45                              | 12.56        | 12.76        | 13.60             |
|                                                                                                                            | Sub 3    | 11.60                              | 11.61        | 11.51        | 12.60            | 12.26                              | 12.34        | 11.96        | 13.10             |
|                                                                                                                            | Sub 4    | 11.66                              | 11.77        | 11.44        | 12.60            | 12.18                              | 11.95        | 12.15        | 13.10             |
| HSUPA                                                                                                                      | Sub 1    | 11.52                              | 11.45        | 11.51        | 12.60            | 11.72                              | 12.12        | 12.00        | 13.10             |
|                                                                                                                            | Sub 2    | 11.10                              | 10.93        | 10.85        | 12.10            | 11.75                              | 11.40        | 11.52        | 12.60             |
|                                                                                                                            | Sub 3    | 11.91                              | 12.06        | 12.09        | 13.10            | 12.52                              | 12.84        | 12.76        | 13.60             |
|                                                                                                                            | Sub 4    | 10.44                              | 10.49        | 10.41        | 11.60            | 10.92                              | 11.13        | 11.26        | 12.10             |
|                                                                                                                            | Sub 5    | 12.12                              | 11.90        | 12.15        | 13.10            | 12.56                              | 12.61        | 12.73        | 13.60             |
| Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". |          |                                    |              |              |                  |                                    |              |              |                   |



| WCDMA                                                                                                                      |          | Band II(dBm)<br>Body(WWAN+2.4G/5G) |              |              |              | Band IV(dBm)<br>Body(WWAN+2.4G/5G) |              |              |              |
|----------------------------------------------------------------------------------------------------------------------------|----------|------------------------------------|--------------|--------------|--------------|------------------------------------|--------------|--------------|--------------|
| Tx Channel                                                                                                                 |          | 9262                               | 9400         | 9538         | Tune-up      | 1312                               | 1413         | 1513         | Tune-u       |
| Frequency(MHz)                                                                                                             |          | 1852.4                             | 1880         | 1907.6       | Limit        | 1712.4                             | 1732.6       | 1752.6       | p Limit      |
| RMC                                                                                                                        | 12.2kbps | <b>17.64</b>                       | <b>17.53</b> | <b>17.79</b> | <b>18.60</b> | <b>18.12</b>                       | <b>18.17</b> | <b>18.14</b> | <b>19.60</b> |
| HSDPA                                                                                                                      | Sub 1    | 16.69                              | 16.34        | 16.60        | 17.60        | 17.82                              | 17.62        | 17.95        | 18.60        |
|                                                                                                                            | Sub 2    | 16.63                              | 16.66        | 16.62        | 17.60        | 17.80                              | 17.59        | 17.77        | 18.60        |
|                                                                                                                            | Sub 3    | 16.26                              | 16.01        | 16.08        | 17.10        | 17.35                              | 17.20        | 17.22        | 18.10        |
|                                                                                                                            | Sub 4    | 15.94                              | 16.05        | 16.29        | 17.10        | 17.14                              | 17.13        | 17.19        | 18.10        |
| HSUPA                                                                                                                      | Sub 1    | 16.03                              | 15.84        | 15.73        | 17.10        | 16.87                              | 17.12        | 16.95        | 18.10        |
|                                                                                                                            | Sub 2    | 15.86                              | 15.71        | 15.57        | 16.60        | 16.83                              | 16.47        | 16.53        | 17.60        |
|                                                                                                                            | Sub 3    | 16.65                              | 16.49        | 16.69        | 17.60        | 17.45                              | 17.47        | 17.60        | 18.60        |
|                                                                                                                            | Sub 4    | 15.02                              | 15.04        | 15.05        | 16.10        | 16.27                              | 16.07        | 15.98        | 17.10        |
|                                                                                                                            | Sub 5    | 16.45                              | 16.39        | 16.45        | 17.60        | 17.55                              | 17.77        | 17.65        | 18.60        |
| Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". |          |                                    |              |              |              |                                    |              |              |              |

## 9.5 LTE Mode

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

| Modulation | Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> ) |         |       |        |        |        | MPR (dB) |
|------------|---------------------------------------------------------------|---------|-------|--------|--------|--------|----------|
|            | 1.4 MHz                                                       | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz |          |
| QPSK       | > 5                                                           | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 1      |
| 16 QAM     | ≤ 5                                                           | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |
| 16 QAM     | > 5                                                           | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 2      |

### WWAN Antenna Down & WWAN Antenna Up

| LTE FDD Band 2 |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|----------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                |            |         |           | 18607/1850.7            | 18900/1880 | 19193/1909.3 |                  |
| 1.4MHz         | QPSK       | 1       | 0         | 22.81                   | 22.84      | 22.77        | 23.80            |
|                |            | 1       | 2         | 22.89                   | 22.92      | 22.82        | 23.80            |
|                |            | 1       | 5         | 22.87                   | 22.86      | 22.83        | 23.80            |
|                |            | 3       | 0         | 22.99                   | 23.00      | 22.95        | 23.80            |
|                |            | 3       | 2         | 23.05                   | 23.02      | 22.98        | 23.80            |
|                |            | 3       | 3         | 23.01                   | 23.00      | 22.99        | 23.80            |
|                |            | 6       | 0         | 21.41                   | 21.63      | 21.51        | 22.80            |
|                | 16QAM      | 1       | 0         | 21.27                   | 21.81      | 21.25        | 22.80            |
|                |            | 1       | 2         | 21.49                   | 21.73      | 21.44        | 22.80            |
|                |            | 1       | 5         | 21.47                   | 21.66      | 21.46        | 22.80            |
|                |            | 3       | 0         | 21.57                   | 21.89      | 21.64        | 22.80            |
|                |            | 3       | 2         | 21.45                   | 21.85      | 21.68        | 22.80            |
|                |            | 3       | 3         | 21.66                   | 21.73      | 21.57        | 22.80            |
|                |            | 6       | 0         | 20.62                   | 20.48      | 20.72        | 21.80            |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                |            |         |           | 18615/1851.5            | 18900/1880 | 19185/1908.5 |                  |
| 3MHz           | QPSK       | 1       | 0         | 22.71                   | 22.94      | 22.85        | 23.80            |
|                |            | 1       | 7         | 22.96                   | 22.99      | 23.01        | 23.80            |
|                |            | 1       | 14        | 22.95                   | 23.01      | 23.05        | 23.80            |
|                |            | 8       | 0         | 21.74                   | 21.66      | 21.64        | 22.80            |
|                |            | 8       | 4         | 21.62                   | 21.71      | 21.56        | 22.80            |
|                |            | 8       | 7         | 21.43                   | 21.72      | 21.73        | 22.80            |
|                |            | 15      | 0         | 21.60                   | 21.65      | 21.50        | 22.80            |
|                | 16QAM      | 1       | 0         | 21.08                   | 21.84      | 21.32        | 22.80            |
|                |            | 1       | 7         | 21.38                   | 21.86      | 21.34        | 22.80            |
|                |            | 1       | 14        | 21.26                   | 21.66      | 21.17        | 22.80            |
|                |            | 8       | 0         | 20.72                   | 20.56      | 20.66        | 21.80            |



|           |            | 8       | 4         | 20.83                   | 20.76      | 20.68        | 21.80         |
|-----------|------------|---------|-----------|-------------------------|------------|--------------|---------------|
|           |            | 8       | 7         | 20.44                   | 20.75      | 20.41        | 21.80         |
|           |            | 15      | 0         | 20.48                   | 20.53      | 20.42        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18625/1852.5            | 18900/1880 | 19175/1907.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 22.87                   | 23.00      | 22.82        | 23.80         |
|           |            | 1       | 13        | 22.87                   | 23.01      | 23.13        | 23.80         |
|           |            | 1       | 24        | 22.79                   | 22.86      | 23.02        | 23.80         |
|           |            | 12      | 0         | 21.56                   | 21.62      | 21.59        | 22.80         |
|           |            | 12      | 6         | 21.62                   | 21.65      | 21.62        | 22.80         |
|           |            | 12      | 13        | 21.54                   | 21.57      | 21.55        | 22.80         |
|           |            | 25      | 0         | 21.64                   | 21.69      | 21.46        | 22.80         |
|           | 16QAM      | 1       | 0         | 21.72                   | 22.26      | 21.81        | 22.80         |
|           |            | 1       | 13        | 21.79                   | 22.16      | 21.66        | 22.80         |
|           |            | 1       | 24        | 21.81                   | 22.15      | 21.69        | 22.80         |
|           |            | 12      | 0         | 20.70                   | 20.87      | 20.64        | 21.80         |
|           |            | 12      | 6         | 20.57                   | 20.97      | 20.64        | 21.80         |
|           |            | 12      | 13        | 20.56                   | 20.80      | 20.58        | 21.80         |
|           |            | 25      | 0         | 20.64                   | 20.85      | 20.58        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18650/1855              | 18900/1880 | 19150/1905   |               |
| 10MHz     | QPSK       | 1       | 0         | 22.97                   | 22.91      | 22.88        | 23.80         |
|           |            | 1       | 25        | 22.75                   | 23.19      | 23.24        | 23.80         |
|           |            | 1       | 49        | 22.88                   | 22.99      | 23.17        | 23.80         |
|           |            | 25      | 0         | 21.70                   | 21.79      | 21.58        | 22.80         |
|           |            | 25      | 13        | 21.79                   | 21.82      | 21.69        | 22.80         |
|           |            | 25      | 25        | 21.53                   | 21.61      | 21.56        | 22.80         |
|           |            | 50      | 0         | 21.64                   | 21.59      | 21.58        | 22.80         |
|           | 16QAM      | 1       | 0         | 21.64                   | 22.14      | 21.68        | 22.80         |
|           |            | 1       | 25        | 21.66                   | 22.21      | 21.63        | 22.80         |
|           |            | 1       | 49        | 21.51                   | 22.06      | 21.65        | 22.80         |
|           |            | 25      | 0         | 20.58                   | 20.53      | 20.84        | 21.80         |
|           |            | 25      | 13        | 20.58                   | 20.94      | 20.65        | 21.80         |
|           |            | 25      | 25        | 20.70                   | 20.89      | 20.84        | 21.80         |
|           |            | 50      | 0         | 20.55                   | 20.61      | 20.67        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18675/1857.5            | 18900/1880 | 19125/1902.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 22.77                   | 23.06      | 22.84        | 23.80         |
|           |            | 1       | 38        | 22.83                   | 23.00      | 23.19        | 23.80         |
|           |            | 1       | 74        | 22.78                   | 22.90      | 23.21        | 23.80         |
|           |            | 36      | 0         | 21.50                   | 21.70      | 21.54        | 22.80         |
|           |            | 36      | 18        | 21.62                   | 21.71      | 21.75        | 22.80         |
|           |            | 36      | 39        | 21.43                   | 21.74      | 21.54        | 22.80         |



|           | 16QAM      | 75      | 0         | 21.66                   | 21.62        | 21.48        | 22.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 1       | 0         | 21.43                   | 21.96        | 22.32        | 22.80         |
|           |            | 1       | 38        | 21.72                   | 22.05        | 22.23        | 22.80         |
|           |            | 1       | 74        | 21.60                   | 22.00        | 21.78        | 22.80         |
|           |            | 36      | 0         | 20.51                   | 20.60        | 20.68        | 21.80         |
|           |            | 36      | 18        | 20.53                   | 20.65        | 20.65        | 21.80         |
|           |            | 36      | 39        | 20.56                   | 20.70        | 20.55        | 21.80         |
|           |            | 75      | 0         | 20.53                   | 20.73        | 20.75        | 21.80         |
|           |            | 75      | 0         | 20.53                   | 20.73        | 20.75        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 18700/1860              | 18900/1880   | 19100/1900   |               |
| 20MHz     | QPSK       | 1       | 0         | 22.75                   | 23.12        | 22.92        | 23.80         |
|           |            | 1       | 50        | <b>22.88</b>            | <b>23.15</b> | <b>23.23</b> | 23.80         |
|           |            | 1       | 99        | 22.73                   | 22.92        | 23.04        | 23.80         |
|           |            | 50      | 0         | 21.46                   | 21.55        | 21.71        | 22.80         |
|           |            | 50      | 25        | <b>21.73</b>            | <b>21.65</b> | <b>21.79</b> | 22.80         |
|           |            | 50      | 50        | 21.39                   | 21.61        | 21.65        | 22.80         |
|           |            | 100     | 0         | 21.54                   | 21.53        | <b>21.57</b> | 22.80         |
|           |            | 100     | 0         | 21.54                   | 21.53        | <b>21.57</b> | 22.80         |
|           | 16QAM      | 1       | 0         | 22.27                   | 22.25        | 22.08        | 22.80         |
|           |            | 1       | 50        | 22.22                   | 22.13        | 22.13        | 22.80         |
|           |            | 1       | 99        | 21.98                   | 22.06        | 21.95        | 22.80         |
|           |            | 50      | 0         | 20.67                   | 20.77        | 20.94        | 21.80         |
|           |            | 50      | 25        | 20.90                   | 20.72        | 20.85        | 21.80         |
|           |            | 50      | 50        | 20.74                   | 20.81        | 20.75        | 21.80         |
|           |            | 100     | 0         | 20.70                   | 20.69        | 20.84        | 21.80         |
|           |            | 100     | 0         | 20.70                   | 20.69        | 20.84        | 21.80         |

| LTE FDD Band 4 |            |         |           | Conducted Power(dBm)    |              |              | Tune-up Limit |
|----------------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              |               |
|                |            |         |           | 19957/1710.7            | 20175/1732.5 | 20393/1754.3 |               |
| 1.4MHz         | QPSK       | 1       | 0         | 22.79                   | 22.86        | 22.74        | 23.80         |
|                |            | 1       | 2         | 22.95                   | 22.83        | 22.87        | 23.80         |
|                |            | 1       | 5         | 22.73                   | 22.66        | 23.07        | 23.80         |
|                |            | 3       | 0         | 22.80                   | 22.79        | 22.98        | 23.80         |
|                |            | 3       | 2         | 23.03                   | 22.76        | 22.94        | 23.80         |
|                |            | 3       | 3         | 22.85                   | 22.92        | 23.13        | 23.80         |
|                |            | 6       | 0         | 21.61                   | 21.50        | 21.73        | 22.80         |
|                | 16QAM      | 1       | 0         | 21.64                   | 21.85        | 21.85        | 22.80         |
|                |            | 1       | 2         | 21.86                   | 21.95        | 21.71        | 22.80         |
|                |            | 1       | 5         | 21.75                   | 21.86        | 21.84        | 22.80         |
|                |            | 3       | 0         | 21.63                   | 21.90        | 21.94        | 22.80         |
|                |            | 3       | 2         | 21.93                   | 21.73        | 22.11        | 22.80         |
|                |            | 3       | 3         | 21.91                   | 21.87        | 21.93        | 22.80         |
|                |            | 6       | 0         | 20.87                   | 20.72        | 21.18        | 21.80         |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up       |



|           |            |         |           | 19965/1711.5            | 20175/1732.5 | 20385/1753.5 | Limit         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
| 3MHz      | QPSK       | 1       | 0         | 22.62                   | 22.68        | 22.78        | 23.80         |
|           |            | 1       | 7         | 22.62                   | 22.59        | 22.86        | 23.80         |
|           |            | 1       | 14        | 22.56                   | 22.80        | 22.62        | 23.80         |
|           |            | 8       | 0         | 21.60                   | 21.39        | 21.35        | 22.80         |
|           |            | 8       | 4         | 21.52                   | 21.45        | 21.62        | 22.80         |
|           |            | 8       | 7         | 21.46                   | 21.41        | 21.38        | 22.80         |
|           |            | 15      | 0         | 21.49                   | 21.33        | 21.55        | 22.80         |
|           | 16QAM      | 1       | 0         | 21.34                   | 21.91        | 21.72        | 22.80         |
|           |            | 1       | 7         | 21.61                   | 21.94        | 21.59        | 22.80         |
|           |            | 1       | 14        | 21.27                   | 21.76        | 21.71        | 22.80         |
|           |            | 8       | 0         | 20.95                   | 20.90        | 20.76        | 21.80         |
|           |            | 8       | 4         | 20.99                   | 20.87        | 21.05        | 21.80         |
|           |            | 8       | 7         | 20.75                   | 20.72        | 20.79        | 21.80         |
|           |            | 15      | 0         | 20.68                   | 20.75        | 20.85        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 19975/1712.5            | 20175/1732.5 | 20375/1752.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 22.85                   | 22.92        | 22.98        | 23.80         |
|           |            | 1       | 13        | 22.90                   | 23.00        | 23.03        | 23.80         |
|           |            | 1       | 24        | 23.02                   | 22.79        | 22.99        | 23.80         |
|           |            | 12      | 0         | 21.56                   | 21.42        | 21.59        | 22.80         |
|           |            | 12      | 6         | 21.55                   | 21.53        | 21.65        | 22.80         |
|           |            | 12      | 13        | 21.37                   | 21.49        | 21.56        | 22.80         |
|           |            | 25      | 0         | 21.59                   | 21.56        | 21.49        | 22.80         |
|           | 16QAM      | 1       | 0         | 22.07                   | 22.18        | 22.05        | 22.80         |
|           |            | 1       | 13        | 22.22                   | 22.44        | 21.88        | 22.80         |
|           |            | 1       | 24        | 22.01                   | 22.21        | 21.81        | 22.80         |
|           |            | 12      | 0         | 20.95                   | 20.95        | 21.02        | 21.80         |
|           |            | 12      | 6         | 21.09                   | 21.02        | 21.03        | 21.80         |
|           |            | 12      | 13        | 21.01                   | 20.78        | 20.89        | 21.80         |
|           |            | 25      | 0         | 20.85                   | 20.87        | 21.02        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20000/1715              | 20175/1732.5 | 20350/1750   |               |
| 10MHz     | QPSK       | 1       | 0         | 22.91                   | 23.18        | 22.96        | 23.80         |
|           |            | 1       | 25        | 23.13                   | 23.11        | 22.99        | 23.80         |
|           |            | 1       | 49        | 22.88                   | 23.10        | 23.12        | 23.80         |
|           |            | 25      | 0         | 21.49                   | 21.40        | 21.48        | 22.80         |
|           |            | 25      | 13        | 21.51                   | 21.52        | 21.67        | 22.80         |
|           |            | 25      | 25        | 21.63                   | 21.50        | 21.48        | 22.80         |
|           |            | 50      | 0         | 21.52                   | 21.57        | 21.57        | 22.80         |
|           | 16QAM      | 1       | 0         | 21.91                   | 22.21        | 21.90        | 22.80         |
|           |            | 1       | 25        | 21.96                   | 22.29        | 21.98        | 22.80         |
|           |            | 1       | 49        | 21.81                   | 22.31        | 21.86        | 22.80         |



|           |            | 25      | 0         | 21.07                   | 20.62        | 20.93        | 21.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 25      | 13        | 20.84                   | 20.99        | 20.98        | 21.80         |
|           |            | 25      | 25        | 20.96                   | 20.73        | 21.00        | 21.80         |
|           |            | 50      | 0         | 21.04                   | 20.90        | 20.86        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20025/1717.5            | 20175/1732.5 | 20325/1747.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 22.94                   | 23.09        | 23.09        | 23.80         |
|           |            | 1       | 38        | 23.02                   | 23.17        | 23.09        | 23.80         |
|           |            | 1       | 74        | 23.06                   | 22.93        | 23.07        | 23.80         |
|           |            | 36      | 0         | 21.62                   | 21.37        | 21.56        | 22.80         |
|           |            | 36      | 18        | 21.60                   | 21.60        | 21.72        | 22.80         |
|           |            | 36      | 39        | 21.63                   | 21.40        | 21.49        | 22.80         |
|           |            | 75      | 0         | 21.58                   | 21.38        | 21.70        | 22.80         |
|           | 16QAM      | 1       | 0         | 21.67                   | 22.26        | 22.34        | 22.80         |
|           |            | 1       | 38        | 21.96                   | 22.23        | 22.36        | 22.80         |
|           |            | 1       | 74        | 21.81                   | 21.99        | 22.18        | 22.80         |
|           |            | 36      | 0         | 20.84                   | 20.67        | 20.83        | 21.80         |
|           |            | 36      | 18        | 20.84                   | 20.73        | 20.98        | 21.80         |
|           |            | 36      | 39        | 21.02                   | 20.74        | 20.70        | 21.80         |
|           |            | 75      | 0         | 20.91                   | 20.69        | 21.01        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20050/1720              | 20175/1732.5 | 20300/1745   |               |
| 20MHz     | QPSK       | 1       | 0         | <b>23.18</b>            | 22.92        | 23.04        | 23.80         |
|           |            | 1       | 50        | 22.98                   | <b>23.16</b> | <b>23.09</b> | 23.80         |
|           |            | 1       | 99        | 23.05                   | 23.00        | 23.06        | 23.80         |
|           |            | 50      | 0         | 21.65                   | 21.53        | <b>21.79</b> | 22.80         |
|           |            | 50      | 25        | 21.69                   | 21.53        | 21.53        | 22.80         |
|           |            | 50      | 50        | <b>21.70</b>            | <b>21.65</b> | 21.53        | 22.80         |
|           |            | 100     | 0         | <b>21.78</b>            | 21.31        | 21.64        | 22.80         |
|           | 16QAM      | 1       | 0         | 22.41                   | 22.28        | 22.22        | 22.80         |
|           |            | 1       | 50        | 22.42                   | 22.34        | 22.35        | 22.80         |
|           |            | 1       | 99        | 22.34                   | 22.28        | 22.07        | 22.80         |
|           |            | 50      | 0         | 21.08                   | 20.65        | 20.97        | 21.80         |
|           |            | 50      | 25        | 20.95                   | 20.90        | 20.79        | 21.80         |
|           |            | 50      | 50        | 21.11                   | 20.88        | 20.80        | 21.80         |
|           |            | 100     | 0         | 20.97                   | 20.91        | 20.90        | 21.80         |

| LTE FDD Band 5 |            |         |           | Conducted Power(dBm)    |             |             | Tune-up<br>Limit |
|----------------|------------|---------|-----------|-------------------------|-------------|-------------|------------------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             |                  |
|                |            |         |           | 20407/824.7             | 20525/836.5 | 20643/848.3 |                  |
| 1.4MHz         | QPSK       | 1       | 0         | 23.32                   | 23.40       | 23.37       | 24.30            |
|                |            | 1       | 2         | 23.27                   | 23.46       | 23.42       | 24.30            |



|           |            | 1       | 5         | 23.26                   | 23.45       | 23.37       | 24.30         |
|-----------|------------|---------|-----------|-------------------------|-------------|-------------|---------------|
|           |            | 3       | 0         | 23.44                   | 23.52       | 23.46       | 24.30         |
|           |            | 3       | 2         | 23.43                   | 23.57       | 23.51       | 24.30         |
|           |            | 3       | 3         | 23.31                   | 23.54       | 23.42       | 24.30         |
|           |            | 6       | 0         | 21.93                   | 22.07       | 22.02       | 23.30         |
|           | 16QAM      | 1       | 0         | 21.94                   | 22.39       | 21.91       | 23.30         |
|           |            | 1       | 2         | 21.97                   | 22.29       | 21.95       | 23.30         |
|           |            | 1       | 5         | 21.90                   | 22.26       | 21.90       | 23.30         |
|           |            | 3       | 0         | 21.96                   | 22.27       | 22.16       | 23.30         |
|           |            | 3       | 2         | 21.99                   | 22.24       | 22.20       | 23.30         |
|           |            | 3       | 3         | 21.99                   | 22.26       | 22.17       | 23.30         |
|           |            | 6       | 0         | 21.14                   | 20.97       | 21.23       | 22.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             | Tune-up Limit |
|           |            |         |           | 20415/825.5             | 20525/836.5 | 20635/847.5 |               |
| 3MHz      | QPSK       | 1       | 0         | 22.63                   | 23.34       | 23.11       | 24.30         |
|           |            | 1       | 7         | 23.22                   | 23.39       | 23.36       | 24.30         |
|           |            | 1       | 14        | 22.46                   | 23.16       | 22.72       | 24.30         |
|           |            | 8       | 0         | 21.92                   | 22.03       | 22.02       | 23.30         |
|           |            | 8       | 4         | 21.90                   | 22.13       | 22.01       | 23.30         |
|           |            | 8       | 7         | 21.80                   | 22.01       | 21.96       | 23.30         |
|           |            | 15      | 0         | 21.83                   | 21.99       | 22.03       | 23.30         |
|           | 16QAM      | 1       | 0         | 21.68                   | 22.26       | 21.87       | 23.30         |
|           |            | 1       | 7         | 21.68                   | 22.36       | 21.93       | 23.30         |
|           |            | 1       | 14        | 21.55                   | 22.24       | 21.80       | 23.30         |
|           |            | 8       | 0         | 21.05                   | 21.20       | 21.04       | 22.30         |
|           |            | 8       | 4         | 21.01                   | 21.21       | 21.12       | 22.30         |
|           |            | 8       | 7         | 20.94                   | 21.12       | 20.99       | 22.30         |
|           |            | 15      | 0         | 20.94                   | 21.08       | 20.94       | 22.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             | Tune-up Limit |
|           |            |         |           | 20425/826.5             | 20525/836.5 | 20625/846.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 23.44                   | 23.61       | 23.55       | 24.30         |
|           |            | 1       | 13        | 23.55                   | 23.73       | 23.64       | 24.30         |
|           |            | 1       | 24        | 23.48                   | 23.63       | 23.50       | 24.30         |
|           |            | 12      | 0         | 21.97                   | 22.10       | 22.08       | 23.30         |
|           |            | 12      | 6         | 21.97                   | 22.16       | 22.10       | 23.30         |
|           |            | 12      | 13        | 21.95                   | 22.07       | 22.01       | 23.30         |
|           |            | 25      | 0         | 21.97                   | 22.12       | 22.07       | 23.30         |
|           | 16QAM      | 1       | 0         | 22.11                   | 22.61       | 22.26       | 23.30         |
|           |            | 1       | 13        | 22.18                   | 22.72       | 22.26       | 23.30         |
|           |            | 1       | 24        | 22.12                   | 22.59       | 22.18       | 23.30         |
|           |            | 12      | 0         | 21.09                   | 21.29       | 21.18       | 22.30         |
|           |            | 12      | 6         | 21.15                   | 21.36       | 21.21       | 22.30         |
|           |            | 12      | 13        | 21.10                   | 21.29       | 21.04       | 22.30         |



| Bandwidth | Modulation | 25      | 0         | 21.07                   | 21.26        | 21.08        | 22.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20450/829               | 20525/836.5  | 20600/844    |               |
| 10MHz     | QPSK       | 1       | 0         | 23.23                   | 23.66        | 23.64        | 24.30         |
|           |            | 1       | 25        | 23.51                   | 23.65        | <b>23.67</b> | 24.30         |
|           |            | 1       | 49        | <b>23.64</b>            | <b>23.69</b> | 23.53        | 24.30         |
|           |            | 25      | 0         | 21.87                   | 22.06        | 22.14        | 23.30         |
|           |            | 25      | 13        | 22.09                   | <b>22.22</b> | <b>22.20</b> | 23.30         |
|           |            | 25      | 25        | <b>22.18</b>            | 22.13        | 21.99        | 23.30         |
|           |            | 50      | 0         | <b>22.13</b>            | 22.03        | 22.11        | 23.30         |
|           | 16QAM      | 1       | 0         | 22.00                   | 22.60        | 22.18        | 23.30         |
|           |            | 1       | 25        | 21.99                   | 22.55        | 22.26        | 23.30         |
|           |            | 1       | 49        | 22.10                   | 22.61        | 22.15        | 23.30         |
|           |            | 25      | 0         | 20.97                   | 21.16        | 21.30        | 22.30         |
|           |            | 25      | 13        | 21.20                   | 21.28        | 21.32        | 22.30         |
|           |            | 25      | 25        | 21.29                   | 21.20        | 21.19        | 22.30         |
|           |            | 50      | 0         | 21.11                   | 21.12        | 21.16        | 22.30         |

| LTE FDD Band 7 |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|----------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                |            |         |           | 20775/2502.5            | 21100/2535 | 21425/2567.5 |                  |
| 5MHz           | QPSK       | 1       | 0         | 23.16                   | 23.07      | 23.35        | 23.80            |
|                |            | 1       | 13        | 23.50                   | 23.09      | 23.46        | 23.80            |
|                |            | 1       | 24        | 23.26                   | 22.89      | 23.24        | 23.80            |
|                |            | 12      | 0         | 21.76                   | 21.33      | 21.75        | 22.80            |
|                |            | 12      | 6         | 21.79                   | 21.52      | 21.69        | 22.80            |
|                |            | 12      | 13        | 21.68                   | 21.52      | 21.81        | 22.80            |
|                |            | 25      | 0         | 21.64                   | 21.51      | 21.72        | 22.80            |
|                | 16QAM      | 1       | 0         | 22.17                   | 22.31      | 21.98        | 22.80            |
|                |            | 1       | 13        | 22.19                   | 22.44      | 22.10        | 22.80            |
|                |            | 1       | 24        | 22.03                   | 22.01      | 21.85        | 22.80            |
|                |            | 12      | 0         | 21.29                   | 20.76      | 21.20        | 21.80            |
|                |            | 12      | 6         | 21.30                   | 20.85      | 21.20        | 21.80            |
|                |            | 12      | 13        | 20.98                   | 20.83      | 20.97        | 21.80            |
|                |            | 25      | 0         | 21.06                   | 20.90      | 20.94        | 21.80            |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                |            |         |           | 20800/2505              | 21100/2535 | 21400/2565   |                  |
| 10MHz          | QPSK       | 1       | 0         | 23.30                   | 23.11      | 23.38        | 23.80            |
|                |            | 1       | 25        | 23.38                   | 23.00      | 23.25        | 23.80            |
|                |            | 1       | 49        | 23.30                   | 23.18      | 23.41        | 23.80            |
|                |            | 25      | 0         | 21.69                   | 21.47      | 21.82        | 22.80            |
|                |            | 25      | 13        | 21.88                   | 21.58      | 21.64        | 22.80            |
|                |            | 25      | 25        | 21.65                   | 21.34      | 21.60        | 22.80            |



|           | 16QAM      | 50      | 0         | 21.79                   | 21.61        | 21.75        | 22.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 1       | 0         | 22.01                   | 22.16        | 22.04        | 22.80         |
|           |            | 1       | 25        | 22.06                   | 22.10        | 22.00        | 22.80         |
|           |            | 1       | 49        | 22.03                   | 22.06        | 21.83        | 22.80         |
|           |            | 25      | 0         | 21.14                   | 20.90        | 21.31        | 21.80         |
|           |            | 25      | 13        | 21.11                   | 20.86        | 21.12        | 21.80         |
|           |            | 25      | 25        | 21.14                   | 20.93        | 21.00        | 21.80         |
|           |            | 50      | 0         | 20.95                   | 20.95        | 20.91        | 21.80         |
|           |            | 50      | 0         | 20.95                   | 20.95        | 20.91        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20825/2507.5            | 21100/2535   | 21375/2562.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 23.21                   | 23.21        | 23.32        | 23.80         |
|           |            | 1       | 38        | 23.19                   | 23.17        | 23.33        | 23.80         |
|           |            | 1       | 74        | 22.90                   | 23.21        | 23.03        | 23.80         |
|           |            | 36      | 0         | 21.96                   | 21.67        | 21.90        | 22.80         |
|           |            | 36      | 18        | 21.88                   | 21.72        | 21.72        | 22.80         |
|           |            | 36      | 39        | 21.67                   | 21.36        | 21.70        | 22.80         |
|           |            | 75      | 0         | 21.70                   | 21.57        | 21.66        | 22.80         |
|           | 16QAM      | 1       | 0         | 22.13                   | 22.11        | 22.28        | 22.80         |
|           |            | 1       | 38        | 21.95                   | 22.20        | 22.50        | 22.80         |
|           |            | 1       | 74        | 21.81                   | 22.25        | 22.34        | 22.80         |
|           |            | 36      | 0         | 21.11                   | 21.00        | 21.15        | 21.80         |
|           |            | 36      | 18        | 20.92                   | 20.71        | 20.95        | 21.80         |
|           |            | 36      | 39        | 20.74                   | 20.82        | 21.03        | 21.80         |
|           |            | 75      | 0         | 20.93                   | 20.74        | 21.09        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20850/2510              | 21100/2535   | 21350/2560   |               |
| 20MHz     | QPSK       | 1       | 0         | <b>23.43</b>            | 22.95        | 23.10        | 23.80         |
|           |            | 1       | 50        | 23.40                   | <b>23.20</b> | <b>23.42</b> | 23.80         |
|           |            | 1       | 99        | 23.00                   | 23.18        | 23.13        | 23.80         |
|           |            | 50      | 0         | 21.74                   | 21.45        | 21.63        | 22.80         |
|           |            | 50      | 25        | <b>21.85</b>            | <b>21.60</b> | <b>21.73</b> | 22.80         |
|           |            | 50      | 50        | 21.58                   | 21.51        | 21.38        | 22.80         |
|           |            | 100     | 0         | <b>21.90</b>            | 21.54        | 21.56        | 22.80         |
|           | 16QAM      | 1       | 0         | 22.44                   | 22.14        | 22.25        | 22.80         |
|           |            | 1       | 50        | 22.71                   | 22.34        | 22.51        | 22.80         |
|           |            | 1       | 99        | 22.31                   | 22.14        | 22.23        | 22.80         |
|           |            | 50      | 0         | 21.00                   | 20.73        | 21.03        | 21.80         |
|           |            | 50      | 25        | 21.15                   | 20.79        | 21.00        | 21.80         |
|           |            | 50      | 50        | 20.90                   | 20.87        | 20.90        | 21.80         |
|           |            | 100     | 0         | 21.08                   | 20.75        | 21.06        | 21.80         |

| LTE FDD Band 12 |            |         |           | Conducted Power(dBm)    | Tune-up<br>Limit |
|-----------------|------------|---------|-----------|-------------------------|------------------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency (MHz) |                  |



|           |            |         |           | 23017/699.7             | 23095/707.5 | 23173/715.3 |               |
|-----------|------------|---------|-----------|-------------------------|-------------|-------------|---------------|
| 1.4MHz    | QPSK       | 1       | 0         | 22.75                   | 22.65       | 22.62       | 23.80         |
|           |            | 1       | 2         | 22.76                   | 22.72       | 22.79       | 23.80         |
|           |            | 1       | 5         | 22.71                   | 22.69       | 22.69       | 23.80         |
|           |            | 3       | 0         | 22.85                   | 22.81       | 22.85       | 23.80         |
|           |            | 3       | 2         | 22.91                   | 22.84       | 22.88       | 23.80         |
|           |            | 3       | 3         | 22.88                   | 22.84       | 22.86       | 23.80         |
|           |            | 6       | 0         | 21.41                   | 21.39       | 21.35       | 22.80         |
|           | 16QAM      | 1       | 0         | 21.40                   | 21.63       | 21.23       | 22.80         |
|           |            | 1       | 2         | 21.44                   | 21.61       | 21.30       | 22.80         |
|           |            | 1       | 5         | 21.34                   | 21.61       | 21.25       | 22.80         |
|           |            | 3       | 0         | 21.44                   | 21.56       | 21.51       | 22.80         |
|           |            | 3       | 2         | 21.45                   | 21.52       | 21.57       | 22.80         |
|           |            | 3       | 3         | 21.47                   | 21.55       | 21.56       | 22.80         |
|           |            | 6       | 0         | 20.62                   | 20.31       | 20.54       | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             | Tune-up Limit |
|           |            |         |           | 23025/700.5             | 23095/707.5 | 23165/714.5 |               |
| 3MHz      | QPSK       | 1       | 0         | 22.56                   | 22.55       | 22.55       | 23.80         |
|           |            | 1       | 7         | 22.64                   | 22.63       | 22.67       | 23.80         |
|           |            | 1       | 14        | 22.60                   | 22.52       | 22.58       | 23.80         |
|           |            | 8       | 0         | 21.34                   | 21.24       | 21.32       | 22.80         |
|           |            | 8       | 4         | 21.40                   | 21.36       | 21.36       | 22.80         |
|           |            | 8       | 7         | 21.26                   | 21.23       | 21.30       | 22.80         |
|           |            | 15      | 0         | 21.26                   | 21.23       | 21.28       | 22.80         |
|           | 16QAM      | 1       | 0         | 21.07                   | 21.50       | 21.18       | 22.80         |
|           |            | 1       | 7         | 21.12                   | 21.54       | 21.19       | 22.80         |
|           |            | 1       | 14        | 21.02                   | 21.44       | 21.06       | 22.80         |
|           |            | 8       | 0         | 20.47                   | 20.40       | 20.36       | 21.80         |
|           |            | 8       | 4         | 20.51                   | 20.51       | 20.44       | 21.80         |
|           |            | 8       | 7         | 20.43                   | 20.37       | 20.35       | 21.80         |
|           |            | 15      | 0         | 20.39                   | 20.32       | 20.28       | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             | Tune-up Limit |
|           |            |         |           | 23035/701.5             | 23095/707.5 | 23155/713.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 22.86                   | 22.88       | 22.77       | 23.80         |
|           |            | 1       | 13        | 22.99                   | 22.94       | 22.86       | 23.80         |
|           |            | 1       | 24        | 22.86                   | 22.81       | 22.82       | 23.80         |
|           |            | 12      | 0         | 21.34                   | 21.34       | 21.32       | 22.80         |
|           |            | 12      | 6         | 21.44                   | 21.41       | 21.40       | 22.80         |
|           |            | 12      | 13        | 21.39                   | 21.31       | 21.27       | 22.80         |
|           |            | 25      | 0         | 21.40                   | 21.42       | 21.34       | 22.80         |
|           | 16QAM      | 1       | 0         | 21.53                   | 21.91       | 21.43       | 22.80         |
|           |            | 1       | 13        | 21.68                   | 22.02       | 21.57       | 22.80         |
|           |            | 1       | 24        | 21.59                   | 21.87       | 21.49       | 22.80         |



|           |            | 12      | 0         | 20.44                   | 20.52        | 20.38        | 21.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 12      | 6         | 20.56                   | 20.58        | 20.51        | 21.80         |
|           |            | 12      | 13        | 20.46                   | 20.56        | 20.39        | 21.80         |
|           |            | 25      | 0         | 20.51                   | 20.48        | 20.38        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 23060/704               | 23095/707.5  | 23130/711    |               |
| 10MHz     | QPSK       | 1       | 0         | <b>22.93</b>            | <b>22.92</b> | 22.93        | 23.80         |
|           |            | 1       | 25        | <b>22.93</b>            | <b>22.92</b> | 22.92        | 23.80         |
|           |            | 1       | 49        | 22.86                   | 22.89        | <b>22.99</b> | 23.80         |
|           |            | 25      | 0         | 21.34                   | 21.38        | 21.34        | 22.80         |
|           |            | 25      | 13        | <b>21.46</b>            | 21.43        | <b>21.40</b> | 22.80         |
|           |            | 25      | 25        | 21.42                   | <b>21.45</b> | 21.36        | 22.80         |
|           |            | 50      | 0         | 21.42                   | <b>21.43</b> | 21.35        | 22.80         |
|           | 16QAM      | 1       | 0         | 21.43                   | 21.86        | 21.46        | 22.80         |
|           |            | 1       | 25        | 21.40                   | 21.82        | 21.48        | 22.80         |
|           |            | 1       | 49        | 21.37                   | 21.79        | 21.45        | 22.80         |
|           |            | 25      | 0         | 20.41                   | 20.46        | 20.49        | 21.80         |
|           |            | 25      | 13        | 20.53                   | 20.59        | 20.57        | 21.80         |
|           |            | 25      | 25        | 20.48                   | 20.48        | 20.43        | 21.80         |
|           |            | 50      | 0         | 20.40                   | 20.46        | 20.41        | 21.80         |

| LTE FDD Band 17 |            |         |           | Conducted Power(dBm)    |           |             | Tune-up<br>Limit |
|-----------------|------------|---------|-----------|-------------------------|-----------|-------------|------------------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency (MHz) |           |             |                  |
|                 |            |         |           | 23755/706.5             | 23790/710 | 23825/713.5 |                  |
| 5MHz            | QPSK       | 1       | 0         | 22.89                   | 22.90     | 22.92       | 23.80            |
|                 |            | 1       | 13        | 23.03                   | 23.04     | 23.04       | 23.80            |
|                 |            | 1       | 24        | 22.91                   | 22.85     | 22.88       | 23.80            |
|                 |            | 12      | 0         | 21.42                   | 21.39     | 21.43       | 22.80            |
|                 |            | 12      | 6         | 21.47                   | 21.43     | 21.47       | 22.80            |
|                 |            | 12      | 13        | 21.44                   | 21.43     | 21.35       | 22.80            |
|                 |            | 25      | 0         | 21.45                   | 21.44     | 21.41       | 22.80            |
|                 | 16QAM      | 1       | 0         | 21.65                   | 21.97     | 21.52       | 22.80            |
|                 |            | 1       | 13        | 21.73                   | 22.02     | 21.65       | 22.80            |
|                 |            | 1       | 24        | 21.60                   | 21.88     | 21.59       | 22.80            |
|                 |            | 12      | 0         | 20.57                   | 20.57     | 20.51       | 21.80            |
|                 |            | 12      | 6         | 20.57                   | 20.62     | 20.56       | 21.80            |
|                 |            | 12      | 13        | 20.53                   | 20.63     | 20.45       | 21.80            |
|                 |            | 25      | 0         | 20.54                   | 20.59     | 20.46       | 21.80            |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency (MHz) |           |             | Tune-up<br>Limit |
|                 |            |         |           | 23780/709               | 23790/710 | 23800/711   |                  |
| 10MHz           | QPSK       | 1       | 0         | 22.96                   | 22.94     | 23.01       | 23.80            |
|                 |            | 1       | 25        | 22.93                   | 22.99     | 23.00       | 23.80            |
|                 |            | 1       | 49        | 22.91                   | 22.97     | 23.00       | 23.80            |



|  |       |    |    |              |              |              |       |
|--|-------|----|----|--------------|--------------|--------------|-------|
|  |       | 25 | 0  | 21.37        | 21.38        | 21.36        | 22.80 |
|  |       | 25 | 13 | <b>21.47</b> | <b>21.49</b> | <b>21.52</b> | 22.80 |
|  |       | 25 | 25 | <b>21.47</b> | 21.43        | 21.43        | 22.80 |
|  |       | 50 | 0  | <b>21.45</b> | 21.42        | 21.44        | 22.80 |
|  | 16QAM | 1  | 0  | 21.44        | 21.86        | 21.56        | 22.80 |
|  |       | 1  | 25 | 21.45        | 21.85        | 21.57        | 22.80 |
|  |       | 1  | 49 | 21.38        | 21.81        | 21.54        | 22.80 |
|  |       | 25 | 0  | 20.44        | 20.46        | 20.54        | 21.80 |
|  |       | 25 | 13 | 20.58        | 20.59        | 20.70        | 21.80 |
|  |       | 25 | 25 | 20.53        | 20.51        | 20.53        | 21.80 |
|  |       | 50 | 0  | 20.46        | 20.47        | 20.48        | 21.80 |

| LTE FDD Band 26 |            |         |           | Conducted Power(dBm)    |             |             | Tune-up<br>Limit |
|-----------------|------------|---------|-----------|-------------------------|-------------|-------------|------------------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             |                  |
|                 |            |         |           | 26697/814.7             | 26865/831.5 | 27033/848.3 |                  |
| 1.4MHz          | QPSK       | 1       | 0         | 23.21                   | 23.18       | 23.20       | 24.30            |
|                 |            | 1       | 2         | 23.33                   | 23.15       | 23.24       | 24.30            |
|                 |            | 1       | 5         | 23.05                   | 23.19       | 23.12       | 24.30            |
|                 |            | 3       | 0         | 23.38                   | 23.35       | 23.15       | 24.30            |
|                 |            | 3       | 2         | 23.18                   | 23.39       | 23.23       | 24.30            |
|                 |            | 3       | 3         | 23.36                   | 23.31       | 23.33       | 24.30            |
|                 |            | 6       | 0         | 21.70                   | 21.96       | 21.74       | 23.30            |
|                 | 16QAM      | 1       | 0         | 22.14                   | 22.47       | 22.13       | 23.30            |
|                 |            | 1       | 2         | 22.26                   | 22.61       | 21.87       | 23.30            |
|                 |            | 1       | 5         | 22.05                   | 22.33       | 22.01       | 23.30            |
|                 |            | 3       | 0         | 22.01                   | 22.38       | 22.32       | 23.30            |
|                 |            | 3       | 2         | 22.25                   | 22.48       | 22.25       | 23.30            |
|                 |            | 3       | 3         | 22.07                   | 22.25       | 22.23       | 23.30            |
|                 |            | 6       | 0         | 21.36                   | 21.11       | 21.21       | 22.30            |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             | Tune-up<br>Limit |
|                 |            |         |           | 26705/815.5             | 26865/831.5 | 27025/847.5 |                  |
| 3MHz            | QPSK       | 1       | 0         | 23.02                   | 23.05       | 22.61       | 24.30            |
|                 |            | 1       | 7         | 23.15                   | 23.35       | 23.27       | 24.30            |
|                 |            | 1       | 14        | 22.86                   | 23.09       | 22.79       | 24.30            |
|                 |            | 8       | 0         | 21.91                   | 21.90       | 21.73       | 23.30            |
|                 |            | 8       | 4         | 21.99                   | 21.74       | 21.87       | 23.30            |
|                 |            | 8       | 7         | 21.73                   | 21.70       | 21.76       | 23.30            |
|                 |            | 15      | 0         | 21.82                   | 21.85       | 21.75       | 23.30            |
|                 | 16QAM      | 1       | 0         | 21.89                   | 22.29       | 22.02       | 23.30            |
|                 |            | 1       | 7         | 21.97                   | 22.46       | 21.87       | 23.30            |
|                 |            | 1       | 14        | 21.78                   | 22.24       | 21.84       | 23.30            |
|                 |            | 8       | 0         | 21.35                   | 21.32       | 21.17       | 22.30            |
|                 |            | 8       | 4         | 21.19                   | 21.16       | 21.10       | 22.30            |



|           |            | 8       | 7         | 21.08                   | 21.15        | 20.92        | 22.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 15      | 0         | 21.03                   | 21.04        | 20.90        | 22.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 26715/816.5             | 26865/831.5  | 27015/846.5  |               |
| 5MHz      | QPSK       | 1       | 0         | 23.47                   | 23.26        | 23.43        | 24.30         |
|           |            | 1       | 13        | 23.43                   | 23.33        | 23.40        | 24.30         |
|           |            | 1       | 24        | 23.25                   | 23.35        | 23.11        | 24.30         |
|           |            | 12      | 0         | 21.91                   | 21.73        | 22.04        | 23.30         |
|           |            | 12      | 6         | 21.97                   | 21.82        | 21.97        | 23.30         |
|           |            | 12      | 13        | 21.85                   | 21.94        | 21.81        | 23.30         |
|           |            | 25      | 0         | 21.80                   | 21.87        | 21.97        | 23.30         |
|           | 16QAM      | 1       | 0         | 22.35                   | 22.84        | 22.31        | 23.30         |
|           |            | 1       | 13        | 22.53                   | 22.72        | 22.28        | 23.30         |
|           |            | 1       | 24        | 22.50                   | 22.70        | 22.31        | 23.30         |
|           |            | 12      | 0         | 21.19                   | 21.21        | 21.21        | 22.30         |
|           |            | 12      | 6         | 21.32                   | 21.42        | 21.30        | 22.30         |
|           |            | 12      | 13        | 21.41                   | 21.13        | 21.19        | 22.30         |
|           |            | 25      | 0         | 21.20                   | 21.45        | 21.33        | 22.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 26750/820               | 26865/831.5  | 26990/844    |               |
| 10MHz     | QPSK       | 1       | 0         | 23.34                   | 23.52        | 23.38        | 24.30         |
|           |            | 1       | 25        | 23.51                   | 23.38        | 23.46        | 24.30         |
|           |            | 1       | 49        | 23.29                   | 23.47        | 23.42        | 24.30         |
|           |            | 25      | 0         | 21.83                   | 21.81        | 22.03        | 23.30         |
|           |            | 25      | 13        | 22.01                   | 21.95        | 21.78        | 23.30         |
|           |            | 25      | 25        | 21.94                   | 21.96        | 21.69        | 23.30         |
|           |            | 50      | 0         | 21.88                   | 21.98        | 21.71        | 23.30         |
|           | 16QAM      | 1       | 0         | 22.17                   | 22.68        | 22.42        | 23.30         |
|           |            | 1       | 25        | 22.10                   | 22.66        | 22.34        | 23.30         |
|           |            | 1       | 49        | 22.22                   | 22.57        | 22.19        | 23.30         |
|           |            | 25      | 0         | 21.34                   | 21.46        | 21.20        | 22.30         |
|           |            | 25      | 13        | 21.50                   | 21.36        | 21.29        | 22.30         |
|           |            | 25      | 25        | 21.18                   | 21.38        | 21.01        | 22.30         |
|           |            | 50      | 0         | 21.36                   | 21.19        | 21.06        | 22.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 26775/822.5             | 26865/831.5  | 26965/841.5  |               |
| 15MHz     | QPSK       | 1       | 0         | 23.31                   | 23.48        | 23.36        | 24.30         |
|           |            | 1       | 38        | 23.40                   | <b>23.65</b> | <b>23.68</b> | 24.30         |
|           |            | 1       | 74        | <b>23.64</b>            | 23.50        | 23.50        | 24.30         |
|           |            | 36      | 0         | <b>22.10</b>            | 21.89        | 21.98        | 23.30         |
|           |            | 36      | 18        | <b>22.10</b>            | 21.99        | <b>22.04</b> | 23.30         |
|           |            | 36      | 39        | 21.85                   | <b>22.03</b> | 21.75        | 23.30         |
|           |            | 75      | 0         | 22.11                   | <b>22.13</b> | 22.03        | 23.30         |



|  |       |    |    |       |       |       |       |
|--|-------|----|----|-------|-------|-------|-------|
|  | 16QAM | 1  | 0  | 22.29 | 22.64 | 22.70 | 23.30 |
|  |       | 1  | 38 | 22.46 | 22.89 | 22.71 | 23.30 |
|  |       | 1  | 74 | 22.27 | 22.61 | 22.74 | 23.30 |
|  |       | 36 | 0  | 21.17 | 21.46 | 21.24 | 22.30 |
|  |       | 36 | 18 | 21.39 | 21.46 | 21.31 | 22.30 |
|  |       | 36 | 39 | 21.50 | 21.48 | 21.06 | 22.30 |
|  |       | 75 | 0  | 21.47 | 21.42 | 21.23 | 22.30 |

| LTE TDD Band 38 |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|-----------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                 |            |         |           | 37775/2572.5            | 38000/2595 | 38225/2617.5 |                  |
| 5MHz            | QPSK       | 1       | 0         | 22.77                   | 23.04      | 23.06        | 23.80            |
|                 |            | 1       | 13        | 22.88                   | 23.15      | 23.18        | 23.80            |
|                 |            | 1       | 24        | 22.79                   | 23.09      | 23.04        | 23.80            |
|                 |            | 12      | 0         | 21.23                   | 21.49      | 21.52        | 22.80            |
|                 |            | 12      | 6         | 21.31                   | 21.51      | 21.52        | 22.80            |
|                 |            | 12      | 13        | 21.25                   | 21.51      | 21.52        | 22.80            |
|                 |            | 25      | 0         | 20.73                   | 20.99      | 21.01        | 22.80            |
|                 | 16QAM      | 1       | 0         | 21.43                   | 21.76      | 21.87        | 22.80            |
|                 |            | 1       | 13        | 21.59                   | 21.87      | 21.98        | 22.80            |
|                 |            | 1       | 24        | 21.48                   | 21.78      | 21.87        | 22.80            |
|                 |            | 12      | 0         | 20.25                   | 20.45      | 20.57        | 21.80            |
|                 |            | 12      | 6         | 20.33                   | 20.46      | 20.59        | 21.80            |
|                 |            | 12      | 13        | 20.27                   | 20.48      | 20.58        | 21.80            |
|                 |            | 25      | 0         | 19.75                   | 20.03      | 19.99        | 21.80            |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                 |            |         |           | 37800/2575              | 38000/2595 | 38200/2615   |                  |
| 10MHz           | QPSK       | 1       | 0         | 22.84                   | 23.10      | 23.22        | 23.80            |
|                 |            | 1       | 25        | 22.88                   | 23.17      | 23.19        | 23.80            |
|                 |            | 1       | 49        | 22.87                   | 23.17      | 23.14        | 23.80            |
|                 |            | 25      | 0         | 21.29                   | 21.50      | 21.57        | 22.80            |
|                 |            | 25      | 13        | 21.28                   | 21.57      | 21.60        | 22.80            |
|                 |            | 25      | 25        | 21.24                   | 21.57      | 21.57        | 22.80            |
|                 |            | 50      | 0         | 21.26                   | 21.54      | 21.61        | 22.80            |
|                 | 16QAM      | 1       | 0         | 21.58                   | 21.95      | 22.03        | 22.80            |
|                 |            | 1       | 25        | 21.61                   | 22.02      | 21.99        | 22.80            |
|                 |            | 1       | 49        | 21.61                   | 22.00      | 21.95        | 22.80            |
|                 |            | 25      | 0         | 20.30                   | 20.52      | 20.57        | 21.80            |
|                 |            | 25      | 13        | 20.26                   | 20.58      | 20.63        | 21.80            |
|                 |            | 25      | 25        | 20.27                   | 20.54      | 20.57        | 21.80            |
|                 |            | 50      | 0         | 20.26                   | 20.50      | 20.64        | 21.80            |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                 |            |         |           | 37825/2577.5            | 38000/2595 | 38175/2612.5 |                  |



| 15MHz     | QPSK       | 1       | 0         | 22.82                   | 22.98        | 23.17        | 23.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 1       | 38        | 22.88                   | 23.17        | 23.24        | 23.80         |
|           |            | 1       | 74        | 22.87                   | 23.15        | 23.09        | 23.80         |
|           |            | 36      | 0         | 21.28                   | 21.48        | 21.60        | 22.80         |
|           |            | 36      | 18        | 21.34                   | 21.58        | 21.63        | 22.80         |
|           |            | 36      | 39        | 21.33                   | 21.54        | 21.61        | 22.80         |
|           |            | 75      | 0         | 21.28                   | 21.55        | 21.61        | 22.80         |
|           | 16QAM      | 1       | 0         | 21.55                   | 21.88        | 21.91        | 22.80         |
|           |            | 1       | 38        | 21.60                   | 22.03        | 21.97        | 22.80         |
|           |            | 1       | 74        | 21.59                   | 21.99        | 21.81        | 22.80         |
|           |            | 36      | 0         | 20.23                   | 20.43        | 20.60        | 21.80         |
|           |            | 36      | 18        | 20.29                   | 20.56        | 20.63        | 21.80         |
|           |            | 36      | 39        | 20.26                   | 20.51        | 20.62        | 21.80         |
|           |            | 75      | 0         | 20.26                   | 20.51        | 20.58        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 37850/2580              | 38000/2595   | 38150/2610   |               |
| 20MHz     | QPSK       | 1       | 0         | 22.77                   | 22.91        | 23.18        | 23.80         |
|           |            | 1       | 50        | <b>22.91</b>            | <b>23.10</b> | <b>23.30</b> | 23.80         |
|           |            | 1       | 99        | 22.90                   | 23.02        | 23.07        | 23.80         |
|           |            | 50      | 0         | 21.25                   | 21.49        | 21.56        | 22.80         |
|           |            | 50      | 25        | 21.33                   | 21.55        | <b>21.64</b> | 22.80         |
|           |            | 50      | 50        | <b>21.34</b>            | <b>21.57</b> | 21.58        | 22.80         |
|           |            | 100     | 0         | 20.77                   | 21.00        | <b>21.04</b> | 22.80         |
|           | 16QAM      | 1       | 0         | 21.51                   | 21.54        | 21.96        | 22.80         |
|           |            | 1       | 50        | 21.69                   | 21.77        | 22.05        | 22.80         |
|           |            | 1       | 99        | 21.64                   | 21.70        | 21.89        | 22.80         |
|           |            | 50      | 0         | 20.20                   | 20.46        | 20.61        | 21.80         |
|           |            | 50      | 25        | 20.29                   | 20.54        | 20.63        | 21.80         |
|           |            | 50      | 50        | 20.29                   | 20.51        | 20.61        | 21.80         |
|           |            | 100     | 0         | 19.76                   | 19.96        | 20.09        | 21.80         |

| LTE TDD Band 41 |            |               |        | Conducted Power(dBm)   |              |            |             |              | Tune-up Limit |
|-----------------|------------|---------------|--------|------------------------|--------------|------------|-------------|--------------|---------------|
| Bandwidth       | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |            |             |              |               |
|                 |            |               |        | 39675/2498.5           | 40148/2545.8 | 40620/2593 | 41093/640.3 | 41565/2687.5 |               |
| 5MHz            | QPSK       | 1             | 0      | 22.97                  | 23.05        | 23.01      | 22.95       | 22.71        | 23.80         |
|                 |            | 1             | 13     | 23.06                  | 22.92        | 23.14      | 23.17       | 22.84        | 23.80         |
|                 |            | 1             | 24     | 22.93                  | 23.05        | 23.05      | 22.86       | 22.72        | 23.80         |
|                 |            | 12            | 0      | 21.38                  | 21.25        | 21.48      | 21.27       | 21.19        | 22.80         |
|                 |            | 12            | 6      | 21.47                  | 21.54        | 21.58      | 21.59       | 21.23        | 22.80         |
|                 |            | 12            | 13     | 21.45                  | 21.31        | 21.54      | 21.55       | 21.15        | 22.80         |
|                 |            | 25            | 0      | 21.40                  | 21.54        | 21.49      | 21.27       | 21.16        | 22.80         |



|           | 16QAM      | 1             | 0      | 21.64                  | 21.63        | 21.74      | 21.62        | 21.58        | 22.80         |
|-----------|------------|---------------|--------|------------------------|--------------|------------|--------------|--------------|---------------|
|           |            | 1             | 13     | 21.73                  | 21.61        | 21.88      | 21.78        | 21.67        | 22.80         |
|           |            | 1             | 24     | 21.61                  | 21.67        | 21.79      | 21.75        | 21.53        | 22.80         |
|           |            | 12            | 0      | 20.40                  | 20.38        | 20.44      | 20.53        | 20.29        | 21.80         |
|           |            | 12            | 6      | 20.48                  | 20.51        | 20.52      | 20.35        | 20.31        | 21.80         |
|           |            | 12            | 13     | 20.44                  | 20.35        | 20.51      | 20.44        | 20.26        | 21.80         |
|           |            | 25            | 0      | 20.43                  | 20.49        | 20.52      | 20.40        | 20.22        | 21.80         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |            |              |              | Tune-up Limit |
|           |            |               |        | 39700/2501             | 40160/2547   | 40620/2593 | 41080/2639   | 41540/2685   |               |
| 10MHz     | QPSK       | 1             | 0      | 23.10                  | 23.07        | 23.07      | 22.84        | 22.87        | 23.80         |
|           |            | 1             | 25     | 23.05                  | 23.00        | 23.17      | 22.97        | 22.86        | 23.80         |
|           |            | 1             | 49     | 22.98                  | 22.84        | 23.18      | 22.78        | 22.81        | 23.80         |
|           |            | 25            | 0      | 21.43                  | 21.41        | 21.50      | 21.28        | 21.28        | 22.80         |
|           |            | 25            | 13     | 21.42                  | 21.58        | 21.56      | 21.53        | 21.32        | 22.80         |
|           |            | 25            | 25     | 21.44                  | 21.39        | 21.58      | 21.46        | 21.22        | 22.80         |
|           |            | 50            | 0      | 21.47                  | 21.45        | 21.56      | 21.30        | 21.28        | 22.80         |
|           | 16QAM      | 1             | 0      | 21.78                  | 21.74        | 21.94      | 21.50        | 21.74        | 22.80         |
|           |            | 1             | 25     | 21.80                  | 21.63        | 22.06      | 21.70        | 21.70        | 22.80         |
|           |            | 1             | 49     | 21.72                  | 21.60        | 22.02      | 21.55        | 21.65        | 22.80         |
|           |            | 25            | 0      | 20.40                  | 20.42        | 20.50      | 20.36        | 20.36        | 21.80         |
|           |            | 25            | 13     | 20.45                  | 20.41        | 20.57      | 20.53        | 20.30        | 21.80         |
|           |            | 25            | 25     | 20.46                  | 20.36        | 20.59      | 20.32        | 20.24        | 21.80         |
|           |            | 50            | 0      | 20.45                  | 20.46        | 20.53      | 20.41        | 20.30        | 21.80         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |            |              |              | Tune-up Limit |
|           |            |               |        | 39725/2503.5           | 40173/2548.3 | 40620/2593 | 41068/2637.8 | 41515/2682.5 |               |
| 15MHz     | QPSK       | 1             | 0      | 22.98                  | 22.94        | 23.04      | 22.89        | 22.83        | 23.80         |
|           |            | 1             | 38     | 23.02                  | 23.01        | 23.18      | 23.14        | 22.87        | 23.80         |
|           |            | 1             | 74     | 22.86                  | 23.04        | 23.15      | 22.92        | 22.73        | 23.80         |
|           |            | 36            | 0      | 21.47                  | 21.33        | 21.52      | 21.31        | 21.32        | 22.80         |
|           |            | 36            | 18     | 21.46                  | 21.50        | 21.57      | 21.54        | 21.29        | 22.80         |
|           |            | 36            | 39     | 21.43                  | 21.46        | 21.59      | 21.38        | 21.22        | 22.80         |
|           |            | 75            | 0      | 21.47                  | 21.54        | 21.57      | 21.40        | 21.28        | 22.80         |
|           | 16QAM      | 1             | 0      | 21.75                  | 21.53        | 21.93      | 21.72        | 21.63        | 22.80         |
|           |            | 1             | 38     | 21.74                  | 21.76        | 22.08      | 21.74        | 21.66        | 22.80         |
|           |            | 1             | 74     | 21.61                  | 21.54        | 22.01      | 21.47        | 21.50        | 22.80         |
|           |            | 36            | 0      | 20.41                  | 20.34        | 20.47      | 20.35        | 20.32        | 21.80         |
|           |            | 36            | 18     | 20.43                  | 20.42        | 20.53      | 20.47        | 20.31        | 21.80         |
|           |            | 36            | 39     | 20.37                  | 20.51        | 20.54      | 20.33        | 20.20        | 21.80         |
|           |            | 75            | 0      | 20.41                  | 20.52        | 20.55      | 20.48        | 20.26        | 21.80         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |            |              |              | Tune-up Limit |
|           |            |               |        | 39750/2                | 40185/25     | 40620/2    | 41055/26     | 41490/2      |               |



|       |       | ion |    | 506          | 49.5         | 593          | 36.5         | 680          | Limit |
|-------|-------|-----|----|--------------|--------------|--------------|--------------|--------------|-------|
| 20MHz | QPSK  | 1   | 0  | 22.97        | 22.88        | 22.91        | <b>23.08</b> | 22.87        | 23.80 |
|       |       | 1   | 50 | <b>23.01</b> | <b>23.11</b> | <b>23.14</b> | 22.91        | <b>22.95</b> | 23.80 |
|       |       | 1   | 99 | 22.84        | 22.95        | 23.07        | 22.94        | 22.71        | 23.80 |
|       |       | 50  | 0  | 21.37        | 21.27        | 21.46        | 21.32        | 21.30        | 22.80 |
|       |       | 50  | 25 | <b>21.48</b> | <b>21.52</b> | 21.58        | <b>21.53</b> | <b>21.32</b> | 22.80 |
|       |       | 50  | 50 | 21.43        | 21.47        | <b>21.61</b> | 21.34        | 21.16        | 22.80 |
|       |       | 100 | 0  | 21.37        | <b>21.43</b> | 21.51        | <b>21.52</b> | 21.25        | 22.80 |
|       | 16QAM | 1   | 0  | 21.74        | 21.77        | 21.61        | 21.59        | 21.65        | 22.80 |
|       |       | 1   | 50 | 21.77        | 21.58        | 21.80        | 21.74        | 21.75        | 22.80 |
|       |       | 1   | 99 | 21.57        | 21.52        | 21.75        | 21.75        | 21.53        | 22.80 |
|       |       | 50  | 0  | 20.34        | 20.46        | 20.48        | 20.40        | 20.34        | 21.80 |
|       |       | 50  | 25 | 20.39        | 20.35        | 20.56        | 20.36        | 20.34        | 21.80 |
|       |       | 50  | 50 | 20.36        | 20.50        | 20.59        | 20.30        | 20.19        | 21.80 |
|       |       | 100 | 0  | 20.34        | 20.57        | 20.52        | 20.45        | 20.23        | 21.80 |

| LTE TDD Band 66 |            |                  |        | Conducted Power(dBm)   |             |               | Tune-up<br>Limit |
|-----------------|------------|------------------|--------|------------------------|-------------|---------------|------------------|
| Bandwidth       | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |             |               |                  |
|                 |            |                  |        | 131979/1710.7          | 132322/1745 | 132665/1779.3 |                  |
| 1.4MHz          | QPSK       | 1                | 0      | 22.71                  | 22.74       | 23.08         | 24.10            |
|                 |            | 1                | 2      | 22.74                  | 22.73       | 23.19         | 24.10            |
|                 |            | 1                | 5      | 22.77                  | 22.83       | 22.90         | 24.10            |
|                 |            | 3                | 0      | 22.95                  | 22.74       | 23.04         | 24.10            |
|                 |            | 3                | 2      | 22.85                  | 22.94       | 23.08         | 24.10            |
|                 |            | 3                | 3      | 22.82                  | 22.76       | 23.07         | 24.10            |
|                 |            | 6                | 0      | 21.54                  | 21.41       | 21.59         | 23.10            |
|                 | 16QAM      | 1                | 0      | 21.76                  | 21.96       | 21.89         | 23.10            |
|                 |            | 1                | 2      | 21.69                  | 22.07       | 21.85         | 23.10            |
|                 |            | 1                | 5      | 21.59                  | 21.81       | 21.77         | 23.10            |
|                 |            | 3                | 0      | 21.58                  | 21.89       | 22.12         | 23.10            |
|                 |            | 3                | 2      | 21.68                  | 21.94       | 21.92         | 23.10            |
|                 |            | 3                | 3      | 21.79                  | 21.81       | 21.93         | 23.10            |
|                 |            | 6                | 0      | 20.83                  | 20.52       | 21.22         | 22.10            |
| Bandwidth       | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up<br>Limit |
|                 |            |                  |        | 131987/1711.5          | 132322/1745 | 132657/1778.5 |                  |
| 3MHz            | QPSK       | 1                | 0      | 22.75                  | 22.72       | 22.70         | 24.10            |
|                 |            | 1                | 7      | 22.73                  | 22.65       | 23.08         | 24.10            |
|                 |            | 1                | 14     | 22.81                  | 22.52       | 22.69         | 24.10            |
|                 |            | 8                | 0      | 21.57                  | 21.43       | 21.38         | 23.10            |
|                 |            | 8                | 4      | 21.35                  | 21.51       | 21.63         | 23.10            |
|                 |            | 8                | 7      | 21.26                  | 21.34       | 21.55         | 23.10            |
|                 |            | 15               | 0      | 21.45                  | 21.39       | 21.56         | 23.10            |
|                 | 16QAM      | 1                | 0      | 21.20                  | 21.90       | 21.83         | 23.10            |



|           |            | 1             | 7      | 21.50                  | 21.95       | 21.65         | 23.10         |
|-----------|------------|---------------|--------|------------------------|-------------|---------------|---------------|
|           |            | 1             | 14     | 21.40                  | 21.74       | 21.55         | 23.10         |
|           |            | 8             | 0      | 20.84                  | 20.81       | 20.97         | 22.10         |
|           |            | 8             | 4      | 20.89                  | 20.88       | 20.88         | 22.10         |
|           |            | 8             | 7      | 20.74                  | 20.75       | 20.87         | 22.10         |
|           |            | 15            | 0      | 20.61                  | 20.61       | 20.81         | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 131997/1712.5          | 132322/1745 | 132647/1777.5 |               |
| 5MHz      | QPSK       | 1             | 0      | 22.79                  | 22.81       | 22.93         | 24.10         |
|           |            | 1             | 13     | 23.02                  | 22.93       | 23.06         | 24.10         |
|           |            | 1             | 24     | 22.84                  | 22.96       | 23.04         | 24.10         |
|           |            | 12            | 0      | 21.62                  | 21.37       | 21.77         | 23.10         |
|           |            | 12            | 6      | 21.51                  | 21.52       | 21.64         | 23.10         |
|           |            | 12            | 13     | 21.45                  | 21.40       | 21.76         | 23.10         |
|           | 16QAM      | 25            | 0      | 21.56                  | 21.34       | 21.71         | 23.10         |
|           |            | 1             | 0      | 21.95                  | 22.14       | 21.94         | 23.10         |
|           |            | 1             | 13     | 21.97                  | 22.33       | 22.07         | 23.10         |
|           |            | 1             | 24     | 21.83                  | 22.26       | 21.93         | 23.10         |
|           |            | 12            | 0      | 20.91                  | 20.79       | 21.00         | 22.10         |
|           |            | 12            | 6      | 21.00                  | 20.80       | 20.96         | 22.10         |
|           |            | 12            | 13     | 20.66                  | 20.94       | 20.99         | 22.10         |
|           |            | 25            | 0      | 20.66                  | 20.90       | 21.05         | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 132022/1715            | 132322/1745 | 132622/1775   |               |
| 10MHz     | QPSK       | 1             | 0      | 23.01                  | 23.07       | 22.99         | 24.10         |
|           |            | 1             | 25     | 23.04                  | 22.90       | 23.09         | 24.10         |
|           |            | 1             | 49     | 23.11                  | 22.85       | 22.90         | 24.10         |
|           |            | 25            | 0      | 21.59                  | 21.60       | 21.74         | 23.10         |
|           |            | 25            | 13     | 21.54                  | 21.56       | 21.80         | 23.10         |
|           |            | 25            | 25     | 21.41                  | 21.52       | 21.62         | 23.10         |
|           |            | 50            | 0      | 21.40                  | 21.60       | 21.73         | 23.10         |
|           | 16QAM      | 1             | 0      | 21.69                  | 22.24       | 21.87         | 23.10         |
|           |            | 1             | 25     | 21.83                  | 22.12       | 21.97         | 23.10         |
|           |            | 1             | 49     | 21.77                  | 22.21       | 21.84         | 23.10         |
|           |            | 25            | 0      | 21.03                  | 20.80       | 21.07         | 22.10         |
|           |            | 25            | 13     | 20.75                  | 21.03       | 21.03         | 22.10         |
|           |            | 25            | 25     | 20.76                  | 20.80       | 20.88         | 22.10         |
|           |            | 50            | 0      | 20.83                  | 20.86       | 21.00         | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 132047/1717.5          | 132322/1745 | 132597/1772.5 |               |
| 15MHz     | QPSK       | 1             | 0      | 23.11                  | 23.06       | 23.20         | 24.10         |
|           |            | 1             | 38     | 22.89                  | 22.94       | 23.05         | 24.10         |
|           |            | 1             | 74     | 22.99                  | 22.87       | 23.03         | 24.10         |



|           |            | 36            | 0      | 21.57                  | 21.37        | 21.48        | 23.10         |
|-----------|------------|---------------|--------|------------------------|--------------|--------------|---------------|
|           |            | 36            | 18     | 21.42                  | 21.47        | 21.54        | 23.10         |
|           |            | 36            | 39     | 21.52                  | 21.41        | 21.63        | 23.10         |
|           |            | 75            | 0      | 21.58                  | 21.50        | 21.76        | 23.10         |
|           | 16QAM      | 1             | 0      | 21.84                  | 21.97        | 22.20        | 23.10         |
|           |            | 1             | 38     | 21.67                  | 22.33        | 22.35        | 23.10         |
|           |            | 1             | 74     | 21.72                  | 22.10        | 22.16        | 23.10         |
|           |            | 36            | 0      | 20.75                  | 20.74        | 20.76        | 22.10         |
|           |            | 36            | 18     | 20.74                  | 20.72        | 20.87        | 22.10         |
|           |            | 36            | 39     | 20.89                  | 20.81        | 20.68        | 22.10         |
|           |            | 75            | 0      | 20.71                  | 20.70        | 20.80        | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |              | Tune-up Limit |
|           |            |               |        | 132072/1720            | 132322/1745  | 132572/1770  |               |
| 20MHz     | QPSK       | 1             | 0      | 22.82                  | <b>23.04</b> | <b>23.03</b> | 24.10         |
|           |            | 1             | 50     | <b>23.12</b>           | 22.92        | 22.95        | 24.10         |
|           |            | 1             | 99     | 22.86                  | 22.98        | 23.01        | 24.10         |
|           |            | 50            | 0      | <b>21.69</b>           | <b>21.59</b> | <b>21.55</b> | 23.10         |
|           |            | 50            | 25     | 21.55                  | 21.44        | 21.51        | 23.10         |
|           |            | 50            | 50     | 21.57                  | 21.55        | 21.37        | 23.10         |
|           |            | 100           | 0      | <b>21.72</b>           | 21.55        | 21.48        | 23.10         |
|           | 16QAM      | 1             | 0      | 22.29                  | 22.28        | 22.31        | 23.10         |
|           |            | 1             | 50     | 22.47                  | 22.40        | 22.38        | 23.10         |
|           |            | 1             | 99     | 22.04                  | 22.05        | 22.12        | 23.10         |
|           |            | 50            | 0      | 20.80                  | 20.84        | 20.76        | 22.10         |
|           |            | 50            | 25     | 20.98                  | 20.69        | 20.84        | 22.10         |
|           |            | 50            | 50     | 20.88                  | 20.64        | 20.80        | 22.10         |
|           |            | 100           | 0      | 21.02                  | 20.81        | 20.89        | 22.10         |



## WWAN Antenna Down

| LTE FDD Band 4<br>Body(standalone) |            |         |           | Conducted Power(dBm)    |              |              | Tune-up<br>Limit |
|------------------------------------|------------|---------|-----------|-------------------------|--------------|--------------|------------------|
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              |                  |
|                                    |            |         |           | 19957/1710.7            | 20175/1732.5 | 20393/1754.3 |                  |
| 1.4MHz                             | QPSK       | 1       | 0         | 20.67                   | 20.79        | 20.73        | 22.30            |
|                                    |            | 1       | 2         | 21.09                   | 21.11        | 20.89        | 22.30            |
|                                    |            | 1       | 5         | 20.85                   | 21.03        | 20.99        | 22.30            |
|                                    |            | 3       | 0         | 21.13                   | 20.81        | 21.01        | 22.30            |
|                                    |            | 3       | 2         | 20.87                   | 21.16        | 20.98        | 22.30            |
|                                    |            | 3       | 3         | 20.92                   | 21.06        | 20.89        | 22.30            |
|                                    |            | 6       | 0         | 21.11                   | 21.05        | 20.82        | 22.30            |
|                                    | 16QAM      | 1       | 0         | 21.38                   | 21.63        | 21.13        | 22.30            |
|                                    |            | 1       | 2         | 21.47                   | 21.69        | 21.26        | 22.30            |
|                                    |            | 1       | 5         | 21.22                   | 21.34        | 21.20        | 22.30            |
|                                    |            | 3       | 0         | 19.94                   | 19.89        | 19.92        | 22.30            |
|                                    |            | 3       | 2         | 19.94                   | 20.08        | 20.15        | 22.30            |
|                                    |            | 3       | 3         | 19.99                   | 20.07        | 20.03        | 22.30            |
|                                    |            | 6       | 0         | 19.97                   | 20.07        | 20.02        | 21.80            |
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up<br>Limit |
|                                    |            |         |           | 19965/1711.5            | 20175/1732.5 | 20385/1753.5 |                  |
| 3MHz                               | QPSK       | 1       | 0         | 20.91                   | 20.85        | 20.85        | 22.30            |
|                                    |            | 1       | 7         | 20.86                   | 21.16        | 21.11        | 22.30            |
|                                    |            | 1       | 14        | 20.79                   | 20.98        | 20.77        | 22.30            |
|                                    |            | 8       | 0         | 20.87                   | 20.81        | 20.87        | 22.30            |
|                                    |            | 8       | 4         | 21.15                   | 21.09        | 20.92        | 22.30            |
|                                    |            | 8       | 7         | 20.99                   | 21.14        | 21.04        | 22.30            |
|                                    |            | 15      | 0         | 21.00                   | 21.03        | 20.82        | 22.30            |
|                                    | 16QAM      | 1       | 0         | 21.54                   | 21.43        | 21.24        | 22.30            |
|                                    |            | 1       | 7         | 21.56                   | 21.53        | 21.29        | 22.30            |
|                                    |            | 1       | 14        | 21.33                   | 21.12        | 21.18        | 22.30            |
|                                    |            | 8       | 0         | 20.13                   | 19.99        | 20.02        | 21.80            |
|                                    |            | 8       | 4         | 20.04                   | 20.25        | 20.15        | 21.80            |
|                                    |            | 8       | 7         | 20.27                   | 20.09        | 19.80        | 21.80            |
|                                    |            | 15      | 0         | 20.13                   | 20.06        | 20.04        | 21.80            |
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up<br>Limit |
|                                    |            |         |           | 19975/1712.5            | 20175/1732.5 | 20375/1752.5 |                  |
| 5MHz                               | QPSK       | 1       | 0         | 20.70                   | 20.81        | 20.88        | 22.30            |
|                                    |            | 1       | 13        | 20.94                   | 21.07        | 20.96        | 22.30            |
|                                    |            | 1       | 24        | 20.91                   | 20.99        | 20.94        | 22.30            |
|                                    |            | 12      | 0         | 21.12                   | 20.87        | 20.92        | 22.30            |
|                                    |            | 12      | 6         | 20.96                   | 21.14        | 21.18        | 22.30            |
|                                    |            | 12      | 13        | 21.05                   | 21.15        | 21.03        | 22.30            |



|           |            | 25      | 0         | 21.14                   | 20.80        | 21.04        | 22.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           | 16QAM      | 1       | 0         | 21.32                   | 21.59        | 21.35        | 22.30         |
|           |            | 1       | 13        | 21.68                   | 21.64        | 21.26        | 22.30         |
|           |            | 1       | 24        | 21.20                   | 21.10        | 21.30        | 22.30         |
|           |            | 12      | 0         | 20.15                   | 19.85        | 20.13        | 21.80         |
|           |            | 12      | 6         | 20.19                   | 20.10        | 20.14        | 21.80         |
|           |            | 12      | 13        | 20.10                   | 20.22        | 19.92        | 21.80         |
|           |            | 25      | 0         | 20.06                   | 20.05        | 19.91        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20000/1715              | 20175/1732.5 | 20350/1750   |               |
| 10MHz     | QPSK       | 1       | 0         | 20.72                   | 20.87        | 20.85        | 22.30         |
|           |            | 1       | 25        | 21.09                   | 21.11        | 20.99        | 22.30         |
|           |            | 1       | 49        | 20.91                   | 21.08        | 20.97        | 22.30         |
|           |            | 25      | 0         | 20.92                   | 20.75        | 21.10        | 22.30         |
|           |            | 25      | 13        | 21.00                   | 20.92        | 21.00        | 22.30         |
|           |            | 25      | 25        | 21.11                   | 21.17        | 20.78        | 22.30         |
|           |            | 50      | 0         | 21.18                   | 20.81        | 21.04        | 22.30         |
|           | 16QAM      | 1       | 0         | 21.42                   | 21.60        | 21.24        | 22.30         |
|           |            | 1       | 25        | 21.53                   | 21.58        | 21.32        | 22.30         |
|           |            | 1       | 49        | 21.23                   | 21.18        | 21.05        | 22.30         |
|           |            | 25      | 0         | 19.97                   | 19.79        | 20.01        | 21.80         |
|           |            | 25      | 13        | 20.19                   | 20.11        | 20.10        | 21.80         |
|           |            | 25      | 25        | 20.24                   | 20.21        | 20.05        | 21.80         |
|           |            | 50      | 0         | 20.11                   | 20.02        | 20.14        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20025/1717.5            | 20175/1732.5 | 20325/1747.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 20.66                   | 21.00        | 20.82        | 22.30         |
|           |            | 1       | 38        | 20.92                   | 21.21        | 21.12        | 22.30         |
|           |            | 1       | 74        | 20.75                   | 21.04        | 20.79        | 22.30         |
|           |            | 36      | 0         | 20.99                   | 20.79        | 20.81        | 22.30         |
|           |            | 36      | 18        | 21.11                   | 21.17        | 21.12        | 22.30         |
|           |            | 36      | 39        | 21.10                   | 20.91        | 20.99        | 22.30         |
|           |            | 75      | 0         | 21.09                   | 20.95        | 20.97        | 22.30         |
|           | 16QAM      | 1       | 0         | 21.57                   | 21.44        | 21.13        | 22.30         |
|           |            | 1       | 38        | 21.51                   | 21.42        | 21.51        | 22.30         |
|           |            | 1       | 74        | 21.19                   | 21.15        | 21.12        | 22.30         |
|           |            | 36      | 0         | 19.96                   | 20.04        | 20.08        | 21.80         |
|           |            | 36      | 18        | 20.11                   | 20.07        | 20.11        | 21.80         |
|           |            | 36      | 39        | 20.01                   | 20.29        | 19.90        | 21.80         |
|           |            | 75      | 0         | 20.14                   | 19.91        | 20.11        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20050/1720              | 20175/1732.5 | 20300/1745   |               |
| 20MHz     | QPSK       | 1       | 0         | 20.79                   | 20.89        | 20.83        | 22.30         |



|  |       |     |    |              |              |              |       |
|--|-------|-----|----|--------------|--------------|--------------|-------|
|  |       | 1   | 50 | <b>20.95</b> | <b>21.06</b> | <b>21.01</b> | 22.30 |
|  |       | 1   | 99 | 20.88        | 20.98        | 20.86        | 22.30 |
|  |       | 50  | 0  | 20.98        | 20.90        | 20.95        | 22.30 |
|  |       | 50  | 25 | 21.02        | <b>21.07</b> | <b>21.04</b> | 22.30 |
|  |       | 50  | 50 | <b>21.06</b> | 21.06        | 20.90        | 22.30 |
|  |       | 100 | 0  | <b>21.04</b> | 20.94        | 20.92        | 22.30 |
|  | 16QAM | 1   | 0  | 21.42        | 21.52        | 21.20        | 22.30 |
|  |       | 1   | 50 | 21.55        | 21.57        | 21.40        | 22.30 |
|  |       | 1   | 99 | 21.18        | 21.19        | 21.17        | 22.30 |
|  |       | 50  | 0  | 20.09        | 19.94        | 19.99        | 21.80 |
|  |       | 50  | 25 | 20.08        | 20.13        | 20.05        | 21.80 |
|  |       | 50  | 50 | 20.13        | 20.14        | 19.90        | 21.80 |
|  |       | 100 | 0  | 20.10        | 19.95        | 19.99        | 21.80 |

| LTE FDD Band 4<br>Body(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    |              |              | Tune-up<br>Limit |
|--------------------------------------|------------|---------|-----------|-------------------------|--------------|--------------|------------------|
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              |                  |
|                                      |            |         |           | 19957/1710.7            | 20175/1732.5 | 20393/1754.3 |                  |
| 1.4MHz                               | QPSK       | 1       | 0         | 20.07                   | 20.14        | 20.22        | 21.80            |
|                                      |            | 1       | 2         | 20.20                   | 20.24        | 20.26        | 21.80            |
|                                      |            | 1       | 5         | 20.14                   | 20.21        | 20.25        | 21.80            |
|                                      |            | 3       | 0         | 20.32                   | 20.33        | 20.37        | 21.80            |
|                                      |            | 3       | 2         | 20.33                   | 20.39        | 20.40        | 21.80            |
|                                      |            | 3       | 3         | 20.37                   | 20.32        | 20.35        | 21.80            |
|                                      |            | 6       | 0         | 20.38                   | 20.38        | 20.40        | 21.80            |
|                                      | 16QAM      | 1       | 0         | 21.15                   | 21.23        | 21.05        | 21.80            |
|                                      |            | 1       | 2         | 21.33                   | 21.17        | 21.23        | 21.80            |
|                                      |            | 1       | 5         | 21.00                   | 21.17        | 21.10        | 21.80            |
|                                      |            | 3       | 0         | 21.33                   | 21.07        | 21.27        | 21.80            |
|                                      |            | 3       | 2         | 21.22                   | 21.20        | 21.21        | 21.80            |
|                                      |            | 3       | 3         | 21.33                   | 21.24        | 21.23        | 21.80            |
|                                      |            | 6       | 0         | 21.24                   | 21.00        | 21.24        | 21.80            |
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up<br>Limit |
|                                      |            |         |           | 19965/1711.5            | 20175/1732.5 | 20385/1753.5 |                  |
| 3MHz                                 | QPSK       | 1       | 0         | 20.03                   | 20.05        | 20.08        | 21.80            |
|                                      |            | 1       | 7         | 20.13                   | 20.22        | 20.13        | 21.80            |
|                                      |            | 1       | 14        | 20.04                   | 20.15        | 20.07        | 21.80            |
|                                      |            | 8       | 0         | 20.38                   | 20.36        | 20.29        | 21.80            |
|                                      |            | 8       | 4         | 20.38                   | 20.40        | 20.37        | 21.80            |
|                                      |            | 8       | 7         | 20.26                   | 20.37        | 20.31        | 21.80            |
|                                      |            | 15      | 0         | 20.27                   | 20.28        | 20.34        | 21.80            |
|                                      | 16QAM      | 1       | 0         | 21.31                   | 21.31        | 21.25        | 21.80            |
|                                      |            | 1       | 7         | 21.16                   | 21.20        | 21.24        | 21.80            |



|           |            | 1       | 14        | 21.11                   | 21.03        | 21.05        | 21.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 8       | 0         | 21.38                   | 21.02        | 21.34        | 21.80         |
|           |            | 8       | 4         | 21.34                   | 21.19        | 21.13        | 21.80         |
|           |            | 8       | 7         | 21.24                   | 21.05        | 21.10        | 21.80         |
|           |            | 15      | 0         | 21.41                   | 21.20        | 21.25        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 19975/1712.5            | 20175/1732.5 | 20375/1752.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 21.17                   | 21.28        | 21.09        | 21.80         |
|           |            | 1       | 13        | 21.23                   | 21.20        | 21.20        | 21.80         |
|           |            | 1       | 24        | 20.98                   | 21.02        | 21.18        | 21.80         |
|           |            | 12      | 0         | 21.28                   | 21.14        | 21.38        | 21.80         |
|           |            | 12      | 6         | 21.16                   | 21.22        | 21.20        | 21.80         |
|           |            | 12      | 13        | 21.21                   | 21.04        | 21.18        | 21.80         |
|           |            | 25      | 0         | 21.43                   | 21.24        | 21.32        | 21.80         |
|           | 16QAM      | 1       | 0         | 21.13                   | 21.14        | 21.19        | 21.80         |
|           |            | 1       | 13        | 21.24                   | 21.18        | 21.19        | 21.80         |
|           |            | 1       | 24        | 20.98                   | 21.13        | 20.96        | 21.80         |
|           |            | 12      | 0         | 21.34                   | 21.09        | 21.21        | 21.80         |
|           |            | 12      | 6         | 21.39                   | 21.21        | 21.18        | 21.80         |
|           |            | 12      | 13        | 21.41                   | 21.25        | 21.24        | 21.80         |
|           |            | 25      | 0         | 21.22                   | 21.00        | 21.29        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20000/1715              | 20175/1732.5 | 20350/1750   |               |
| 10MHz     | QPSK       | 1       | 0         | 21.15                   | 21.15        | 21.06        | 21.80         |
|           |            | 1       | 25        | 21.12                   | 21.16        | 21.12        | 21.80         |
|           |            | 1       | 49        | 21.09                   | 21.04        | 20.97        | 21.80         |
|           |            | 25      | 0         | 21.32                   | 21.13        | 21.34        | 21.80         |
|           |            | 25      | 13        | 21.28                   | 21.34        | 21.12        | 21.80         |
|           |            | 25      | 25        | 21.44                   | 21.06        | 21.15        | 21.80         |
|           |            | 50      | 0         | 21.32                   | 21.12        | 21.26        | 21.80         |
|           | 16QAM      | 1       | 0         | 21.34                   | 21.25        | 21.22        | 21.80         |
|           |            | 1       | 25        | 21.26                   | 21.29        | 21.25        | 21.80         |
|           |            | 1       | 49        | 21.11                   | 21.10        | 21.08        | 21.80         |
|           |            | 25      | 0         | 21.37                   | 20.97        | 21.21        | 21.80         |
|           |            | 25      | 13        | 21.27                   | 21.31        | 21.28        | 21.80         |
|           |            | 25      | 25        | 21.43                   | 21.09        | 21.18        | 21.80         |
|           |            | 50      | 0         | 21.26                   | 21.08        | 21.34        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20025/1717.5            | 20175/1732.5 | 20325/1747.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 21.20                   | 21.27        | 21.23        | 21.80         |
|           |            | 1       | 38        | 21.18                   | 21.20        | 21.10        | 21.80         |
|           |            | 1       | 74        | 21.13                   | 21.19        | 21.12        | 21.80         |
|           |            | 36      | 0         | 21.45                   | 21.13        | 21.23        | 21.80         |



|           |            | 36      | 18        | 21.25                   | 21.10        | 21.31        | 21.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 36      | 39        | 21.20                   | 21.03        | 21.11        | 21.80         |
|           |            | 75      | 0         | 21.29                   | 21.17        | 21.12        | 21.80         |
|           | 16QAM      | 1       | 0         | 21.10                   | 21.31        | 21.09        | 21.80         |
|           |            | 1       | 38        | 21.35                   | 21.26        | 21.26        | 21.80         |
|           |            | 1       | 74        | 21.01                   | 21.22        | 20.99        | 21.80         |
|           |            | 36      | 0         | 21.26                   | 20.98        | 21.32        | 21.80         |
|           |            | 36      | 18        | 21.30                   | 21.18        | 21.22        | 21.80         |
|           |            | 36      | 39        | 21.38                   | 21.08        | 21.10        | 21.80         |
|           |            | 75      | 0         | 21.25                   | 21.22        | 21.28        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20050/1720              | 20175/1732.5 | 20300/1745   |               |
| 20MHz     | QPSK       | 1       | 0         | 20.35                   | 20.40        | 20.37        | 21.80         |
|           |            | 1       | 50        | <b>20.47</b>            | <b>20.55</b> | <b>20.53</b> | 21.80         |
|           |            | 1       | 99        | 20.45                   | 20.49        | 20.39        | 21.80         |
|           |            | 50      | 0         | 20.54                   | 20.37        | 20.50        | 21.80         |
|           |            | 50      | 25        | 20.53                   | 20.57        | <b>20.56</b> | 21.80         |
|           |            | 50      | 50        | <b>20.58</b>            | <b>20.60</b> | 20.48        | 21.80         |
|           |            | 100     | 0         | <b>20.55</b>            | 20.45        | 20.49        | 21.80         |
|           | 16QAM      | 1       | 0         | 21.09                   | 21.24        | 21.20        | 21.80         |
|           |            | 1       | 50        | 21.16                   | 21.29        | 21.20        | 21.80         |
|           |            | 1       | 99        | 21.16                   | 21.09        | 21.00        | 21.80         |
|           |            | 50      | 0         | 21.26                   | 21.14        | 21.43        | 21.80         |
|           |            | 50      | 25        | 21.22                   | 21.22        | 21.32        | 21.80         |
|           |            | 50      | 50        | 21.32                   | 21.18        | 21.07        | 21.80         |
|           |            | 100     | 0         | 21.35                   | 21.03        | 21.17        | 21.80         |

| LTE TDD Band 66<br>Body(standalone)<br>Body(WWAN+2.4G/5G) |            |                  |        | Conducted Power(dBm)   |             |               | Tune-up<br>Limit |
|-----------------------------------------------------------|------------|------------------|--------|------------------------|-------------|---------------|------------------|
| Bandwidth                                                 | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |             |               |                  |
|                                                           |            |                  |        | 131979/1710.7          | 132322/1745 | 132665/1779.3 |                  |
| 1.4MHz                                                    | QPSK       | 1                | 0      | 21.76                  | 21.88       | 21.76         | 22.10            |
|                                                           |            | 1                | 2      | 21.82                  | 21.89       | 22.02         | 22.10            |
|                                                           |            | 1                | 5      | 21.72                  | 21.88       | 21.90         | 22.10            |
|                                                           |            | 3                | 0      | 21.53                  | 21.43       | 21.21         | 22.10            |
|                                                           |            | 3                | 2      | 21.55                  | 21.51       | 21.48         | 22.10            |
|                                                           |            | 3                | 3      | 21.46                  | 21.30       | 21.20         | 22.10            |
|                                                           |            | 6                | 0      | 21.42                  | 21.28       | 21.24         | 22.10            |
|                                                           | 16QAM      | 1                | 0      | 21.61                  | 21.87       | 21.70         | 22.10            |
|                                                           |            | 1                | 2      | 21.78                  | 22.00       | 21.95         | 22.10            |
|                                                           |            | 1                | 5      | 21.78                  | 21.77       | 21.92         | 22.10            |
|                                                           |            | 3                | 0      | 21.34                  | 21.51       | 21.20         | 22.10            |



|           |            | 3             | 2      | 21.44                  | 21.49       | 21.39         | 22.10         |
|-----------|------------|---------------|--------|------------------------|-------------|---------------|---------------|
|           |            | 3             | 3      | 21.47                  | 21.24       | 21.24         | 22.10         |
|           |            | 6             | 0      | 21.32                  | 21.26       | 21.29         | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 1319871711.5           | 132322/1745 | 132657/1778.5 |               |
| 3MHz      | QPSK       | 1             | 0      | 21.74                  | 21.87       | 21.81         | 22.10         |
|           |            | 1             | 7      | 21.93                  | 22.04       | 21.89         | 22.10         |
|           |            | 1             | 14     | 21.74                  | 21.86       | 21.95         | 22.10         |
|           |            | 8             | 0      | 21.51                  | 21.43       | 21.27         | 22.10         |
|           |            | 8             | 4      | 21.50                  | 21.45       | 21.50         | 22.10         |
|           |            | 8             | 7      | 21.50                  | 21.33       | 21.25         | 22.10         |
|           |            | 15            | 0      | 21.34                  | 21.24       | 21.25         | 22.10         |
|           | 16QAM      | 1             | 0      | 21.76                  | 21.75       | 21.70         | 22.10         |
|           |            | 1             | 7      | 21.79                  | 22.03       | 21.82         | 22.10         |
|           |            | 1             | 14     | 21.78                  | 21.78       | 21.93         | 22.10         |
|           |            | 8             | 0      | 21.41                  | 21.41       | 21.31         | 22.10         |
|           |            | 8             | 4      | 21.37                  | 21.43       | 21.50         | 22.10         |
|           |            | 8             | 7      | 21.52                  | 21.27       | 21.19         | 22.10         |
|           |            | 15            | 0      | 21.37                  | 21.31       | 21.35         | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 131997/1712.5          | 132322/1745 | 132647/1777.5 |               |
| 5MHz      | QPSK       | 1             | 0      | 21.62                  | 21.74       | 21.75         | 22.10         |
|           |            | 1             | 13     | 21.87                  | 22.04       | 21.83         | 22.10         |
|           |            | 1             | 24     | 21.90                  | 21.92       | 21.85         | 22.10         |
|           |            | 12            | 0      | 21.46                  | 21.38       | 21.26         | 22.10         |
|           |            | 12            | 6      | 21.53                  | 21.39       | 21.38         | 22.10         |
|           |            | 12            | 13     | 21.51                  | 21.30       | 21.20         | 22.10         |
|           |            | 25            | 0      | 21.35                  | 21.42       | 21.31         | 22.10         |
|           | 16QAM      | 1             | 0      | 21.63                  | 21.81       | 21.70         | 22.10         |
|           |            | 1             | 13     | 21.95                  | 21.97       | 21.99         | 22.10         |
|           |            | 1             | 24     | 21.81                  | 21.87       | 21.92         | 22.10         |
|           |            | 12            | 0      | 21.44                  | 21.46       | 21.33         | 22.10         |
|           |            | 12            | 6      | 21.38                  | 21.52       | 21.45         | 22.10         |
|           |            | 12            | 13     | 21.50                  | 21.43       | 21.25         | 22.10         |
|           |            | 25            | 0      | 21.52                  | 21.41       | 21.21         | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 132022/1715            | 132322/1745 | 132622/1775   |               |
| 10MHz     | QPSK       | 1             | 0      | 21.64                  | 21.90       | 21.75         | 22.10         |
|           |            | 1             | 25     | 21.93                  | 21.86       | 21.87         | 22.10         |
|           |            | 1             | 49     | 21.79                  | 21.88       | 21.83         | 22.10         |
|           |            | 25            | 0      | 21.41                  | 21.44       | 21.21         | 22.10         |
|           |            | 25            | 13     | 21.40                  | 21.47       | 21.48         | 22.10         |
|           |            | 25            | 25     | 21.41                  | 21.42       | 21.21         | 22.10         |



|           | 16QAM      | 50            | 0      | 21.36                  | 21.41        | 21.18         | 22.10         |
|-----------|------------|---------------|--------|------------------------|--------------|---------------|---------------|
|           |            | 1             | 0      | 21.66                  | 21.84        | 21.89         | 22.10         |
|           |            | 1             | 25     | 21.80                  | 21.93        | 21.87         | 22.10         |
|           |            | 1             | 49     | 21.87                  | 21.89        | 21.87         | 22.10         |
|           |            | 25            | 0      | 21.38                  | 21.53        | 21.24         | 22.10         |
|           |            | 25            | 13     | 21.46                  | 21.45        | 21.50         | 22.10         |
|           |            | 25            | 25     | 21.37                  | 21.31        | 21.24         | 22.10         |
|           |            | 50            | 0      | 21.40                  | 21.38        | 21.32         | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |               | Tune-up Limit |
|           |            |               |        | 132047/1717.5          | 132322/1745  | 132597/1772.5 |               |
| 15MHz     | QPSK       | 1             | 0      | 21.62                  | 21.80        | 21.83         | 22.10         |
|           |            | 1             | 38     | 21.84                  | 21.90        | 21.91         | 22.10         |
|           |            | 1             | 74     | 21.72                  | 21.91        | 21.85         | 22.10         |
|           |            | 36            | 0      | 21.50                  | 21.50        | 21.13         | 22.10         |
|           |            | 36            | 18     | 21.49                  | 21.51        | 21.38         | 22.10         |
|           |            | 36            | 39     | 21.57                  | 21.24        | 21.28         | 22.10         |
|           |            | 75            | 0      | 21.32                  | 21.29        | 21.22         | 22.10         |
|           | 16QAM      | 1             | 0      | 21.72                  | 21.72        | 21.72         | 22.10         |
|           |            | 1             | 38     | 21.95                  | 21.92        | 21.87         | 22.10         |
|           |            | 1             | 74     | 21.81                  | 21.85        | 21.85         | 22.10         |
|           |            | 36            | 0      | 21.51                  | 21.40        | 21.25         | 22.10         |
|           |            | 36            | 18     | 21.44                  | 21.42        | 21.45         | 22.10         |
|           |            | 36            | 39     | 21.41                  | 21.25        | 21.19         | 22.10         |
|           |            | 75            | 0      | 21.33                  | 21.41        | 21.17         | 22.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |               | Tune-up Limit |
|           |            |               |        | 132072/1720            | 132322/1745  | 132572/1770   |               |
| 20MHz     | QPSK       | 1             | 0      | 21.66                  | 21.77        | 21.75         | 22.10         |
|           |            | 1             | 50     | <b>21.82</b>           | <b>21.90</b> | <b>21.87</b>  | 22.10         |
|           |            | 1             | 99     | 21.75                  | 21.81        | 21.80         | 22.10         |
|           |            | 50            | 0      | 21.38                  | 21.38        | 21.18         | 22.10         |
|           |            | 50            | 25     | 21.40                  | <b>21.41</b> | <b>21.37</b>  | 22.10         |
|           |            | 50            | 50     | <b>21.42</b>           | 21.29        | 21.24         | 22.10         |
|           |            | 100           | 0      | <b>21.37</b>           | 21.27        | 21.22         | 22.10         |
|           | 16QAM      | 1             | 0      | 21.66                  | 21.91        | 21.71         | 22.10         |
|           |            | 1             | 50     | 21.85                  | 21.97        | 22.02         | 22.10         |
|           |            | 1             | 99     | 21.88                  | 21.95        | 21.85         | 22.10         |
|           |            | 50            | 0      | 21.49                  | 21.38        | 21.14         | 22.10         |
|           |            | 50            | 25     | 21.55                  | 21.39        | 21.50         | 22.10         |
|           |            | 50            | 50     | 21.45                  | 21.24        | 21.36         | 22.10         |
|           |            | 100           | 0      | 21.52                  | 21.31        | 21.31         | 22.10         |



## WWAN Antenna Up

| LTE FDD Band 2<br>head(standalone) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                    |            |         |           | 18607/1850.7            | 18900/1880 | 19193/1909.3 |                  |
| 1.4MHz                             | QPSK       | 1       | 0         | 15.86                   | 15.95      | 15.83        | 17.30            |
|                                    |            | 1       | 2         | 15.77                   | 15.89      | 15.76        | 17.30            |
|                                    |            | 1       | 5         | 15.94                   | 15.89      | 15.63        | 17.30            |
|                                    |            | 3       | 0         | 15.66                   | 15.93      | 15.97        | 17.30            |
|                                    |            | 3       | 2         | 15.97                   | 16.04      | 16.00        | 17.30            |
|                                    |            | 3       | 3         | 15.98                   | 16.03      | 15.81        | 17.30            |
|                                    |            | 6       | 0         | 15.70                   | 15.79      | 15.90        | 17.30            |
|                                    | 16QAM      | 1       | 0         | 15.77                   | 15.87      | 15.66        | 17.30            |
|                                    |            | 1       | 2         | 15.98                   | 15.88      | 15.82        | 17.30            |
|                                    |            | 1       | 5         | 15.94                   | 15.92      | 15.88        | 17.30            |
|                                    |            | 3       | 0         | 15.95                   | 15.94      | 16.09        | 17.30            |
|                                    |            | 3       | 2         | 15.81                   | 16.02      | 15.83        | 17.30            |
|                                    |            | 3       | 3         | 15.93                   | 15.80      | 15.77        | 17.30            |
|                                    |            | 6       | 0         | 15.91                   | 15.93      | 16.08        | 17.30            |
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                    |            |         |           | 18615/1851.5            | 18900/1880 | 19185/1908.5 |                  |
| 3MHz                               | QPSK       | 1       | 0         | 15.79                   | 15.79      | 15.60        | 17.30            |
|                                    |            | 1       | 7         | 15.81                   | 16.04      | 15.91        | 17.30            |
|                                    |            | 1       | 14        | 15.95                   | 15.74      | 15.71        | 17.30            |
|                                    |            | 8       | 0         | 15.80                   | 15.78      | 15.94        | 17.30            |
|                                    |            | 8       | 4         | 15.74                   | 15.91      | 15.88        | 17.30            |
|                                    |            | 8       | 7         | 15.92                   | 15.94      | 15.87        | 17.30            |
|                                    |            | 15      | 0         | 15.81                   | 15.89      | 15.86        | 17.30            |
|                                    | 16QAM      | 1       | 0         | 15.83                   | 15.95      | 15.64        | 17.30            |
|                                    |            | 1       | 7         | 15.90                   | 16.06      | 15.93        | 17.30            |
|                                    |            | 1       | 14        | 15.69                   | 15.87      | 15.61        | 17.30            |
|                                    |            | 8       | 0         | 15.73                   | 15.79      | 16.05        | 17.30            |
|                                    |            | 8       | 4         | 15.81                   | 16.02      | 16.05        | 17.30            |
|                                    |            | 8       | 7         | 15.75                   | 15.81      | 15.99        | 17.30            |
|                                    |            | 15      | 0         | 15.87                   | 15.93      | 16.03        | 17.30            |
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                    |            |         |           | 18625/1852.5            | 18900/1880 | 19175/1907.5 |                  |
| 5MHz                               | QPSK       | 1       | 0         | 15.70                   | 15.90      | 15.79        | 17.30            |
|                                    |            | 1       | 13        | 15.89                   | 16.05      | 15.81        | 17.30            |
|                                    |            | 1       | 24        | 15.86                   | 15.82      | 15.75        | 17.30            |
|                                    |            | 12      | 0         | 15.71                   | 15.89      | 15.89        | 17.30            |
|                                    |            | 12      | 6         | 15.89                   | 16.11      | 15.91        | 17.30            |
|                                    |            | 12      | 13        | 15.92                   | 15.98      | 15.81        | 17.30            |



|           | 16QAM      | 25      | 0         | 15.72                   | 15.95      | 15.95        | 17.30         |
|-----------|------------|---------|-----------|-------------------------|------------|--------------|---------------|
|           |            | 1       | 0         | 15.58                   | 15.87      | 15.76        | 17.30         |
|           |            | 1       | 13        | 15.75                   | 15.79      | 15.99        | 17.30         |
|           |            | 1       | 24        | 15.69                   | 15.85      | 15.78        | 17.30         |
|           |            | 12      | 0         | 15.93                   | 15.84      | 16.01        | 17.30         |
|           |            | 12      | 6         | 15.93                   | 16.06      | 15.87        | 17.30         |
|           |            | 12      | 13        | 15.73                   | 15.86      | 15.78        | 17.30         |
|           |            | 25      | 0         | 15.73                   | 15.91      | 15.92        | 17.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18650/1855              | 18900/1880 | 19150/1905   |               |
| 10MHz     | QPSK       | 1       | 0         | 15.61                   | 15.76      | 15.59        | 17.30         |
|           |            | 1       | 25        | 15.75                   | 15.94      | 15.96        | 17.30         |
|           |            | 1       | 49        | 15.88                   | 15.78      | 15.75        | 17.30         |
|           |            | 25      | 0         | 15.91                   | 15.93      | 16.04        | 17.30         |
|           |            | 25      | 13        | 15.82                   | 15.91      | 15.87        | 17.30         |
|           |            | 25      | 25        | 15.98                   | 15.82      | 15.93        | 17.30         |
|           |            | 50      | 0         | 15.82                   | 15.85      | 15.99        | 17.30         |
|           | 16QAM      | 1       | 0         | 15.80                   | 15.76      | 15.68        | 17.30         |
|           |            | 1       | 25        | 15.89                   | 15.90      | 15.76        | 17.30         |
|           |            | 1       | 49        | 15.77                   | 15.78      | 15.69        | 17.30         |
|           |            | 25      | 0         | 15.86                   | 15.91      | 15.92        | 17.30         |
|           |            | 25      | 13        | 15.81                   | 15.99      | 15.97        | 17.30         |
|           |            | 25      | 25        | 15.76                   | 15.91      | 15.93        | 17.30         |
|           |            | 50      | 0         | 15.82                   | 15.93      | 15.85        | 17.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18675/1857.5            | 18900/1880 | 19125/1902.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 15.78                   | 15.73      | 15.74        | 17.30         |
|           |            | 1       | 38        | 15.76                   | 15.91      | 15.78        | 17.30         |
|           |            | 1       | 74        | 15.93                   | 15.73      | 15.75        | 17.30         |
|           |            | 36      | 0         | 15.95                   | 15.73      | 16.05        | 17.30         |
|           |            | 36      | 18        | 15.74                   | 15.94      | 16.02        | 17.30         |
|           |            | 36      | 39        | 15.92                   | 15.97      | 15.94        | 17.30         |
|           |            | 75      | 0         | 15.89                   | 15.98      | 16.04        | 17.30         |
|           | 16QAM      | 1       | 0         | 15.60                   | 15.88      | 15.71        | 17.30         |
|           |            | 1       | 38        | 15.89                   | 15.78      | 15.74        | 17.30         |
|           |            | 1       | 74        | 15.80                   | 15.81      | 15.86        | 17.30         |
|           |            | 36      | 0         | 15.77                   | 15.91      | 15.90        | 17.30         |
|           |            | 36      | 18        | 15.91                   | 15.88      | 15.91        | 17.30         |
|           |            | 36      | 39        | 15.87                   | 15.87      | 15.94        | 17.30         |
|           |            | 75      | 0         | 15.89                   | 15.87      | 15.89        | 17.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18700/1860              | 18900/1880 | 19100/1900   |               |
| 20MHz     | QPSK       | 1       | 0         | 15.71                   | 15.81      | 15.72        | 17.30         |



|  |       |     |    |              |              |              |       |
|--|-------|-----|----|--------------|--------------|--------------|-------|
|  |       | 1   | 50 | <b>15.88</b> | <b>15.92</b> | <b>15.88</b> | 17.30 |
|  |       | 1   | 99 | 15.80        | 15.85        | 15.75        | 17.30 |
|  |       | 50  | 0  | 15.80        | 15.84        | <b>15.98</b> | 17.30 |
|  |       | 50  | 25 | <b>15.85</b> | <b>15.96</b> | 15.93        | 17.30 |
|  |       | 50  | 50 | <b>15.85</b> | 15.92        | 15.90        | 17.30 |
|  |       | 100 | 0  | 15.83        | 15.91        | <b>15.94</b> | 17.30 |
|  | 16QAM | 1   | 0  | 15.64        | 15.69        | 15.70        | 17.30 |
|  |       | 1   | 50 | 15.86        | 15.86        | 16.01        | 17.30 |
|  |       | 1   | 99 | 15.85        | 15.88        | 15.65        | 17.30 |
|  |       | 50  | 0  | 15.95        | 15.81        | 16.09        | 17.30 |
|  |       | 50  | 25 | 15.85        | 15.89        | 16.05        | 17.30 |
|  |       | 50  | 50 | 15.92        | 15.84        | 15.85        | 17.30 |
|  |       | 100 | 0  | 15.90        | 15.76        | 15.79        | 17.30 |

| LTE FDD Band 2<br>Body(standalone) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                    |            |         |           | 18607/1850.7            | 18900/1880 | 19193/1909.3 |                  |
| 1.4MHz                             | QPSK       | 1       | 0         | 16.95                   | 16.86      | 17.02        | 18.30            |
|                                    |            | 1       | 2         | 16.98                   | 16.96      | 17.18        | 18.30            |
|                                    |            | 1       | 5         | 16.87                   | 16.92      | 17.08        | 18.30            |
|                                    |            | 3       | 0         | 16.99                   | 17.07      | 17.23        | 18.30            |
|                                    |            | 3       | 2         | 17.14                   | 17.10      | 17.01        | 18.30            |
|                                    |            | 3       | 3         | 17.12                   | 17.02      | 17.09        | 18.30            |
|                                    |            | 6       | 0         | 17.03                   | 17.00      | 17.10        | 18.30            |
|                                    | 16QAM      | 1       | 0         | 16.73                   | 16.92      | 17.11        | 18.30            |
|                                    |            | 1       | 2         | 16.89                   | 17.12      | 17.01        | 18.30            |
|                                    |            | 1       | 5         | 16.81                   | 17.13      | 17.10        | 18.30            |
|                                    |            | 3       | 0         | 17.09                   | 17.09      | 17.16        | 18.30            |
|                                    |            | 3       | 2         | 17.15                   | 17.00      | 17.07        | 18.30            |
|                                    |            | 3       | 3         | 16.87                   | 17.09      | 16.98        | 18.30            |
|                                    |            | 6       | 0         | 16.91                   | 16.92      | 17.23        | 18.30            |
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                    |            |         |           | 18615/1851.5            | 18900/1880 | 19185/1908.5 |                  |
| 3MHz                               | QPSK       | 1       | 0         | 16.82                   | 17.07      | 17.07        | 18.30            |
|                                    |            | 1       | 7         | 16.88                   | 17.05      | 17.12        | 18.30            |
|                                    |            | 1       | 14        | 17.05                   | 17.00      | 17.05        | 18.30            |
|                                    |            | 8       | 0         | 17.14                   | 17.07      | 17.27        | 18.30            |
|                                    |            | 8       | 4         | 16.92                   | 17.02      | 17.06        | 18.30            |
|                                    |            | 8       | 7         | 16.98                   | 17.15      | 17.07        | 18.30            |
|                                    |            | 15      | 0         | 17.04                   | 17.18      | 17.13        | 18.30            |
|                                    | 16QAM      | 1       | 0         | 16.72                   | 17.15      | 16.97        | 18.30            |
|                                    |            | 1       | 7         | 17.15                   | 17.19      | 16.99        | 18.30            |



|           |            | 1       | 14        | 16.89                   | 17.06      | 17.02        | 18.30         |
|-----------|------------|---------|-----------|-------------------------|------------|--------------|---------------|
|           |            | 8       | 0         | 16.85                   | 17.09      | 17.18        | 18.30         |
|           |            | 8       | 4         | 16.95                   | 17.20      | 17.09        | 18.30         |
|           |            | 8       | 7         | 17.05                   | 17.18      | 17.19        | 18.30         |
|           |            | 15      | 0         | 16.89                   | 16.92      | 17.29        | 18.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18625/1852.5            | 18900/1880 | 19175/1907.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 16.93                   | 16.99      | 17.13        | 18.30         |
|           |            | 1       | 13        | 17.15                   | 16.95      | 17.22        | 18.30         |
|           |            | 1       | 24        | 16.84                   | 16.91      | 17.15        | 18.30         |
|           |            | 12      | 0         | 17.05                   | 17.15      | 17.11        | 18.30         |
|           |            | 12      | 6         | 17.00                   | 17.06      | 17.04        | 18.30         |
|           |            | 12      | 13        | 16.89                   | 16.96      | 17.12        | 18.30         |
|           |            | 25      | 0         | 17.05                   | 17.10      | 17.24        | 18.30         |
|           | 16QAM      | 1       | 0         | 16.89                   | 16.86      | 16.93        | 18.30         |
|           |            | 1       | 13        | 17.14                   | 17.01      | 17.19        | 18.30         |
|           |            | 1       | 24        | 16.91                   | 17.02      | 17.14        | 18.30         |
|           |            | 12      | 0         | 17.05                   | 17.07      | 17.15        | 18.30         |
|           |            | 12      | 6         | 17.06                   | 17.10      | 17.16        | 18.30         |
|           |            | 12      | 13        | 16.87                   | 17.12      | 16.99        | 18.30         |
|           |            | 25      | 0         | 16.99                   | 17.13      | 17.26        | 18.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18650/1855              | 18900/1880 | 19150/1905   |               |
| 10MHz     | QPSK       | 1       | 0         | 16.78                   | 16.88      | 17.12        | 18.30         |
|           |            | 1       | 25        | 16.95                   | 17.04      | 17.06        | 18.30         |
|           |            | 1       | 49        | 16.91                   | 17.08      | 17.02        | 18.30         |
|           |            | 25      | 0         | 16.85                   | 17.01      | 17.08        | 18.30         |
|           |            | 25      | 13        | 17.12                   | 17.04      | 17.22        | 18.30         |
|           |            | 25      | 25        | 16.97                   | 17.23      | 17.15        | 18.30         |
|           |            | 50      | 0         | 17.19                   | 17.08      | 17.09        | 18.30         |
|           | 16QAM      | 1       | 0         | 16.84                   | 16.91      | 17.15        | 18.30         |
|           |            | 1       | 25        | 17.09                   | 17.01      | 17.08        | 18.30         |
|           |            | 1       | 49        | 16.85                   | 17.06      | 17.21        | 18.30         |
|           |            | 25      | 0         | 16.88                   | 17.22      | 17.09        | 18.30         |
|           |            | 25      | 13        | 17.15                   | 17.23      | 17.09        | 18.30         |
|           |            | 25      | 25        | 17.11                   | 17.11      | 16.94        | 18.30         |
|           |            | 50      | 0         | 16.91                   | 17.19      | 17.23        | 18.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18675/1857.5            | 18900/1880 | 19125/1902.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 16.85                   | 17.11      | 16.94        | 18.30         |
|           |            | 1       | 38        | 16.89                   | 16.98      | 17.02        | 18.30         |
|           |            | 1       | 74        | 16.89                   | 16.94      | 17.06        | 18.30         |
|           |            | 36      | 0         | 17.00                   | 17.21      | 17.16        | 18.30         |



|           |            | 36      | 18        | 16.96                   | 17.23        | 17.22        | 18.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 36      | 39        | 16.91                   | 16.97        | 17.11        | 18.30         |
|           |            | 75      | 0         | 17.17                   | 17.14        | 17.28        | 18.30         |
|           | 16QAM      | 1       | 0         | 16.91                   | 16.98        | 17.09        | 18.30         |
|           |            | 1       | 38        | 16.88                   | 17.21        | 17.14        | 18.30         |
|           |            | 1       | 74        | 17.05                   | 16.94        | 17.09        | 18.30         |
|           |            | 36      | 0         | 17.14                   | 17.00        | 17.17        | 18.30         |
|           |            | 36      | 18        | 17.05                   | 17.20        | 17.06        | 18.30         |
|           |            | 36      | 39        | 17.06                   | 17.15        | 17.00        | 18.30         |
|           |            | 75      | 0         | 17.11                   | 17.21        | 17.12        | 18.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 18700/1860              | 18900/1880   | 19100/1900   |               |
| 20MHz     | QPSK       | 1       | 0         | 16.85                   | 17.00        | 17.06        | 18.30         |
|           |            | 1       | 50        | <b>17.00</b>            | <b>17.08</b> | <b>17.14</b> | 18.30         |
|           |            | 1       | 99        | 16.96                   | 16.99        | 17.06        | 18.30         |
|           |            | 50      | 0         | 16.99                   | 17.09        | <b>17.22</b> | 18.30         |
|           |            | 50      | 25        | <b>17.06</b>            | <b>17.15</b> | 17.14        | 18.30         |
|           |            | 50      | 50        | 17.02                   | 17.11        | 17.09        | 18.30         |
|           |            | 100     | 0         | 17.04                   | 17.06        | <b>17.17</b> | 18.30         |
|           | 16QAM      | 1       | 0         | 16.93                   | 16.86        | 16.95        | 18.30         |
|           |            | 1       | 50        | 16.93                   | 17.07        | 17.05        | 18.30         |
|           |            | 1       | 99        | 16.89                   | 16.91        | 17.18        | 18.30         |
|           |            | 50      | 0         | 17.09                   | 17.07        | 17.25        | 18.30         |
|           |            | 50      | 25        | 17.09                   | 17.12        | 17.16        | 18.30         |
|           |            | 50      | 50        | 17.10                   | 17.24        | 17.02        | 18.30         |
|           |            | 100     | 0         | 17.02                   | 16.93        | 17.20        | 18.30         |

| LTE FDD Band 2<br>head(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|--------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                      |            |         |           | 18607/1850.7            | 18900/1880 | 19193/1909.3 |                  |
| 1.4MHz                               | QPSK       | 1       | 0         | 14.76                   | 14.71      | 14.58        | 16.30            |
|                                      |            | 1       | 2         | 14.70                   | 15.04      | 14.94        | 16.30            |
|                                      |            | 1       | 5         | 14.58                   | 14.82      | 14.78        | 16.30            |
|                                      |            | 3       | 0         | 14.74                   | 14.91      | 14.87        | 16.30            |
|                                      |            | 3       | 2         | 14.71                   | 14.82      | 14.82        | 16.30            |
|                                      |            | 3       | 3         | 14.78                   | 14.78      | 14.77        | 16.30            |
|                                      |            | 6       | 0         | 14.91                   | 14.98      | 14.98        | 16.30            |
|                                      | 16QAM      | 1       | 0         | 14.72                   | 14.73      | 14.63        | 16.30            |
|                                      |            | 1       | 2         | 14.89                   | 14.97      | 14.92        | 16.30            |
|                                      |            | 1       | 5         | 14.58                   | 14.90      | 14.63        | 16.30            |
|                                      |            | 3       | 0         | 14.63                   | 14.73      | 14.90        | 16.30            |
|                                      |            | 3       | 2         | 14.92                   | 14.85      | 15.00        | 16.30            |



|           |            | 3       | 3         | 14.68                   | 14.90      | 14.81        | 16.30         |
|-----------|------------|---------|-----------|-------------------------|------------|--------------|---------------|
|           |            | 6       | 0         | 14.80                   | 15.02      | 15.01        | 16.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18615/1851.5            | 18900/1880 | 19185/1908.5 |               |
| 3MHz      | QPSK       | 1       | 0         | 14.80                   | 14.83      | 14.84        | 16.30         |
|           |            | 1       | 7         | 14.83                   | 15.04      | 14.71        | 16.30         |
|           |            | 1       | 14        | 14.79                   | 15.02      | 14.70        | 16.30         |
|           |            | 8       | 0         | 14.81                   | 14.90      | 14.92        | 16.30         |
|           |            | 8       | 4         | 14.98                   | 14.97      | 15.06        | 16.30         |
|           |            | 8       | 7         | 14.85                   | 14.94      | 14.71        | 16.30         |
|           |            | 15      | 0         | 14.68                   | 14.95      | 14.80        | 16.30         |
|           | 16QAM      | 1       | 0         | 14.68                   | 14.71      | 14.64        | 16.30         |
|           |            | 1       | 7         | 14.77                   | 14.95      | 14.87        | 16.30         |
|           |            | 1       | 14        | 14.77                   | 14.88      | 14.65        | 16.30         |
|           |            | 8       | 0         | 14.82                   | 14.84      | 14.83        | 16.30         |
|           |            | 8       | 4         | 14.98                   | 14.83      | 14.88        | 16.30         |
|           |            | 8       | 7         | 14.71                   | 14.73      | 14.80        | 16.30         |
|           |            | 15      | 0         | 14.87                   | 14.87      | 15.10        | 16.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18625/1852.5            | 18900/1880 | 19175/1907.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 14.63                   | 14.69      | 14.73        | 16.30         |
|           |            | 1       | 13        | 14.91                   | 14.99      | 14.85        | 16.30         |
|           |            | 1       | 24        | 14.61                   | 14.82      | 14.79        | 16.30         |
|           |            | 12      | 0         | 14.86                   | 14.72      | 14.99        | 16.30         |
|           |            | 12      | 6         | 14.97                   | 15.00      | 14.95        | 16.30         |
|           |            | 12      | 13        | 14.96                   | 14.74      | 14.71        | 16.30         |
|           |            | 25      | 0         | 14.63                   | 14.95      | 14.96        | 16.30         |
|           | 16QAM      | 1       | 0         | 14.83                   | 14.68      | 14.72        | 16.30         |
|           |            | 1       | 13        | 14.82                   | 14.76      | 14.89        | 16.30         |
|           |            | 1       | 24        | 14.74                   | 15.01      | 14.75        | 16.30         |
|           |            | 12      | 0         | 14.75                   | 14.68      | 15.04        | 16.30         |
|           |            | 12      | 6         | 14.96                   | 15.00      | 14.85        | 16.30         |
|           |            | 12      | 13        | 14.82                   | 14.99      | 14.96        | 16.30         |
|           |            | 25      | 0         | 14.89                   | 14.76      | 14.89        | 16.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 18650/1855              | 18900/1880 | 19150/1905   |               |
| 10MHz     | QPSK       | 1       | 0         | 14.67                   | 14.79      | 14.82        | 16.30         |
|           |            | 1       | 25        | 14.92                   | 14.75      | 14.92        | 16.30         |
|           |            | 1       | 49        | 14.85                   | 14.82      | 14.64        | 16.30         |
|           |            | 25      | 0         | 14.80                   | 14.81      | 14.86        | 16.30         |
|           |            | 25      | 13        | 14.83                   | 14.91      | 14.95        | 16.30         |
|           |            | 25      | 25        | 14.85                   | 14.75      | 14.77        | 16.30         |
|           |            | 50      | 0         | 14.91                   | 14.84      | 15.01        | 16.30         |



|           | 16QAM      | 1       | 0         | 14.74                   | 14.75        | 14.60        | 16.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 1       | 25        | 14.88                   | 14.88        | 14.92        | 16.30         |
|           |            | 1       | 49        | 14.61                   | 14.79        | 14.59        | 16.30         |
|           |            | 25      | 0         | 14.63                   | 14.87        | 14.83        | 16.30         |
|           |            | 25      | 13        | 14.98                   | 14.82        | 14.87        | 16.30         |
|           |            | 25      | 25        | 14.81                   | 14.99        | 14.91        | 16.30         |
|           |            | 50      | 0         | 14.63                   | 14.87        | 14.87        | 16.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 18675/1857.5            | 18900/1880   | 19125/1902.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 14.73                   | 14.71        | 14.72        | 16.30         |
|           |            | 1       | 38        | 14.92                   | 14.98        | 14.88        | 16.30         |
|           |            | 1       | 74        | 14.69                   | 14.80        | 14.81        | 16.30         |
|           |            | 36      | 0         | 14.84                   | 14.70        | 15.05        | 16.30         |
|           |            | 36      | 18        | 14.78                   | 14.93        | 14.80        | 16.30         |
|           |            | 36      | 39        | 14.87                   | 14.89        | 14.70        | 16.30         |
|           |            | 75      | 0         | 14.75                   | 14.86        | 15.09        | 16.30         |
|           | 16QAM      | 1       | 0         | 14.75                   | 14.89        | 14.84        | 16.30         |
|           |            | 1       | 38        | 14.74                   | 15.03        | 14.82        | 16.30         |
|           |            | 1       | 74        | 14.70                   | 14.91        | 14.58        | 16.30         |
|           |            | 36      | 0         | 14.90                   | 14.82        | 14.93        | 16.30         |
|           |            | 36      | 18        | 14.78                   | 15.04        | 14.97        | 16.30         |
|           |            | 36      | 39        | 14.70                   | 14.82        | 14.74        | 16.30         |
|           |            | 75      | 0         | 14.81                   | 14.95        | 14.98        | 16.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 18700/1860              | 18900/1880   | 19100/1900   |               |
| 20MHz     | QPSK       | 1       | 0         | 14.68                   | 14.78        | 14.71        | 16.30         |
|           |            | 1       | 50        | <b>14.83</b>            | <b>14.90</b> | <b>14.86</b> | 16.30         |
|           |            | 1       | 99        | 14.72                   | 14.87        | 14.71        | 16.30         |
|           |            | 50      | 0         | 14.75                   | 14.82        | <b>14.97</b> | 16.30         |
|           |            | 50      | 25        | <b>14.84</b>            | <b>14.94</b> | 14.92        | 16.30         |
|           |            | 50      | 50        | 14.82                   | 14.85        | 14.83        | 16.30         |
|           |            | 100     | 0         | 14.78                   | 14.88        | <b>14.95</b> | 16.30         |
|           | 16QAM      | 1       | 0         | 14.79                   | 14.88        | 14.61        | 16.30         |
|           |            | 1       | 50        | 14.83                   | 14.82        | 14.84        | 16.30         |
|           |            | 1       | 99        | 14.68                   | 14.97        | 14.79        | 16.30         |
|           |            | 50      | 0         | 14.85                   | 14.68        | 14.95        | 16.30         |
|           |            | 50      | 25        | 14.83                   | 14.86        | 14.98        | 16.30         |
|           |            | 50      | 50        | 14.74                   | 14.89        | 14.94        | 16.30         |
|           |            | 100     | 0         | 14.77                   | 14.86        | 14.80        | 16.30         |



| LTE FDD Band 2<br>Body(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|--------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                      |            |         |           | 18607/1850.7            | 18900/1880 | 19193/1909.3 |                  |
| 1.4MHz                               | QPSK       | 1       | 0         | 16.31                   | 16.59      | 16.67        | 17.80            |
|                                      |            | 1       | 2         | 16.44                   | 16.72      | 16.57        | 17.80            |
|                                      |            | 1       | 5         | 16.51                   | 16.51      | 16.46        | 17.80            |
|                                      |            | 3       | 0         | 16.63                   | 16.48      | 16.69        | 17.80            |
|                                      |            | 3       | 2         | 16.55                   | 16.55      | 16.57        | 17.80            |
|                                      |            | 3       | 3         | 16.54                   | 16.64      | 16.60        | 17.80            |
|                                      |            | 6       | 0         | 16.61                   | 16.60      | 16.67        | 17.80            |
|                                      | 16QAM      | 1       | 0         | 16.52                   | 16.50      | 16.65        | 17.80            |
|                                      |            | 1       | 2         | 16.51                   | 16.60      | 16.63        | 17.80            |
|                                      |            | 1       | 5         | 16.47                   | 16.46      | 16.63        | 17.80            |
|                                      |            | 3       | 0         | 16.48                   | 16.50      | 16.79        | 17.80            |
|                                      |            | 3       | 2         | 16.56                   | 16.58      | 16.55        | 17.80            |
|                                      |            | 3       | 3         | 16.47                   | 16.70      | 16.62        | 17.80            |
|                                      |            | 6       | 0         | 16.54                   | 16.51      | 16.58        | 17.80            |
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                      |            |         |           | 18615/1851.5            | 18900/1880 | 19185/1908.5 |                  |
| 3MHz                                 | QPSK       | 1       | 0         | 16.38                   | 16.68      | 16.65        | 17.80            |
|                                      |            | 1       | 7         | 16.42                   | 16.74      | 16.59        | 17.80            |
|                                      |            | 1       | 14        | 16.42                   | 16.53      | 16.52        | 17.80            |
|                                      |            | 8       | 0         | 16.43                   | 16.53      | 16.68        | 17.80            |
|                                      |            | 8       | 4         | 16.53                   | 16.56      | 16.59        | 17.80            |
|                                      |            | 8       | 7         | 16.73                   | 16.79      | 16.58        | 17.80            |
|                                      |            | 15      | 0         | 16.43                   | 16.63      | 16.73        | 17.80            |
|                                      | 16QAM      | 1       | 0         | 16.42                   | 16.50      | 16.55        | 17.80            |
|                                      |            | 1       | 7         | 16.67                   | 16.76      | 16.72        | 17.80            |
|                                      |            | 1       | 14        | 16.59                   | 16.67      | 16.69        | 17.80            |
|                                      |            | 8       | 0         | 16.44                   | 16.45      | 16.61        | 17.80            |
|                                      |            | 8       | 4         | 16.60                   | 16.53      | 16.66        | 17.80            |
|                                      |            | 8       | 7         | 16.74                   | 16.69      | 16.82        | 17.80            |
|                                      |            | 15      | 0         | 16.50                   | 16.61      | 16.70        | 17.80            |
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                      |            |         |           | 18625/1852.5            | 18900/1880 | 19175/1907.5 |                  |
| 5MHz                                 | QPSK       | 1       | 0         | 16.59                   | 16.57      | 16.71        | 17.80            |
|                                      |            | 1       | 13        | 16.42                   | 16.62      | 16.65        | 17.80            |
|                                      |            | 1       | 24        | 16.60                   | 16.66      | 16.42        | 17.80            |
|                                      |            | 12      | 0         | 16.59                   | 16.47      | 16.90        | 17.80            |
|                                      |            | 12      | 6         | 16.72                   | 16.68      | 16.62        | 17.80            |
|                                      |            | 12      | 13        | 16.67                   | 16.55      | 16.77        | 17.80            |
|                                      |            | 25      | 0         | 16.61                   | 16.48      | 16.76        | 17.80            |



|           | 16QAM      | 1       | 0         | 16.56                   | 16.56        | 16.72        | 17.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 1       | 13        | 16.54                   | 16.50        | 16.75        | 17.80         |
|           |            | 1       | 24        | 16.35                   | 16.43        | 16.52        | 17.80         |
|           |            | 12      | 0         | 16.58                   | 16.46        | 16.87        | 17.80         |
|           |            | 12      | 6         | 16.73                   | 16.62        | 16.57        | 17.80         |
|           |            | 12      | 13        | 16.60                   | 16.51        | 16.60        | 17.80         |
|           |            | 25      | 0         | 16.51                   | 16.65        | 16.58        | 17.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 18650/1855              | 18900/1880   | 19150/1905   |               |
| 10MHz     | QPSK       | 1       | 0         | 16.57                   | 16.54        | 16.64        | 17.80         |
|           |            | 1       | 25        | 16.67                   | 16.69        | 16.63        | 17.80         |
|           |            | 1       | 49        | 16.37                   | 16.64        | 16.59        | 17.80         |
|           |            | 25      | 0         | 16.46                   | 16.45        | 16.64        | 17.80         |
|           |            | 25      | 13        | 16.61                   | 16.79        | 16.77        | 17.80         |
|           |            | 25      | 25        | 16.74                   | 16.74        | 16.55        | 17.80         |
|           |            | 50      | 0         | 16.61                   | 16.56        | 16.60        | 17.80         |
|           | 16QAM      | 1       | 0         | 16.52                   | 16.53        | 16.68        | 17.80         |
|           |            | 1       | 25        | 16.65                   | 16.54        | 16.52        | 17.80         |
|           |            | 1       | 49        | 16.42                   | 16.55        | 16.70        | 17.80         |
|           |            | 25      | 0         | 16.62                   | 16.49        | 16.68        | 17.80         |
|           |            | 25      | 13        | 16.73                   | 16.72        | 16.73        | 17.80         |
|           |            | 25      | 25        | 16.70                   | 16.57        | 16.60        | 17.80         |
|           |            | 50      | 0         | 16.56                   | 16.77        | 16.75        | 17.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 18675/1857.5            | 18900/1880   | 19125/1902.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 16.58                   | 16.53        | 16.58        | 17.80         |
|           |            | 1       | 38        | 16.58                   | 16.63        | 16.77        | 17.80         |
|           |            | 1       | 74        | 16.38                   | 16.49        | 16.43        | 17.80         |
|           |            | 36      | 0         | 16.41                   | 16.57        | 16.87        | 17.80         |
|           |            | 36      | 18        | 16.60                   | 16.54        | 16.80        | 17.80         |
|           |            | 36      | 39        | 16.71                   | 16.61        | 16.64        | 17.80         |
|           |            | 75      | 0         | 16.60                   | 16.56        | 16.59        | 17.80         |
|           | 16QAM      | 1       | 0         | 16.53                   | 16.46        | 16.44        | 17.80         |
|           |            | 1       | 38        | 16.55                   | 16.54        | 16.55        | 17.80         |
|           |            | 1       | 74        | 16.58                   | 16.45        | 16.45        | 17.80         |
|           |            | 36      | 0         | 16.61                   | 16.49        | 16.77        | 17.80         |
|           |            | 36      | 18        | 16.50                   | 16.77        | 16.76        | 17.80         |
|           |            | 36      | 39        | 16.60                   | 16.72        | 16.68        | 17.80         |
|           |            | 75      | 0         | 16.47                   | 16.54        | 16.65        | 17.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 18700/1860              | 18900/1880   | 19100/1900   |               |
| 20MHz     | QPSK       | 1       | 0         | 16.45                   | 16.55        | 16.58        | 17.80         |
|           |            | 1       | 50        | <b>16.55</b>            | <b>16.64</b> | <b>16.65</b> | 17.80         |



|  |       |     |    |              |              |              |       |
|--|-------|-----|----|--------------|--------------|--------------|-------|
|  |       | 1   | 99 | 16.48        | 16.54        | 16.56        | 17.80 |
|  |       | 50  | 0  | 16.56        | 16.54        | <b>16.75</b> | 17.80 |
|  |       | 50  | 25 | <b>16.62</b> | <b>16.67</b> | 16.69        | 17.80 |
|  |       | 50  | 50 | 16.60        | 16.66        | 16.67        | 17.80 |
|  |       | 100 | 0  | 16.58        | 16.63        | <b>16.71</b> | 17.80 |
|  | 16QAM | 1   | 0  | 16.54        | 16.54        | 16.66        | 17.80 |
|  |       | 1   | 50 | 16.43        | 16.59        | 16.74        | 17.80 |
|  |       | 1   | 99 | 16.51        | 16.52        | 16.44        | 17.80 |
|  |       | 50  | 0  | 16.64        | 16.45        | 16.77        | 17.80 |
|  |       | 50  | 25 | 16.69        | 16.78        | 16.60        | 17.80 |
|  |       | 50  | 50 | 16.48        | 16.52        | 16.59        | 17.80 |
|  |       | 100 | 0  | 16.69        | 16.62        | 16.74        | 17.80 |

| LTE FDD Band 4<br>head(standalone) |            |         |           | Conducted Power(dBm)    |              |              | Tune-up<br>Limit |
|------------------------------------|------------|---------|-----------|-------------------------|--------------|--------------|------------------|
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              |                  |
|                                    |            |         |           | 19957/1710.7            | 20175/1732.5 | 20393/1754.3 |                  |
| 1.4MHz                             | QPSK       | 1       | 0         | 17.33                   | 17.39        | 17.53        | 18.30            |
|                                    |            | 1       | 2         | 17.48                   | 17.53        | 17.20        | 18.30            |
|                                    |            | 1       | 5         | 17.55                   | 17.13        | 17.28        | 18.30            |
|                                    |            | 3       | 0         | 17.51                   | 17.57        | 17.40        | 18.30            |
|                                    |            | 3       | 2         | 17.54                   | 17.37        | 17.14        | 18.30            |
|                                    |            | 3       | 3         | 17.57                   | 17.36        | 17.24        | 18.30            |
|                                    |            | 6       | 0         | 17.26                   | 17.24        | 17.13        | 18.30            |
|                                    | 16QAM      | 1       | 0         | 16.98                   | 17.03        | 17.03        | 18.30            |
|                                    |            | 1       | 2         | 16.91                   | 16.86        | 16.96        | 18.30            |
|                                    |            | 1       | 5         | 16.94                   | 16.61        | 16.86        | 18.30            |
|                                    |            | 3       | 0         | 17.04                   | 16.84        | 16.89        | 18.30            |
|                                    |            | 3       | 2         | 16.97                   | 16.88        | 16.64        | 18.30            |
|                                    |            | 3       | 3         | 16.92                   | 16.82        | 16.86        | 18.30            |
|                                    |            | 6       | 0         | 17.33                   | 17.40        | 17.26        | 18.30            |
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up<br>Limit |
|                                    |            |         |           | 19965/1711.5            | 20175/1732.5 | 20385/1753.5 |                  |
| 3MHz                               | QPSK       | 1       | 0         | 17.32                   | 17.44        | 17.55        | 18.30            |
|                                    |            | 1       | 7         | 17.49                   | 17.34        | 17.39        | 18.30            |
|                                    |            | 1       | 14        | 17.51                   | 17.12        | 17.33        | 18.30            |
|                                    |            | 8       | 0         | 17.49                   | 17.30        | 17.34        | 18.30            |
|                                    |            | 8       | 4         | 17.46                   | 17.39        | 17.14        | 18.30            |
|                                    |            | 8       | 7         | 17.58                   | 17.35        | 17.24        | 18.30            |
|                                    |            | 15      | 0         | 17.45                   | 17.46        | 17.22        | 18.30            |
|                                    | 16QAM      | 1       | 0         | 16.78                   | 17.01        | 16.90        | 18.30            |
|                                    |            | 1       | 7         | 16.77                   | 16.97        | 16.66        | 18.30            |
|                                    |            | 1       | 14        | 17.18                   | 16.73        | 17.02        | 18.30            |



|           |            | 8       | 0         | 16.97                   | 17.01        | 16.90        | 18.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 8       | 4         | 17.05                   | 17.11        | 16.86        | 18.30         |
|           |            | 8       | 7         | 16.88                   | 16.95        | 16.87        | 18.30         |
|           |            | 15      | 0         | 17.32                   | 17.25        | 17.17        | 18.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 19975/1712.5            | 20175/1732.5 | 20375/1752.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 17.32                   | 17.40        | 17.29        | 18.30         |
|           |            | 1       | 13        | 17.38                   | 17.49        | 17.34        | 18.30         |
|           |            | 1       | 24        | 17.41                   | 17.16        | 17.36        | 18.30         |
|           |            | 12      | 0         | 17.56                   | 17.56        | 17.42        | 18.30         |
|           |            | 12      | 6         | 17.42                   | 17.58        | 17.24        | 18.30         |
|           |            | 12      | 13        | 17.36                   | 17.20        | 17.33        | 18.30         |
|           |            | 25      | 0         | 17.32                   | 17.47        | 17.28        | 18.30         |
|           | 16QAM      | 1       | 0         | 16.97                   | 16.88        | 17.01        | 18.30         |
|           |            | 1       | 13        | 16.99                   | 16.91        | 16.82        | 18.30         |
|           |            | 1       | 24        | 17.14                   | 16.62        | 16.88        | 18.30         |
|           |            | 12      | 0         | 16.96                   | 16.80        | 17.02        | 18.30         |
|           |            | 12      | 6         | 17.08                   | 16.97        | 16.86        | 18.30         |
|           |            | 12      | 13        | 16.96                   | 16.80        | 16.73        | 18.30         |
|           |            | 25      | 0         | 17.23                   | 17.31        | 17.15        | 18.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20000/1715              | 20175/1732.5 | 20350/1750   |               |
| 10MHz     | QPSK       | 1       | 0         | 17.44                   | 17.57        | 17.49        | 18.30         |
|           |            | 1       | 25        | 17.36                   | 17.33        | 17.22        | 18.30         |
|           |            | 1       | 49        | 17.62                   | 17.15        | 17.31        | 18.30         |
|           |            | 25      | 0         | 17.48                   | 17.57        | 17.44        | 18.30         |
|           |            | 25      | 13        | 17.39                   | 17.44        | 17.29        | 18.30         |
|           |            | 25      | 25        | 17.42                   | 17.27        | 17.34        | 18.30         |
|           |            | 50      | 0         | 17.38                   | 17.22        | 17.27        | 18.30         |
|           | 16QAM      | 1       | 0         | 16.79                   | 16.97        | 16.96        | 18.30         |
|           |            | 1       | 25        | 16.95                   | 16.97        | 16.72        | 18.30         |
|           |            | 1       | 49        | 16.99                   | 16.75        | 16.99        | 18.30         |
|           |            | 25      | 0         | 17.04                   | 16.87        | 16.99        | 18.30         |
|           |            | 25      | 13        | 17.08                   | 16.88        | 16.76        | 18.30         |
|           |            | 25      | 25        | 16.83                   | 16.75        | 16.97        | 18.30         |
|           |            | 50      | 0         | 17.20                   | 17.18        | 17.15        | 18.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20025/1717.5            | 20175/1732.5 | 20325/1747.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 17.25                   | 17.49        | 17.40        | 18.30         |
|           |            | 1       | 38        | 17.22                   | 17.28        | 17.18        | 18.30         |
|           |            | 1       | 74        | 17.45                   | 17.30        | 17.54        | 18.30         |
|           |            | 36      | 0         | 17.51                   | 17.31        | 17.42        | 18.30         |
|           |            | 36      | 18        | 17.57                   | 17.35        | 17.23        | 18.30         |



|           |            | 36      | 39        | 17.42                   | 17.28        | 17.35        | 18.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 75      | 0         | 17.18                   | 17.21        | 17.19        | 18.30         |
|           | 16QAM      | 1       | 0         | 16.87                   | 16.91        | 16.96        | 18.30         |
|           |            | 1       | 38        | 16.89                   | 17.03        | 16.96        | 18.30         |
|           |            | 1       | 74        | 17.08                   | 16.75        | 16.95        | 18.30         |
|           |            | 36      | 0         | 16.77                   | 16.90        | 16.93        | 18.30         |
|           |            | 36      | 18        | 16.99                   | 16.90        | 16.82        | 18.30         |
|           |            | 36      | 39        | 16.95                   | 16.81        | 16.76        | 18.30         |
|           |            | 75      | 0         | 17.22                   | 17.34        | 17.31        | 18.30         |
|           |            |         |           |                         |              |              |               |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20050/1720              | 20175/1732.5 | 20300/1745   |               |
| 20MHz     | QPSK       | 1       | 0         | 17.35                   | <b>17.43</b> | <b>17.40</b> | 18.30         |
|           |            | 1       | 50        | 17.35                   | 17.38        | 17.31        | 18.30         |
|           |            | 1       | 99        | <b>17.53</b>            | 17.22        | <b>17.40</b> | 18.30         |
|           |            | 50      | 0         | 17.41                   | 17.44        | <b>17.48</b> | 18.30         |
|           |            | 50      | 25        | 17.44                   | <b>17.50</b> | 17.29        | 18.30         |
|           |            | 50      | 50        | <b>17.47</b>            | 17.35        | 17.34        | 18.30         |
|           |            | 100     | 0         | 17.32                   | <b>17.33</b> | 17.25        | 18.30         |
|           |            |         |           |                         |              |              |               |
|           | 16QAM      | 1       | 0         | 16.80                   | 17.05        | 16.76        | 18.30         |
|           |            | 1       | 50        | 16.75                   | 16.77        | 16.70        | 18.30         |
|           |            | 1       | 99        | 16.89                   | 16.60        | 16.97        | 18.30         |
|           |            | 50      | 0         | 17.01                   | 16.94        | 17.13        | 18.30         |
|           |            | 50      | 25        | 16.87                   | 16.91        | 16.74        | 18.30         |
|           |            | 50      | 50        | 16.89                   | 17.00        | 16.88        | 18.30         |
|           |            | 100     | 0         | 17.43                   | 17.23        | 17.16        | 18.30         |
|           |            |         |           |                         |              |              |               |

| LTE FDD Band 4<br>Body(standalone) |            |         |           | Conducted Power(dBm)    |              |              | Tune-up<br>Limit |
|------------------------------------|------------|---------|-----------|-------------------------|--------------|--------------|------------------|
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              |                  |
|                                    |            |         |           | 19957/1710.7            | 20175/1732.5 | 20393/1754.3 |                  |
| 1.4MHz                             | QPSK       | 1       | 0         | 19.13                   | 19.29        | 19.32        | 19.80            |
|                                    |            | 1       | 2         | 19.32                   | 19.37        | 19.35        | 19.80            |
|                                    |            | 1       | 5         | 19.03                   | 19.21        | 19.32        | 19.80            |
|                                    |            | 3       | 0         | 19.35                   | 19.20        | 19.48        | 19.80            |
|                                    |            | 3       | 2         | 19.43                   | 19.35        | 19.34        | 19.80            |
|                                    |            | 3       | 3         | 19.53                   | 19.26        | 19.08        | 19.80            |
|                                    |            | 6       | 0         | 19.47                   | 19.28        | 19.22        | 19.80            |
|                                    | 16QAM      | 1       | 0         | 19.12                   | 19.20        | 19.13        | 19.80            |
|                                    |            | 1       | 2         | 19.36                   | 19.30        | 19.38        | 19.80            |
|                                    |            | 1       | 5         | 19.03                   | 19.18        | 19.25        | 19.80            |
|                                    |            | 3       | 0         | 19.40                   | 19.23        | 19.30        | 19.80            |
|                                    |            | 3       | 2         | 19.45                   | 19.26        | 19.30        | 19.80            |
|                                    |            | 3       | 3         | 19.34                   | 19.35        | 19.24        | 19.80            |
|                                    |            |         |           |                         |              |              |                  |



|           |            | 6       | 0         | 19.32                   | 19.23        | 19.31        | 19.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 19965/1711.5            | 20175/1732.5 | 20385/1753.5 |               |
| 3MHz      | QPSK       | 1       | 0         | 19.08                   | 19.27        | 19.19        | 19.80         |
|           |            | 1       | 7         | 19.36                   | 19.28        | 19.31        | 19.80         |
|           |            | 1       | 14        | 19.08                   | 19.21        | 19.45        | 19.80         |
|           |            | 8       | 0         | 19.47                   | 19.09        | 19.48        | 19.80         |
|           |            | 8       | 4         | 19.25                   | 19.25        | 19.43        | 19.80         |
|           |            | 8       | 7         | 19.39                   | 19.38        | 19.23        | 19.80         |
|           |            | 15      | 0         | 19.36                   | 19.17        | 19.36        | 19.80         |
|           | 16QAM      | 1       | 0         | 19.16                   | 19.07        | 19.13        | 19.80         |
|           |            | 1       | 7         | 19.23                   | 19.28        | 19.41        | 19.80         |
|           |            | 1       | 14        | 19.18                   | 19.20        | 19.45        | 19.80         |
|           |            | 8       | 0         | 19.49                   | 19.23        | 19.33        | 19.80         |
|           |            | 8       | 4         | 19.36                   | 19.35        | 19.24        | 19.80         |
|           |            | 8       | 7         | 19.36                   | 19.18        | 19.26        | 19.80         |
|           |            | 15      | 0         | 19.44                   | 19.17        | 19.30        | 19.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 19975/1712.5            | 20175/1732.5 | 20375/1752.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 19.03                   | 19.26        | 19.28        | 19.80         |
|           |            | 1       | 13        | 19.33                   | 19.21        | 19.32        | 19.80         |
|           |            | 1       | 24        | 19.14                   | 19.26        | 19.21        | 19.80         |
|           |            | 12      | 0         | 19.43                   | 19.17        | 19.40        | 19.80         |
|           |            | 12      | 6         | 19.25                   | 19.25        | 19.24        | 19.80         |
|           |            | 12      | 13        | 19.41                   | 19.36        | 19.31        | 19.80         |
|           |            | 25      | 0         | 19.46                   | 19.33        | 19.40        | 19.80         |
|           | 16QAM      | 1       | 0         | 19.20                   | 19.14        | 19.17        | 19.80         |
|           |            | 1       | 13        | 19.13                   | 19.24        | 19.36        | 19.80         |
|           |            | 1       | 24        | 19.04                   | 19.20        | 19.25        | 19.80         |
|           |            | 12      | 0         | 19.37                   | 19.19        | 19.41        | 19.80         |
|           |            | 12      | 6         | 19.45                   | 19.35        | 19.40        | 19.80         |
|           |            | 12      | 13        | 19.32                   | 19.30        | 19.23        | 19.80         |
|           |            | 25      | 0         | 19.38                   | 19.32        | 19.32        | 19.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20000/1715              | 20175/1732.5 | 20350/1750   |               |
| 10MHz     | QPSK       | 1       | 0         | 19.07                   | 19.11        | 19.30        | 19.80         |
|           |            | 1       | 25        | 19.23                   | 19.34        | 19.39        | 19.80         |
|           |            | 1       | 49        | 19.08                   | 19.31        | 19.21        | 19.80         |
|           |            | 25      | 0         | 19.30                   | 19.11        | 19.36        | 19.80         |
|           |            | 25      | 13        | 19.25                   | 19.23        | 19.25        | 19.80         |
|           |            | 25      | 25        | 19.35                   | 19.27        | 19.17        | 19.80         |
|           |            | 50      | 0         | 19.41                   | 19.33        | 19.20        | 19.80         |
|           | 16QAM      | 1       | 0         | 19.01                   | 19.29        | 19.30        | 19.80         |



|           |            | 1       | 25        | 19.29                   | 19.36        | 19.40        | 19.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 1       | 49        | 19.01                   | 19.30        | 19.38        | 19.80         |
|           |            | 25      | 0         | 19.45                   | 19.17        | 19.33        | 19.80         |
|           |            | 25      | 13        | 19.25                   | 19.31        | 19.42        | 19.80         |
|           |            | 25      | 25        | 19.30                   | 19.24        | 19.22        | 19.80         |
|           |            | 50      | 0         | 19.40                   | 19.33        | 19.35        | 19.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20025/1717.5            | 20175/1732.5 | 20325/1747.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 19.11                   | 19.25        | 19.24        | 19.80         |
|           |            | 1       | 38        | 19.25                   | 19.32        | 19.44        | 19.80         |
|           |            | 1       | 74        | 19.12                   | 19.32        | 19.45        | 19.80         |
|           |            | 36      | 0         | 19.46                   | 19.06        | 19.28        | 19.80         |
|           |            | 36      | 18        | 19.22                   | 19.43        | 19.40        | 19.80         |
|           |            | 36      | 39        | 19.50                   | 19.24        | 19.24        | 19.80         |
|           |            | 75      | 0         | 19.26                   | 19.26        | 19.37        | 19.80         |
|           | 16QAM      | 1       | 0         | 19.16                   | 19.11        | 19.36        | 19.80         |
|           |            | 1       | 38        | 19.23                   | 19.20        | 19.38        | 19.80         |
|           |            | 1       | 74        | 19.22                   | 19.14        | 19.38        | 19.80         |
|           |            | 36      | 0         | 19.48                   | 19.12        | 19.51        | 19.80         |
|           |            | 36      | 18        | 19.35                   | 19.27        | 19.33        | 19.80         |
|           |            | 36      | 39        | 19.33                   | 19.30        | 19.18        | 19.80         |
|           |            | 75      | 0         | 19.46                   | 19.34        | 19.29        | 19.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20050/1720              | 20175/1732.5 | 20300/1745   |               |
| 20MHz     | QPSK       | 1       | 0         | 19.02                   | 19.11        | 19.14        | 19.80         |
|           |            | 1       | 50        | <b>19.19</b>            | <b>19.26</b> | <b>19.35</b> | 19.80         |
|           |            | 1       | 99        | 19.14                   | 19.22        | 19.23        | 19.80         |
|           |            | 50      | 0         | 19.31                   | 19.07        | 19.29        | 19.80         |
|           |            | 50      | 25        | 19.28                   | 19.28        | <b>19.33</b> | 19.80         |
|           |            | 50      | 50        | <b>19.33</b>            | <b>19.34</b> | 19.13        | 19.80         |
|           |            | 100     | 0         | <b>19.30</b>            | 19.24        | 19.22        | 19.80         |
|           | 16QAM      | 1       | 0         | 19.10                   | 19.32        | 19.29        | 19.80         |
|           |            | 1       | 50        | 19.27                   | 19.21        | 19.25        | 19.80         |
|           |            | 1       | 99        | 19.01                   | 19.26        | 19.38        | 19.80         |
|           |            | 50      | 0         | 19.50                   | 19.23        | 19.35        | 19.80         |
|           |            | 50      | 25        | 19.27                   | 19.21        | 19.44        | 19.80         |
|           |            | 50      | 50        | 19.52                   | 19.35        | 19.19        | 19.80         |
|           |            | 100     | 0         | 19.30                   | 19.24        | 19.37        | 19.80         |



| LTE FDD Band 4<br>head(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    |              |              | Tune-up<br>Limit |
|--------------------------------------|------------|---------|-----------|-------------------------|--------------|--------------|------------------|
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              |                  |
|                                      |            |         |           | 19957/1710.7            | 20175/1732.5 | 20393/1754.3 |                  |
| 1.4MHz                               | QPSK       | 1       | 0         | 13.83                   | 14.08        | 13.90        | 15.30            |
|                                      |            | 1       | 2         | 13.90                   | 14.08        | 14.29        | 15.30            |
|                                      |            | 1       | 5         | 14.08                   | 13.97        | 14.27        | 15.30            |
|                                      |            | 3       | 0         | 14.22                   | 13.84        | 14.17        | 15.30            |
|                                      |            | 3       | 2         | 14.07                   | 14.18        | 14.14        | 15.30            |
|                                      |            | 3       | 3         | 14.35                   | 14.18        | 14.17        | 15.30            |
|                                      |            | 6       | 0         | 14.24                   | 14.17        | 14.16        | 15.30            |
|                                      | 16QAM      | 1       | 0         | 13.93                   | 13.84        | 13.91        | 15.30            |
|                                      |            | 1       | 2         | 14.10                   | 14.25        | 14.18        | 15.30            |
|                                      |            | 1       | 5         | 14.08                   | 14.17        | 14.24        | 15.30            |
|                                      |            | 3       | 0         | 14.10                   | 13.78        | 14.18        | 15.30            |
|                                      |            | 3       | 2         | 14.28                   | 14.07        | 14.30        | 15.30            |
|                                      |            | 3       | 3         | 14.16                   | 14.18        | 13.92        | 15.30            |
|                                      |            | 6       | 0         | 14.35                   | 13.97        | 13.97        | 15.30            |
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up<br>Limit |
|                                      |            |         |           | 19965/1711.5            | 20175/1732.5 | 20385/1753.5 |                  |
| 3MHz                                 | QPSK       | 1       | 0         | 13.97                   | 14.10        | 14.04        | 15.30            |
|                                      |            | 1       | 7         | 14.05                   | 14.04        | 14.05        | 15.30            |
|                                      |            | 1       | 14        | 14.00                   | 14.14        | 14.14        | 15.30            |
|                                      |            | 8       | 0         | 14.10                   | 13.95        | 14.20        | 15.30            |
|                                      |            | 8       | 4         | 14.08                   | 14.17        | 14.34        | 15.30            |
|                                      |            | 8       | 7         | 14.09                   | 14.16        | 14.05        | 15.30            |
|                                      |            | 15      | 0         | 14.28                   | 14.13        | 14.17        | 15.30            |
|                                      | 16QAM      | 1       | 0         | 13.80                   | 13.97        | 13.87        | 15.30            |
|                                      |            | 1       | 7         | 13.90                   | 14.03        | 14.24        | 15.30            |
|                                      |            | 1       | 14        | 14.05                   | 13.91        | 14.17        | 15.30            |
|                                      |            | 8       | 0         | 14.28                   | 14.06        | 14.20        | 15.30            |
|                                      |            | 8       | 4         | 14.08                   | 14.28        | 14.16        | 15.30            |
|                                      |            | 8       | 7         | 14.15                   | 14.29        | 14.07        | 15.30            |
|                                      |            | 15      | 0         | 14.35                   | 14.18        | 14.09        | 15.30            |
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up<br>Limit |
|                                      |            |         |           | 19975/1712.5            | 20175/1732.5 | 20375/1752.5 |                  |
| 5MHz                                 | QPSK       | 1       | 0         | 13.81                   | 14.04        | 14.08        | 15.30            |
|                                      |            | 1       | 13        | 13.95                   | 14.08        | 14.17        | 15.30            |
|                                      |            | 1       | 24        | 13.92                   | 14.17        | 14.09        | 15.30            |
|                                      |            | 12      | 0         | 14.39                   | 14.02        | 14.13        | 15.30            |
|                                      |            | 12      | 6         | 14.19                   | 14.14        | 14.15        | 15.30            |
|                                      |            | 12      | 13        | 14.25                   | 14.29        | 13.96        | 15.30            |



|           |            | 25      | 0         | 14.13                   | 14.12        | 14.04        | 15.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           | 16QAM      | 1       | 0         | 13.88                   | 13.95        | 13.95        | 15.30         |
|           |            | 1       | 13        | 14.19                   | 14.24        | 14.33        | 15.30         |
|           |            | 1       | 24        | 14.16                   | 13.90        | 14.18        | 15.30         |
|           |            | 12      | 0         | 14.29                   | 13.94        | 14.10        | 15.30         |
|           |            | 12      | 6         | 14.19                   | 14.24        | 14.23        | 15.30         |
|           |            | 12      | 13        | 14.14                   | 14.07        | 13.95        | 15.30         |
|           |            | 25      | 0         | 14.14                   | 13.94        | 14.00        | 15.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20000/1715              | 20175/1732.5 | 20350/1750   |               |
| 10MHz     | QPSK       | 1       | 0         | 14.04                   | 14.10        | 14.09        | 15.30         |
|           |            | 1       | 25        | 14.00                   | 14.11        | 14.10        | 15.30         |
|           |            | 1       | 49        | 13.99                   | 13.91        | 14.07        | 15.30         |
|           |            | 25      | 0         | 14.21                   | 13.88        | 14.12        | 15.30         |
|           |            | 25      | 13        | 14.12                   | 14.34        | 14.33        | 15.30         |
|           |            | 25      | 25        | 14.26                   | 14.31        | 13.91        | 15.30         |
|           |            | 50      | 0         | 14.32                   | 14.07        | 14.09        | 15.30         |
|           | 16QAM      | 1       | 0         | 13.91                   | 14.02        | 13.89        | 15.30         |
|           |            | 1       | 25        | 14.15                   | 14.10        | 14.04        | 15.30         |
|           |            | 1       | 49        | 13.87                   | 13.91        | 14.01        | 15.30         |
|           |            | 25      | 0         | 14.37                   | 13.97        | 14.04        | 15.30         |
|           |            | 25      | 13        | 14.06                   | 14.32        | 14.25        | 15.30         |
|           |            | 25      | 25        | 14.25                   | 14.29        | 14.19        | 15.30         |
|           |            | 50      | 0         | 14.35                   | 14.10        | 14.13        | 15.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20025/1717.5            | 20175/1732.5 | 20325/1747.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 13.95                   | 13.87        | 14.15        | 15.30         |
|           |            | 1       | 38        | 13.91                   | 14.25        | 14.12        | 15.30         |
|           |            | 1       | 74        | 14.15                   | 14.05        | 14.02        | 15.30         |
|           |            | 36      | 0         | 14.12                   | 13.85        | 14.07        | 15.30         |
|           |            | 36      | 18        | 14.23                   | 14.35        | 14.23        | 15.30         |
|           |            | 36      | 39        | 14.10                   | 14.31        | 14.05        | 15.30         |
|           |            | 75      | 0         | 14.33                   | 14.19        | 14.05        | 15.30         |
|           | 16QAM      | 1       | 0         | 13.90                   | 14.02        | 14.15        | 15.30         |
|           |            | 1       | 38        | 14.17                   | 14.23        | 14.29        | 15.30         |
|           |            | 1       | 74        | 13.99                   | 13.93        | 14.00        | 15.30         |
|           |            | 36      | 0         | 14.13                   | 13.85        | 14.22        | 15.30         |
|           |            | 36      | 18        | 14.23                   | 14.26        | 14.15        | 15.30         |
|           |            | 36      | 39        | 14.34                   | 14.24        | 13.98        | 15.30         |
|           |            | 75      | 0         | 14.15                   | 14.16        | 13.96        | 15.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20050/1720              | 20175/1732.5 | 20300/1745   |               |
| 20MHz     | QPSK       | 1       | 0         | 13.92                   | 13.98        | 14.02        | 15.30         |



|  |       |     |    |              |              |              |       |
|--|-------|-----|----|--------------|--------------|--------------|-------|
|  |       | 1   | 50 | <b>14.05</b> | <b>14.13</b> | <b>14.19</b> | 15.30 |
|  |       | 1   | 99 | 14.01        | 14.03        | 14.14        | 15.30 |
|  |       | 50  | 0  | <b>14.25</b> | 13.93        | 14.12        | 15.30 |
|  |       | 50  | 25 | 14.15        | <b>14.21</b> | <b>14.24</b> | 15.30 |
|  |       | 50  | 50 | 14.20        | <b>14.21</b> | 14.05        | 15.30 |
|  |       | 100 | 0  | <b>14.22</b> | 14.08        | 14.08        | 15.30 |
|  | 16QAM | 1   | 0  | 14.05        | 14.08        | 14.01        | 15.30 |
|  |       | 1   | 50 | 14.14        | 14.19        | 14.05        | 15.30 |
|  |       | 1   | 99 | 14.00        | 13.93        | 14.24        | 15.30 |
|  |       | 50  | 0  | 14.37        | 13.87        | 14.16        | 15.30 |
|  |       | 50  | 25 | 14.07        | 14.17        | 14.33        | 15.30 |
|  |       | 50  | 50 | 14.34        | 14.30        | 14.15        | 15.30 |
|  |       | 100 | 0  | 14.24        | 14.04        | 14.19        | 15.30 |

| LTE FDD Band 4<br>Body(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    |              |              | Tune-up<br>Limit |
|--------------------------------------|------------|---------|-----------|-------------------------|--------------|--------------|------------------|
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              |                  |
|                                      |            |         |           | 19957/1710.7            | 20175/1732.5 | 20393/1754.3 |                  |
| 1.4MHz                               | QPSK       | 1       | 0         | 18.27                   | 18.12        | 18.10        | 19.80            |
|                                      |            | 1       | 2         | 18.33                   | 18.28        | 18.14        | 19.80            |
|                                      |            | 1       | 5         | 18.19                   | 18.24        | 18.34        | 19.80            |
|                                      |            | 3       | 0         | 18.37                   | 18.20        | 18.22        | 19.80            |
|                                      |            | 3       | 2         | 18.10                   | 18.40        | 18.14        | 19.80            |
|                                      |            | 3       | 3         | 18.25                   | 18.32        | 18.19        | 19.80            |
|                                      |            | 6       | 0         | 18.48                   | 18.29        | 18.09        | 19.80            |
|                                      | 16QAM      | 1       | 0         | 18.06                   | 18.14        | 18.15        | 19.80            |
|                                      |            | 1       | 2         | 18.40                   | 18.31        | 18.18        | 19.80            |
|                                      |            | 1       | 5         | 18.08                   | 18.07        | 18.07        | 19.80            |
|                                      |            | 3       | 0         | 18.21                   | 18.20        | 18.31        | 19.80            |
|                                      |            | 3       | 2         | 18.31                   | 18.21        | 18.26        | 19.80            |
|                                      |            | 3       | 3         | 18.25                   | 18.32        | 18.25        | 19.80            |
|                                      |            | 6       | 0         | 18.28                   | 18.03        | 18.12        | 19.80            |
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up<br>Limit |
|                                      |            |         |           | 19965/1711.5            | 20175/1732.5 | 20385/1753.5 |                  |
| 3MHz                                 | QPSK       | 1       | 0         | 18.16                   | 18.16        | 18.12        | 19.30            |
|                                      |            | 1       | 7         | 18.35                   | 18.32        | 18.36        | 19.30            |
|                                      |            | 1       | 14        | 18.23                   | 17.98        | 18.29        | 19.30            |
|                                      |            | 8       | 0         | 18.35                   | 18.14        | 18.36        | 19.30            |
|                                      |            | 8       | 4         | 18.11                   | 18.19        | 18.43        | 19.30            |
|                                      |            | 8       | 7         | 18.29                   | 18.33        | 17.98        | 19.30            |
|                                      |            | 15      | 0         | 18.38                   | 18.02        | 18.12        | 19.30            |
|                                      | 16QAM      | 1       | 0         | 18.17                   | 18.14        | 18.30        | 19.30            |
|                                      |            | 1       | 7         | 18.40                   | 18.31        | 18.44        | 19.30            |



|           |            | 1       | 14        | 18.22                   | 18.01        | 18.25        | 19.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 8       | 0         | 18.38                   | 18.17        | 18.18        | 19.30         |
|           |            | 8       | 4         | 18.23                   | 18.45        | 18.37        | 19.30         |
|           |            | 8       | 7         | 18.47                   | 18.28        | 18.13        | 19.30         |
|           |            | 15      | 0         | 18.27                   | 18.24        | 18.35        | 19.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 19975/1712.5            | 20175/1732.5 | 20375/1752.5 |               |
| 5MHz      | QPSK       | 1       | 0         | 18.04                   | 18.01        | 18.03        | 19.30         |
|           |            | 1       | 13        | 18.21                   | 18.31        | 18.37        | 19.30         |
|           |            | 1       | 24        | 18.37                   | 18.02        | 18.30        | 19.30         |
|           |            | 12      | 0         | 18.24                   | 18.00        | 18.22        | 19.30         |
|           |            | 12      | 6         | 18.23                   | 18.17        | 18.41        | 19.30         |
|           |            | 12      | 13        | 18.29                   | 18.42        | 17.99        | 19.30         |
|           |            | 25      | 0         | 18.25                   | 18.28        | 18.23        | 19.30         |
|           | 16QAM      | 1       | 0         | 18.05                   | 18.01        | 18.09        | 19.30         |
|           |            | 1       | 13        | 18.28                   | 18.27        | 18.28        | 19.30         |
|           |            | 1       | 24        | 18.18                   | 18.16        | 18.20        | 19.30         |
|           |            | 12      | 0         | 18.41                   | 18.07        | 18.44        | 19.30         |
|           |            | 12      | 6         | 18.26                   | 18.33        | 18.33        | 19.30         |
|           |            | 12      | 13        | 18.28                   | 18.33        | 18.23        | 19.30         |
|           |            | 25      | 0         | 18.42                   | 18.20        | 18.22        | 19.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20000/1715              | 20175/1732.5 | 20350/1750   |               |
| 10MHz     | QPSK       | 1       | 0         | 18.18                   | 18.06        | 18.29        | 19.30         |
|           |            | 1       | 25        | 18.45                   | 18.15        | 18.31        | 19.30         |
|           |            | 1       | 49        | 18.16                   | 18.01        | 18.12        | 19.30         |
|           |            | 25      | 0         | 18.32                   | 17.99        | 18.36        | 19.30         |
|           |            | 25      | 13        | 18.35                   | 18.42        | 18.30        | 19.30         |
|           |            | 25      | 25        | 18.39                   | 18.31        | 18.15        | 19.30         |
|           |            | 50      | 0         | 18.37                   | 18.20        | 18.31        | 19.30         |
|           | 16QAM      | 1       | 0         | 18.11                   | 18.09        | 18.18        | 19.30         |
|           |            | 1       | 25        | 18.21                   | 18.18        | 18.16        | 19.30         |
|           |            | 1       | 49        | 18.35                   | 18.14        | 18.18        | 19.30         |
|           |            | 25      | 0         | 18.28                   | 18.24        | 18.25        | 19.30         |
|           |            | 25      | 13        | 18.37                   | 18.41        | 18.40        | 19.30         |
|           |            | 25      | 25        | 18.41                   | 18.26        | 17.96        | 19.30         |
|           |            | 50      | 0         | 18.42                   | 18.24        | 18.14        | 19.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20025/1717.5            | 20175/1732.5 | 20325/1747.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 18.26                   | 17.93        | 18.25        | 19.30         |
|           |            | 1       | 38        | 18.43                   | 18.13        | 18.36        | 19.30         |
|           |            | 1       | 74        | 18.35                   | 18.23        | 18.30        | 19.30         |
|           |            | 36      | 0         | 18.50                   | 18.05        | 18.25        | 19.30         |



|           |            | 36      | 18        | 18.21                   | 18.39        | 18.19        | 19.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 36      | 39        | 18.20                   | 18.17        | 18.05        | 19.30         |
|           |            | 75      | 0         | 18.42                   | 18.17        | 18.22        | 19.30         |
|           | 16QAM      | 1       | 0         | 18.23                   | 17.94        | 18.17        | 19.30         |
|           |            | 1       | 38        | 18.22                   | 18.22        | 18.39        | 19.30         |
|           |            | 1       | 74        | 18.18                   | 18.11        | 18.05        | 19.30         |
|           |            | 36      | 0         | 18.42                   | 18.07        | 18.39        | 19.30         |
|           |            | 36      | 18        | 18.16                   | 18.23        | 18.20        | 19.30         |
|           |            | 36      | 39        | 18.47                   | 18.24        | 18.02        | 19.30         |
|           |            | 75      | 0         | 18.46                   | 18.22        | 18.21        | 19.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20050/1720              | 20175/1732.5 | 20300/1745   |               |
| 20MHz     | QPSK       | 1       | 0         | 18.14                   | 18.05        | 18.15        | 19.30         |
|           |            | 1       | 50        | <b>18.31</b>            | <b>18.23</b> | <b>18.29</b> | 19.30         |
|           |            | 1       | 99        | 18.22                   | 18.13        | 18.20        | 19.30         |
|           |            | 50      | 0         | <b>18.36</b>            | 18.09        | <b>18.30</b> | 19.30         |
|           |            | 50      | 25        | 18.25                   | <b>18.31</b> | 18.28        | 19.30         |
|           |            | 50      | 50        | 18.32                   | <b>18.31</b> | 18.11        | 19.30         |
|           |            | 100     | 0         | <b>18.33</b>            | 18.17        | 18.20        | 19.30         |
|           | 16QAM      | 1       | 0         | 18.12                   | 18.20        | 18.18        | 19.30         |
|           |            | 1       | 50        | 18.36                   | 18.25        | 18.41        | 19.30         |
|           |            | 1       | 99        | 18.37                   | 18.16        | 18.08        | 19.30         |
|           |            | 50      | 0         | 18.27                   | 18.10        | 18.16        | 19.30         |
|           |            | 50      | 25        | 18.15                   | 18.42        | 18.22        | 19.30         |
|           |            | 50      | 50        | 18.45                   | 18.32        | 18.23        | 19.30         |
|           |            | 100     | 0         | 18.42                   | 18.31        | 18.29        | 19.30         |

| LTE FDD Band 5<br>head(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    |             |             | Tune-up<br>Limit |
|--------------------------------------|------------|---------|-----------|-------------------------|-------------|-------------|------------------|
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |             |             |                  |
|                                      |            |         |           | 20407/824.7             | 20525/836.5 | 20643/848.3 |                  |
| 1.4MHz                               | QPSK       | 1       | 0         | 21.95                   | 22.30       | 22.19       | 23.30            |
|                                      |            | 1       | 2         | 21.98                   | 22.10       | 22.25       | 23.30            |
|                                      |            | 1       | 5         | 22.04                   | 22.28       | 22.00       | 23.30            |
|                                      |            | 3       | 0         | 21.43                   | 21.53       | 21.60       | 23.30            |
|                                      |            | 3       | 2         | 21.50                   | 21.74       | 21.63       | 23.30            |
|                                      |            | 3       | 3         | 21.74                   | 21.63       | 21.36       | 23.30            |
|                                      |            | 6       | 0         | 21.69                   | 21.58       | 21.50       | 23.30            |
|                                      | 16QAM      | 1       | 0         | 21.44                   | 22.06       | 21.74       | 23.30            |
|                                      |            | 1       | 2         | 21.62                   | 22.11       | 21.77       | 23.30            |
|                                      |            | 1       | 5         | 21.58                   | 22.12       | 21.57       | 23.30            |
|                                      |            | 3       | 0         | 20.46                   | 20.70       | 20.87       | 23.30            |



|           |            | 3       | 2         | 20.82                   | 20.91        | 20.70        | 23.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 3       | 3         | 20.80                   | 20.74        | 20.64        | 23.30         |
|           |            | 6       | 0         | 20.53                   | 20.68        | 20.69        | 22.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20415/825.5             | 20525/836.5  | 20635/847.5  |               |
| 3MHz      | QPSK       | 1       | 0         | 22.14                   | 22.18        | 22.20        | 23.30         |
|           |            | 1       | 7         | 22.00                   | 22.13        | 22.09        | 23.30         |
|           |            | 1       | 14        | 22.05                   | 22.08        | 21.94        | 23.30         |
|           |            | 8       | 0         | 21.39                   | 21.50        | 21.53        | 23.30         |
|           |            | 8       | 4         | 21.55                   | 21.70        | 21.61        | 23.30         |
|           |            | 8       | 7         | 21.63                   | 21.70        | 21.42        | 23.30         |
|           |            | 15      | 0         | 21.67                   | 21.70        | 21.45        | 23.30         |
|           | 16QAM      | 1       | 0         | 21.46                   | 22.16        | 21.76        | 23.30         |
|           |            | 1       | 7         | 21.62                   | 21.97        | 21.62        | 23.30         |
|           |            | 1       | 14        | 21.61                   | 22.21        | 21.64        | 23.30         |
|           |            | 8       | 0         | 20.62                   | 20.83        | 20.69        | 22.30         |
|           |            | 8       | 4         | 20.85                   | 20.87        | 20.87        | 22.30         |
|           |            | 8       | 7         | 20.71                   | 20.72        | 20.53        | 22.30         |
|           |            | 15      | 0         | 20.53                   | 20.68        | 20.57        | 22.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20425/826.5             | 20525/836.5  | 20625/846.5  |               |
| 5MHz      | QPSK       | 1       | 0         | 22.11                   | 22.27        | 22.13        | 23.30         |
|           |            | 1       | 13        | 22.02                   | 22.12        | 22.21        | 23.30         |
|           |            | 1       | 24        | 22.00                   | 22.19        | 22.04        | 23.30         |
|           |            | 12      | 0         | 21.56                   | 21.54        | 21.63        | 23.30         |
|           |            | 12      | 6         | 21.54                   | 21.66        | 21.66        | 23.30         |
|           |            | 12      | 13        | 21.65                   | 21.60        | 21.38        | 23.30         |
|           |            | 25      | 0         | 21.50                   | 21.62        | 21.41        | 23.30         |
|           | 16QAM      | 1       | 0         | 21.51                   | 22.14        | 21.77        | 23.30         |
|           |            | 1       | 13        | 21.46                   | 21.96        | 21.73        | 23.30         |
|           |            | 1       | 24        | 21.52                   | 22.03        | 21.64        | 23.30         |
|           |            | 12      | 0         | 20.48                   | 20.82        | 20.81        | 22.30         |
|           |            | 12      | 6         | 20.83                   | 20.75        | 20.78        | 22.30         |
|           |            | 12      | 13        | 20.69                   | 20.78        | 20.61        | 22.30         |
|           |            | 25      | 0         | 20.59                   | 20.79        | 20.62        | 22.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20450/829               | 20525/836.5  | 20600/844    |               |
| 10MHz     | QPSK       | 1       | 0         | 22.00                   | <b>22.15</b> | 22.06        | 23.30         |
|           |            | 1       | 25        | 21.96                   | 22.07        | <b>22.10</b> | 23.30         |
|           |            | 1       | 49        | <b>22.04</b>            | 22.13        | 21.99        | 23.30         |
|           |            | 25      | 0         | 21.44                   | 21.54        | <b>21.58</b> | 23.30         |
|           |            | 25      | 13        | 21.54                   | <b>21.63</b> | 21.56        | 23.30         |
|           |            | 25      | 25        | <b>21.62</b>            | 21.62        | 21.36        | 23.30         |



|  |       |    |    |       |              |       |       |
|--|-------|----|----|-------|--------------|-------|-------|
|  |       | 50 | 0  | 21.54 | <b>21.58</b> | 21.46 | 23.30 |
|  | 16QAM | 1  | 0  | 21.47 | 22.07        | 21.64 | 23.30 |
|  |       | 1  | 25 | 21.48 | 22.00        | 21.66 | 23.30 |
|  |       | 1  | 49 | 21.57 | 22.07        | 21.54 | 23.30 |
|  |       | 25 | 0  | 20.49 | 20.71        | 20.74 | 22.30 |
|  |       | 25 | 13 | 20.70 | 20.76        | 20.74 | 22.30 |
|  |       | 25 | 25 | 20.68 | 20.70        | 20.50 | 22.30 |
|  |       | 50 | 0  | 20.55 | 20.64        | 20.54 | 22.30 |

| LTE FDD Band 7<br>head(standalone) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                    |            |         |           | 20775/2502.5            | 21100/2535 | 21425/2567.5 |                  |
| 5MHz                               | QPSK       | 1       | 0         | 15.02                   | 14.84      | 15.34        | 15.80            |
|                                    |            | 1       | 13        | 15.22                   | 15.05      | 15.26        | 15.80            |
|                                    |            | 1       | 24        | 14.86                   | 15.16      | 15.01        | 15.80            |
|                                    |            | 12      | 0         | 15.05                   | 14.99      | 15.41        | 15.80            |
|                                    |            | 12      | 6         | 15.17                   | 15.19      | 15.38        | 15.80            |
|                                    |            | 12      | 13        | 15.06                   | 15.11      | 15.11        | 15.80            |
|                                    |            | 25      | 0         | 15.13                   | 14.89      | 15.13        | 15.80            |
|                                    | 16QAM      | 1       | 0         | 15.14                   | 14.71      | 15.20        | 15.80            |
|                                    |            | 1       | 13        | 15.18                   | 15.16      | 15.41        | 15.80            |
|                                    |            | 1       | 24        | 14.82                   | 15.06      | 15.15        | 15.80            |
|                                    |            | 12      | 0         | 15.01                   | 14.90      | 15.32        | 15.80            |
|                                    |            | 12      | 6         | 15.19                   | 15.24      | 15.31        | 15.80            |
|                                    |            | 12      | 13        | 15.03                   | 14.99      | 15.19        | 15.80            |
|                                    |            | 25      | 0         | 15.09                   | 14.91      | 15.14        | 15.80            |
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                    |            |         |           | 20800/2505              | 21100/2535 | 21400/2565   |                  |
| 10MHz                              | QPSK       | 1       | 0         | 15.16                   | 14.88      | 15.31        | 15.80            |
|                                    |            | 1       | 25        | 15.02                   | 15.19      | 15.44        | 15.80            |
|                                    |            | 1       | 49        | 14.80                   | 15.17      | 15.10        | 15.80            |
|                                    |            | 25      | 0         | 15.02                   | 14.95      | 15.35        | 15.80            |
|                                    |            | 25      | 13        | 15.16                   | 15.07      | 15.29        | 15.80            |
|                                    |            | 25      | 25        | 14.91                   | 15.09      | 15.09        | 15.80            |
|                                    |            | 50      | 0         | 15.12                   | 14.91      | 15.20        | 15.80            |
|                                    | 16QAM      | 1       | 0         | 15.03                   | 14.72      | 15.23        | 15.80            |
|                                    |            | 1       | 25        | 15.14                   | 15.17      | 15.38        | 15.80            |
|                                    |            | 1       | 49        | 14.81                   | 15.19      | 15.01        | 15.80            |
|                                    |            | 25      | 0         | 15.14                   | 14.83      | 15.25        | 15.80            |
|                                    |            | 25      | 13        | 15.05                   | 15.05      | 15.37        | 15.80            |
|                                    |            | 25      | 25        | 14.96                   | 15.05      | 15.27        | 15.80            |



|           |            | 50      | 0         | 15.09                   | 15.04        | 15.13        | 15.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20825/2507.5            | 21100/2535   | 21375/2562.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 15.14                   | 14.78        | 15.26        | 15.80         |
|           |            | 1       | 38        | 15.07                   | 15.01        | 15.35        | 15.80         |
|           |            | 1       | 74        | 15.00                   | 15.22        | 15.04        | 15.80         |
|           |            | 36      | 0         | 15.18                   | 14.80        | 15.24        | 15.80         |
|           |            | 36      | 18        | 15.03                   | 15.14        | 15.43        | 15.80         |
|           |            | 36      | 39        | 14.98                   | 15.09        | 15.27        | 15.80         |
|           |            | 75      | 0         | 14.95                   | 14.91        | 15.23        | 15.80         |
|           | 16QAM      | 1       | 0         | 15.13                   | 14.84        | 15.19        | 15.80         |
|           |            | 1       | 38        | 15.05                   | 15.01        | 15.41        | 15.80         |
|           |            | 1       | 74        | 14.93                   | 15.11        | 15.02        | 15.80         |
|           |            | 36      | 0         | 15.11                   | 14.99        | 15.30        | 15.80         |
|           |            | 36      | 18        | 15.03                   | 15.23        | 15.25        | 15.80         |
|           |            | 36      | 39        | 14.95                   | 14.99        | 15.21        | 15.80         |
|           |            | 75      | 0         | 14.97                   | 14.97        | 15.20        | 15.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20850/2510              | 21100/2535   | 21350/2560   |               |
| 20MHz     | QPSK       | 1       | 0         | <b>15.07</b>            | 14.76        | 15.22        | 15.80         |
|           |            | 1       | 50        | <b>15.07</b>            | 15.05        | <b>15.29</b> | 15.80         |
|           |            | 1       | 99        | 14.85                   | <b>15.07</b> | 15.03        | 15.80         |
|           |            | 50      | 0         | 15.04                   | 14.84        | 15.26        | 15.80         |
|           |            | 50      | 25        | <b>15.05</b>            | <b>15.10</b> | <b>15.29</b> | 15.80         |
|           |            | 50      | 50        | 14.92                   | 15.04        | 15.12        | 15.80         |
|           |            | 100     | 0         | 15.00                   | 14.93        | <b>15.15</b> | 15.80         |
|           | 16QAM      | 1       | 0         | 15.06                   | 14.90        | 15.30        | 15.80         |
|           |            | 1       | 50        | 15.16                   | 15.00        | 15.26        | 15.80         |
|           |            | 1       | 99        | 14.80                   | 15.14        | 15.18        | 15.80         |
|           |            | 50      | 0         | 15.13                   | 14.99        | 15.41        | 15.80         |
|           |            | 50      | 25        | 15.11                   | 15.19        | 15.40        | 15.80         |
|           |            | 50      | 50        | 15.03                   | 15.10        | 15.10        | 15.80         |
|           |            | 100     | 0         | 14.96                   | 15.04        | 15.20        | 15.80         |

| LTE FDD Band 7<br>Body(standalone) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                          | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                    |            |         |           | 20775/2502.5            | 21100/2535 | 21425/2567.5 |                  |
| 5MHz                               | QPSK       | 1       | 0         | 22.34                   | 22.06      | 22.47        | 22.80            |
|                                    |            | 1       | 13        | 22.18                   | 22.28      | 22.49        | 22.80            |
|                                    |            | 1       | 24        | 22.13                   | 22.44      | 22.35        | 22.80            |
|                                    |            | 12      | 0         | 21.65                   | 21.57      | 21.99        | 22.80            |
|                                    |            | 12      | 6         | 21.66                   | 21.77      | 22.07        | 22.80            |



|           |            | 12      | 13        | 21.74                   | 21.79      | 21.76        | 22.80         |
|-----------|------------|---------|-----------|-------------------------|------------|--------------|---------------|
|           |            | 25      | 0         | 21.65                   | 21.64      | 22.02        | 22.80         |
|           | 16QAM      | 1       | 0         | 22.13                   | 22.27      | 21.96        | 22.80         |
|           |            | 1       | 13        | 22.10                   | 22.47      | 22.22        | 22.80         |
|           |            | 1       | 24        | 22.03                   | 22.05      | 21.89        | 22.80         |
|           |            | 12      | 0         | 20.97                   | 20.64      | 21.00        | 21.80         |
|           |            | 12      | 6         | 21.15                   | 20.72      | 21.00        | 21.80         |
|           |            | 12      | 13        | 20.84                   | 20.80      | 20.88        | 21.80         |
|           |            | 25      | 0         | 21.13                   | 20.85      | 20.93        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 20800/2505              | 21100/2535 | 21400/2565   |               |
| 10MHz     | QPSK       | 1       | 0         | 22.34                   | 22.16      | 22.45        | 22.80         |
|           |            | 1       | 25        | 22.30                   | 22.29      | 22.59        | 22.80         |
|           |            | 1       | 49        | 21.97                   | 22.49      | 22.20        | 22.80         |
|           |            | 25      | 0         | 21.67                   | 21.62      | 22.10        | 22.80         |
|           |            | 25      | 13        | 21.69                   | 21.76      | 22.01        | 22.80         |
|           |            | 25      | 25        | 21.65                   | 21.78      | 21.93        | 22.80         |
|           |            | 50      | 0         | 21.80                   | 21.70      | 21.88        | 22.80         |
|           | 16QAM      | 1       | 0         | 22.16                   | 22.31      | 21.98        | 22.80         |
|           |            | 1       | 25        | 22.12                   | 22.34      | 22.21        | 22.80         |
|           |            | 1       | 49        | 22.18                   | 21.89      | 21.72        | 22.80         |
|           |            | 25      | 0         | 20.89                   | 20.77      | 21.18        | 21.80         |
|           |            | 25      | 13        | 21.23                   | 20.68      | 20.96        | 21.80         |
|           |            | 25      | 25        | 20.95                   | 20.93      | 21.03        | 21.80         |
|           |            | 50      | 0         | 21.00                   | 20.64      | 21.01        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 20825/2507.5            | 21100/2535 | 21375/2562.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 22.29                   | 22.02      | 22.41        | 22.80         |
|           |            | 1       | 38        | 22.30                   | 22.43      | 22.48        | 22.80         |
|           |            | 1       | 74        | 22.05                   | 22.48      | 22.23        | 22.80         |
|           |            | 36      | 0         | 21.78                   | 21.44      | 22.09        | 22.80         |
|           |            | 36      | 18        | 21.74                   | 21.75      | 21.99        | 22.80         |
|           |            | 36      | 39        | 21.67                   | 21.70      | 21.95        | 22.80         |
|           |            | 75      | 0         | 21.66                   | 21.69      | 21.92        | 22.80         |
|           | 16QAM      | 1       | 0         | 22.23                   | 22.42      | 21.88        | 22.80         |
|           |            | 1       | 38        | 22.26                   | 22.53      | 22.17        | 22.80         |
|           |            | 1       | 74        | 22.13                   | 22.05      | 21.72        | 22.80         |
|           |            | 36      | 0         | 21.02                   | 20.79      | 20.88        | 21.80         |
|           |            | 36      | 18        | 21.03                   | 20.75      | 21.12        | 21.80         |
|           |            | 36      | 39        | 20.82                   | 20.91      | 20.97        | 21.80         |
|           |            | 75      | 0         | 20.99                   | 20.77      | 21.19        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 20850/2510              | 21100/2535 | 21350/2560   |               |



|       |       |     |    |              |              |              |       |
|-------|-------|-----|----|--------------|--------------|--------------|-------|
| 20MHz | QPSK  | 1   | 0  | <b>22.28</b> | 22.03        | 22.45        | 22.80 |
|       |       | 1   | 50 | 22.19        | 22.31        | <b>22.53</b> | 22.80 |
|       |       | 1   | 99 | 22.02        | <b>22.40</b> | 22.22        | 22.80 |
|       |       | 50  | 0  | <b>21.70</b> | 21.47        | <b>22.00</b> | 22.80 |
|       |       | 50  | 25 | <b>21.70</b> | <b>21.75</b> | 21.98        | 22.80 |
|       |       | 50  | 50 | 21.62        | 21.70        | 21.81        | 22.80 |
|       |       | 100 | 0  | 21.66        | 21.61        | <b>21.90</b> | 22.80 |
|       | 16QAM | 1   | 0  | 22.41        | 22.16        | 22.31        | 22.80 |
|       |       | 1   | 50 | 22.56        | 22.19        | 22.50        | 22.80 |
|       |       | 1   | 99 | 22.28        | 22.02        | 22.38        | 22.80 |
|       |       | 50  | 0  | 21.10        | 20.62        | 20.96        | 21.80 |
|       |       | 50  | 25 | 21.11        | 20.65        | 21.13        | 21.80 |
|       |       | 50  | 50 | 20.92        | 20.81        | 20.87        | 21.80 |
|       |       | 100 | 0  | 21.19        | 20.72        | 21.07        | 21.80 |

| LTE FDD Band 7<br>head(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|--------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                      |            |         |           | 20775/2502.5            | 21100/2535 | 21425/2567.5 |                  |
| 5MHz                                 | QPSK       | 1       | 0         | 14.27                   | 13.93      | 14.38        | 14.80            |
|                                      |            | 1       | 13        | 14.12                   | 14.22      | 14.39        | 14.80            |
|                                      |            | 1       | 24        | 13.97                   | 14.29      | 14.00        | 14.80            |
|                                      |            | 12      | 0         | 14.25                   | 14.07      | 14.46        | 14.80            |
|                                      |            | 12      | 6         | 14.23                   | 14.33      | 14.34        | 14.80            |
|                                      |            | 12      | 13        | 14.09                   | 14.38      | 14.25        | 14.80            |
|                                      |            | 25      | 0         | 14.09                   | 14.17      | 14.40        | 14.80            |
|                                      | 16QAM      | 1       | 0         | 14.24                   | 13.98      | 14.26        | 14.80            |
|                                      |            | 1       | 13        | 14.19                   | 14.17      | 14.41        | 14.80            |
|                                      |            | 1       | 24        | 13.88                   | 14.36      | 14.05        | 14.80            |
|                                      |            | 12      | 0         | 14.25                   | 14.00      | 14.33        | 14.80            |
|                                      |            | 12      | 6         | 14.29                   | 14.34      | 14.45        | 14.80            |
|                                      |            | 12      | 13        | 14.05                   | 14.31      | 14.25        | 14.80            |
|                                      |            | 25      | 0         | 14.06                   | 14.12      | 14.35        | 14.80            |
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                      |            |         |           | 20800/2505              | 21100/2535 | 21400/2565   |                  |
| 10MHz                                | QPSK       | 1       | 0         | 14.17                   | 13.95      | 14.23        | 14.80            |
|                                      |            | 1       | 25        | 14.10                   | 14.23      | 14.34        | 14.80            |
|                                      |            | 1       | 49        | 14.04                   | 14.43      | 14.04        | 14.80            |
|                                      |            | 25      | 0         | 14.14                   | 14.00      | 14.46        | 14.80            |
|                                      |            | 25      | 13        | 14.18                   | 14.33      | 14.54        | 14.80            |
|                                      |            | 25      | 25        | 14.09                   | 14.31      | 14.25        | 14.80            |
|                                      |            | 50      | 0         | 14.15                   | 14.09      | 14.27        | 14.80            |
|                                      | 16QAM      | 1       | 0         | 14.16                   | 13.97      | 14.27        | 14.80            |



|           |            | 1       | 25        | 14.11                   | 14.27        | 14.37        | 14.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 1       | 49        | 13.93                   | 14.28        | 14.01        | 14.80         |
|           |            | 25      | 0         | 14.16                   | 14.00        | 14.39        | 14.80         |
|           |            | 25      | 13        | 14.12                   | 14.20        | 14.48        | 14.80         |
|           |            | 25      | 25        | 14.17                   | 14.27        | 14.34        | 14.80         |
|           |            | 50      | 0         | 14.25                   | 14.13        | 14.32        | 14.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20825/2507.5            | 21100/2535   | 21375/2562.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 14.23                   | 14.05        | 14.36        | 14.80         |
|           |            | 1       | 38        | 14.07                   | 14.17        | 14.40        | 14.80         |
|           |            | 1       | 74        | 14.00                   | 14.41        | 14.12        | 14.80         |
|           |            | 36      | 0         | 14.06                   | 13.93        | 14.47        | 14.80         |
|           |            | 36      | 18        | 14.13                   | 14.26        | 14.42        | 14.80         |
|           |            | 36      | 39        | 14.19                   | 14.29        | 14.25        | 14.80         |
|           |            | 75      | 0         | 14.17                   | 14.17        | 14.28        | 14.80         |
|           | 16QAM      | 1       | 0         | 14.23                   | 13.98        | 14.37        | 14.80         |
|           |            | 1       | 38        | 14.12                   | 14.32        | 14.46        | 14.80         |
|           |            | 1       | 74        | 14.07                   | 14.25        | 14.12        | 14.80         |
|           |            | 36      | 0         | 14.16                   | 13.93        | 14.45        | 14.80         |
|           |            | 36      | 18        | 14.30                   | 14.25        | 14.45        | 14.80         |
|           |            | 36      | 39        | 14.12                   | 14.20        | 14.21        | 14.80         |
|           |            | 75      | 0         | 14.19                   | 14.07        | 14.44        | 14.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 20850/2510              | 21100/2535   | 21350/2560   |               |
| 20MHz     | QPSK       | 1       | 0         | <b>14.14</b>            | 13.98        | 14.27        | 14.80         |
|           |            | 1       | 50        | 14.12                   | 14.22        | <b>14.34</b> | 14.80         |
|           |            | 1       | 99        | 13.93                   | <b>14.29</b> | 14.05        | 14.80         |
|           |            | 50      | 0         | 14.11                   | 13.94        | 14.38        | 14.80         |
|           |            | 50      | 25        | <b>14.15</b>            | <b>14.23</b> | <b>14.39</b> | 14.80         |
|           |            | 50      | 50        | 14.04                   | <b>14.23</b> | 14.25        | 14.80         |
|           |            | 100     | 0         | 14.10                   | 14.05        | <b>14.31</b> | 14.80         |
|           | 16QAM      | 1       | 0         | 14.11                   | 14.11        | 14.30        | 14.80         |
|           |            | 1       | 50        | 14.14                   | 14.19        | 14.37        | 14.80         |
|           |            | 1       | 99        | 13.88                   | 14.30        | 14.04        | 14.80         |
|           |            | 50      | 0         | 14.24                   | 14.09        | 14.43        | 14.80         |
|           |            | 50      | 25        | 14.18                   | 14.27        | 14.39        | 14.80         |
|           |            | 50      | 50        | 14.19                   | 14.19        | 14.22        | 14.80         |
|           |            | 100     | 0         | 14.11                   | 14.03        | 14.27        | 14.80         |

| LTE FDD Band 7<br>Body(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    | Tune-up<br>Limit |
|--------------------------------------|------------|---------|-----------|-------------------------|------------------|
| Bandwidth                            | Modulation | RB size | RB offset | Channel/Frequency (MHz) |                  |



|           |            |         |           | 20775/2502.5            | 21100/2535 | 21425/2567.5 |               |
|-----------|------------|---------|-----------|-------------------------|------------|--------------|---------------|
| 5MHz      | QPSK       | 1       | 0         | 20.37                   | 19.96      | 20.53        | 21.80         |
|           |            | 1       | 13        | 20.29                   | 20.31      | 20.59        | 21.80         |
|           |            | 1       | 24        | 20.07                   | 20.34      | 20.18        | 21.80         |
|           |            | 12      | 0         | 20.26                   | 20.06      | 20.47        | 21.80         |
|           |            | 12      | 6         | 20.10                   | 20.24      | 20.55        | 21.80         |
|           |            | 12      | 13        | 20.11                   | 20.34      | 20.36        | 21.80         |
|           |            | 25      | 0         | 20.07                   | 20.07      | 20.45        | 21.80         |
|           | 16QAM      | 1       | 0         | 20.36                   | 20.11      | 20.41        | 21.80         |
|           |            | 1       | 13        | 20.11                   | 20.28      | 20.58        | 21.80         |
|           |            | 1       | 24        | 20.15                   | 20.28      | 20.13        | 21.80         |
|           |            | 12      | 0         | 20.26                   | 20.08      | 20.40        | 21.80         |
|           |            | 12      | 6         | 20.24                   | 20.26      | 20.60        | 21.80         |
|           |            | 12      | 13        | 20.13                   | 20.24      | 20.25        | 21.80         |
|           |            | 25      | 0         | 20.15                   | 20.07      | 20.38        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 20800/2505              | 21100/2535 | 21400/2565   |               |
| 10MHz     | QPSK       | 1       | 0         | 20.35                   | 20.07      | 20.50        | 21.80         |
|           |            | 1       | 25        | 20.28                   | 20.31      | 20.60        | 21.80         |
|           |            | 1       | 49        | 19.97                   | 20.39      | 20.20        | 21.80         |
|           |            | 25      | 0         | 20.27                   | 19.95      | 20.53        | 21.80         |
|           |            | 25      | 13        | 20.13                   | 20.26      | 20.42        | 21.80         |
|           |            | 25      | 25        | 20.05                   | 20.27      | 20.19        | 21.80         |
|           |            | 50      | 0         | 20.20                   | 20.06      | 20.37        | 21.80         |
|           | 16QAM      | 1       | 0         | 20.28                   | 20.04      | 20.45        | 21.80         |
|           |            | 1       | 25        | 20.12                   | 20.24      | 20.61        | 21.80         |
|           |            | 1       | 49        | 20.15                   | 20.30      | 20.21        | 21.80         |
|           |            | 25      | 0         | 20.17                   | 20.06      | 20.42        | 21.80         |
|           |            | 25      | 13        | 20.12                   | 20.18      | 20.53        | 21.80         |
|           |            | 25      | 25        | 20.13                   | 20.28      | 20.30        | 21.80         |
|           |            | 50      | 0         | 20.19                   | 20.15      | 20.39        | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up Limit |
|           |            |         |           | 20825/2507.5            | 21100/2535 | 21375/2562.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 20.19                   | 20.10      | 20.53        | 21.80         |
|           |            | 1       | 38        | 20.26                   | 20.39      | 20.57        | 21.80         |
|           |            | 1       | 74        | 20.10                   | 20.23      | 20.23        | 21.80         |
|           |            | 36      | 0         | 20.11                   | 20.08      | 20.49        | 21.80         |
|           |            | 36      | 18        | 20.16                   | 20.36      | 20.54        | 21.80         |
|           |            | 36      | 39        | 20.02                   | 20.29      | 20.26        | 21.80         |
|           |            | 75      | 0         | 20.09                   | 20.07      | 20.27        | 21.80         |
|           | 16QAM      | 1       | 0         | 20.25                   | 19.94      | 20.48        | 21.80         |
|           |            | 1       | 38        | 20.13                   | 20.40      | 20.51        | 21.80         |
|           |            | 1       | 74        | 19.99                   | 20.31      | 20.21        | 21.80         |



|           |            | 36      | 0         | 20.29                   | 20.10      | 20.55      | 21.80         |
|-----------|------------|---------|-----------|-------------------------|------------|------------|---------------|
|           |            | 36      | 18        | 20.13                   | 20.30      | 20.59      | 21.80         |
|           |            | 36      | 39        | 20.03                   | 20.26      | 20.34      | 21.80         |
|           |            | 75      | 0         | 20.12                   | 20.05      | 20.39      | 21.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |            | Tune-up Limit |
|           |            |         |           | 20850/2510              | 21100/2535 | 21350/2560 |               |
| 20MHz     | QPSK       | 1       | 0         | 20.23                   | 19.96      | 20.39      | 21.80         |
|           |            | 1       | 50        | 20.16                   | 20.25      | 20.48      | 21.80         |
|           |            | 1       | 99        | 20.00                   | 20.25      | 20.12      | 21.80         |
|           |            | 50      | 0         | 20.16                   | 20.00      | 20.44      | 21.80         |
|           |            | 50      | 25        | 20.15                   | 20.23      | 20.45      | 21.80         |
|           |            | 50      | 50        | 20.05                   | 20.21      | 20.23      | 21.80         |
|           |            | 100     | 0         | 20.11                   | 20.01      | 20.30      | 21.80         |
|           | 16QAM      | 1       | 0         | 20.37                   | 20.01      | 20.52      | 21.80         |
|           |            | 1       | 50        | 20.18                   | 20.32      | 20.47      | 21.80         |
|           |            | 1       | 99        | 19.99                   | 20.29      | 20.20      | 21.80         |
|           |            | 50      | 0         | 20.22                   | 19.95      | 20.48      | 21.80         |
|           |            | 50      | 25        | 20.26                   | 20.28      | 20.56      | 21.80         |
|           |            | 50      | 50        | 20.16                   | 20.26      | 20.36      | 21.80         |
|           |            | 100     | 0         | 20.10                   | 20.16      | 20.39      | 21.80         |

| LTE TDD Band 38<br>head(standalone) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|-------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                           | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                     |            |         |           | 37775/2572.5            | 38000/2595 | 38225/2617.5 |                  |
| 5MHz                                | QPSK       | 1       | 0         | 20.00                   | 19.87      | 19.99        | 20.80            |
|                                     |            | 1       | 13        | 20.12                   | 19.99      | 20.06        | 20.80            |
|                                     |            | 1       | 24        | 19.90                   | 20.06      | 19.79        | 20.80            |
|                                     |            | 12      | 0         | 19.79                   | 19.97      | 19.98        | 20.80            |
|                                     |            | 12      | 6         | 19.89                   | 20.00      | 20.00        | 20.80            |
|                                     |            | 12      | 13        | 19.90                   | 19.94      | 19.92        | 20.80            |
|                                     |            | 25      | 0         | 19.46                   | 19.40      | 19.46        | 20.80            |
|                                     | 16QAM      | 1       | 0         | 19.93                   | 19.92      | 19.99        | 20.80            |
|                                     |            | 1       | 13        | 20.12                   | 20.11      | 20.05        | 20.80            |
|                                     |            | 1       | 24        | 19.99                   | 19.98      | 19.80        | 20.80            |
|                                     |            | 12      | 0         | 19.81                   | 19.90      | 19.89        | 20.80            |
|                                     |            | 12      | 6         | 19.87                   | 20.05      | 19.94        | 20.80            |
|                                     |            | 12      | 13        | 19.94                   | 20.07      | 19.99        | 20.80            |
|                                     |            | 25      | 0         | 19.44                   | 19.44      | 19.42        | 20.80            |
| Bandwidth                           | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                     |            |         |           | 37800/2575              | 38000/2595 | 38200/2615   |                  |
| 10MHz                               | QPSK       | 1       | 0         | 19.98                   | 19.97      | 20.02        | 20.80            |



|           |            | 1       | 25        | 19.97                   | 20.08        | 20.07        | 20.80         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 1       | 49        | 20.01                   | 20.00        | 19.74        | 20.80         |
|           |            | 25      | 0         | 19.83                   | 19.88        | 19.96        | 20.80         |
|           |            | 25      | 13        | 19.97                   | 20.09        | 20.02        | 20.80         |
|           |            | 25      | 25        | 19.87                   | 20.06        | 20.02        | 20.80         |
|           |            | 50      | 0         | 19.26                   | 19.55        | 19.41        | 20.80         |
|           |            | 50      | 25        | 19.97                   | 20.09        | 20.02        | 20.80         |
|           | 16QAM      | 1       | 0         | 19.95                   | 19.80        | 19.97        | 20.80         |
|           |            | 1       | 25        | 20.02                   | 20.10        | 20.04        | 20.80         |
|           |            | 1       | 49        | 19.92                   | 19.88        | 19.81        | 20.80         |
|           |            | 25      | 0         | 19.77                   | 20.04        | 19.88        | 20.80         |
|           |            | 25      | 13        | 19.85                   | 20.12        | 20.01        | 20.80         |
|           |            | 25      | 25        | 19.80                   | 20.04        | 19.85        | 20.80         |
|           |            | 50      | 0         | 19.33                   | 19.38        | 19.42        | 20.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 37825/2577.5            | 38000/2595   | 38175/2612.5 |               |
| 15MHz     | QPSK       | 1       | 0         | 20.06                   | 19.97        | 19.84        | 20.80         |
|           |            | 1       | 38        | 19.98                   | 20.12        | 20.04        | 20.80         |
|           |            | 1       | 74        | 19.99                   | 20.08        | 19.80        | 20.80         |
|           |            | 36      | 0         | 19.79                   | 19.88        | 19.85        | 20.80         |
|           |            | 36      | 18        | 19.87                   | 20.14        | 20.09        | 20.80         |
|           |            | 36      | 39        | 19.89                   | 20.02        | 19.89        | 20.80         |
|           |            | 75      | 0         | 19.30                   | 19.55        | 19.36        | 20.80         |
|           | 16QAM      | 1       | 0         | 19.97                   | 19.96        | 19.86        | 20.80         |
|           |            | 1       | 38        | 19.95                   | 20.12        | 19.97        | 20.80         |
|           |            | 1       | 74        | 19.87                   | 19.97        | 19.85        | 20.80         |
|           |            | 36      | 0         | 19.93                   | 19.87        | 20.00        | 20.80         |
|           |            | 36      | 18        | 19.92                   | 19.99        | 19.97        | 20.80         |
|           |            | 36      | 39        | 19.83                   | 19.95        | 19.86        | 20.80         |
|           |            | 75      | 0         | 19.39                   | 19.51        | 19.46        | 20.80         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 37850/2580              | 38000/2595   | 38150/2610   |               |
| 20MHz     | QPSK       | 1       | 0         | 19.91                   | 19.83        | 19.87        | 20.80         |
|           |            | 1       | 50        | <b>20.00</b>            | <b>20.03</b> | <b>19.97</b> | 20.80         |
|           |            | 1       | 99        | 19.90                   | 19.93        | 19.71        | 20.80         |
|           |            | 50      | 0         | 19.79                   | 19.90        | 19.90        | 20.80         |
|           |            | 50      | 25        | <b>19.83</b>            | <b>19.99</b> | <b>19.96</b> | 20.80         |
|           |            | 50      | 50        | <b>19.83</b>            | 19.98        | 19.90        | 20.80         |
|           |            | 100     | 0         | 19.31                   | <b>19.42</b> | 19.36        | 20.80         |
|           | 16QAM      | 1       | 0         | 19.91                   | 19.81        | 20.02        | 20.80         |
|           |            | 1       | 50        | 20.06                   | 20.14        | 20.03        | 20.80         |
|           |            | 1       | 99        | 19.88                   | 20.02        | 19.71        | 20.80         |
|           |            | 50      | 0         | 19.86                   | 20.02        | 19.89        | 20.80         |
|           |            | 50      | 25        | 19.85                   | 20.02        | 19.98        | 20.80         |



|  |  |     |    |       |       |       |       |
|--|--|-----|----|-------|-------|-------|-------|
|  |  | 50  | 50 | 19.93 | 19.95 | 19.86 | 20.80 |
|  |  | 100 | 0  | 19.31 | 19.44 | 19.46 | 20.80 |

| LTE TDD Band 38<br>head(WWAN+2.4G/5G) |            |         |           | Conducted Power(dBm)    |            |              | Tune-up<br>Limit |
|---------------------------------------|------------|---------|-----------|-------------------------|------------|--------------|------------------|
| Bandwidth                             | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              |                  |
|                                       |            |         |           | 37775/2572.5            | 38000/2595 | 38225/2617.5 |                  |
| 5MHz                                  | QPSK       | 1       | 0         | 19.31                   | 19.30      | 19.64        | 20.30            |
|                                       |            | 1       | 13        | 19.33                   | 19.52      | 19.66        | 20.30            |
|                                       |            | 1       | 24        | 19.29                   | 19.41      | 19.40        | 20.30            |
|                                       |            | 12      | 0         | 19.25                   | 19.34      | 19.38        | 20.30            |
|                                       |            | 12      | 6         | 19.41                   | 19.42      | 19.38        | 20.30            |
|                                       |            | 12      | 13        | 19.34                   | 19.57      | 19.45        | 20.30            |
|                                       |            | 25      | 0         | 18.83                   | 18.91      | 18.83        | 20.30            |
|                                       | 16QAM      | 1       | 0         | 19.37                   | 19.30      | 19.49        | 20.30            |
|                                       |            | 1       | 13        | 19.39                   | 19.45      | 19.66        | 20.30            |
|                                       |            | 1       | 24        | 19.23                   | 19.44      | 19.41        | 20.30            |
|                                       |            | 12      | 0         | 19.24                   | 19.53      | 19.54        | 20.30            |
|                                       |            | 12      | 6         | 19.36                   | 19.48      | 19.57        | 20.30            |
|                                       |            | 12      | 13        | 19.37                   | 19.47      | 19.36        | 20.30            |
|                                       |            | 25      | 0         | 18.93                   | 18.96      | 19.00        | 20.30            |
| Bandwidth                             | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                       |            |         |           | 37800/2575              | 38000/2595 | 38200/2615   |                  |
| 10MHz                                 | QPSK       | 1       | 0         | 19.20                   | 19.31      | 19.48        | 20.30            |
|                                       |            | 1       | 25        | 19.31                   | 19.55      | 19.52        | 20.30            |
|                                       |            | 1       | 49        | 19.43                   | 19.44      | 19.45        | 20.30            |
|                                       |            | 25      | 0         | 19.40                   | 19.39      | 19.50        | 20.30            |
|                                       |            | 25      | 13        | 19.37                   | 19.60      | 19.38        | 20.30            |
|                                       |            | 25      | 25        | 19.27                   | 19.50      | 19.41        | 20.30            |
|                                       |            | 50      | 0         | 18.94                   | 18.90      | 18.97        | 20.30            |
|                                       | 16QAM      | 1       | 0         | 19.24                   | 19.28      | 19.48        | 20.30            |
|                                       |            | 1       | 25        | 19.41                   | 19.58      | 19.66        | 20.30            |
|                                       |            | 1       | 49        | 19.24                   | 19.44      | 19.42        | 20.30            |
|                                       |            | 25      | 0         | 19.35                   | 19.44      | 19.47        | 20.30            |
|                                       |            | 25      | 13        | 19.35                   | 19.58      | 19.50        | 20.30            |
|                                       |            | 25      | 25        | 19.38                   | 19.51      | 19.36        | 20.30            |
|                                       |            | 50      | 0         | 18.80                   | 19.05      | 18.97        | 20.30            |
| Bandwidth                             | Modulation | RB size | RB offset | Channel/Frequency (MHz) |            |              | Tune-up<br>Limit |
|                                       |            |         |           | 37825/2577.5            | 38000/2595 | 38175/2612.5 |                  |
| 15MHz                                 | QPSK       | 1       | 0         | 19.33                   | 19.42      | 19.46        | 20.30            |
|                                       |            | 1       | 38        | 19.33                   | 19.44      | 19.71        | 20.30            |
|                                       |            | 1       | 74        | 19.43                   | 19.35      | 19.45        | 20.30            |



|           |            | 36      | 0         | 19.25                   | 19.34        | 19.48        | 20.30         |
|-----------|------------|---------|-----------|-------------------------|--------------|--------------|---------------|
|           |            | 36      | 18        | 19.40                   | 19.48        | 19.42        | 20.30         |
|           |            | 36      | 39        | 19.43                   | 19.41        | 19.39        | 20.30         |
|           |            | 75      | 0         | 18.89                   | 19.02        | 18.91        | 20.30         |
|           | 16QAM      | 1       | 0         | 19.25                   | 19.42        | 19.51        | 20.30         |
|           |            | 1       | 38        | 19.35                   | 19.56        | 19.58        | 20.30         |
|           |            | 1       | 74        | 19.36                   | 19.33        | 19.28        | 20.30         |
|           |            | 36      | 0         | 19.23                   | 19.35        | 19.40        | 20.30         |
|           |            | 36      | 18        | 19.32                   | 19.59        | 19.50        | 20.30         |
|           |            | 36      | 39        | 19.33                   | 19.58        | 19.53        | 20.30         |
|           |            | 75      | 0         | 18.77                   | 18.99        | 18.93        | 20.30         |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) |              |              | Tune-up Limit |
|           |            |         |           | 37850/2580              | 38000/2595   | 38150/2610   |               |
| 20MHz     | QPSK       | 1       | 0         | 19.22                   | 19.27        | 19.49        | 20.30         |
|           |            | 1       | 50        | <b>19.34</b>            | <b>19.48</b> | <b>19.57</b> | 20.30         |
|           |            | 1       | 99        | 19.28                   | 19.35        | 19.31        | 20.30         |
|           |            | 50      | 0         | 19.27                   | 19.38        | 19.41        | 20.30         |
|           |            | 50      | 25        | <b>19.30</b>            | <b>19.46</b> | <b>19.43</b> | 20.30         |
|           |            | 50      | 50        | 19.29                   | <b>19.46</b> | 19.41        | 20.30         |
|           |            | 100     | 0         | 18.80                   | <b>18.94</b> | 18.85        | 20.30         |
|           | 16QAM      | 1       | 0         | 19.34                   | 19.40        | 19.59        | 20.30         |
|           |            | 1       | 50        | 19.39                   | 19.47        | 19.68        | 20.30         |
|           |            | 1       | 99        | 19.28                   | 19.37        | 19.32        | 20.30         |
|           |            | 50      | 0         | 19.22                   | 19.35        | 19.43        | 20.30         |
|           |            | 50      | 25        | 19.40                   | 19.46        | 19.55        | 20.30         |
|           |            | 50      | 50        | 19.26                   | 19.58        | 19.45        | 20.30         |
|           |            | 100     | 0         | 18.95                   | 18.98        | 18.98        | 20.30         |

| LTE TDD Band 41<br>head(standalone) |            |                  |        | Conducted Power(dBm)   |                  |                |                  |                  | Tune-up<br>Limit |
|-------------------------------------|------------|------------------|--------|------------------------|------------------|----------------|------------------|------------------|------------------|
| Bandwidth                           | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |                  |                |                  |                  |                  |
|                                     |            |                  |        | 39675/<br>2498.5       | 40148/<br>2545.8 | 40620/<br>2593 | 41093/<br>2640.3 | 41565/<br>2687.5 |                  |
| 5MHz                                | QPSK       | 1                | 0      | 19.42                  | 19.49            | 19.39          | 19.29            | 19.58            | 20.80            |
|                                     |            | 1                | 13     | 19.50                  | 19.45            | 19.62          | 19.56            | 19.65            | 20.80            |
|                                     |            | 1                | 24     | 19.19                  | 19.31            | 19.55          | 19.20            | 19.29            | 20.80            |
|                                     |            | 12               | 0      | 19.32                  | 19.40            | 19.56          | 19.29            | 19.42            | 20.80            |
|                                     |            | 12               | 6      | 19.45                  | 19.58            | 19.54          | 19.34            | 19.43            | 20.80            |
|                                     |            | 12               | 13     | 19.54                  | 19.39            | 19.58          | 19.47            | 19.42            | 20.80            |
|                                     |            | 25               | 0      | 19.39                  | 19.50            | 19.59          | 19.42            | 19.29            | 20.80            |
|                                     | 16QAM      | 1                | 0      | 19.45                  | 19.28            | 19.37          | 19.34            | 19.39            | 20.80            |
|                                     |            | 1                | 13     | 19.55                  | 19.58            | 19.62          | 19.42            | 19.67            | 20.80            |
|                                     |            | 1                | 24     | 19.27                  | 19.06            | 19.50          | 19.08            | 19.43            | 20.80            |



|           |            | 12            | 0      | 19.37                  | 19.35            | 19.44          | 19.45            | 19.37            | 20.80         |
|-----------|------------|---------------|--------|------------------------|------------------|----------------|------------------|------------------|---------------|
|           |            | 12            | 6      | 19.45                  | 19.40            | 19.67          | 19.51            | 19.49            | 20.80         |
|           |            | 12            | 13     | 19.51                  | 19.54            | 19.61          | 19.58            | 19.28            | 20.80         |
|           |            | 25            | 0      | 19.46                  | 19.43            | 19.52          | 19.48            | 19.41            | 20.80         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |                  |                |                  |                  | Tune-up Limit |
|           |            |               |        | 39700/<br>2501         | 40160/<br>2547   | 40620/<br>2593 | 41080/<br>2639   | 41540/<br>2685   |               |
| 10MHz     | QPSK       | 1             | 0      | 19.46                  | 19.51            | 19.38          | 19.33            | 19.56            | 20.80         |
|           |            | 1             | 25     | 19.40                  | 19.45            | 19.51          | 19.37            | 19.66            | 20.80         |
|           |            | 1             | 49     | 19.32                  | 19.10            | 19.56          | 19.22            | 19.41            | 20.80         |
|           |            | 25            | 0      | 19.27                  | 19.37            | 19.58          | 19.27            | 19.37            | 20.80         |
|           |            | 25            | 13     | 19.55                  | 19.52            | 19.62          | 19.51            | 19.48            | 20.80         |
|           |            | 25            | 25     | 19.42                  | 19.68            | 19.58          | 19.54            | 19.35            | 20.80         |
|           |            | 50            | 0      | 19.35                  | 19.34            | 19.51          | 19.48            | 19.29            | 20.80         |
|           | 16QAM      | 1             | 0      | 19.47                  | 19.40            | 19.28          | 19.48            | 19.53            | 20.80         |
|           |            | 1             | 25     | 19.45                  | 19.62            | 19.65          | 19.45            | 19.53            | 20.80         |
|           |            | 1             | 49     | 19.33                  | 19.07            | 19.53          | 19.26            | 19.37            | 20.80         |
|           |            | 25            | 0      | 19.35                  | 19.22            | 19.46          | 19.36            | 19.56            | 20.80         |
|           |            | 25            | 13     | 19.45                  | 19.32            | 19.64          | 19.50            | 19.45            | 20.80         |
|           |            | 25            | 25     | 19.41                  | 19.46            | 19.66          | 19.49            | 19.40            | 20.80         |
|           |            | 50            | 0      | 19.45                  | 19.40            | 19.54          | 19.38            | 19.41            | 20.80         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |                  |                |                  |                  | Tune-up Limit |
|           |            |               |        | 39725/<br>2503.5       | 40173/<br>2548.3 | 40620/<br>2593 | 41068/<br>2637.8 | 41515/<br>2682.5 |               |
| 15MHz     | QPSK       | 1             | 0      | 19.40                  | 19.45            | 19.36          | 19.42            | 19.45            | 20.80         |
|           |            | 1             | 38     | 19.55                  | 19.41            | 19.50          | 19.38            | 19.56            | 20.80         |
|           |            | 1             | 74     | 19.29                  | 19.10            | 19.52          | 19.14            | 19.42            | 20.80         |
|           |            | 36            | 0      | 19.34                  | 19.45            | 19.43          | 19.20            | 19.38            | 20.80         |
|           |            | 36            | 18     | 19.36                  | 19.53            | 19.66          | 19.40            | 19.42            | 20.80         |
|           |            | 36            | 39     | 19.48                  | 19.46            | 19.59          | 19.54            | 19.35            | 20.80         |
|           |            | 75            | 0      | 19.37                  | 19.42            | 19.44          | 19.52            | 19.39            | 20.80         |
|           | 16QAM      | 1             | 0      | 19.33                  | 19.52            | 19.28          | 19.42            | 19.38            | 20.80         |
|           |            | 1             | 38     | 19.45                  | 19.49            | 19.68          | 19.60            | 19.68            | 20.80         |
|           |            | 1             | 74     | 19.20                  | 19.33            | 19.59          | 19.10            | 19.38            | 20.80         |
|           |            | 36            | 0      | 19.39                  | 19.24            | 19.57          | 19.30            | 19.44            | 20.80         |
|           |            | 36            | 18     | 19.54                  | 19.52            | 19.61          | 19.42            | 19.42            | 20.80         |
|           |            | 36            | 39     | 19.44                  | 19.52            | 19.58          | 19.65            | 19.33            | 20.80         |
|           |            | 75            | 0      | 19.47                  | 19.48            | 19.54          | 19.35            | 19.43            | 20.80         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |                  |                |                  |                  | Tune-up Limit |
|           |            |               |        | 39750/<br>2506         | 40185/<br>2549.5 | 40620/<br>2593 | 41055/<br>2636.5 | 41490/<br>2680   |               |
| 20MHz     | QPSK       | 1             | 0      | 19.34                  | 19.38            | 19.33          | 19.57            | 19.43            | 20.80         |
|           |            | 1             | 50     | 19.42                  | 19.58            | 19.53          | 19.49            | 19.54            | 20.80         |



|  |       |     |    |              |              |              |              |              |       |
|--|-------|-----|----|--------------|--------------|--------------|--------------|--------------|-------|
|  |       | 1   | 99 | 19.23        | 19.26        | 19.44        | 19.05        | 19.32        | 20.80 |
|  |       | 50  | 0  | 19.29        | <b>19.47</b> | 19.43        | 19.23        | <b>19.41</b> | 20.80 |
|  |       | 50  | 25 | <b>19.40</b> | 19.38        | 19.53        | <b>19.59</b> | 19.39        | 20.80 |
|  |       | 50  | 50 | <b>19.40</b> | 19.43        | <b>19.54</b> | 19.46        | 19.29        | 20.80 |
|  |       | 100 | 0  | 19.37        | <b>19.43</b> | <b>19.47</b> | 19.31        | 19.34        | 20.80 |
|  | 16QAM | 1   | 0  | 19.47        | 19.47        | 19.45        | 19.50        | 19.38        | 20.80 |
|  |       | 1   | 50 | 19.44        | 19.44        | 19.68        | 19.62        | 19.54        | 20.80 |
|  |       | 1   | 99 | 19.27        | 19.25        | 19.57        | 19.25        | 19.31        | 20.80 |
|  |       | 50  | 0  | 19.44        | 19.27        | 19.43        | 19.26        | 19.48        | 20.80 |
|  |       | 50  | 25 | 19.46        | 19.47        | 19.56        | 19.60        | 19.53        | 20.80 |
|  |       | 50  | 50 | 19.50        | 19.61        | 19.61        | 19.45        | 19.25        | 20.80 |
|  |       | 100 | 0  | 19.43        | 19.54        | 19.47        | 19.37        | 19.35        | 20.80 |

| LTE TDD Band 41<br>head(WWAN+2.4G/5G) |            |                  |        | Conducted Power(dBm)   |                  |                |                  |                  | Tune-up<br>Limit |
|---------------------------------------|------------|------------------|--------|------------------------|------------------|----------------|------------------|------------------|------------------|
| Bandwidth                             | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |                  |                |                  |                  |                  |
|                                       |            |                  |        | 39675/<br>2498.5       | 40148/<br>2545.8 | 40620/<br>2593 | 41093/<br>2640.3 | 41565/<br>2687.5 |                  |
| 5MHz                                  | QPSK       | 1                | 0      | 19.03                  | 19.11            | 18.99          | 19.00            | 18.99            | 20.30            |
|                                       |            | 1                | 13     | 19.02                  | 18.96            | 19.13          | 19.16            | 19.28            | 20.30            |
|                                       |            | 1                | 24     | 19.04                  | 18.96            | 19.04          | 18.99            | 18.85            | 20.30            |
|                                       |            | 12               | 0      | 18.86                  | 18.71            | 19.17          | 19.00            | 19.03            | 20.30            |
|                                       |            | 12               | 6      | 19.04                  | 19.07            | 19.05          | 19.10            | 19.06            | 20.30            |
|                                       |            | 12               | 13     | 19.08                  | 19.22            | 19.05          | 19.06            | 18.97            | 20.30            |
|                                       |            | 25               | 0      | 19.12                  | 19.02            | 19.12          | 19.05            | 18.94            | 20.30            |
|                                       | 16QAM      | 1                | 0      | 19.02                  | 19.07            | 19.00          | 18.92            | 19.13            | 20.30            |
|                                       |            | 1                | 13     | 19.08                  | 19.12            | 19.22          | 18.93            | 19.19            | 20.30            |
|                                       |            | 1                | 24     | 19.04                  | 19.00            | 19.04          | 19.17            | 18.72            | 20.30            |
|                                       |            | 12               | 0      | 18.86                  | 18.97            | 19.14          | 18.78            | 19.18            | 20.30            |
|                                       |            | 12               | 6      | 19.11                  | 19.19            | 19.06          | 19.18            | 19.11            | 20.30            |
|                                       |            | 12               | 13     | 18.93                  | 19.02            | 19.00          | 19.19            | 18.97            | 20.30            |
|                                       |            | 25               | 0      | 18.97                  | 18.97            | 19.14          | 19.20            | 18.94            | 20.30            |
| Bandwidth                             | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |                  |                |                  |                  | Tune-up<br>Limit |
|                                       |            |                  |        | 39700/<br>2501         | 40160/<br>2547   | 40620/<br>2593 | 41080/<br>2639   | 41540/<br>2685   |                  |
| 10MHz                                 | QPSK       | 1                | 0      | 19.06                  | 19.14            | 19.03          | 18.92            | 19.06            | 20.30            |
|                                       |            | 1                | 25     | 19.05                  | 18.90            | 19.26          | 19.14            | 19.26            | 20.30            |
|                                       |            | 1                | 49     | 18.89                  | 18.92            | 18.92          | 18.98            | 18.75            | 20.30            |
|                                       |            | 25               | 0      | 18.80                  | 18.72            | 19.18          | 18.91            | 19.08            | 20.30            |
|                                       |            | 25               | 13     | 19.08                  | 18.94            | 19.05          | 18.91            | 19.10            | 20.30            |
|                                       |            | 25               | 25     | 18.96                  | 19.03            | 19.08          | 19.00            | 18.97            | 20.30            |
|                                       |            | 50               | 0      | 18.97                  | 19.08            | 19.16          | 19.08            | 18.87            | 20.30            |



|           | 16QAM      | 1             | 0      | 18.99                  | 18.92            | 19.11          | 19.07            | 19.02            | 20.30         |
|-----------|------------|---------------|--------|------------------------|------------------|----------------|------------------|------------------|---------------|
|           |            | 1             | 25     | 19.05                  | 19.04            | 19.16          | 18.92            | 19.11            | 20.30         |
|           |            | 1             | 49     | 19.01                  | 18.98            | 18.92          | 19.08            | 18.88            | 20.30         |
|           |            | 25            | 0      | 18.88                  | 18.76            | 19.18          | 18.80            | 18.99            | 20.30         |
|           |            | 25            | 13     | 19.14                  | 19.11            | 19.07          | 19.13            | 19.09            | 20.30         |
|           |            | 25            | 25     | 18.90                  | 19.07            | 19.14          | 19.00            | 18.82            | 20.30         |
|           |            | 50            | 0      | 19.13                  | 19.08            | 19.13          | 19.23            | 18.85            | 20.30         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |                  |                |                  |                  | Tune-up Limit |
|           |            |               |        | 39725/<br>2503.5       | 40173/<br>2548.3 | 40620/<br>2593 | 41068/<br>2637.8 | 41515/<br>2682.5 |               |
| 15MHz     | QPSK       | 1             | 0      | 19.04                  | 19.09            | 18.94          | 19.11            | 19.06            | 20.30         |
|           |            | 1             | 38     | 18.90                  | 18.91            | 19.14          | 19.17            | 19.30            | 20.30         |
|           |            | 1             | 74     | 18.93                  | 19.01            | 18.95          | 19.06            | 18.91            | 20.30         |
|           |            | 36            | 0      | 18.74                  | 18.88            | 19.10          | 18.94            | 19.14            | 20.30         |
|           |            | 36            | 18     | 19.02                  | 19.04            | 19.02          | 18.96            | 18.99            | 20.30         |
|           |            | 36            | 39     | 19.03                  | 19.16            | 19.12          | 19.21            | 18.88            | 20.30         |
|           |            | 75            | 0      | 19.11                  | 19.23            | 19.06          | 19.00            | 18.86            | 20.30         |
|           | 16QAM      | 1             | 0      | 19.02                  | 19.16            | 18.98          | 19.00            | 19.03            | 20.30         |
|           |            | 1             | 38     | 18.93                  | 18.87            | 19.16          | 19.04            | 19.20            | 20.30         |
|           |            | 1             | 74     | 19.00                  | 18.94            | 18.92          | 19.11            | 18.81            | 20.30         |
|           |            | 36            | 0      | 18.76                  | 18.87            | 19.08          | 18.90            | 19.00            | 20.30         |
|           |            | 36            | 18     | 19.05                  | 19.05            | 19.01          | 18.95            | 19.06            | 20.30         |
|           |            | 36            | 39     | 19.01                  | 19.11            | 19.14          | 19.11            | 18.87            | 20.30         |
|           |            | 75            | 0      | 19.13                  | 19.20            | 19.10          | 19.20            | 18.84            | 20.30         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |                  |                |                  |                  | Tune-up Limit |
|           |            |               |        | 39750/<br>2506         | 40185/<br>2549.5 | 40620/<br>2593 | 41055/<br>2636.5 | 41490/<br>2680   |               |
| 20MHz     | QPSK       | 1             | 0      | <b>19.03</b>           | <b>19.02</b>     | 18.97          | 18.93            | 19.03            | 20.30         |
|           |            | 1             | 50     | 18.93                  | 18.97            | <b>19.12</b>   | 18.89            | <b>19.16</b>     | 20.30         |
|           |            | 1             | 99     | 18.89                  | 18.89            | 18.94          | <b>19.07</b>     | 18.76            | 20.30         |
|           |            | 50            | 0      | 18.79                  | 18.99            | <b>19.11</b>   | 18.78            | <b>19.04</b>     | 20.30         |
|           |            | 50            | 25     | <b>19.01</b>           | <b>19.07</b>     | 19.00          | 18.97            | 18.96            | 20.30         |
|           |            | 50            | 50     | 18.93                  | 18.99            | 19.04          | <b>19.20</b>     | 18.87            | 20.30         |
|           |            | 100           | 0      | 19.02                  | <b>19.20</b>     | 19.02          | 19.10            | 18.81            | 20.30         |
|           | 16QAM      | 1             | 0      | 19.06                  | 19.04            | 19.01          | 19.01            | 19.07            | 20.30         |
|           |            | 1             | 50     | 18.97                  | 18.87            | 19.25          | 18.95            | 19.21            | 20.30         |
|           |            | 1             | 99     | 18.91                  | 18.91            | 18.97          | 19.19            | 18.80            | 20.30         |
|           |            | 50            | 0      | 18.82                  | 18.83            | 19.17          | 18.95            | 19.05            | 20.30         |
|           |            | 50            | 25     | 19.12                  | 18.98            | 19.13          | 19.03            | 18.91            | 20.30         |
|           |            | 50            | 50     | 18.98                  | 18.99            | 19.11          | 19.01            | 18.91            | 20.30         |
|           |            | 100           | 0      | 19.11                  | 19.17            | 19.09          | 19.19            | 18.87            | 20.30         |

LTE TDD Band 66

Conducted Power(dBm)

Tune-up



| head(standalone) |            |               |        |                        |             |               | Limit         |
|------------------|------------|---------------|--------|------------------------|-------------|---------------|---------------|
| Bandwidth        | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               |               |
|                  |            |               |        | 131979/1710.7          | 132322/1745 | 132665/1779.3 |               |
| 1.4MHz           | QPSK       | 1             | 0      | 16.17                  | 16.30       | 16.44         | 17.60         |
|                  |            | 1             | 2      | 16.45                  | 16.55       | 16.39         | 17.60         |
|                  |            | 1             | 5      | 16.34                  | 16.41       | 16.42         | 17.60         |
|                  |            | 3             | 0      | 16.52                  | 16.46       | 16.27         | 17.60         |
|                  |            | 3             | 2      | 16.33                  | 16.51       | 16.53         | 17.60         |
|                  |            | 3             | 3      | 16.59                  | 16.43       | 16.45         | 17.60         |
|                  |            | 6             | 0      | 16.71                  | 16.41       | 16.26         | 17.60         |
|                  | 16QAM      | 1             | 0      | 16.39                  | 16.40       | 16.27         | 17.60         |
|                  |            | 1             | 2      | 16.45                  | 16.48       | 16.65         | 17.60         |
|                  |            | 1             | 5      | 16.27                  | 16.54       | 16.45         | 17.60         |
|                  |            | 3             | 0      | 16.69                  | 16.58       | 16.30         | 17.60         |
|                  |            | 3             | 2      | 16.33                  | 16.52       | 16.41         | 17.60         |
|                  |            | 3             | 3      | 16.63                  | 16.20       | 16.37         | 17.60         |
|                  |            | 6             | 0      | 16.59                  | 16.40       | 16.35         | 17.60         |
| Bandwidth        | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|                  |            |               |        | 1319871711.5           | 132322/1745 | 132657/1778.5 |               |
| 3MHz             | QPSK       | 1             | 0      | 16.20                  | 16.42       | 16.51         | 17.60         |
|                  |            | 1             | 7      | 16.54                  | 16.61       | 16.50         | 17.60         |
|                  |            | 1             | 14     | 16.40                  | 16.47       | 16.50         | 17.60         |
|                  |            | 8             | 0      | 16.70                  | 16.55       | 16.13         | 17.60         |
|                  |            | 8             | 4      | 16.57                  | 16.43       | 16.39         | 17.60         |
|                  |            | 8             | 7      | 16.37                  | 16.44       | 16.21         | 17.60         |
|                  |            | 15            | 0      | 16.63                  | 16.44       | 16.31         | 17.60         |
|                  | 16QAM      | 1             | 0      | 16.41                  | 16.36       | 16.44         | 17.60         |
|                  |            | 1             | 7      | 16.54                  | 16.49       | 16.54         | 17.60         |
|                  |            | 1             | 14     | 16.45                  | 16.53       | 16.44         | 17.60         |
|                  |            | 8             | 0      | 16.53                  | 16.31       | 16.26         | 17.60         |
|                  |            | 8             | 4      | 16.44                  | 16.43       | 16.32         | 17.60         |
|                  |            | 8             | 7      | 16.48                  | 16.18       | 16.32         | 17.60         |
|                  |            | 15            | 0      | 16.63                  | 16.35       | 16.31         | 17.60         |
| Bandwidth        | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|                  |            |               |        | 131997/1712.5          | 132322/1745 | 132647/1777.5 |               |
| 5MHz             | QPSK       | 1             | 0      | 16.31                  | 16.32       | 16.45         | 17.60         |
|                  |            | 1             | 13     | 16.39                  | 16.60       | 16.63         | 17.60         |
|                  |            | 1             | 24     | 16.37                  | 16.49       | 16.63         | 17.60         |
|                  |            | 12            | 0      | 16.61                  | 16.53       | 16.14         | 17.60         |
|                  |            | 12            | 6      | 16.52                  | 16.59       | 16.32         | 17.60         |
|                  |            | 12            | 13     | 16.55                  | 16.21       | 16.16         | 17.60         |
|                  |            | 25            | 0      | 16.47                  | 16.25       | 16.18         | 17.60         |
|                  | 16QAM      | 1             | 0      | 16.41                  | 16.26       | 16.42         | 17.60         |



|           |            | 1             | 13     | 16.31                  | 16.51        | 16.63         | 17.60         |
|-----------|------------|---------------|--------|------------------------|--------------|---------------|---------------|
|           |            | 1             | 24     | 16.26                  | 16.47        | 16.36         | 17.60         |
|           |            | 12            | 0      | 16.65                  | 16.51        | 16.36         | 17.60         |
|           |            | 12            | 6      | 16.37                  | 16.57        | 16.57         | 17.60         |
|           |            | 12            | 13     | 16.44                  | 16.43        | 16.15         | 17.60         |
|           |            | 25            | 0      | 16.71                  | 16.49        | 16.29         | 17.60         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |               | Tune-up Limit |
|           |            |               |        | 132022/1715            | 132322/1745  | 132622/1775   |               |
| 10MHz     | QPSK       | 1             | 0      | 16.25                  | 16.32        | 16.50         | 17.60         |
|           |            | 1             | 25     | 16.28                  | 16.65        | 16.64         | 17.60         |
|           |            | 1             | 49     | 16.44                  | 16.34        | 16.65         | 17.60         |
|           |            | 25            | 0      | 16.66                  | 16.53        | 16.33         | 17.60         |
|           |            | 25            | 13     | 16.40                  | 16.49        | 16.57         | 17.60         |
|           |            | 25            | 25     | 16.43                  | 16.30        | 16.29         | 17.60         |
|           |            | 50            | 0      | 16.41                  | 16.23        | 16.25         | 17.60         |
|           | 16QAM      | 1             | 0      | 16.17                  | 16.19        | 16.40         | 17.60         |
|           |            | 1             | 25     | 16.35                  | 16.54        | 16.42         | 17.60         |
|           |            | 1             | 49     | 16.49                  | 16.32        | 16.62         | 17.60         |
|           |            | 25            | 0      | 16.61                  | 16.33        | 16.22         | 17.60         |
|           |            | 25            | 13     | 16.34                  | 16.52        | 16.45         | 17.60         |
|           |            | 25            | 25     | 16.60                  | 16.39        | 16.15         | 17.60         |
|           |            | 50            | 0      | 16.52                  | 16.36        | 16.16         | 17.60         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |               | Tune-up Limit |
|           |            |               |        | 132047/1717.5          | 132322/1745  | 132597/1772.5 |               |
| 15MHz     | QPSK       | 1             | 0      | 16.24                  | 16.36        | 16.26         | 17.60         |
|           |            | 1             | 38     | 16.47                  | 16.41        | 16.41         | 17.60         |
|           |            | 1             | 74     | 16.20                  | 16.41        | 16.53         | 17.60         |
|           |            | 36            | 0      | 16.40                  | 16.37        | 16.32         | 17.60         |
|           |            | 36            | 18     | 16.59                  | 16.52        | 16.50         | 17.60         |
|           |            | 36            | 39     | 16.54                  | 16.43        | 16.38         | 17.60         |
|           |            | 75            | 0      | 16.54                  | 16.28        | 16.24         | 17.60         |
|           | 16QAM      | 1             | 0      | 16.17                  | 16.39        | 16.41         | 17.60         |
|           |            | 1             | 38     | 16.36                  | 16.43        | 16.40         | 17.60         |
|           |            | 1             | 74     | 16.41                  | 16.59        | 16.41         | 17.60         |
|           |            | 36            | 0      | 16.41                  | 16.44        | 16.34         | 17.60         |
|           |            | 36            | 18     | 16.56                  | 16.47        | 16.30         | 17.60         |
|           |            | 36            | 39     | 16.44                  | 16.31        | 16.35         | 17.60         |
|           |            | 75            | 0      | 16.59                  | 16.28        | 16.36         | 17.60         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |               | Tune-up Limit |
|           |            |               |        | 132072/1720            | 132322/1745  | 132572/1770   |               |
| 20MHz     | QPSK       | 1             | 0      | 16.26                  | 16.34        | 16.38         | 17.60         |
|           |            | 1             | 50     | <b>16.40</b>           | <b>16.52</b> | <b>16.51</b>  | 17.60         |
|           |            | 1             | 99     | 16.35                  | 16.44        | 16.50         | 17.60         |



|  |       |     |    |              |              |              |       |
|--|-------|-----|----|--------------|--------------|--------------|-------|
|  |       | 50  | 0  | <b>16.55</b> | 16.45        | 16.25        | 17.60 |
|  |       | 50  | 25 | 16.45        | <b>16.49</b> | <b>16.44</b> | 17.60 |
|  |       | 50  | 50 | 16.52        | 16.30        | 16.30        | 17.60 |
|  |       | 100 | 0  | <b>16.56</b> | 16.37        | 16.29        | 17.60 |
|  | 16QAM | 1   | 0  | 16.12        | 16.49        | 16.39        | 17.60 |
|  |       | 1   | 50 | 16.36        | 16.43        | 16.40        | 17.60 |
|  |       | 1   | 99 | 16.27        | 16.44        | 16.41        | 17.60 |
|  |       | 50  | 0  | 16.55        | 16.36        | 16.29        | 17.60 |
|  |       | 50  | 25 | 16.38        | 16.61        | 16.29        | 17.60 |
|  |       | 50  | 50 | 16.44        | 16.18        | 16.16        | 17.60 |
|  |       | 100 | 0  | 16.49        | 16.46        | 16.33        | 17.60 |

| LTE TDD Band 66<br>Body(standalone)<br>Body(WWAN+2.4G/5G) |            |                  |        | Conducted Power(dBm)   |             |               | Tune-up<br>Limit |
|-----------------------------------------------------------|------------|------------------|--------|------------------------|-------------|---------------|------------------|
| Bandwidth                                                 | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |             |               |                  |
|                                                           |            |                  |        | 131979/1710.7          | 132322/1745 | 132665/1779.3 |                  |
| 1.4MHz                                                    | QPSK       | 1                | 0      | 19.59                  | 19.51       | 19.53         | 20.10            |
|                                                           |            | 1                | 2      | 19.57                  | 19.80       | 19.45         | 20.10            |
|                                                           |            | 1                | 5      | 19.49                  | 19.73       | 19.43         | 20.10            |
|                                                           |            | 3                | 0      | 19.56                  | 19.65       | 19.50         | 20.10            |
|                                                           |            | 3                | 2      | 19.50                  | 19.65       | 19.73         | 20.10            |
|                                                           |            | 3                | 3      | 19.68                  | 19.64       | 19.46         | 20.10            |
|                                                           |            | 6                | 0      | 19.56                  | 19.74       | 19.34         | 20.10            |
|                                                           | 16QAM      | 1                | 0      | 19.40                  | 19.54       | 19.38         | 20.10            |
|                                                           |            | 1                | 2      | 19.48                  | 19.81       | 19.69         | 20.10            |
|                                                           |            | 1                | 5      | 19.63                  | 19.49       | 19.67         | 20.10            |
|                                                           |            | 3                | 0      | 19.83                  | 19.61       | 19.50         | 20.10            |
|                                                           |            | 3                | 2      | 19.53                  | 19.72       | 19.53         | 20.10            |
|                                                           |            | 3                | 3      | 19.70                  | 19.52       | 19.53         | 20.10            |
|                                                           |            | 6                | 0      | 19.75                  | 19.47       | 19.36         | 20.10            |
| Bandwidth                                                 | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up<br>Limit |
|                                                           |            |                  |        | 131987/1711.5          | 132322/1745 | 132657/1778.5 |                  |
| 3MHz                                                      | QPSK       | 1                | 0      | 19.41                  | 19.58       | 19.45         | 20.10            |
|                                                           |            | 1                | 7      | 19.73                  | 19.56       | 19.68         | 20.10            |
|                                                           |            | 1                | 14     | 19.39                  | 19.57       | 19.40         | 20.10            |
|                                                           |            | 8                | 0      | 19.60                  | 19.73       | 19.33         | 20.10            |
|                                                           |            | 8                | 4      | 19.62                  | 19.58       | 19.71         | 20.10            |
|                                                           |            | 8                | 7      | 19.78                  | 19.54       | 19.45         | 20.10            |
|                                                           |            | 15               | 0      | 19.59                  | 19.49       | 19.43         | 20.10            |
|                                                           | 16QAM      | 1                | 0      | 19.47                  | 19.57       | 19.42         | 20.10            |
|                                                           |            | 1                | 7      | 19.66                  | 19.57       | 19.54         | 20.10            |



|           |            | 1             | 14     | 19.46                  | 19.47       | 19.63         | 20.10         |
|-----------|------------|---------------|--------|------------------------|-------------|---------------|---------------|
|           |            | 8             | 0      | 19.76                  | 19.63       | 19.41         | 20.10         |
|           |            | 8             | 4      | 19.70                  | 19.81       | 19.70         | 20.10         |
|           |            | 8             | 7      | 19.70                  | 19.65       | 19.33         | 20.10         |
|           |            | 15            | 0      | 19.71                  | 19.57       | 19.34         | 20.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 131997/1712.5          | 132322/1745 | 132647/1777.5 |               |
| 5MHz      | QPSK       | 1             | 0      | 19.32                  | 19.64       | 19.31         | 20.10         |
|           |            | 1             | 13     | 19.58                  | 19.58       | 19.59         | 20.10         |
|           |            | 1             | 24     | 19.47                  | 19.62       | 19.55         | 20.10         |
|           |            | 12            | 0      | 19.55                  | 19.55       | 19.58         | 20.10         |
|           |            | 12            | 6      | 19.64                  | 19.65       | 19.67         | 20.10         |
|           |            | 12            | 13     | 19.65                  | 19.41       | 19.48         | 20.10         |
|           |            | 25            | 0      | 19.76                  | 19.48       | 19.53         | 20.10         |
|           | 16QAM      | 1             | 0      | 19.35                  | 19.41       | 19.53         | 20.10         |
|           |            | 1             | 13     | 19.46                  | 19.74       | 19.74         | 20.10         |
|           |            | 1             | 24     | 19.45                  | 19.66       | 19.68         | 20.10         |
|           |            | 12            | 0      | 19.79                  | 19.53       | 19.38         | 20.10         |
|           |            | 12            | 6      | 19.77                  | 19.55       | 19.60         | 20.10         |
|           |            | 12            | 13     | 19.69                  | 19.65       | 19.61         | 20.10         |
|           |            | 25            | 0      | 19.71                  | 19.54       | 19.36         | 20.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 132022/1715            | 132322/1745 | 132622/1775   |               |
| 10MHz     | QPSK       | 1             | 0      | 19.54                  | 19.51       | 19.39         | 20.10         |
|           |            | 1             | 25     | 19.63                  | 19.72       | 19.65         | 20.10         |
|           |            | 1             | 49     | 19.35                  | 19.71       | 19.69         | 20.10         |
|           |            | 25            | 0      | 19.81                  | 19.60       | 19.41         | 20.10         |
|           |            | 25            | 13     | 19.68                  | 19.68       | 19.59         | 20.10         |
|           |            | 25            | 25     | 19.69                  | 19.61       | 19.41         | 20.10         |
|           |            | 50            | 0      | 19.80                  | 19.73       | 19.52         | 20.10         |
|           | 16QAM      | 1             | 0      | 19.39                  | 19.59       | 19.34         | 20.10         |
|           |            | 1             | 25     | 19.62                  | 19.56       | 19.50         | 20.10         |
|           |            | 1             | 49     | 19.52                  | 19.76       | 19.61         | 20.10         |
|           |            | 25            | 0      | 19.84                  | 19.61       | 19.37         | 20.10         |
|           |            | 25            | 13     | 19.60                  | 19.61       | 19.68         | 20.10         |
|           |            | 25            | 25     | 19.62                  | 19.62       | 19.46         | 20.10         |
|           |            | 50            | 0      | 19.85                  | 19.59       | 19.45         | 20.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 132047/1717.5          | 132322/1745 | 132597/1772.5 |               |
| 15MHz     | QPSK       | 1             | 0      | 19.32                  | 19.62       | 19.44         | 20.10         |
|           |            | 1             | 38     | 19.53                  | 19.81       | 19.62         | 20.10         |
|           |            | 1             | 74     | 19.56                  | 19.64       | 19.50         | 20.10         |
|           |            | 36            | 0      | 19.76                  | 19.55       | 19.47         | 20.10         |



|           |            | 36            | 18     | 19.75                  | 19.58        | 19.54        | 20.10         |
|-----------|------------|---------------|--------|------------------------|--------------|--------------|---------------|
|           |            | 36            | 39     | 19.77                  | 19.42        | 19.62        | 20.10         |
|           |            | 75            | 0      | 19.57                  | 19.48        | 19.55        | 20.10         |
|           | 16QAM      | 1             | 0      | 19.58                  | 19.51        | 19.29        | 20.10         |
|           |            | 1             | 38     | 19.46                  | 19.71        | 19.55        | 20.10         |
|           |            | 1             | 74     | 19.37                  | 19.63        | 19.66        | 20.10         |
|           |            | 36            | 0      | 19.69                  | 19.64        | 19.37        | 20.10         |
|           |            | 36            | 18     | 19.61                  | 19.73        | 19.72        | 20.10         |
|           |            | 36            | 39     | 19.53                  | 19.64        | 19.59        | 20.10         |
|           |            | 75            | 0      | 19.74                  | 19.60        | 19.49        | 20.10         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |              | Tune-up Limit |
|           |            |               |        | 132072/1720            | 132322/1745  | 132572/1770  |               |
| 20MHz     | QPSK       | 1             | 0      | 19.47                  | 19.49        | 19.44        | 20.10         |
|           |            | 1             | 50     | <b>19.58</b>           | <b>19.67</b> | <b>19.59</b> | 20.10         |
|           |            | 1             | 99     | 19.50                  | 19.62        | 19.54        | 20.10         |
|           |            | 50            | 0      | <b>19.70</b>           | <b>19.68</b> | 19.43        | 20.10         |
|           |            | 50            | 25     | 19.64                  | <b>19.68</b> | <b>19.62</b> | 20.10         |
|           |            | 50            | 50     | 19.68                  | 19.50        | 19.47        | 20.10         |
|           |            | 100           | 0      | <b>19.70</b>           | 19.61        | 19.45        | 20.10         |
|           | 16QAM      | 1             | 0      | 19.38                  | 19.36        | 19.50        | 20.10         |
|           |            | 1             | 50     | 19.65                  | 19.53        | 19.54        | 20.10         |
|           |            | 1             | 99     | 19.44                  | 19.74        | 19.54        | 20.10         |
|           |            | 50            | 0      | 19.78                  | 19.80        | 19.35        | 20.10         |
|           |            | 50            | 25     | 19.52                  | 19.56        | 19.56        | 20.10         |
|           |            | 50            | 50     | 19.58                  | 19.62        | 19.38        | 20.10         |
|           |            | 100           | 0      | 19.66                  | 19.65        | 19.35        | 20.10         |

| LTE TDD Band 66<br>head(WWAN+2.4G/5G) |            |                  |        | Conducted Power(dBm)   |             |               | Tune-up<br>Limit |
|---------------------------------------|------------|------------------|--------|------------------------|-------------|---------------|------------------|
| Bandwidth                             | Modulation | RB<br>allocation | offset | Channel/Frequency(MHz) |             |               |                  |
|                                       |            |                  |        | 131979/1710.7          | 132322/1745 | 132665/1779.3 |                  |
| 1.4MHz                                | QPSK       | 1                | 0      | 14.09                  | 14.33       | 14.55         | 14.60            |
|                                       |            | 1                | 2      | 14.33                  | 14.21       | 14.47         | 14.60            |
|                                       |            | 1                | 5      | 14.32                  | 14.37       | 14.33         | 14.60            |
|                                       |            | 3                | 0      | 14.26                  | 14.39       | 14.26         | 14.60            |
|                                       |            | 3                | 2      | 14.37                  | 14.33       | 14.47         | 14.60            |
|                                       |            | 3                | 3      | 14.39                  | 14.20       | 14.34         | 14.60            |
|                                       |            | 6                | 0      | 14.44                  | 14.25       | 14.40         | 14.60            |
|                                       | 16QAM      | 1                | 0      | 14.22                  | 14.23       | 14.50         | 14.60            |
|                                       |            | 1                | 2      | 14.29                  | 14.52       | 14.52         | 14.60            |
|                                       |            | 1                | 5      | 14.44                  | 14.51       | 14.39         | 14.60            |
|                                       |            | 3                | 0      | 14.48                  | 14.57       | 14.38         | 14.60            |



|           |            | 3             | 2      | 14.42                  | 14.50       | 14.55         | 14.60         |
|-----------|------------|---------------|--------|------------------------|-------------|---------------|---------------|
|           |            | 3             | 3      | 14.44                  | 14.33       | 14.39         | 14.60         |
|           |            | 6             | 0      | 14.54                  | 14.36       | 14.33         | 14.60         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 1319871711.5           | 132322/1745 | 132657/1778.5 |               |
| 3MHz      | QPSK       | 1             | 0      | 14.20                  | 14.38       | 14.46         | 14.60         |
|           |            | 1             | 7      | 14.37                  | 14.51       | 14.50         | 14.60         |
|           |            | 1             | 14     | 14.24                  | 14.56       | 14.55         | 14.60         |
|           |            | 8             | 0      | 14.55                  | 14.46       | 14.30         | 14.60         |
|           |            | 8             | 4      | 14.45                  | 14.36       | 14.41         | 14.60         |
|           |            | 8             | 7      | 14.36                  | 14.35       | 14.32         | 14.60         |
|           |            | 15            | 0      | 14.53                  | 14.49       | 14.24         | 14.60         |
|           | 16QAM      | 1             | 0      | 14.36                  | 14.48       | 14.36         | 14.60         |
|           |            | 1             | 7      | 14.29                  | 14.55       | 14.42         | 14.60         |
|           |            | 1             | 14     | 14.47                  | 14.38       | 14.52         | 14.60         |
|           |            | 8             | 0      | 14.46                  | 14.55       | 14.46         | 14.60         |
|           |            | 8             | 4      | 14.46                  | 14.51       | 14.46         | 14.60         |
|           |            | 8             | 7      | 14.56                  | 14.38       | 14.36         | 14.60         |
|           |            | 15            | 0      | 14.49                  | 14.52       | 14.18         | 14.60         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 131997/1712.5          | 132322/1745 | 132647/1777.5 |               |
| 5MHz      | QPSK       | 1             | 0      | 14.32                  | 14.35       | 14.44         | 14.60         |
|           |            | 1             | 13     | 14.24                  | 14.44       | 14.49         | 14.60         |
|           |            | 1             | 24     | 14.48                  | 14.50       | 14.44         | 14.60         |
|           |            | 12            | 0      | 14.45                  | 14.58       | 14.40         | 14.60         |
|           |            | 12            | 6      | 14.44                  | 14.59       | 14.45         | 14.60         |
|           |            | 12            | 13     | 14.37                  | 14.27       | 14.50         | 14.60         |
|           |            | 25            | 0      | 14.47                  | 14.26       | 14.48         | 14.60         |
|           | 16QAM      | 1             | 0      | 14.26                  | 14.31       | 14.44         | 14.60         |
|           |            | 1             | 13     | 14.46                  | 14.53       | 14.50         | 14.60         |
|           |            | 1             | 24     | 14.45                  | 14.58       | 14.38         | 14.60         |
|           |            | 12            | 0      | 14.59                  | 14.45       | 14.48         | 14.60         |
|           |            | 12            | 6      | 14.59                  | 14.38       | 14.38         | 14.60         |
|           |            | 12            | 13     | 14.45                  | 14.29       | 14.37         | 14.60         |
|           |            | 25            | 0      | 14.37                  | 14.35       | 14.27         | 14.60         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |             |               | Tune-up Limit |
|           |            |               |        | 132022/1715            | 132322/1745 | 132622/1775   |               |
| 10MHz     | QPSK       | 1             | 0      | 14.38                  | 14.38       | 14.29         | 14.60         |
|           |            | 1             | 25     | 14.25                  | 14.33       | 14.42         | 14.60         |
|           |            | 1             | 49     | 14.32                  | 14.41       | 14.52         | 14.60         |
|           |            | 25            | 0      | 14.55                  | 14.42       | 14.44         | 14.60         |
|           |            | 25            | 13     | 14.52                  | 14.40       | 14.58         | 14.60         |
|           |            | 25            | 25     | 14.43                  | 14.40       | 14.30         | 14.60         |



|           | 16QAM      | 50            | 0      | 14.49                  | 14.28        | 14.34         | 14.60         |
|-----------|------------|---------------|--------|------------------------|--------------|---------------|---------------|
|           |            | 1             | 0      | 14.26                  | 14.51        | 14.36         | 14.60         |
|           |            | 1             | 25     | 14.45                  | 14.50        | 14.52         | 14.60         |
|           |            | 1             | 49     | 14.33                  | 14.55        | 14.38         | 14.60         |
|           |            | 25            | 0      | 14.36                  | 14.42        | 14.49         | 14.60         |
|           |            | 25            | 13     | 14.57                  | 14.54        | 14.36         | 14.60         |
|           |            | 25            | 25     | 14.55                  | 14.24        | 14.37         | 14.60         |
|           |            | 50            | 0      | 14.48                  | 14.31        | 14.22         | 14.60         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |               | Tune-up Limit |
|           |            |               |        | 132047/1717.5          | 132322/1745  | 132597/1772.5 |               |
| 15MHz     | QPSK       | 1             | 0      | 14.28                  | 14.34        | 14.55         | 14.60         |
|           |            | 1             | 38     | 14.48                  | 14.50        | 14.54         | 14.60         |
|           |            | 1             | 74     | 14.36                  | 14.34        | 14.53         | 14.60         |
|           |            | 36            | 0      | 14.54                  | 14.44        | 14.37         | 14.60         |
|           |            | 36            | 18     | 14.39                  | 14.45        | 14.48         | 14.60         |
|           |            | 36            | 39     | 14.53                  | 14.39        | 14.43         | 14.60         |
|           |            | 75            | 0      | 14.52                  | 14.23        | 14.26         | 14.60         |
|           | 16QAM      | 1             | 0      | 14.10                  | 14.49        | 14.53         | 14.60         |
|           |            | 1             | 38     | 14.32                  | 14.49        | 14.50         | 14.60         |
|           |            | 1             | 74     | 14.45                  | 14.40        | 14.25         | 14.60         |
|           |            | 36            | 0      | 14.55                  | 14.50        | 14.33         | 14.60         |
|           |            | 36            | 18     | 14.56                  | 14.41        | 14.48         | 14.60         |
|           |            | 36            | 39     | 14.52                  | 14.22        | 14.36         | 14.60         |
|           |            | 75            | 0      | 14.44                  | 14.48        | 14.18         | 14.60         |
| Bandwidth | Modulation | RB allocation | offset | Channel/Frequency(MHz) |              |               | Tune-up Limit |
|           |            |               |        | 132072/1720            | 132322/1745  | 132572/1770   |               |
| 20MHz     | QPSK       | 1             | 0      | 14.24                  | 14.37        | 14.41         | 14.60         |
|           |            | 1             | 50     | <b>14.38</b>           | <b>14.48</b> | <b>14.56</b>  | 14.60         |
|           |            | 1             | 99     | 14.33                  | 14.47        | 14.53         | 14.60         |
|           |            | 50            | 0      | <b>14.58</b>           | 14.47        | 14.34         | 14.60         |
|           |            | 50            | 25     | 14.50                  | <b>14.51</b> | <b>14.54</b>  | 14.60         |
|           |            | 50            | 50     | 14.56                  | 14.33        | 14.36         | 14.60         |
|           |            | 100           | 0      | <b>14.59</b>           | 14.38        | 14.33         | 14.60         |
|           | 16QAM      | 1             | 0      | 14.12                  | 14.38        | 14.49         | 14.60         |
|           |            | 1             | 50     | 14.24                  | 14.50        | 14.54         | 14.60         |
|           |            | 1             | 99     | 14.43                  | 14.51        | 14.52         | 14.60         |
|           |            | 50            | 0      | 14.46                  | 14.57        | 14.23         | 14.60         |
|           |            | 50            | 25     | 14.45                  | 14.39        | 14.39         | 14.60         |
|           |            | 50            | 50     | 14.57                  | 14.42        | 14.51         | 14.60         |
|           |            | 100           | 0      | 14.46                  | 14.27        | 14.24         | 14.60         |

**Intra-Band Uplink CA Normal Power**

Note:

1. This device supports intra-band uplink CA of 7C/38C/41C
2. For intra-band uplink carrier aggregation power verification and measurement is selected highest PCC and SCC bandwidth combination to do and was according to 3GPP 36.52101 section 6.2.2A.1 and section 6.2.2A.2 test procedure.
3. For intra-band uplink CA output power was measured high / middle / low channel combination, and for SAR verification is selected highest output power combination with each exposure condition in each frequency band using the highest SAR configuration test in standalone LTE mode.

| LTE Uplink 2CA_ Band 7-Level5&6      |       |           |            |         |         |         |         |               |                     |
|--------------------------------------|-------|-----------|------------|---------|---------|---------|---------|---------------|---------------------|
| Combination 20MHz+20MHz(100RB+100RB) |       |           |            |         |         |         |         |               |                     |
| PCC                                  | SCC   | Bandwidth | Modulation | PCC     |         | SCC     |         | Total RB Size | Measured Power(dBm) |
|                                      |       |           |            | RB Size | RB Pos. | RB Size | RB Pos. |               |                     |
| 20850                                | 21048 | 20        | QPSK       | 1       | High    | 1       | Low     | 2             | 21.34               |
| 21100                                | 21298 | 20        | QPSK       | 1       | High    | 1       | Low     | 2             | 21.33               |
| 21350                                | 21152 | 20        | QPSK       | 1       | Low     | 1       | High    | 2             | 21.21               |

| LTE Uplink 2CA_ Band 38              |       |           |            |         |         |         |         |               |                     |
|--------------------------------------|-------|-----------|------------|---------|---------|---------|---------|---------------|---------------------|
| Combination 20MHz+20MHz(100RB+100RB) |       |           |            |         |         |         |         |               |                     |
| PCC                                  | SCC   | Bandwidth | Modulation | PCC     |         | SCC     |         | Total RB Size | Measured Power(dBm) |
|                                      |       |           |            | RB Size | RB Pos. | RB Size | RB Pos. |               |                     |
| 37850                                | 38048 | 20        | QPSK       | 1       | High    | 1       | Low     | 2             | 23.51               |
| 38000                                | 38198 | 20        | QPSK       | 1       | High    | 1       | Low     | 2             | 23.47               |
| 38150                                | 37952 | 20        | QPSK       | 1       | Low     | 1       | High    | 2             | 23.53               |

| LTE Uplink 2CA_ Band 38-Level1       |       |           |            |         |         |         |         |               |                     |
|--------------------------------------|-------|-----------|------------|---------|---------|---------|---------|---------------|---------------------|
| Combination 20MHz+20MHz(100RB+100RB) |       |           |            |         |         |         |         |               |                     |
| PCC                                  | SCC   | Bandwidth | Modulation | PCC     |         | SCC     |         | Total RB Size | Measured Power(dBm) |
|                                      |       |           |            | RB Size | RB Pos. | RB Size | RB Pos. |               |                     |
| 37850                                | 38048 | 20        | QPSK       | 1       | High    | 1       | Low     | 2             | 20.41               |
| 38000                                | 38198 | 20        | QPSK       | 1       | High    | 1       | Low     | 2             | 20.35               |
| 38150                                | 37952 | 20        | QPSK       | 1       | Low     | 1       | High    | 2             | 20.43               |

| LTE Uplink 2CA_ Band 38-Level2&3     |     |           |            |     |  |     |  |       |          |
|--------------------------------------|-----|-----------|------------|-----|--|-----|--|-------|----------|
| Combination 20MHz+20MHz(100RB+100RB) |     |           |            |     |  |     |  |       |          |
| PCC                                  | SCC | Bandwidth | Modulation | PCC |  | SCC |  | Total | Measured |



|       |       |    |      | RB<br>Size | RB<br>Pos. | RB<br>Size | RB<br>Pos. | RB<br>Size | Power(dBm) |
|-------|-------|----|------|------------|------------|------------|------------|------------|------------|
| 37850 | 38048 | 20 | QPSK | 1          | High       | 1          | Low        | 2          | 19.81      |
| 38000 | 38198 | 20 | QPSK | 1          | High       | 1          | Low        | 2          | 19.75      |
| 38150 | 37952 | 20 | QPSK | 1          | Low        | 1          | High       | 2          | 19.83      |

| LTE Uplink 2CA_ Band41               |       |           |            |            |            |            |            |                     |                        |
|--------------------------------------|-------|-----------|------------|------------|------------|------------|------------|---------------------|------------------------|
| Combination 20MHz+20MHz(100RB+100RB) |       |           |            |            |            |            |            |                     |                        |
| PCC                                  | SCC   | Bandwidth | Modulation | PCC        |            | SCC        |            | Total<br>RB<br>Size | Measured<br>Power(dBm) |
|                                      |       |           |            | RB<br>Size | RB<br>Pos. | RB<br>Size | RB<br>Pos. |                     |                        |
| 39750                                | 39948 | 20        | QPSK       | 1          | High       | 1          | Low        | 2                   | 23.19                  |
| 40620                                | 40818 | 20        | QPSK       | 1          | High       | 1          | Low        | 2                   | 23.18                  |
| 41490                                | 41292 | 20        | QPSK       | 1          | Low        | 1          | High       | 2                   | 23.24                  |

| LTE Uplink 2CA_ Band41-Level1        |       |           |            |            |            |            |            |                     |                        |
|--------------------------------------|-------|-----------|------------|------------|------------|------------|------------|---------------------|------------------------|
| Combination 20MHz+20MHz(100RB+100RB) |       |           |            |            |            |            |            |                     |                        |
| PCC                                  | SCC   | Bandwidth | Modulation | PCC        |            | SCC        |            | Total<br>RB<br>Size | Measured<br>Power(dBm) |
|                                      |       |           |            | RB<br>Size | RB<br>Pos. | RB<br>Size | RB<br>Pos. |                     |                        |
| 39750                                | 39948 | 20        | QPSK       | 1          | High       | 1          | Low        | 2                   | 20.09                  |
| 40620                                | 40818 | 20        | QPSK       | 1          | High       | 1          | Low        | 2                   | 20.17                  |
| 41490                                | 41292 | 20        | QPSK       | 1          | Low        | 1          | High       | 2                   | 20.21                  |

| LTE Uplink 2CA_ Band41-Level2&3      |       |           |            |            |            |            |            |                     |                        |
|--------------------------------------|-------|-----------|------------|------------|------------|------------|------------|---------------------|------------------------|
| Combination 20MHz+20MHz(100RB+100RB) |       |           |            |            |            |            |            |                     |                        |
| PCC                                  | SCC   | Bandwidth | Modulation | PCC        |            | SCC        |            | Total<br>RB<br>Size | Measured<br>Power(dBm) |
|                                      |       |           |            | RB<br>Size | RB<br>Pos. | RB<br>Size | RB<br>Pos. |                     |                        |
| 39750                                | 39948 | 20        | QPSK       | 1          | High       | 1          | Low        | 2                   | 19.65                  |
| 40620                                | 40818 | 20        | QPSK       | 1          | High       | 1          | Low        | 2                   | 19.57                  |
| 41490                                | 41292 | 20        | QPSK       | 1          | Low        | 1          | High       | 2                   | 19.71                  |



## 9.6 WLAN Mode

### WLAN

| Wi-Fi 2.4G<br>Mode     | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|------------------------|----------------------------|----------------------------|--------------|--------------|
|                        |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11b<br>(1M)        | 1/2412                     | 10.00                      | 9.72         | 10           |
|                        | 6/2437                     | 20.00                      | <b>18.05</b> | 18           |
|                        | 11/2462                    | 12.00                      | 11.60        | 12           |
| 802.11g<br>(6M)        | 1/2412                     | 18.00                      | 16.04        | 17           |
|                        | 6/2437                     | 18.00                      | 16.83        | 17           |
|                        | 11/2462                    | 17.00                      | 15.49        | 16           |
| 802.11n-HT20<br>(MCS0) | 1/2412                     | 18.00                      | 16.05        | 17           |
|                        | 6/2437                     | 18.00                      | 16.73        | 17           |
|                        | 11/2462                    | 17.00                      | 15.39        | 17           |

Note: Initial test configuration is 802.11b mode.

| Wi-Fi 5G<br>(U-NII-1)<br>Mode | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|-------------------------------|----------------------------|----------------------------|--------------|--------------|
|                               |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11a<br>(6M)               | 36/5180                    | 16.00                      | 15.84        | 16           |
|                               | 44/5220                    | 20.00                      | 18.52        | 19           |
|                               | 48/5240                    | 18.00                      | 17.71        | 18           |
| 802.11n-HT20<br>(MCS0)        | 36/5180                    | 18.00                      | 17.41        | 17.5         |
|                               | 44/5220                    | 20.00                      | <b>18.63</b> | 18           |
|                               | 48/5240                    | 18.00                      | 17.87        | 18           |
| 802.11n-HT40<br>(MCS0)        | 38/5190                    | 14.50                      | 13.63        | 14           |
|                               | 46/5230                    | 19.00                      | 17.23        | 17           |
| 802.11ac-VHT20<br>(MCS0)      | 36/5180                    | 18.00                      | 17.85        | 18           |
|                               | 44/5220                    | 20.00                      | 18.51        | 18           |
|                               | 48/5240                    | 18.00                      | 17.90        | 18           |
| 802.11ac-VHT40<br>(MCS0)      | 38/5190                    | 16.00                      | 15.09        | 15.5         |
|                               | 46/5230                    | 19.00                      | 17.18        | 17           |
| 802.11ac-VHT80<br>(MCS0)      | 42/5210                    | 16.00                      | 15.11        | 15           |

Note. Initial test configuration is 802.11n-HT20 mode.



| Wi-Fi 5G<br>(U-NII-2A)  | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|-------------------------|----------------------------|----------------------------|--------------|--------------|
|                         |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                    |                            |                            |              |              |
| 802.11a<br>(6M)         | 52/5260                    | 20.00                      | <b>18.65</b> | 18           |
|                         | 60/5300                    | 18.00                      | 17.71        | 18           |
|                         | 64/5320                    | 17.00                      | 16.88        | 17           |
| 802.11n-HT20<br>(MCS0)  | 52/5260                    | 18.00                      | 17.83        | 18           |
|                         | 60/5300                    | 20.00                      | 18.27        | 18           |
|                         | 64/5320                    | 16.00                      | 15.27        | 15.5         |
| 802.11n-HT40<br>(MCS0)  | 54/5270                    | 19.00                      | 17.10        | 17           |
|                         | 62/5310                    | 14.50                      | 13.46        | 14           |
| 802.11ac-HT20<br>(MCS0) | 52/5260                    | 20.00                      | 18.36        | 18           |
|                         | 60/5300                    | 18.00                      | 17.81        | 18           |
|                         | 64/5320                    | 17.00                      | 16.39        | 16.5         |
| 802.11ac-HT40<br>(MCS0) | 54/5270                    | 19.00                      | 17.10        | 17           |
|                         | 62/5310                    | 15.00                      | 14.25        | 14.5         |
| 802.11ac-HT80<br>(MCS0) | 58/5290                    | 16.50                      | 14.66        | 14.5         |

Note. Initial test configuration is 802.11a mode, since the highest maximum output power, the largest channel bandwidth, and lowest order.

| Wi-Fi 5G<br>(U-NII-2C)  | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|-------------------------|----------------------------|----------------------------|--------------|--------------|
|                         |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                    |                            |                            |              |              |
| 802.11a<br>(6M)         | 100/5500                   | 17.00                      | 16.77        | 17           |
|                         | 116/5580                   | 20.00                      | 18.24        | 18           |
|                         | 140/5700                   | 18.00                      | 17.92        | 18           |
| 802.11n-HT20<br>(MCS0)  | 100/5500                   | 16.00                      | 15.95        | 16           |
|                         | 116/5580                   | 20.00                      | <b>18.39</b> | 18           |
|                         | 140/5700                   | 18.00                      | 17.27        | 17.5         |
| 802.11n-HT40<br>(MCS0)  | 102/5510                   | 14.50                      | 13.99        | 14.5         |
|                         | 110/5550                   | 19.00                      | 17.19        | 17           |
|                         | 134/5670                   | 17.00                      | 16.48        | 17           |
| 802.11ac-HT20<br>(MCS0) | 100/5500                   | 18.00                      | 17.17        | 17.5         |
|                         | 116/5580                   | 20.00                      | 18.24        | 18           |
|                         | 140/5700                   | 18.00                      | 17.09        | 17.5         |
| 802.11ac-HT40<br>(MCS0) | 102/5510                   | 15.00                      | 14.51        | 15           |
|                         | 110/5550                   | 19.00                      | 17.18        | 17           |
|                         | 134/5670                   | 17.00                      | 16.63        | 17           |



|                         |          |       |       |      |
|-------------------------|----------|-------|-------|------|
| 802.11ac-HT80<br>(MCS0) | 106/5530 | 14.50 | 14.41 | 14.5 |
|                         | 122/5610 | 19.00 | 17.09 | 17   |

Note. Initial test configuration is 802.11n-HT20 mode.

| Wi-Fi 5G<br>(U-NII-3)<br>Mode | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|-------------------------------|----------------------------|----------------------------|--------------|--------------|
|                               |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11a<br>(6M)               | 149/5745                   | 18.00                      | 17.94        | 18           |
|                               | 157/5785                   | 20.00                      | 18.29        | 18           |
|                               | 165/5825                   | 18.00                      | 17.79        | 18           |
| 802.11n-HT20<br>(MCS0)        | 149/5745                   | 18.00                      | 17.89        | 18           |
|                               | 157/5785                   | 20.00                      | <b>18.44</b> | 18           |
|                               | 165/5825                   | 18.00                      | 17.75        | 18           |
| 802.11n-HT40<br>(MCS0)        | 151/5755                   | 19.00                      | 17.06        | 17           |
|                               | 159/5795                   | 17.00                      | 16.50        | 17           |
| 802.11ac-HT20<br>(MCS0)       | 149/5745                   | 18.00                      | 17.61        | 18           |
|                               | 157/5785                   | 20.00                      | 18.35        | 18           |
|                               | 165/5825                   | 18.00                      | 17.88        | 18           |
| 802.11ac-HT40<br>(MCS0)       | 151/5755                   | 17.00                      | 16.72        | 17           |
|                               | 159/5795                   | 19.00                      | 17.12        | 17           |
| 802.11ac-HT80<br>(MCS0)       | 155/5775                   | 17.00                      | 16.40        | 17           |

Note. Initial test configuration is 802.11n-HT20 mode.

### WLAN-L1

| Wi-Fi 2.4G<br>Mode     | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|------------------------|----------------------------|----------------------------|--------------|--------------|
|                        |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11b<br>(1M)        | 1/2412                     | 10.00                      | 9.72         | 10           |
|                        | 6/2437                     | 16.00                      | <b>15.60</b> | 16           |
|                        | 11/2462                    | 12.00                      | 11.60        | 12           |
| 802.11g<br>(6M)        | 1/2412                     | 15.50                      | 15.01        | 15.5         |
|                        | 6/2437                     | 15.50                      | 15.03        | 15.5         |
|                        | 11/2462                    | 15.50                      | 15.11        | 15.5         |
| 802.11n-HT20<br>(MCS0) | 1/2412                     | 15.50                      | 15.02        | 15.5         |
|                        | 6/2437                     | 15.50                      | 14.89        | 15.5         |
|                        | 11/2462                    | 15.50                      | 15.23        | 15.5         |

Note: Initial test configuration is 802.11b mode.



| Wi-Fi 5G<br>(U-NII-1)                                    | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|----------------------------------------------------------|----------------------------|----------------------------|--------------|--------------|
|                                                          |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                                                     |                            |                            |              |              |
| 802.11a<br>(6M)                                          | 36/5180                    | 16.00                      | 15.84        | 16           |
|                                                          | 44/5220                    | 17.00                      | 16.70        | 17           |
|                                                          | 48/5240                    | 17.00                      | 16.51        | 17           |
| 802.11n-HT20<br>(MCS0)                                   | 36/5180                    | 17.00                      | 16.66        | 17           |
|                                                          | 44/5220                    | 17.00                      | 16.63        | 17           |
|                                                          | 48/5240                    | 17.00                      | 16.70        | 17           |
| 802.11n-HT40<br>(MCS0)                                   | 38/5190                    | 14.00                      | 13.63        | 14           |
|                                                          | 46/5230                    | 17.00                      | 16.38        | 17           |
| 802.11ac-VHT20<br>(MCS0)                                 | 36/5180                    | 17.00                      | <b>16.75</b> | 17           |
|                                                          | 44/5220                    | 17.00                      | 16.67        | 17           |
|                                                          | 48/5240                    | 17.00                      | 16.52        | 17           |
| 802.11ac-VHT40<br>(MCS0)                                 | 38/5190                    | 17.00                      | 15.09        | 17           |
|                                                          | 46/5230                    | 17.00                      | 16.45        | 17           |
| 802.11ac-VHT80<br>(MCS0)                                 | 42/5210                    | 16.00                      | 15.11        | 16           |
| Note. Initial test configuration is 802.11ac-VHT20 mode. |                            |                            |              |              |

| Wi-Fi 5G<br>(U-NII-2A)                                 | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|--------------------------------------------------------|----------------------------|----------------------------|--------------|--------------|
|                                                        |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                                                   |                            |                            |              |              |
| 802.11a<br>(6M)                                        | 52/5260                    | 17.00                      | 16.57        | 17           |
|                                                        | 60/5300                    | 17.00                      | 16.51        | 17           |
|                                                        | 64/5320                    | 17.00                      | 16.88        | 17           |
| 802.11n-HT20<br>(MCS0)                                 | 52/5260                    | 17.00                      | 16.60        | 17           |
|                                                        | 60/5300                    | 17.00                      | 16.61        | 17           |
|                                                        | 64/5320                    | 17.00                      | 15.27        | 17           |
| 802.11n-HT40<br>(MCS0)                                 | 54/5270                    | 17.00                      | <b>16.95</b> | 17           |
|                                                        | 62/5310                    | 14.00                      | 13.46        | 14           |
| 802.11ac-HT20<br>(MCS0)                                | 52/5260                    | 17.00                      | 16.61        | 17           |
|                                                        | 60/5300                    | 17.00                      | 16.62        | 17           |
|                                                        | 64/5320                    | 17.00                      | 16.39        | 17           |
| 802.11ac-HT40<br>(MCS0)                                | 54/5270                    | 17.00                      | 16.48        | 17           |
|                                                        | 62/5310                    | 15.00                      | 14.25        | 15           |
| 802.11ac-HT80<br>(MCS0)                                | 58/5290                    | 14.00                      | 13.87        | 14           |
| Note. Initial test configuration is 802.11n-HT40 mode. |                            |                            |              |              |



| Wi-Fi 5G<br>(U-NII-2C)                                  | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|---------------------------------------------------------|----------------------------|----------------------------|--------------|--------------|
|                                                         |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                                                    |                            |                            |              |              |
| 802.11a<br>(6M)                                         | 100/5500                   | 15.50                      | 14.74        | 15.5         |
|                                                         | 116/5580                   | 15.50                      | 14.74        | 15.5         |
|                                                         | 140/5700                   | 15.50                      | 14.69        | 15.5         |
| 802.11n-HT20<br>(MCS0)                                  | 100/5500                   | 15.50                      | 14.61        | 15.5         |
|                                                         | 116/5580                   | 15.50                      | 14.77        | 15.5         |
|                                                         | 140/5700                   | 15.50                      | 14.56        | 15.5         |
| 802.11n-HT40<br>(MCS0)                                  | 102/5510                   | 15.50                      | 13.99        | 15.5         |
|                                                         | 110/5550                   | 15.50                      | 14.55        | 15.5         |
|                                                         | 134/5670                   | 15.50                      | 14.64        | 15.5         |
| 802.11ac-HT20<br>(MCS0)                                 | 100/5500                   | 15.50                      | 14.78        | 15.5         |
|                                                         | 116/5580                   | 15.50                      | 14.51        | 15.5         |
|                                                         | 140/5700                   | 15.50                      | 14.71        | 15.5         |
| 802.11ac-HT40<br>(MCS0)                                 | 102/5510                   | 15.50                      | 14.51        | 15.5         |
|                                                         | 110/5550                   | 15.50                      | 14.79        | 15.5         |
|                                                         | 134/5670                   | 15.50                      | 14.68        | 15.5         |
| 802.11ac-HT80<br>(MCS0)                                 | 106/5530                   | 14.00                      | 13.96        | 14           |
|                                                         | 122/5610                   | 15.50                      | <b>15.14</b> | 15.5         |
| Note. Initial test configuration is 802.11ac-HT80 mode. |                            |                            |              |              |

| Wi-Fi 5G<br>(U-NII-3)   | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|-------------------------|----------------------------|----------------------------|--------------|--------------|
|                         |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                    |                            |                            |              |              |
| 802.11a<br>(6M)         | 149/5745                   | 14.50                      | 13.58        | 14.5         |
|                         | 157/5785                   | 14.50                      | 13.64        | 14.5         |
|                         | 165/5825                   | 14.50                      | 13.68        | 14.5         |
| 802.11n-HT20<br>(MCS0)  | 149/5745                   | 14.50                      | 13.79        | 14.5         |
|                         | 157/5785                   | 14.50                      | 13.69        | 14.5         |
|                         | 165/5825                   | 14.50                      | 13.74        | 14.5         |
| 802.11n-HT40<br>(MCS0)  | 151/5755                   | 14.50                      | 13.51        | 14.5         |
|                         | 159/5795                   | 14.50                      | 13.71        | 14.5         |
| 802.11ac-HT20<br>(MCS0) | 149/5745                   | 14.50                      | 13.50        | 14.5         |
|                         | 157/5785                   | 14.50                      | 13.70        | 14.5         |
|                         | 165/5825                   | 14.50                      | 13.67        | 14.5         |
| 802.11ac-HT40<br>(MCS0) | 151/5755                   | 14.50                      | 13.63        | 14.5         |
|                         | 159/5795                   | 14.50                      | 13.66        | 14.5         |
| 802.11ac-HT80           | 155/5775                   | 14.50                      | <b>14.38</b> | 14.5         |



(MCS0)

Note. Initial test configuration is 802.11ac-HT80 mode.

**WLAN-L2**

| Wi-Fi 5G<br>(U-NII-1)    | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|--------------------------|----------------------------|----------------------------|--------------|--------------|
|                          |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11a<br>(6M)          | 36/5180                    | 12.50                      | 12.01        | 12.5         |
|                          | 44/5220                    | 12.50                      | 11.81        | 12.5         |
|                          | 48/5240                    | 12.50                      | 12.02        | 12.5         |
| 802.11n-HT20<br>(MCS0)   | 36/5180                    | 12.50                      | 11.90        | 12.5         |
|                          | 44/5220                    | 12.50                      | 12.04        | 12.5         |
|                          | 48/5240                    | 12.50                      | 12.07        | 12.5         |
| 802.11n-HT40<br>(MCS0)   | 38/5190                    | 12.50                      | 12.02        | 12.5         |
|                          | 46/5230                    | 12.50                      | 11.92        | 12.5         |
| 802.11ac-VHT20<br>(MCS0) | 36/5180                    | 12.50                      | 11.92        | 12.5         |
|                          | 44/5220                    | 12.50                      | 11.84        | 12.5         |
|                          | 48/5240                    | 12.50                      | <b>12.09</b> | 12.5         |
| 802.11ac-VHT40<br>(MCS0) | 38/5190                    | 12.50                      | 11.81        | 12.5         |
|                          | 46/5230                    | 12.50                      | 11.85        | 12.5         |
| 802.11ac-VHT80<br>(MCS0) | 42/5210                    | 12.50                      | 11.98        | 12.5         |

Note. Initial test configuration is 802.11ac-VHT20 mode.

| Wi-Fi 5G<br>(U-NII-2A)  | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |       |              |
|-------------------------|----------------------------|----------------------------|-------|--------------|
|                         |                            | Tune-up                    | Meas. | TP Set Level |
| 802.11a<br>(6M)         | 52/5260                    | 12.50                      | 11.96 | 12.5         |
|                         | 60/5300                    | 12.50                      | 11.88 | 12.5         |
|                         | 64/5320                    | 12.50                      | 11.80 | 12.5         |
| 802.11n-HT20<br>(MCS0)  | 52/5260                    | 12.50                      | 11.88 | 12.5         |
|                         | 60/5300                    | 12.50                      | 12.05 | 12.5         |
|                         | 64/5320                    | 12.50                      | 11.81 | 12.5         |
| 802.11n-HT40<br>(MCS0)  | 54/5270                    | 12.50                      | 11.99 | 12.5         |
|                         | 62/5310                    | 12.50                      | 12.08 | 12.5         |
| 802.11ac-HT20<br>(MCS0) | 52/5260                    | 12.50                      | 12.00 | 12.5         |
|                         | 60/5300                    | 12.50                      | 12.00 | 12.5         |
|                         | 64/5320                    | 12.50                      | 12.10 | 12.5         |
| 802.11ac-HT40<br>(MCS0) | 54/5270                    | 12.50                      | 11.87 | 12.5         |
|                         | 62/5310                    | 12.50                      | 11.90 | 12.5         |



|                                                         |         |       |              |      |
|---------------------------------------------------------|---------|-------|--------------|------|
| 802.11ac-HT80<br>(MCS0)                                 | 58/5290 | 12.50 | <b>12.24</b> | 12.5 |
| Note. Initial test configuration is 802.11ac-HT80 mode. |         |       |              |      |

| Wi-Fi 5G<br>(U-NII-2C)                                                 | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|------------------------------------------------------------------------|----------------------------|----------------------------|--------------|--------------|
|                                                                        |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                                                                   |                            |                            |              |              |
| 802.11a<br>(6M)                                                        | 100/5500                   | 11.50                      | 10.56        | 11.5         |
|                                                                        | 116/5580                   | 11.50                      | 10.60        | 11.5         |
|                                                                        | 140/5700                   | 11.50                      | 10.56        | 11.5         |
| 802.11n-HT20<br>(MCS0)                                                 | 100/5500                   | 11.50                      | 10.65        | 11.5         |
|                                                                        | 116/5580                   | 11.50                      | <b>10.79</b> | 11.5         |
|                                                                        | 140/5700                   | 11.50                      | 10.60        | 11.5         |
| 802.11n-HT40<br>(MCS0)                                                 | 102/5510                   | 11.50                      | 10.66        | 11.5         |
|                                                                        | 110/5550                   | 11.50                      | 10.67        | 11.5         |
|                                                                        | 134/5670                   | 11.50                      | 10.56        | 11.5         |
| 802.11ac-HT20<br>(MCS0)                                                | 100/5500                   | 11.50                      | 10.74        | 11.5         |
|                                                                        | 116/5580                   | 11.50                      | 10.56        | 11.5         |
|                                                                        | 140/5700                   | 11.50                      | 10.75        | 11.5         |
| 802.11ac-HT40<br>(MCS0)                                                | 102/5510                   | 11.50                      | 10.59        | 11.5         |
|                                                                        | 110/5550                   | 11.50                      | 10.77        | 11.5         |
|                                                                        | 134/5670                   | 11.50                      | <b>10.79</b> | 11.5         |
| 802.11ac-HT80<br>(MCS0)                                                | 106/5530                   | 11.50                      | 10.70        | 11.5         |
|                                                                        | 122/5610                   | 11.50                      | 10.65        | 11.5         |
| Note. Initial test configuration is 802.11n-HT20 & 802.11ac-HT40 mode. |                            |                            |              |              |

| Wi-Fi 5G<br>(U-NII-3)   | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |       |              |
|-------------------------|----------------------------|----------------------------|-------|--------------|
|                         |                            | Tune-up                    | Meas. | TP Set Level |
| Mode                    |                            |                            |       |              |
| 802.11a<br>(6M)         | 149/5745                   | 11.50                      | 10.75 | 11.5         |
|                         | 157/5785                   | 11.50                      | 10.64 | 11.5         |
|                         | 165/5825                   | 11.50                      | 10.54 | 11.5         |
| 802.11n-HT20<br>(MCS0)  | 149/5745                   | 11.50                      | 10.60 | 11.5         |
|                         | 157/5785                   | 11.50                      | 10.73 | 11.5         |
|                         | 165/5825                   | 11.50                      | 10.60 | 11.5         |
| 802.11n-HT40<br>(MCS0)  | 151/5755                   | 11.50                      | 10.69 | 11.5         |
|                         | 159/5795                   | 11.50                      | 10.65 | 11.5         |
| 802.11ac-HT20<br>(MCS0) | 149/5745                   | 11.50                      | 10.52 | 11.5         |
|                         | 157/5785                   | 11.50                      | 10.50 | 11.5         |
|                         | 165/5825                   | 11.50                      | 10.70 | 11.5         |



|                                                         |          |       |              |      |
|---------------------------------------------------------|----------|-------|--------------|------|
| 802.11ac-HT40<br>(MCS0)                                 | 151/5755 | 11.50 | 10.59        | 11.5 |
|                                                         | 159/5795 | 11.50 | 10.64        | 11.5 |
| 802.11ac-HT80<br>(MCS0)                                 | 155/5775 | 11.50 | <b>10.81</b> | 11.5 |
| Note. Initial test configuration is 802.11ac-HT80 mode. |          |       |              |      |

**WLAN-L3**

| Wi-Fi 5G<br>(U-NII-1)    | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |       |              |
|--------------------------|----------------------------|----------------------------|-------|--------------|
|                          |                            | Tune-up                    | Meas. | TP Set Level |
| 802.11a<br>(6M)          | 36/5180                    | 17.50                      | 15.84 | <b>17.5</b>  |
|                          | 44/5220                    | 17.50                      | 17.34 | 17.5         |
|                          | 48/5240                    | 17.50                      | 17.42 | 17.5         |
| 802.11n-HT20<br>(MCS0)   | 36/5180                    | 17.50                      | 17.28 | 17.5         |
|                          | 44/5220                    | 17.50                      | 17.11 | 17.5         |
|                          | 48/5240                    | 17.50                      | 17.08 | 17.5         |
| 802.11n-HT40<br>(MCS0)   | 38/5190                    | 14.50                      | 13.63 | 14.5         |
|                          | 46/5230                    | 17.50                      | 17.08 | 17.5         |
| 802.11ac-VHT20<br>(MCS0) | 36/5180                    | 17.50                      | 17.12 | 17.5         |
|                          | 44/5220                    | 17.50                      | 17.33 | 17.5         |
|                          | 48/5240                    | 17.50                      | 17.22 | 17.5         |
| 802.11ac-VHT40<br>(MCS0) | 38/5190                    | 17.00                      | 15.09 | 17           |
|                          | 46/5230                    | 17.50                      | 16.45 | 17.5         |
| 802.11ac-VHT80<br>(MCS0) | 42/5210                    | 14.50                      | 14.25 | 14.5         |

Note. Initial test configuration is 802.11a mode, since the highest maximum output power, the largest channel bandwidth, and lowest order.

| Wi-Fi 5G<br>(U-NII-2A) | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|------------------------|----------------------------|----------------------------|--------------|--------------|
|                        |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11a<br>(6M)        | 52/5260                    | 17.50                      | 17.11        | 17.5         |
|                        | 60/5300                    | 17.50                      | 17.02        | 17.5         |
|                        | 64/5320                    | 17.50                      | 16.88        | 17.5         |
| 802.11n-HT20<br>(MCS0) | 52/5260                    | 17.50                      | 17.12        | 17.5         |
|                        | 60/5300                    | 17.50                      | <b>17.15</b> | 17.5         |
|                        | 64/5320                    | 17.00                      | 15.27        | 17           |
| 802.11n-HT40<br>(MCS0) | 54/5270                    | 17.50                      | 17.06        | 17.5         |
|                        | 62/5310                    | 14.50                      | 13.46        | 14.5         |



|                         |         |       |       |      |
|-------------------------|---------|-------|-------|------|
| 802.11ac-HT20<br>(MCS0) | 52/5260 | 17.50 | 17.11 | 17.5 |
|                         | 60/5300 | 17.50 | 17.12 | 17.5 |
|                         | 64/5320 | 17.50 | 16.39 | 17.5 |
| 802.11ac-HT40<br>(MCS0) | 54/5270 | 17.50 | 16.48 | 17.5 |
|                         | 62/5310 | 17.50 | 14.25 | 17.5 |
| 802.11ac-HT80<br>(MCS0) | 58/5290 | 14.50 | 13.87 | 14.5 |

Note. Initial test configuration is 802.11n-HT20 mode.

| Wi-Fi 5G<br>(U-NII-2C)<br>Mode | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|--------------------------------|----------------------------|----------------------------|--------------|--------------|
|                                |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11a<br>(6M)                | 100/5500                   | 18.50                      | 16.77        | 18.5         |
|                                | 116/5580                   | 18.50                      | 17.74        | 18.5         |
|                                | 140/5700                   | 18.50                      | <b>17.92</b> | 18.5         |
| 802.11n-HT20<br>(MCS0)         | 100/5500                   | 17.50                      | 15.95        | 17.5         |
|                                | 116/5580                   | 18.50                      | 17.76        | 18.5         |
|                                | 140/5700                   | 18.50                      | 17.27        | 18.5         |
| 802.11n-HT40<br>(MCS0)         | 102/5510                   | 14.50                      | 13.99        | 14.5         |
|                                | 110/5550                   | 18.50                      | 17.33        | 18.5         |
|                                | 134/5670                   | 17.50                      | 16.48        | 17.5         |
| 802.11ac-HT20<br>(MCS0)        | 100/5500                   | 18.50                      | 17.17        | 18.5         |
|                                | 116/5580                   | 18.50                      | 17.73        | 18.5         |
|                                | 140/5700                   | 18.50                      | 17.09        | 18.5         |
| 802.11ac-HT40<br>(MCS0)        | 102/5510                   | 15.50                      | 14.51        | 15.5         |
|                                | 110/5550                   | 17.50                      | 16.38        | 17.5         |
|                                | 134/5670                   | 17.50                      | 16.63        | 17.5         |
| 802.11ac-HT80<br>(MCS0)        | 106/5530                   | 15.00                      | 13.96        | 15           |
|                                | 122/5610                   | 17.50                      | 16.49        | 17.5         |

Note. Initial test configuration is 802.11a mode, since the highest maximum output power, the largest channel bandwidth, and lowest order.



| Wi-Fi 5G<br>(U-NII-3)   | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|-------------------------|----------------------------|----------------------------|--------------|--------------|
|                         |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                    |                            |                            |              |              |
| 802.11a<br>(6M)         | 149/5745                   | 18.50                      | <b>17.94</b> | 18.5         |
|                         | 157/5785                   | 18.50                      | 17.78        | 18.5         |
|                         | 165/5825                   | 18.50                      | 17.79        | 18.5         |
| 802.11n-HT20<br>(MCS0)  | 149/5745                   | 18.50                      | 17.77        | 18.5         |
|                         | 157/5785                   | 18.50                      | 17.89        | 18.5         |
|                         | 165/5825                   | 18.50                      | 17.75        | 18.5         |
| 802.11n-HT40<br>(MCS0)  | 151/5755                   | 18.50                      | 17.04        | 18.5         |
|                         | 159/5795                   | 17.50                      | 16.50        | 17.5         |
| 802.11ac-HT20<br>(MCS0) | 149/5745                   | 18.50                      | 17.61        | 18.5         |
|                         | 157/5785                   | 18.50                      | 17.78        | 18.5         |
|                         | 165/5825                   | 18.50                      | 17.88        | 18.5         |
| 802.11ac-HT40<br>(MCS0) | 151/5755                   | 18.50                      | 16.72        | 18.5         |
|                         | 159/5795                   | 18.50                      | 16.62        | 18.5         |
| 802.11ac-HT80<br>(MCS0) | 155/5775                   | 17.50                      | 16.40        | 17.5         |

Note. Initial test configuration is 802.11a mode, since the highest maximum output power, the largest channel bandwidth, and lowest order.

#### WLAN-L4

| Wi-Fi 5G<br>(U-NII-1)    | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|--------------------------|----------------------------|----------------------------|--------------|--------------|
|                          |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                     |                            |                            |              |              |
| 802.11a<br>(6M)          | 36/5180                    | 14.50                      | 13.86        | 14.5         |
|                          | 44/5220                    | 14.50                      | 13.55        | 14.5         |
|                          | 48/5240                    | 14.50                      | 13.94        | 14.5         |
| 802.11n-HT20<br>(MCS0)   | 36/5180                    | 14.50                      | 14.18        | 14.5         |
|                          | 44/5220                    | 14.50                      | 13.60        | 14.5         |
|                          | 48/5240                    | 14.50                      | 13.59        | 14.5         |
| 802.11n-HT40<br>(MCS0)   | 38/5190                    | 14.50                      | 13.63        | 14.5         |
|                          | 46/5230                    | 14.50                      | <b>14.39</b> | 14.5         |
| 802.11ac-VHT20<br>(MCS0) | 36/5180                    | 14.50                      | 14.34        | 14.5         |
|                          | 44/5220                    | 14.50                      | 14.05        | 14.5         |
|                          | 48/5240                    | 14.50                      | 14.12        | 14.5         |
| 802.11ac-VHT40<br>(MCS0) | 38/5190                    | 14.50                      | 13.50        | 14.5         |
|                          | 46/5230                    | 14.50                      | 13.74        | 14.5         |
| 802.11ac-VHT80<br>(MCS0) | 42/5210                    | 14.50                      | 14.25        | 14.5         |



Note. Initial test configuration is 802.11n-HT40 mode.

| Wi-Fi 5G<br>(U-NII-2A)  | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|-------------------------|----------------------------|----------------------------|--------------|--------------|
|                         |                            | Tune-up                    | Meas.        | TP Set Level |
| Mode                    |                            |                            |              |              |
| 802.11a<br>(6M)         | 52/5260                    | 14.50                      | 13.56        | 14.5         |
|                         | 60/5300                    | 14.50                      | 14.10        | 14.5         |
|                         | 64/5320                    | 14.50                      | 13.98        | 14.5         |
| 802.11n-HT20<br>(MCS0)  | 52/5260                    | 14.50                      | 14.26        | 14.5         |
|                         | 60/5300                    | 14.50                      | 14.13        | 14.5         |
|                         | 64/5320                    | 14.50                      | <b>14.36</b> | 14.5         |
| 802.11n-HT40<br>(MCS0)  | 54/5270                    | 14.50                      | 14.00        | 14.5         |
|                         | 62/5310                    | 14.50                      | 13.46        | 14.5         |
| 802.11ac-HT20<br>(MCS0) | 52/5260                    | 14.50                      | 14.15        | 14.5         |
|                         | 60/5300                    | 14.50                      | 14.19        | 14.5         |
|                         | 64/5320                    | 14.50                      | 14.01        | 14.5         |
| 802.11ac-HT40<br>(MCS0) | 54/5270                    | 14.50                      | 13.77        | 14.5         |
|                         | 62/5310                    | 14.50                      | 14.17        | 14.5         |
| 802.11ac-HT80<br>(MCS0) | 58/5290                    | 14.50                      | 13.87        | 14.5         |

Note. Initial test configuration is 802.11n-HT20 mode.

| Wi-Fi 5G<br>(U-NII-2C)  | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |       |              |
|-------------------------|----------------------------|----------------------------|-------|--------------|
|                         |                            | Tune-up                    | Meas. | TP Set Level |
| Mode                    |                            |                            |       |              |
| 802.11a<br>(6M)         | 100/5500                   | 14.50                      | 13.82 | 14.5         |
|                         | 116/5580                   | 14.50                      | 13.64 | 14.5         |
|                         | 140/5700                   | 14.50                      | 13.65 | 14.5         |
| 802.11n-HT20<br>(MCS0)  | 100/5500                   | 14.50                      | 13.57 | 14.5         |
|                         | 116/5580                   | 14.50                      | 13.75 | 14.5         |
|                         | 140/5700                   | 14.50                      | 13.97 | 14.5         |
| 802.11n-HT40<br>(MCS0)  | 102/5510                   | 14.50                      | 13.99 | 14.5         |
|                         | 110/5550                   | 14.50                      | 14.12 | 14.5         |
|                         | 134/5670                   | 14.50                      | 13.75 | 14.5         |
| 802.11ac-HT20<br>(MCS0) | 100/5500                   | 14.50                      | 14.30 | 14.5         |
|                         | 116/5580                   | 14.50                      | 14.02 | 14.5         |
|                         | 140/5700                   | 14.50                      | 13.59 | 14.5         |
| 802.11ac-HT40<br>(MCS0) | 102/5510                   | 14.50                      | 14.37 | 14.5         |
|                         | 110/5550                   | 14.50                      | 14.26 | 14.5         |



|                                                         |          |       |              |      |
|---------------------------------------------------------|----------|-------|--------------|------|
|                                                         | 134/5670 | 14.50 | 14.31        | 14.5 |
| 802.11ac-HT80<br>(MCS0)                                 | 106/5530 | 14.50 | <b>14.41</b> | 14.5 |
|                                                         | 122/5610 | 14.50 | 14.17        | 14.5 |
| Note. Initial test configuration is 802.11ac-HT80 mode. |          |       |              |      |

| Wi-Fi 5G<br>(U-NII-3)<br>Mode                           | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|---------------------------------------------------------|----------------------------|----------------------------|--------------|--------------|
|                                                         |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11a<br>(6M)                                         | 149/5745                   | 14.50                      | 13.58        | 14.5         |
|                                                         | 157/5785                   | 14.50                      | 13.64        | 14.5         |
|                                                         | 165/5825                   | 14.50                      | 13.68        | 14.5         |
| 802.11n-HT20<br>(MCS0)                                  | 149/5745                   | 14.50                      | 13.79        | 14.5         |
|                                                         | 157/5785                   | 14.50                      | 13.69        | 14.5         |
|                                                         | 165/5825                   | 14.50                      | 13.74        | 14.5         |
| 802.11n-HT40<br>(MCS0)                                  | 151/5755                   | 14.50                      | 13.51        | 14.5         |
|                                                         | 159/5795                   | 14.50                      | 13.71        | 14.5         |
| 802.11ac-HT20<br>(MCS0)                                 | 149/5745                   | 14.50                      | 13.50        | 14.5         |
|                                                         | 157/5785                   | 14.50                      | 13.70        | 14.5         |
|                                                         | 165/5825                   | 14.50                      | 13.67        | 14.5         |
| 802.11ac-HT40<br>(MCS0)                                 | 151/5755                   | 14.50                      | 13.63        | 14.5         |
|                                                         | 159/5795                   | 14.50                      | 13.66        | 14.5         |
| 802.11ac-HT80<br>(MCS0)                                 | 155/5775                   | 14.50                      | <b>14.38</b> | 14.5         |
| Note. Initial test configuration is 802.11ac-HT80 mode. |                            |                            |              |              |

**WLAN-L2&L4**


| Wi-Fi 2.4G<br>Mode                                | Channel<br>/Frequency(MHz) | Maximum Output Power (dBm) |              |              |
|---------------------------------------------------|----------------------------|----------------------------|--------------|--------------|
|                                                   |                            | Tune-up                    | Meas.        | TP Set Level |
| 802.11b<br>(1M)                                   | 1/2412                     | 10.00                      | 9.72         | 10           |
|                                                   | 6/2437                     | 14.50                      | <b>13.66</b> | 14.5         |
|                                                   | 11/2462                    | 12.00                      | 11.60        | 12           |
| 802.11g<br>(6M)                                   | 1/2412                     | 14.50                      | 13.41        | 14.5         |
|                                                   | 6/2437                     | 14.50                      | 13.25        | 14.5         |
|                                                   | 11/2462                    | 14.50                      | 13.33        | 14.5         |
| 802.11n-HT20<br>(MCS0)                            | 1/2412                     | 14.50                      | 13.28        | 14.5         |
|                                                   | 6/2437                     | 14.50                      | 13.18        | 14.5         |
|                                                   | 11/2462                    | 14.50                      | 13.30        | 14.5         |
| Note: Initial test configuration is 802.11b mode. |                            |                            |              |              |

## 9.7 Bluetooth Mode

| BT            | Conducted Power(dBm)   |                |                | Tune-up<br>Limit (dBm) |
|---------------|------------------------|----------------|----------------|------------------------|
|               | Channel/Frequency(MHz) |                |                |                        |
|               | Ch 0/2402 MHz          | Ch 39/2441 MHz | Ch 78/2480 MHz |                        |
| GFSK          | 11.07                  | 11.22          | 11.17          | 13.00                  |
| $\pi$ /4DQPSK | 9.90                   | 9.98           | 10.04          | 11.00                  |
| 8DPSK         | 9.91                   | 10.04          | 10.06          | 11.00                  |
| BLE           | Ch 0/2402 MHz          | Ch 19/2440 MHz | Ch 39/2480 MHz | Tune-up<br>Limit (dBm) |
| GFSK(1M)      | 5.34                   | 6.25           | 5.25           | 7.00                   |
| GFSK(2M)      | 5.04                   | 6.02           | 5.27           | 7.00                   |

## 10 Measured and Reported (Scaled) SAR Results

### 10.3 EUT Antenna Locations

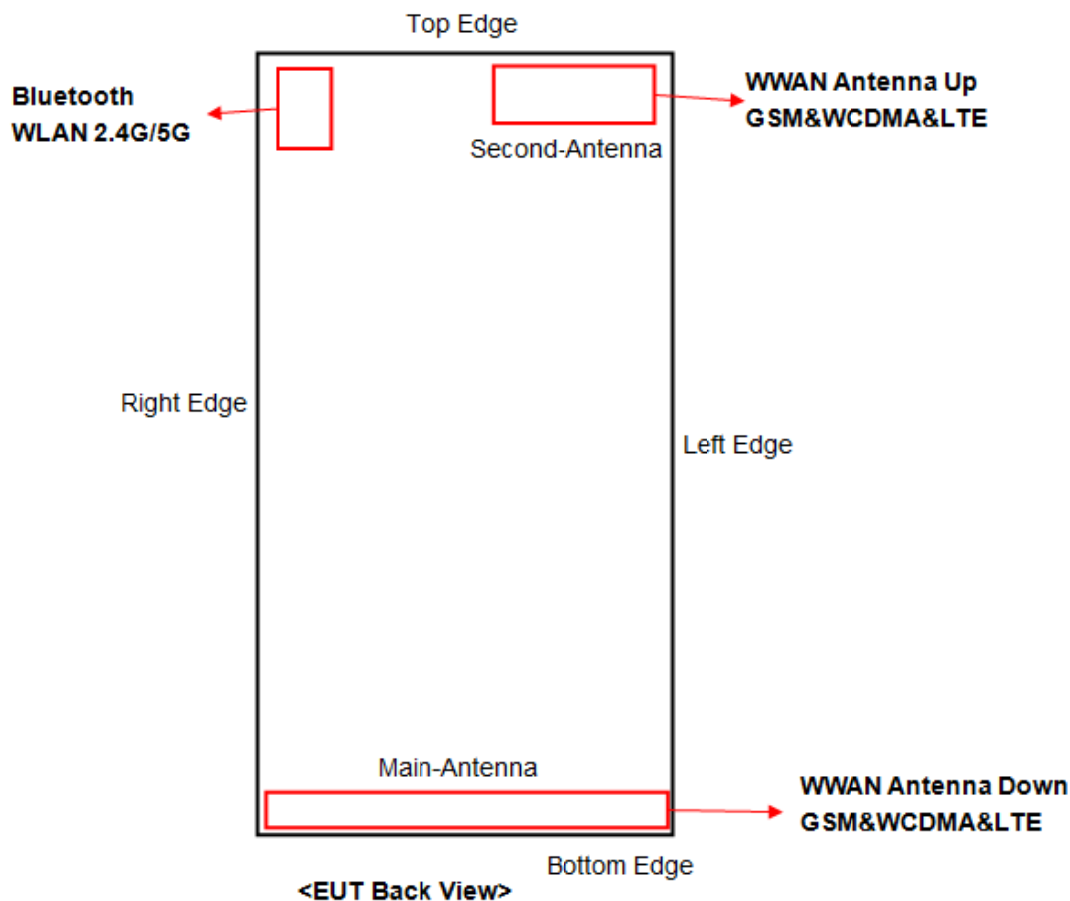

Overall (Length x Width): 161mm x 75mm

Overall Diagonal: 167mm/Display Diagonal:159mm

Distance of the Antenna to the EUT surface/edge

| Antenna           | Back Side | Front side | Left Edge | Right Edge | Top Edge | Bottom Edge |
|-------------------|-----------|------------|-----------|------------|----------|-------------|
| WWAN Antenna Down | <25mm     | <25mm      | <25mm     | <25mm      | >25mm    | <25mm       |
| WWAN Antenna Up   | <25mm     | <25mm      | <25mm     | >25mm      | <25mm    | >25mm       |
| BT/Wi-Fi Antenna  | <25mm     | <25mm      | >25mm     | <25mm      | <25mm    | >25mm       |

Hotspot mode, Positions for SAR tests

| Mode              | Back Side | Front side | Left Edge | Right Edge | Top Edge | Bottom Edge |
|-------------------|-----------|------------|-----------|------------|----------|-------------|
| WWAN Antenna Down | Yes       | Yes        | Yes       | Yes        | N/A      | Yes         |
| WWAN Antenna Up   | Yes       | Yes        | Yes       | N/A        | Yes      | N/A         |
| BT/Wi-Fi Antenna  | Yes       | Yes        | N/A       | Yes        | Yes      | N/A         |

Note: 1. Per KDB 941225 D06, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

2.For smart phones with an overall diagonal dimension is 165.5mm.Per KDB 648474 D04, for smart phones with a display diagonal dimension  $> 15.0\text{ cm}$  or an overall diagonal dimension  $> 16.0\text{ cm}$ , product specific 10-g SAR must



be tested as a phablet to determine SAR compliance. For Phablet, Since hotspot mode 1-g *reported* SAR < 1.2 W/kg, product specific 10-g SAR is not required.

3. Per FCC KDB 447498 D01,

for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- a)  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- b)  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
- c)  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz.

4. When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

5. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was  $\leq 1.2$  W/kg, no additional SAR evaluations using a headset cable were required.



## 10.4 Measured SAR Results

Table 9: GSM 850 (WWAN Antenna Down)

| Test Position                                                                                                            | Cover Type | Time slot | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|--------------------------------------------------------------------------------------------------------------------------|------------|-----------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                                                                                                          |            |           |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR(FULL)                                                                                                           |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                                                                                                               | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.093                        | 0.122           | -0.031           | 1.28           | 0.156        | 21       |
| Left Tilt                                                                                                                | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.043                        | 0.063           | 0.118            | 1.28           | 0.080        | /        |
| Right Cheek                                                                                                              | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.083                        | 0.103           | 0.118            | 1.28           | 0.131        | /        |
| Right Tilt                                                                                                               | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.037                        | 0.055           | 0.084            | 1.28           | 0.070        | /        |
| Body-worn SAR (Distance 15mm)( FULL)                                                                                     |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                                                                                | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.089                        | 0.116           | 0.090            | 1.28           | 0.148        | 22       |
| Front Side                                                                                                               | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.072                        | 0.093           | 0.030            | 1.28           | 0.119        | /        |
| Hotspot SAR(Distance 10mm)( FULL)                                                                                        |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                                                                                | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.160                        | 0.214           | -0.100           | 1.37           | 0.293        | 23       |
| Front Side                                                                                                               | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.117                        | 0.198           | -0.120           | 1.37           | 0.271        | /        |
| Left Edge                                                                                                                | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.143                        | 0.205           | 0.080            | 1.37           | 0.281        | /        |
| Right Edge                                                                                                               | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.093                        | 0.144           | 0.025            | 1.37           | 0.197        | /        |
| Top Edge                                                                                                                 | N/A        | N/A       | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                              | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.105                        | 0.182           | 0.030            | 1.37           | 0.250        | /        |
| Note: 1.The value with blue color is the maximum SAR Value of each test band.                                            |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| 2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power. |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |



Table 10: GSM 1900(WWAN Antenna Down)

| Test Position                                                                                                                                                                                             | Cover Type | Time slot | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                                                                                                                                                                                           |            |           |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR(FULL)                                                                                                                                                                                            |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                                                                                                                                                                                                | standard   | GSM       | 1:8.3      | 661/1880                 | 30.30         | 29.22                | 0.041                        | 0.067           | 0.051            | 1.28           | 0.086        | 24       |
| Left Tilt                                                                                                                                                                                                 | standard   | GSM       | 1:8.3      | 661/1880                 | 30.30         | 29.22                | 0.025                        | 0.042           | 0.022            | 1.28           | 0.054        | /        |
| Right Cheek                                                                                                                                                                                               | standard   | GSM       | 1:8.3      | 661/1880                 | 30.30         | 29.22                | 0.023                        | 0.049           | 0.036            | 1.28           | 0.063        | /        |
| Right Tilt                                                                                                                                                                                                | standard   | GSM       | 1:8.3      | 661/1880                 | 30.30         | 29.22                | 0.019                        | 0.032           | 0.046            | 1.28           | 0.041        | /        |
| Body-worn SAR (Distance 15mm) (FULL)                                                                                                                                                                      |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                                                                                                                                                                 | standard   | GSM       | 1:8.3      | 661/1880                 | 30.30         | 29.22                | 0.140                        | 0.230           | -0.080           | 1.28           | 0.295        | 25       |
| Front Side                                                                                                                                                                                                | standard   | GSM       | 1:8.3      | 661/1880                 | 30.30         | 29.22                | 0.089                        | 0.191           | 0.023            | 1.28           | 0.245        | /        |
| Hotspot SAR(Distance 10mm) (FULL)                                                                                                                                                                         |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                                                                                                                                                                 | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 26.30         | 24.93                | 0.266                        | 0.461           | 0.015            | 1.37           | 0.632        | /        |
| Front Side                                                                                                                                                                                                | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 26.30         | 24.93                | 0.177                        | 0.304           | -0.090           | 1.37           | 0.417        | /        |
| Left Edge                                                                                                                                                                                                 | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 26.30         | 24.93                | 0.050                        | 0.083           | 0.021            | 1.37           | 0.114        | /        |
| Right Edge                                                                                                                                                                                                | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 26.30         | 24.93                | 0.057                        | 0.097           | 0.062            | 1.37           | 0.133        | /        |
| Top Edge                                                                                                                                                                                                  | N/A        | N/A       | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                                                                               | standard   | 4Txslots  | 1:2.07     | 512/1850.2               | 26.30         | 25.05                | 0.362                        | 0.665           | -0.010           | 1.33           | 0.886        | /        |
|                                                                                                                                                                                                           | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 26.30         | 24.93                | 0.407                        | 0.723           | 0.023            | 1.37           | 0.991        | 26       |
|                                                                                                                                                                                                           | standard   | 4Txslots  | 1:2.07     | 810/1909.8               | 26.30         | 24.88                | 0.348                        | 0.618           | 0.060            | 1.39           | 0.857        | /        |
| Bottom Edge                                                                                                                                                                                               | repeated   | 4Txslots  | 1:2.07     | 661/1880                 | 26.30         | 24.93                | 0.410                        | 0.719           | 0.019            | 1.37           | 0.986        | /        |
| Note: 1.The value with blue color is the maximum SAR Value of each test band.<br>2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power. |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |

## Measurement Variability

| Test Position                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Channel/ Frequency(MHz) | MAX Measured SAR <sub>1g</sub> (W/kg) | 1 <sup>st</sup> Repeated SAR <sub>1g</sub> (W/kg) | Ratio |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------------------------|---------------------------------------------------|-------|
| Bottom Edge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 661/1880                | 0.723                                 | 0.719                                             | 1.01  |
| Note: 1) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).<br>2) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20. |                         |                                       |                                                   |       |



Table 11: UMTS Band II (WWAN Antenna Down)

| Test Position                                            | Cover Type | Channel Type | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|----------------------------------------------------------|------------|--------------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                                          |            |              |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (FULL)                                          |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 24.10         | 22.80                | 0.048                        | 0.065           | 0.041            | 1.35           | 0.088        | 27       |
| Left Tilt                                                | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 24.10         | 22.80                | 0.039                        | 0.049           | 0.145            | 1.35           | 0.066        | /        |
| Right Cheek                                              | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 24.10         | 22.80                | 0.034                        | 0.058           | 0.062            | 1.35           | 0.078        | /        |
| Right Tilt                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 24.10         | 22.80                | 0.023                        | 0.039           | 0.062            | 1.35           | 0.053        | /        |
| Body-worn SAR (Distance 15mm) (FULL)                     |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 24.10         | 22.80                | 0.147                        | 0.235           | 0.080            | 1.35           | 0.317        | 28       |
| Front Side                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 24.10         | 22.80                | 0.124                        | 0.199           | 0.022            | 1.35           | 0.268        | /        |
| Hotspot SAR(Distance 10mm) (Body(WWAN+2.4G/5G)-ANT Down) |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 23.10         | 21.71                | 0.257                        | 0.448           | 0.030            | 1.38           | 0.617        | /        |
| Front Side                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 23.10         | 21.71                | 0.178                        | 0.299           | 0.019            | 1.38           | 0.412        | /        |
| Left Edge                                                | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 23.10         | 21.71                | 0.032                        | 0.059           | -0.038           | 1.38           | 0.081        | /        |
| Right Edge                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 23.10         | 21.71                | 0.039                        | 0.072           | 0.090            | 1.38           | 0.099        | /        |
| Top Edge                                                 | N/A        | N/A          | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                              | standard   | RMC 12.2K    | 1:1        | 9262/1852.4              | 23.10         | 21.90                | 0.231                        | 0.501           | -0.102           | 1.32           | 0.660        | /        |
|                                                          | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 23.10         | 21.71                | 0.387                        | 0.685           | -0.031           | 1.38           | 0.943        | 29       |
|                                                          | standard   | RMC 12.2K    | 1:1        | 9538/1907.6              | 23.10         | 21.88                | 0.360                        | 0.642           | -0.040           | 1.32           | 0.850        | /        |
| Bottom Edge                                              | repeated   | RMC 12.2K    | 1:1        | 9400/1880                | 23.10         | 21.71                | 0.395                        | 0.681           | 0.028            | 1.38           | 0.938        | /        |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

## Measurement Variability

| Test Position | Channel/ Frequency(MHz) | MAX Measured SAR <sub>1g</sub> (W/kg) | 1 <sup>st</sup> Repeated SAR <sub>1g</sub> (W/kg) | Ratio |
|---------------|-------------------------|---------------------------------------|---------------------------------------------------|-------|
| Bottom Edge   | 9400/1880               | 0.685                                 | 0.681                                             | 1.01  |

Note: 1) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

2) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .



| Test Position | Channel Type | Duty Cycle | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |              | Need to test |
|---------------|--------------|------------|------------------------|---------------|----------------------|------------------------------|----------------|--------------|--------------|
|               |              |            |                        |               |                      | Measured SAR1g               | Scaling Factor | Report SAR1g |              |
| Back Side     | RMC 12.2K    | 1:1        | 9400/1880              | 24.10         | 23.10                | 0.617                        | 1.26           | 0.777        | no           |
| Front Side    | RMC 12.2K    | 1:1        | 9400/1880              | 24.10         | 23.10                | 0.412                        | 1.26           | 0.518        | no           |
| Left Edge     | RMC 12.2K    | 1:1        | 9400/1880              | 24.10         | 23.10                | 0.081                        | 1.26           | 0.102        | no           |
| Right Edge    | RMC 12.2K    | 1:1        | 9400/1880              | 24.10         | 23.10                | 0.099                        | 1.26           | 0.125        | no           |
| Bottom Edge   | RMC 12.2K    | 1:1        | 9400/1880              | 24.10         | 23.10                | 0.943                        | 1.26           | 1.188        | no           |

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Table 12: UMTS Band IV (WWAN Antenna Down)

| Test Position                                             | Cover Type | Channel Type | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|-----------------------------------------------------------|------------|--------------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                                           |            |              |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (FULL)                                           |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                                                | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 24.10         | 22.96                | 0.033                        | 0.062           | 0.028            | 1.30           | 0.081        | /        |
| Left Tilt                                                 | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 24.10         | 22.96                | 0.024                        | 0.048           | 0.061            | 1.30           | 0.062        | /        |
| Right Cheek                                               | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 24.10         | 22.96                | 0.032                        | 0.069           | 0.157            | 1.30           | 0.090        | 30       |
| Right Tilt                                                | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 24.10         | 22.96                | 0.021                        | 0.043           | 0.063            | 1.30           | 0.056        | /        |
| Body-worn SAR (Distance 15mm) (Body(standalone)-ANT Down) |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                 | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 23.10         | 21.56                | 0.272                        | 0.426           | 0.060            | 1.43           | 0.607        | 31       |
| Front Side                                                | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 23.10         | 21.56                | 0.131                        | 0.240           | -0.021           | 1.43           | 0.342        | /        |
| Hotspot SAR(Distance 10mm) (Body(WWAN+2.4G/5G)-ANT Down)  |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                 | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 22.10         | 20.52                | 0.286                        | 0.512           | -0.112           | 1.44           | 0.737        | 32       |
| Front Side                                                | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 22.10         | 20.52                | 0.214                        | 0.357           | 0.033            | 1.44           | 0.514        | /        |
| Left Edge                                                 | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 22.10         | 20.52                | 0.041                        | 0.070           | 0.010            | 1.44           | 0.101        | /        |
| Right Edge                                                | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 22.10         | 20.52                | 0.070                        | 0.123           | 0.125            | 1.44           | 0.177        | /        |
| Top Edge                                                  | N/A        | N/A          | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                               | standard   | RMC 12.2K    | 1:1        | 1413/1732.6              | 22.10         | 20.52                | 0.159                        | 0.279           | 0.190            | 1.44           | 0.401        | /        |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

| Test Position | Time slot | Duty Cycle | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |              | Need to test |
|---------------|-----------|------------|------------------------|---------------|----------------------|------------------------------|----------------|--------------|--------------|
|               |           |            |                        |               |                      | Measured SAR1g               | Scaling Factor | Report SAR1g |              |
| Back Side     | RMC 12.2K | 1:1        | 1413/1732.6            | 23.10         | 22.10                | 0.737                        | 1.26           | 0.927        | no           |
| Front Side    | RMC 12.2K | 1:1        | 1413/1732.6            | 23.10         | 22.10                | 0.514                        | 1.26           | 0.647        | no           |
| Left Edge     | RMC 12.2K | 1:1        | 1413/1732.6            | 23.10         | 22.10                | 0.101                        | 1.26           | 0.127        | no           |
| Right Edge    | RMC 12.2K | 1:1        | 1413/1732.6            | 23.10         | 22.10                | 0.177                        | 1.26           | 0.223        | no           |
| Bottom Edge   | RMC 12.2K | 1:1        | 1413/1732.6            | 23.10         | 22.10                | 0.401                        | 1.26           | 0.505        | no           |

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Table 13: UMTS Band V (WWAN Antenna Down)

| Test Position                        | Cover Type | Channel Type | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|--------------------------------------|------------|--------------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                      |            |              |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (FULL)                      |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.061                        | 0.082           | 0.175            | 1.12           | 0.092        | /        |
| Left Tilt                            | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.046                        | 0.059           | 0.039            | 1.12           | 0.066        | /        |
| Right Cheek                          | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.084                        | 0.105           | 0.031            | 1.12           | 0.118        | 33       |
| Right Tilt                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.041                        | 0.053           | 0.054            | 1.12           | 0.059        | /        |
| Body-worn SAR (Distance 15mm) (FULL) |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                            | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.135                        | 0.178           | 0.060            | 1.12           | 0.200        | 34       |
| Front Side                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.126                        | 0.162           | 0.022            | 1.12           | 0.182        | /        |
| Hotspot SAR(Distance 10mm) (FULL)    |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                            | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.162                        | 0.216           | 0.010            | 1.12           | 0.243        | 35       |
| Front Side                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.134                        | 0.186           | 0.010            | 1.12           | 0.209        | /        |
| Left Edge                            | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.123                        | 0.185           | -0.033           | 1.12           | 0.208        | /        |
| Right Edge                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.042                        | 0.065           | -0.040           | 1.12           | 0.073        | /        |
| Top Edge                             | N/A        | N/A          | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                          | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.089                        | 0.163           | 0.021            | 1.12           | 0.183        | /        |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.



Table 14: LTE Band 2 (20MHz, WWAN Antenna Down)

| Test Position                              | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |               | Plot No. |
|--------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|---------------|----------|
|                                            |            |            |               |           |                             |               |                      | Measured SAR10 g             | Measured SAR1 g | Power Drift (dB) | Scaling Factor | Report SAR1 g |          |
| Head SAR (QPSK) (FULL)                     |            |            |               |           |                             |               |                      |                              |                 |                  |                |               |          |
| Left Cheek                                 | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.075                        | 0.121           | 0.150            | 1.14           | 0.138         | 36       |
| Left Tilt                                  | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.051                        | 0.087           | 0.060            | 1.14           | 0.099         | /        |
| Right Cheek                                | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.049                        | 0.089           | 0.050            | 1.14           | 0.101         | /        |
| Right Tilt                                 | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.041                        | 0.065           | 0.095            | 1.14           | 0.074         | /        |
| Left Cheek                                 | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.057                        | 0.095           | 0.133            | 1.26           | 0.120         | /        |
| Left Tilt                                  | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.039                        | 0.069           | 0.023            | 1.26           | 0.087         | /        |
| Right Cheek                                | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.045                        | 0.077           | 0.088            | 1.26           | 0.097         | /        |
| Right Tilt                                 | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.036                        | 0.051           | -0.060           | 1.26           | 0.064         | /        |
| Body-worn SAR (QPSK, Distance 15mm) (FULL) |            |            |               |           |                             |               |                      |                              |                 |                  |                |               |          |
| Back Side                                  | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.160                        | 0.260           | -0.060           | 1.14           | 0.296         | 37       |
| Front Side                                 | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.121                        | 0.193           | 0.062            | 1.14           | 0.220         | /        |
| Back Side                                  | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.113                        | 0.187           | 0.050            | 1.26           | 0.236         | /        |
| Front Side                                 | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.085                        | 0.136           | 0.124            | 1.26           | 0.172         | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)    |            |            |               |           |                             |               |                      |                              |                 |                  |                |               |          |
| Back Side                                  | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.308                        | 0.537           | 0.010            | 1.14           | 0.612         | /        |
| Front Side                                 | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.223                        | 0.370           | 0.024            | 1.14           | 0.422         | /        |
| Left Edge                                  | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.045                        | 0.076           | 0.033            | 1.14           | 0.087         | /        |
| Right Edge                                 | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.073                        | 0.131           | -0.060           | 1.14           | 0.149         | /        |
| Top Edge                                   | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A           | N/A      |
| Bottom Edge                                | standard   | 1:1        | 1             | 50        | 18700/1860                  | 23.80         | 22.88                | 0.533                        | 0.943           | 0.026            | 1.24           | 1.165         | 38       |
|                                            | standard   | 1:1        | 1             | 50        | 18900/1880                  | 23.80         | 23.15                | 0.519                        | 0.918           | 0.020            | 1.16           | 1.066         | /        |
|                                            | standard   | 1:1        | 1             | 50        | 19100/1900                  | 23.80         | 23.23                | 0.472                        | 0.847           | 0.110            | 1.14           | 0.966         | /        |
| Back Side                                  | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.220                        | 0.384           | 0.015            | 1.26           | 0.485         | /        |
| Front Side                                 | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.158                        | 0.265           | 0.027            | 1.26           | 0.334         | /        |
| Left Edge                                  | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.036                        | 0.059           | -0.010           | 1.26           | 0.074         | /        |
| Right Edge                                 | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.051                        | 0.092           | 0.011            | 1.26           | 0.116         | /        |
| Top Edge                                   | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A           | N/A      |
| Bottom Edge                                | standard   | 1:1        | 50%           | 25        | 19100/1900                  | 22.80         | 21.79                | 0.368                        | 0.623           | 0.090            | 1.26           | 0.786         | /        |
| Bottom Edge                                | standard   | 1:1        | 100%          | 0         | 18700/1860                  | 22.80         | 21.54                | 0.312                        | 0.543           | 0.110            | 1.34           | 0.726         | /        |
|                                            | standard   | 1:1        | 100%          | 0         | 18900/1880                  | 22.80         | 21.53                | 0.327                        | 0.568           | 0.050            | 1.34           | 0.761         | /        |
|                                            | standard   | 1:1        | 100%          | 0         | 19100/1900                  | 22.80         | 21.57                | 0.379                        | 0.653           | 0.030            | 1.33           | 0.867         | /        |
| Bottom Edge                                | repeated   | 1:1        | 1             | 50        | 18700/1860                  | 23.80         | 22.88                | 0.526                        | 0.939           | 0.070            | 1.24           | 1.161         | /        |



Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are  $\geq 50\%$  limit(1g).

#### Measurement Variability

| Test Position | Channel/ Frequency(MHz) | MAX Measured SAR <sub>1g</sub> (W/kg) | 1 <sup>st</sup> Repeated SAR <sub>1g</sub> (W/kg) | Ratio |
|---------------|-------------------------|---------------------------------------|---------------------------------------------------|-------|
| Bottom Edge   | 18700/1860              | 0.943                                 | 0.939                                             | 1.00  |

Note: 1) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

2) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .



Table 15: LTE Band 4 (20MHz, WWAN Antenna Down)

| Test Position                                                  | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|----------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                         |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                     | standard   | 1:1        | 1             | 0         | 20050/1720                  | 23.80         | 23.18                | 0.012                        | 0.026          | 0.107            | 1.15           | 0.030        | /        |
| Left Tilt                                                      | standard   | 1:1        | 1             | 0         | 20050/1720                  | 23.80         | 23.18                | 0.016                        | 0.035          | 0.056            | 1.15           | 0.040        | /        |
| Right Cheek                                                    | standard   | 1:1        | 1             | 0         | 20050/1720                  | 23.80         | 23.18                | 0.021                        | 0.037          | 0.104            | 1.15           | 0.043        | /        |
| Right Tilt                                                     | standard   | 1:1        | 1             | 0         | 20050/1720                  | 23.80         | 23.18                | 0.026                        | 0.050          | 0.025            | 1.15           | 0.057        | /        |
| Left Cheek                                                     | standard   | 1:1        | 50%           | 0         | 20300/1745                  | 22.80         | 21.79                | 0.018                        | 0.037          | 0.112            | 1.26           | 0.047        | /        |
| Left Tilt                                                      | standard   | 1:1        | 50%           | 0         | 20300/1745                  | 22.80         | 21.79                | 0.019                        | 0.043          | 0.126            | 1.26           | 0.054        | /        |
| Right Cheek                                                    | standard   | 1:1        | 50%           | 0         | 20300/1745                  | 22.80         | 21.79                | 0.022                        | 0.044          | 0.049            | 1.26           | 0.056        | /        |
| Right Tilt                                                     | standard   | 1:1        | 50%           | 0         | 20300/1745                  | 22.80         | 21.79                | 0.031                        | 0.055          | -0.047           | 1.26           | 0.069        | 39       |
| Body-worn SAR (Body(standalone)-ANT Down)                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                      | standard   | 1:1        | 1             | 50        | 20175/1732.5                | 22.30         | 21.06                | 0.242                        | 0.384          | -0.020           | 1.33           | 0.511        | 40       |
| Front Side                                                     | standard   | 1:1        | 1             | 50        | 20175/1732.5                | 22.30         | 21.06                | 0.131                        | 0.214          | 0.160            | 1.33           | 0.285        | /        |
| Back Side                                                      | standard   | 1:1        | 50%           | 25        | 20175/1732.5                | 22.30         | 21.07                | 0.194                        | 0.320          | 0.020            | 1.33           | 0.425        | /        |
| Front Side                                                     | standard   | 1:1        | 50%           | 25        | 20175/1732.5                | 22.30         | 21.07                | 0.128                        | 0.209          | -0.150           | 1.33           | 0.277        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (Body(WWAN+2.4G/5G)-ANT Down) |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                      | standard   | 1:1        | 1             | 50        | 20175/1732.5                | 21.80         | 20.55                | 0.311                        | 0.502          | 0.031            | 1.33           | 0.669        | /        |
| Front Side                                                     | standard   | 1:1        | 1             | 50        | 20175/1732.5                | 21.80         | 20.55                | 0.272                        | 0.349          | 0.030            | 1.33           | 0.465        | /        |
| Left Edge                                                      | standard   | 1:1        | 1             | 50        | 20175/1732.5                | 21.80         | 20.55                | 0.059                        | 0.105          | -0.020           | 1.33           | 0.140        | /        |
| Right Edge                                                     | standard   | 1:1        | 1             | 50        | 20175/1732.5                | 21.80         | 20.55                | 0.049                        | 0.085          | -0.180           | 1.33           | 0.113        | /        |
| Top Edge                                                       | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                    | standard   | 1:1        | 1             | 50        | 20175/1732.5                | 21.80         | 20.55                | 0.335                        | 0.589          | -0.180           | 1.33           | 0.785        | /        |
| Back Side                                                      | standard   | 1:1        | 50%           | 50        | 20175/1732.5                | 21.80         | 20.60                | 0.319                        | 0.516          | -0.070           | 1.32           | 0.680        | /        |
| Front Side                                                     | standard   | 1:1        | 50%           | 50        | 20175/1732.5                | 21.80         | 20.60                | 0.263                        | 0.353          | 0.094            | 1.32           | 0.465        | /        |
| Left Edge                                                      | standard   | 1:1        | 50%           | 50        | 20175/1732.5                | 21.80         | 20.60                | 0.064                        | 0.112          | 0.033            | 1.32           | 0.148        | /        |
| Right Edge                                                     | standard   | 1:1        | 50%           | 50        | 20175/1732.5                | 21.80         | 20.60                | 0.035                        | 0.063          | 0.037            | 1.32           | 0.083        | /        |
| Top Edge                                                       | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                    | standard   | 1:1        | 50%           | 50        | 20050/1720                  | 21.80         | 20.58                | 0.349                        | 0.623          | -0.014           | 1.32           | 0.825        | /        |
|                                                                | standard   | 1:1        | 50%           | 50        | 20175/1732.5                | 21.80         | 20.60                | 0.371                        | 0.651          | 0.035            | 1.32           | 0.858        | 41       |
|                                                                | standard   | 1:1        | 50%           | 25        | 20300/1745                  | 21.80         | 20.56                | 0.325                        | 0.619          | 0.080            | 1.33           | 0.824        | /        |
| Bottom Edge                                                    | repeated   | 1:1        | 50%           | 50        | 20175/1732.5                | 21.80         | 20.60                | 0.362                        | 0.646          | 0.029            | 1.32           | 0.852        | /        |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are  $\geq$  50% limit(1g).



| Measurement Variability                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                         |                                       |                                                   |       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------------------------|---------------------------------------------------|-------|
| Test Position                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Channel/ Frequency(MHz) | MAX Measured SAR <sub>1g</sub> (W/kg) | 1 <sup>st</sup> Repeated SAR <sub>1g</sub> (W/kg) | Ratio |
| Bottom Edge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 20175/1732.5            | 0.651                                 | 0.646                                             | 1.01  |
| <p>Note: 1) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was &gt; 1.20 or when the original or repeated measurement was <math>\geq 1.45</math> W/kg (~ 10% from the 1-g SAR limit).</p> <p>2) A third repeated measurement was performed only if the original, first or second repeated measurement was <math>\geq 1.5</math> W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is &gt; 1.20.</p> |                         |                                       |                                                   |       |

| Test Position                                                                                                                                                       | Mode | Duty Cycle | RB allocation | offset | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Measured SAR <sub>1g</sub> | Scaling Factor | Report SAR <sub>1g</sub> | Need to test |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------|---------------|--------|------------------------|---------------|----------------------|----------------------------|----------------|--------------------------|--------------|
| Back Side                                                                                                                                                           | QPSK | 1:1        | 1             | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.669                      | 1.12           | 0.751                    | no           |
| Front Side                                                                                                                                                          | QPSK | 1:1        | 1             | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.465                      | 1.12           | 0.522                    | no           |
| Left Edge                                                                                                                                                           | QPSK | 1:1        | 1             | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.140                      | 1.12           | 0.157                    | no           |
| Right Edge                                                                                                                                                          | QPSK | 1:1        | 1             | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.113                      | 1.12           | 0.127                    | no           |
| Bottom Edge                                                                                                                                                         | QPSK | 1:1        | 1             | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.785                      | 1.12           | 0.881                    | no           |
| Back Side                                                                                                                                                           | QPSK | 1:1        | 50%           | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.680                      | 1.12           | 0.763                    | no           |
| Front Side                                                                                                                                                          | QPSK | 1:1        | 50%           | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.465                      | 1.12           | 0.522                    | no           |
| Left Edge                                                                                                                                                           | QPSK | 1:1        | 50%           | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.148                      | 1.12           | 0.166                    | no           |
| Right Edge                                                                                                                                                          | QPSK | 1:1        | 50%           | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.083                      | 1.12           | 0.093                    | no           |
| Bottom Edge                                                                                                                                                         | QPSK | 1:1        | 50%           | 50     | 20175/1732.5           | 22.30         | 21.80                | 0.858                      | 1.12           | 0.963                    | no           |
| <p>Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR &lt; 1.2 W/kg, Product Specific 10-g SAR is not required.</p> |      |            |               |        |                        |               |                      |                            |                |                          |              |



Table 16: LTE Band 5 (10MHz, WWAN Antenna Down)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.098                        | 0.131          | 0.032            | 1.15           | 0.151        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.030                        | 0.045          | 0.046            | 1.15           | 0.052        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.109                        | 0.141          | -0.033           | 1.15           | 0.162        | 42       |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.043                        | 0.055          | -0.059           | 1.15           | 0.064        | /        |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.071                        | 0.094          | 0.056            | 1.28           | 0.120        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.030                        | 0.039          | 0.047            | 1.28           | 0.049        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.064                        | 0.083          | 0.058            | 1.28           | 0.107        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.031                        | 0.040          | 0.046            | 1.28           | 0.051        | /        |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.128                        | 0.179          | -0.082           | 1.15           | 0.206        | 43       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.106                        | 0.147          | 0.010            | 1.15           | 0.169        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.109                        | 0.154          | 0.101            | 1.28           | 0.197        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.090                        | 0.125          | 0.160            | 1.28           | 0.160        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.142                        | 0.235          | -0.028           | 1.15           | 0.270        | 44       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.109                        | 0.151          | 0.000            | 1.15           | 0.174        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.097                        | 0.146          | -0.120           | 1.15           | 0.168        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.069                        | 0.104          | 0.050            | 1.15           | 0.120        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.072                        | 0.129          | 0.150            | 1.15           | 0.148        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.127                        | 0.176          | 0.050            | 1.28           | 0.226        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.092                        | 0.127          | 0.050            | 1.28           | 0.163        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.077                        | 0.116          | 0.080            | 1.28           | 0.149        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.043                        | 0.064          | 0.070            | 1.28           | 0.082        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.059                        | 0.107          | -0.022           | 1.28           | 0.137        | /        |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                                                              |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 17: LTE Band 7 (20MHz, WWAN Antenna Down)

| Test Position                           | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|-----------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                         |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                  |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                              | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.073                        | 0.130          | -0.083           | 1.09           | 0.142        | /        |
| Left Tilt                               | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.071                        | 0.137          | -0.110           | 1.09           | 0.149        | /        |
| Right Cheek                             | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.126                        | 0.225          | 0.031            | 1.09           | 0.245        | 45       |
| Right Tilt                              | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.094                        | 0.182          | -0.047           | 1.09           | 0.198        | /        |
| Left Cheek                              | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.042                        | 0.087          | 0.136            | 1.24           | 0.108        | /        |
| Left Tilt                               | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.045                        | 0.087          | -0.078           | 1.24           | 0.108        | /        |
| Right Cheek                             | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.102                        | 0.180          | 0.050            | 1.24           | 0.224        | /        |
| Right Tilt                              | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.069                        | 0.132          | 0.040            | 1.24           | 0.164        | /        |
| Right Cheek                             | standard   | 1:1        | 1             | 99        | 20850/2510                  | 23.80         | 23.53                | 0.108                        | 0.184          | 0.019            | 1.06           | 0.196        | /        |
|                                         |            |            | 1             | 0         | 21048/2529.8                |               |                      |                              |                |                  |                |              |          |
| Body-worn SAR (FULL)                    |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                               | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 23.80         | 23.43                | 0.257                        | 0.533          | 0.010            | 1.09           | 0.580        | 46       |
| Front Side                              | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 23.80         | 23.43                | 0.158                        | 0.297          | 0.029            | 1.09           | 0.323        | /        |
| Back Side                               | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 22.80         | 21.85                | 0.161                        | 0.329          | 0.190            | 1.24           | 0.409        | /        |
| Front Side                              | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 22.80         | 21.85                | 0.115                        | 0.206          | 0.050            | 1.24           | 0.256        | /        |
| Back Side                               | standard   | 1:1        | 1             | 99        | 20850/2510                  | 23.80         | 23.53                | 0.203                        | 0.429          | -0.056           | 1.06           | 0.457        | /        |
|                                         |            |            | 1             | 0         | 21048/2529.8                |               |                      |                              |                |                  |                |              |          |
| Hotspot SAR(QPSK, Distance 10mm) (FULL) |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                               | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.423                        | 0.994          | 0.038            | 1.09           | 1.082        | 47       |
|                                         | standard   | 1:1        | 1             | 50        | 21100/2535                  | 23.80         | 23.20                | 0.342                        | 0.649          | 0.180            | 1.15           | 0.745        | /        |
|                                         | standard   | 1:1        | 1             | 50        | 21350/2560                  | 23.80         | 23.42                | 0.380                        | 0.726          | 0.057            | 1.09           | 0.792        | /        |
| Front Side                              | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.254                        | 0.444          | -0.163           | 1.09           | 0.483        | /        |
| Left Edge                               | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.103                        | 0.193          | -0.104           | 1.09           | 0.210        | /        |
| Right Edge                              | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.151                        | 0.286          | 0.081            | 1.09           | 0.311        | /        |
| Top Edge                                | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                             | standard   | 1:1        | 1             | 0         | 20850/2510                  | 23.80         | 23.43                | 0.366                        | 0.766          | -0.152           | 1.09           | 0.834        | /        |
|                                         | standard   | 1:1        | 1             | 50        | 21100/2535                  | 23.80         | 23.20                | 0.336                        | 0.689          | 0.180            | 1.15           | 0.791        | /        |
|                                         | standard   | 1:1        | 1             | 50        | 21350/2560                  | 23.80         | 23.42                | 0.332                        | 0.653          | 0.010            | 1.09           | 0.713        | /        |
| Back Side                               | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.276                        | 0.607          | 0.033            | 1.24           | 0.755        | /        |
| Front Side                              | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.173                        | 0.305          | 0.067            | 1.24           | 0.380        | /        |
| Left Edge                               | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.065                        | 0.125          | -0.056           | 1.24           | 0.156        | /        |
| Right Edge                              | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.096                        | 0.180          | 0.032            | 1.24           | 0.224        | /        |
| Top Edge                                | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                             | standard   | 1:1        | 50%           | 25        | 20850/2510                  | 22.80         | 21.85                | 0.229                        | 0.492          | 0.057            | 1.24           | 0.612        | /        |



|           |          |     |      |    |              |       |       |       |       |       |      |       |   |
|-----------|----------|-----|------|----|--------------|-------|-------|-------|-------|-------|------|-------|---|
| Back Side | standard | 1:1 | 100% | 0  | 20850/2510   | 22.80 | 21.90 | 0.254 | 0.581 | 0.050 | 1.23 | 0.715 | / |
| Back Side | repeated | 1:1 | 1    | 0  | 20850/2510   | 23.80 | 23.43 | 0.416 | 0.982 | 0.012 | 1.09 | 1.069 | / |
| Back Side | standard | 1:1 | 1    | 99 | 20850/2510   | 23.80 | 23.53 | 0.395 | 0.846 | 0.064 | 1.06 | 0.900 | / |
|           |          |     | 1    | 0  | 21048/2529.8 |       |       |       |       |       |      |       |   |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are  $\geq$  50% limit(1g).

### Measurement Variability

| Test Position | Channel/ Frequency(MHz) | MAX Measured SAR <sub>1g</sub> (W/kg) | 1 <sup>st</sup> Repeated SAR <sub>1g</sub> (W/kg) | Ratio |
|---------------|-------------------------|---------------------------------------|---------------------------------------------------|-------|
| Back Side     | 20850/2510              | 0.994                                 | 0.982                                             | 1.01  |

Note: 1) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

2) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .



Table 18: LTE Band 12 (10MHz, WWAN Antenna Down)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.039                        | 0.050          | 0.027            | 1.21           | 0.060        | 48       |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.016                        | 0.020          | 0.049            | 1.21           | 0.024        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.034                        | 0.043          | 0.085            | 1.21           | 0.051        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.014                        | 0.018          | 0.037            | 1.21           | 0.021        | /        |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.023                        | 0.030          | 0.054            | 1.36           | 0.040        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.009                        | 0.011          | 0.107            | 1.36           | 0.016        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.030                        | 0.039          | 0.033            | 1.36           | 0.053        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.013                        | 0.016          | 0.038            | 1.36           | 0.022        | /        |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.084                        | 0.107          | 0.040            | 1.21           | 0.129        | 49       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.061                        | 0.084          | 0.026            | 1.21           | 0.101        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.045                        | 0.062          | 0.093            | 1.36           | 0.084        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.033                        | 0.046          | -0.050           | 1.36           | 0.063        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.086                        | 0.119          | -0.060           | 1.21           | 0.143        | 50       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.055                        | 0.076          | -0.022           | 1.21           | 0.092        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.048                        | 0.072          | 0.035            | 1.21           | 0.087        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.039                        | 0.059          | 0.090            | 1.21           | 0.071        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.028                        | 0.045          | 0.080            | 1.21           | 0.054        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.052                        | 0.072          | 0.024            | 1.36           | 0.098        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.033                        | 0.046          | 0.019            | 1.36           | 0.063        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.027                        | 0.044          | 0.046            | 1.36           | 0.060        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.019                        | 0.032          | 0.050            | 1.36           | 0.044        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.008                        | 0.028          | 0.080            | 1.36           | 0.038        | /        |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                                                              |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 19: LTE Band 17 (10MHz, WWAN Antenna Down)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.036                        | 0.046          | 0.168            | 1.20           | 0.056        | 51       |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.015                        | 0.018          | 0.081            | 1.20           | 0.022        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.031                        | 0.039          | 0.041            | 1.20           | 0.047        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.014                        | 0.017          | 0.042            | 1.20           | 0.020        | /        |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.026                        | 0.033          | 0.032            | 1.34           | 0.044        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.010                        | 0.013          | 0.048            | 1.34           | 0.018        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.022                        | 0.028          | 0.038            | 1.34           | 0.038        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.006                        | 0.009          | 0.062            | 1.34           | 0.011        | /        |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.082                        | 0.105          | 0.070            | 1.20           | 0.126        | 52       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.056                        | 0.081          | 0.020            | 1.20           | 0.097        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.057                        | 0.081          | -0.060           | 1.34           | 0.109        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.041                        | 0.057          | 0.013            | 1.34           | 0.077        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.074                        | 0.094          | 0.080            | 1.20           | 0.113        | 53       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.048                        | 0.066          | 0.025            | 1.20           | 0.079        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.047                        | 0.070          | 0.034            | 1.20           | 0.084        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.037                        | 0.056          | 0.020            | 1.20           | 0.067        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.041                        | 0.058          | 0.000            | 1.20           | 0.070        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.056                        | 0.078          | 0.090            | 1.34           | 0.105        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.038                        | 0.055          | 0.035            | 1.34           | 0.074        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.034                        | 0.052          | 0.030            | 1.34           | 0.070        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.010                        | 0.029          | 0.012            | 1.34           | 0.039        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.014                        | 0.032          | -0.010           | 1.34           | 0.043        | /        |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                                                              |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 20: LTE Band 26 (15MHz, WWAN Antenna Down)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.155                        | 0.205          | 0.020            | 1.15           | 0.236        | 54       |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.058                        | 0.076          | 0.180            | 1.15           | 0.088        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.132                        | 0.171          | 0.031            | 1.15           | 0.197        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.062                        | 0.079          | 0.090            | 1.15           | 0.091        | /        |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 0         | 26765/821.5                 | 23.30         | 22.10                | 0.056                        | 0.074          | 0.105            | 1.32           | 0.097        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 0         | 26765/821.5                 | 23.30         | 22.10                | 0.023                        | 0.031          | 0.047            | 1.32           | 0.041        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 0         | 26765/821.5                 | 23.30         | 22.10                | 0.050                        | 0.065          | 0.084            | 1.32           | 0.086        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 0         | 26765/821.5                 | 23.30         | 22.10                | 0.023                        | 0.029          | -0.110           | 1.32           | 0.038        | /        |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.146                        | 0.191          | -0.032           | 1.15           | 0.220        | 55       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.117                        | 0.164          | 0.030            | 1.15           | 0.189        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.081                        | 0.113          | 0.129            | 1.32           | 0.149        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.065                        | 0.091          | 0.062            | 1.32           | 0.120        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.158                        | 0.261          | -0.040           | 1.15           | 0.301        | 56       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.121                        | 0.167          | 0.021            | 1.15           | 0.193        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.114                        | 0.173          | 0.036            | 1.15           | 0.200        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.067                        | 0.102          | -0.010           | 1.15           | 0.118        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.086                        | 0.153          | 0.025            | 1.15           | 0.176        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 18        | 18                          | 23.30         | 22.10                | 0.094                        | 0.130          | 0.068            | 1.32           | 0.171        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 18        | 18                          | 23.30         | 22.10                | 0.066                        | 0.093          | 0.090            | 1.32           | 0.123        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 18        | 18                          | 23.30         | 22.10                | 0.049                        | 0.073          | 0.012            | 1.32           | 0.096        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 18        | 18                          | 23.30         | 22.10                | 0.042                        | 0.066          | 0.016            | 1.32           | 0.087        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.037                        | 0.067          | 0.080            | 1.32           | 0.088        | /        |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                                                              |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 21: LTE Band 38 (20MHz, WWAN Antenna Down)

| Test Position                           | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|-----------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                         |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                  |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                              | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.053                        | 0.097          | 0.045            | 1.12           | 0.109        | /        |
| Left Tilt                               | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.042                        | 0.082          | -0.073           | 1.12           | 0.092        | /        |
| Right Cheek                             | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.098                        | 0.184          | 0.086            | 1.12           | 0.206        | 57       |
| Right Tilt                              | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.040                        | 0.081          | -0.110           | 1.12           | 0.090        | /        |
| Left Cheek                              | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.034                        | 0.065          | -0.044           | 1.31           | 0.084        | /        |
| Left Tilt                               | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.029                        | 0.058          | 0.070            | 1.31           | 0.075        | /        |
| Right Cheek                             | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.068                        | 0.128          | -0.022           | 1.31           | 0.167        | /        |
| Right Tilt                              | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.027                        | 0.055          | 0.126            | 1.31           | 0.071        | /        |
| Right Cheek                             | standard   | 1:1.58     | 1             | 0         | 38150/2610                  | 23.80         | 23.53                | 0.061                        | 0.126          | 0.082            | 1.06           | 0.134        | /        |
|                                         |            |            | 1             | 99        | 37952/2590.2                |               |                      |                              |                |                  |                |              |          |
| Body-worn SAR (FULL)                    |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                               | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.072                        | 0.189          | -0.010           | 1.12           | 0.212        | /        |
| Front Side                              | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.114                        | 0.209          | 0.069            | 1.12           | 0.235        | 58       |
| Back Side                               | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.079                        | 0.158          | 0.029            | 1.31           | 0.206        | /        |
| Front Side                              | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.072                        | 0.169          | 0.035            | 1.31           | 0.221        | /        |
| Back Side                               | standard   | 1:1.58     | 1             | 0         | 38150/2610                  | 23.80         | 23.53                | 0.083                        | 0.157          | 0.070            | 1.06           | 0.167        | /        |
|                                         |            |            | 1             | 99        | 37952/2590.2                |               |                      |                              |                |                  |                |              |          |
| Hotspot SAR(QPSK, Distance 10mm) (FULL) |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                               | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.123                        | 0.222          | 0.011            | 1.12           | 0.249        | /        |
| Front Side                              | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.121                        | 0.217          | 0.023            | 1.12           | 0.243        | /        |
| Left Edge                               | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.029                        | 0.050          | -0.089           | 1.12           | 0.056        | /        |
| Right Edge                              | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.069                        | 0.135          | 0.050            | 1.12           | 0.151        | /        |
| Top Edge                                | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                             | standard   | 1:1.58     | 1             | 50        | 38150/2610                  | 23.80         | 23.30                | 0.090                        | 0.182          | 0.020            | 1.12           | 0.204        | /        |
| Back Side                               | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.112                        | 0.222          | 0.060            | 1.31           | 0.290        | 59       |
| Front Side                              | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.122                        | 0.218          | 0.015            | 1.31           | 0.285        | /        |
| Left Edge                               | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.030                        | 0.010          | 0.090            | 1.31           | 0.013        | /        |
| Right Edge                              | standard   | 1:1.58     | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.088                        | 0.167          | -0.064           | 1.31           | 0.218        | /        |
| Top Edge                                | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                             | standard   | 1:1        | 50%           | 25        | 38150/2610                  | 22.80         | 21.64                | 0.094                        | 0.195          | 0.030            | 1.31           | 0.255        | /        |
| Back Side                               | standard   | 1:1        | 1             | 0         | 38150/2610                  | 23.80         | 23.53                | 0.062                        | 0.135          | 0.026            | 1.06           | 0.144        | /        |
|                                         |            |            | 1             | 0         | 21048/2529.8                |               |                      |                              |                |                  |                |              |          |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are ≥



50% limit(1g).



Table 22: LTE Band 41 (20MHz, WWAN Antenna Down)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|--------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                          |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                          |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.055                        | 0.098          | -0.027           | 1.16           | 0.114        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.042                        | 0.081          | 0.022            | 1.16           | 0.095        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.093                        | 0.173          | 0.080            | 1.16           | 0.201        | 60       |
| Right Tilt                                                                                                                                  | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.041                        | 0.081          | 0.027            | 1.16           | 0.095        | /        |
| Left Cheek                                                                                                                                  | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.036                        | 0.065          | 0.026            | 1.32           | 0.086        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.026                        | 0.055          | -0.022           | 1.32           | 0.072        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.065                        | 0.120          | -0.023           | 1.32           | 0.158        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.028                        | 0.055          | -0.170           | 1.32           | 0.072        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1.58     | 1             | 0         | 41490/2680               | 23.80         | 23.53                | 0.061                        | 0.136          | 0.082            | 1.06           | 0.145        | /        |
|                                                                                                                                             |            |            | 1             | 99        | 41292/2660.2             |               |                      |                              |                |                  |                |              |          |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                          |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.088                        | 0.170          | 0.038            | 1.16           | 0.198        | 61       |
| Front Side                                                                                                                                  | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.072                        | 0.125          | 0.022            | 1.16           | 0.146        | /        |
| Back Side                                                                                                                                   | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.049                        | 0.088          | 0.030            | 1.32           | 0.116        | /        |
| Front Side                                                                                                                                  | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.049                        | 0.087          | -0.027           | 1.32           | 0.114        | /        |
| Back Side                                                                                                                                   | standard   | 1:1.58     | 1             | 0         | 41490/2680               | 23.80         | 23.53                | 0.055                        | 0.104          | 0.082            | 1.06           | 0.111        | /        |
|                                                                                                                                             |            |            | 1             | 99        | 41292/2660.2             |               |                      |                              |                |                  |                |              |          |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                          |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.156                        | 0.306          | 0.150            | 1.16           | 0.356        | 62       |
| Front Side                                                                                                                                  | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.126                        | 0.225          | 0.110            | 1.16           | 0.262        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.029                        | 0.050          | -0.020           | 1.16           | 0.058        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.074                        | 0.147          | 0.066            | 1.16           | 0.171        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                      | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1.58     | 1             | 50        | 40620/2593               | 23.80         | 23.14                | 0.098                        | 0.196          | -0.053           | 1.16           | 0.228        | /        |
| Back Side                                                                                                                                   | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.077                        | 0.169          | 0.010            | 1.32           | 0.222        | /        |
| Front Side                                                                                                                                  | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.087                        | 0.156          | -0.090           | 1.32           | 0.205        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.016                        | 0.038          | 0.100            | 1.32           | 0.050        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.055                        | 0.105          | 0.016            | 1.32           | 0.138        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                      | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1.58     | 50%           | 50        | 40620/2593               | 22.80         | 21.61                | 0.065                        | 0.134          | 0.030            | 1.32           | 0.176        | /        |
| Back Side                                                                                                                                   | standard   | 1:1.58     | 1             | 0         | 41490/2680               | 23.80         | 23.53                | 0.126                        | 0.232          | 0.041            | 1.06           | 0.247        | /        |
|                                                                                                                                             |            |            | 1             | 0         | 21048/2529.8             |               |                      |                              |                |                  |                |              |          |
| Note: 1.The value with blue color is the maximum SAR Value of each test band.                                                               |            |            |               |           |                          |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                          |               |                      |                              |                |                  |                |              |          |



Table 23: LTE Band 66 (20MHz, WWAN Antenna Down)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 50        | 132072/1720                 | 24.10         | 23.12                | 0.076                        | 0.117          | -0.042           | 1.25           | 0.147        | 63       |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 50        | 132072/1720                 | 24.10         | 23.12                | 0.025                        | 0.043          | 0.000            | 1.25           | 0.054        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 50        | 132072/1720                 | 24.10         | 23.12                | 0.054                        | 0.077          | -0.099           | 1.25           | 0.097        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 50        | 132072/1720                 | 24.10         | 23.12                | 0.036                        | 0.060          | 0.120            | 1.25           | 0.076        | /        |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 23.10         | 21.69                | 0.054                        | 0.083          | 0.059            | 1.38           | 0.115        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 23.10         | 21.69                | 0.018                        | 0.031          | 0.028            | 1.38           | 0.043        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 23.10         | 21.69                | 0.037                        | 0.053          | 0.034            | 1.38           | 0.073        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 23.10         | 21.69                | 0.024                        | 0.041          | 0.020            | 1.38           | 0.057        | /        |
| Body-worn SAR (Body(standalone)-ANT Down)                                                                                                   |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 50        | 132322/1745                 | 22.10         | 21.90                | 0.152                        | 0.274          | 0.030            | 1.05           | 0.287        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 50        | 132322/1745                 | 22.10         | 21.90                | 0.133                        | 0.214          | -0.015           | 1.05           | 0.224        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 50        | 132072/1720                 | 22.10         | 21.42                | 0.187                        | 0.292          | 0.070            | 1.17           | 0.341        | 64       |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 50        | 132072/1720                 | 22.10         | 21.42                | 0.142                        | 0.228          | 0.092            | 1.17           | 0.267        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (Body(standalone)-ANT Down)                                                                                |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 50        | 132322/1745                 | 22.10         | 21.90                | 0.344                        | 0.595          | -0.051           | 1.05           | 0.623        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 50        | 132322/1745                 | 22.10         | 21.90                | 0.226                        | 0.375          | 0.010            | 1.05           | 0.393        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 50        | 132322/1745                 | 22.10         | 21.90                | 0.029                        | 0.049          | 0.065            | 1.05           | 0.051        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 50        | 132322/1745                 | 22.10         | 21.90                | 0.049                        | 0.092          | 0.033            | 1.05           | 0.096        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 1             | 50        | 132322/1745                 | 22.10         | 21.90                | 0.351                        | 0.625          | -0.030           | 1.05           | 0.654        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 50        | 132072/1720                 | 22.10         | 21.42                | 0.361                        | 0.621          | 0.089            | 1.17           | 0.726        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 50        | 132072/1720                 | 22.10         | 21.42                | 0.236                        | 0.390          | 0.040            | 1.17           | 0.456        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 50        | 132072/1720                 | 22.10         | 21.42                | 0.037                        | 0.062          | 0.033            | 1.17           | 0.073        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 50        | 132072/1720                 | 22.10         | 21.42                | 0.058                        | 0.103          | 0.028            | 1.17           | 0.120        | /        |
| Top Edge                                                                                                                                    | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Bottom Edge                                                                                                                                 | standard   | 1:1        | 50%           | 50        | 132072/1720                 | 22.10         | 21.41                | 0.353                        | 0.630          | -0.040           | 1.17           | 0.738        | 65       |
| Note: 1.The value with blue color is the maximum SAR Value of each test band.                                                               |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 24: GSM 850 (WWAN Antenna Up)

| Test Position                                                                                                            | Cover Type | Time slot | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|--------------------------------------------------------------------------------------------------------------------------|------------|-----------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                                                                                                          |            |           |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR(FULL)                                                                                                           |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                                                                                                               | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.245                        | 0.366           | -0.020           | 1.28           | 0.467        | /        |
| Left Tilt                                                                                                                | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.209                        | 0.342           | -0.060           | 1.28           | 0.437        | /        |
| Right Cheek                                                                                                              | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.287                        | 0.464           | 0.110            | 1.28           | 0.592        | /        |
| Right Tilt                                                                                                               | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.250                        | 0.497           | 0.020            | 1.28           | 0.634        | 66       |
| Body-worn SAR (Distance 15mm)( FULL)                                                                                     |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                                                                                | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.071                        | 0.099           | 0.010            | 1.28           | 0.126        | 67       |
| Front Side                                                                                                               | standard   | GSM       | 1:8.3      | 190/836.6                | 33.30         | 32.24                | 0.061                        | 0.085           | 0.050            | 1.28           | 0.108        | /        |
| Hotspot SAR(Distance 10mm)( FULL)                                                                                        |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                                                                                | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.126                        | 0.174           | 0.095            | 1.37           | 0.239        | /        |
| Front Side                                                                                                               | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.110                        | 0.177           | 0.056            | 1.37           | 0.243        | 68       |
| Left Edge                                                                                                                | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.083                        | 0.129           | 0.044            | 1.37           | 0.177        | /        |
| Right Edge                                                                                                               | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.057                        | 0.086           | -0.023           | 1.37           | 0.118        | /        |
| Top Edge                                                                                                                 | standard   | 4Txslots  | 1:2.07     | 190/836.6                | 29.30         | 27.93                | 0.076                        | 0.140           | 0.050            | 1.37           | 0.192        | /        |
| Bottom Edge                                                                                                              | N/A        | N/A       | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |
| Note: 1.The value with blue color is the maximum SAR Value of each test band.                                            |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| 2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power. |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |



Table 25: GSM 1900 (WWAN Antenna Up)

| Test Position                                                                                                            | Cover Type | Time slot | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|--------------------------------------------------------------------------------------------------------------------------|------------|-----------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                                                                                                          |            |           |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR(head(standalone)-ANT Up)                                                                                        |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                                                                                                               | standard   | GSM       | 1:8.3      | 661/1880                 | 25.80         | 24.95                | 0.166                        | 0.332           | 0.061            | 1.22           | 0.404        | /        |
| Left Tilt                                                                                                                | standard   | GSM       | 1:8.3      | 661/1880                 | 25.80         | 24.95                | 0.205                        | 0.415           | 0.100            | 1.22           | 0.505        | /        |
| Right Cheek                                                                                                              | standard   | GSM       | 1:8.3      | 661/1880                 | 25.80         | 24.95                | 0.207                        | 0.439           | -0.040           | 1.22           | 0.534        | /        |
| Right Tilt                                                                                                               | standard   | GSM       | 1:8.3      | 661/1880                 | 25.80         | 24.95                | 0.272                        | 0.590           | 0.150            | 1.22           | 0.718        | 69       |
| Body-worn SAR (Distance 15mm)( Body(standalone)-ANT Up)                                                                  |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                                                                                | standard   | GSM       | 1:8.3      | 661/1880                 | 29.30         | 28.40                | 0.128                        | 0.230           | -0.170           | 1.23           | 0.283        | 70       |
| Front Side                                                                                                               | standard   | GSM       | 1:8.3      | 661/1880                 | 29.30         | 28.40                | 0.075                        | 0.152           | 0.030            | 1.23           | 0.187        | /        |
| Hotspot SAR(Distance 10mm)( Body(WWAN+2.4G/5G)-ANT Up)                                                                   |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                                                                                                | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 22.30         | 21.82                | 0.110                        | 0.211           | -0.019           | 1.12           | 0.236        | /        |
| Front Side                                                                                                               | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 22.30         | 21.82                | 0.086                        | 0.171           | 0.080            | 1.12           | 0.191        | /        |
| Left Edge                                                                                                                | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 22.30         | 21.82                | 0.011                        | 0.029           | 0.025            | 1.12           | 0.032        | /        |
| Right Edge                                                                                                               | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 22.30         | 21.82                | 0.006                        | 0.015           | 0.060            | 1.12           | 0.017        | /        |
| Top Edge                                                                                                                 | standard   | 4Txslots  | 1:2.07     | 661/1880                 | 22.30         | 21.82                | 0.212                        | 0.411           | 0.047            | 1.12           | 0.459        | 71       |
| Bottom Edge                                                                                                              | N/A        | N/A       | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |
| Note: 1.The value with blue color is the maximum SAR Value of each test band.                                            |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |
| 2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power. |            |           |            |                          |               |                      |                              |                 |                  |                |              |          |

| Test Position | Time slot | Duty Cycle | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |              | Need to test |
|---------------|-----------|------------|------------------------|---------------|----------------------|------------------------------|----------------|--------------|--------------|
|               |           |            |                        |               |                      | Measured SAR1g               | Scaling Factor | Report SAR1g |              |
| Back Side     | 4Txslots  | 1:2.07     | 661/1880               | 23.30         | 22.30                | 0.236                        | 1.26           | 0.297        | no           |
| Front Side    | 4Txslots  | 1:2.07     | 661/1880               | 23.30         | 22.30                | 0.191                        | 1.26           | 0.240        | no           |
| Left Edge     | 4Txslots  | 1:2.07     | 661/1880               | 23.30         | 22.30                | 0.032                        | 1.26           | 0.041        | no           |
| Right Edge    | 4Txslots  | 1:2.07     | 661/1880               | 23.30         | 22.30                | 0.017                        | 1.26           | 0.021        | no           |
| Top Edge      | 4Txslots  | 1:2.07     | 661/1880               | 23.30         | 22.30                | 0.459                        | 1.26           | 0.578        | no           |

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Table 26: UMTS Band II (WWAN Antenna Up)

| Test Position                                           | Cover Type | Channel Type | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|---------------------------------------------------------|------------|--------------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                                         |            |              |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (head(standalone)-ANT Up)                      |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                                              | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 17.10         | 15.59                | 0.158                        | 0.320           | -0.060           | 1.42           | 0.453        | /        |
| Left Tilt                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 17.10         | 15.59                | 0.248                        | 0.521           | 0.023            | 1.42           | 0.738        | /        |
| Right Cheek                                             | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 17.10         | 15.59                | 0.209                        | 0.446           | 0.010            | 1.42           | 0.631        | /        |
| Right Tilt                                              | standard   | RMC 12.2K    | 1:1        | 9262/1852.4              | 17.10         | 15.73                | 0.297                        | 0.670           | 0.080            | 1.37           | 0.918        | /        |
|                                                         | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 17.10         | 15.59                | 0.298                        | 0.654           | 0.100            | 1.42           | 0.926        | /        |
|                                                         | standard   | RMC 12.2K    | 1:1        | 9538/1907.6              | 17.10         | 15.79                | 0.313                        | 0.707           | 0.190            | 1.35           | 0.956        | 72       |
| Right Tilt                                              | repeated   | RMC 12.2K    | 1:1        | 9538/1907.6              | 17.10         | 15.79                | 0.302                        | 0.699           | -0.030           | 1.35           | 0.945        | /        |
| Body-worn SAR (Distance 15mm) (Body(standalone)-ANT Up) |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 19.10         | 18.02                | 0.169                        | 0.274           | 0.020            | 1.28           | 0.351        | 73       |
| Front Side                                              | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 19.10         | 18.02                | 0.107                        | 0.186           | 0.050            | 1.28           | 0.239        | /        |
| Hotspot SAR(Distance 10mm) (Body(WWAN+2.4G/5G)-ANT Up)  |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 18.60         | 17.53                | 0.109                        | 0.204           | 0.070            | 1.28           | 0.261        | /        |
| Front Side                                              | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 18.60         | 17.53                | 0.082                        | 0.171           | 0.030            | 1.28           | 0.219        | /        |
| Left Edge                                               | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 18.60         | 17.53                | 0.003                        | 0.010           | 0.021            | 1.28           | 0.013        | /        |
| Right Edge                                              | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 18.60         | 17.53                | 0.019                        | 0.042           | 0.100            | 1.28           | 0.054        | /        |
| Top Edge                                                | standard   | RMC 12.2K    | 1:1        | 9400/1880                | 18.60         | 17.53                | 0.207                        | 0.412           | 0.043            | 1.28           | 0.527        | 74       |
| Bottom Edge                                             | N/A        | N/A          | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

## Measurement Variability

| Test Position | Channel/ Frequency(MHz) | MAX Measured SAR <sub>1g</sub> (W/kg) | 1 <sup>st</sup> Repeated SAR <sub>1g</sub> (W/kg) | Ratio |
|---------------|-------------------------|---------------------------------------|---------------------------------------------------|-------|
| Right Tilt    | 9538/1907.6             | 0.707                                 | 0.699                                             | 1.01  |

Note: 1) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

2) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .



| Test Position | Channel Type | Duty Cycle | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |              | Need to test |
|---------------|--------------|------------|------------------------|---------------|----------------------|------------------------------|----------------|--------------|--------------|
|               |              |            |                        |               |                      | Measured SAR1g               | Scaling Factor | Report SAR1g |              |
| Back Side     | RMC 12.2K    | 1:1        | 9400/1880              | 19.10         | 18.60                | 0.261                        | 1.12           | 0.293        | no           |
| Front Side    | RMC 12.2K    | 1:1        | 9400/1880              | 19.10         | 18.60                | 0.219                        | 1.12           | 0.245        | no           |
| Left Edge     | RMC 12.2K    | 1:1        | 9400/1880              | 19.10         | 18.60                | 0.013                        | 1.12           | 0.014        | no           |
| Right Edge    | RMC 12.2K    | 1:1        | 9400/1880              | 19.10         | 18.60                | 0.054                        | 1.12           | 0.060        | no           |
| Top Edge      | RMC 12.2K    | 1:1        | 9400/1880              | 19.10         | 18.60                | 0.527                        | 1.12           | 0.591        | no           |

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Table 27: UMTS Band IV (WWAN Antenna Up)

| Test Position                                           | Cover Type | Channel Type | Duty Cycle | Channel/Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|---------------------------------------------------------|------------|--------------|------------|-------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                                         |            |              |            |                         |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (head(standalone)-ANT Up)                      |            |              |            |                         |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                                              | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 17.60         | 15.88                | 0.191                        | 0.377           | -0.030           | 1.49           | 0.560        | /        |
| Left Tilt                                               | standard   | RMC 12.2K    | 1:1        | 1312/1712.4             | 17.60         | 16.21                | 0.310                        | 0.622           | 0.065            | 1.38           | 0.857        | /        |
|                                                         | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 17.60         | 15.88                | 0.271                        | 0.554           | 0.031            | 1.49           | 0.823        | /        |
|                                                         | standard   | RMC 12.2K    | 1:1        | 1513/1752.6             | 17.60         | 15.95                | 0.296                        | 0.588           | -0.032           | 1.46           | 0.860        | /        |
| Right Cheek                                             | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 17.60         | 15.88                | 0.232                        | 0.493           | 0.170            | 1.49           | 0.733        | /        |
| Right Tilt                                              | standard   | RMC 12.2K    | 1:1        | 1312/1712.4             | 17.60         | 16.61                | 0.346                        | 0.761           | 0.020            | 1.26           | 0.956        | 75       |
|                                                         | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 17.60         | 15.88                | 0.318                        | 0.691           | 0.020            | 1.49           | 1.027        | /        |
|                                                         | standard   | RMC 12.2K    | 1:1        | 1513/1752.6             | 17.60         | 15.95                | 0.322                        | 0.724           | 0.012            | 1.46           | 1.059        | /        |
| Right Tilt                                              | repeated   | RMC 12.2K    | 1:1        | 1312/1712.4             | 17.60         | 16.21                | 0.342                        | 0.759           | 0.025            | 1.38           | 1.045        | /        |
| Body-worn SAR (Distance 15mm) (Body(standalone)-ANT Up) |            |              |            |                         |               |                      |                              |                 |                  |                |              |          |
| Back Side                                               | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 20.10         | 18.36                | 0.250                        | 0.430           | -0.030           | 1.49           | 0.642        | 76       |
| Front Side                                              | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 20.10         | 18.36                | 0.159                        | 0.263           | 0.021            | 1.49           | 0.393        | /        |
| Hotspot SAR(Distance 10mm) (Body(WWAN+2.4G/5G)-ANT Up)  |            |              |            |                         |               |                      |                              |                 |                  |                |              |          |
| Back Side                                               | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 19.60         | 18.17                | 0.142                        | 0.255           | 0.060            | 1.39           | 0.354        | /        |
| Front Side                                              | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 19.60         | 18.17                | 0.117                        | 0.230           | 0.022            | 1.39           | 0.320        | /        |
| Left Edge                                               | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 19.60         | 18.17                | 0.004                        | 0.012           | 0.011            | 1.39           | 0.017        | /        |
| Right Edge                                              | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 19.60         | 18.17                | 0.010                        | 0.019           | -0.123           | 1.39           | 0.026        | /        |
| Top Edge                                                | standard   | RMC 12.2K    | 1:1        | 1413/1732.6             | 19.60         | 18.17                | 0.254                        | 0.495           | -0.043           | 1.39           | 0.688        | 77       |
| Bottom Edge                                             | N/A        | N/A          | N/A        | N/A                     | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

| Test Position | Channel Type | Duty Cycle | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |              | Need to test |
|---------------|--------------|------------|------------------------|---------------|----------------------|------------------------------|----------------|--------------|--------------|
|               |              |            |                        |               |                      | Measured SAR1g               | Scaling Factor | Report SAR1g |              |
| Back Side     | RMC 12.2K    | 1:1        | 1413/1732.6            | 20.10         | 19.60                | 0.354                        | 1.12           | 0.398        | no           |
| Front Side    | RMC 12.2K    | 1:1        | 1413/1732.6            | 20.10         | 19.60                | 0.320                        | 1.12           | 0.359        | no           |
| Left Edge     | RMC 12.2K    | 1:1        | 1413/1732.6            | 20.10         | 19.60                | 0.017                        | 1.12           | 0.019        | no           |
| Right Edge    | RMC 12.2K    | 1:1        | 1413/1732.6            | 20.10         | 19.60                | 0.026                        | 1.12           | 0.030        | no           |
| Top Edge      | RMC 12.2K    | 1:1        | 1413/1732.6            | 20.10         | 19.60                | 0.688                        | 1.12           | 0.772        | no           |

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Table 28: UMTS Band V (WWAN Antenna Up)

| Test Position                        | Cover Type | Channel Type | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |              | Plot No. |
|--------------------------------------|------------|--------------|------------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|--------------|----------|
|                                      |            |              |            |                          |               |                      | Measur edSAR 10g             | Measur edSAR 1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (FULL)                      |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Left Cheek                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.248                        | 0.376           | 0.000            | 1.12           | 0.423        | /        |
| Left Tilt                            | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.191                        | 0.321           | 0.160            | 1.12           | 0.361        | /        |
| Right Cheek                          | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.290                        | 0.499           | 0.000            | 1.12           | 0.561        | /        |
| Right Tilt                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.231                        | 0.466           | 0.030            | 1.12           | 0.524        | 78       |
| Body-worn SAR (Distance 15mm) (FULL) |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                            | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.053                        | 0.069           | -0.020           | 1.12           | 0.078        | 79       |
| Front Side                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.045                        | 0.062           | 0.023            | 1.12           | 0.070        | /        |
| Hotspot SAR(Distance 10mm) (FULL)    |            |              |            |                          |               |                      |                              |                 |                  |                |              |          |
| Back Side                            | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.058                        | 0.094           | -0.025           | 1.12           | 0.106        | /        |
| Front Side                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.069                        | 0.115           | 0.060            | 1.12           | 0.129        | 80       |
| Left Edge                            | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.031                        | 0.048           | 0.047            | 1.12           | 0.054        | /        |
| Right Edge                           | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.041                        | 0.062           | 0.022            | 1.12           | 0.070        | /        |
| Top Edge                             | standard   | RMC 12.2K    | 1:1        | 4183/836.6               | 24.30         | 23.79                | 0.048                        | 0.081           | 0.010            | 1.12           | 0.091        | /        |
| Bottom Edge                          | N/A        | N/A          | N/A        | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A          | N/A      |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.



Table 29: LTE Band 2 (20MHz, WWAN Antenna Up)

| Test Position                                                | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|--------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                              |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (head(standalone)-ANT Up)                    |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                   | standard   | 1:1        | 1             | 50        | 18900/1880                  | 17.30         | 15.92                | 0.191                        | 0.387          | -0.020           | 1.37           | 0.532        | /        |
| Left Tilt                                                    | standard   | 1:1        | 1             | 50        | 18900/1880                  | 17.30         | 15.92                | 0.262                        | 0.548          | 0.054            | 1.37           | 0.753        | /        |
| Right Cheek                                                  | standard   | 1:1        | 1             | 50        | 18900/1880                  | 17.30         | 15.92                | 0.237                        | 0.512          | 0.080            | 1.37           | 0.704        | /        |
| Right Tilt                                                   | standard   | 1:1        | 1             | 50        | 18700/1860                  | 17.30         | 15.88                | 0.211                        | 0.587          | 0.052            | 1.39           | 0.814        | /        |
|                                                              | standard   | 1:1        | 1             | 50        | 18900/1880                  | 17.30         | 15.92                | 0.242                        | 0.616          | -0.050           | 1.37           | 0.846        | /        |
|                                                              | standard   | 1:1        | 1             | 50        | 19100/1900                  | 17.30         | 15.88                | 0.262                        | 0.623          | 0.120            | 1.39           | 0.864        | /        |
| Left Cheek                                                   | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.30         | 15.98                | 0.205                        | 0.418          | 0.040            | 1.36           | 0.566        | /        |
| Left Tilt                                                    | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.30         | 15.98                | 0.280                        | 0.590          | 0.120            | 1.36           | 0.800        | /        |
| Right Cheek                                                  | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.30         | 15.98                | 0.257                        | 0.559          | 0.050            | 1.36           | 0.758        | /        |
| Right Tilt                                                   | standard   | 1:1        | 50%           | 25        | 18700/1860                  | 17.30         | 15.85                | 0.274                        | 0.621          | 0.080            | 1.40           | 0.867        | /        |
|                                                              | standard   | 1:1        | 50%           | 25        | 18900/1880                  | 17.30         | 15.96                | 0.279                        | 0.633          | 0.080            | 1.36           | 0.862        | /        |
|                                                              | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.30         | 15.98                | 0.292                        | 0.651          | -0.050           | 1.36           | 0.882        | /        |
| Right Tilt                                                   | standard   | 1:1        | 100%          | 0         | 18700/1860                  | 17.30         | 15.83                | 0.312                        | 0.695          | 0.170            | 1.40           | 0.975        | /        |
|                                                              | standard   | 1:1        | 100%          | 0         | 18900/1880                  | 17.30         | 15.91                | 0.317                        | 0.708          | 0.020            | 1.38           | 0.975        | /        |
|                                                              | standard   | 1:1        | 100%          | 0         | 19100/1900                  | 17.30         | 15.94                | 0.346                        | 0.775          | 0.010            | 1.37           | 1.060        | /        |
| Right Tilt                                                   | repeated   | 1:1        | 100%          | 0         | 19100/1900                  | 17.30         | 15.94                | 0.343                        | 0.778          | 0.026            | 1.37           | 1.064        | 81       |
| Body-worn SAR (Body(standalone)-ANT Up)                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                    | standard   | 1:1        | 1             | 50        | 19100/1900                  | 18.30         | 17.14                | 0.069                        | 0.108          | 0.013            | 1.31           | 0.141        | /        |
| Front Side                                                   | standard   | 1:1        | 1             | 50        | 19100/1900                  | 18.30         | 17.14                | 0.039                        | 0.072          | 0.060            | 1.31           | 0.094        | /        |
| Back Side                                                    | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 18.30         | 17.22                | 0.078                        | 0.138          | -0.031           | 1.28           | 0.177        | 82       |
| Front Side                                                   | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 18.30         | 17.22                | 0.043                        | 0.080          | 0.028            | 1.28           | 0.103        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (Body(WWAN+2.4G/5G)-ANT Up) |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                    | standard   | 1:1        | 1             | 50        | 19100/1900                  | 17.80         | 16.65                | 0.094                        | 0.177          | 0.032            | 1.30           | 0.231        | /        |
| Front Side                                                   | standard   | 1:1        | 1             | 50        | 19100/1900                  | 17.80         | 16.65                | 0.081                        | 0.161          | 0.050            | 1.30           | 0.210        | /        |
| Left Edge                                                    | standard   | 1:1        | 1             | 50        | 19100/1900                  | 17.80         | 16.65                | 0.013                        | 0.025          | 0.080            | 1.30           | 0.033        | /        |
| Right Edge                                                   | standard   | 1:1        | 1             | 50        | 19100/1900                  | 17.80         | 16.65                | 0.016                        | 0.031          | 0.060            | 1.30           | 0.040        | /        |
| Top Edge                                                     | standard   | 1:1        | 1             | 50        | 19100/1900                  | 17.80         | 16.65                | 0.216                        | 0.437          | -0.045           | 1.30           | 0.569        | 83       |
| Bottom Edge                                                  | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Back Side                                                    | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.80         | 16.75                | 0.099                        | 0.190          | -0.021           | 1.27           | 0.242        | /        |
| Front Side                                                   | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.80         | 16.75                | 0.084                        | 0.157          | 0.034            | 1.27           | 0.200        | /        |
| Left Edge                                                    | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.80         | 16.75                | 0.004                        | 0.012          | 0.020            | 1.27           | 0.015        | /        |
| Right Edge                                                   | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.80         | 16.75                | 0.007                        | 0.019          | 0.034            | 1.27           | 0.024        | /        |
| Top Edge                                                     | standard   | 1:1        | 50%           | 0         | 19100/1900                  | 17.80         | 16.75                | 0.206                        | 0.413          | 0.011            | 1.27           | 0.526        | /        |



|             |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bottom Edge | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are  $\geq$  50% limit(1g).

### Measurement Variability

| Test Position | Channel/ Frequency(MHz) | MAX Measured SAR <sub>1g</sub> (W/kg) | 1 <sup>st</sup> Repeated SAR <sub>1g</sub> (W/kg) | Ratio |
|---------------|-------------------------|---------------------------------------|---------------------------------------------------|-------|
| Right Tilt    | 19100/1900              | 0.775                                 | 0.778                                             | 1.00  |

Note: 1) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

2) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

| Test Position | Mode | Duty Cycle | RB allocation | offset | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Measured SAR <sub>1g</sub> | Scaling Factor | Report SAR <sub>1g</sub> | Need to test |
|---------------|------|------------|---------------|--------|------------------------|---------------|----------------------|----------------------------|----------------|--------------------------|--------------|
| Back Side     | QPSK | 1:1        | 1             | 50     | 19100/1900             | 18.30         | 17.80                | 0.231                      | 1.12           | 0.259                    | no           |
| Front Side    | QPSK | 1:1        | 1             | 50     | 19100/1900             | 18.30         | 17.80                | 0.210                      | 1.12           | 0.235                    | no           |
| Left Edge     | QPSK | 1:1        | 1             | 50     | 19100/1900             | 18.30         | 17.80                | 0.033                      | 1.12           | 0.037                    | no           |
| Right Edge    | QPSK | 1:1        | 1             | 50     | 19100/1900             | 18.30         | 17.80                | 0.040                      | 1.12           | 0.045                    | no           |
| Top Edge      | QPSK | 1:1        | 1             | 50     | 19100/1900             | 18.30         | 17.80                | 0.569                      | 1.12           | 0.639                    | no           |
| Back Side     | QPSK | 1:1        | 50%           | 0      | 19100/1900             | 18.30         | 17.80                | 0.242                      | 1.12           | 0.271                    | no           |
| Front Side    | QPSK | 1:1        | 50%           | 0      | 19100/1900             | 18.30         | 17.80                | 0.200                      | 1.12           | 0.224                    | no           |
| Left Edge     | QPSK | 1:1        | 50%           | 0      | 19100/1900             | 18.30         | 17.80                | 0.015                      | 1.12           | 0.017                    | no           |
| Right Edge    | QPSK | 1:1        | 50%           | 0      | 19100/1900             | 18.30         | 17.80                | 0.024                      | 1.12           | 0.027                    | no           |
| Top Edge      | QPSK | 1:1        | 50%           | 0      | 19100/1900             | 18.30         | 17.80                | 0.526                      | 1.12           | 0.590                    | no           |

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR  $< 1.2$  W/kg, Product Specific 10-g SAR is not required.



Table 30: LTE Band 4 (20MHz, WWAN Antenna Up)

| Test Position                                                | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |               | Plot No. |
|--------------------------------------------------------------|------------|------------|---------------|-----------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|---------------|----------|
|                                                              |            |            |               |           |                          |               |                      | Measured SAR10 g             | Measured SAR1 g | Power Drift (dB) | Scaling Factor | Report SAR1 g |          |
| Head SAR (QPSK) (head(standalone)-ANT Up)                    |            |            |               |           |                          |               |                      |                              |                 |                  |                |               |          |
| Left Cheek                                                   | standard   | 1:1        | 1             | 99        | 20050/1720               | 18.30         | 17.53                | 0.237                        | 0.467           | -0.130           | 1.19           | 0.558         | /        |
| Left Tilt                                                    | standard   | 1:1        | 1             | 99        | 20050/1720               | 18.30         | 17.53                | 0.324                        | 0.648           | -0.030           | 1.19           | 0.774         | /        |
|                                                              | standard   | 1:1        | 1             | 0         | 20175/1732.5             | 18.30         | 17.43                | 0.310                        | 0.627           | -0.020           | 1.22           | 0.766         | /        |
|                                                              | standard   | 1:1        | 1             | 0         | 20300/1745               | 18.30         | 17.40                | 0.308                        | 0.626           | -0.080           | 1.23           | 0.770         | /        |
| Right Cheek                                                  | standard   | 1:1        | 1             | 99        | 20050/1720               | 18.30         | 17.53                | 0.267                        | 0.566           | 0.050            | 1.19           | 0.676         | /        |
| Right Tilt                                                   | standard   | 1:1        | 1             | 99        | 20050/1720               | 18.30         | 17.53                | 0.374                        | 0.814           | 0.031            | 1.19           | 0.972         | /        |
|                                                              | standard   | 1:1        | 1             | 0         | 20175/1732.5             | 18.30         | 17.43                | 0.409                        | 0.888           | 0.000            | 1.22           | 1.085         | /        |
|                                                              | standard   | 1:1        | 1             | 0         | 20300/1745               | 18.30         | 17.40                | 0.405                        | 0.880           | -0.040           | 1.23           | 1.083         | /        |
| Left Cheek                                                   | standard   | 1:1        | 50%           | 25        | 20175/1732.5             | 18.30         | 17.50                | 0.241                        | 0.476           | -0.030           | 1.20           | 0.572         | /        |
| Left Tilt                                                    | standard   | 1:1        | 50%           | 50        | 20050/1720               | 18.30         | 17.47                | 0.321                        | 0.651           | 0.020            | 1.21           | 0.788         | /        |
|                                                              | standard   | 1:1        | 50%           | 25        | 20175/1732.5             | 18.30         | 17.50                | 0.330                        | 0.673           | 0.050            | 1.20           | 0.809         | /        |
|                                                              | standard   | 1:1        | 50%           | 0         | 20300/1745               | 18.30         | 17.48                | 0.309                        | 0.632           | -0.100           | 1.21           | 0.763         | /        |
| Right Cheek                                                  | standard   | 1:1        | 50%           | 50        | 20050/1720               | 18.30         | 17.50                | 0.306                        | 0.679           | 0.090            | 1.20           | 0.816         | /        |
|                                                              | standard   | 1:1        | 50%           | 25        | 20175/1732.5             | 18.30         | 17.50                | 0.331                        | 0.721           | 0.010            | 1.20           | 0.867         | /        |
|                                                              | standard   | 1:1        | 50%           | 0         | 20300/1745               | 18.30         | 17.50                | 0.312                        | 0.704           | -0.021           | 1.20           | 0.846         | /        |
| Right Tilt                                                   | standard   | 1:1        | 50%           | 50        | 20050/1720               | 18.30         | 17.47                | 0.374                        | 0.811           | 0.050            | 1.21           | 0.982         | /        |
|                                                              | standard   | 1:1        | 50%           | 25        | 20175/1732.5             | 18.30         | 17.50                | 0.431                        | 0.943           | 0.020            | 1.20           | 1.134         | 84       |
|                                                              | standard   | 1:1        | 50%           | 0         | 20300/1745               | 18.30         | 17.48                | 0.376                        | 0.818           | 0.140            | 1.21           | 0.988         | /        |
| Right Tilt                                                   | standard   | 1:1        | 100%          | 0         | 20050/1720               | 18.30         | 17.32                | 0.379                        | 0.825           | 0.026            | 1.25           | 1.034         | /        |
|                                                              | standard   | 1:1        | 100%          | 0         | 20175/1732.5             | 18.30         | 17.33                | 0.413                        | 0.880           | 0.026            | 1.25           | 1.100         | /        |
|                                                              | standard   | 1:1        | 100%          | 0         | 20300/1745               | 18.30         | 17.25                | 0.405                        | 0.873           | 0.026            | 1.27           | 1.112         | /        |
| Right Tilt                                                   | repeated   | 1:1        | 50%           | 25        | 20175/1732.5             | 18.30         | 17.50                | 0.426                        | 0.937           | 0.052            | 1.20           | 1.127         | /        |
| Head SAR (QPSK) Simultaneous with Wi-Fi2.4G/ 5G              |            |            |               |           |                          |               |                      |                              |                 |                  |                |               |          |
| Right Tilt                                                   | standard   | 1:1        | 50%           | 25        | 20175/1732.5             | 15.30         | 14.21                | 0.190                        | 0.411           | 0.090            | 1.29           | 0.528         | /        |
| Body-worn SAR (Body(standalone)-ANT Up)                      |            |            |               |           |                          |               |                      |                              |                 |                  |                |               |          |
| Back Side                                                    | standard   | 1:1        | 1             | 50        | 20300/1745               | 19.80         | 19.35                | 0.120                        | 0.200           | 0.040            | 1.11           | 0.222         | 85       |
| Front Side                                                   | standard   | 1:1        | 1             | 50        | 20300/1745               | 19.80         | 19.35                | 0.095                        | 0.163           | -0.024           | 1.11           | 0.181         | /        |
| Back Side                                                    | standard   | 1:1        | 50%           | 50        | 20175/1732.5             | 19.80         | 19.34                | 0.107                        | 0.184           | 0.100            | 1.11           | 0.205         | /        |
| Front Side                                                   | standard   | 1:1        | 50%           | 50        | 20175/1732.5             | 19.80         | 19.34                | 0.086                        | 0.154           | 0.022            | 1.11           | 0.171         | /        |
| Hotspot SAR(QPSK, Distance 10mm) (Body(WWAN+2.4G/5G)-ANT Up) |            |            |               |           |                          |               |                      |                              |                 |                  |                |               |          |
| Back Side                                                    | standard   | 1:1        | 1             | 50        | 20050/1720               | 19.30         | 18.31                | 0.127                        | 0.232           | 0.059            | 1.26           | 0.291         | /        |
| Front Side                                                   | standard   | 1:1        | 1             | 50        | 20050/1720               | 19.30         | 18.31                | 0.116                        | 0.222           | 0.120            | 1.26           | 0.279         | /        |
| Left Edge                                                    | standard   | 1:1        | 1             | 50        | 20050/1720               | 19.30         | 18.31                | 0.021                        | 0.039           | 0.041            | 1.26           | 0.049         | /        |



## SAR Test Report

Report No.: R2008A0550-S1

|             |          |     |     |     |            |       |       |       |       |       |      |       |     |
|-------------|----------|-----|-----|-----|------------|-------|-------|-------|-------|-------|------|-------|-----|
| Right Edge  | standard | 1:1 | 1   | 50  | 20050/1720 | 19.30 | 18.31 | 0.019 | 0.035 | 0.140 | 1.26 | 0.044 | /   |
| Top Edge    | standard | 1:1 | 1   | 50  | 20050/1720 | 19.30 | 18.31 | 0.246 | 0.526 | 0.190 | 1.26 | 0.661 | /   |
| Bottom Edge | N/A      | N/A | N/A | N/A | N/A        | N/A   | N/A   | N/A   | N/A   | N/A   | N/A  | N/A   | N/A |
| Back Side   | standard | 1:1 | 50% | 0   | 20050/1720 | 19.30 | 18.56 | 0.121 | 0.217 | 0.121 | 1.19 | 0.257 | /   |
| Front Side  | standard | 1:1 | 50% | 0   | 20050/1720 | 19.30 | 18.56 | 0.113 | 0.207 | 0.000 | 1.19 | 0.245 | /   |
| Left Edge   | standard | 1:1 | 50% | 0   | 20050/1720 | 19.30 | 18.56 | 0.018 | 0.021 | 0.174 | 1.19 | 0.025 | /   |
| Right Edge  | standard | 1:1 | 50% | 0   | 20050/1720 | 19.30 | 18.56 | 0.020 | 0.026 | 0.033 | 1.19 | 0.031 | /   |
| Top Edge    | standard | 1:1 | 50% | 0   | 20050/1720 | 19.30 | 18.56 | 0.298 | 0.576 | 0.030 | 1.19 | 0.683 | 86  |
| Bottom Edge | N/A      | N/A | N/A | N/A | N/A        | N/A   | N/A   | N/A   | N/A   | N/A   | N/A  | N/A   | N/A |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are  $\geq$  50% limit(1g).

## Measurement Variability

| Test Position | Channel/ Frequency(MHz) | MAX Measured SAR <sub>1g</sub> (W/kg) | 1 <sup>st</sup> Repeated SAR <sub>1g</sub> (W/kg) | Ratio |
|---------------|-------------------------|---------------------------------------|---------------------------------------------------|-------|
| Right Tilt    | 20175/1732.5            | 0.943                                 | 0.937                                             | 1.01  |

Note: 1) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).

2) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

| Test Position | Mode | Duty Cycle | RB allocation | offset | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Measured SAR <sub>1g</sub> | Scaling Factor | Report SAR <sub>1g</sub> | Need to test |
|---------------|------|------------|---------------|--------|------------------------|---------------|----------------------|----------------------------|----------------|--------------------------|--------------|
| Back Side     | QPSK | 1:1        | 1             | 50     | 20300/1745             | 19.80         | 19.30                | 0.291                      | 1.12           | 0.327                    | no           |
| Front Side    | QPSK | 1:1        | 1             | 50     | 20300/1745             | 19.80         | 19.30                | 0.279                      | 1.12           | 0.313                    | no           |
| Left Edge     | QPSK | 1:1        | 1             | 50     | 20300/1745             | 19.80         | 19.30                | 0.049                      | 1.12           | 0.055                    | no           |
| Right Edge    | QPSK | 1:1        | 1             | 50     | 20300/1745             | 19.80         | 19.30                | 0.044                      | 1.12           | 0.049                    | no           |
| Top Edge      | QPSK | 1:1        | 1             | 50     | 20300/1745             | 19.80         | 19.30                | 0.661                      | 1.12           | 0.741                    | no           |
| Back Side     | QPSK | 1:1        | 50%           | 0      | 20050/1720             | 19.80         | 19.30                | 0.269                      | 1.12           | 0.302                    | no           |
| Front Side    | QPSK | 1:1        | 50%           | 0      | 20050/1720             | 19.80         | 19.30                | 0.257                      | 1.12           | 0.288                    | no           |
| Left Edge     | QPSK | 1:1        | 50%           | 0      | 20050/1720             | 19.80         | 19.30                | 0.026                      | 1.12           | 0.029                    | no           |
| Right Edge    | QPSK | 1:1        | 50%           | 0      | 20050/1720             | 19.80         | 19.30                | 0.032                      | 1.12           | 0.036                    | no           |
| Top Edge      | QPSK | 1:1        | 50%           | 0      | 20050/1720             | 19.80         | 19.30                | 0.715                      | 1.12           | 0.802                    | no           |

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR  $< 1.2$  W/kg, Product Specific 10-g SAR is not required.



Table 31: LTE Band 5 (10MHz, WWAN Antenna Up)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.24                         | 0.358          | 0.140            | 1.15           | 0.412        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.21                         | 0.354          | 0.060            | 1.15           | 0.407        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.29                         | 0.510          | 0.040            | 1.15           | 0.587        | 87       |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.23                         | 0.475          | 0.110            | 1.15           | 0.547        | /        |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.17                         | 0.249          | -0.090           | 1.28           | 0.319        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.14                         | 0.232          | 0.010            | 1.28           | 0.298        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.20                         | 0.343          | 0.110            | 1.28           | 0.440        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.17                         | 0.344          | 0.000            | 1.28           | 0.441        | /        |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.575                        | 0.074          | -0.160           | 1.15           | 0.085        | 88       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.044                        | 0.062          | -0.050           | 1.15           | 0.071        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.035                        | 0.048          | 0.061            | 1.28           | 0.062        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.032                        | 0.046          | 0.036            | 1.28           | 0.059        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.063                        | 0.102          | 0.066            | 1.15           | 0.117        | 89       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.061                        | 0.096          | 0.062            | 1.15           | 0.110        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.029                        | 0.045          | 0.103            | 1.15           | 0.052        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.036                        | 0.055          | 0.116            | 1.15           | 0.063        | /        |
| Top Edge                                                                                                                                    | standard   | 1:1        | 1             | 49        | 20525/836.5                 | 24.30         | 23.69                | 0.054                        | 0.098          | -0.150           | 1.15           | 0.113        | /        |
| Bottom Edge                                                                                                                                 | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.041                        | 0.066          | 0.125            | 1.28           | 0.085        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.039                        | 0.062          | 0.086            | 1.28           | 0.080        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.018                        | 0.032          | 0.063            | 1.28           | 0.041        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.019                        | 0.035          | -0.120           | 1.28           | 0.045        | /        |
| Top Edge                                                                                                                                    | standard   | 1:1        | 50%           | 13        | 20525/836.5                 | 23.30         | 22.22                | 0.032                        | 0.062          | 0.110            | 1.28           | 0.080        | /        |
| Bottom Edge                                                                                                                                 | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                                                              |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 32: LTE Band 7 (20MHz, WWAN Antenna Up)

| Test Position                                                | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|--------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                              |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (head(standalone)-ANT Up)                    |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                   | standard   | 1:1        | 1             | 50        | 21350/2560                  | 15.80         | 15.29                | 0.073                        | 0.130          | -0.100           | 1.12           | 0.146        | /        |
| Left Tilt                                                    | standard   | 1:1        | 1             | 50        | 21350/2560                  | 15.80         | 15.29                | 0.077                        | 0.142          | 0.090            | 1.12           | 0.160        | /        |
| Right Cheek                                                  | standard   | 1:1        | 1             | 50        | 21350/2560                  | 15.80         | 15.29                | 0.149                        | 0.318          | 0.040            | 1.12           | 0.358        | /        |
| Right Tilt                                                   | standard   | 1:1        | 1             | 50        | 21350/2560                  | 15.80         | 15.29                | 0.163                        | 0.376          | -0.010           | 1.12           | 0.423        | 90       |
| Left Cheek                                                   | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 15.80         | 15.29                | 0.070                        | 0.125          | -0.050           | 1.12           | 0.141        | /        |
| Left Tilt                                                    | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 15.80         | 15.29                | 0.008                        | 0.146          | 0.100            | 1.12           | 0.164        | /        |
| Right Cheek                                                  | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 15.80         | 15.29                | 0.150                        | 0.312          | 0.080            | 1.12           | 0.351        | /        |
| Right Tilt                                                   | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 15.80         | 15.29                | 0.160                        | 0.361          | 0.050            | 1.12           | 0.406        | /        |
| Right Tilt                                                   | standard   | 1:1        | 1             | 99        | 20850/2510                  | 15.80         | 15.31                | 0.123                        | 0.298          | 0.028            | 1.12           | 0.334        | /        |
|                                                              |            |            | 1             | 0         | 21048/2529.8                |               |                      |                              |                |                  |                |              |          |
| Body-worn SAR (Body(standalone)-ANT Up)                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                    | standard   | 1:1        | 1             | 50        | 21350/2560                  | 22.80         | 22.53                | 0.110                        | 0.196          | -0.080           | 1.06           | 0.209        | 91       |
| Front Side                                                   | standard   | 1:1        | 1             | 50        | 21350/2560                  | 22.80         | 22.53                | 0.071                        | 0.131          | -0.011           | 1.06           | 0.139        | /        |
| Back Side                                                    | standard   | 1:1        | 50%           | 0         | 21350/2560                  | 22.80         | 22.00                | 0.084                        | 0.154          | 0.038            | 1.20           | 0.185        | /        |
| Front Side                                                   | standard   | 1:1        | 50%           | 0         | 21350/2560                  | 22.80         | 22.00                | 0.070                        | 0.129          | 0.029            | 1.20           | 0.155        | /        |
| Back Side                                                    | standard   | 1:1        | 1             | 99        | 20850/2510                  | 22.80         | 22.38                | 0.063                        | 0.125          | -0.050           | 1.10           | 0.138        | /        |
|                                                              |            |            | 1             | 0         | 21048/2529.8                |               |                      |                              |                |                  |                |              |          |
| Hotspot SAR(QPSK, Distance 10mm) (Body(WWAN+2.4G/5G)-ANT Up) |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                    | standard   | 1:1        | 1             | 50        | 21350/2560                  | 21.80         | 20.48                | 0.165                        | 0.303          | -0.078           | 1.36           | 0.411        | /        |
| Front Side                                                   | standard   | 1:1        | 1             | 50        | 21350/2560                  | 21.80         | 20.48                | 0.139                        | 0.263          | -0.020           | 1.36           | 0.356        | /        |
| Left Edge                                                    | standard   | 1:1        | 1             | 50        | 21350/2560                  | 21.80         | 20.48                | 0.140                        | 0.262          | -0.170           | 1.36           | 0.355        | /        |
| Right Edge                                                   | standard   | 1:1        | 1             | 50        | 21350/2560                  | 21.80         | 20.48                | 0.132                        | 0.249          | 0.052            | 1.36           | 0.337        | /        |
| Top Edge                                                     | standard   | 1:1        | 1             | 50        | 21350/2560                  | 21.80         | 20.48                | 0.159                        | 0.340          | -0.060           | 1.36           | 0.461        | /        |
| Bottom Edge                                                  | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Back Side                                                    | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 21.80         | 20.45                | 0.160                        | 0.301          | 0.020            | 1.36           | 0.411        | /        |
| Front Side                                                   | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 21.80         | 20.45                | 0.136                        | 0.262          | 0.051            | 1.36           | 0.358        | /        |
| Left Edge                                                    | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 21.80         | 20.45                | 0.110                        | 0.201          | 0.010            | 1.36           | 0.274        | /        |
| Right Edge                                                   | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 21.80         | 20.45                | 0.103                        | 0.192          | 0.031            | 1.36           | 0.262        | /        |
| Top Edge                                                     | standard   | 1:1        | 50%           | 25        | 21350/2560                  | 21.80         | 20.45                | 0.152                        | 0.362          | 0.058            | 1.36           | 0.494        | 92       |
| Bottom Edge                                                  | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Top Edge                                                     | standard   | 1:1        | 1             | 99        | 20850/2510                  | 21.80         | 21.34                | 0.125                        | 0.248          | 0.021            | 1.11           | 0.276        | /        |
|                                                              |            |            | 1             | 0         | 21048/2529.8                |               |                      |                              |                |                  |                |              |          |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are ≥



50% limit(1g).

| Test Position | Mode | Duty Cycle | RB allocation | offset | Channel Frequency(MHz) | Tune-up (dBm) | Measured power (dBm) | Measured SAR1g | Scaling Factor | Report SAR1g | Need to test |
|---------------|------|------------|---------------|--------|------------------------|---------------|----------------------|----------------|----------------|--------------|--------------|
| Back Side     | QPSK | 1:1        | 1             | 50     | 21350/2560             | 22.80         | 21.80                | 0.411          | 1.26           | 0.517        | no           |
| Front Side    | QPSK | 1:1        | 1             | 50     | 21350/2560             | 22.80         | 21.80                | 0.356          | 1.26           | 0.449        | no           |
| Left Edge     | QPSK | 1:1        | 1             | 50     | 21350/2560             | 22.80         | 21.80                | 0.355          | 1.26           | 0.447        | no           |
| Right Edge    | QPSK | 1:1        | 1             | 50     | 21350/2560             | 22.80         | 21.80                | 0.337          | 1.26           | 0.425        | no           |
| Top Edge      | QPSK | 1:1        | 1             | 50     | 21350/2560             | 22.80         | 21.80                | 0.461          | 1.26           | 0.580        | no           |
| Back Side     | QPSK | 1:1        | 50%           | 25     | 21350/2560             | 22.80         | 21.80                | 0.411          | 1.26           | 0.517        | no           |
| Front Side    | QPSK | 1:1        | 50%           | 25     | 21350/2560             | 22.80         | 21.80                | 0.358          | 1.26           | 0.450        | no           |
| Left Edge     | QPSK | 1:1        | 50%           | 25     | 21350/2560             | 22.80         | 21.80                | 0.274          | 1.26           | 0.345        | no           |
| Right Edge    | QPSK | 1:1        | 50%           | 25     | 21350/2560             | 22.80         | 21.80                | 0.262          | 1.26           | 0.330        | no           |
| Top Edge      | QPSK | 1:1        | 50%           | 25     | 21350/2560             | 22.80         | 21.80                | 0.494          | 1.26           | 0.622        | no           |

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Table 33: LTE Band 12 (10MHz, WWAN Antenna Up)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.029                        | 0.047          | -0.046           | 1.21           | 0.056        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.023                        | 0.043          | 0.020            | 1.21           | 0.051        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.028                        | 0.035          | 0.171            | 1.21           | 0.042        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.018                        | 0.023          | 0.048            | 1.21           | 0.027        | /        |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.022                        | 0.035          | 0.110            | 1.36           | 0.047        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.020                        | 0.037          | 0.034            | 1.36           | 0.051        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.029                        | 0.054          | 0.120            | 1.36           | 0.074        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.028                        | 0.060          | 0.100            | 1.36           | 0.082        | 93       |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.007                        | 0.010          | -0.020           | 1.21           | 0.012        | 94       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.003                        | 0.006          | 0.000            | 1.21           | 0.007        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.002                        | 0.005          | 0.099            | 1.36           | 0.007        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.001                        | 0.003          | 0.000            | 1.36           | 0.004        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.012                        | 0.019          | 0.071            | 1.21           | 0.022        | 95       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.004                        | 0.011          | 0.035            | 1.21           | 0.013        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.002                        | 0.006          | 0.000            | 1.21           | 0.007        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.001                        | 0.003          | 0.010            | 1.21           | 0.004        | /        |
| Top Edge                                                                                                                                    | standard   | 1:1        | 1             | 49        | 23130/711                   | 23.80         | 22.99                | 0.003                        | 0.009          | 0.092            | 1.21           | 0.011        | /        |
| Bottom Edge                                                                                                                                 | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.007                        | 0.010          | 0.000            | 1.36           | 0.014        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.002                        | 0.006          | 0.080            | 1.36           | 0.008        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.001                        | 0.002          | -0.099           | 1.36           | 0.003        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.001                        | 0.001          | 0.000            | 1.36           | 0.001        | /        |
| Top Edge                                                                                                                                    | standard   | 1:1        | 50%           | 13        | 23060/704                   | 22.80         | 21.46                | 0.001                        | 0.003          | 0.000            | 1.36           | 0.004        | /        |
| Bottom Edge                                                                                                                                 | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                                                              |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 34: LTE Band 17 (10MHz, WWAN Antenna Up)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.028                        | 0.044          | -0.060           | 1.20           | 0.052        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.026                        | 0.048          | 0.100            | 1.20           | 0.057        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.032                        | 0.058          | 0.040            | 1.20           | 0.070        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.034                        | 0.073          | 0.130            | 1.20           | 0.087        | 96       |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.025                        | 0.042          | 0.000            | 1.34           | 0.056        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.022                        | 0.041          | 0.130            | 1.34           | 0.055        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.032                        | 0.058          | 0.070            | 1.34           | 0.078        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.031                        | 0.067          | -0.020           | 1.34           | 0.090        | /        |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.006                        | 0.010          | 0.075            | 1.20           | 0.012        | 97       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.004                        | 0.008          | 0.010            | 1.20           | 0.010        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.001                        | 0.004          | 0.000            | 1.34           | 0.005        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.001                        | 0.002          | 0.099            | 1.34           | 0.003        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.011                        | 0.018          | 0.074            | 1.20           | 0.022        | 98       |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.005                        | 0.013          | 0.099            | 1.20           | 0.016        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.002                        | 0.004          | 0.060            | 1.20           | 0.005        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.001                        | 0.001          | -0.011           | 1.20           | 0.001        | /        |
| Top Edge                                                                                                                                    | standard   | 1:1        | 1             | 0         | 23800/711                   | 23.80         | 23.01                | 0.002                        | 0.005          | 0.080            | 1.20           | 0.006        | /        |
| Bottom Edge                                                                                                                                 | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.004                        | 0.009          | 0.000            | 1.34           | 0.012        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.003                        | 0.007          | 0.060            | 1.34           | 0.009        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.001                        | 0.001          | 0.000            | 1.34           | 0.001        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.001                        | 0.001          | 0.099            | 1.34           | 0.001        | /        |
| Top Edge                                                                                                                                    | standard   | 1:1        | 50%           | 13        | 23800/711                   | 22.80         | 21.52                | 0.001                        | 0.002          | 0.000            | 1.34           | 0.003        | /        |
| Bottom Edge                                                                                                                                 | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                                                              |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 35: LTE Band 26 (15MHz, WWAN Antenna Up)

| Test Position                                                                                                                               | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                                                                                                                             |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (FULL)                                                                                                                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.240                        | 0.368          | 0.020            | 1.15           | 0.424        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.206                        | 0.343          | 0.020            | 1.15           | 0.396        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.254                        | 0.434          | 0.040            | 1.15           | 0.501        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.246                        | 0.499          | 0.070            | 1.15           | 0.576        | 99       |
| Left Cheek                                                                                                                                  | standard   | 1:1        | 50%           | 0         | 26765/821.5                 | 23.30         | 22.10                | 0.118                        | 0.174          | 0.060            | 1.32           | 0.229        | /        |
| Left Tilt                                                                                                                                   | standard   | 1:1        | 50%           | 0         | 26765/821.5                 | 23.30         | 22.10                | 0.098                        | 0.161          | 0.020            | 1.32           | 0.212        | /        |
| Right Cheek                                                                                                                                 | standard   | 1:1        | 50%           | 0         | 26765/821.5                 | 23.30         | 22.10                | 0.140                        | 0.240          | 0.120            | 1.32           | 0.316        | /        |
| Right Tilt                                                                                                                                  | standard   | 1:1        | 50%           | 0         | 26765/821.5                 | 23.30         | 22.10                | 0.113                        | 0.230          | 0.090            | 1.32           | 0.303        | /        |
| Body-worn SAR (FULL)                                                                                                                        |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.048                        | 0.062          | 0.050            | 1.15           | 0.071        | 100      |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.042                        | 0.057          | 0.016            | 1.15           | 0.066        | /        |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.034                        | 0.049          | -0.060           | 1.32           | 0.065        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.031                        | 0.046          | 0.038            | 1.32           | 0.061        | /        |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)                                                                                                     |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                                                                                                                   | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.062                        | 0.099          | 0.160            | 1.15           | 0.114        | 101      |
| Front Side                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.061                        | 0.096          | 0.022            | 1.15           | 0.111        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.015                        | 0.038          | 0.038            | 1.15           | 0.044        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.046                        | 0.070          | -0.010           | 1.15           | 0.081        | /        |
| Top Edge                                                                                                                                    | standard   | 1:1        | 1             | 38        | 26965/841.5                 | 24.30         | 23.68                | 0.047                        | 0.086          | 0.016            | 1.15           | 0.099        | /        |
| Bottom Edge                                                                                                                                 | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Back Side                                                                                                                                   | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.038                        | 0.055          | 0.050            | 1.32           | 0.073        | /        |
| Front Side                                                                                                                                  | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.029                        | 0.045          | 0.087            | 1.32           | 0.059        | /        |
| Left Edge                                                                                                                                   | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.004                        | 0.012          | 0.032            | 1.32           | 0.016        | /        |
| Right Edge                                                                                                                                  | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.021                        | 0.058          | 0.011            | 1.32           | 0.076        | /        |
| Top Edge                                                                                                                                    | standard   | 1:1        | 50%           | 18        | 26765/821.5                 | 23.30         | 22.10                | 0.029                        | 0.062          | 0.026            | 1.32           | 0.082        | /        |
| Bottom Edge                                                                                                                                 | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                                                              |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g). |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |



Table 36: LTE Band 38 (20MHz, WWAN Antenna Up)

| Test Position                             | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                 |               | Plot No. |
|-------------------------------------------|------------|------------|---------------|-----------|--------------------------|---------------|----------------------|------------------------------|-----------------|------------------|-----------------|---------------|----------|
|                                           |            |            |               |           |                          |               |                      | Measure d SAR10g             | Measur ed SAR1g | Power Drift (dB) | Scalin g Factor | Report SAR1 g |          |
| Head SAR (QPSK) (head(standalone)-ANT Up) |            |            |               |           |                          |               |                      |                              |                 |                  |                 |               |          |
| Left Cheek                                | standard   | 1:1.58     | 1             | 50        | 38000/2595               | 20.80         | 20.03                | 0.121                        | 0.242           | -0.050           | 1.19            | 0.289         | /        |
| Left Tilt                                 | standard   | 1:1.58     | 1             | 50        | 38000/2595               | 20.80         | 20.03                | 0.113                        | 0.228           | 0.110            | 1.19            | 0.272         | /        |
| Right Cheek                               | standard   | 1:1.58     | 1             | 50        | 38000/2595               | 20.80         | 20.03                | 0.251                        | 0.528           | -0.030           | 1.19            | 0.630         | /        |
| Right Tilt                                | standard   | 1:1.58     | 1             | 50        | 38000/2595               | 20.80         | 20.03                | 0.285                        | 0.644           | 0.020            | 1.19            | 0.769         | 102      |
| Left Cheek                                | standard   | 1:1.58     | 50%           | 25        | 38000/2595               | 20.80         | 19.99                | 0.123                        | 0.246           | -0.070           | 1.21            | 0.296         | /        |
| Left Tilt                                 | standard   | 1:1.58     | 50%           | 25        | 38000/2595               | 20.80         | 19.99                | 0.120                        | 0.237           | -0.100           | 1.21            | 0.286         | /        |
| Right Cheek                               | standard   | 1:1.58     | 50%           | 25        | 38000/2595               | 20.80         | 19.99                | 0.258                        | 0.543           | 0.100            | 1.21            | 0.654         | /        |
| Right Tilt                                | standard   | 1:1.58     | 50%           | 50        | 38000/2595               | 20.80         | 19.99                | 0.249                        | 0.574           | 0.090            | 1.21            | 0.692         | /        |
| Right Tilt                                | standard   | 1:1.58     | 1             | 0         | 38150/2610               | 20.80         | 19.83                | 0.185                        | 0.476           | 0.012            | 1.25            | 0.595         | /        |
|                                           |            |            | 1             | 99        | 37952/2590.2             |               |                      |                              |                 |                  |                 |               |          |
| Body-worn SAR (FULL)                      |            |            |               |           |                          |               |                      |                              |                 |                  |                 |               |          |
| Back Side                                 | standard   | 1:1.58     | 1             | 50        | 38150/2610               | 23.80         | 23.30                | 0.116                        | 0.206           | 0.027            | 1.12            | 0.231         | 103      |
| Front Side                                | standard   | 1:1.58     | 1             | 50        | 38150/2610               | 23.80         | 23.30                | 0.065                        | 0.137           | -0.060           | 1.12            | 0.154         | /        |
| Back Side                                 | standard   | 1:1.58     | 50%           | 25        | 38150/2610               | 22.80         | 21.64                | 0.085                        | 0.172           | 0.010            | 1.31            | 0.225         | /        |
| Front Side                                | standard   | 1:1.58     | 50%           | 25        | 38150/2610               | 22.80         | 21.64                | 0.041                        | 0.089           | 0.043            | 1.31            | 0.116         | /        |
| Back Side                                 | standard   | 1:1.58     | 1             | 0         | 38150/2610               | 23.80         | 23.53                | 0.058                        | 0.129           | 0.033            | 1.06            | 0.137         | /        |
|                                           |            |            | 1             | 99        | 37952/2590.2             |               |                      |                              |                 |                  |                 |               |          |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)   |            |            |               |           |                          |               |                      |                              |                 |                  |                 |               |          |
| Back Side                                 | standard   | 1:1.58     | 1             | 50        | 38150/2610               | 23.80         | 23.30                | 0.172                        | 0.365           | -0.063           | 1.12            | 0.410         | 104      |
| Front Side                                | standard   | 1:1.58     | 1             | 50        | 38150/2610               | 23.80         | 23.30                | 0.107                        | 0.231           | 0.020            | 1.12            | 0.259         | /        |
| Left Edge                                 | standard   | 1:1.58     | 1             | 50        | 38150/2610               | 23.80         | 23.30                | 0.061                        | 0.215           | -0.010           | 1.12            | 0.241         | /        |
| Right Edge                                | standard   | 1:1.58     | 1             | 50        | 38150/2610               | 23.80         | 23.30                | 0.018                        | 0.046           | 0.025            | 1.12            | 0.052         | /        |
| Top Edge                                  | standard   | 1:1.58     | 1             | 50        | 38150/2610               | 23.80         | 23.30                | 0.133                        | 0.303           | 0.190            | 1.12            | 0.340         | /        |
| Bottom Edge                               | N/A        | N/A        | N/A           | N/A       | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A             | N/A           | N/A      |
| Back Side                                 | standard   | 1:1.58     | 50%           | 25        | 38150/2610               | 22.80         | 21.64                | 0.142                        | 0.312           | 0.051            | 1.31            | 0.408         | /        |
| Front Side                                | standard   | 1:1.58     | 50%           | 25        | 38150/2610               | 22.80         | 21.64                | 0.062                        | 0.179           | 0.042            | 1.31            | 0.234         | /        |
| Left Edge                                 | standard   | 1:1.58     | 50%           | 25        | 38150/2610               | 22.80         | 21.64                | 0.059                        | 0.151           | -0.080           | 1.31            | 0.197         | /        |
| Right Edge                                | standard   | 1:1.58     | 50%           | 25        | 38150/2610               | 22.80         | 21.64                | 0.013                        | 0.032           | 0.016            | 1.31            | 0.042         | /        |
| Top Edge                                  | standard   | 1:1.58     | 50%           | 25        | 38150/2610               | 22.80         | 21.64                | 0.113                        | 0.268           | 0.020            | 1.31            | 0.350         | /        |
| Bottom Edge                               | N/A        | N/A        | N/A           | N/A       | N/A                      | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A             | N/A           | N/A      |
| Back Side                                 | standard   | 1:1.58     | 1             | 0         | 38150/2610               | 23.80         | 23.53                | 0.143                        | 0.328           | 0.065            | 1.06            | 0.349         | /        |
|                                           |            |            | 1             | 99        | 37952/2590.2             |               |                      |                              |                 |                  |                 |               |          |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are  $\geq$  50% limit(1g).



Table 37: LTE Band 41 (20MHz, WWAN Antenna Up)

| Test Position                             | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |              | Plot No. |
|-------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|----------------|------------------|----------------|--------------|----------|
|                                           |            |            |               |           |                             |               |                      | Measured SAR10g              | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g |          |
| Head SAR (QPSK) (head(standalone)-ANT Up) |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Left Cheek                                | standard   | 1:1.58     | 1             | 50        | 40185/2549.5                | 20.80         | 19.58                | 0.146                        | 0.289          | 0.000            | 1.32           | 0.383        | /        |
| Left Tilt                                 | standard   | 1:1.58     | 1             | 50        | 40185/2549.5                | 20.80         | 19.58                | 0.138                        | 0.292          | -0.030           | 1.32           | 0.387        | /        |
| Right Cheek                               | standard   | 1:1.58     | 1             | 50        | 40185/2549.5                | 20.80         | 19.58                | 0.192                        | 0.457          | 0.021            | 1.32           | 0.605        | /        |
| Right Tilt                                | standard   | 1:1.58     | 1             | 50        | 39750/2506                  | 20.80         | 19.42                | 0.239                        | 0.518          | 0.039            | 1.37           | 0.712        | /        |
|                                           | standard   | 1:1.58     | 1             | 50        | 40185/2549.5                | 20.80         | 19.58                | 0.285                        | 0.656          | 0.070            | 1.32           | 0.869        | 105      |
|                                           | standard   | 1:1.58     | 1             | 50        | 40620/2593                  | 20.80         | 19.53                | 0.241                        | 0.539          | 0.062            | 1.34           | 0.722        | /        |
|                                           | standard   | 1:1.58     | 1             | 0         | 41055/2636.5                | 20.80         | 19.57                | 0.190                        | 0.438          | 0.110            | 1.33           | 0.581        | /        |
|                                           | standard   | 1:1.58     | 1             | 50        | 41490/2680                  | 20.80         | 19.54                | 0.161                        | 0.369          | 0.080            | 1.34           | 0.493        | /        |
| Left Cheek                                | standard   | 1:1.58     | 50%           | 25        | 41055/2636.5                | 20.80         | 19.59                | 0.106                        | 0.206          | -0.020           | 1.32           | 0.272        | /        |
| Left Tilt                                 | standard   | 1:1.58     | 50%           | 25        | 41055/2636.5                | 20.80         | 19.59                | 0.094                        | 0.187          | 0.090            | 1.32           | 0.247        | /        |
| Right Cheek                               | standard   | 1:1.58     | 50%           | 25        | 41055/2636.5                | 20.80         | 19.59                | 0.245                        | 0.475          | 0.060            | 1.32           | 0.628        | /        |
| Right Tilt                                | standard   | 1:1.58     | 50%           | 25        | 41055/2636.5                | 20.80         | 19.59                | 0.215                        | 0.469          | 0.055            | 1.32           | 0.620        | /        |
| Right Tilt                                | standard   | 1:1.58     | 100%          | 0         | 40620/2593                  | 20.80         | 19.47                | 0.226                        | 0.498          | 0.000            | 1.36           | 0.676        | /        |
| Right Tilt                                | repeated   | 1:1.58     | 1             | 50        | 40185/2549.5                | 20.80         | 19.58                | 0.279                        | 0.651          | 0.090            | 1.32           | 0.862        | /        |
| Right Tilt                                | standard   | 1:1.58     | 1             | 0         | 41490/2680                  | 20.80         | 19.71                | 0.241                        | 0.548          | 0.024            | 1.29           | 0.704        | /        |
|                                           |            |            | 1             | 99        | 41292/2660.2                |               |                      |                              |                |                  |                |              |          |
| Body-worn SAR (FULL)                      |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                 | standard   | 1:1.58     | 1             | 50        | 40620/2593                  | 23.80         | 23.14                | 0.084                        | 0.165          | -0.106           | 1.16           | 0.192        | 106      |
| Front Side                                | standard   | 1:1.58     | 1             | 50        | 40620/2593                  | 23.80         | 23.14                | 0.049                        | 0.106          | 0.025            | 1.16           | 0.123        | /        |
| Back Side                                 | standard   | 1:1.58     | 50%           | 50        | 40620/2593                  | 22.80         | 21.61                | 0.054                        | 0.123          | 0.030            | 1.32           | 0.162        | /        |
| Front Side                                | standard   | 1:1.58     | 50%           | 50        | 40620/2593                  | 22.80         | 21.61                | 0.038                        | 0.072          | -0.062           | 1.32           | 0.095        | /        |
| Back Side                                 | standard   | 1:1.58     | 1             | 0         | 41490/2680                  | 23.80         | 23.53                | 0.043                        | 0.098          | 0.055            | 1.06           | 0.104        | /        |
|                                           |            |            | 1             | 99        | 41292/2660.2                |               |                      |                              |                |                  |                |              |          |
| Hotspot SAR(QPSK, Distance 10mm) (FULL)   |            |            |               |           |                             |               |                      |                              |                |                  |                |              |          |
| Back Side                                 | standard   | 1:1.58     | 1             | 50        | 40620/2593                  | 23.80         | 23.14                | 0.191                        | 0.397          | 0.021            | 1.16           | 0.462        | 107      |
| Front Side                                | standard   | 1:1.58     | 1             | 50        | 40620/2593                  | 23.80         | 23.14                | 0.075                        | 0.144          | -0.090           | 1.16           | 0.168        | /        |
| Left Edge                                 | standard   | 1:1.58     | 1             | 50        | 40620/2593                  | 23.80         | 23.14                | 0.077                        | 0.146          | 0.024            | 1.16           | 0.170        | /        |
| Right Edge                                | standard   | 1:1.58     | 1             | 50        | 40620/2593                  | 23.80         | 23.14                | 0.007                        | 0.029          | 0.061            | 1.16           | 0.034        | /        |
| Top Edge                                  | standard   | 1:1.58     | 1             | 50        | 40620/2593                  | 23.80         | 23.14                | 0.089                        | 0.229          | 0.052            | 1.16           | 0.267        | /        |
| Bottom Edge                               | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A          | N/A      |
| Back Side                                 | standard   | 1:1.58     | 50%           | 50        | 40620/2593                  | 22.80         | 21.61                | 0.164                        | 0.301          | 0.029            | 1.32           | 0.396        | /        |
| Front Side                                | standard   | 1:1.58     | 50%           | 50        | 40620/2593                  | 22.80         | 21.61                | 0.051                        | 0.098          | 0.041            | 1.32           | 0.129        | /        |
| Left Edge                                 | standard   | 1:1.58     | 50%           | 50        | 40620/2593                  | 22.80         | 21.61                | 0.047                        | 0.087          | 0.022            | 1.32           | 0.114        | /        |

**SAR Test Report****Report No.: R2008A0550-S1**

|             |          |        |     |     |              |       |       |       |       |        |      |       |     |
|-------------|----------|--------|-----|-----|--------------|-------|-------|-------|-------|--------|------|-------|-----|
| Right Edge  | standard | 1:1.58 | 50% | 50  | 40620/2593   | 22.80 | 21.61 | 0.008 | 0.032 | -0.090 | 1.32 | 0.042 | /   |
| Top Edge    | standard | 1:1.58 | 50% | 50  | 40620/2593   | 22.80 | 21.61 | 0.053 | 0.108 | 0.047  | 1.32 | 0.142 | /   |
| Bottom Edge | N/A      | N/A    | N/A | N/A | N/A          | N/A   | N/A   | N/A   | N/A   | N/A    | N/A  | N/A   | N/A |
| Back Side   | standard | 1:1.58 | 1   | 0   | 41490/2680   | 23.80 | 23.53 | 0.098 | 0.257 | -0.032 | 1.06 | 0.273 | /   |
|             |          |        | 1   | 99  | 41292/2660.2 |       |       |       |       |        |      |       |     |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are  $\geq$  50% limit(1g).



Table 38: LTE Band 66 (20MHz, WWAN Antenna Down)

| Test Position                                              | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/<br>Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                 |                  |                |               | Plot No. |
|------------------------------------------------------------|------------|------------|---------------|-----------|-----------------------------|---------------|----------------------|------------------------------|-----------------|------------------|----------------|---------------|----------|
|                                                            |            |            |               |           |                             |               |                      | Measured SAR10 g             | Measured SAR1 g | Power Drift (dB) | Scaling Factor | Report SAR1 g |          |
| Head SAR (QPSK) (head(standalone)-ANT Up)                  |            |            |               |           |                             |               |                      |                              |                 |                  |                |               |          |
| Left Cheek                                                 | standard   | 1:1        | 1             | 50        | 132322/1745                 | 17.60         | 16.52                | 0.199                        | 0.390           | -0.100           | 1.28           | 0.500         | /        |
| Left Tilt                                                  | standard   | 1:1        | 1             | 50        | 132322/1745                 | 17.60         | 16.52                | 0.282                        | 0.569           | 0.000            | 1.28           | 0.730         | /        |
| Right Cheek                                                | standard   | 1:1        | 1             | 50        | 132322/1745                 | 17.60         | 16.52                | 0.275                        | 0.586           | 0.015            | 1.28           | 0.751         | /        |
| Right Tilt                                                 | standard   | 1:1        | 1             | 50        | 132072/1720                 | 17.60         | 16.40                | 0.308                        | 0.663           | 0.120            | 1.32           | 0.874         | /        |
|                                                            | standard   | 1:1        | 1             | 50        | 132322/1745                 | 17.60         | 16.52                | 0.348                        | 0.752           | -0.020           | 1.28           | 0.964         | /        |
|                                                            | standard   | 1:1        | 1             | 50        | 132572/1770                 | 17.60         | 16.51                | 0.359                        | 0.799           | -0.010           | 1.29           | 1.027         | 108      |
| Left Cheek                                                 | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 17.60         | 16.55                | 0.195                        | 0.381           | 0.051            | 1.27           | 0.485         | /        |
| Left Tilt                                                  | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 17.60         | 16.55                | 0.281                        | 0.569           | 0.160            | 1.27           | 0.725         | /        |
| Right Cheek                                                | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 17.60         | 16.55                | 0.241                        | 0.514           | -0.030           | 1.27           | 0.655         | /        |
| Right Tilt                                                 | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 17.60         | 16.55                | 0.310                        | 0.672           | 0.030            | 1.27           | 0.856         | /        |
|                                                            | standard   | 1:1        | 50%           | 25        | 132322/1745                 | 17.60         | 16.49                | 0.356                        | 0.779           | -0.020           | 1.29           | 1.006         | /        |
|                                                            | standard   | 1:1        | 50%           | 25        | 132572/1770                 | 17.60         | 16.44                | 0.344                        | 0.758           | -0.030           | 1.31           | 0.990         | /        |
| Right Tilt                                                 | standard   | 1:1        | 100%          | 0         | 132072/1720                 | 17.60         | 16.56                | 0.346                        | 0.748           | -0.030           | 1.27           | 0.950         | /        |
|                                                            | standard   | 1:1        | 100%          | 0         | 132322/1745                 | 17.60         | 16.37                | 0.349                        | 0.766           | 0.020            | 1.33           | 1.017         | /        |
|                                                            | standard   | 1:1        | 100%          | 0         | 132572/1770                 | 17.60         | 16.29                | 0.327                        | 0.709           | 0.020            | 1.35           | 0.959         | /        |
| Right Tilt                                                 | repeated   | 1:1        | 1             | 50        | 132572/1770                 | 17.60         | 16.51                | 0.355                        | 0.792           | 0.060            | 1.29           | 1.018         | /        |
| Body-worn SAR (Body(standalone)-ANT Up)                    |            |            |               |           |                             |               |                      |                              |                 |                  |                |               |          |
| Back Side                                                  | standard   | 1:1        | 1             | 50        | 132322/1745                 | 20.10         | 19.67                | 0.103                        | 0.173           | 0.060            | 1.10           | 0.191         | 109      |
| Front Side                                                 | standard   | 1:1        | 1             | 50        | 132322/1745                 | 20.10         | 19.67                | 0.082                        | 0.144           | 0.021            | 1.10           | 0.159         | /        |
| Back Side                                                  | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 20.10         | 19.70                | 0.091                        | 0.156           | 0.019            | 1.10           | 0.171         | /        |
| Front Side                                                 | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 20.10         | 19.70                | 0.081                        | 0.142           | 0.052            | 1.10           | 0.156         | /        |
| Hotspot SAR(QPSK, Distance 10mm) (Body(standalone)-ANT Up) |            |            |               |           |                             |               |                      |                              |                 |                  |                |               |          |
| Back Side                                                  | standard   | 1:1        | 1             | 50        | 132322/1745                 | 20.10         | 19.67                | 0.170                        | 0.307           | 0.012            | 1.10           | 0.339         | /        |
| Front Side                                                 | standard   | 1:1        | 1             | 50        | 132322/1745                 | 20.10         | 19.67                | 0.152                        | 0.293           | 0.035            | 1.10           | 0.323         | /        |
| Left Edge                                                  | standard   | 1:1        | 1             | 0         | 132322/1745                 | 20.10         | 19.67                | 0.027                        | 0.046           | 0.044            | 1.10           | 0.051         | /        |
| Right Edge                                                 | standard   | 1:1        | 1             | 0         | 132322/1745                 | 20.10         | 19.67                | 0.021                        | 0.038           | -0.080           | 1.10           | 0.042         | /        |
| Top Edge                                                   | standard   | 1:1        | 1             | 50        | 132322/1745                 | 20.10         | 19.67                | 0.282                        | 0.548           | -0.050           | 1.10           | 0.605         | 110      |
| Bottom Edge                                                | N/A        | N/A        | N/A           | N/A       | N/A                         | N/A           | N/A                  | N/A                          | N/A             | N/A              | N/A            | N/A           | N/A      |
| Back Side                                                  | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 20.10         | 19.70                | 0.167                        | 0.303           | 0.063            | 1.10           | 0.332         | /        |
| Front Side                                                 | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 20.10         | 19.70                | 0.152                        | 0.280           | 0.024            | 1.10           | 0.307         | /        |
| Left Edge                                                  | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 20.10         | 19.70                | 0.025                        | 0.043           | -0.055           | 1.10           | 0.047         | /        |
| Right Edge                                                 | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 20.10         | 19.70                | 0.014                        | 0.021           | 0.060            | 1.10           | 0.023         | /        |
| Top Edge                                                   | standard   | 1:1        | 50%           | 0         | 132072/1720                 | 20.10         | 19.70                | 0.257                        | 0.515           | 0.180            | 1.10           | 0.565         | /        |



|                                                                                                                                                                                                                                                            |     |     |     |     |     |     |     |     |     |     |     |     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bottom Edge                                                                                                                                                                                                                                                | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| <p>Note: 1. The value with blue color is the maximum SAR Value of each test band.</p> <p>2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are <math>\geq</math> 50% limit(1g).</p> |     |     |     |     |     |     |     |     |     |     |     |     |



Table 39: Wi-Fi (2.4G)

| Test Position                                                                  | Cover Type | Mode 802.11b | Duty Cycle | Channel/ Frequency (MHz) | Tune-up dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |               | Plot No. |
|--------------------------------------------------------------------------------|------------|--------------|------------|--------------------------|--------------|----------------------|------------------------------|----------------|------------------|----------------|---------------|----------|
|                                                                                |            |              |            |                          |              |                      | Measured SAR10g              | Measure dSAR1g | Power Drift (dB) | Scaling Factor | Report SAR 1g |          |
| Head SAR(WLAN-L1)                                                              |            |              |            |                          |              |                      |                              |                |                  |                |               |          |
| Left Cheek                                                                     | standard   | DSSS         | 99.2%      | 6/2437                   | 16.00        | 15.60                | 0.299                        | 0.648          | -0.180           | 1.11           | 0.716         | 111      |
| Left Tilt                                                                      | standard   | DSSS         | 99.2%      | 6/2437                   | 16.00        | 15.60                | 0.237                        | 0.573          | -0.020           | 1.11           | 0.634         | /        |
| Right Cheek                                                                    | standard   | DSSS         | 99.2%      | 6/2437                   | 16.00        | 15.60                | 0.165                        | 0.317          | -0.130           | 1.11           | 0.350         | /        |
| Right Tilt                                                                     | standard   | DSSS         | 99.2%      | 6/2437                   | 16.00        | 15.60                | 0.125                        | 0.250          | 0.110            | 1.11           | 0.276         | /        |
| Body-worn SAR (Distance 15mm) (WLAN)                                           |            |              |            |                          |              |                      |                              |                |                  |                |               |          |
| Back Side                                                                      | standard   | DSSS         | 99.2%      | 6/2437                   | 20.00        | 18.05                | 0.065                        | 0.132          | 0.020            | 1.58           | 0.209         | /        |
| Front Side                                                                     | standard   | DSSS         | 99.2%      | 6/2437                   | 20.00        | 18.05                | 0.085                        | 0.155          | -0.140           | 1.58           | 0.245         | 112      |
| Hotspot SAR(Distance 10mm)( WLAN-L2&4)                                         |            |              |            |                          |              |                      |                              |                |                  |                |               |          |
| Back Side                                                                      | standard   | DSSS         | 99.2%      | 6/2437                   | 14.50        | 13.66                | 0.054                        | 0.098          | -0.020           | 1.22           | 0.120         | /        |
| Front Side                                                                     | standard   | DSSS         | 99.2%      | 6/2437                   | 14.50        | 13.66                | 0.057                        | 0.102          | 0.014            | 1.22           | 0.125         | /        |
| Left Edge                                                                      | standard   | DSSS         | 99.2%      | 6/2437                   | 14.50        | 13.66                | 0.006                        | 0.025          | 0.022            | 1.22           | 0.031         | N/A      |
| Right Edge                                                                     | standard   | DSSS         | 99.2%      | 6/2437                   | 14.50        | 13.66                | 0.040                        | 0.074          | 0.157            | 1.22           | 0.091         | /        |
| Top Edge                                                                       | standard   | DSSS         | 99.2%      | 6/2437                   | 14.50        | 13.66                | 0.063                        | 0.129          | -0.011           | 1.22           | 0.158         | 113      |
| Bottom Edge                                                                    | N/A        | N/A          | N/A        | N/A                      | N/A          | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A           | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band. |            |              |            |                          |              |                      |                              |                |                  |                |               |          |

| MAX Adjusted SAR                                                                                                                                                                      |               |                          |                                       |                             |                     |                |                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------|---------------------------------------|-----------------------------|---------------------|----------------|-----------------------------------|
| Mode                                                                                                                                                                                  | Test Position | Channel/ Frequency (MHz) | MAX Reported SAR <sub>1g</sub> (W/kg) | 802.11b Tune-up limit (dBm) | Tune-up limit (dBm) | Scaling Factor | Adjusted SAR <sub>1g</sub> (W/kg) |
| 802.11g                                                                                                                                                                               | Left Cheek    | 6/2437                   | 0.716                                 | 16.00                       | 15.50               | 0.89           | 0.638                             |
| 802.11n HT20                                                                                                                                                                          | Left Cheek    | 6/2437                   | 0.716                                 | 16.00                       | 15.50               | 0.89           | 0.638                             |
| Note: SAR is not required for OFDM when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. |               |                          |                                       |                             |                     |                |                                   |



Table 40: Wi-Fi (5G,U-NII-1)

| Test Position                                                                                     | Cover Type | Mode | Duty Cycle | Channel/ Frequency (MHz) | Tune-up dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |               | Plot No. |
|---------------------------------------------------------------------------------------------------|------------|------|------------|--------------------------|--------------|----------------------|------------------------------|----------------|------------------|----------------|---------------|----------|
|                                                                                                   |            |      |            |                          |              |                      | Measured SAR10g              | Measure dSAR1g | Power Drift (dB) | Scaling Factor | Report SAR 1g |          |
| Head SAR(WLAN-L4) 802.11n-HT40                                                                    |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Left Cheek                                                                                        | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.154                        | 0.543          | 0.157            | 1.10           | 0.596         | /        |
| Left Tilt                                                                                         | standard   | OFDM | 93.5%      | 38/5190                  | 14.50        | 13.63                | 0.170                        | 0.645          | -0.034           | 1.31           | 0.843         | /        |
|                                                                                                   | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.203                        | 0.767          | -0.100           | 1.10           | 0.841         | 114      |
| Right Cheek                                                                                       | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.157                        | 0.526          | 0.064            | 1.10           | 0.577         | /        |
| Right Tilt                                                                                        | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.159                        | 0.492          | 0.051            | 1.10           | 0.540         | /        |
| Head SAR(WLAN-L2) Simultaneous with WWAN 802.11ac-VHT80                                           |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Left Tilt                                                                                         | standard   | OFDM | 88.1%      | 42/5210                  | 12.50        | 11.98                | 0.076                        | 0.265          | -0.140           | 1.28           | 0.339         | /        |
| Right Tilt                                                                                        | standard   | OFDM | 88.1%      | 42/5210                  | 12.50        | 11.98                | 0.095                        | 0.285          | 0.189            | 1.28           | 0.365         | /        |
| Body-worn SAR (Distance 15mm) (WLAN 1)802.11ac-VHT20                                              |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Back Side                                                                                         | standard   | OFDM | 95.3%      | 36/5180                  | 17.00        | 16.75                | 0.345                        | 0.858          | -0.195           | 1.11           | 0.954         | 115      |
|                                                                                                   | standard   | OFDM | 95.3%      | 44/5220                  | 17.00        | 16.67                | 0.324                        | 0.825          | 0.038            | 1.13           | 0.934         | /        |
|                                                                                                   | standard   | OFDM | 95.3%      | 48/5240                  | 17.00        | 16.52                | 0.295                        | 0.757          | -0.010           | 1.17           | 0.887         | /        |
| Front Side                                                                                        | standard   | OFDM | 95.3%      | 36/5180                  | 17.00        | 16.75                | 0.046                        | 0.134          | 0.035            | 1.11           | 0.149         | /        |
| Body-worn SAR(WLAN-L4) Simultaneous with WWAN802.11ac-VHT80                                       |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Back Side                                                                                         | standard   | OFDM | 88.1%      | 42/5210                  | 14.50        | 14.25                | 0.169                        | 0.419          | -0.047           | 1.20           | 0.504         | /        |
| Hotspot SAR(Distance 10mm) (WLAN-L4) 802.11n-HT40                                                 |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Back Side                                                                                         | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.190                        | 0.474          | -0.025           | 1.10           | 0.520         | 116      |
| Front Side                                                                                        | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.042                        | 0.114          | 0.021            | 1.10           | 0.125         | /        |
| Left Edge                                                                                         | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.025                        | 0.122          | -0.035           | 1.10           | 0.134         | N/A      |
| Right Edge                                                                                        | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.046                        | 0.107          | 0.090            | 1.10           | 0.117         | /        |
| Top Edge                                                                                          | standard   | OFDM | 93.5%      | 46/5230                  | 14.50        | 14.39                | 0.104                        | 0.284          | 0.011            | 1.10           | 0.312         | /        |
| Bottom Edge                                                                                       | N/A        | N/A  | N/A        | N/A                      | N/A          | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A           | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band.                    |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| 2.Since the band U-NII-2A does not support hotspot function, hotspot SAR for U-NII-1 is required. |            |      |            |                          |              |                      |                              |                |                  |                |               |          |

**Table 41: Wi-Fi (5G,U-NII-2A)**

Per 248227, for band U-NII-1 and U-NII-2A, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

| Test Position                                                                  | Cover Type | Mode | Duty Cycle | Channel/<br>Frequency (MHz) | Tune-up dBm | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |                | Plot No. |
|--------------------------------------------------------------------------------|------------|------|------------|-----------------------------|-------------|----------------------|------------------------------|----------------|------------------|----------------|----------------|----------|
|                                                                                |            |      |            |                             |             |                      | Measured SAR10g              | Measure dSAR1g | Power Drift (dB) | Scaling Factor | Report SAR 1g  |          |
| Head SAR(WLAN-L4) 802.11ac-VHT80                                               |            |      |            |                             |             |                      |                              |                |                  |                |                |          |
| Left Cheek                                                                     | standard   | OFDM | 88.1%      | 58/5290                     | 14.50       | 13.87                | 0.156                        | 0.512          | -0.072           | 1.31           | 0.672          | /        |
| Left Tilt                                                                      | standard   | OFDM | 88.1%      | 58/5290                     | 14.50       | 13.87                | 0.199                        | 0.772          | -0.068           | 1.31           | 1.013          | 117      |
| Right Cheek                                                                    | standard   | OFDM | 88.1%      | 58/5290                     | 14.50       | 13.87                | 0.141                        | 0.408          | 0.089            | 1.31           | 0.535          | /        |
| Right Tilt                                                                     | standard   | OFDM | 88.1%      | 58/5290                     | 14.50       | 13.87                | 0.176                        | 0.528          | 0.058            | 1.31           | 0.693          | /        |
| Head SAR(WLAN-L2) Simultaneous with WWAN 802.11ac-VHT80                        |            |      |            |                             |             |                      |                              |                |                  |                |                |          |
| Left Tilt                                                                      | standard   | OFDM | 88.1%      | 58/5290                     | 12.50       | 12.24                | 0.120                        | 0.464          | -0.196           | 1.21           | 0.559          | /        |
| Right Tilt                                                                     | standard   | OFDM | 88.1%      | 58/5290                     | 12.50       | 12.24                | 0.102                        | 0.304          | 0.032            | 1.21           | 0.366          | /        |
| Body-worn SAR (Distance 15mm) (WLAN 1) 802.11nHT40                             |            |      |            |                             |             |                      |                              |                |                  |                |                |          |
| Back Side                                                                      | standard   | OFDM | 93.5%      | 54/5270                     | 17.00       | 16.95                | 0.374                        | 0.952          | -0.195           | 1.08           | 1.030          | 118      |
|                                                                                | standard   | OFDM | 93.5%      | 62/5310                     | 14.00       | 13.46                | 0.163                        | 0.445          | 0.018            | 1.21           | 0.539          | /        |
| Front Side                                                                     | standard   | OFDM | 93.5%      | 54/5270                     | 17.00       | 16.95                | 0.052                        | 0.128          | 0.024            | 1.08           | 0.138          | /        |
| Body-worn SAR(WLAN-L4) Simultaneous with WWAN802.11ac-VHT80                    |            |      |            |                             |             |                      |                              |                |                  |                |                |          |
| Back Side                                                                      | standard   | OFDM | 88.1%      | 58/5290                     | 14.50       | 13.87                | 0.191                        | 0.480          | -0.105           | 1.31           | 0.630          | /        |
| Test Position                                                                  | Cover Type | Mode | Duty Cycle | Channel/<br>Frequency (MHz) | Tune-up dBm | Measured power (dBm) | Limit of SAR 4 W/kg (mW/g)   |                |                  |                |                | Plot No. |
|                                                                                |            |      |            |                             |             |                      | Measured SAR10g              | Measure dSAR1g | Power Drift (dB) | Scaling Factor | Report SAR 10g |          |
| Product Specific 10-g SAR (Distance 0mm) (WLAN 1) 802.11nHT40                  |            |      |            |                             |             |                      |                              |                |                  |                |                |          |
| Back Side                                                                      | standard   | OFDM | 93.5%      | 54/5270                     | 17.00       | 16.95                | 0.694                        | 1.880          | -0.094           | 1.08           | 0.751          | /        |
| Front Side                                                                     | standard   | OFDM | 93.5%      | 54/5270                     | 17.00       | 16.95                | 0.612                        | 1.340          | 0.010            | 1.08           | 0.662          | /        |
| Left Edge                                                                      | standard   | OFDM | 93.5%      | 54/5270                     | 17.00       | 16.95                | 0.027                        | 0.083          | -0.055           | 1.08           | 0.029          | N/A      |
| Right Edge                                                                     | standard   | OFDM | 93.5%      | 54/5270                     | 17.00       | 16.95                | 0.187                        | 0.484          | 0.021            | 1.08           | 0.202          | /        |
| Top Edge                                                                       | standard   | OFDM | 93.5%      | 54/5270                     | 17.00       | 16.95                | 1.270                        | 5.610          | -0.113           | 1.08           | 1.374          | 119      |
| Bottom Edge                                                                    | N/A        | N/A  | N/A        | N/A                         | N/A         | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A            | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band. |            |      |            |                             |             |                      |                              |                |                  |                |                |          |



Table 42: Wi-Fi (5G,U-NII-2C)

| Test Position                                                                  | Cover Type | Mode | Duty Cycle | Channel/ Frequency (MHz) | Tune-up dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |                | Plot No. |
|--------------------------------------------------------------------------------|------------|------|------------|--------------------------|--------------|----------------------|------------------------------|----------------|------------------|----------------|----------------|----------|
|                                                                                |            |      |            |                          |              |                      | Measured SAR10g              | Measure dSAR1g | Power Drift (dB) | Scaling Factor | Report SAR 1g  |          |
| Head SAR(WLAN-L4) 802.11ac-VHT80                                               |            |      |            |                          |              |                      |                              |                |                  |                |                |          |
| Left Cheek                                                                     | standard   | OFDM | 88.1%      | 106/5530                 | 14.50        | 14.41                | 0.193                        | 0.694          | -0.150           | 1.16           | 0.804          | /        |
| Left Tilt                                                                      | standard   | OFDM | 88.1%      | 106/5530                 | 14.50        | 14.41                | 0.220                        | 0.790          | -0.087           | 1.16           | 0.915          | 120      |
|                                                                                | standard   | OFDM | 88.1%      | 122/5610                 | 14.50        | 14.17                | 0.204                        | 0.738          | 0.062            | 1.22           | 0.904          | /        |
| Right Cheek                                                                    | standard   | OFDM | 88.1%      | 106/5530                 | 14.50        | 14.41                | 0.153                        | 0.431          | -0.041           | 1.16           | 0.499          | /        |
| Right Tilt                                                                     | standard   | OFDM | 88.1%      | 106/5530                 | 14.50        | 14.41                | 0.191                        | 0.548          | 0.030            | 1.16           | 0.635          | /        |
| Head SAR(WLAN-L2) Simultaneous with WWAN 802.11ac-VHT80                        |            |      |            |                          |              |                      |                              |                |                  |                |                |          |
| Left Tilt                                                                      | standard   | OFDM | 88.1%      | 106/5530                 | 11.50        | 10.70                | 0.114                        | 0.423          | -0.095           | 1.36           | 0.577          | /        |
| Right Tilt                                                                     | standard   | OFDM | 88.1%      | 106/5530                 | 11.50        | 10.70                | 0.106                        | 0.314          | -0.170           | 1.36           | 0.429          | /        |
| Body-worn SAR (Distance 15mm) (WLAN 1) 802.11ac-VHT80                          |            |      |            |                          |              |                      |                              |                |                  |                |                |          |
| Back Side                                                                      | standard   | OFDM | 88.1%      | 122/5610                 | 15.5         | 15.14                | 0.053                        | 0.102          | 0.025            | 1.23           | 0.126          | 121      |
| Front Side                                                                     | standard   | OFDM | 88.1%      | 122/5610                 | 15.5         | 15.14                | 0.055                        | 0.122          | -0.030           | 1.23           | 0.150          | /        |
| Test Position                                                                  | Cover Type | Mode | Duty Cycle | Channel/ Frequency (MHz) | Tune-up dBm) | Measured power (dBm) | Limit of SAR 4 W/kg (mW/g)   |                |                  |                |                | Plot No. |
|                                                                                |            |      |            |                          |              |                      | Measured SAR10g              | Measure dSAR1g | Power Drift (dB) | Scaling Factor | Report SAR 10g |          |
| Product Specific 10-g SAR (Distance 0mm) (WLAN 1) 802.11ac-VHT80               |            |      |            |                          |              |                      |                              |                |                  |                |                |          |
| Back Side                                                                      | standard   | OFDM | 88.1%      | 122/5610                 | 15.5         | 15.14                | 0.428                        | 1.690          | 0.064            | 1.23           | 0.528          | /        |
| Front Side                                                                     | standard   | OFDM | 88.1%      | 122/5610                 | 15.5         | 15.14                | 0.372                        | 1.210          | 0.012            | 1.23           | 0.459          | /        |
| Left Edge                                                                      | standard   | OFDM | 88.1%      | 122/5610                 | 15.5         | 15.14                | 0.027                        | 0.082          | 0.030            | 1.23           | 0.033          | N/A      |
| Right Edge                                                                     | standard   | OFDM | 88.1%      | 122/5610                 | 15.5         | 15.14                | 0.106                        | 0.284          | 0.018            | 1.23           | 0.131          | /        |
| Top Edge                                                                       | standard   | OFDM | 88.1%      | 122/5610                 | 15.5         | 15.14                | 0.845                        | 3.630          | -0.027           | 1.23           | 1.042          | 122      |
| Bottom Edge                                                                    | N/A        | N/A  | N/A        | N/A                      | N/A          | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A            | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band. |            |      |            |                          |              |                      |                              |                |                  |                |                |          |



Table 43: Wi-Fi (5G,U-NII-3)

| Test Position                                                                  | Cover Type | Mode | Duty Cycle | Channel/ Frequency (MHz) | Tune-up dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |               | Plot No. |
|--------------------------------------------------------------------------------|------------|------|------------|--------------------------|--------------|----------------------|------------------------------|----------------|------------------|----------------|---------------|----------|
|                                                                                |            |      |            |                          |              |                      | Measured SAR10g              | Measure dSAR1g | Power Drift (dB) | Scaling Factor | Report SAR 1g |          |
| Head SAR(WLAN-L4) 802.11ac-VHT80                                               |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Left Cheek                                                                     | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.219                        | 0.761          | -0.086           | 1.17           | 0.888         | /        |
| Left Tilt                                                                      | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.304                        | 1.010          | -0.140           | 1.17           | 1.179         | 123      |
| Right Cheek                                                                    | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.224                        | 0.640          | -0.055           | 1.17           | 0.747         | /        |
| Right Tilt                                                                     | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.283                        | 0.822          | 0.140            | 1.17           | 0.959         | /        |
| Head SAR(WLAN-L2) Simultaneous with WWAN 802.11ac-VHT80                        |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Left Tilt                                                                      | standard   | OFDM | 88.1%      | 155/5775                 | 11.50        | 10.81                | 0.108                        | 0.405          | -0.032           | 1.33           | 0.539         | /        |
| Right Cheek                                                                    | standard   | OFDM | 88.1%      | 155/5775                 | 11.50        | 10.81                | 0.080                        | 0.222          | 0.021            | 1.33           | 0.295         | /        |
| Right Tilt                                                                     | standard   | OFDM | 88.1%      | 155/5775                 | 11.50        | 10.81                | 0.108                        | 0.310          | 0.105            | 1.33           | 0.412         | /        |
| Body-worn SAR (Distance 15mm) (WLAN 1) 802.11ac-VHT80                          |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Back Side                                                                      | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.037                        | 0.084          | -0.043           | 1.17           | 0.098         | 124      |
| Front Side                                                                     | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.024                        | 0.072          | 0.061            | 1.17           | 0.084         | /        |
| Hotspot SAR(Distance 10mm) (WLAN-L4) 802.11ac-VHT80                            |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Back Side                                                                      | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.093                        | 0.251          | 0.060            | 1.17           | 0.293         | /        |
| Front Side                                                                     | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.058                        | 0.154          | 0.028            | 1.17           | 0.180         | /        |
| Left Edge                                                                      | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.036                        | 0.171          | 0.013            | 1.17           | 0.200         | N/A      |
| Right Edge                                                                     | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.028                        | 0.085          | 0.010            | 1.17           | 0.099         | /        |
| Top Edge                                                                       | standard   | OFDM | 88.1%      | 155/5775                 | 14.50        | 14.38                | 0.227                        | 0.691          | -0.055           | 1.17           | 0.806         | 125      |
| Bottom Edge                                                                    | N/A        | N/A  | N/A        | N/A                      | N/A          | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A           | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band. |            |      |            |                          |              |                      |                              |                |                  |                |               |          |



Table 44: BT

| Test Position                                                                  | Cover Type | Mode | Duty Cycle | Channel/ Frequency (MHz) | Tune-up dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) |                |                  |                |               | Plot No. |
|--------------------------------------------------------------------------------|------------|------|------------|--------------------------|--------------|----------------------|------------------------------|----------------|------------------|----------------|---------------|----------|
|                                                                                |            |      |            |                          |              |                      | Measured SAR10g              | Measure dSAR1g | Power Drift (dB) | Scaling Factor | Report SAR 1g |          |
| Head SAR                                                                       |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Left Cheek                                                                     | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.106                        | 0.235          | -0.030           | 1.97           | 0.463         | 126      |
| Left Tilt                                                                      | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.078                        | 0.188          | 0.010            | 1.97           | 0.370         | /        |
| Right Cheek                                                                    | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.052                        | 0.102          | -0.024           | 1.97           | 0.201         | /        |
| Right Tilt                                                                     | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.034                        | 0.069          | 0.030            | 1.97           | 0.135         | /        |
| Body SAR (Distance 10mm)                                                       |            |      |            |                          |              |                      |                              |                |                  |                |               |          |
| Back Side                                                                      | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.023                        | 0.048          | -0.049           | 1.97           | 0.095         | /        |
| Front Side                                                                     | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.028                        | 0.054          | -0.132           | 1.97           | 0.105         | 127      |
| Left Edge                                                                      | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.001                        | 0.002          | 0.010            | 1.97           | 0.004         | N/A      |
| Right Edge                                                                     | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.015                        | 0.030          | -0.030           | 1.97           | 0.059         | /        |
| Top Edge                                                                       | standard   | GFSK | 76.5%      | 39/2441                  | 13.00        | 11.22                | 0.018                        | 0.037          | -0.032           | 1.97           | 0.074         | /        |
| Bottom Edge                                                                    | N/A        | N/A  | N/A        | N/A                      | N/A          | N/A                  | N/A                          | N/A            | N/A              | N/A            | N/A           | N/A      |
| Note: 1. The value with blue color is the maximum SAR Value of each test band. |            |      |            |                          |              |                      |                              |                |                  |                |               |          |

## 10.5 Simultaneous Transmission Analysis

| Simultaneous Transmission Configurations | Head | Body-worn | Hotspot | Product Specific 10-g SAR |
|------------------------------------------|------|-----------|---------|---------------------------|
| GSM(Voice) + BT                          | Yes  | Yes       | Yes     | Yes                       |
| GPRS/EDGE(Data) + BT                     | Yes  | Yes       | Yes     | Yes                       |
| WCDMA(Voice) + BT                        | Yes  | Yes       | Yes     | Yes                       |
| WCDMA(Data) + BT                         | Yes  | Yes       | Yes     | Yes                       |
| LTE + BT                                 | Yes  | Yes       | Yes     | Yes                       |
| GSM(Voice) + Wi-Fi-2.4GHz                | Yes  | Yes       | Yes     | Yes                       |
| GPRS/EDGE(Data) + Wi-Fi-2.4GHz           | Yes  | Yes       | Yes     | Yes                       |
| WCDMA(Voice) + Wi-Fi-2.4GHz              | Yes  | Yes       | Yes     | Yes                       |
| WCDMA(Data) + Wi-Fi-2.4GHz               | Yes  | Yes       | Yes     | Yes                       |
| LTE + Wi-Fi-2.4GHz                       | Yes  | Yes       | Yes     | Yes                       |
| GSM(Voice) + Wi-Fi-5GHz                  | Yes  | Yes       | Yes     | Yes                       |
| GPRS/EDGE(Data) + Wi-Fi-5GHz             | Yes  | Yes       | Yes     | Yes                       |
| WCDMA(Voice) + Wi-Fi-5GHz                | Yes  | Yes       | Yes     | Yes                       |
| WCDMA(Data) + Wi-Fi-5GHz                 | Yes  | Yes       | Yes     | Yes                       |
| LTE + Wi-Fi-5GHz                         | Yes  | Yes       | Yes     | Yes                       |
| Wi-Fi-2.4GHz + BT                        | N/A  | N/A       | N/A     | N/A                       |
| Wi-Fi-5GHz + BT                          | Yes  | Yes       | Yes     | Yes                       |
| Wi-Fi-2.4GHz + Wi-Fi-5GHz                | N/A  | N/A       | N/A     | N/A                       |
| WWAN Antenna Down+ WWAN Antenna Up       | N/A  | N/A       | N/A     | N/A                       |

### General Note:

- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01, simultaneous transmission SAR is compliant if,
  - Scalar SAR summation  $< 1.6\text{W/kg}$ , simultaneously transmission SAR measurement is not necessary.
  - $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - If  $\text{SPLSR} \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.

The maximum SAR<sub>1g/10g</sub> Value for WWAN Antenna Down

| SAR <sub>1g/10g</sub> (W/kg)<br>Test Position |             | GSM<br>850 | GSM<br>1900 | WCDMA<br>Band<br>II | WCDMA<br>Band<br>IV | WCDMA<br>Band<br>V | LTE<br>FDD<br>2 | LTE<br>FDD<br>4 | LTE<br>FDD<br>5 | LTE<br>FDD<br>7 | LTE<br>FDD<br>12 | LTE<br>FDD<br>17 | LTE<br>FDD<br>26 | LTE<br>TDD<br>38 | LTE<br>TDD<br>41 | LTE<br>FDD<br>66 | MAX.<br>SAR <sub>1g</sub> |
|-----------------------------------------------|-------------|------------|-------------|---------------------|---------------------|--------------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|------------------|------------------|------------------|---------------------------|
| Left Cheek                                    |             | 0.156      | 0.086       | 0.088               | 0.081               | 0.092              | 0.138           | 0.047           | 0.151           | 0.142           | 0.060            | 0.056            | 0.236            | 0.109            | 0.114            | 0.147            | 0.236                     |
| Left Tilt                                     |             | 0.080      | 0.054       | 0.066               | 0.062               | 0.066              | 0.099           | 0.054           | 0.052           | 0.149           | 0.024            | 0.022            | 0.088            | 0.092            | 0.095            | 0.054            | 0.149                     |
| Right Cheek                                   |             | 0.131      | 0.063       | 0.078               | 0.090               | 0.118              | 0.101           | 0.056           | 0.162           | 0.245           | 0.053            | 0.047            | 0.197            | 0.206            | 0.201            | 0.097            | 0.245                     |
| Right Tilt                                    |             | 0.070      | 0.041       | 0.053               | 0.056               | 0.059              | 0.074           | 0.069           | 0.064           | 0.198           | 0.022            | 0.020            | 0.091            | 0.090            | 0.095            | 0.076            | 0.198                     |
| Body<br>worn                                  | Back Side   | 0.148      | 0.295       | 0.317               | 0.607               | 0.200              | 0.296           | 0.511           | 0.206           | 0.580           | 0.129            | 0.126            | 0.220            | 0.212            | 0.198            | 0.341            | 0.607                     |
|                                               | Front Side  | 0.119      | 0.245       | 0.268               | 0.342               | 0.182              | 0.220           | 0.285           | 0.169           | 0.323           | 0.101            | 0.097            | 0.189            | 0.235            | 0.146            | 0.267            | 0.342                     |
| Hotspot                                       | Back Side   | 0.293      | 0.632       | 0.617               | 0.737               | 0.243              | 0.612           | 0.680           | 0.270           | 1.082           | 0.143            | 0.113            | 0.301            | 0.290            | 0.356            | 0.726            | 1.082                     |
|                                               | Front Side  | 0.271      | 0.417       | 0.412               | 0.514               | 0.209              | 0.422           | 0.465           | 0.174           | 0.483           | 0.092            | 0.079            | 0.193            | 0.285            | 0.262            | 0.456            | 0.514                     |
|                                               | Left Edge   | 0.281      | 0.114       | 0.081               | 0.101               | 0.208              | 0.087           | 0.148           | 0.168           | 0.210           | 0.087            | 0.084            | 0.200            | 0.056            | 0.058            | 0.073            | 0.281                     |
|                                               | Right Edge  | 0.197      | 0.133       | 0.099               | 0.177               | 0.073              | 0.149           | 0.113           | 0.120           | 0.311           | 0.071            | 0.067            | 0.118            | 0.218            | 0.171            | 0.120            | 0.311                     |
|                                               | Top Edge    | N/A        | N/A         | N/A                 | N/A                 | N/A                | N/A             | N/A             | N/A             | N/A             | N/A              | N/A              | N/A              | N/A              | N/A              | N/A              | 0.000                     |
|                                               | Bottom Edge | 0.250      | 0.991       | 0.943               | 0.401               | 0.183              | 1.165           | 0.858           | 0.148           | 0.834           | 0.054            | 0.070            | 0.176            | 0.255            | 0.228            | 0.738            | 1.165                     |
| Product<br>Specific<br>10-g<br>SAR            | Back Side   | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Front Side  | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Left Edge   | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Right Edge  | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Top Edge    | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Bottom Edge | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |

The maximum SAR<sub>1g/10g</sub> Value for WWAN Antenna Up

| SAR <sub>1g/10g</sub> (W/kg)<br>Test Position |             | GSM<br>850 | GSM<br>1900 | WCDMA<br>Band<br>II | WCDMA<br>Band<br>IV | WCDMA<br>Band<br>V | LTE<br>FDD<br>2 | LTE<br>FDD<br>4 | LTE<br>FDD<br>5 | LTE<br>FDD<br>7 | LTE<br>FDD<br>12 | LTE<br>FDD<br>17 | LTE<br>FDD<br>26 | LTE<br>TDD<br>38 | LTE<br>TDD<br>41 | LTE<br>FDD<br>66 | MAX.<br>SAR <sub>1g</sub> |
|-----------------------------------------------|-------------|------------|-------------|---------------------|---------------------|--------------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|------------------|------------------|------------------|---------------------------|
| Left Cheek                                    |             | 0.467      | 0.404       | 0.453               | 0.560               | 0.423              | 0.566           | 0.572           | 0.412           | 0.146           | 0.056            | 0.056            | 0.424            | 0.296            | 0.383            | 0.500            | 0.572                     |
| Left Tilt                                     |             | 0.437      | 0.505       | 0.738               | 0.860               | 0.361              | 0.800           | 0.809           | 0.407           | 0.164           | 0.051            | 0.057            | 0.396            | 0.286            | 0.387            | 0.730            | 0.860                     |
| Right Cheek                                   |             | 0.592      | 0.534       | 0.631               | 0.733               | 0.561              | 0.758           | 0.867           | 0.587           | 0.358           | 0.074            | 0.078            | 0.501            | 0.654            | 0.628            | 0.751            | 0.867                     |
| Right Tilt                                    |             | 0.634      | 0.718       | 0.956               | 1.059               | 0.524              | 1.064           | 1.134           | 0.547           | 0.423           | 0.082            | 0.090            | 0.576            | 0.769            | 0.869            | 1.027            | 1.134                     |
| Body<br>worn                                  | Back Side   | 0.126      | 0.283       | 0.351               | 0.642               | 0.078              | 0.177           | 0.222           | 0.085           | 0.209           | 0.012            | 0.012            | 0.071            | 0.231            | 0.192            | 0.191            | 0.642                     |
|                                               | Front Side  | 0.108      | 0.187       | 0.239               | 0.393               | 0.070              | 0.103           | 0.181           | 0.071           | 0.155           | 0.007            | 0.010            | 0.066            | 0.154            | 0.123            | 0.159            | 0.393                     |
| Hotspot                                       | Back Side   | 0.239      | 0.236       | 0.261               | 0.354               | 0.106              | 0.242           | 0.291           | 0.117           | 0.411           | 0.022            | 0.022            | 0.114            | 0.410            | 0.462            | 0.339            | 0.462                     |
|                                               | Front Side  | 0.243      | 0.191       | 0.219               | 0.320               | 0.129              | 0.210           | 0.279           | 0.110           | 0.358           | 0.013            | 0.016            | 0.111            | 0.259            | 0.168            | 0.323            | 0.358                     |
|                                               | Left Edge   | 0.177      | 0.032       | 0.013               | 0.017               | 0.054              | 0.033           | 0.049           | 0.052           | 0.355           | 0.007            | 0.005            | 0.044            | 0.241            | 0.170            | 0.051            | 0.355                     |
|                                               | Right Edge  | 0.118      | 0.017       | 0.054               | 0.026               | 0.070              | 0.040           | 0.044           | 0.063           | 0.337           | 0.004            | 0.001            | 0.081            | 0.052            | 0.042            | 0.042            | 0.337                     |
|                                               | Top Edge    | 0.192      | 0.459       | 0.527               | 0.688               | 0.091              | 0.569           | 0.683           | 0.113           | 0.494           | 0.011            | 0.006            | 0.099            | 0.350            | 0.267            | 0.605            | 0.688                     |
|                                               | Bottom Edge | N/A        | N/A         | N/A                 | N/A                 | N/A                | N/A             | N/A             | N/A             | N/A             | N/A              | N/A              | N/A              | N/A              | N/A              | N/A              | 0.000                     |
| Product<br>Specific<br>10-g<br>SAR            | Back Side   | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Front Side  | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Left Edge   | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Right Edge  | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Top Edge    | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |
|                                               | Bottom Edge | 0.000      | 0.000       | 0.000               | 0.000               | 0.000              | 0.000           | 0.000           | 0.000           | 0.000           | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000            | 0.000                     |

**The maximum SAR<sub>1g/10g</sub> for WiFi-5G**

| SAR <sub>1g/10g</sub> (W/kg) |             | U-NII-1 | U-NII-2A | U-NII-2C | U-NII-3 | MAX. SAR <sub>1g</sub> |
|------------------------------|-------------|---------|----------|----------|---------|------------------------|
| Test Position                |             |         |          |          |         |                        |
| Left Cheek                   |             | 0.596   | 0.672    | 0.804    | 0.888   | 0.888                  |
| Left Tilt                    |             | 0.843   | 1.013    | 0.915    | 1.179   | 1.179                  |
| Right Cheek                  |             | 0.577   | 0.535    | 0.499    | 0.747   | 0.747                  |
| Right Tilt                   |             | 0.540   | 0.693    | 0.635    | 0.959   | 0.959                  |
| Body worn                    | Back Side   | 0.954   | 1.030    | 0.126    | 0.098   | 1.030                  |
|                              | Front Side  | 0.149   | 0.138    | 0.150    | 0.084   | 0.150                  |
| Hotspot                      | Back Side   | 0.520   | 0.000    | 0.000    | 0.293   | 0.520                  |
|                              | Front Side  | 0.125   | 0.000    | 0.000    | 0.180   | 0.180                  |
|                              | Left Edge   | 0.134   | 0.000    | 0.000    | 0.200   | 0.200                  |
|                              | Right Edge  | 0.117   | 0.000    | 0.000    | 0.099   | 0.117                  |
|                              | Top Edge    | 0.312   | 0.000    | 0.000    | 0.806   | 0.806                  |
|                              | Bottom Edge | N/A     | 0.000    | 0.000    | N/A     | 0.000                  |
| Product Specific 10-g SAR    | Back Side   | 0.000   | 0.751    | 0.528    | 0.000   | 0.751                  |
|                              | Front Side  | 0.000   | 0.662    | 0.459    | 0.000   | 0.662                  |
|                              | Left Edge   | 0.000   | 0.029    | 0.033    | 0.000   | 0.033                  |
|                              | Right Edge  | 0.000   | 0.202    | 0.131    | 0.000   | 0.202                  |
|                              | Top Edge    | 0.000   | 1.374    | 1.042    | 0.000   | 1.374                  |
|                              | Bottom Edge | 0.000   | N/A      | N/A      | 0.000   | 0.000                  |

**The maximum SAR<sub>1g/10g</sub> for WiFi-5G Simultaneous**

| SAR <sub>1g/10g</sub> (W/kg) |             | U-NII-1 | U-NII-2A | U-NII-2C | U-NII-3 | MAX. SAR <sub>1g</sub> |
|------------------------------|-------------|---------|----------|----------|---------|------------------------|
| Test Position                |             |         |          |          |         |                        |
| Left Cheek                   |             | 0.596   | 0.672    | 0.804    | 0.888   | 0.888                  |
| Left Tilt                    |             | 0.339   | 0.559    | 0.577    | 0.539   | 0.577                  |
| Right Cheek                  |             | 0.577   | 0.535    | 0.499    | 0.295   | 0.577                  |
| Right Tilt                   |             | 0.365   | 0.366    | 0.429    | 0.412   | 0.429                  |
| Body worn                    | Back Side   | 0.504   | 0.630    | 0.126    | 0.098   | 0.630                  |
|                              | Front Side  | 0.149   | 0.138    | 0.150    | 0.084   | 0.150                  |
| Hotspot                      | Back Side   | 0.520   | 0.000    | 0.000    | 0.293   | 0.520                  |
|                              | Front Side  | 0.125   | 0.000    | 0.000    | 0.180   | 0.180                  |
|                              | Left Edge   | 0.134   | 0.000    | 0.000    | 0.200   | 0.200                  |
|                              | Right Edge  | 0.117   | 0.000    | 0.000    | 0.099   | 0.117                  |
|                              | Top Edge    | 0.312   | 0.000    | 0.000    | 0.806   | 0.806                  |
|                              | Bottom Edge | N/A     | 0.000    | 0.000    | N/A     | 0.000                  |
| Product Specific 10-g SAR    | Back Side   | 0.000   | 0.751    | 0.528    | 0.000   | 0.751                  |
|                              | Front Side  | 0.000   | 0.662    | 0.459    | 0.000   | 0.662                  |
|                              | Left Edge   | 0.000   | 0.029    | 0.033    | 0.000   | 0.033                  |

**SAR Test Report****Report No.: R2008A0550-S1**


|  |                    |       |       |       |       |       |
|--|--------------------|-------|-------|-------|-------|-------|
|  | <b>Right Edge</b>  | 0.000 | 0.202 | 0.131 | 0.000 | 0.202 |
|  | <b>Top Edge</b>    | 0.000 | 1.374 | 1.042 | 0.000 | 1.374 |
|  | <b>Bottom Edge</b> | 0.000 | N/A   | N/A   | 0.000 | 0.000 |

**WWAN Antenna Down Simultaneous with WLAN and BT**

| SAR <sub>1g/10g</sub> (W/kg)<br>Test Position |             | WWAN<br>Antenna<br>Down | Wi-Fi<br>2.4G | Wi-Fi<br>5G | BT    | WWAN<br>Antenna<br>Down<br>+ Wi-Fi 2.4G | WWAN<br>Antenna<br>Down<br>+ Wi-Fi 5G | WWAN<br>Antenna<br>Down<br>+ BT | Wi-Fi 5G+<br>BT |
|-----------------------------------------------|-------------|-------------------------|---------------|-------------|-------|-----------------------------------------|---------------------------------------|---------------------------------|-----------------|
| Left Cheek                                    |             | 0.236                   | 0.716         | 0.888       | 0.463 | 0.952                                   | 1.124                                 | 0.699                           | 1.351           |
| Left Tilt                                     |             | 0.149                   | 0.634         | 0.577       | 0.370 | 0.783                                   | 0.726                                 | 0.519                           | 0.947           |
| Right Cheek                                   |             | 0.245                   | 0.350         | 0.577       | 0.201 | 0.595                                   | 0.822                                 | 0.446                           | 0.778           |
| Right Tilt                                    |             | 0.198                   | 0.276         | 0.429       | 0.135 | 0.474                                   | 0.627                                 | 0.333                           | 0.564           |
| Body worn                                     | Back Side   | 0.607                   | 0.209         | 0.630       | 0.000 | 0.816                                   | 1.237                                 | 0.607                           | 0.630           |
|                                               | Front Side  | 0.342                   | 0.245         | 0.150       | 0.000 | 0.587                                   | 0.492                                 | 0.342                           | 0.150           |
| Hotspot                                       | Back Side   | 1.082                   | 0.120         | 0.520       | 0.095 | 1.202                                   | 1.602                                 | 1.177                           | 0.615           |
|                                               | Front Side  | 0.514                   | 0.125         | 0.180       | 0.105 | 0.639                                   | 0.694                                 | 0.619                           | 0.285           |
|                                               | Left Edge   | 0.281                   | 0.031         | 0.200       | 0.004 | 0.312                                   | 0.481                                 | 0.285                           | 0.204           |
|                                               | Right Edge  | 0.311                   | 0.091         | 0.117       | 0.059 | 0.402                                   | 0.428                                 | 0.370                           | 0.176           |
|                                               | Top Edge    | 0.000                   | 0.158         | 0.806       | 0.074 | 0.158                                   | 0.806                                 | 0.074                           | 0.880           |
|                                               | Bottom Edge | 1.165                   | 0.000         | 0.000       | 0.000 | 1.165                                   | 1.165                                 | 1.165                           | 0.000           |
| Product<br>Specific<br>10-g SAR               | Back Side   | 0.000                   | 0.000         | 0.751       | 0.000 | 0.000                                   | 0.751                                 | 0.000                           | 0.751           |
|                                               | Front Side  | 0.000                   | 0.000         | 0.662       | 0.000 | 0.000                                   | 0.662                                 | 0.000                           | 0.662           |
|                                               | Left Edge   | 0.000                   | 0.000         | 0.033       | 0.000 | 0.000                                   | 0.033                                 | 0.000                           | 0.033           |
|                                               | Right Edge  | 0.000                   | 0.000         | 0.202       | 0.000 | 0.000                                   | 0.202                                 | 0.000                           | 0.202           |
|                                               | Top Edge    | 0.000                   | 0.000         | 1.374       | 0.000 | 0.000                                   | 1.374                                 | 0.000                           | 1.374           |
|                                               | Bottom Edge | 0.000                   | 0.000         | 0.000       | 0.000 | 0.000                                   | 0.000                                 | 0.000                           | 0.000           |

Note: 1. The value with blue color is the maximum  $\Sigma$ SAR<sub>1g/10g</sub> Value.  
2. MAX.  $\Sigma$ SAR<sub>1g/10g</sub> = Unlicensed SAR<sub>MAX</sub> + Licensed SAR<sub>MAX</sub>

**Hotspot MAX** (Wi-Fi 5G and LTE Band 7)  $\Sigma \text{SAR}_{1g} = 1.602 \text{ W/kg} > 1.50 \text{ W/kg}$ , so the SAR to peak location separation ratio should be considered.

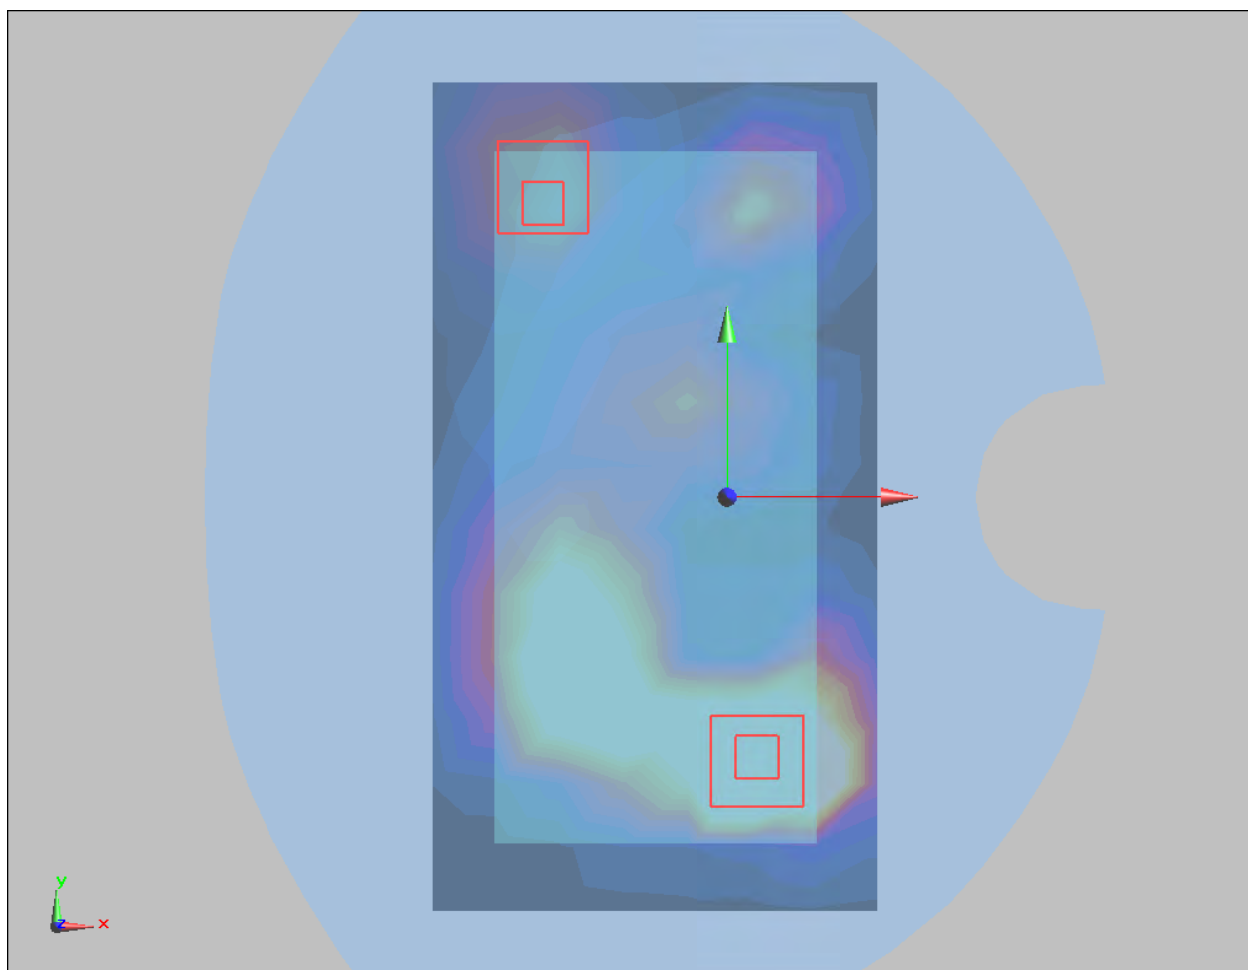

So the distribution of hot spots does not overlap, of the two SAR values 1.082 W/kg is higher.



## Second- Antenna Simultaneous with WLAN and BT

| SAR <sub>1g/10g</sub> (W/kg)<br>Test Position |             | Second-<br>Antenna | Wi-Fi<br>2.4G | Wi-Fi<br>5G | BT    | WWAN Antenna<br>Up<br>+ Wi-Fi 2.4G | WWAN Antenna<br>Up<br>+ Wi-Fi 5G | WWAN Antenna<br>Up<br>+ BT | Wi-Fi<br>5G+ BT |
|-----------------------------------------------|-------------|--------------------|---------------|-------------|-------|------------------------------------|----------------------------------|----------------------------|-----------------|
| Left Cheek                                    |             | 0.572              | 0.716         | 0.888       | 0.463 | 1.288                              | 1.460                            | 1.035                      | 1.351           |
| Left Tilt                                     |             | 0.860              | 0.634         | 0.577       | 0.370 | 1.494                              | 1.437                            | 1.230                      | 0.947           |
| Right Cheek                                   |             | 0.867              | 0.350         | 0.577       | 0.201 | 1.217                              | 1.444                            | 1.068                      | 0.778           |
| Right Tilt                                    |             | 1.064              | 0.276         | 0.429       | 0.135 | 1.340                              | 1.493                            | 1.199                      | 0.564           |
| Body worn                                     | Back Side   | 0.642              | 0.209         | 0.630       | 0.000 | 0.851                              | 1.272                            | 0.642                      | 0.630           |
|                                               | Front Side  | 0.393              | 0.245         | 0.150       | 0.000 | 0.638                              | 0.543                            | 0.393                      | 0.150           |
| Hotspot                                       | Back Side   | 0.462              | 0.120         | 0.520       | 0.095 | 0.582                              | 0.982                            | 0.557                      | 0.615           |
|                                               | Front Side  | 0.358              | 0.125         | 0.180       | 0.105 | 0.483                              | 0.538                            | 0.463                      | 0.285           |
|                                               | Left Edge   | 0.355              | 0.031         | 0.200       | 0.004 | 0.386                              | 0.555                            | 0.359                      | 0.204           |
|                                               | Right Edge  | 0.337              | 0.091         | 0.117       | 0.059 | 0.428                              | 0.454                            | 0.396                      | 0.176           |
|                                               | Top Edge    | 0.688              | 0.158         | 0.806       | 0.074 | 0.846                              | 1.494                            | 0.762                      | 0.880           |
|                                               | Bottom Edge | 0.000              | 0.000         | 0.000       | 0.000 | 0.000                              | 0.000                            | 0.000                      | 0.000           |
| Product<br>Specific<br>10-g SAR               | Back Side   | 0.000              | 0.000         | 0.751       | 0.000 | 0.000                              | 0.751                            | 0.000                      | 0.751           |
|                                               | Front Side  | 0.000              | 0.000         | 0.662       | 0.000 | 0.000                              | 0.662                            | 0.000                      | 0.662           |
|                                               | Left Edge   | 0.000              | 0.000         | 0.033       | 0.000 | 0.000                              | 0.033                            | 0.000                      | 0.033           |
|                                               | Right Edge  | 0.000              | 0.000         | 0.202       | 0.000 | 0.000                              | 0.202                            | 0.000                      | 0.202           |
|                                               | Top Edge    | 0.000              | 0.000         | 1.374       | 0.000 | 0.000                              | 1.374                            | 0.000                      | 1.374           |
|                                               | Bottom Edge | 0.000              | 0.000         | 0.000       | 0.000 | 0.000                              | 0.000                            | 0.000                      | 0.000           |

Note: 1. The value with blue color is the maximum  $\Sigma$ SAR<sub>1g/10g</sub> Value.

2. MAX.  $\Sigma$ SAR<sub>1g/10g</sub> = Unlicensed SAR<sub>MAX</sub> + Licensed SAR<sub>MAX</sub>

MAX.  $\Sigma$ SAR<sub>1g</sub> = 1.494 W/kg < 1.5W/kg and MAX.  $\Sigma$ SAR<sub>10g</sub> = 1.374 W/kg < 2.8W/kg ,

so the Simultaneous transimition SAR with volum scan are not required for BT and WWAN Antenna Down.



## 11 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528- 2013 is not required in SAR reports submitted for equipment approval.

## ANNEX A: Test Layout




## Tissue Simulating Liquids

For the measurement of the field distribution inside the flat phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For Head and Body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Picture 3 and Picture 4.



Picture 3: liquid depth in the head Phantom

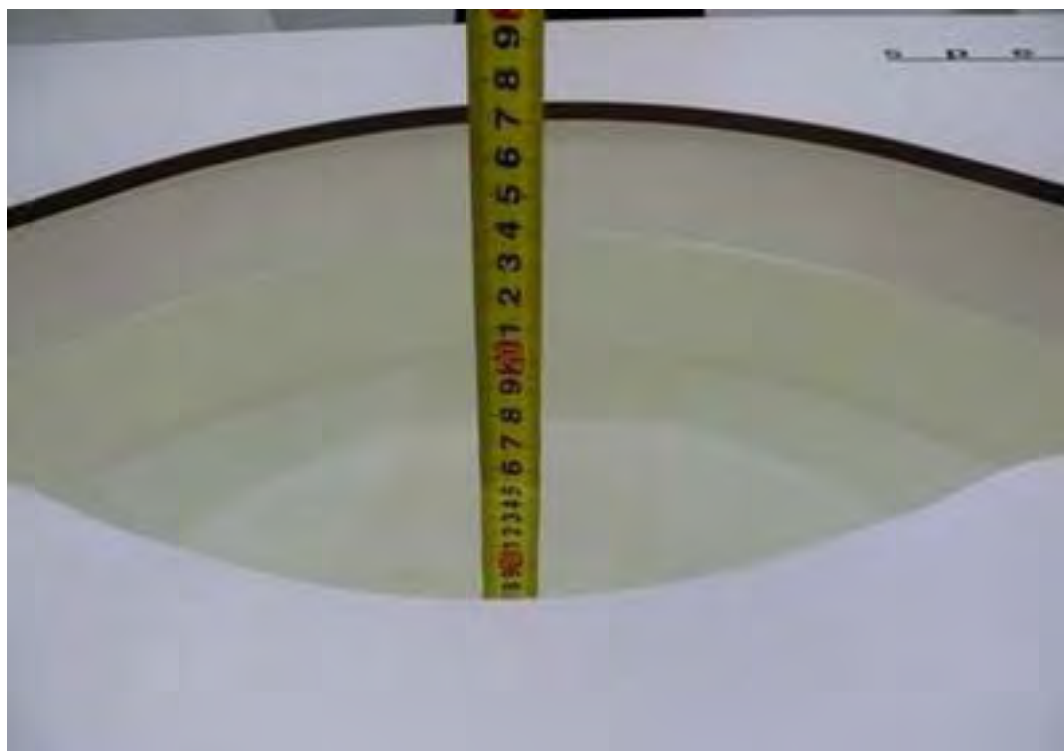

Picture 4: Liquid depth in the flat Phantom

## ANNEX B: System Check Results

### Plot 1 System Performance Check at 750 MHz TSL

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3

Date: 8/18/2020

Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 42.3$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=15mm, Pin=250mW/Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.29 W/kg


**d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.653 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.16 W/kg

**SAR(1 g) = 2.13 W/kg; SAR(10 g) = 1.41 W/kg**

Maximum value of SAR (measured) = 2.29 W/kg

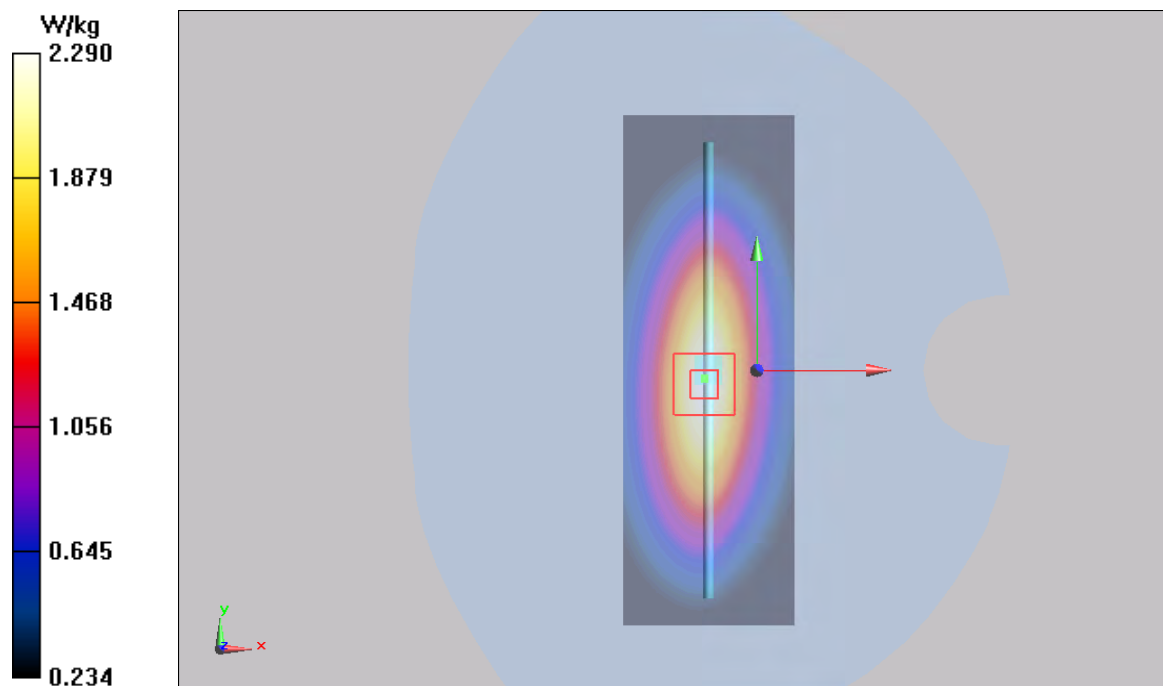

## Plot 2 System Performance Check at 750 MHz TSL

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3**

Date: 8/20/2020

Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.87 \text{ S/m}$ ;  $\epsilon_r = 42.0$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=15mm, Pin=250mW/Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.31 W/kg


**d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.557 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.14 W/kg

**SAR(1 g) = 2.10 W/kg; SAR(10 g) = 1.37 W/kg**

Maximum value of SAR (measured) = 2.264 W/kg

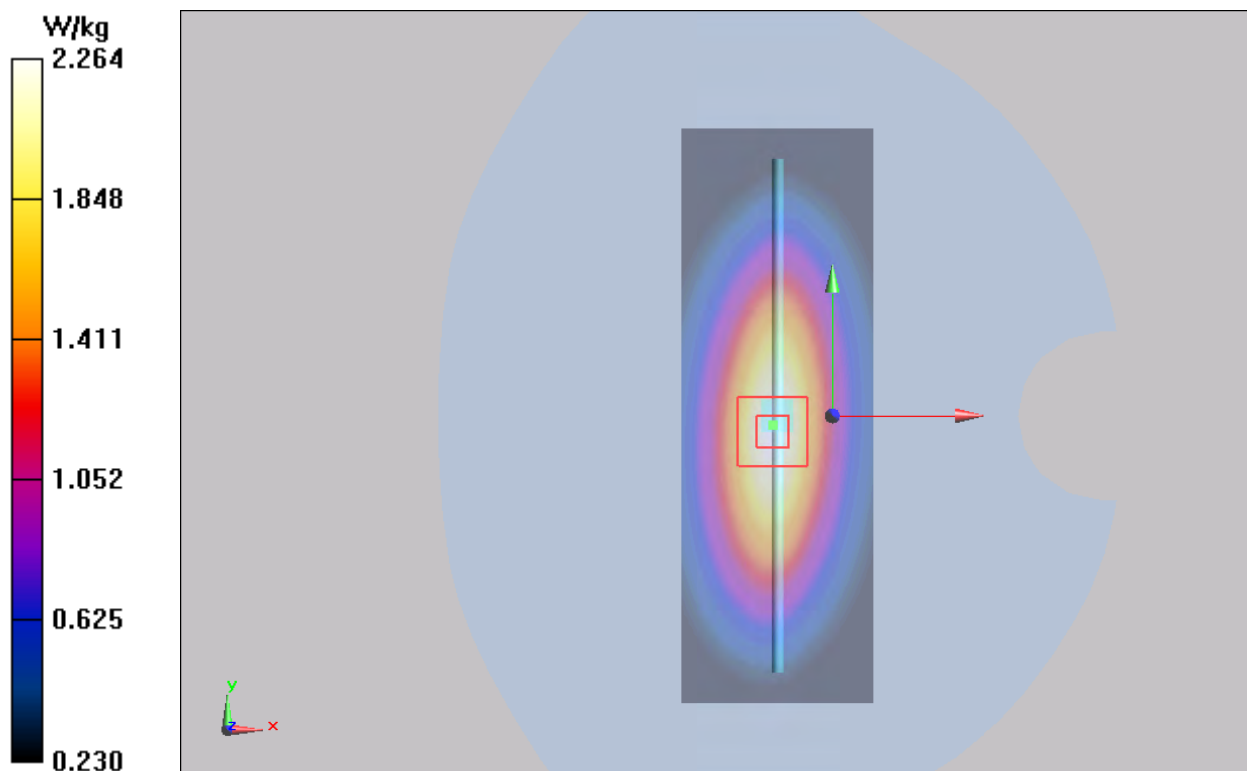

### Plot 3 System Performance Check at 835 MHz TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2**

Date: 8/17/2020

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 41.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$

Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=15mm, Pin=250mW/Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.64 mW/g


**d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.6 mW/g**

Maximum value of SAR (measured) = 2.64 mW/g

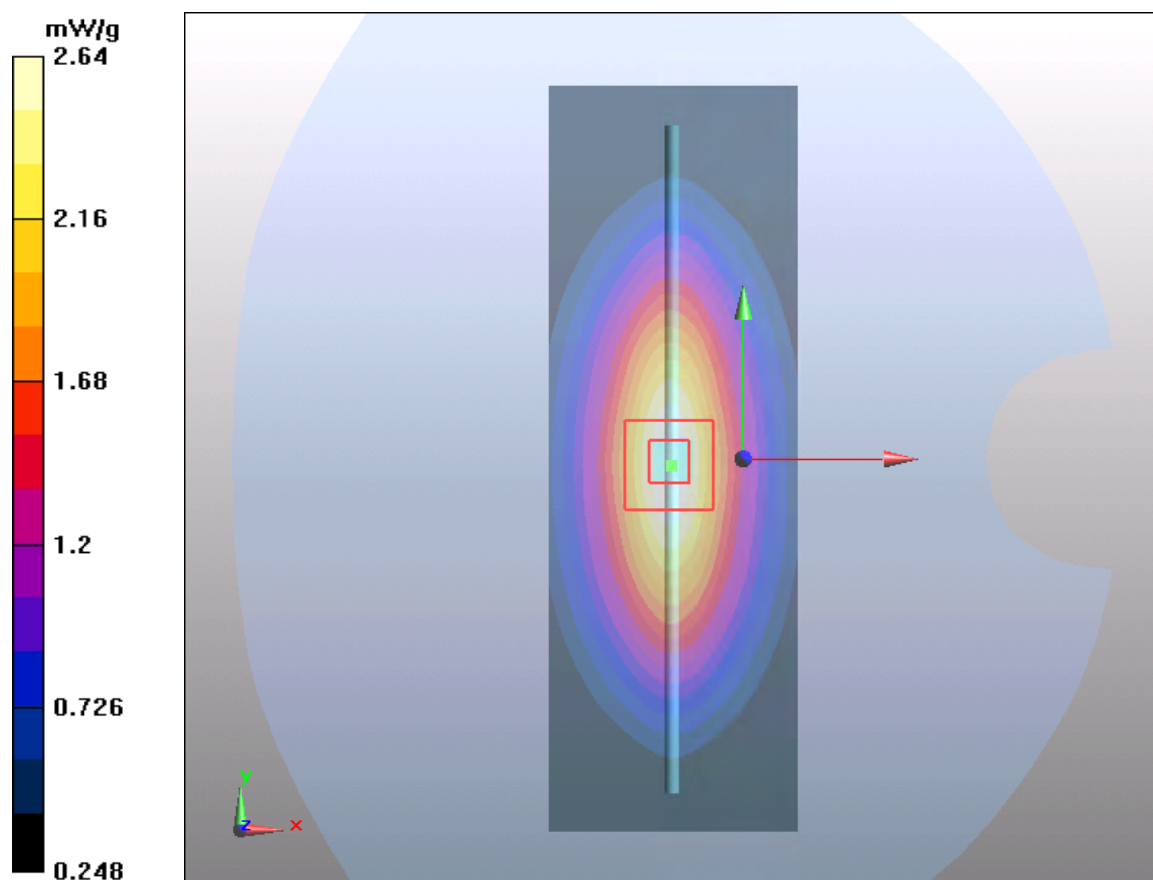

# Plot 4 System Performance Check at 835 MHz TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2**

Date: 8/19/2020

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.87 \text{ S/m}$ ;  $\epsilon_r = 41.3$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=15mm, Pin=250mW/Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.59 mW/g


**d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.3 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.65 mW/g**

Maximum value of SAR (measured) = 2.70 mW/g

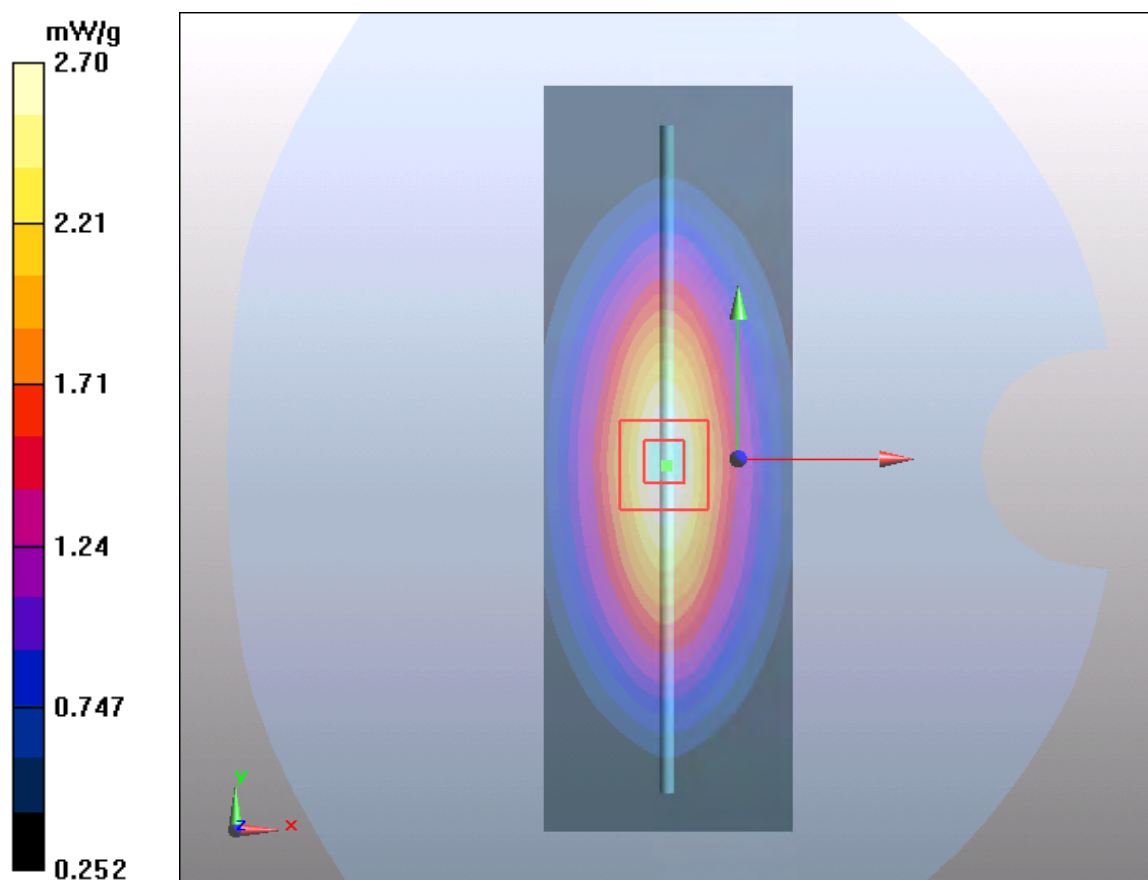

## Plot 5 System Performance Check at 835 MHz TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2**

Date: 8/21/2020

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.92 \text{ S/m}$ ;  $\epsilon_r = 41.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$

Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=15mm, Pin=250mW/Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.64 mW/g


**d=15mm, Pin=250mW/Zoom Scan(5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.43 mW/g; SAR(10 g) = 1.61 mW/g**

Maximum value of SAR (measured) = 2.66 mW/g

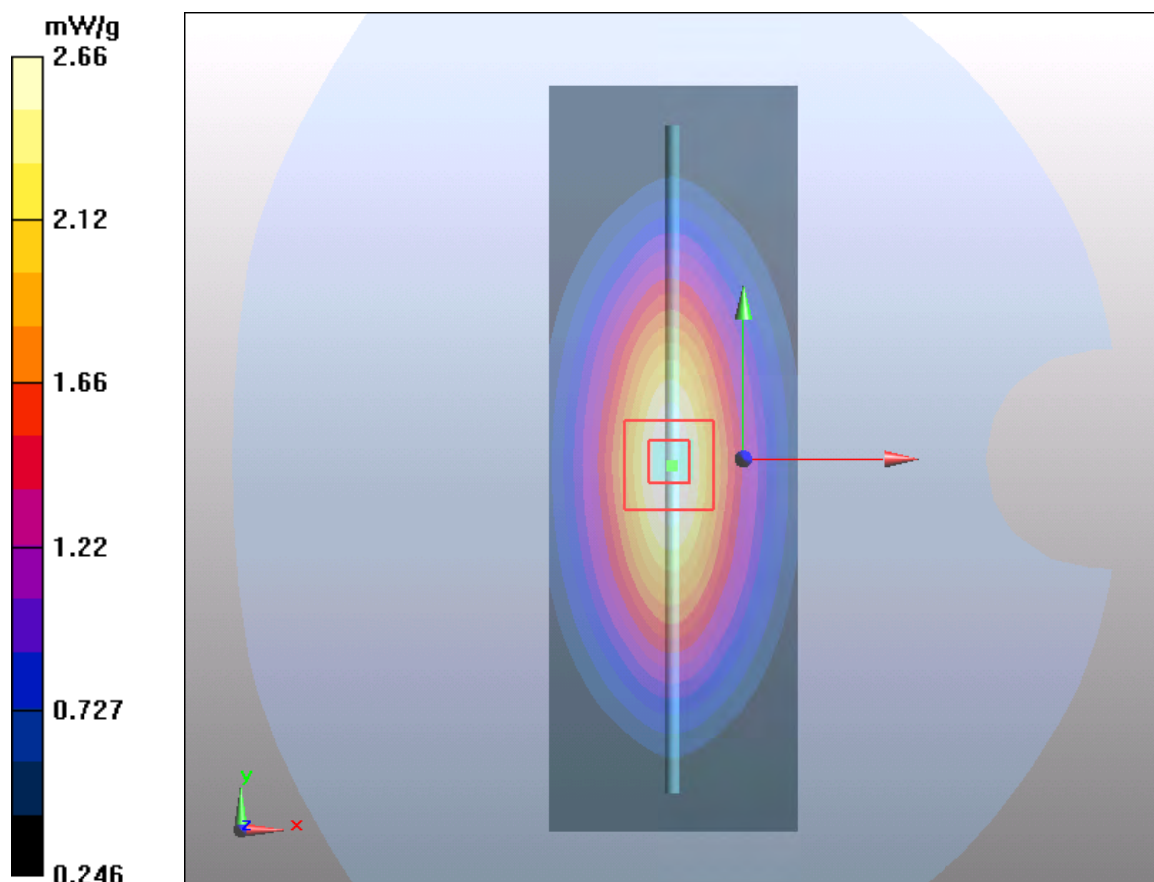

## Plot 6 System Performance Check at 1750 MHz TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2

Date: 8/25/2020

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.78 mW/g


**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 15.5 W/kg

**SAR(1 g) = 8.95 mW/g; SAR(10 g) = 4.5 mW/g**

Maximum value of SAR (measured) = 9.46 mW/g

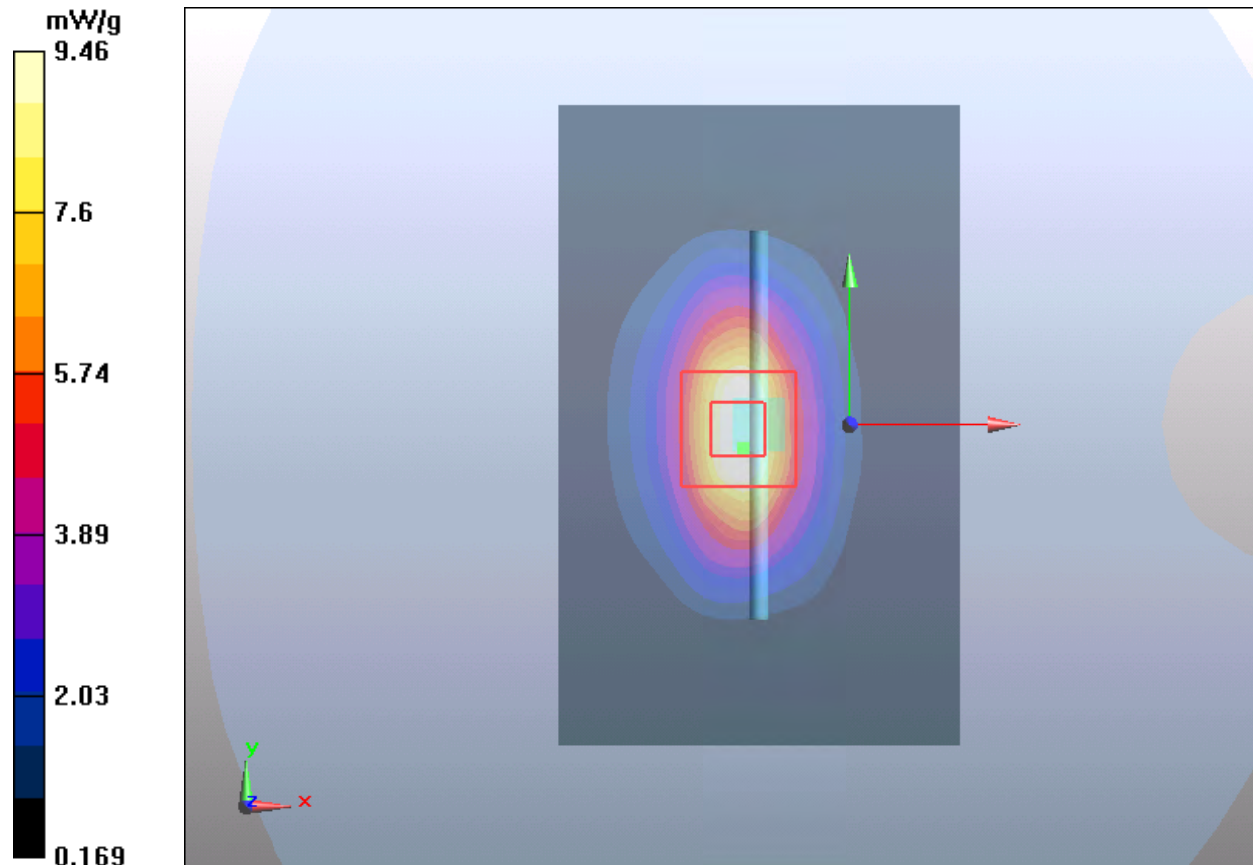

## Plot 7 System Performance Check at 1750 MHz TSL

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2**

Date: 8/26/2020

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.77 mW/g


**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 15.51 W/kg

**SAR(1 g) = 9.11 mW/g; SAR(10 g) = 4.77 mW/g**

Maximum value of SAR (measured) = 9.87 mW/g

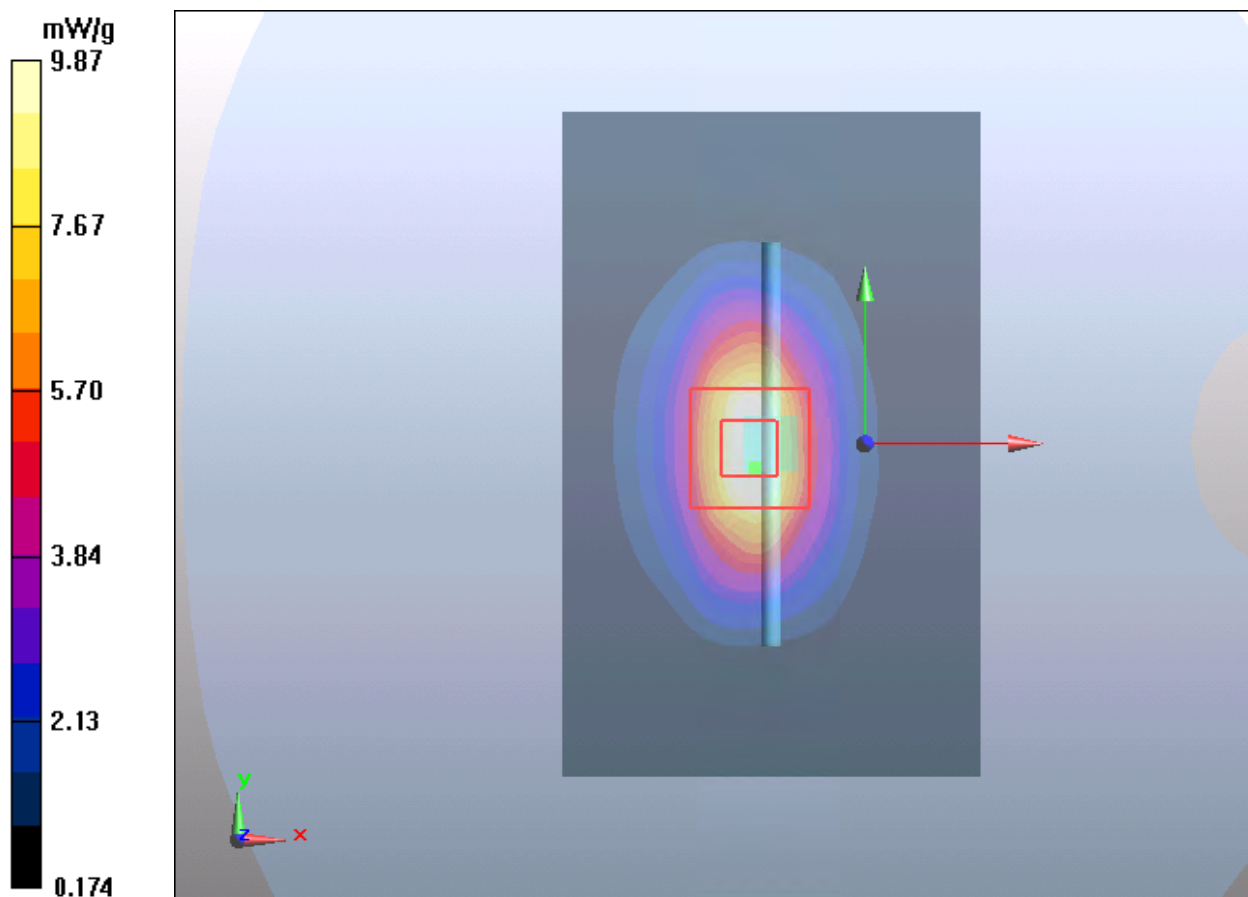

## Plot 8 System Performance Check at 1750 MHz TSL

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2**

Date: 8/28/2020

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.11 mW/g


**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 15.47 W/kg

**SAR(1 g) = 8.96 mW/g; SAR(10 g) = 4.75 mW/g**

Maximum value of SAR (measured) = 9.46 mW/g

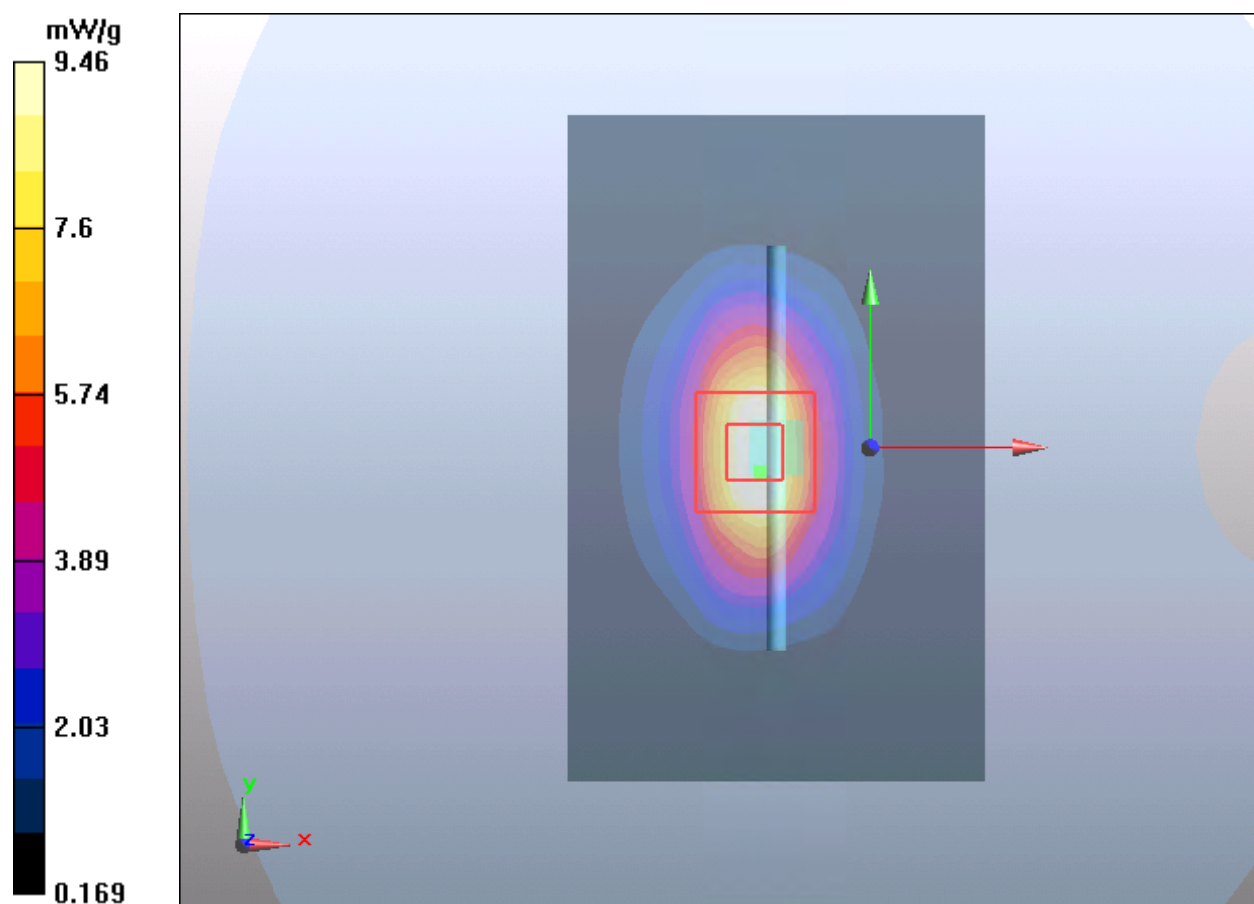

## Plot 9 System Performance Check at 1750 MHz TSL

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2**

Date: 8/30/2020

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.11 mW/g


**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 14.8 W/kg

**SAR(1 g) = 8.92 mW/g; SAR(10 g) = 4.76 mW/g**

Maximum value of SAR (measured) = 10.68 mW/g

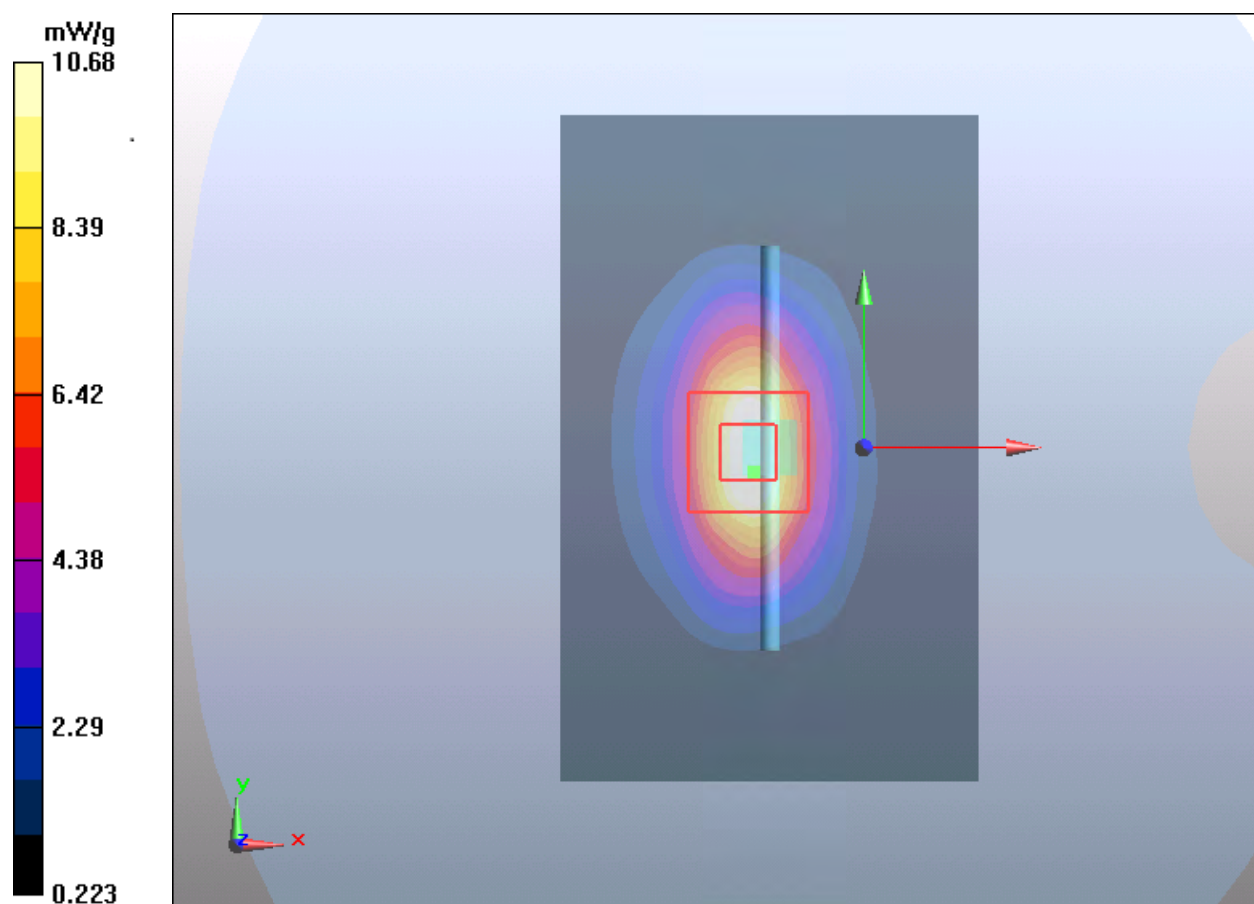

## Plot 10 System Performance Check at 1900 MHz TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2**

Date: 8/22/2020

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (4x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.3 mW/g


**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.5 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.88 mW/g; SAR(10 g) = 4.9 mW/g**

Maximum value of SAR (measured) = 10.7 mW/g

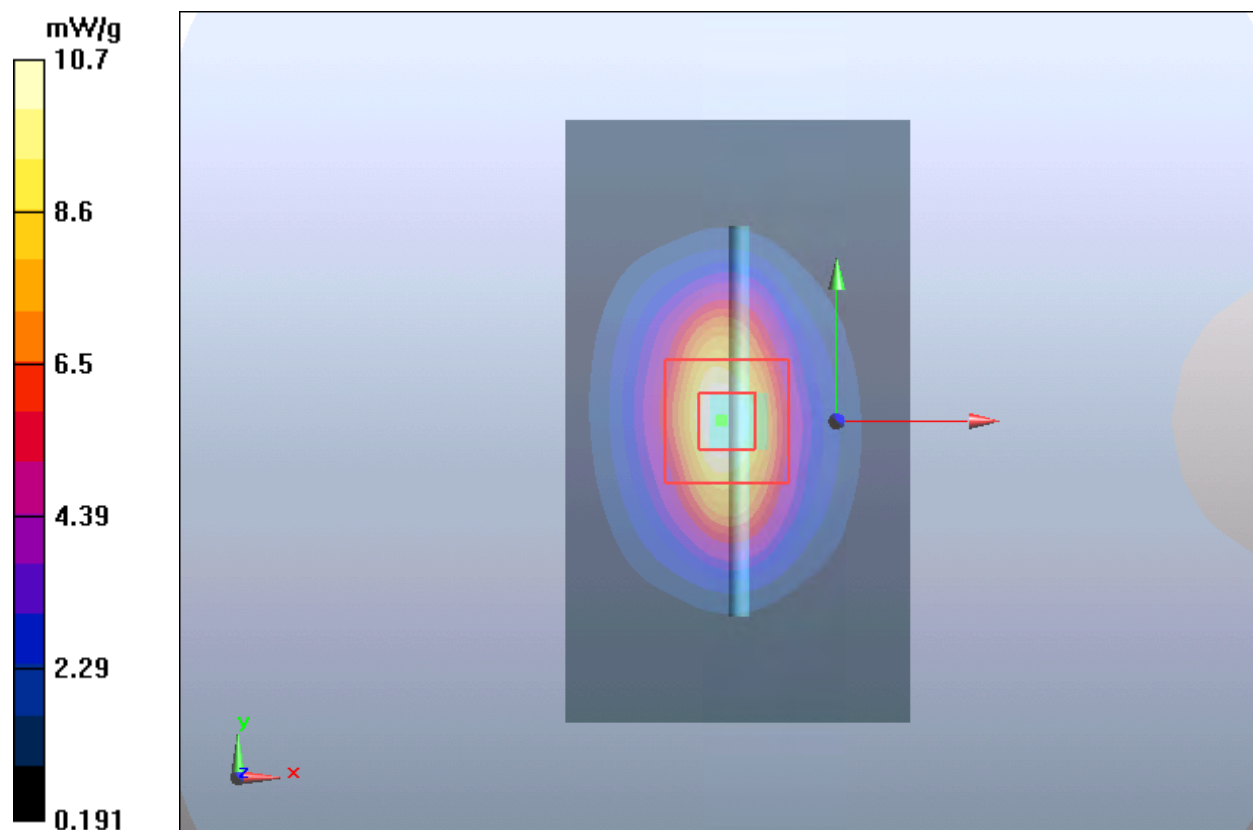

## Plot 11 System Performance Check at 1900 MHz TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2

Date: 8/23/2020

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (4x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.23 mW/g


**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.85 mW/g; SAR(10 g) = 4.93 mW/g**

Maximum value of SAR (measured) = 11.12 mW/g

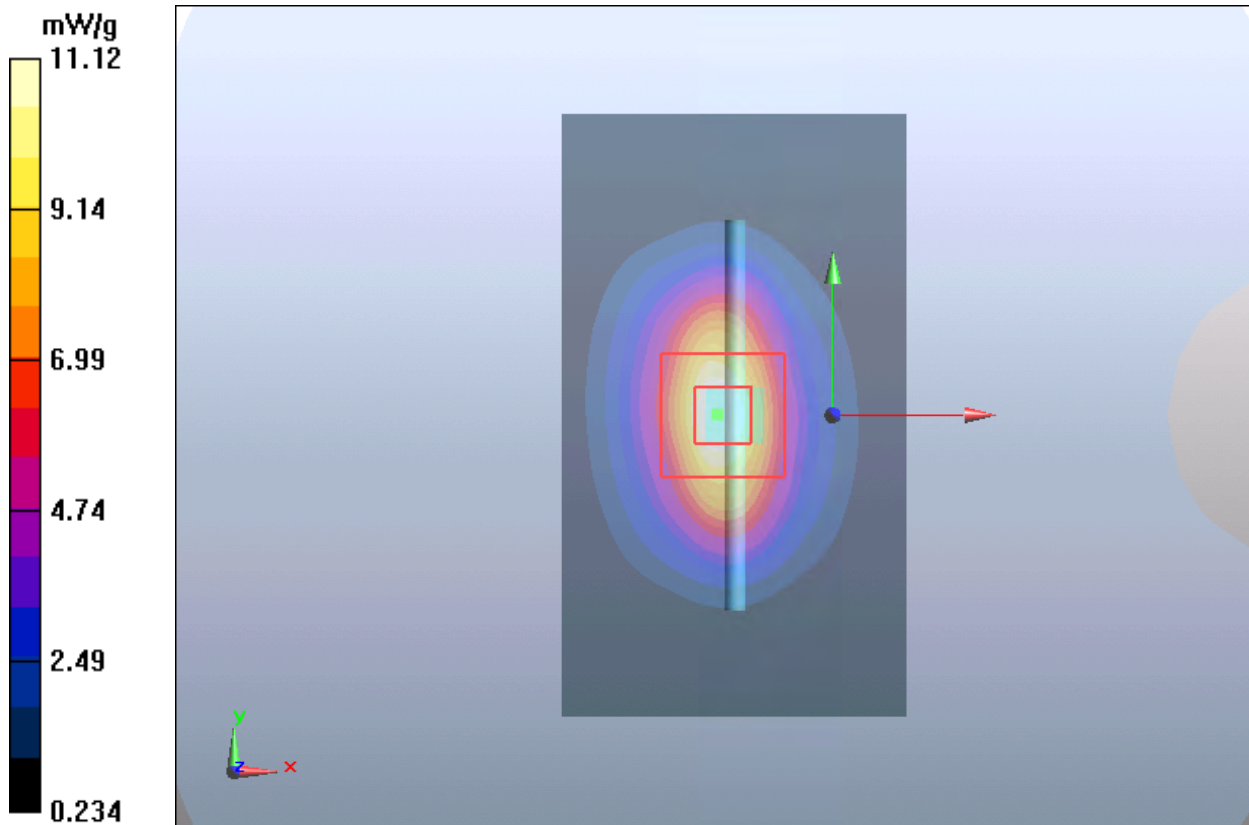

## Plot 12 System Performance Check at 1900 MHz

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2**

Date: 8/24/2020

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (4x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 12.9 mW/g


**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.8 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 20.1 W/kg

**SAR(1 g) = 10.55 mW/g; SAR(10 g) = 5.39 mW/g**

Maximum value of SAR (measured) = 11.52 mW/g

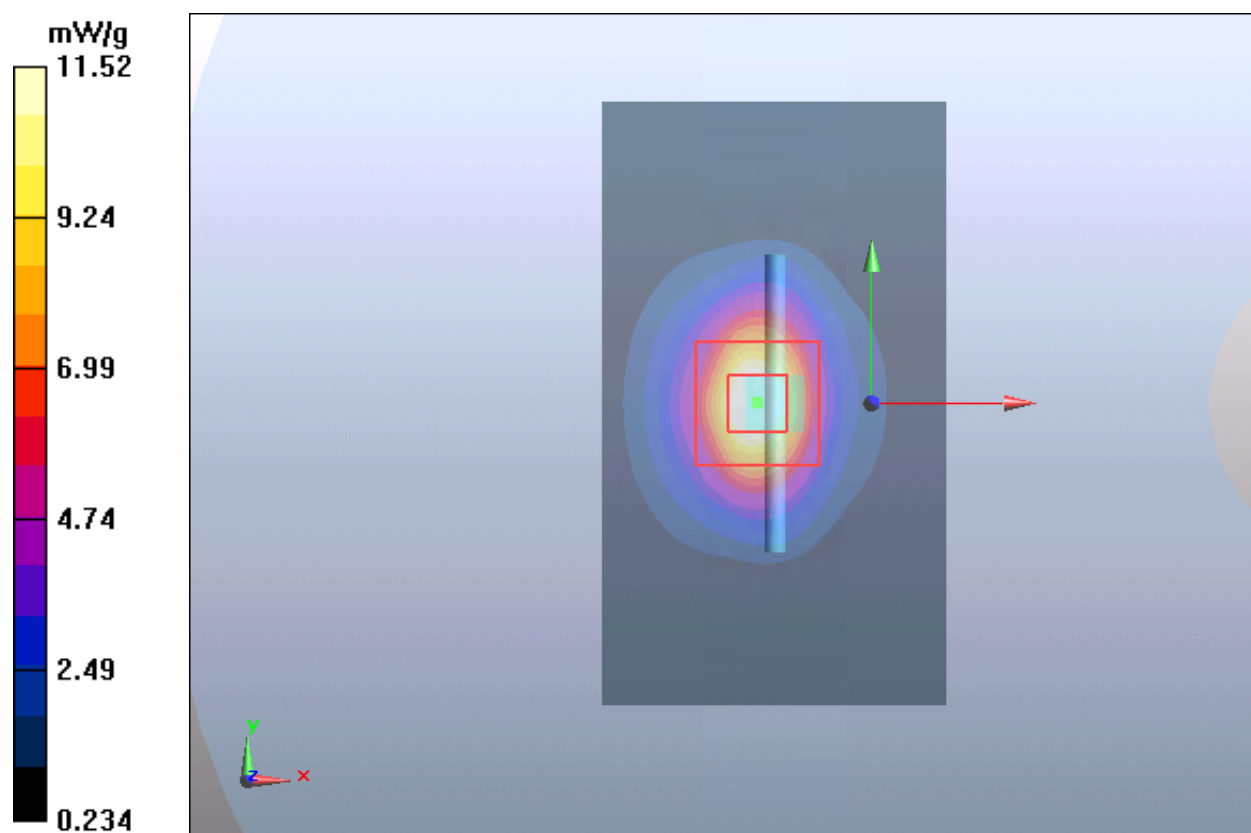

# Plot 13 System Performance Check at 2450 MHz TSL

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2**

Date: 8/27/2020

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.81 \text{ S/m}$ ;  $\epsilon_r = 38.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.54, 7.54, 7.54); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (4x7x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 18.2 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.8 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 30 W/kg

**SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.22 mW/g**

Maximum value of SAR (measured) = 15.9 mW/g

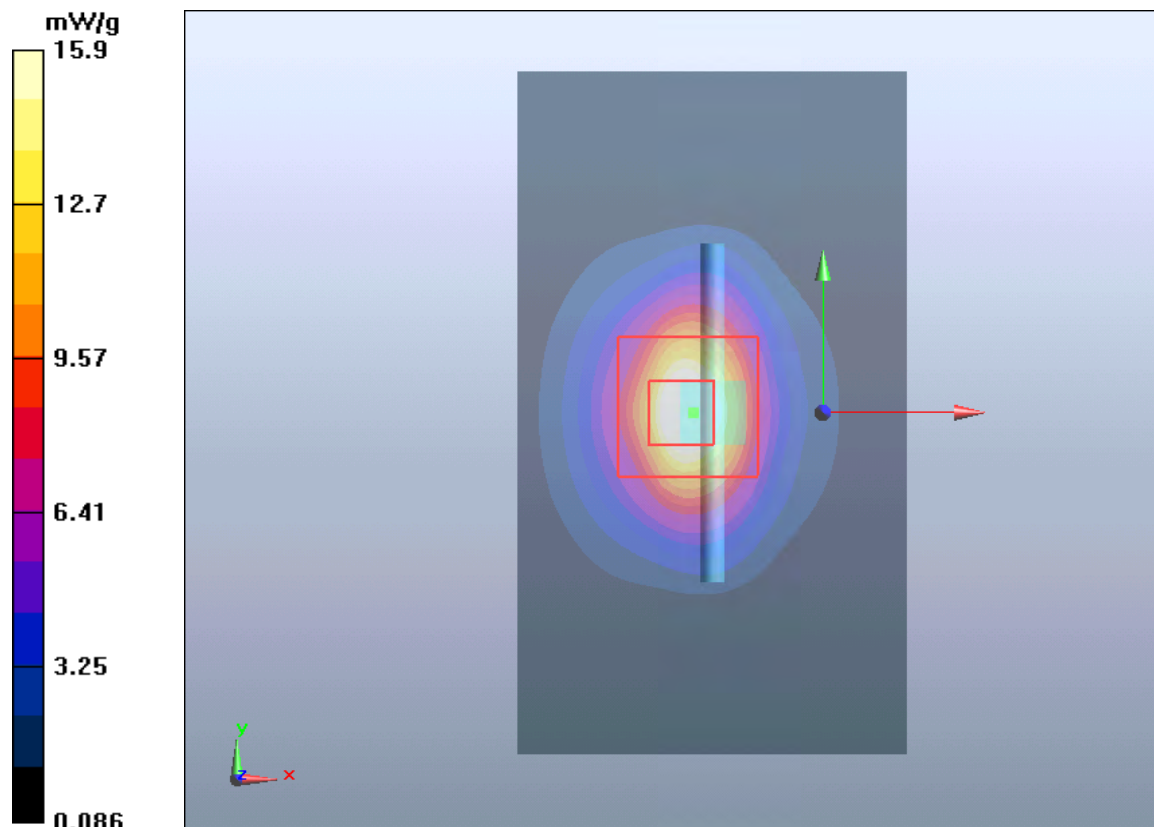

## Plot 14 System Performance Check at 2600 MHz TSL

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2**

Date: 9/1/2020

Communication System: CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.01$  S/m;  $\epsilon_r = 38.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (4x7x1):** Measurement grid:dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.439 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.858 W/kg

**SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.07 mW/g**

Maximum value of SAR (measured) = 15.617 mW/g

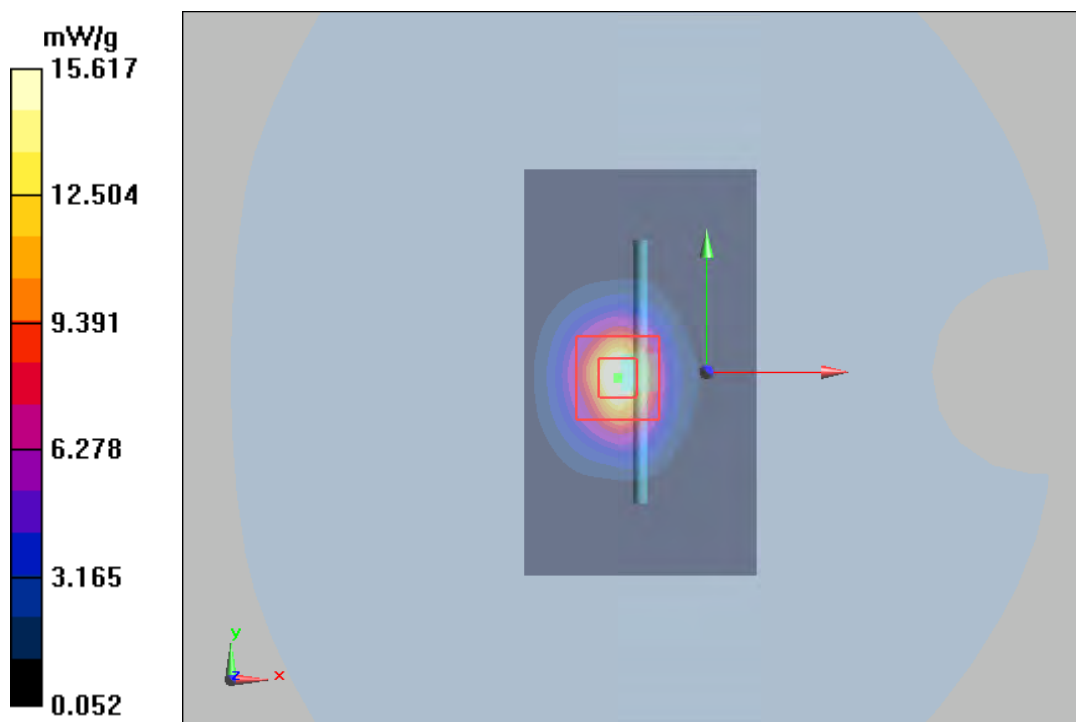

## Plot 15 System Performance Check at 2600 MHz TSL

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2**

Date: 9/3/2020

Communication System: CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.94$  S/m;  $\epsilon_r = 38.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (4x7x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.59 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.858 W/kg

**SAR(1 g) = 13.88 mW/g; SAR(10 g) = 6.09 mW/g**

Maximum value of SAR (measured) = 15.66 mW/g



## Plot 16 System Performance Check at 2600 MHz TSL

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2**

Date: 9/4/2020

Communication System: CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 38.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (4x7x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.32 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.465 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 31.85 W/kg

**SAR(1 g) = 13.94 mW/g; SAR(10 g) = 6.11 mW/g**

Maximum value of SAR (measured) = 15.65 mW/g

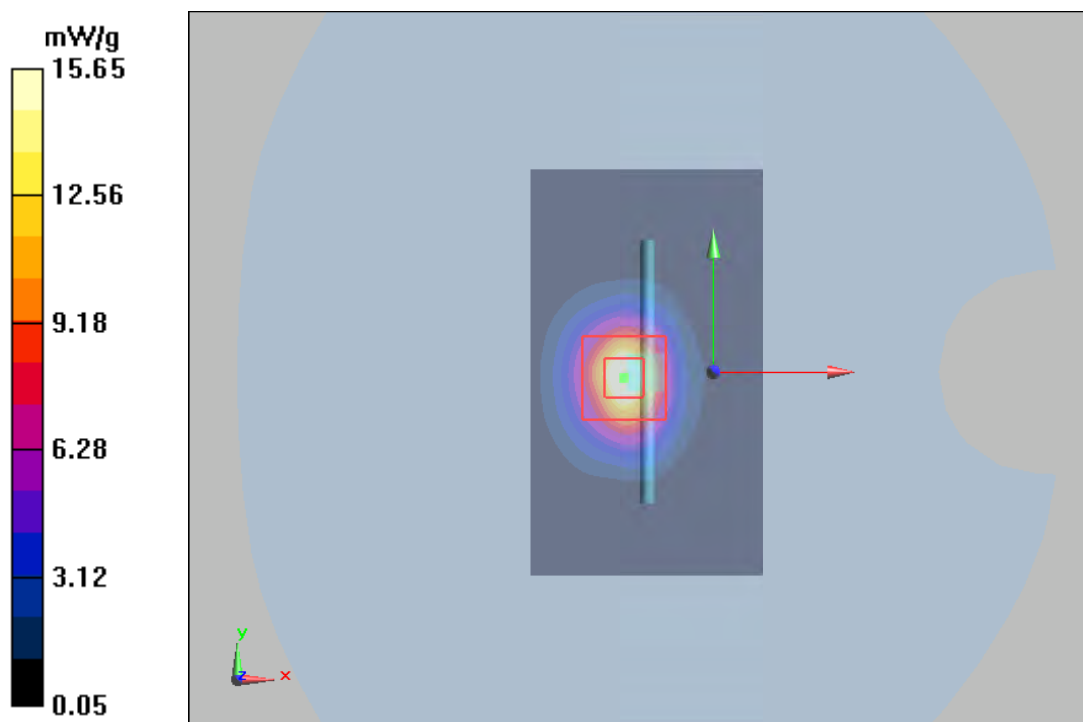

## Plot 17 System Performance Check at 2600 MHz TSL

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2**

Date: 9/7/2020

Communication System: CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.95$  mho/m;  $\epsilon_r = 38.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=250mW/Area Scan (6x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.59 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.858 W/kg

**SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.09 mW/g**

Maximum value of SAR (measured) = 15.66 mW/g

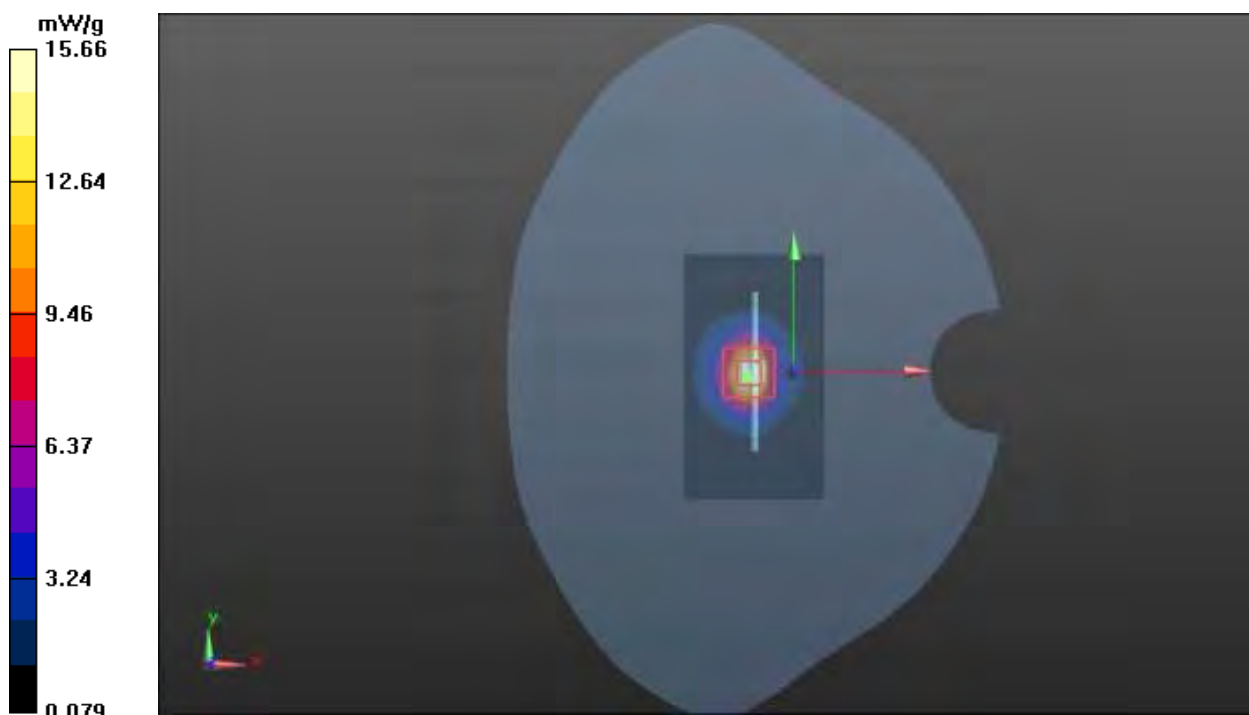

## Plot 18 System Performance Check at 5250 MHz TSL

**DUT: Dipole 5250 MHz; Type: D5GHzV2; Serial: D5GHzV2**

Date: 9/2/2020

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.80$  S/m;  $\epsilon_r = 35.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.55, 5.55, 5.55); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=100mW/Area Scan (6x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.14 mW/g


**d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 33.6 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 52.2 W/kg

**SAR(1 g) = 7.87 mW/g; SAR(10 g) = 2.25 mW/g**

Maximum value of SAR (measured) = 9.73 mW/g

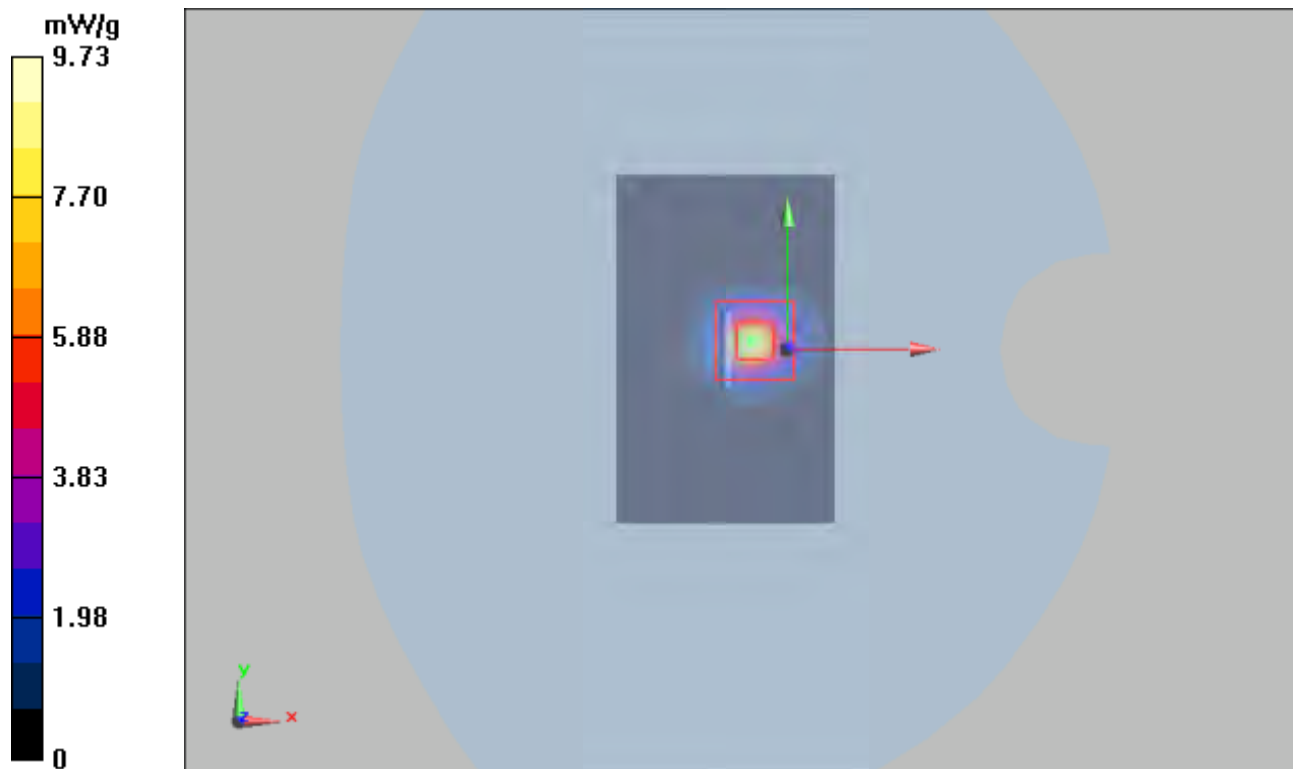

## Plot 19 System Performance Check at 5600 MHz TSL

**DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: D5GHzV2**

Date: 9/5/2020

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.21$  S/m;  $\epsilon_r = 34.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(4.97, 4.97, 4.97); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=100mW/Area Scan (6x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.25 mW/g


**d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.1 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 22.9 W/kg

**SAR(1 g) = 7.67 mW/g; SAR(10 g) = 2.27 mW/g**

Maximum value of SAR (measured) = 8.67 mW/g

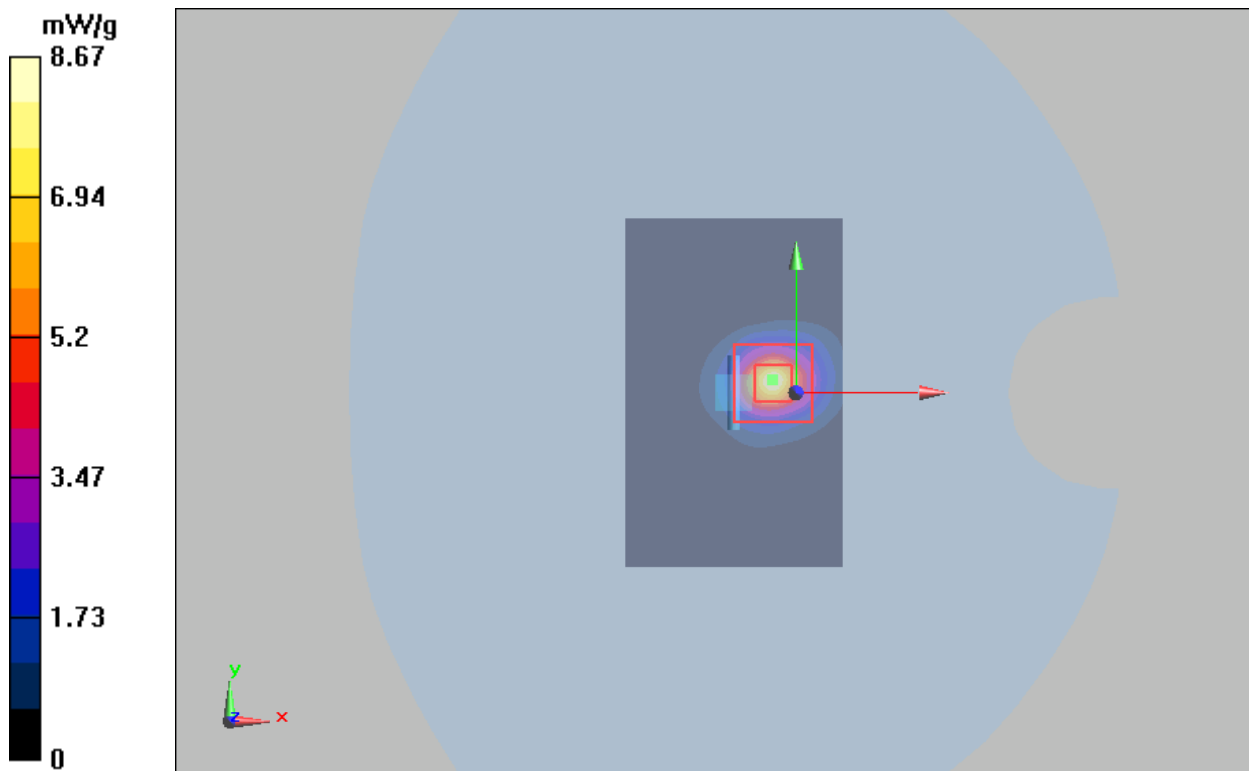

## Plot 20 System Performance Check at 5750 MHz TSL

**DUT: Dipole 5750 MHz; Type: D5GHzV2; Serial: D5GHzV2**

Date: 9/5/2020

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.21$  S/m;  $\epsilon_r = 34.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.00, 5.00, 5.00); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**d=10mm, Pin=100mW/Area Scan (6x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.31 mW/g


**d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.1 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 23.4 W/kg

**SAR(1 g) = 7.66 mW/g; SAR(10 g) = 2.27 mW/g**

Maximum value of SAR (measured) = 8.976 mW/g

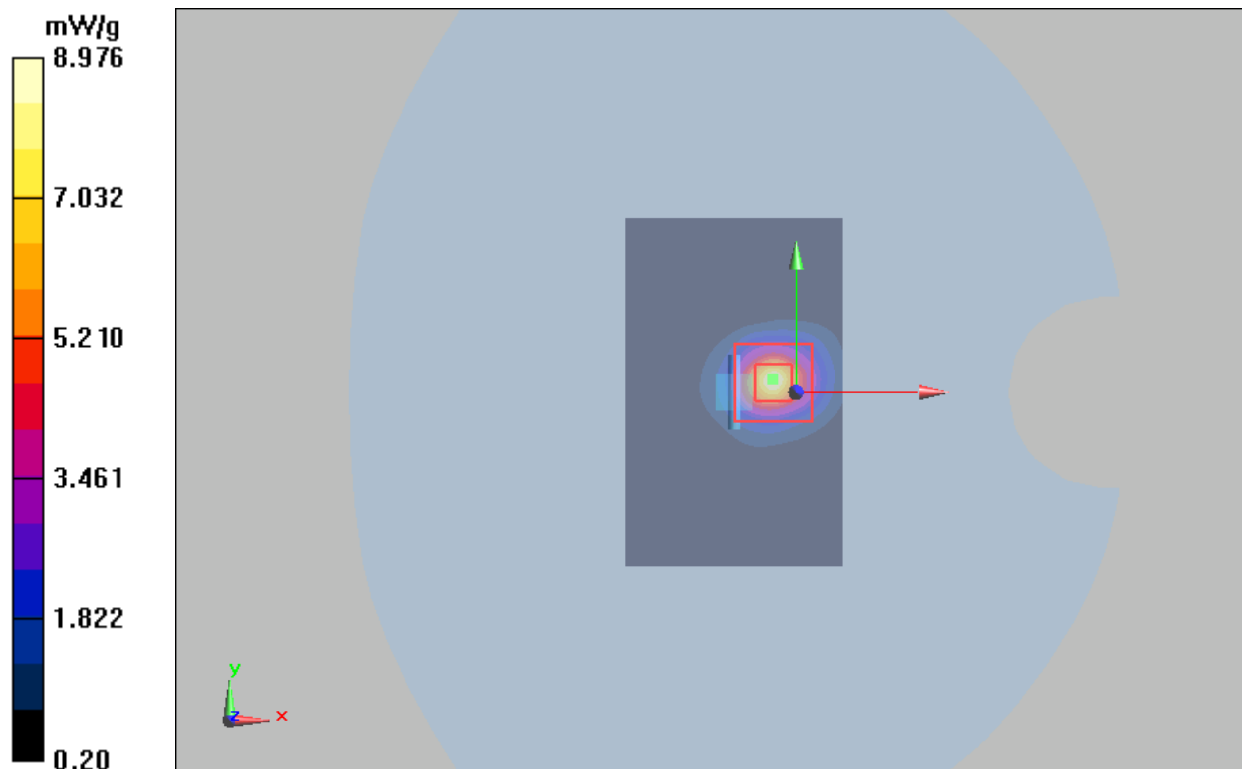

## ANNEX C: Highest Graph Results

### Plot 21 GSM 850 Left Cheek Middle (WWAN Antenna Down)

Date: 8/17/2020

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Left Cheek Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.127 W/kg


**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.610 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.151 W/kg

**SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.128 W/kg

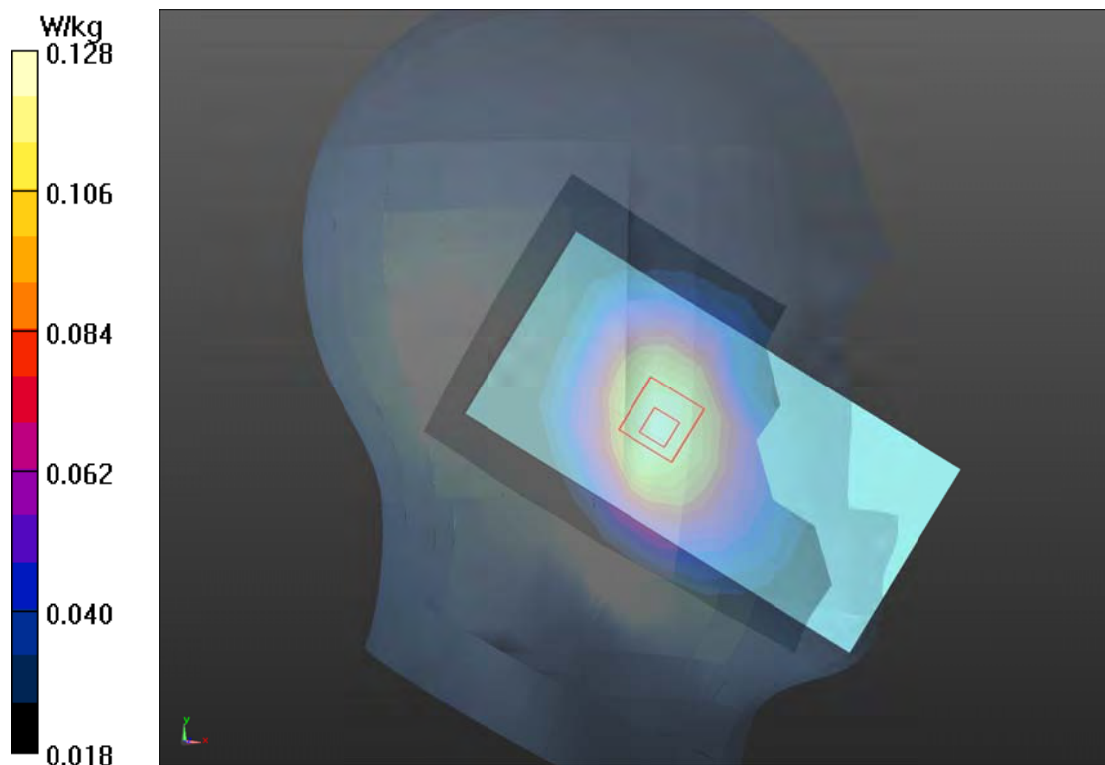

# Plot 22 GSM 850 Back Side Middle (Distance 15mm, WWAN Antenna Down)

Date: 8/17/2020

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.119 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.122 W/kg

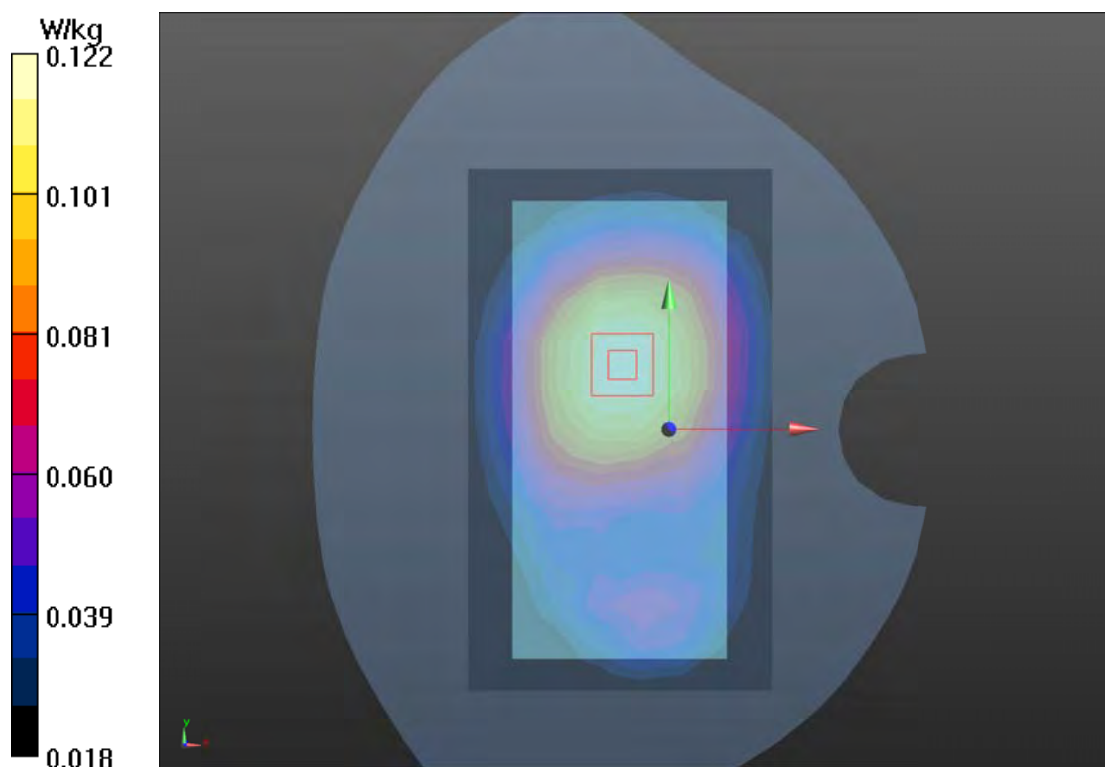

**Plot 23 GSM 850 GPRS (4Txslots) Back Side Middle (Distance 10mm, WWAN Antenna Down)**

Date: 8/17/2020

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.224 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.50 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.279 W/kg

**SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.160 W/kg**

Maximum value of SAR (measured) = 0.229 W/kg

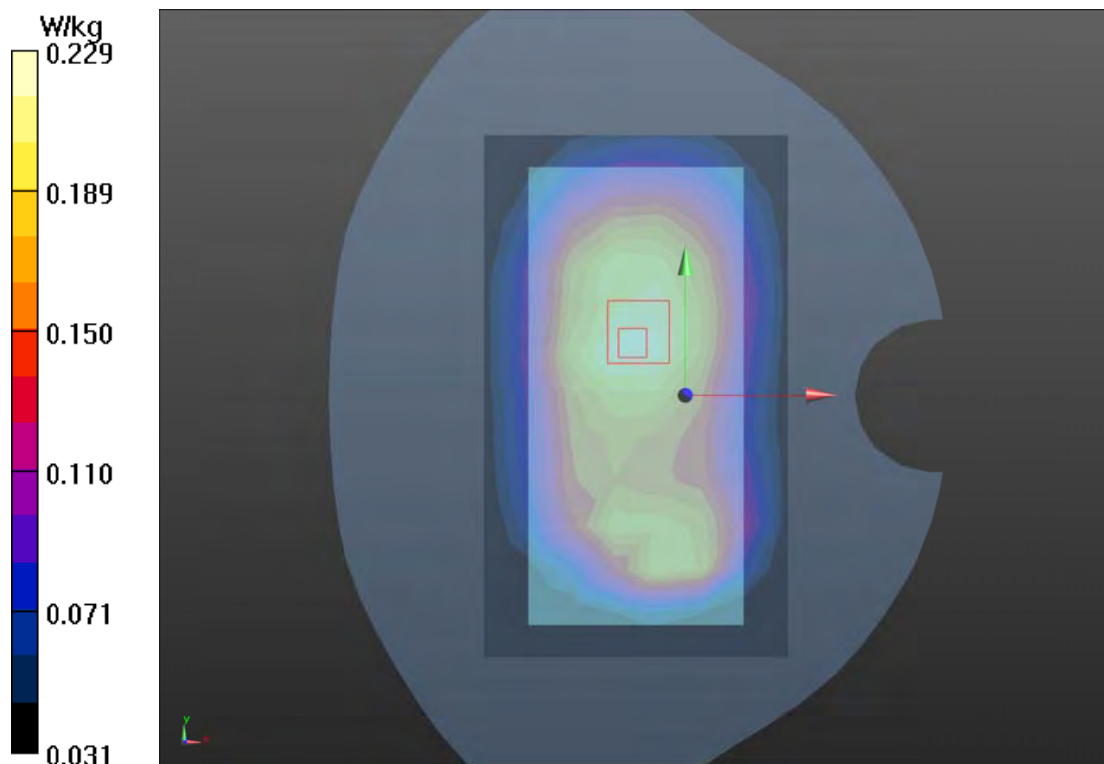

# Plot 24 GSM 1900 Left Cheek Middle (WWAN Antenna Down)

Date: 8/22/2020

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 38.344$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Left Cheek Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.070 W/kg


**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.019 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 0.107 W/kg

**SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.073 W/kg

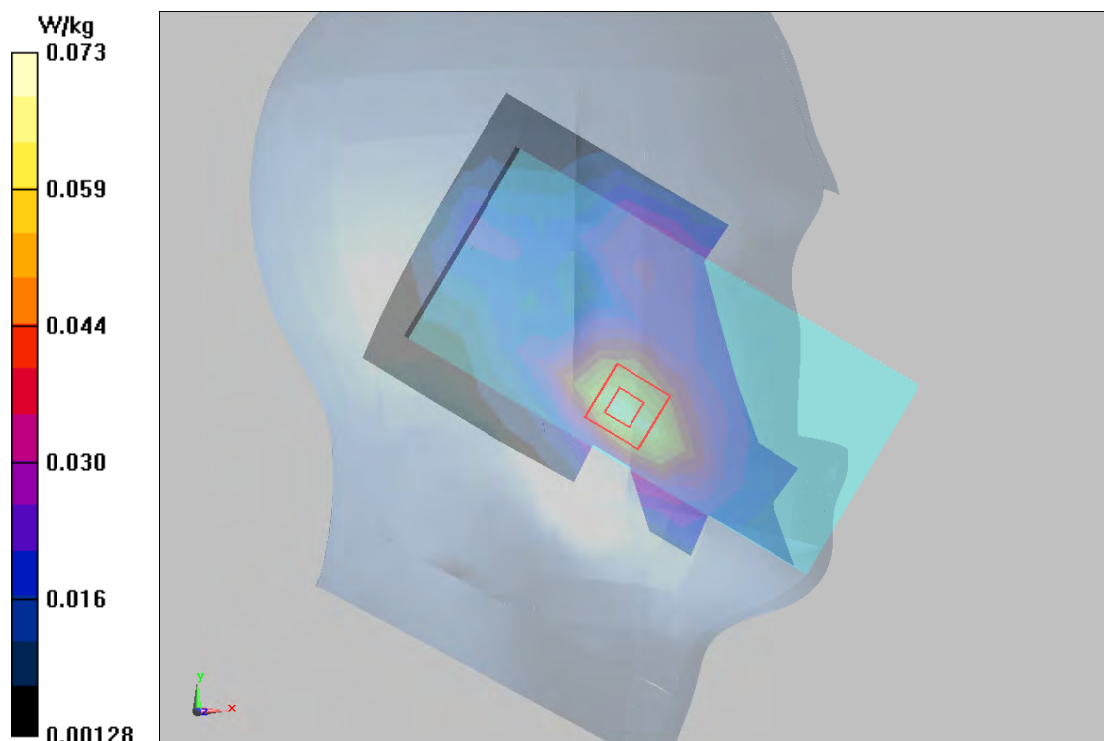

# **Plot 25 GSM 1900 Back Side Middle (Distance 15mm, WWAN Antenna Down)**

Date: 8/22/2020

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 38.344$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.234 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.773 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.366 W/kg

**SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.140 W/kg**

Maximum value of SAR (measured) = 0.251 W/kg

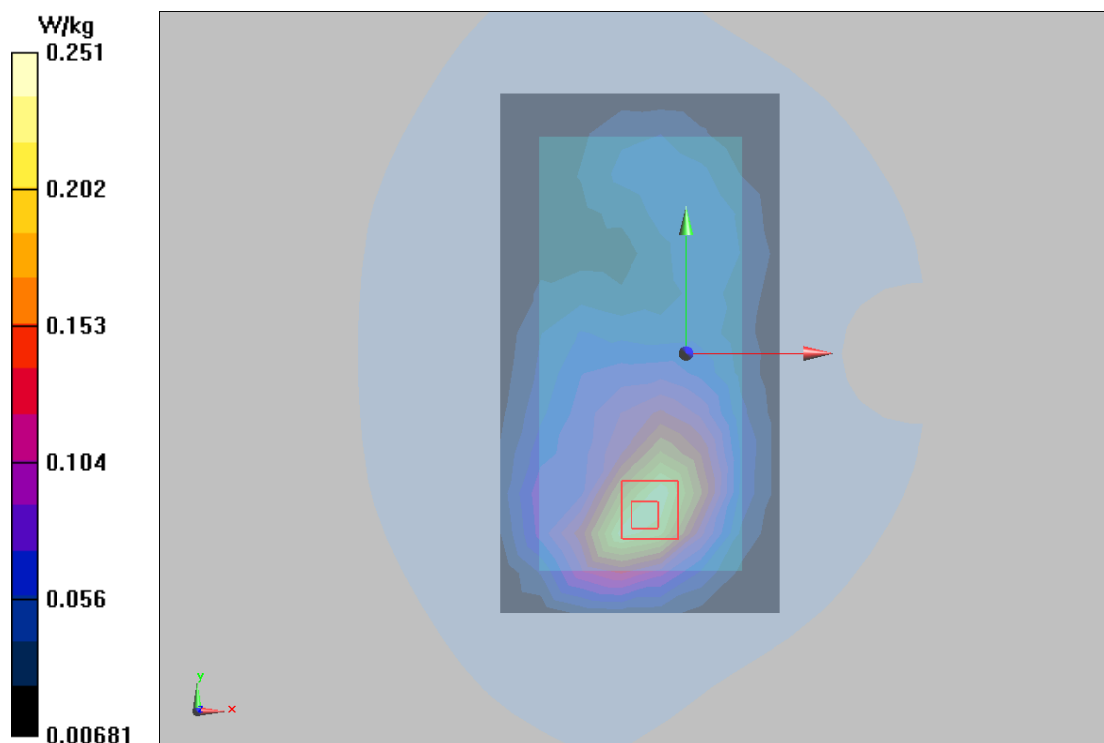

# Plot 26 GSM 1900 GPRS (4Txslots) Bottom Edge Middle (Distance 10mm, WWAN Antenna Down)

Date: 8/22/2020

Communication System: UID 0, GPRS 4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 38.344$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Bottom Edge Middle/Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.790 W/kg


**Bottom Edge Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.47 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.723 W/kg; SAR(10 g) = 0.407 W/kg**

Maximum value of SAR (measured) = 0.785 W/kg

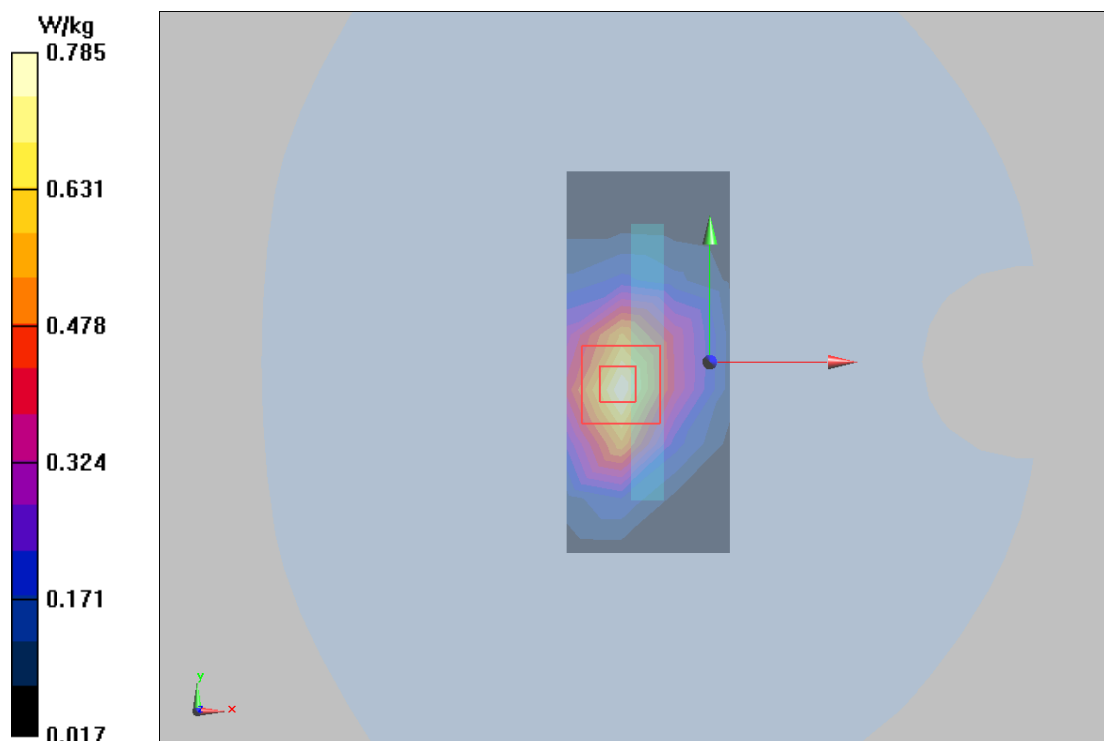

# Plot 27 UMTS Band II Left Cheek Middle (WWAN Antenna Down)

Date: 8/23/2020

Communication System: UID 0, WCDMA 1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 38.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Left Cheek Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0150 W/kg


**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.697 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.078 W/kg

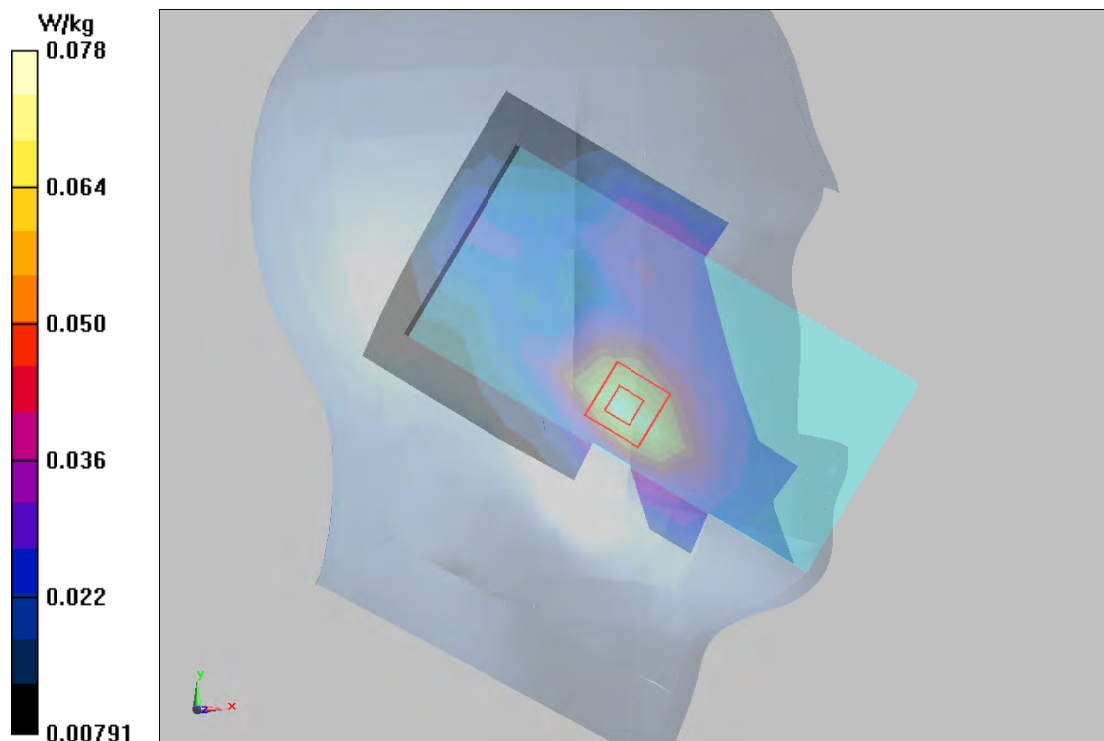

# Plot 28 UMTS Band II Back Side Middle (Distance 15mm, WWAN Antenna Down)

Date: 8/23/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 38.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.245 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.510 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.367 W/kg

**SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.147 W/kg**

Maximum value of SAR (measured) = 0.254 W/kg

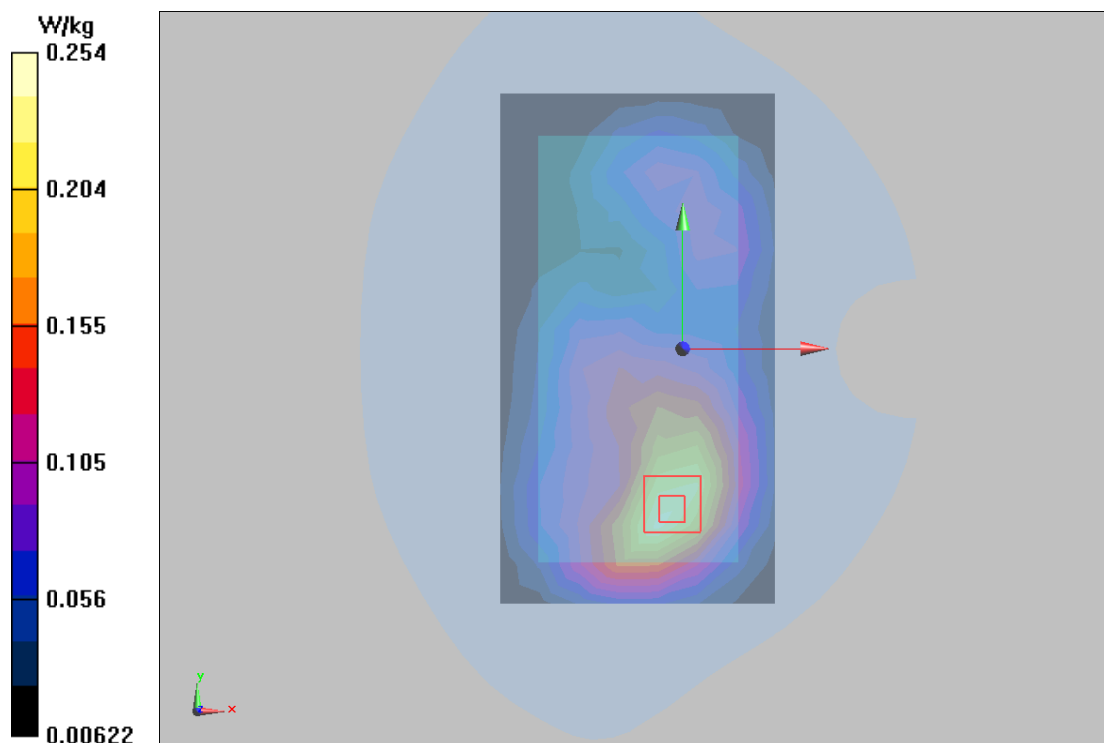

# Plot 29 UMTS Band II Bottom Edge Middle (Distance 10mm, WWAN Antenna Down)

Date: 8/23/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 38.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Bottom Edge Middle/Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.655 W/kg


**Bottom Edge Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.42 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.387 W/kg**

Maximum value of SAR (measured) = 0.748 W/kg

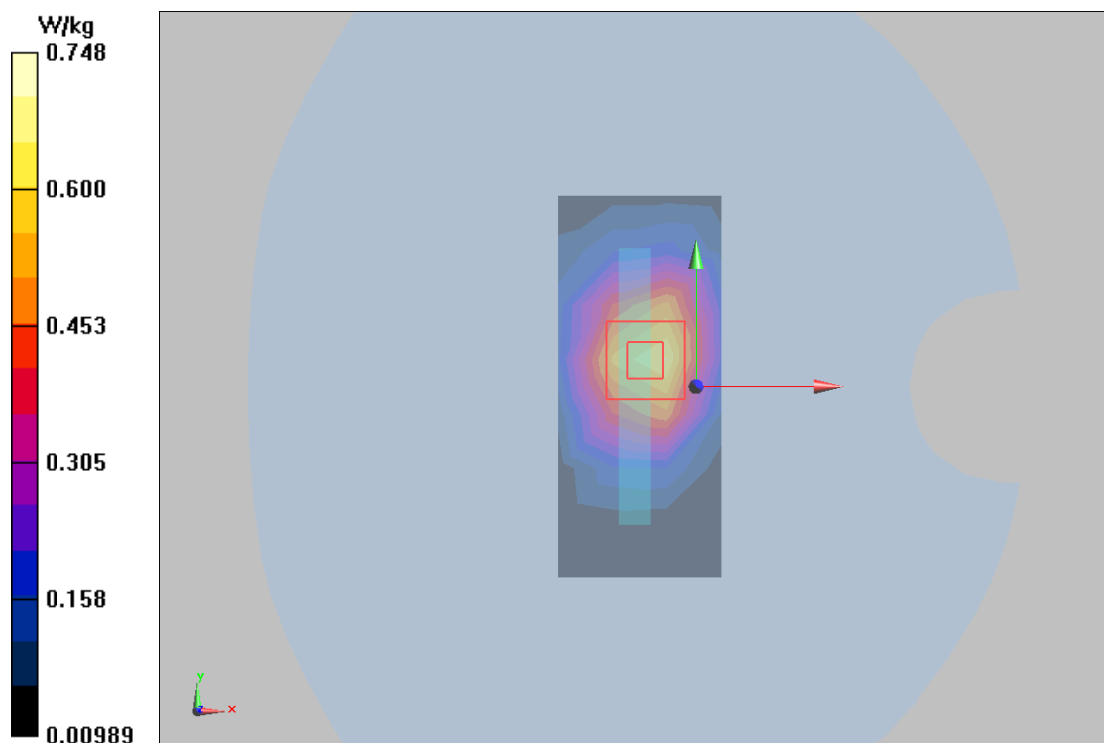

# Plot 30 UMTS Band IV Right Cheek Middle(WWAN Antenna Down)

Date: 8/25/2020

Communication System: UID 0, WCDMA-1700 (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.312$  S/m;  $\epsilon_r = 39.365$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Cheek Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.078 W/kg


**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.032 V/m; Power Drift = 0.157 dB

Peak SAR (extrapolated) = 0.203 W/kg

**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.080 W/kg

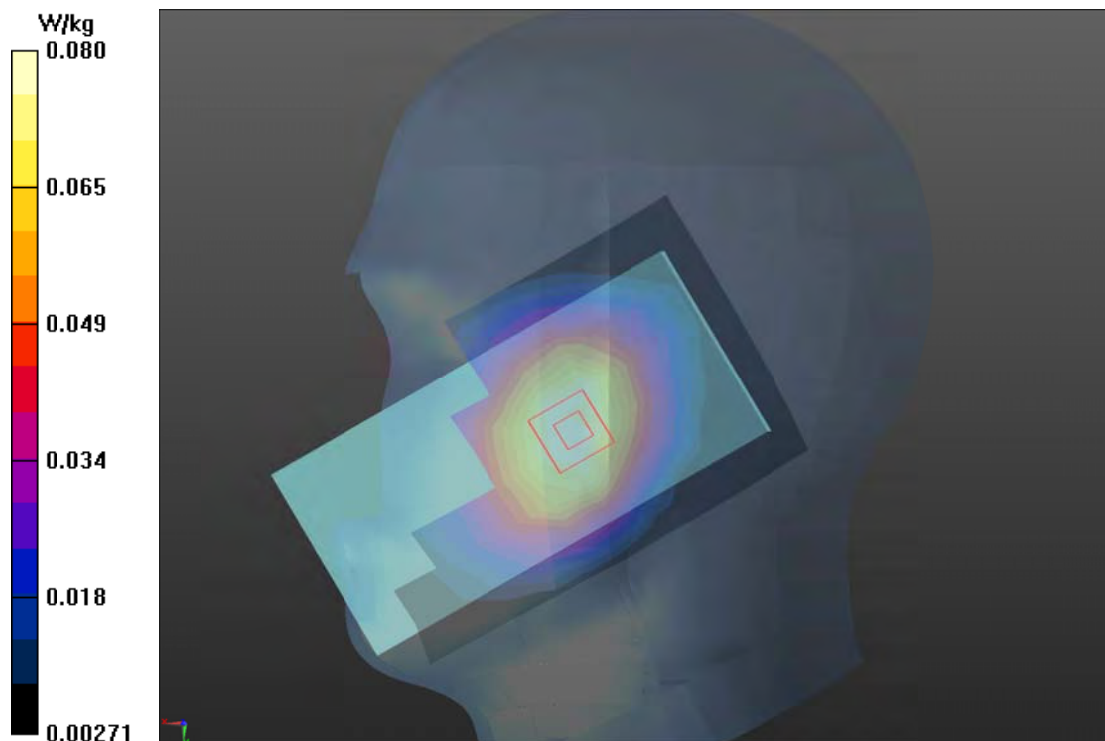

**Plot 31 UMTS Band IV Back Side Middle(Distance 15mm, WWAN Antenna Down)**

Date: 8/25/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.312$  S/m;  $\epsilon_r = 39.365$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.455 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.421 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.638 W/kg

**SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.272 W/kg**

Maximum value of SAR (measured) = 0.457 W/kg

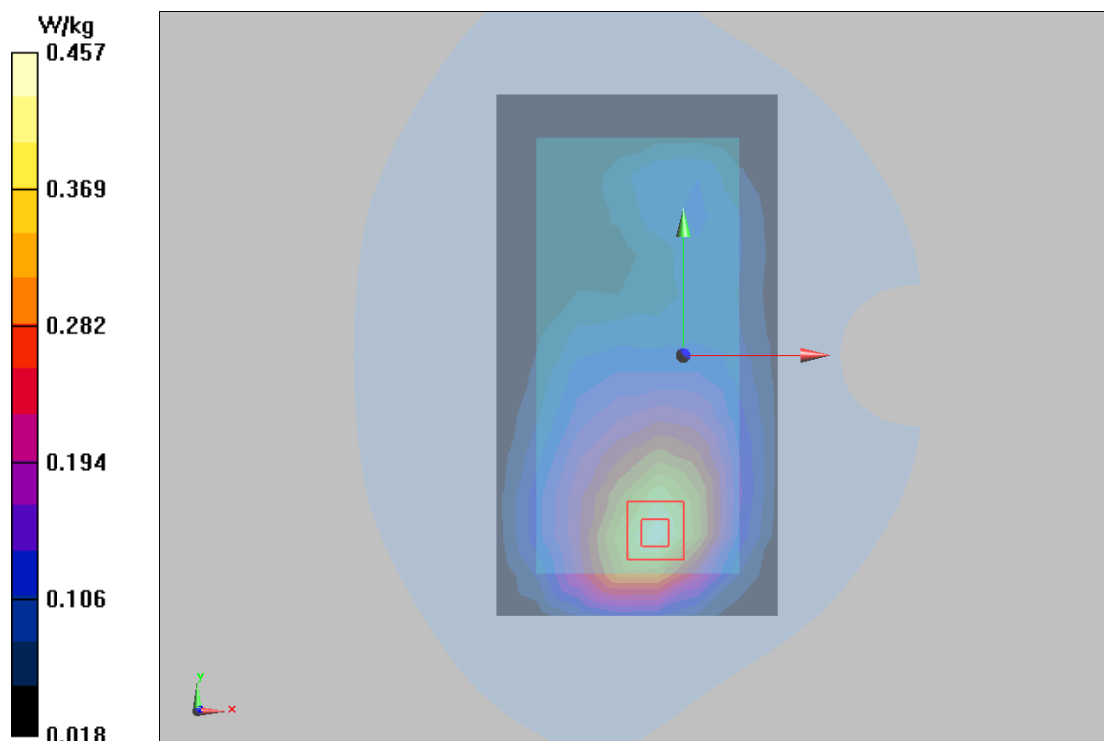

**Plot 32 UMTS Band IV Back Side Middle(Distance 10mm, WWAN Antenna Down)**

Date: 8/25/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.312$  S/m;  $\epsilon_r = 39.365$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.490 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.598 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.286 W/kg**

Maximum value of SAR (measured) = 0.497 W/kg

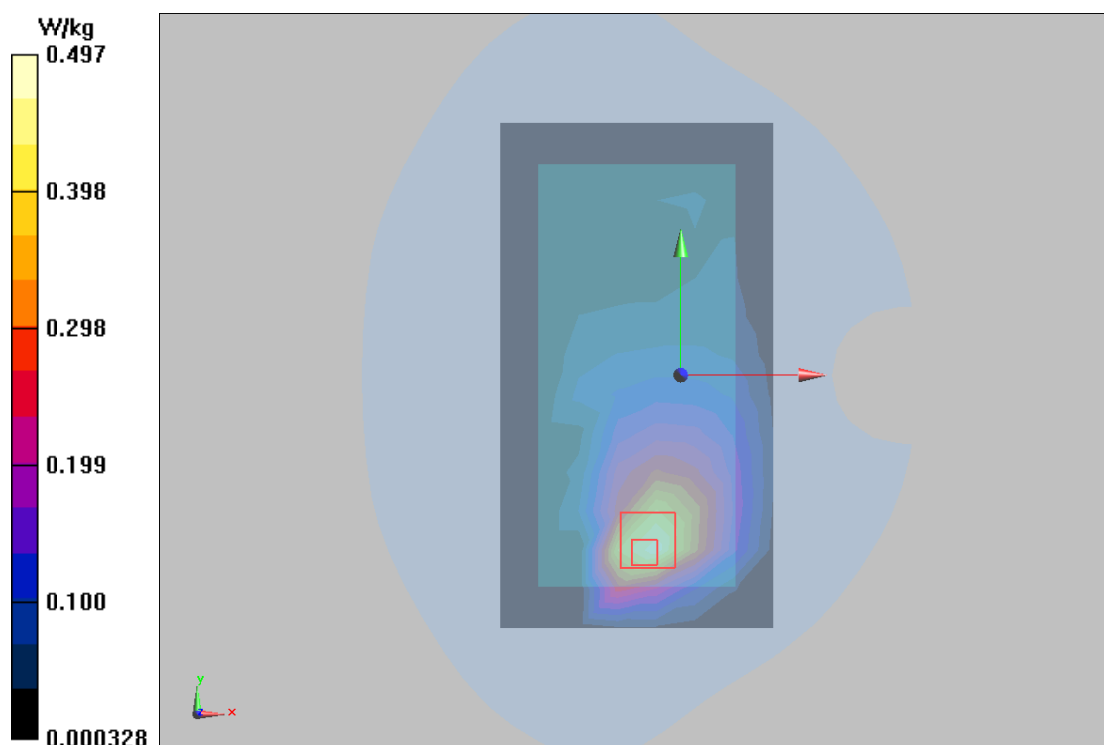

# Plot 33 UMTS Band V Right Cheek Middle (WWAN Antenna Down)

Date: 8/17/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Cheek Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.120 W/kg


**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.684 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.248 W/kg

**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.084 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

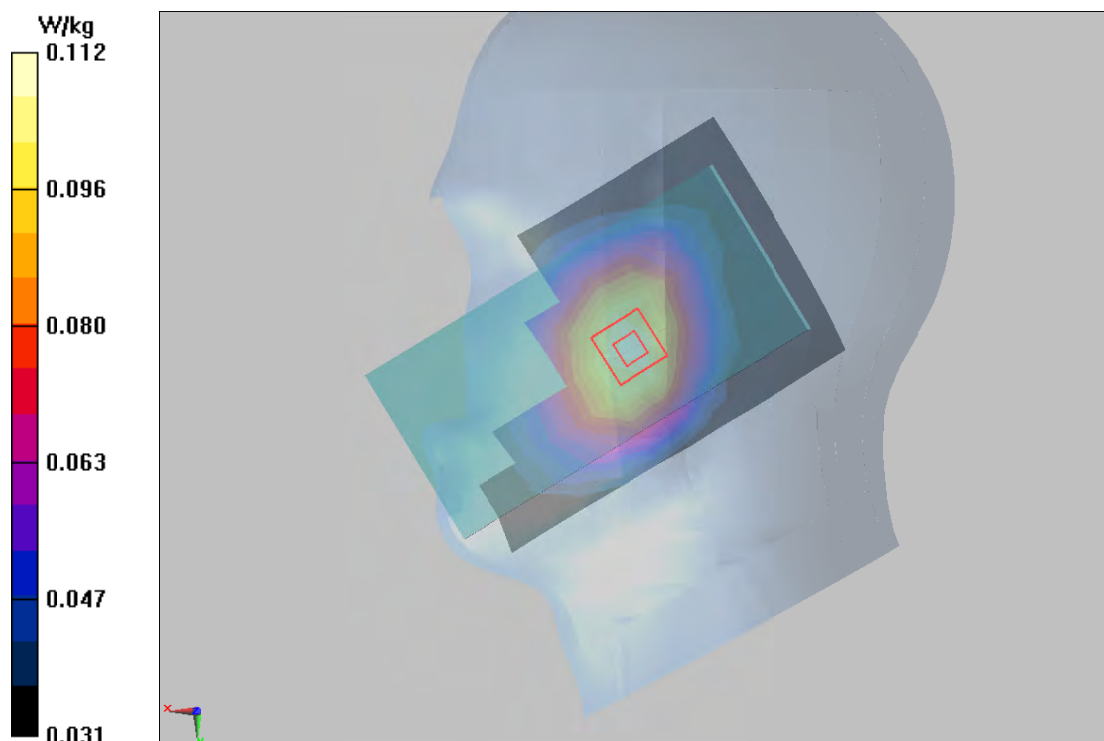

**Plot 34 UMTS Band V Back Side Middle(Distance 15mm, WWAN Antenna Down)**

Date: 8/17/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.188 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.12 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.219 W/kg

**SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.186 W/kg

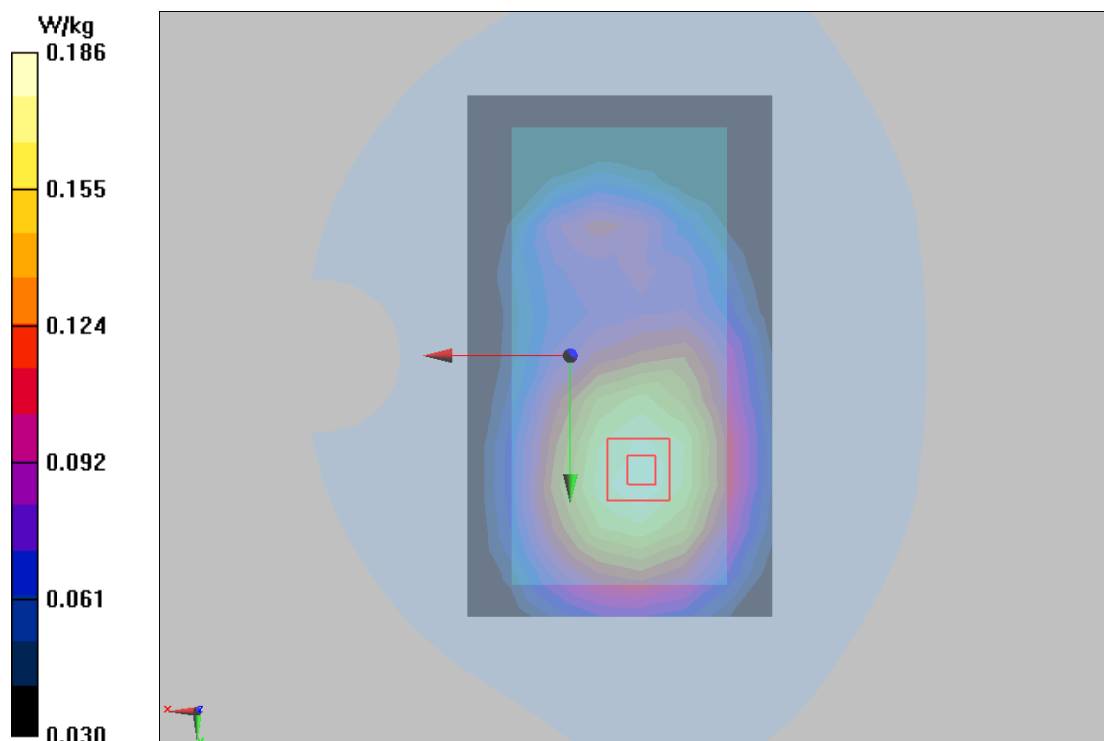

# Plot 35 UMTS Band V Back Side Middle (Distance 10mm, WWAN Antenna Down)

Date: 8/17/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.228 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.22 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.272 W/kg

**SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.162 W/kg**

Maximum value of SAR (measured) = 0.228 W/kg

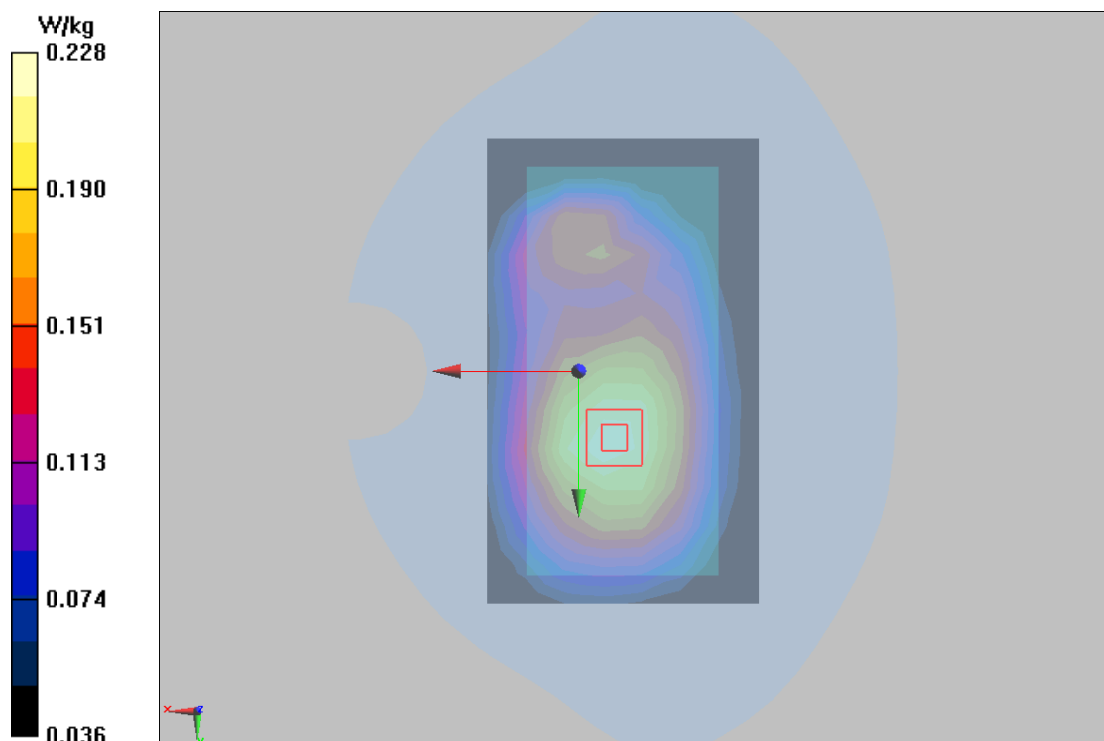

# Plot 36 LTE Band 2 1RB Left Cheek High (WWAN Antenna Down)

Date: 8/23/2020

Communication System: UID 0, LTE-FDD (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.434$  S/m;  $\epsilon_r = 38.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Left Cheek High/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.136 W/kg


**Left Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.662 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.345 W/kg

**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.141 W/kg

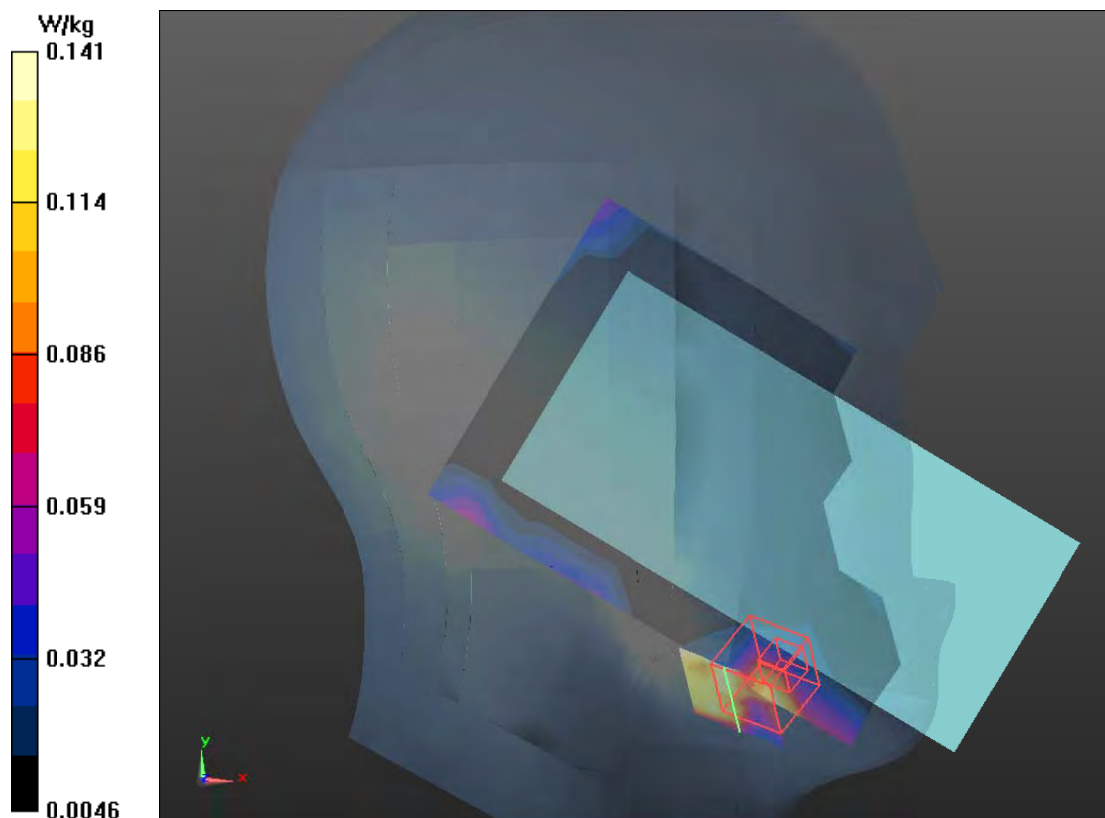

**Plot 37 LTE Band 2 1RB Back Side High(Distance 15mm, WWAN Antenna Down)**

Date: 8/23/2020

Communication System: UID 0, LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.434$  S/m;  $\epsilon_r = 38.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.282 W/kg


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.248 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.406 W/kg

**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.160 W/kg**

Maximum value of SAR (measured) = 0.281 W/kg

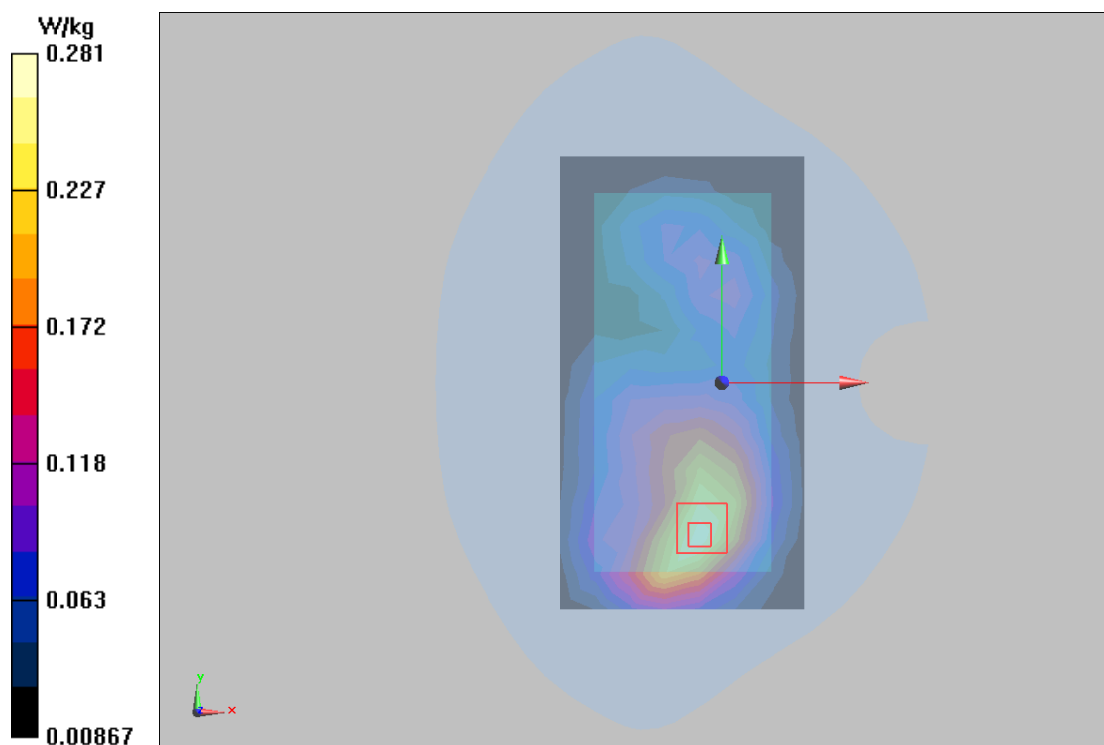

# Plot 38 LTE Band 2 1RB Bottom Edge Low (Distance 10mm, WWAN Antenna Down)

Date: 8/23/2020

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.407$  S/m;  $\epsilon_r = 39.071$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Bottom Edge Low/Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 W/kg


**Bottom Edge Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.43 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.943 W/kg; SAR(10 g) = 0.533 W/kg**

Maximum value of SAR (measured) = 1.030 W/kg

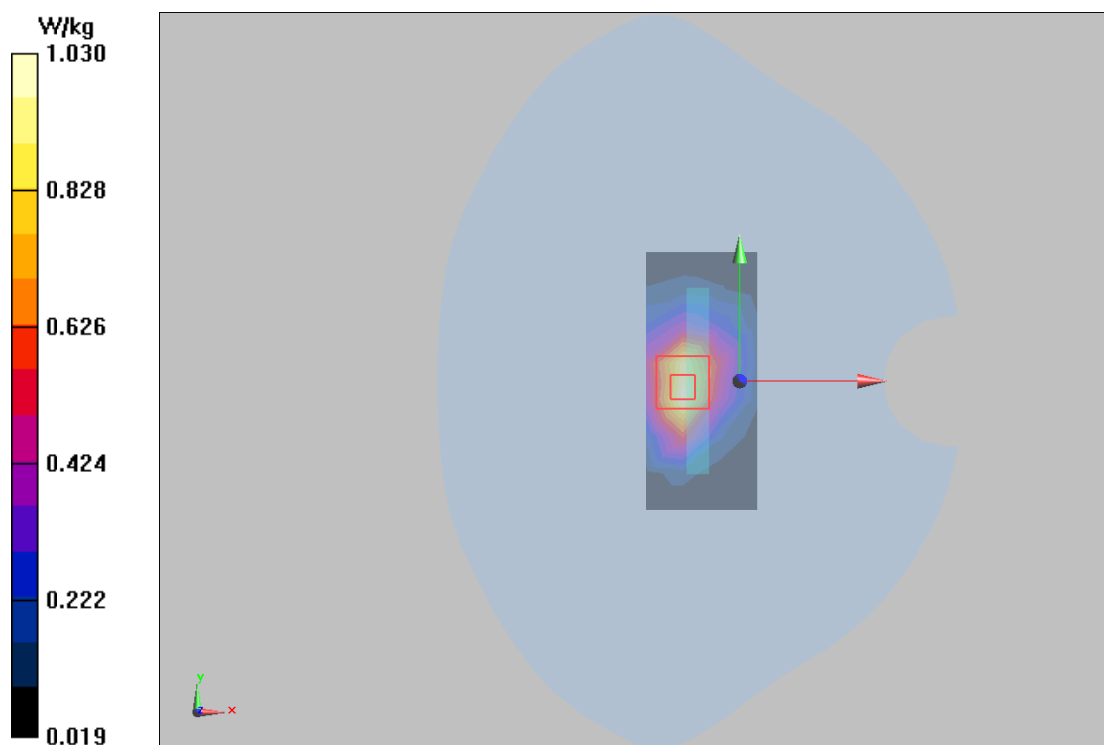

# Plot 39 LTE Band 4 50%RB Right Tilt High (WWAN Antenna Down)

Date: 8/26/2020

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.301$  S/m;  $\epsilon_r = 38.753$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Tilt High/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0592 W/kg


**Right Tilt High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.599 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0580 W/kg

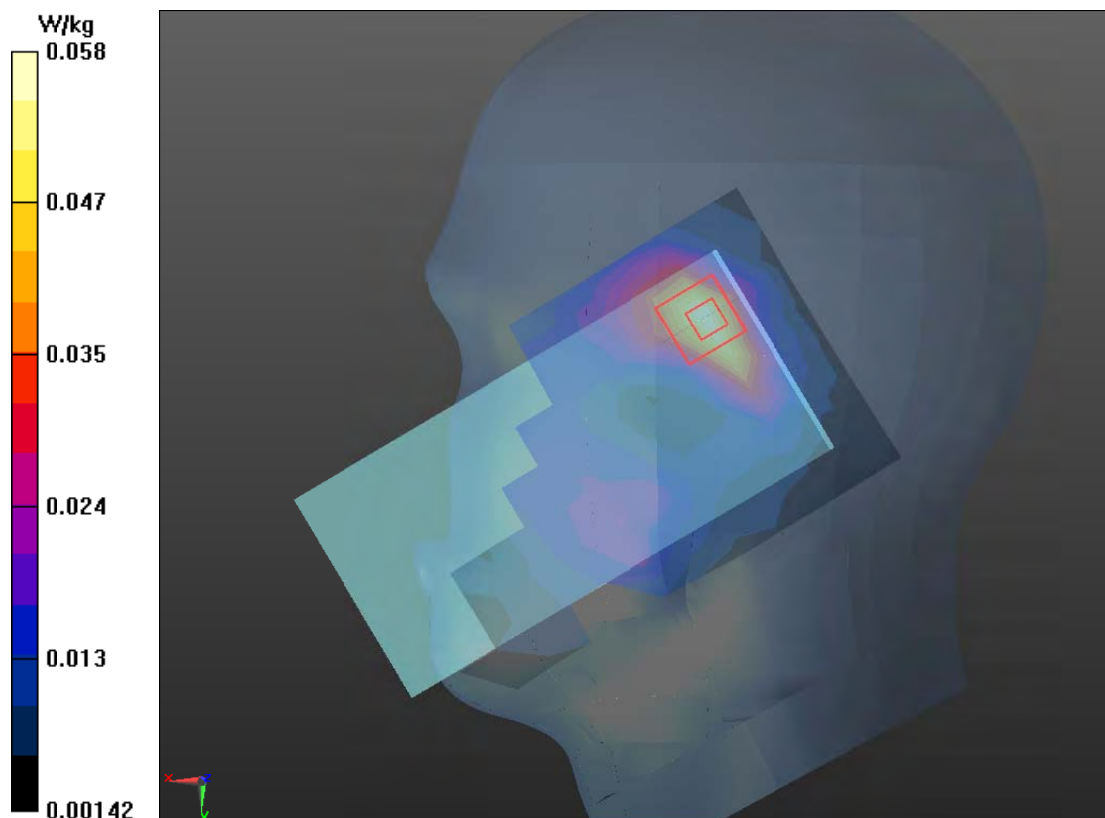

# **Plot 40 LTE Band 4 1RB Back Side Middle (Distance 15mm, WWAN Antenna Down)**

Date: 8/26/2020

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.313$  S/m;  $\epsilon_r = 39.384$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.375 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.902 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.582 W/kg

**SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.242 W/kg**

Maximum value of SAR (measured) = 0.414 W/kg

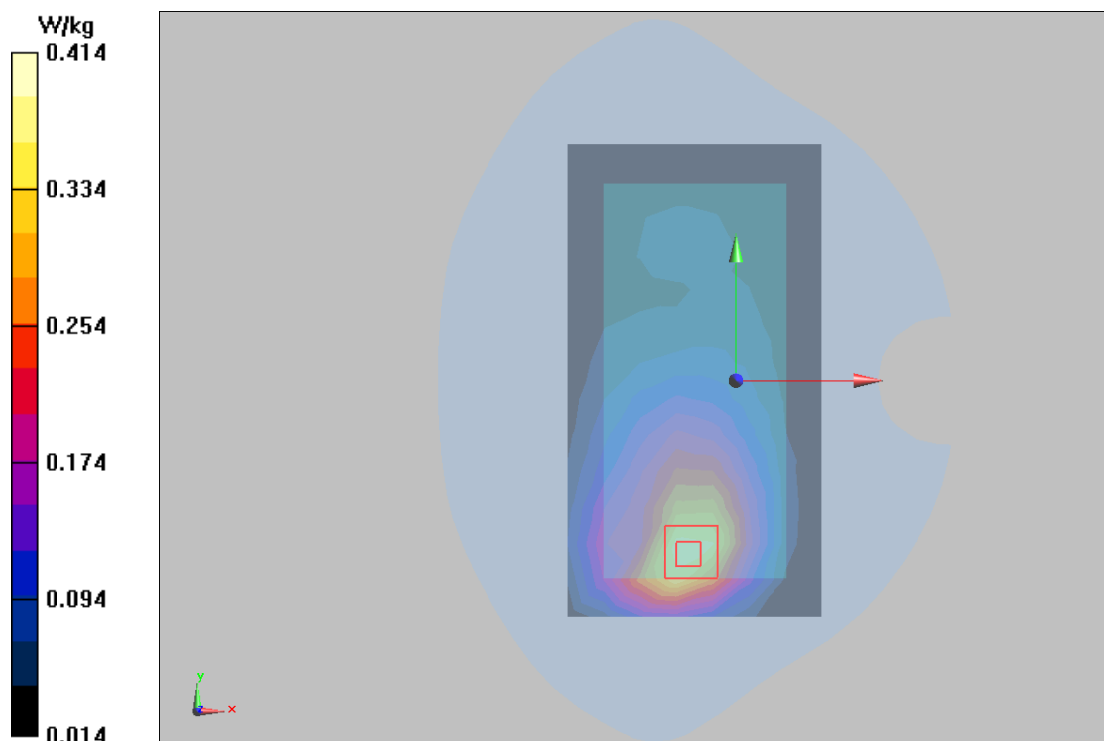

**Plot 41 LTE Band 4 50%RB Bottom Edge Middle (Distance 10mm, WWAN Antenna Down)**

Date: 8/26/2020

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.293$  S/m;  $\epsilon_r = 38.785$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Bottom Edge Middle/Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.695 W/kg


**Bottom Edge Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.67 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.371 W/kg**

Maximum value of SAR (measured) = 0.715 W/kg

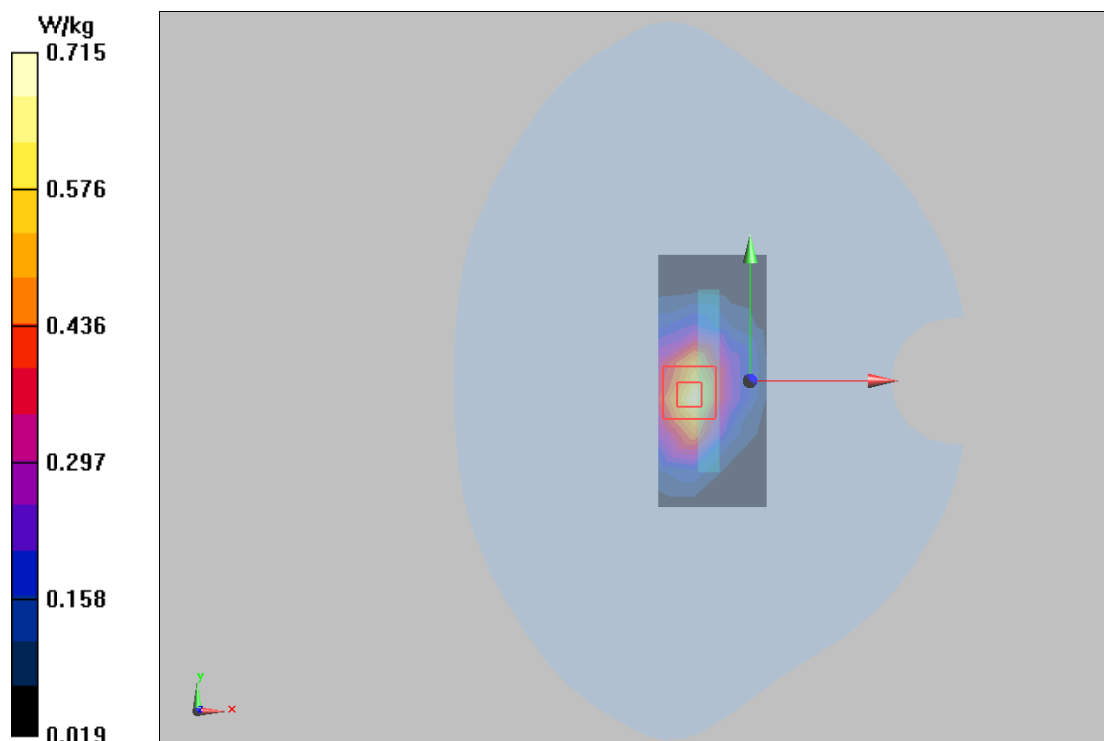

# Plot 42 LTE Band 5 1RB Right Cheek Middle(WWAN Antenna Down)

Date: 8/19/2020

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.199$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Cheek Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.154 W/kg


**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.765 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.169 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.147 W/kg

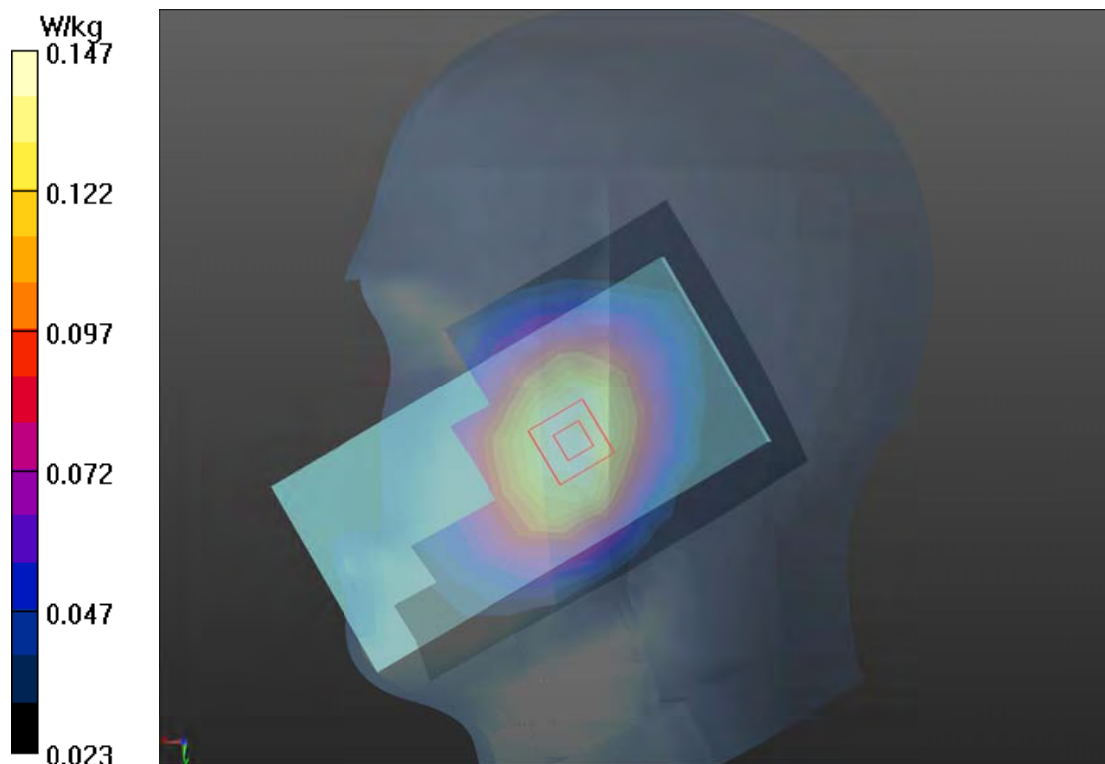

**Plot 43 LTE Band 5 1RB Back Side Middle(Distance 15mm, WWAN Antenna Down)**

Date: 8/19/2020

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.199$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.165 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.49 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.194 W/kg

**SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.165 W/kg

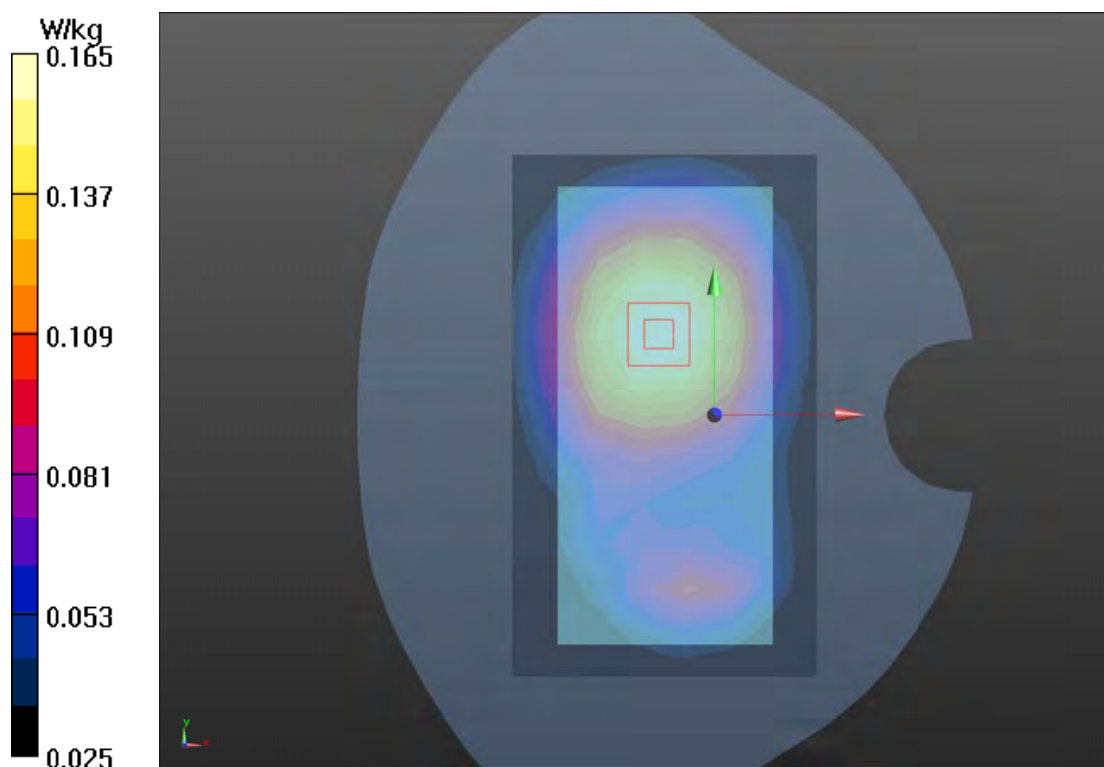

# Plot 44 LTE Band 5 1RB Back Side Middle (Distance 10mm, WWAN Antenna Down)

Date: 8/19/2020

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.199$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.263 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.50 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.410 W/kg

**SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.142 W/kg**

Maximum value of SAR (measured) = 0.260 W/kg

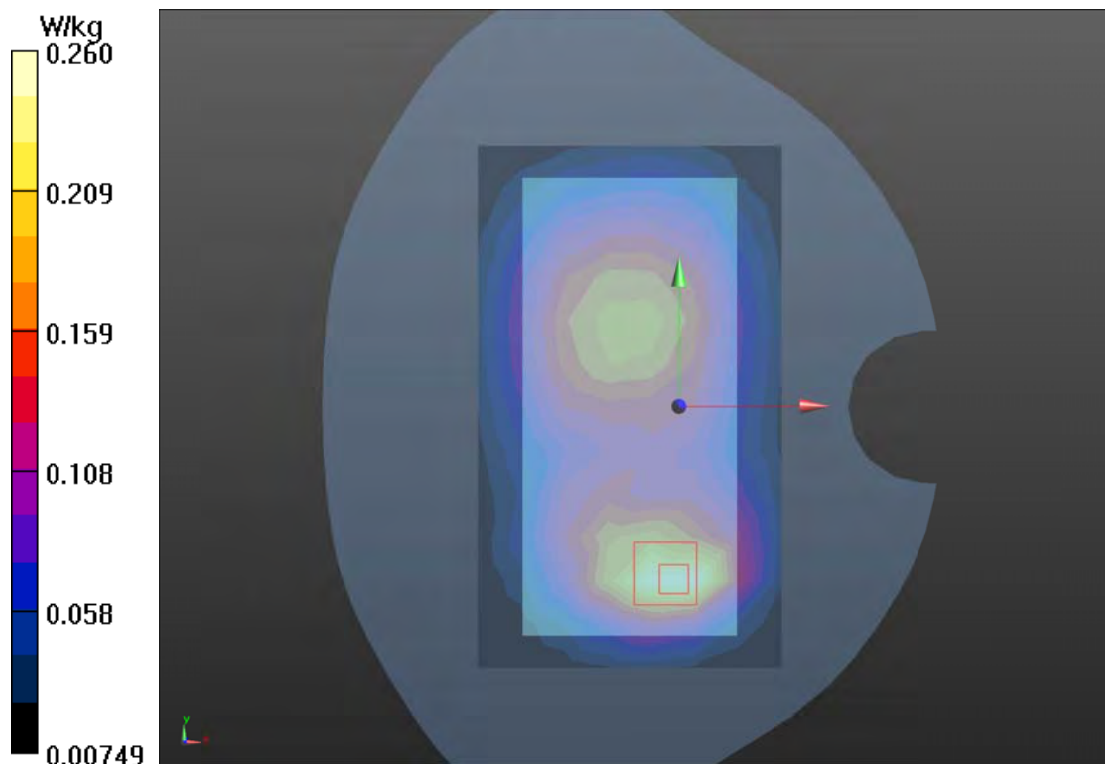

# Plot 45 LTE Band 7 1RB Right Cheek Low (WWAN Antenna Down)

Date: 9/1/2020

Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.876$  S/m;  $\epsilon_r = 38.352$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Cheek Low/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.224 W/kg


**Right Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.296 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.405 W/kg

**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.126 W/kg**

Maximum value of SAR (measured) = 0.238 W/kg

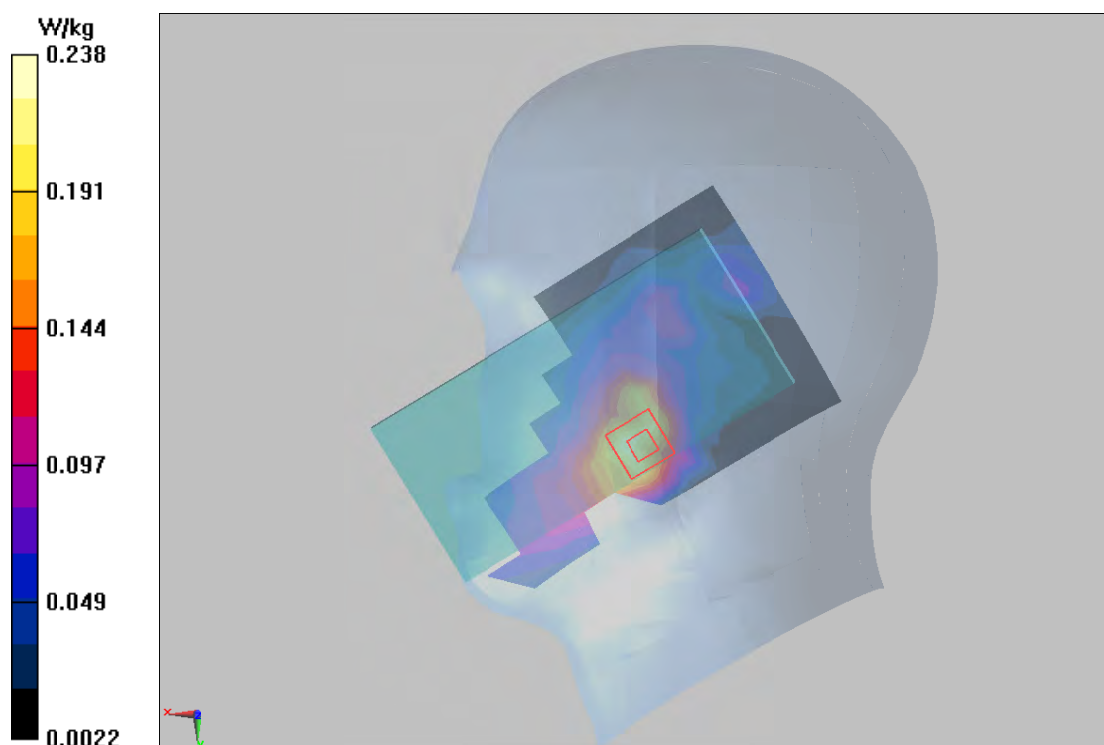

**Plot 46 LTE Band 7 1RB Back Side Low (Distance 15mm, WWAN Antenna Down)**

Date: 9/1/2020

Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.876$  S/m;  $\epsilon_r = 38.352$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Low/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.440 W/kg


**Back Side Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.622 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 0.603 W/kg

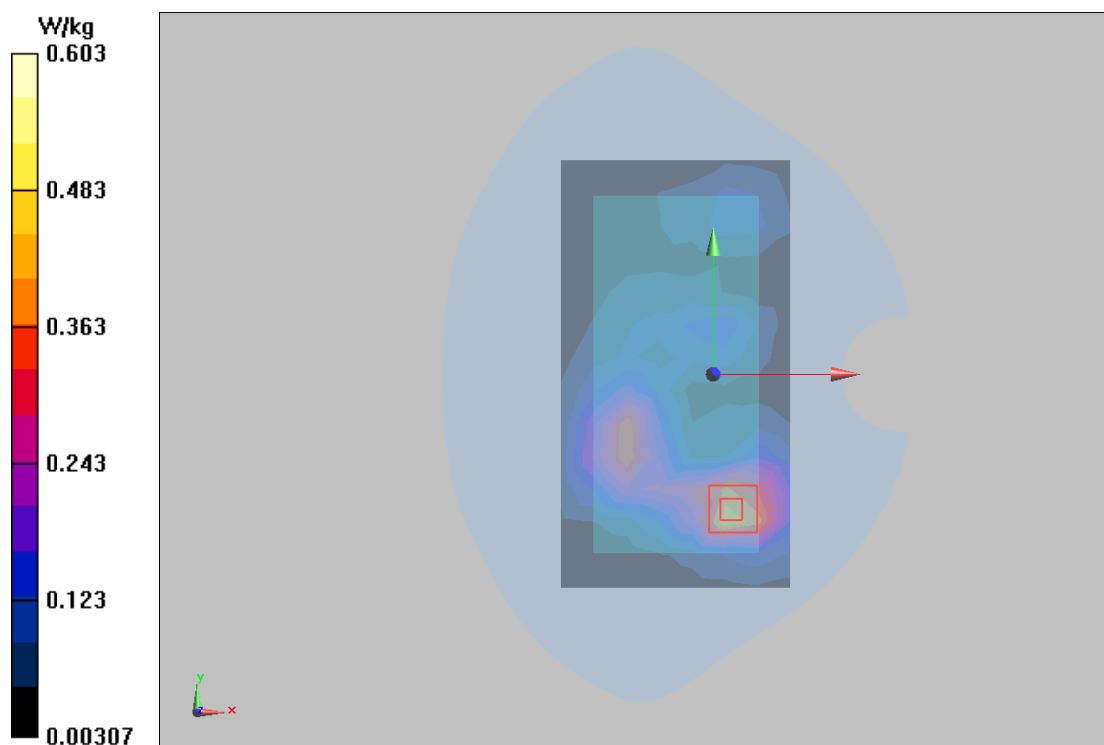

**Plot 47 LTE Band 7 1RB Back Side Low (Distance 10mm, WWAN Antenna Down)**

Date: 9/1/2020

Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.876$  S/m;  $\epsilon_r = 38.352$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Low/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.764 W/kg


**Back Side Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.017 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 2.27 W/kg

**SAR(1 g) = 0.994 W/kg; SAR(10 g) = 0.423 W/kg**

Maximum value of SAR (measured) = 1.140 W/kg

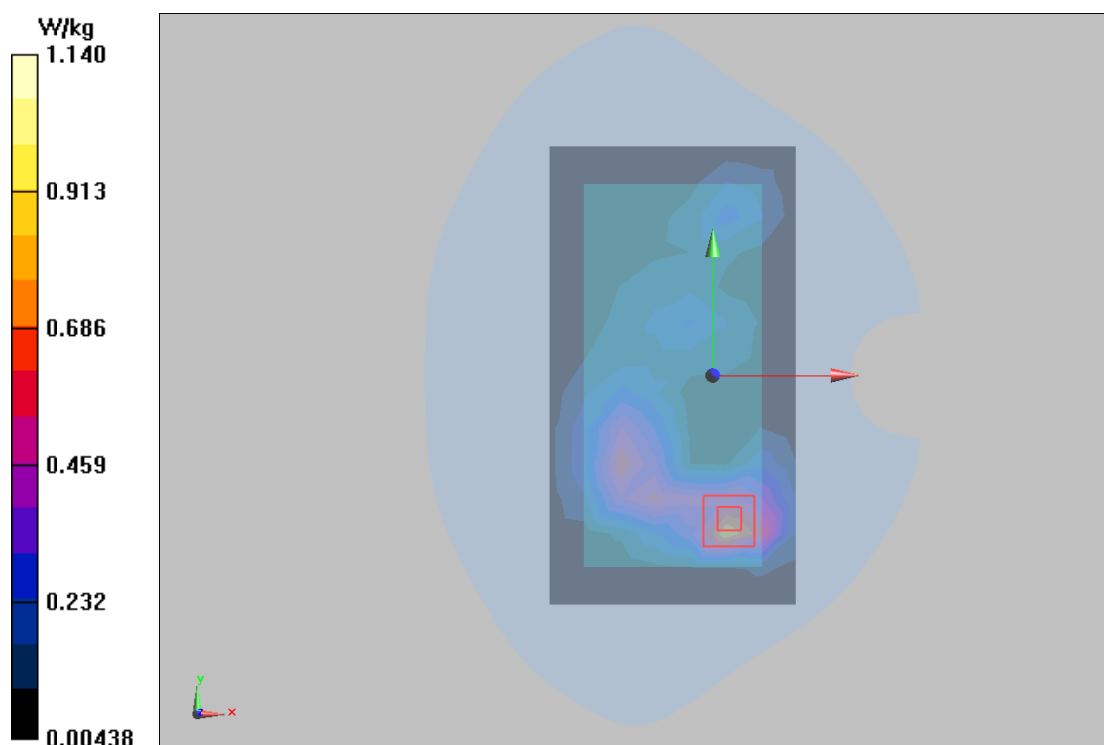

# Plot 48 LTE Band 12 1RB Left Cheek High (WWAN Antenna Down)

Date: 8/18/2020

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 42.755$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Left Cheek High/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0517 W/kg


**Left Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.623 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.0620 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0520 W/kg

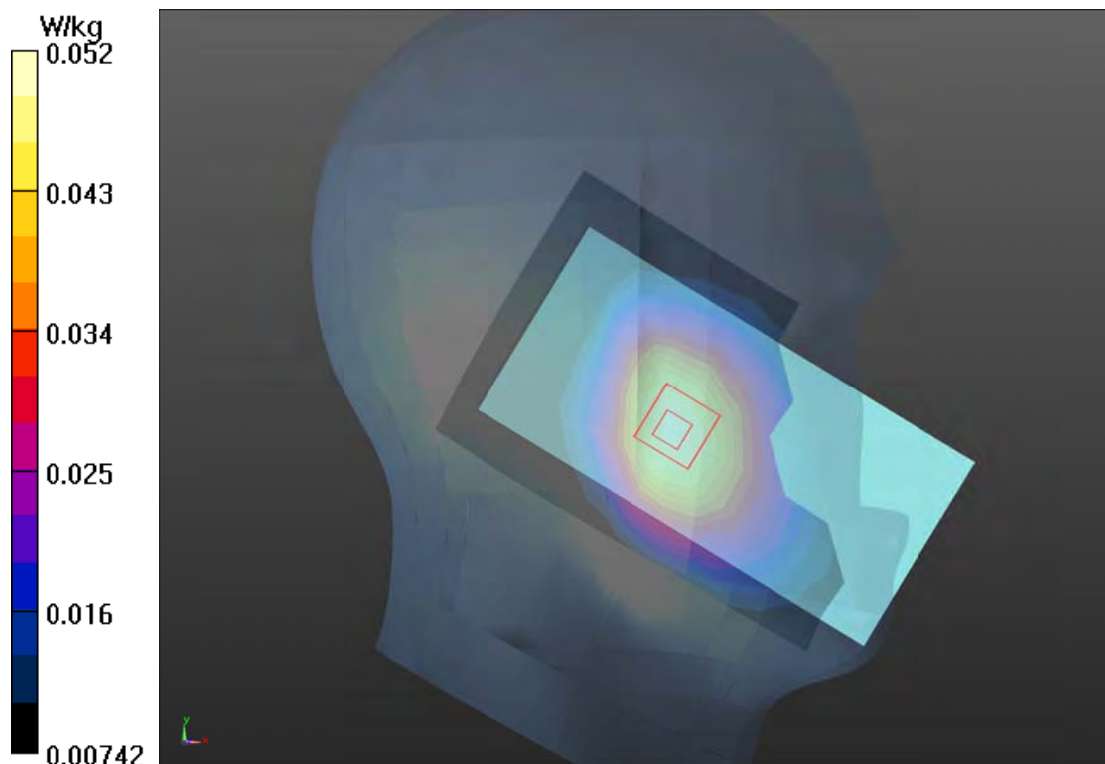

# Plot 49 LTE Band 12 1RB Back Side High (Distance 15mm, WWAN Antenna Down)

Date: 8/18/2020

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 42.755$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 W/kg


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.39 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.130 W/kg

**SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.084 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

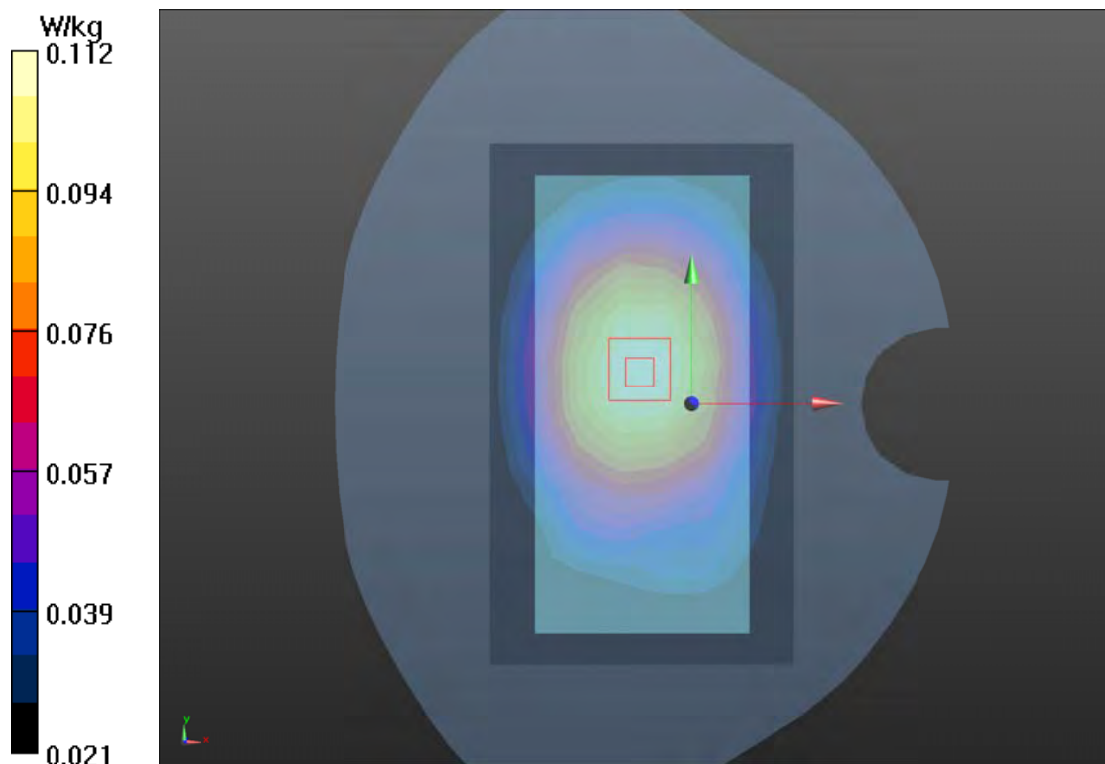

# Plot 50 LTE Band 12 1RB Back Side High (Distance 10mm, WWAN Antenna Down)

Date: 8/18/2020

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711 \text{ MHz}$ ;  $\sigma = 0.85 \text{ S/m}$ ;  $\epsilon_r = 42.755$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.102 \text{ W/kg}$


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $10.75 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$

Peak SAR (extrapolated) =  $0.115 \text{ W/kg}$

**SAR(1 g) =  $0.119 \text{ W/kg}$ ; SAR(10 g) =  $0.086 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.132 \text{ W/kg}$

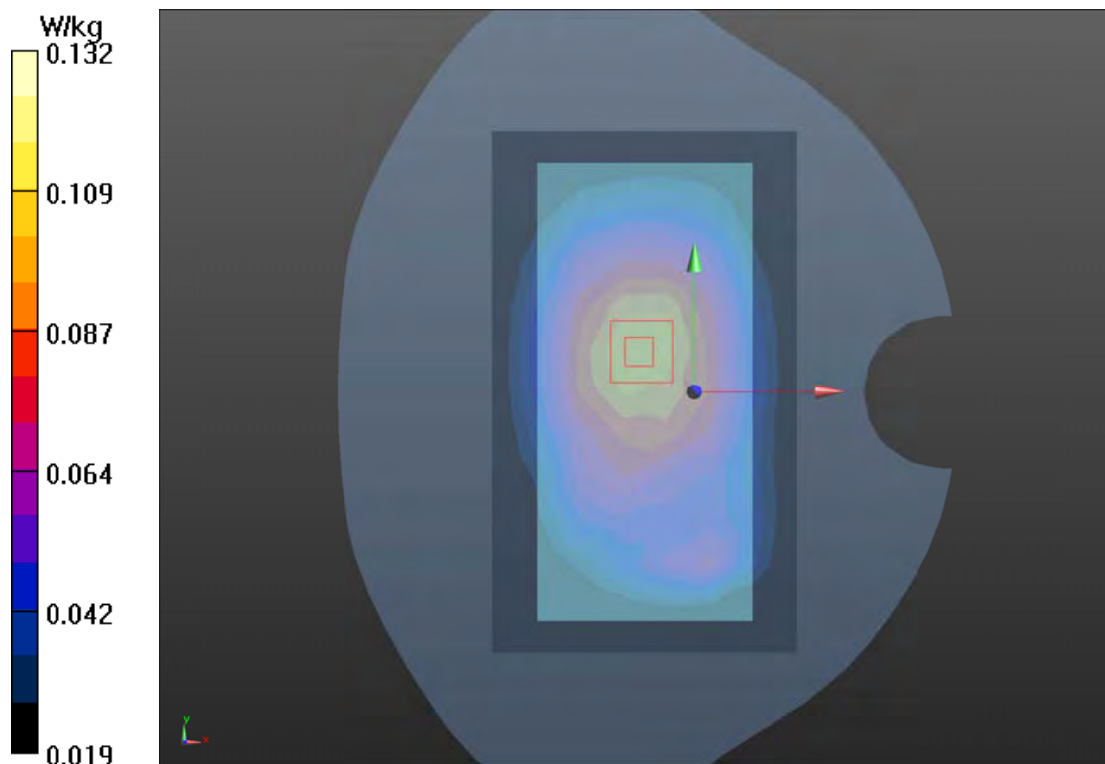

# Plot 51 LTE Band 17 1RB Left Cheek High (WWAN Antenna Down)

Date: 8/20/2020

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711 \text{ MHz}$ ;  $\sigma = 0.85 \text{ S/m}$ ;  $\epsilon_r = 42.755$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Left Cheek High/Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.0472 \text{ W/kg}$


**Left Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $1.830 \text{ V/m}$ ; Power Drift =  $0.168 \text{ dB}$

Peak SAR (extrapolated) =  $0.0570 \text{ W/kg}$

**SAR(1 g) =  $0.046 \text{ W/kg}$ ; SAR(10 g) =  $0.036 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.049 \text{ W/kg}$

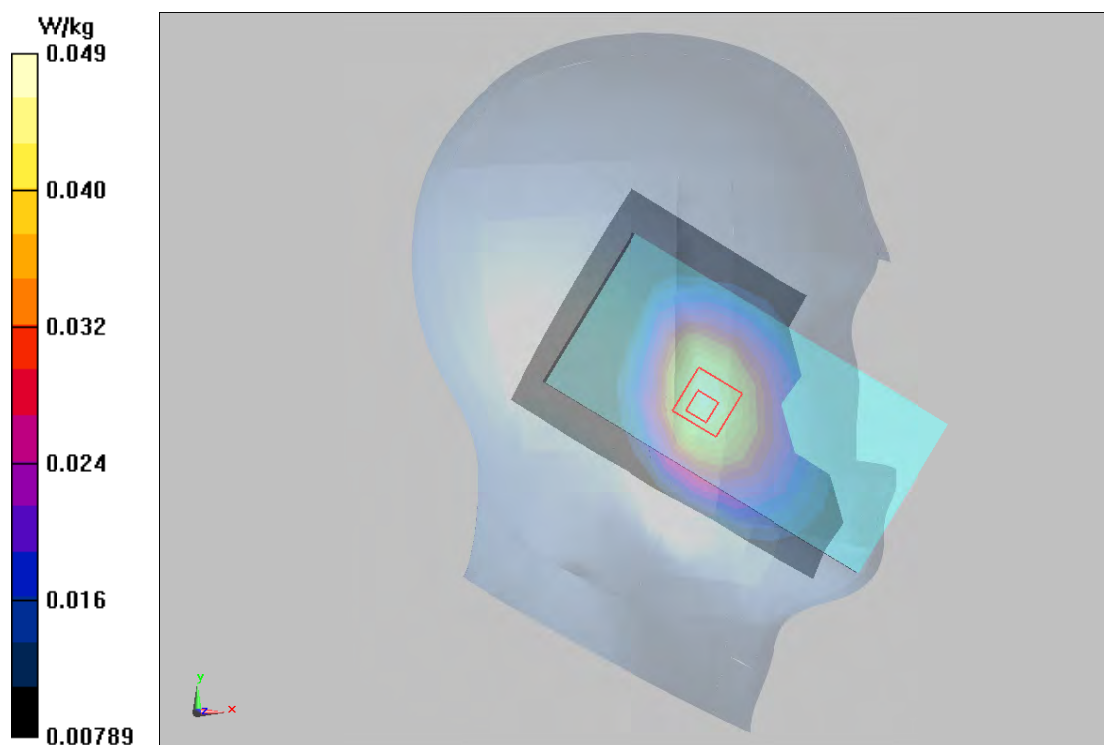

# Plot 52 LTE Band 17 1RB Back Side High (Distance 15mm, WWAN Antenna Down)

Date: 8/20/2020

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711 \text{ MHz}$ ;  $\sigma = 0.85 \text{ S/m}$ ;  $\epsilon_r = 42.755$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.107 \text{ W/kg}$


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.31 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$

Peak SAR (extrapolated) =  $0.127 \text{ W/kg}$

**SAR(1 g) =  $0.105 \text{ W/kg}$ ; SAR(10 g) =  $0.082 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.110 \text{ W/kg}$

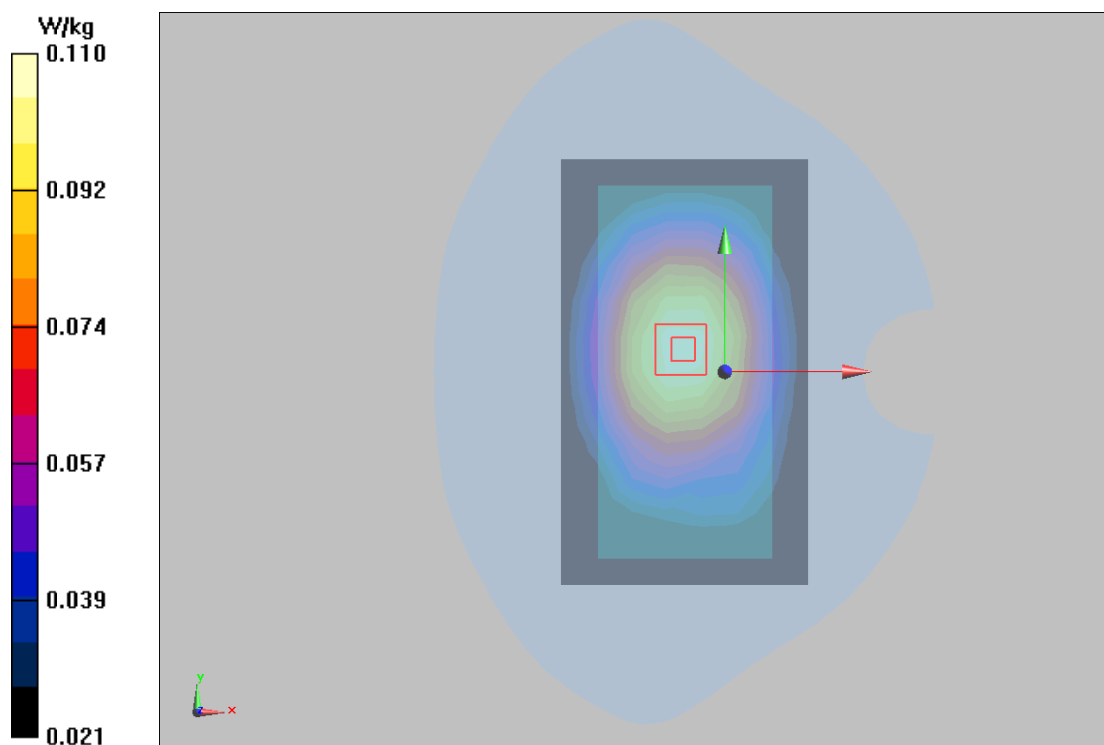

# Plot 53 LTE Band 17 1RB Back Side High (Distance 10mm, WWAN Antenna Down)

Date: 8/20/2020

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 42.755$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0963 W/kg


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.62 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.112 W/kg

**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.0978 W/kg

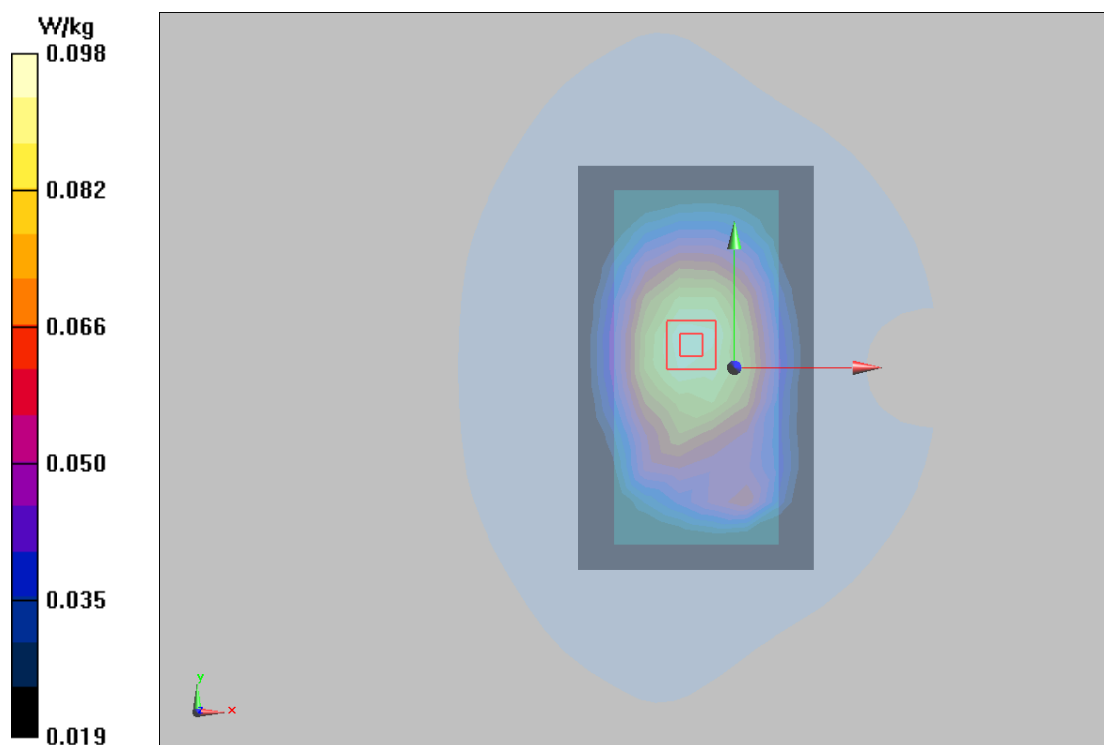

# Plot 54 LTE Band 26 1RB Left Cheek High (WWAN Antenna Down)

Date: 8/21/2020

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 841.5$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 42.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Left Cheek High/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.213 W/kg


**Left Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.841 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.258 W/kg

**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.155 W/kg**

Maximum value of SAR (measured) = 0.214 W/kg

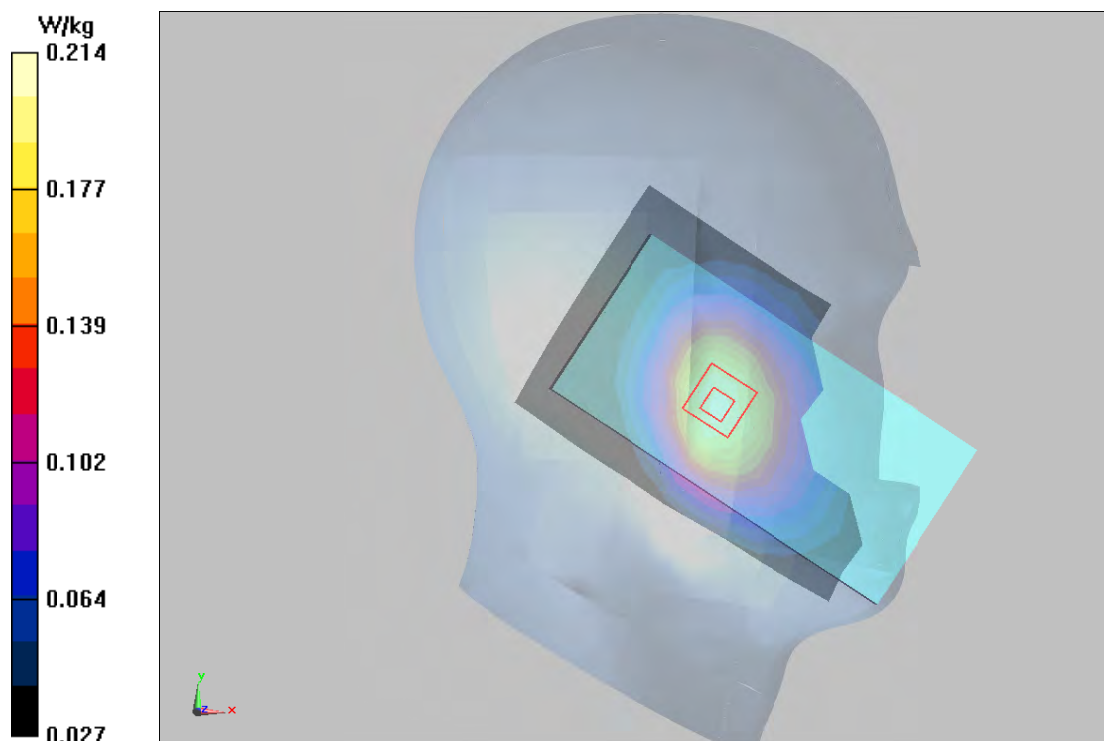

# Plot 55 LTE Band 26 1RB Back Side High (Distance 15mm, WWAN Antenna Down)

Date: 8/21/2020

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 841.5$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 42.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.205 W/kg


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.19 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.234 W/kg

**SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.146 W/kg**

Maximum value of SAR (measured) = 0.200 W/kg

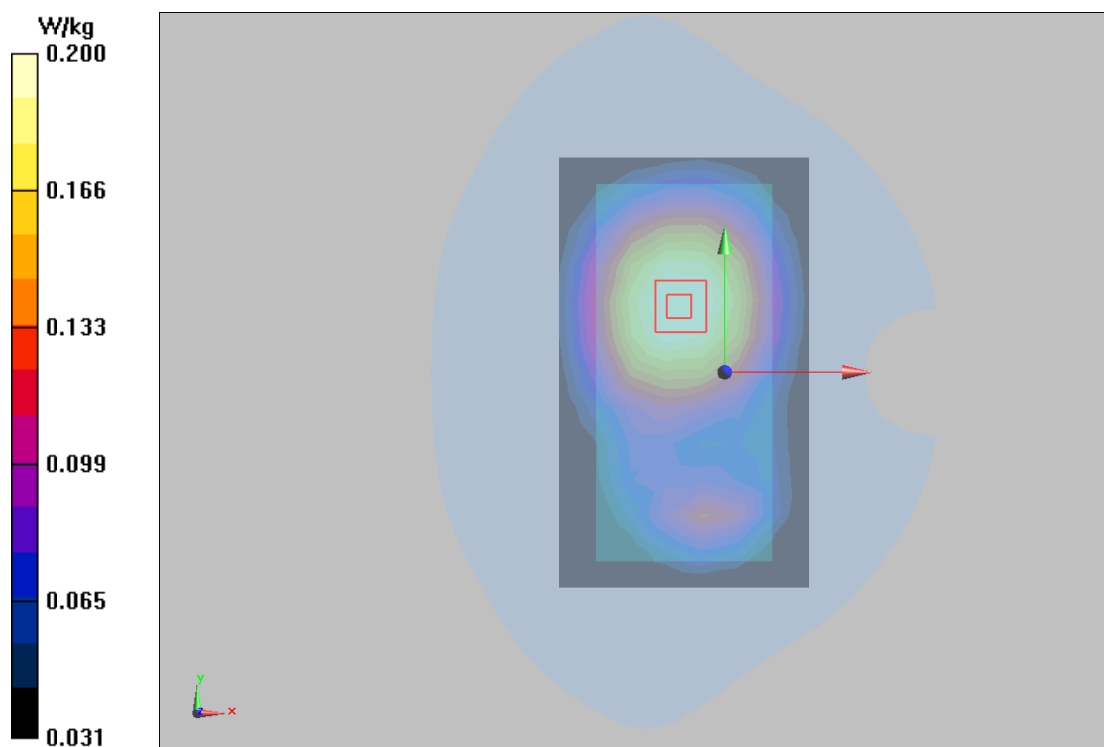

# Plot 56 LTE Band 26 1RB Back Side High (Distance 10mm, WWAN Antenna Down)

Date: 8/21/2020

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 841.5$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 42.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.282 W/kg


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.94 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.452 W/kg

**SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.158 W/kg**

Maximum value of SAR (measured) = 0.289 W/kg

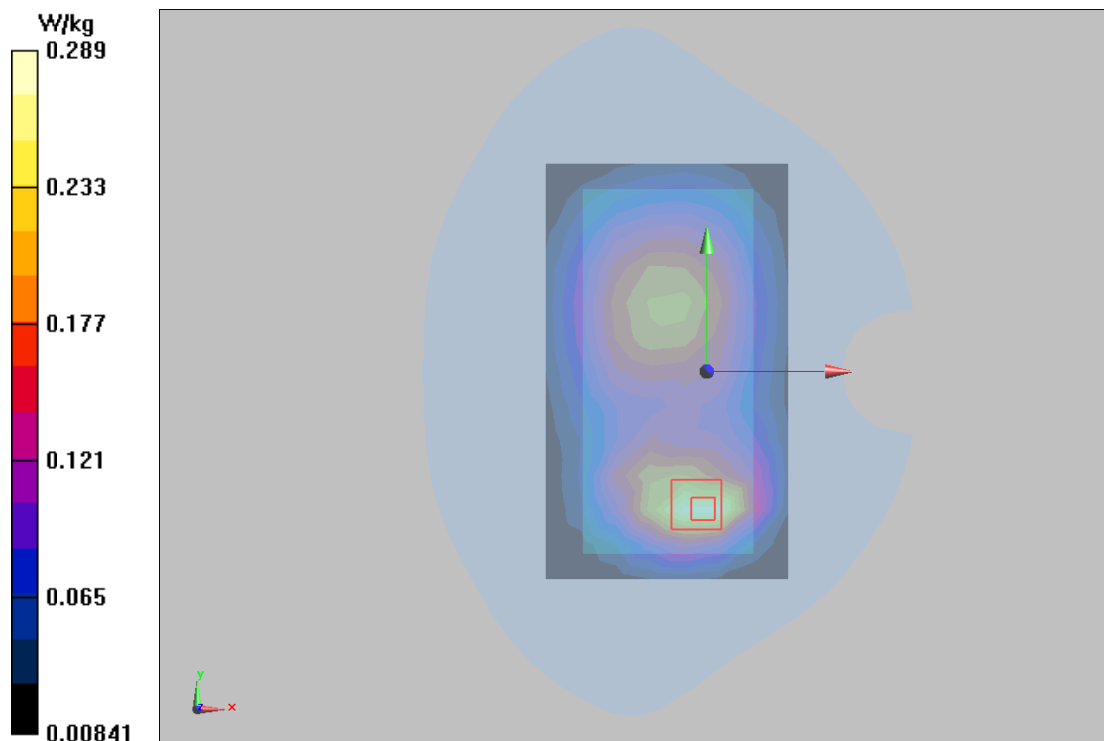

# Plot 57 LTE Band 38 1RB Right Cheek High(WWAN Antenna Down)

Date: 9/3/2020

Communication System: UID 0, LTE (0); Frequency: 2610 MHz;Duty Cycle: 1:1.58

Medium parameters used:  $f = 2610$  MHz;  $\sigma = 1.987$  S/m;  $\epsilon_r = 37.993$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Cheek High/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.175 W/kg


**Right Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.316 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 0.353 W/kg

**SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.098 W/kg**

Maximum value of SAR (measured) = 0.194 W/kg

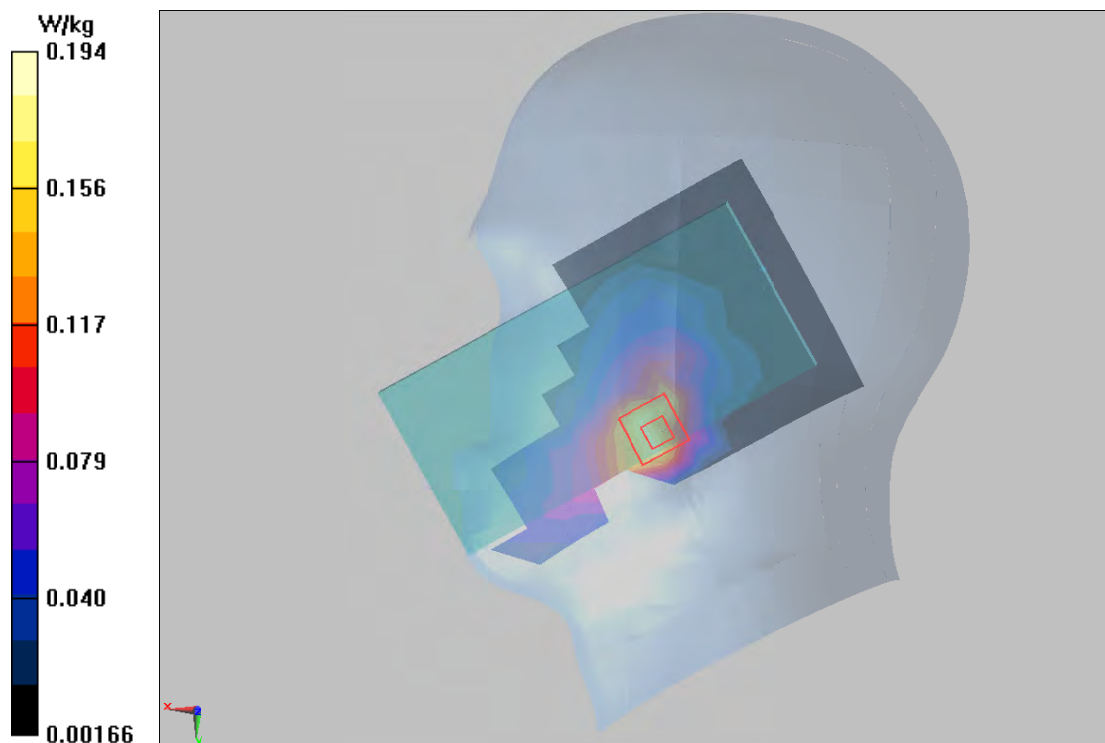

**Plot 58 LTE Band 38 1RB Front Side High (Distance 15mm, WWAN Antenna Down)**

Date: 9/3/2020

Communication System: UID 0, LTE (0); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2610$  MHz;  $\sigma = 1.987$  S/m;  $\epsilon_r = 37.993$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Front Side High/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.226 W/kg


**Front Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.799 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.400 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.114 W/kg**

Maximum value of SAR (measured) = 0.226 W/kg

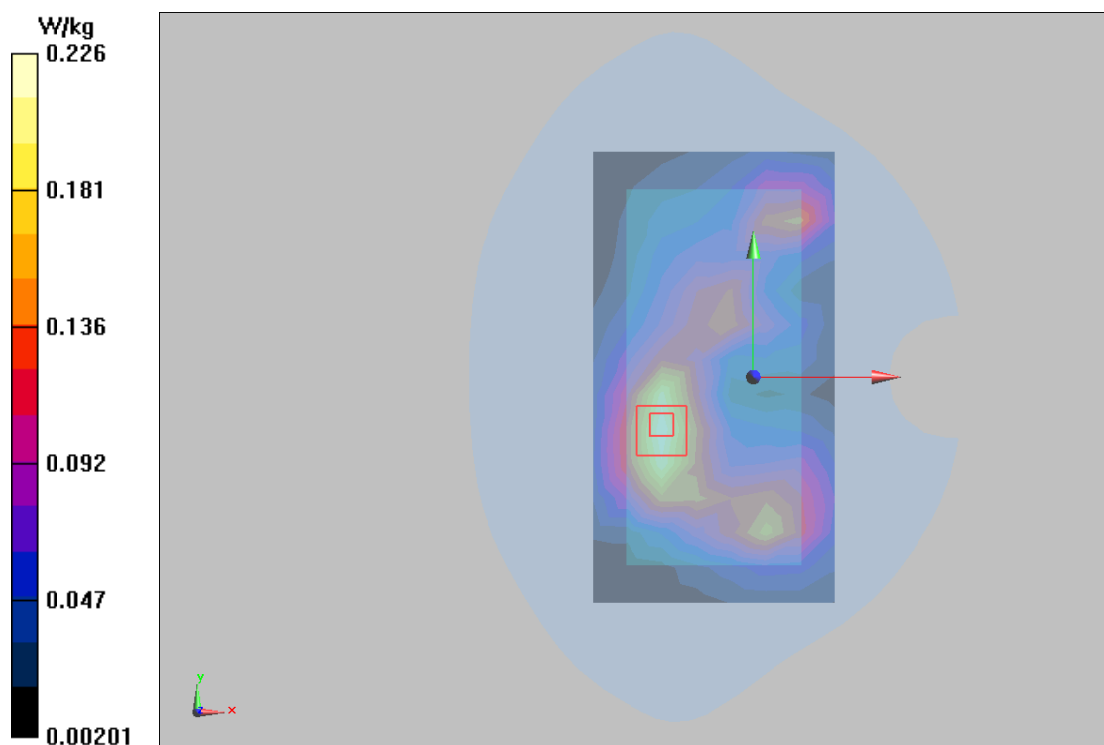

**Plot 59 LTE Band 38 50%RB Back Side High (Distance 10mm, WWAN Antenna Down)**

Date: 9/3/2020

Communication System: UID 0, LTE (0); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2610$  MHz;  $\sigma = 1.987$  S/m;  $\epsilon_r = 37.993$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.229 W/kg


**Back Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.831 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.450 W/kg

**SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.242 W/kg

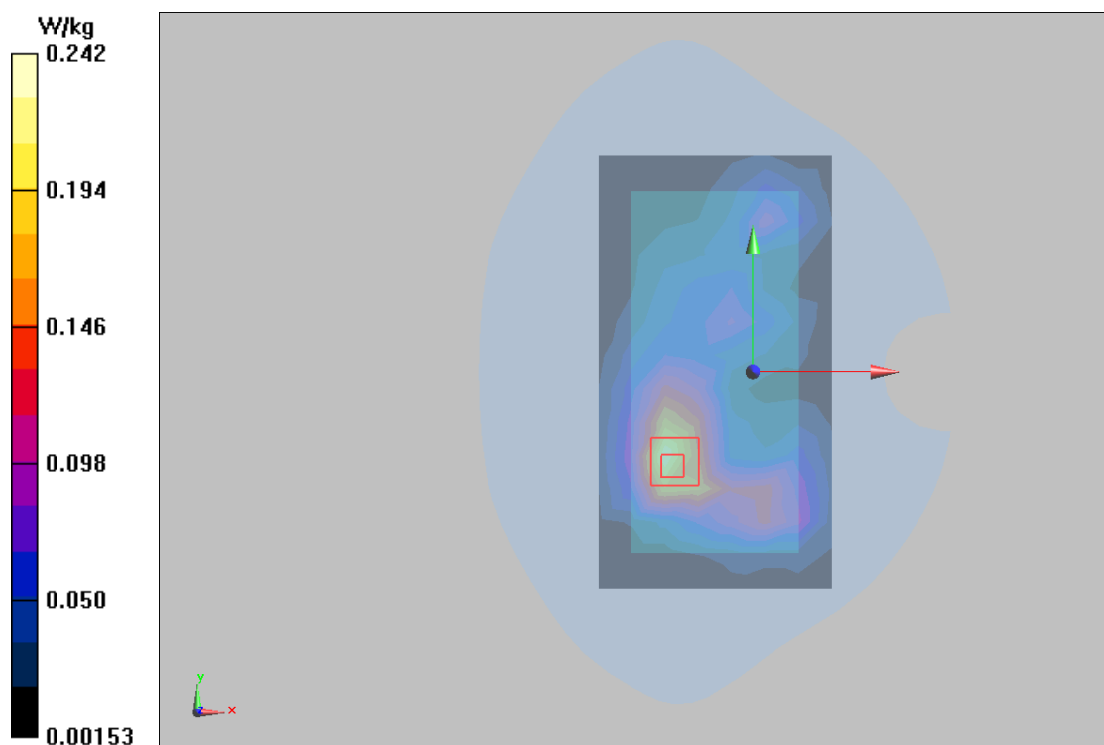

# Plot 60 LTE Band 41 1RB Right Cheek Middle(WWAN Antenna Down)

Date: 9/4/2020

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.969$  S/m;  $\epsilon_r = 38.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Cheek Middle/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.166 W/kg


**Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.446 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.326 W/kg

**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.183 W/kg

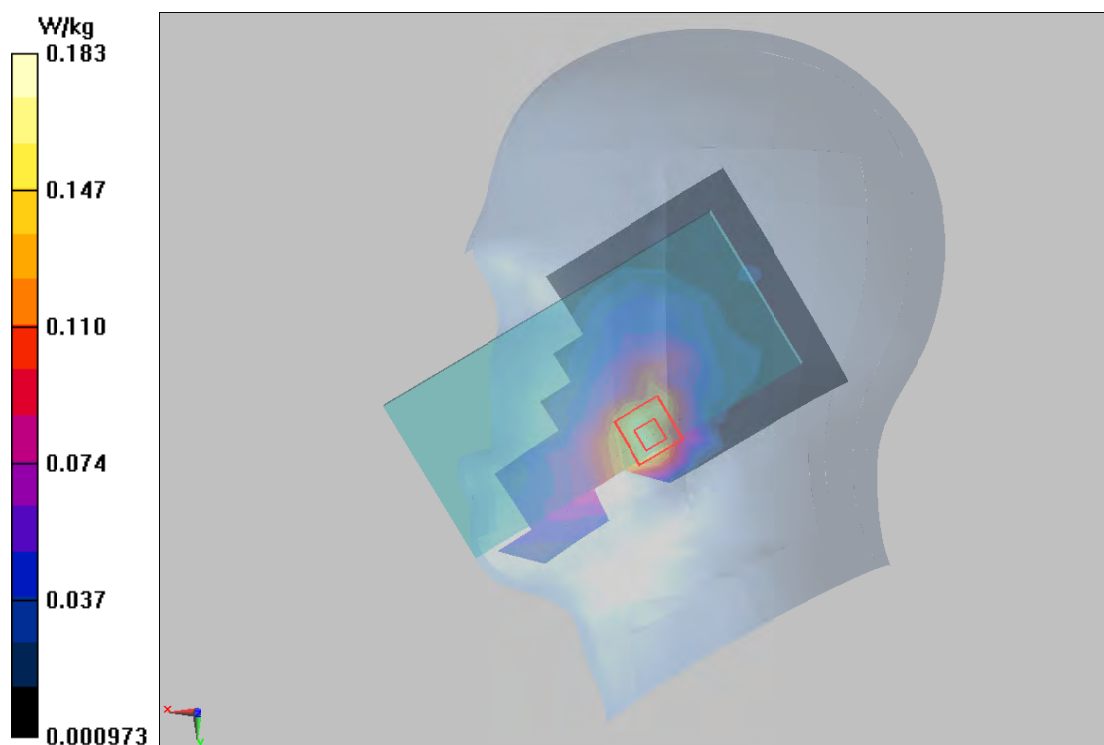

**Plot 61 LTE Band 41 1RB Back Side Middle (Distance 15mm, WWAN Antenna Down)**

Date: 9/4/2020

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.969$  S/m;  $\epsilon_r = 38.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.176 W/kg


**Back Side Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.562 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.350 W/kg

**SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.185 W/kg

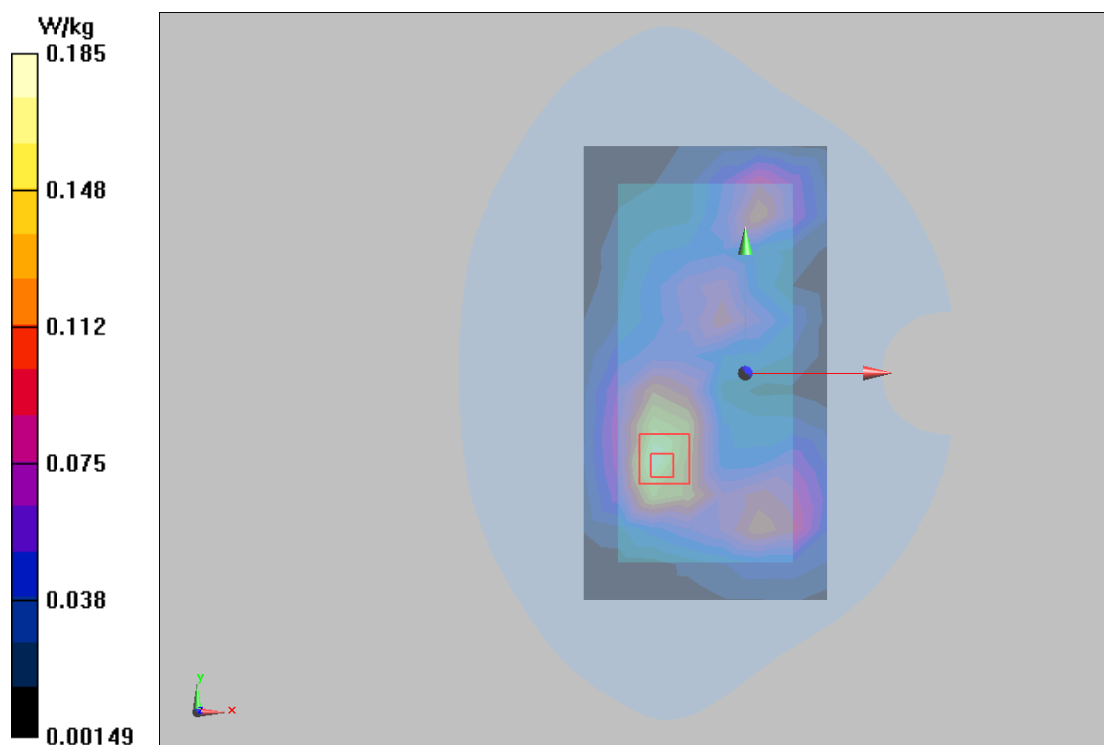

**Plot 62 LTE Band 41 1RB Back Side Middle (Distance 10mm, WWAN Antenna Down)**

Date: 9/4/2020

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.969$  S/m;  $\epsilon_r = 38.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.318 W/kg


**Back Side Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.734 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.628 W/kg

**SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.156 W/kg**

Maximum value of SAR (measured) = 0.334 W/kg

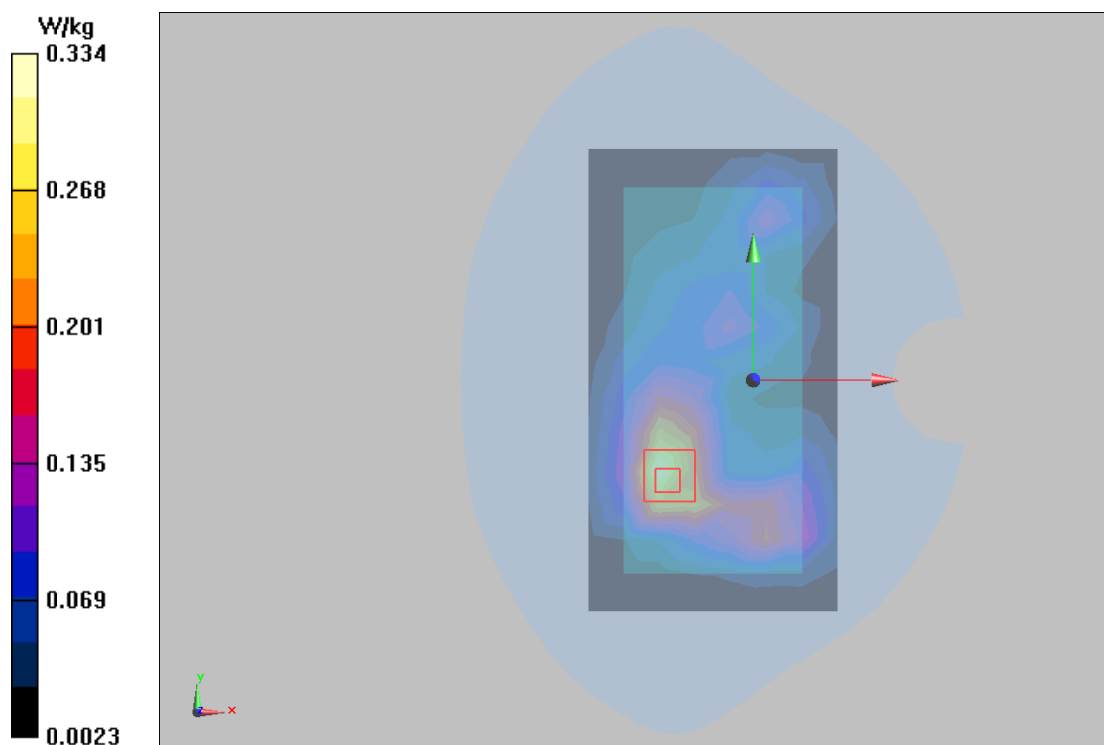

# Plot 63 LTE Band 66 1RB Left Cheek Low (WWAN Antenna Down)

Date: 8/28/2020

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.284$  S/m;  $\epsilon_r = 38.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Left Cheek Low/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 W/kg


**Left Cheek Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.305 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.171 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.076 W/kg**

Maximum value of SAR (measured) = 0.125 W/kg

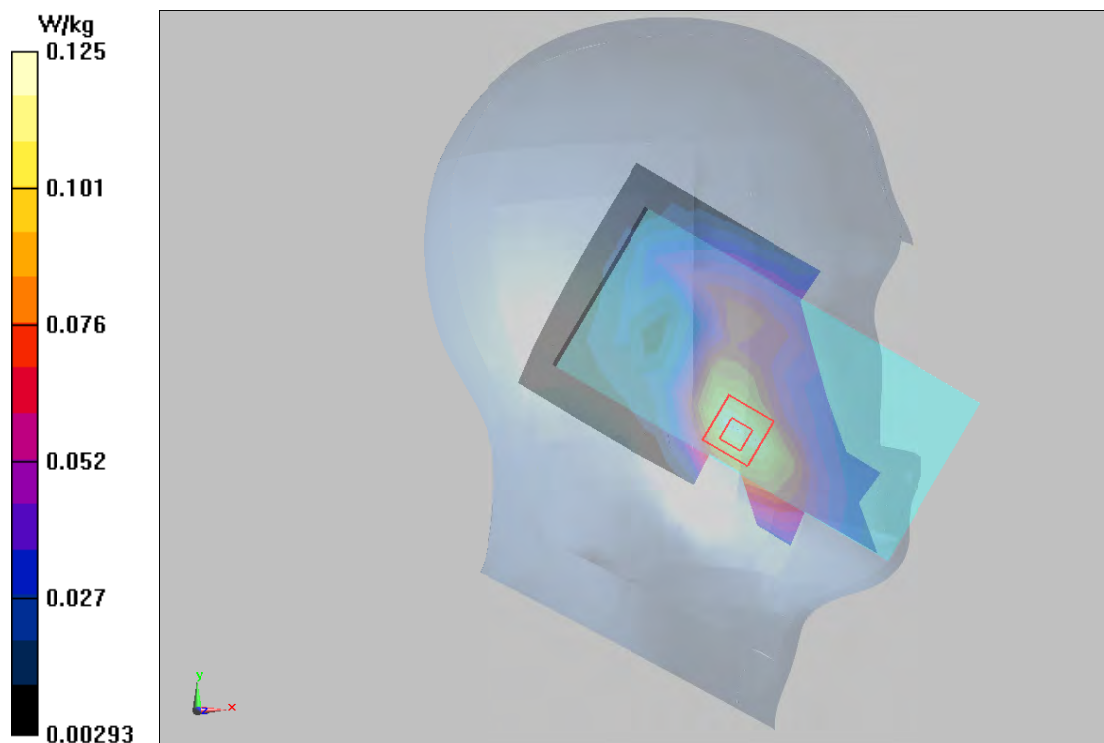

**Plot 64 LTE Band 66 50%RB Back Side Low (Distance 15mm, WWAN Antenna Down)**

Date: 8/28/2020

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.303$  S/m;  $\epsilon_r = 39.467$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Low/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.294 W/kg


**Back Side Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.22 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 0.431 W/kg

**SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.187 W/kg**

Maximum value of SAR (measured) = 0.314 W/kg

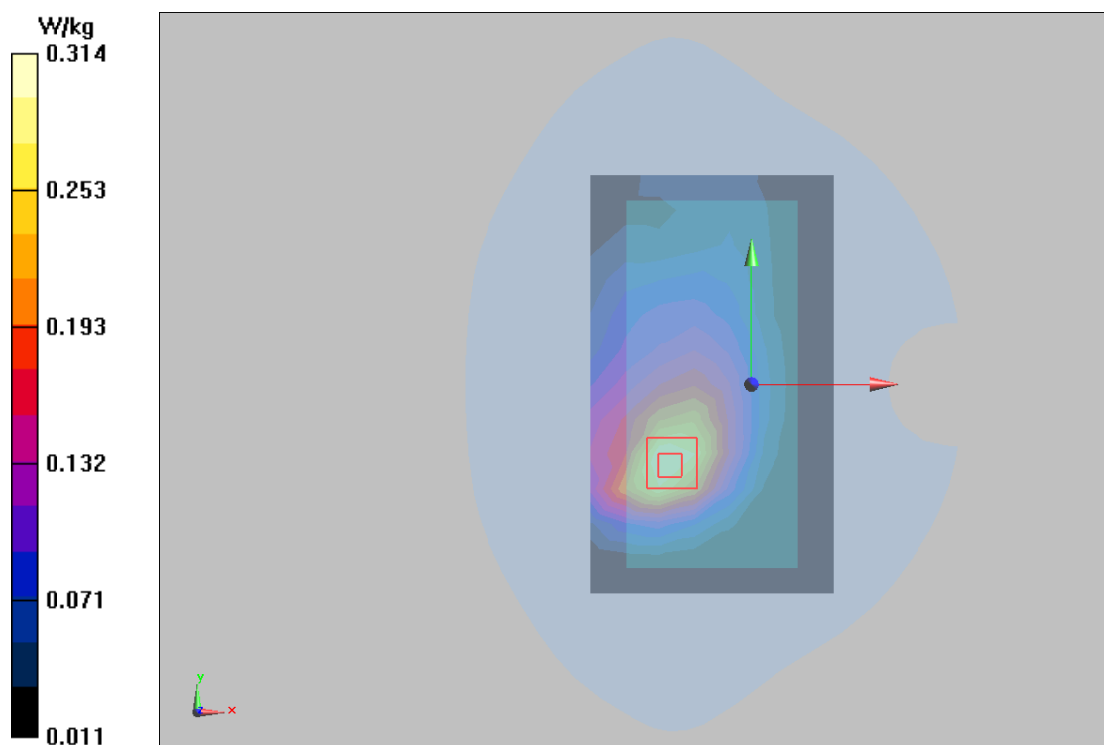

# Plot 65 LTE Band 66 50%RB Bottom Edge Low (Distance 10mm, WWAN Antenna Down)

Date: 8/28/2020

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.303$  S/m;  $\epsilon_r = 39.467$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Bottom Edge Low/Area Scan (4x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.507 W/kg


**Bottom Edge Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.06 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.353 W/kg**

Maximum value of SAR (measured) = 0.704 W/kg

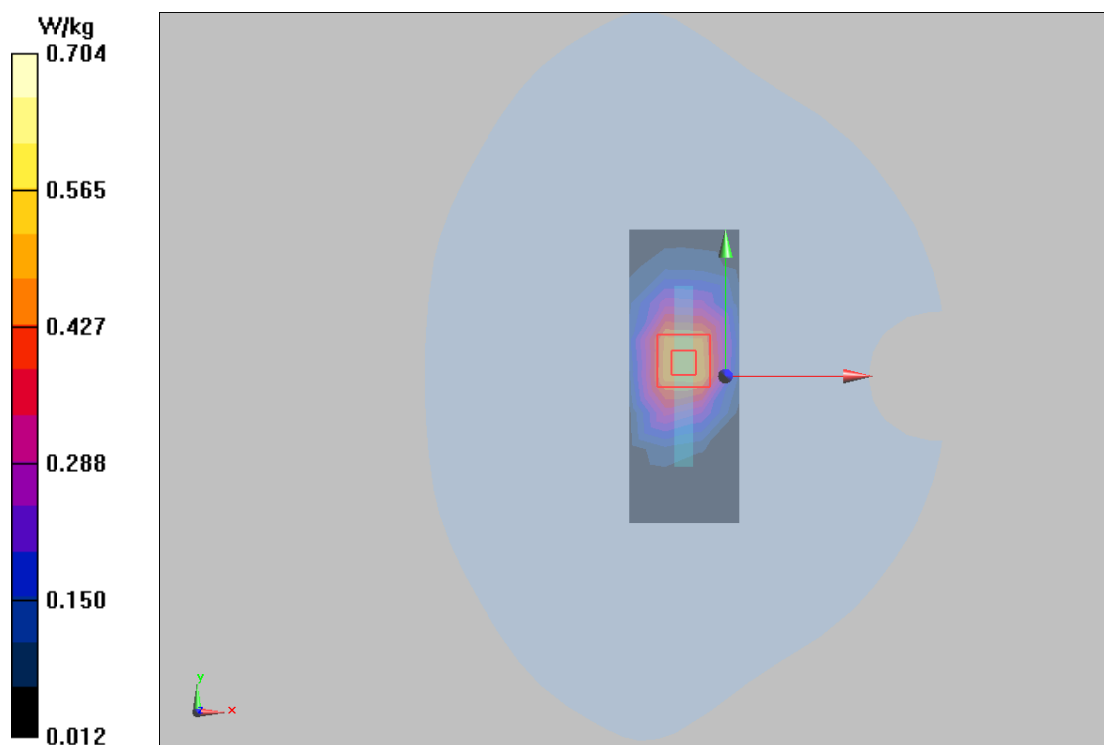

# Plot 66 GSM 850 Right Tilt Middle (WWAN Antenna Up)

Date: 8/17/2020

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Tilt Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.376 W/kg


**Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.72 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.250 W/kg**

Maximum value of SAR (measured) = 0.516 W/kg

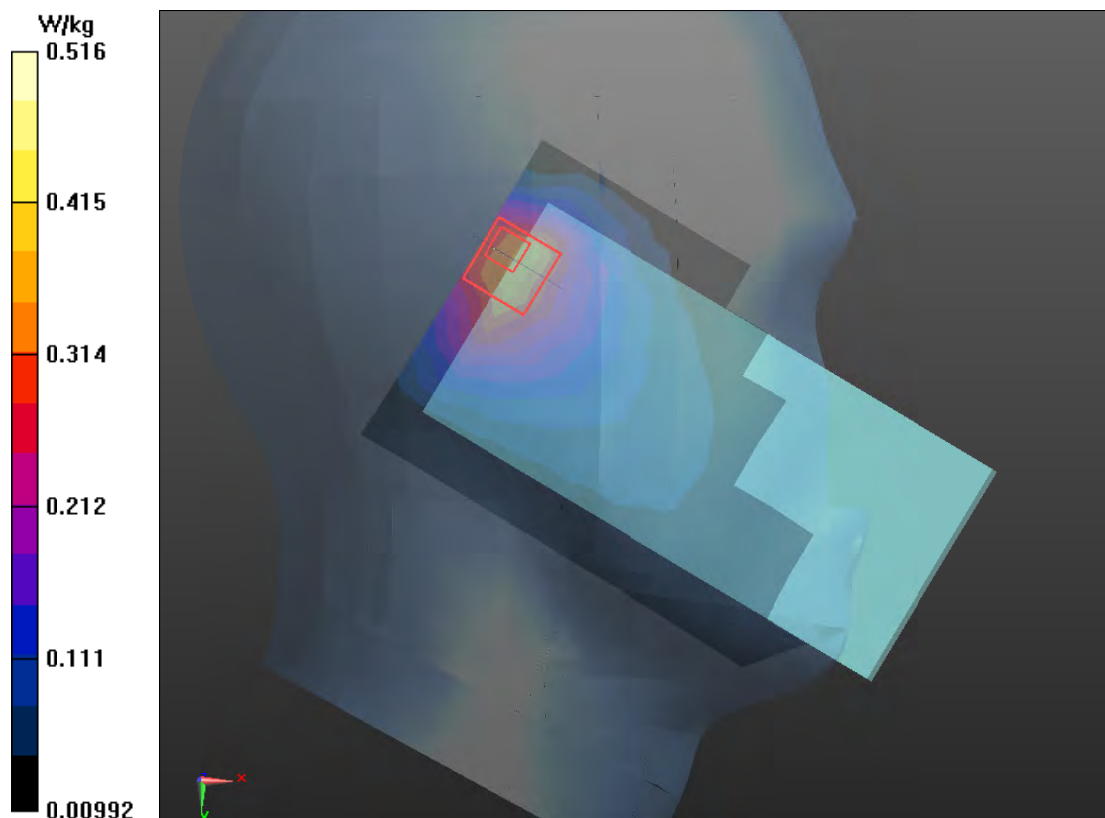

# Plot 67 GSM 850 Back Side Middle (Distance 15mm, WWAN Antenna Up)

Date: 8/17/2020

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.104 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.727 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.120 W/kg

**SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

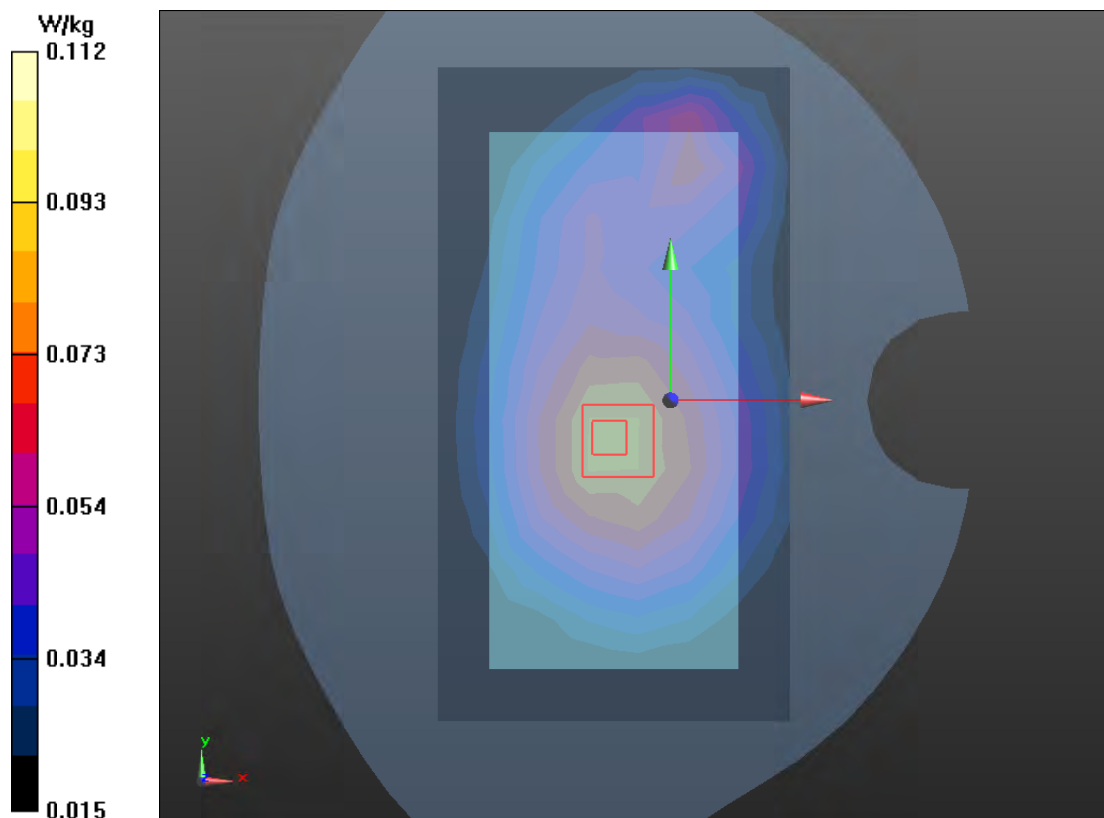

**Plot 68 GSM 850 GPRS (4Txslots) Back Side Middle (Distance 10mm, WWAN Antenna Up)**

Date: 8/17/2020

Communication System: UID 0, GPRS-4UP (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.180 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.31 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.220 W/kg

**SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.110 W/kg**

Maximum value of SAR (measured) = 0.186 W/kg

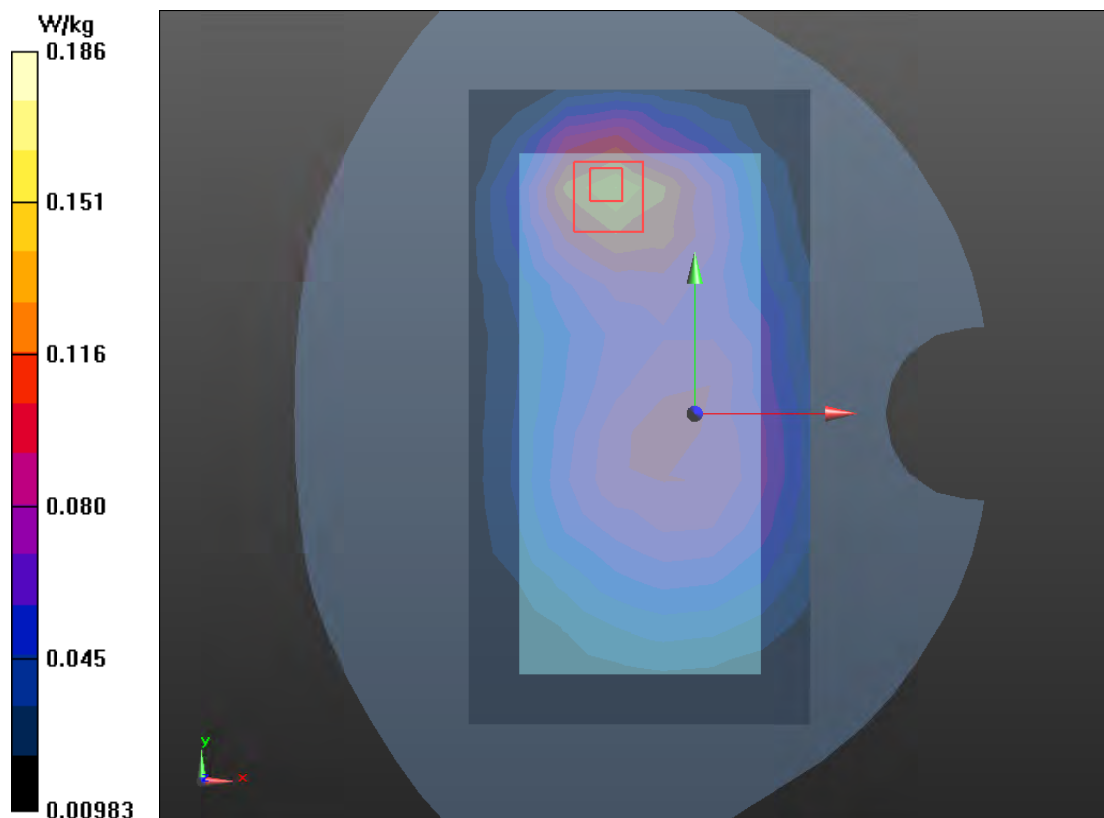

# Plot 69 GSM 1900 Right Tilt Middle (WWAN Antenna Up)

Date: 8/24/2020

Communication System: UID 0, GSM1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 38.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Tilt Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.640 W/kg


**Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.64 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.272 W/kg**

Maximum value of SAR (measured) = 0.661 W/kg

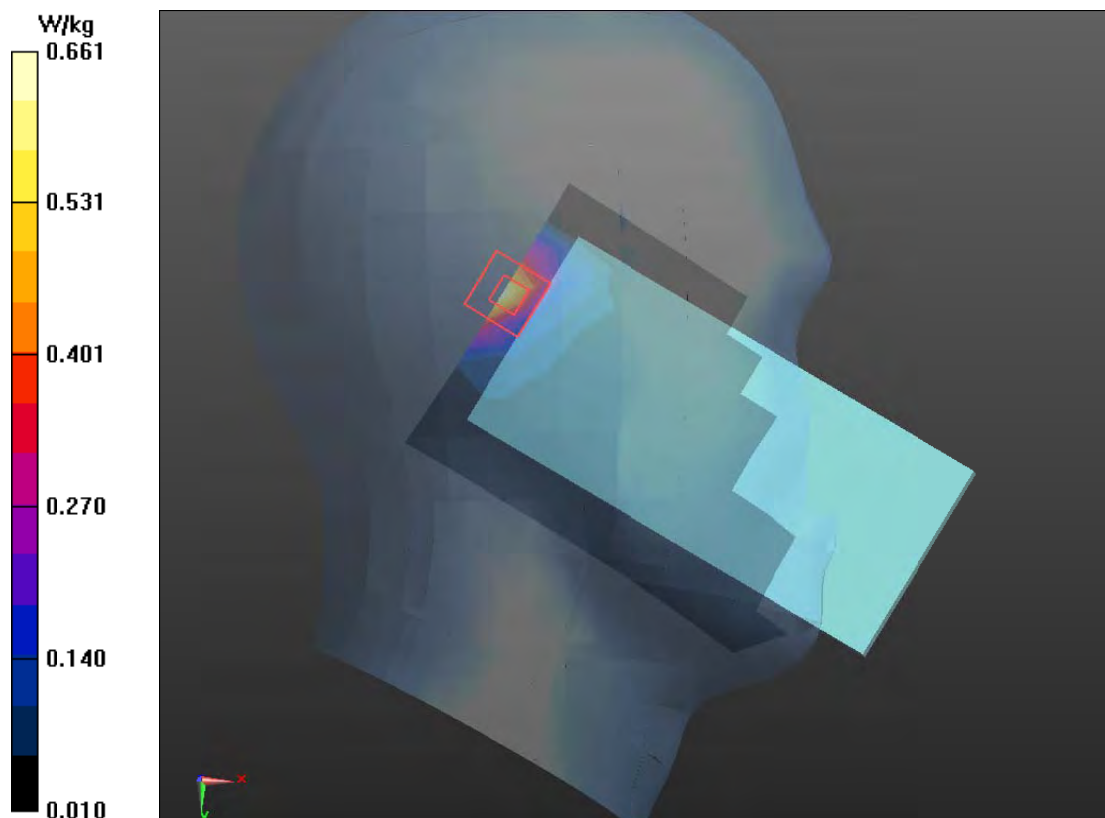

# Plot 70 GSM 1900 Back Side Middle (Distance 15mm, WWAN Antenna Up)

Date: 8/24/2020

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 38.344$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.222 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.036 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.398 W/kg

**SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.128 W/kg**

Maximum value of SAR (measured) = 0.256 W/kg

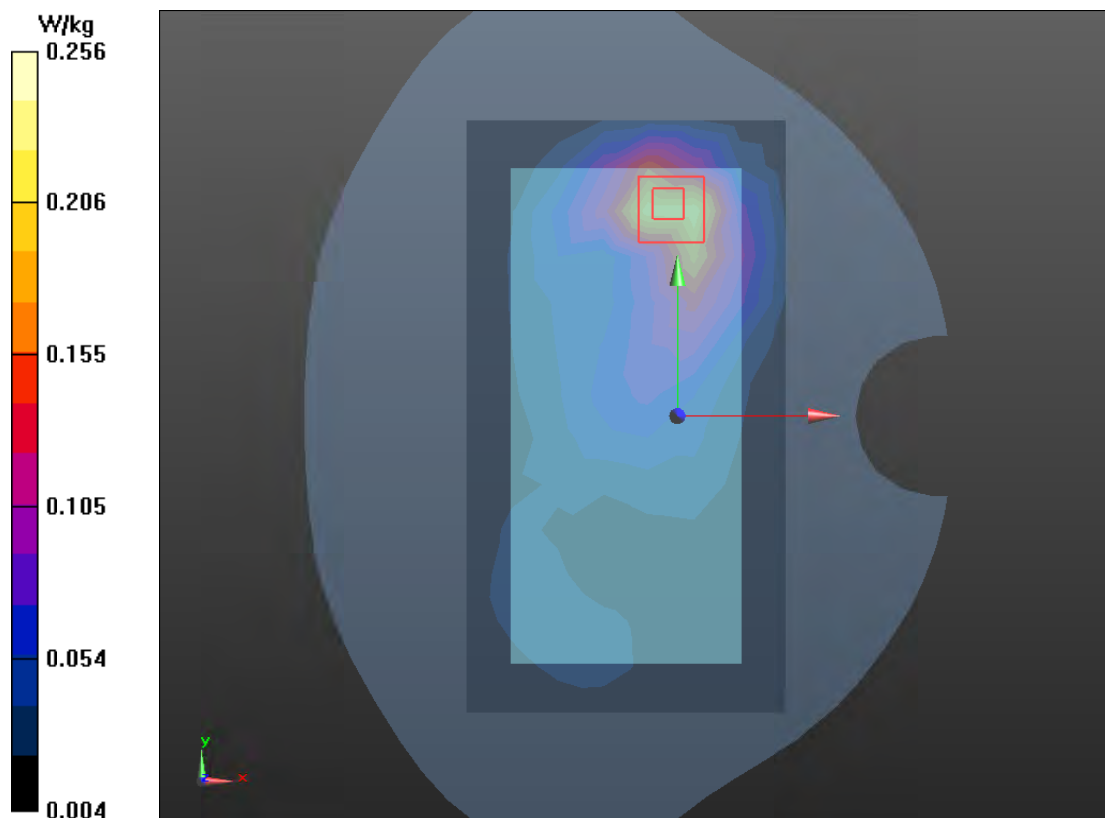

**Plot 71 GSM 1900 GPRS (4Txslots) Top Edge Middle (Distance 10mm, WWAN Antenna Up)**

Date: 8/24/2020

Communication System: UID 0, GPRS 4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 38.344$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Top Edge Middle/Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.458 W/kg


**Top Edge Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.74 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.740 W/kg

**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.212 W/kg**

Maximum value of SAR (measured) = 0.466 W/kg

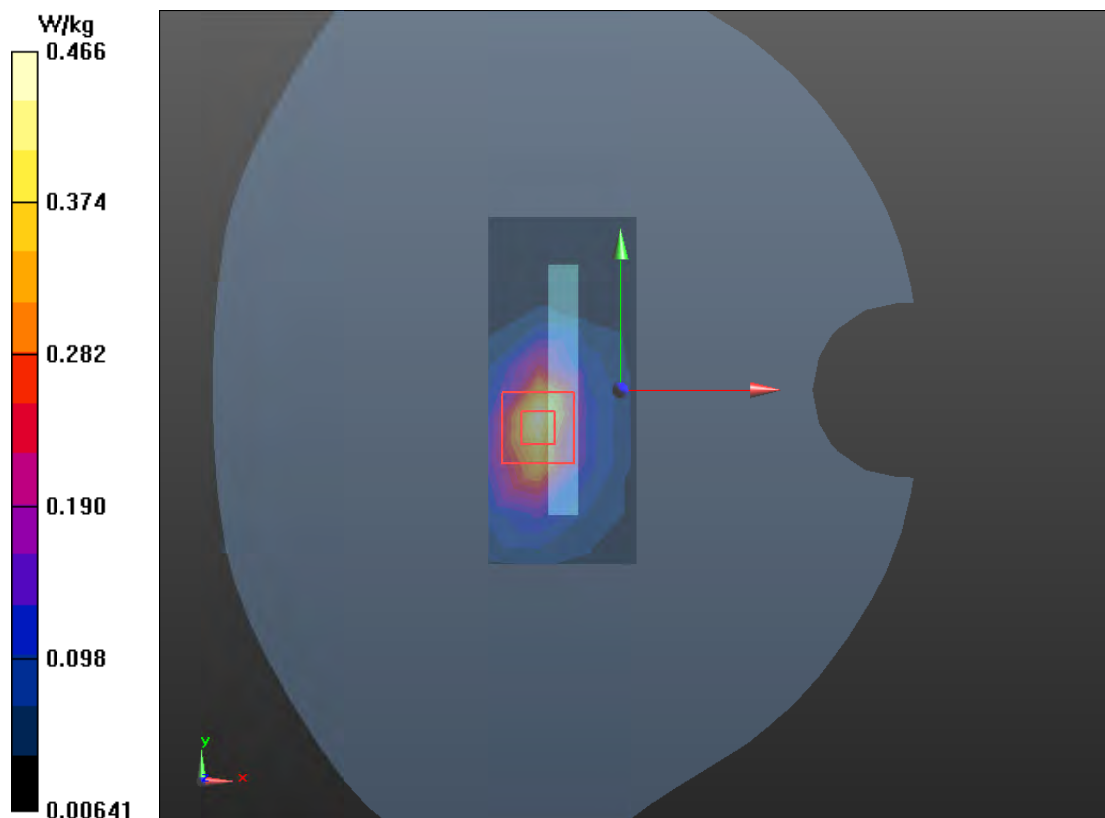

## Plot 72 UMTS Band II Right Tilt High (WWAN Antenna Up)

Date: 8/24/2020

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.44$  S/m;  $\epsilon_r = 38.828$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Tilt High/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.828 W/kg


**Right Tilt High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.02 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.313 W/kg**

Maximum value of SAR (measured) = 0.831 W/kg

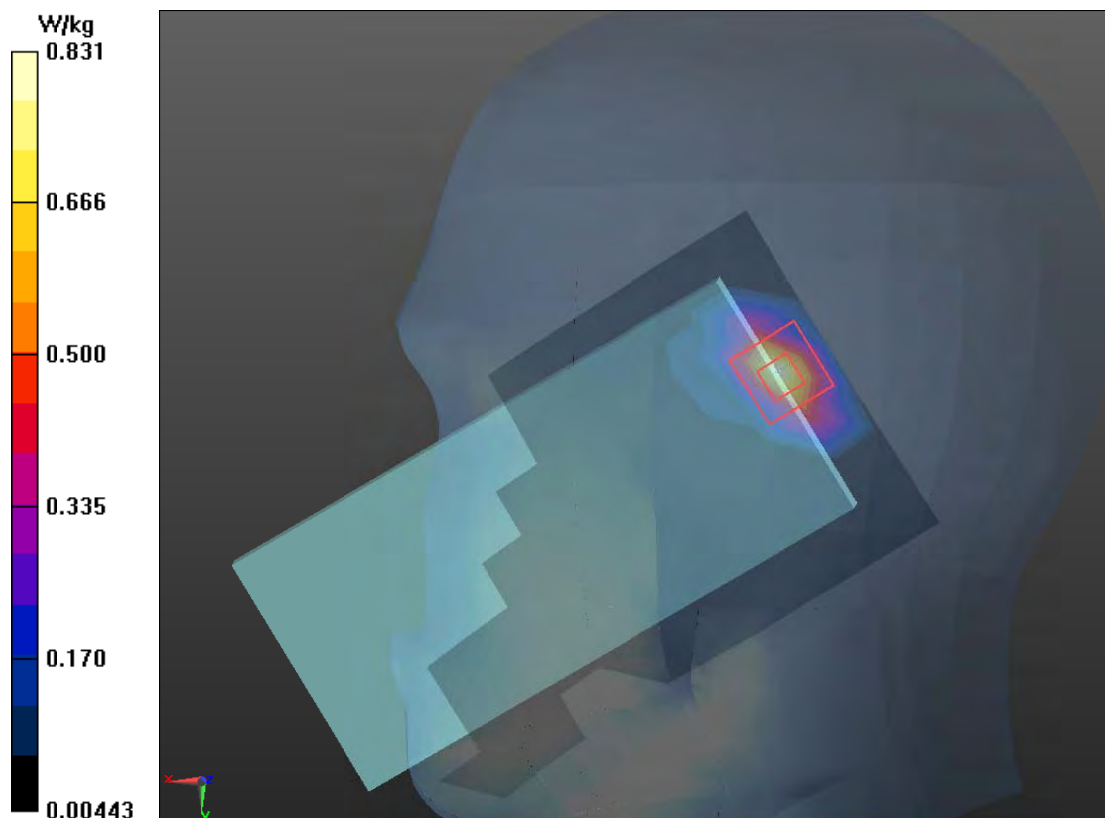

# Plot 73 UMTS Band II Back Side Middle (Distance 15mm, WWAN Antenna Up)

Date: 8/24/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 38.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.296 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.51 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.451 W/kg

**SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.169 W/kg**

Maximum value of SAR (measured) = 0.291 W/kg

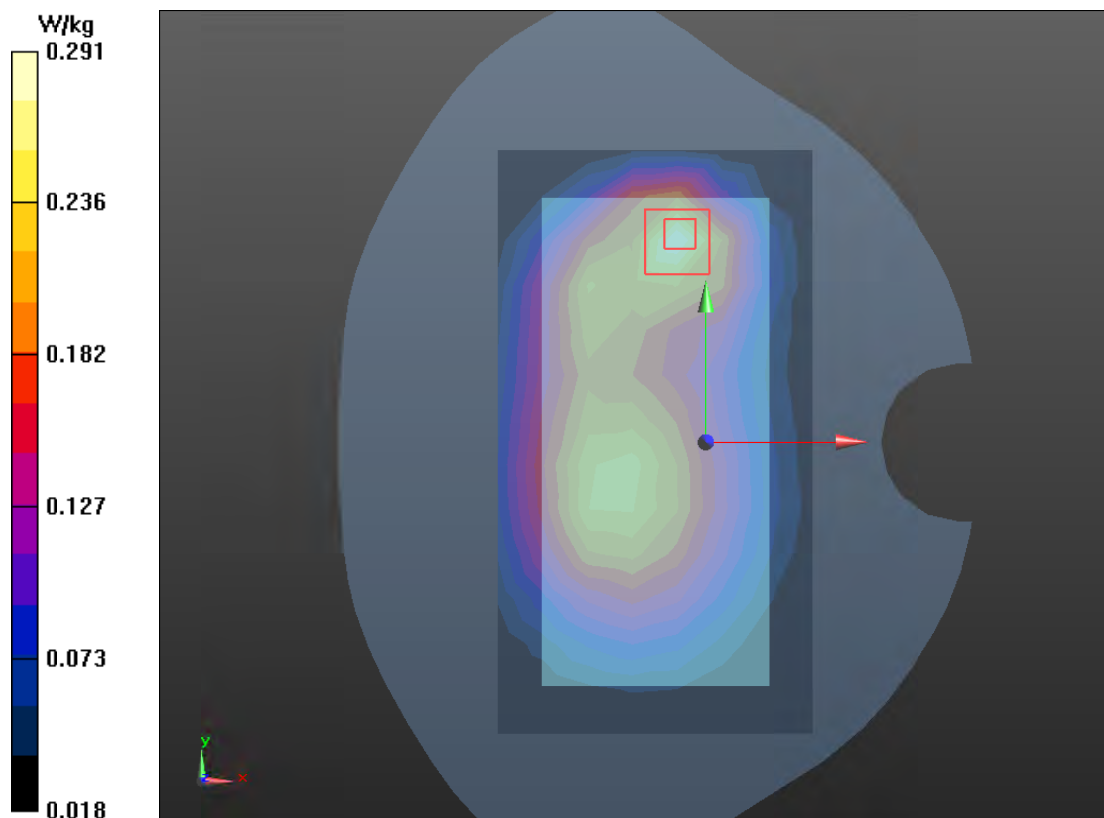

# Plot 74 UMTS Band II Top Edge Middle (Distance 10mm, WWAN Antenna Up)

Date: 8/24/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 38.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Top Edge Middle/Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.458 W/kg


**Top Edge Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.77 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.771 W/kg

**SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.207 W/kg**

Maximum value of SAR (measured) = 0.469 W/kg

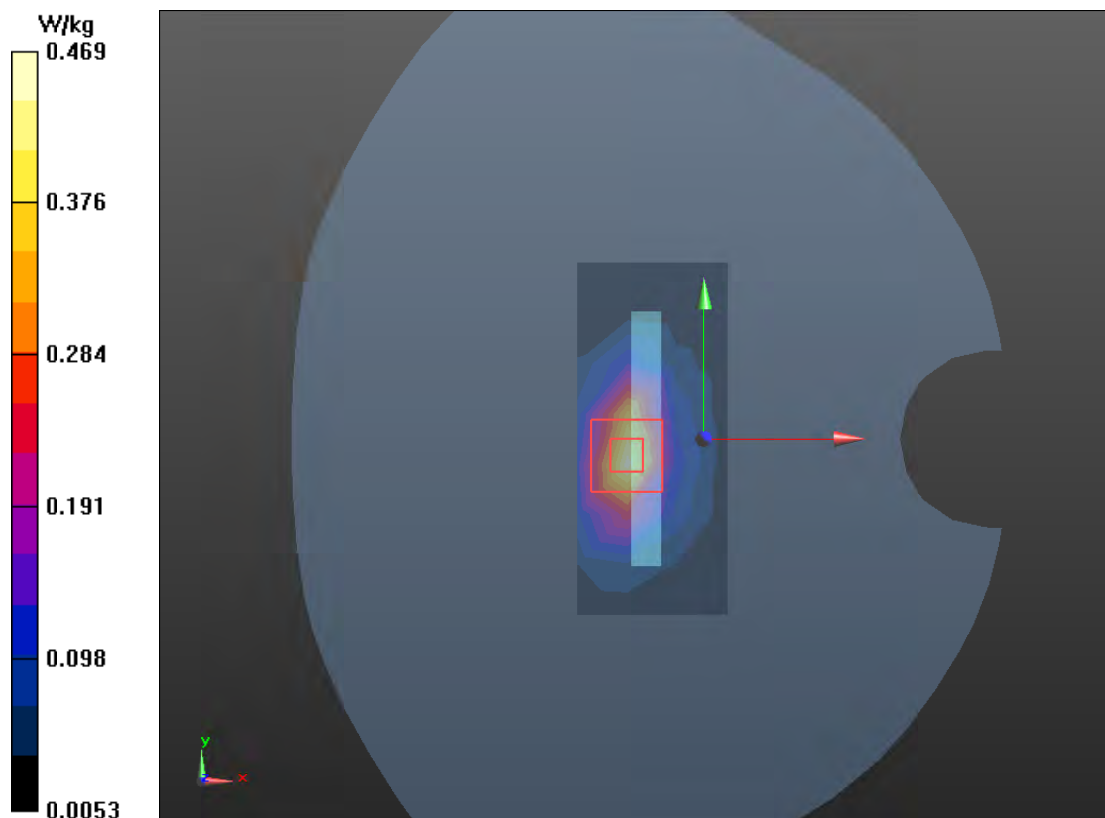

# Plot 75 UMTS Band IV Right Tilt Low (WWAN Antenna Up)

Date: 8/30/2020

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.298$  S/m;  $\epsilon_r = 39.443$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Tilt Low/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.879 W/kg


**Right Tilt Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.02 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.346 W/kg**

Maximum value of SAR (measured) = 0.911 W/kg

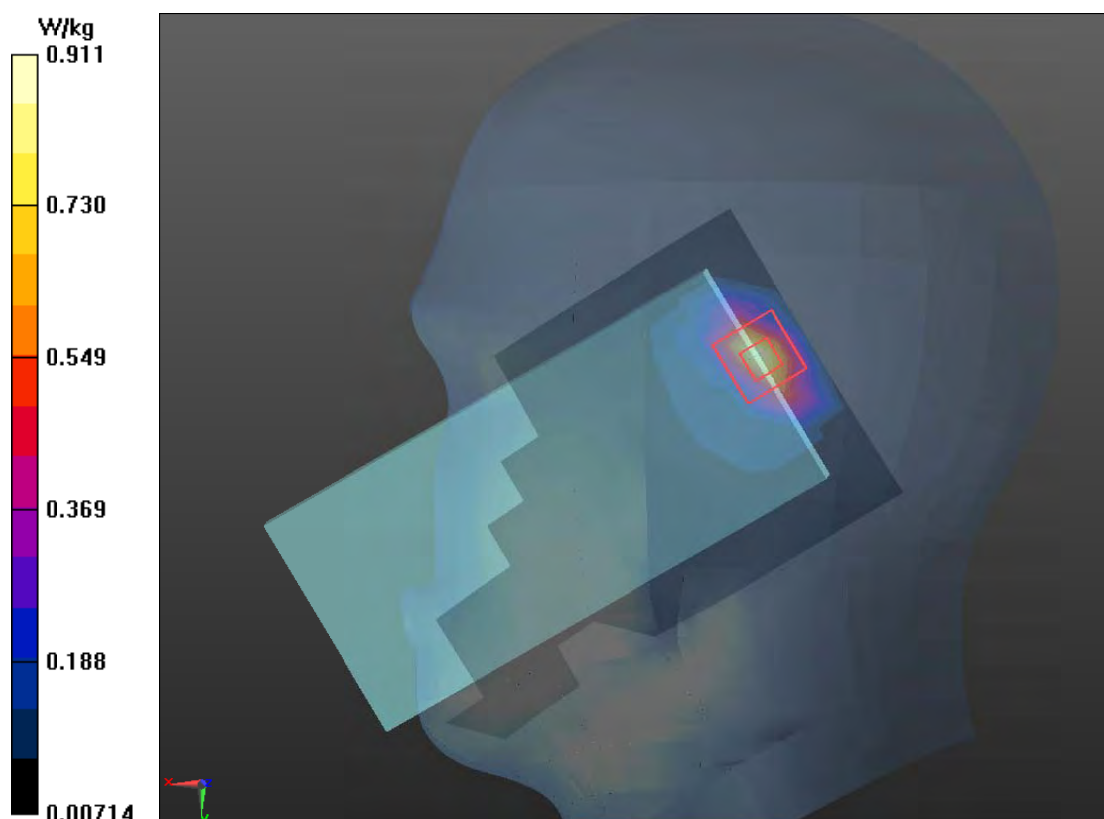

# Plot 76 UMTS Band IV Back Side Middle (Distance 15mm, WWAN Antenna Up)

Date: 8/30/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.312$  S/m;  $\epsilon_r = 39.365$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.442 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.934 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.707 W/kg

**SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.250 W/kg**

Maximum value of SAR (measured) = 0.470 W/kg

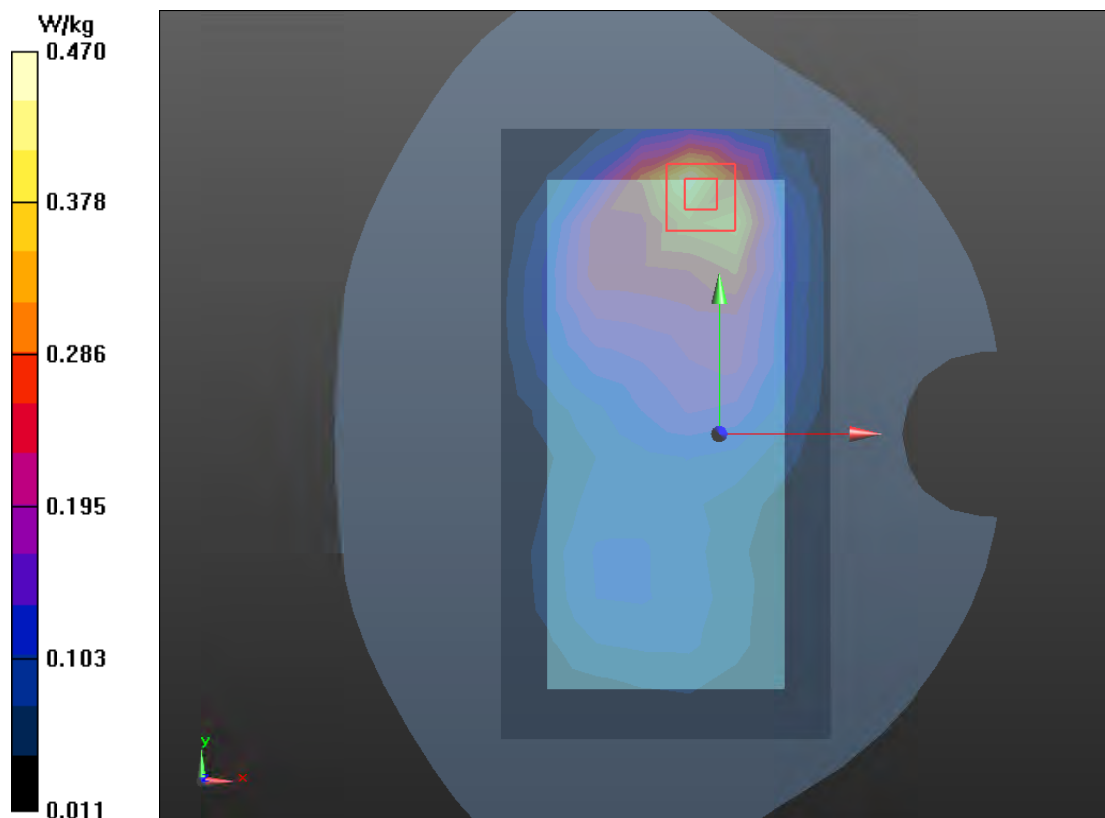

# Plot 77 UMTS Band IV Top Edge Middle (Distance 10mm, WWAN Antenna Up)

Date: 8/30/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.312$  S/m;  $\epsilon_r = 39.365$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Top Edge Middle/Area Scan (4x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.560 W/kg


**Top Edge Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.89 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.859 W/kg

**SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.254 W/kg**

Maximum value of SAR (measured) = 0.563 W/kg

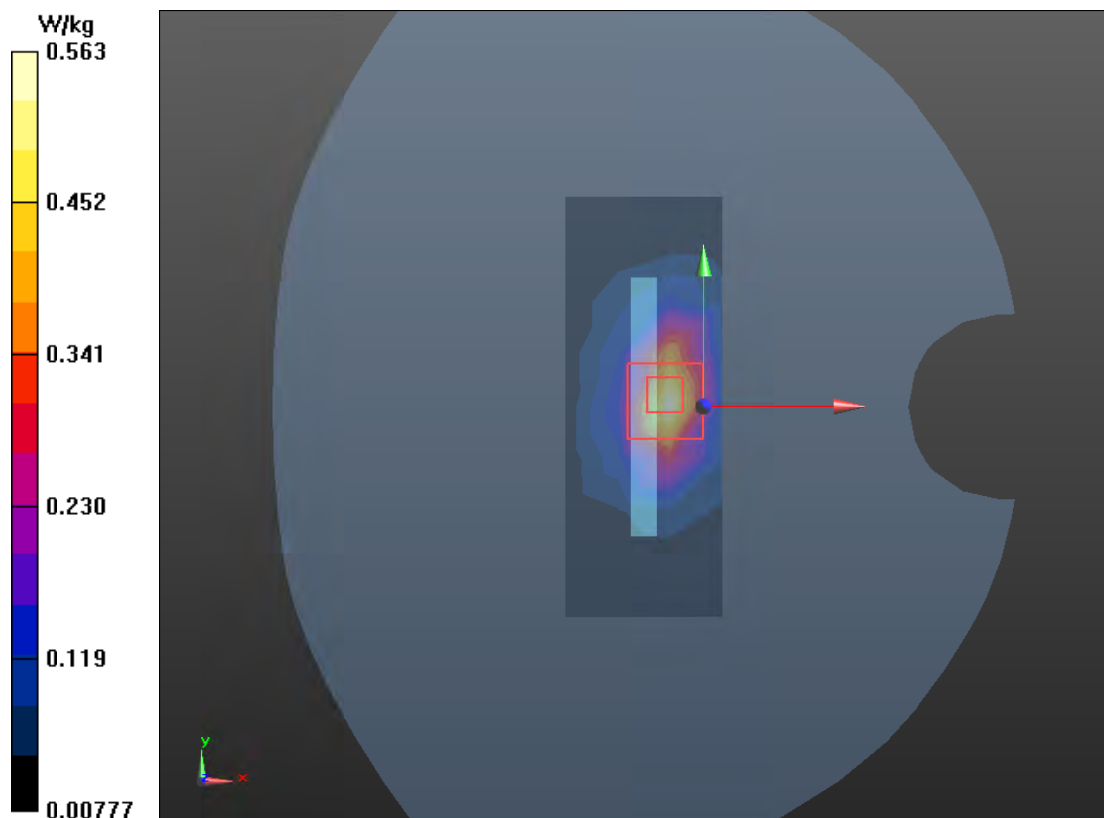

# Plot 78 UMTS Band V Right Cheek Middle (WWAN Antenna Up)

Date: 8/17/2020

Communication System: UID 0, WCDMA 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Cheek Middle/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.470 W/kg


**Right Cheek Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.43 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.290 W/kg**

Maximum value of SAR (measured) = 0.542 W/kg

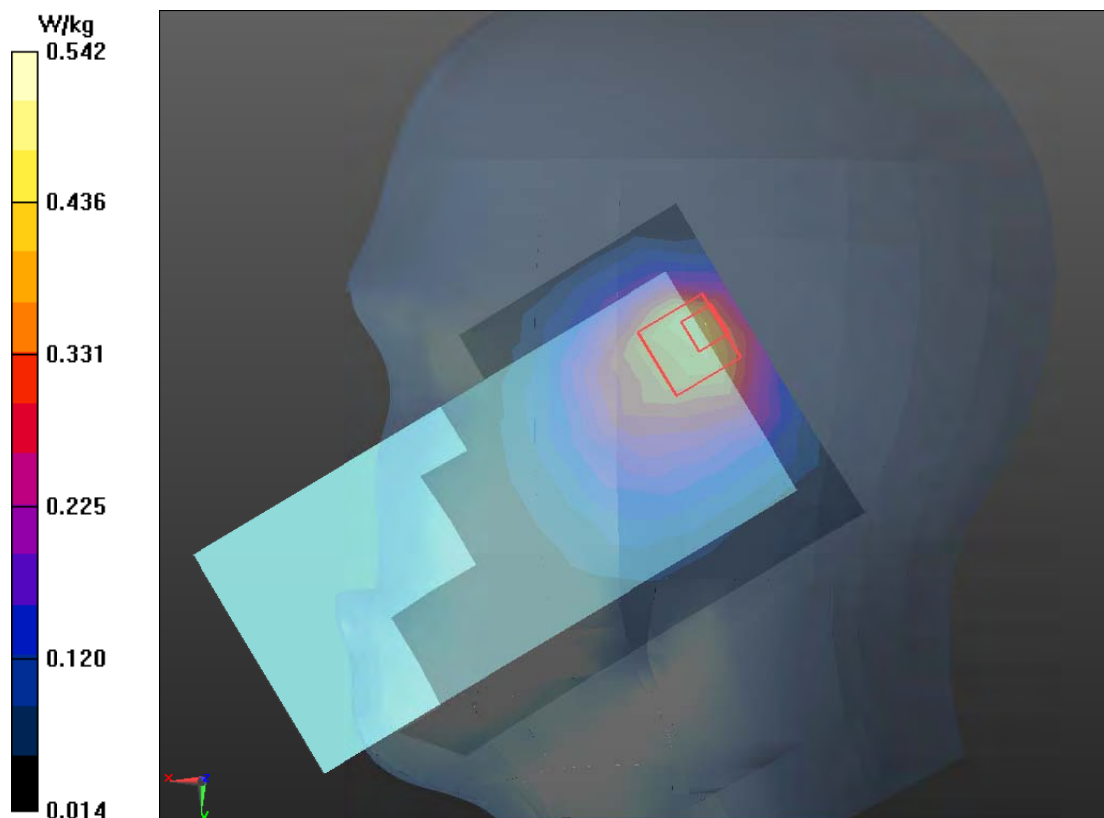

# Plot 79 UMTS Band V Back Side Middle (Distance 15mm, WWAN Antenna Up)

Date: 8/17/2020

Communication System: UID 0, WCDMA 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0732 W/kg


**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.452 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0870 W/kg

**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.073 W/kg

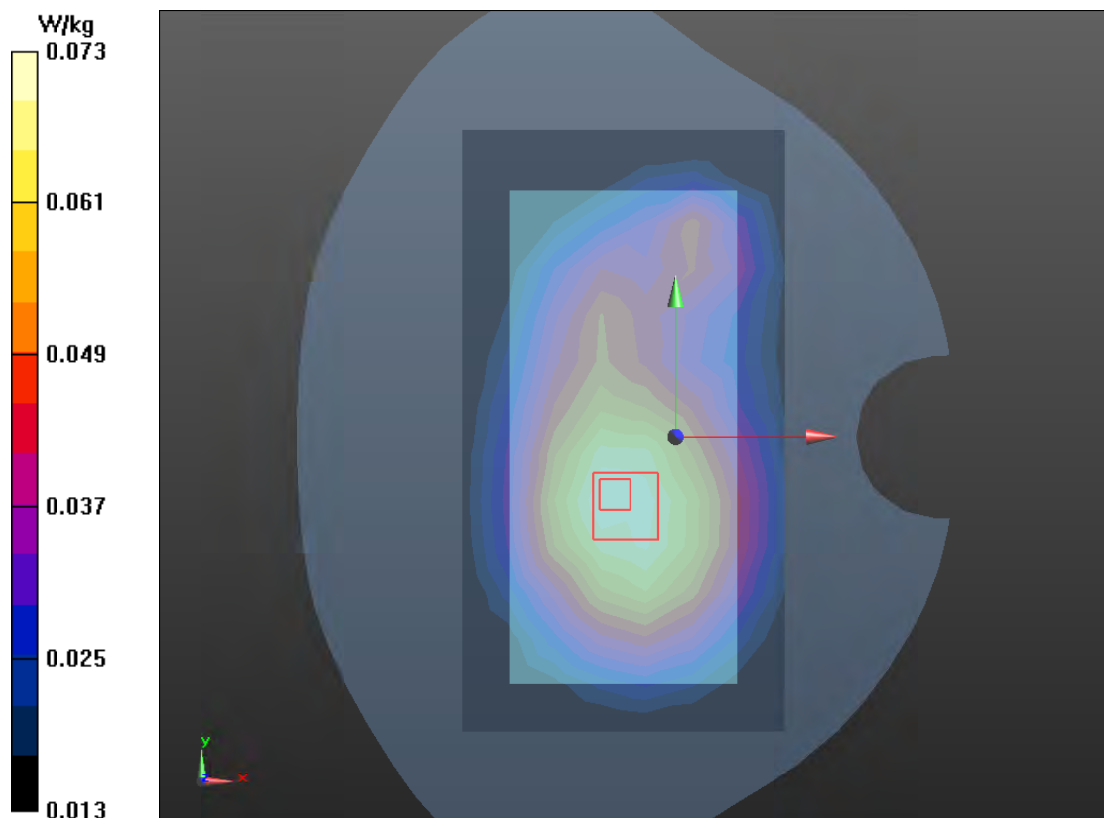

# Plot 80 UMTS Band V Front Side Middle (Distance 10mm, WWAN Antenna Up)

Date: 8/17/2020

Communication System: UID 0, WCDMA 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Front Side Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.126 W/kg


**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.973 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.204 W/kg

**SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.126 W/kg

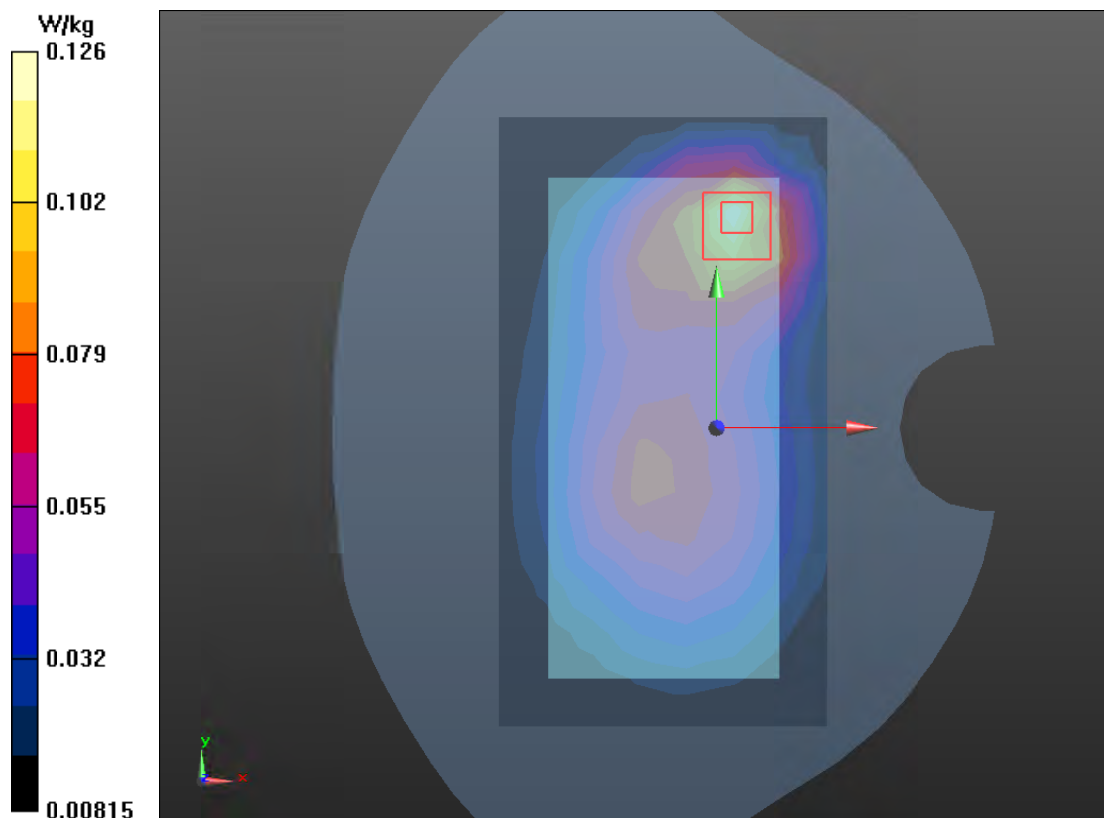

# Plot 81 LTE Band 2 100%RB Right Tilt High (WWAN Antenna Up)

Date: 8/24/2020

Communication System: UID 0, LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.408$  S/m;  $\epsilon_r = 38.294$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Tilt High/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.872 W/kg


**Right Tilt High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.99 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.343 W/kg**

Maximum value of SAR (measured) = 0.905 W/kg

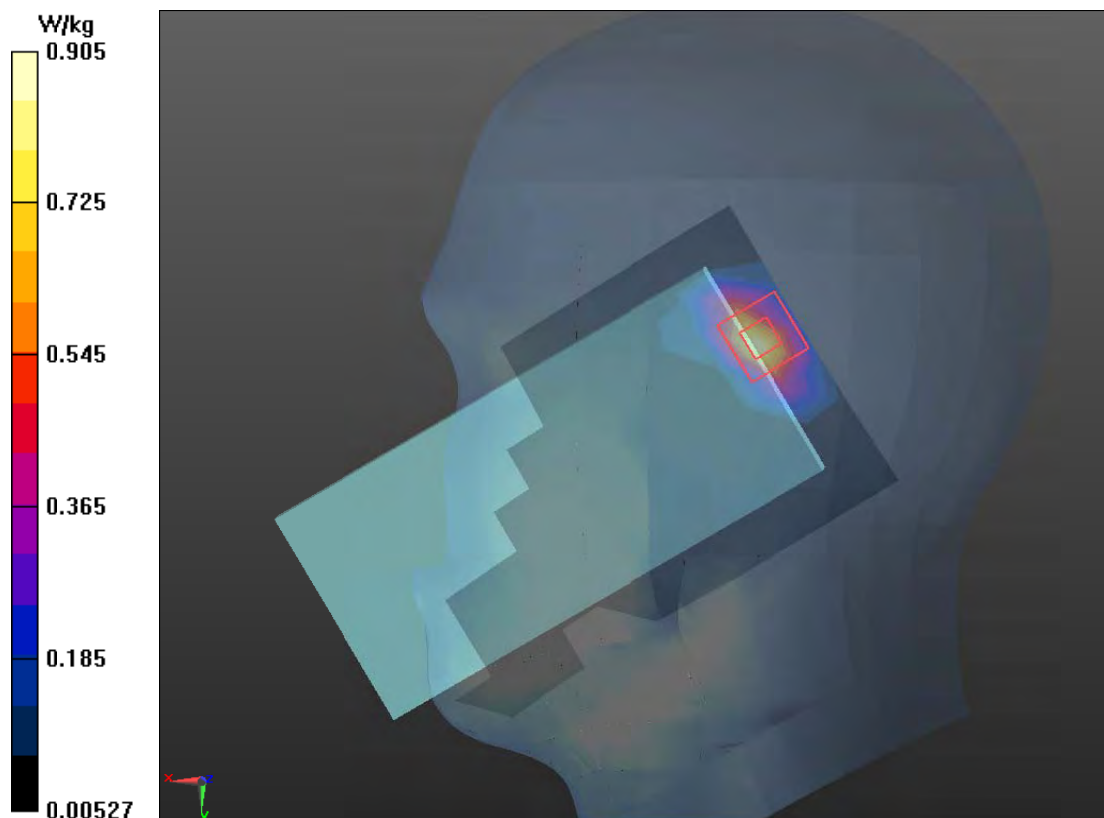

# Plot 82 LTE Band 2 50%RB Back Side High (Distance 15mm, WWAN Antenna Up)

Date: 8/24/2020

Communication System: UID 0, LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.434$  S/m;  $\epsilon_r = 38.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.139 W/kg


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.801 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.238 W/kg

**SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

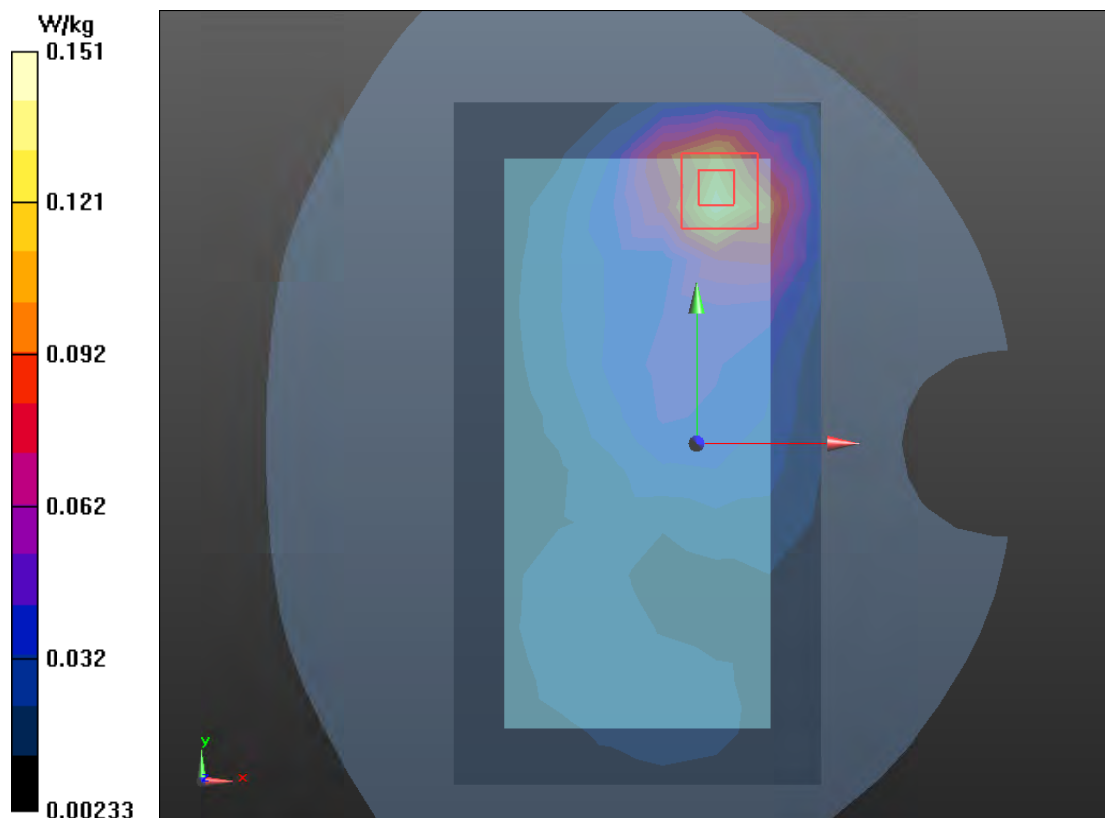

# Plot 83 LTE Band 2 1RB Top Edge High (Distance 10mm, WWAN Antenna Up)

Date: 8/24/2020

Communication System: UID 0, LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.434$  S/m;  $\epsilon_r = 38.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/06/2020;

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Top Edge High/Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.375 W/kg


**Top Edge High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.78 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.821 W/kg

**SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.216 W/kg**

Maximum value of SAR (measured) = 0.502 W/kg

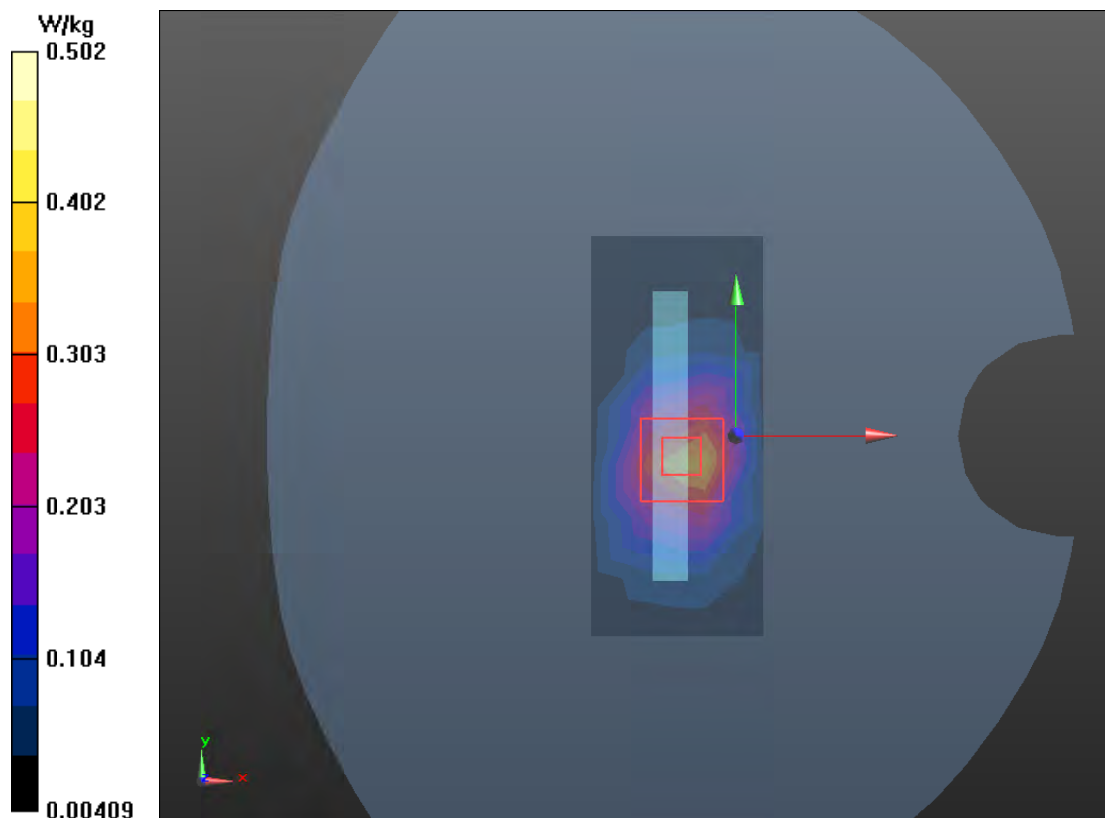

# Plot 84 LTE Band 4 1RB Right Tilt Middle(WWAN Antenna Up)

Date: 8/28/2020

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.313$  S/m;  $\epsilon_r = 39.384$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25) @ 1732.5 MHz; Calibrated: 2020/7/6

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Right Tilt Middle/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.05 W/kg


**Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.68 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.88 W/kg

**SAR(1 g) = 0.943 W/kg; SAR(10 g) = 0.431 W/kg**

Maximum value of SAR (measured) = 1.10 W/kg

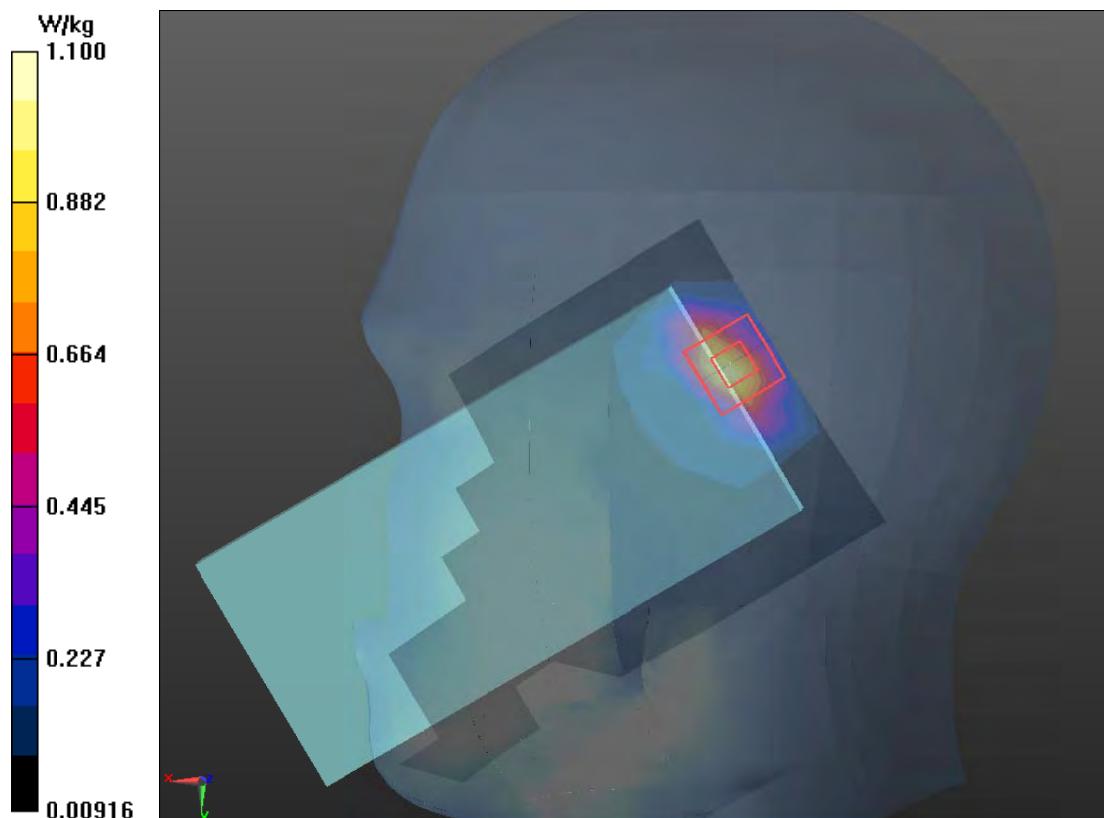

# Plot 85 LTE Band 4 1RB Back Side High (Distance 15mm, WWAN Antenna Up)

Date: 8/28/2020

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 39.378$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25) @ 1745 MHz; Calibrated: 2020/7/6

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Back Side High/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.203 W/kg


**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.811 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.325 W/kg

**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.120 W/kg**

Maximum value of SAR (measured) = 0.220 W/kg

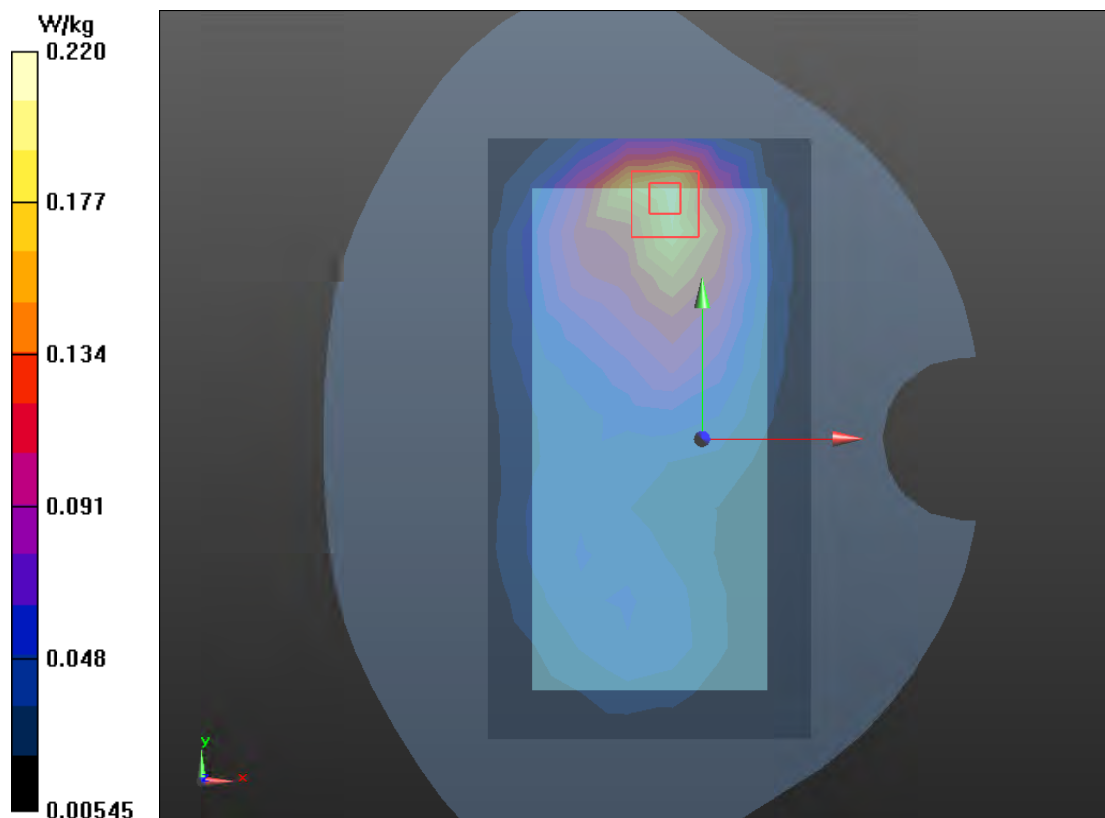

# Plot 86 LTE Band 4 1RB Top Edge Low (Distance 10mm, WWAN Antenna Up)

Date: 8/28/2020

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.303$  S/m;  $\epsilon_r = 39.467$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25) @ 1720 MHz; Calibrated: 2020/7/6

Electronics: DAE4 SN1317; Calibrated: 10/23/2019

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Top Edge Low/Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.645 W/kg

**Top Edge Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.58 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.298 W/kg**

Maximum value of SAR (measured) = 0.660 W/kg

