

# **SPECIFICATION**

Antenna Manufacturer Name	T2Mobile Limited
Address	6F Building C, No.232 Liangjing Road, Zhangjiang High-tech Park, Shanghai 201203, China
ODM P/N:	BCL6C30A12C0 EM45B2 rear-housing-asm- A0&A7&A9 Antenna BQA6C30A1CC0 top-ant-frame-asm A8&A10 Antenna BBA6C30000C1 NFC antenna
Test DATE	2024.8.05
DATASHEET REVISION	

Test Software: EMQuest EMQ-100



EMQuest EMQ-100 Pattern Measurement Softwar

就心面

Test Engineer: Qinyang.Cai




# **Description of Antenna**

A7 antenna peak Gain (dBi)

Frequency Range	WIFI(2.4G)/BT (2400-2500MHZ)
Antenna type	IFA
Peak Gain(dBi)	0.28

#### 2450MHZ

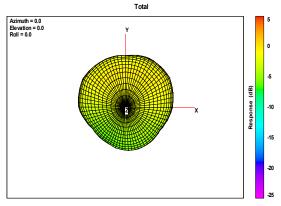


### A8 antenna peak Gain (dBi)

<b>-</b>	
Frequency Range	WIFI(5G/6e) (5150-7125MHZ)
Antenna type	Monopole


Band	Peak Gain(dBi)
WIFI 5G(5150~5250MHz)	-1.98
WIFI 5G(5250~5350MHz)	-1.66
WIFI 5G(5470~5725MHz)	-0.76
WIFI 5G(5725~5850MHz)	-0.62
WIFI 6e(5850~5925MHz)	-0.18
WIFI 6e(5925~6425MHz)	0.35
WIFI 6e(6425~6525MHz)	0.75
WIFI 6e(6525~6875MHz)	1.02
WIFI 6e(6875~7125MHz)	0.7



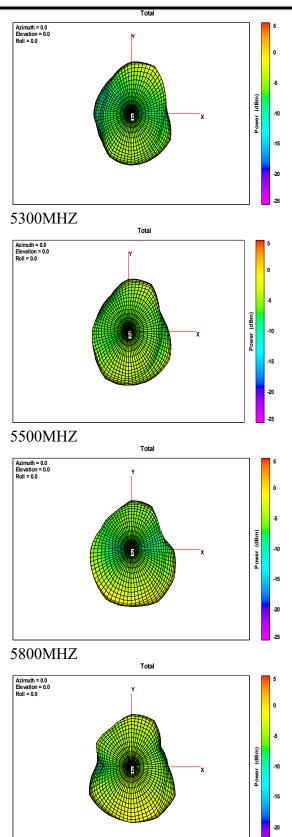


-25



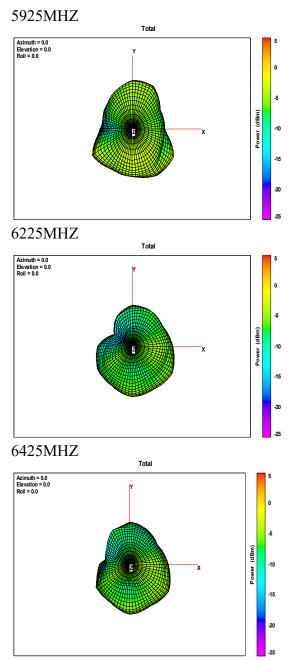




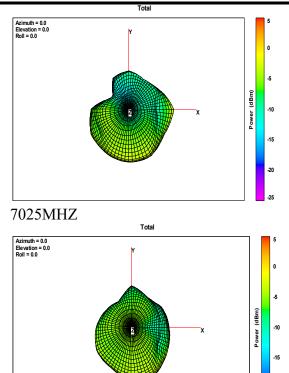

### A9 antenna peak Gain (dBi)

Frequency Range	WIFI(2.4G)(2400-2500MHZ)
Antenna type	IFA
Peak Gain(dBi)	-0.4



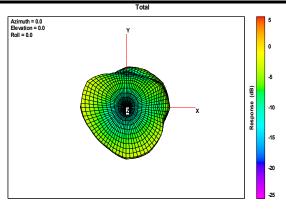



### A10 antenna peak Gain (dBi)


Frequency Range	WIFI(5G/6e) (5150-7125MHZ)
Antenna type	Monopole

Band	Peak Gain(dBi)
WIFI 5G(5150~5250MHz)	-0.65
WIFI 5G(5250~5350MHz)	-0.34
WIFI 5G(5470~5725MHz)	-1.15
WIFI 5G(5725~5850MHz)	-0.32
WIFI 6e(5850~5925MHz)	-1.16
WIFI 6e(5925~6425MHz)	-0.85
WIFI 6e(6425~6525MHz)	-2.44
WIFI 6e(6525~6875MHz)	0.16
WIFI 6e(6875~7125MHz)	1.66




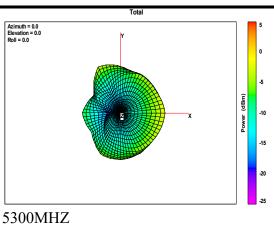

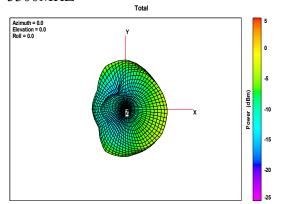


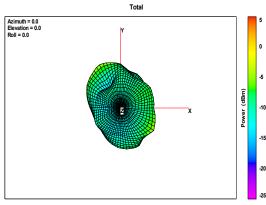




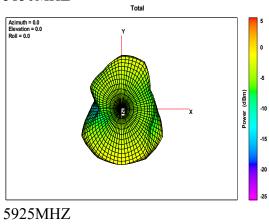




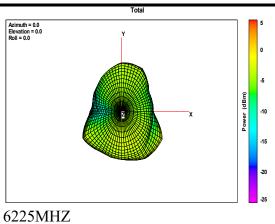


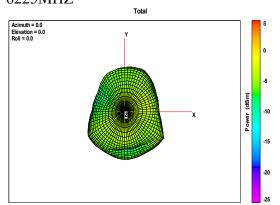




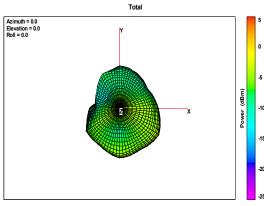



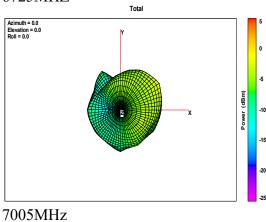




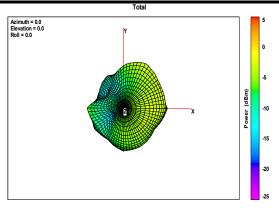

#### RFID antenna peak Gain (dBi)

Antenna type	IFA
Manufacturing Process	Metal frame
Frequency Range	RFID 865 - 868MHz
Peak Gain(dBi)	-3.2
Frequency Range	RFID 902 - 928MHz
Peak Gain(dBi)	-3.5

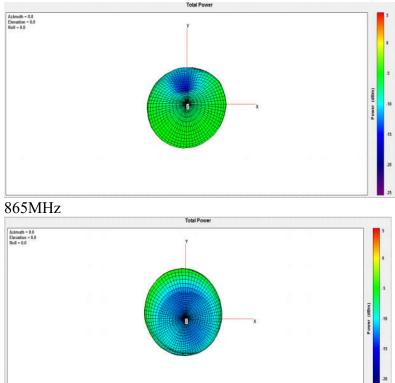



#### A11, NFC

Туре	Dimension(mm)
Loop	54*48



#### Test Environment, list of calibrated test equipment

Test Environment: E5071C

Test Environment: Temperature 18-23 °c Celsius humidity 40%-70%

Last Calibration date:	2024/03/01
Due Calibration date:	2024/09/01
Next Calibration date:	2024/08/01

Test Environment: Temperature 18-23 °c Celsius humidity 40%-70%

Last Calibration date:	2024/03/01
Due Calibration date:	2024/12/01
Next Calibration date:	2024/09/01