



ANTENNA 2 MID CHANNEL

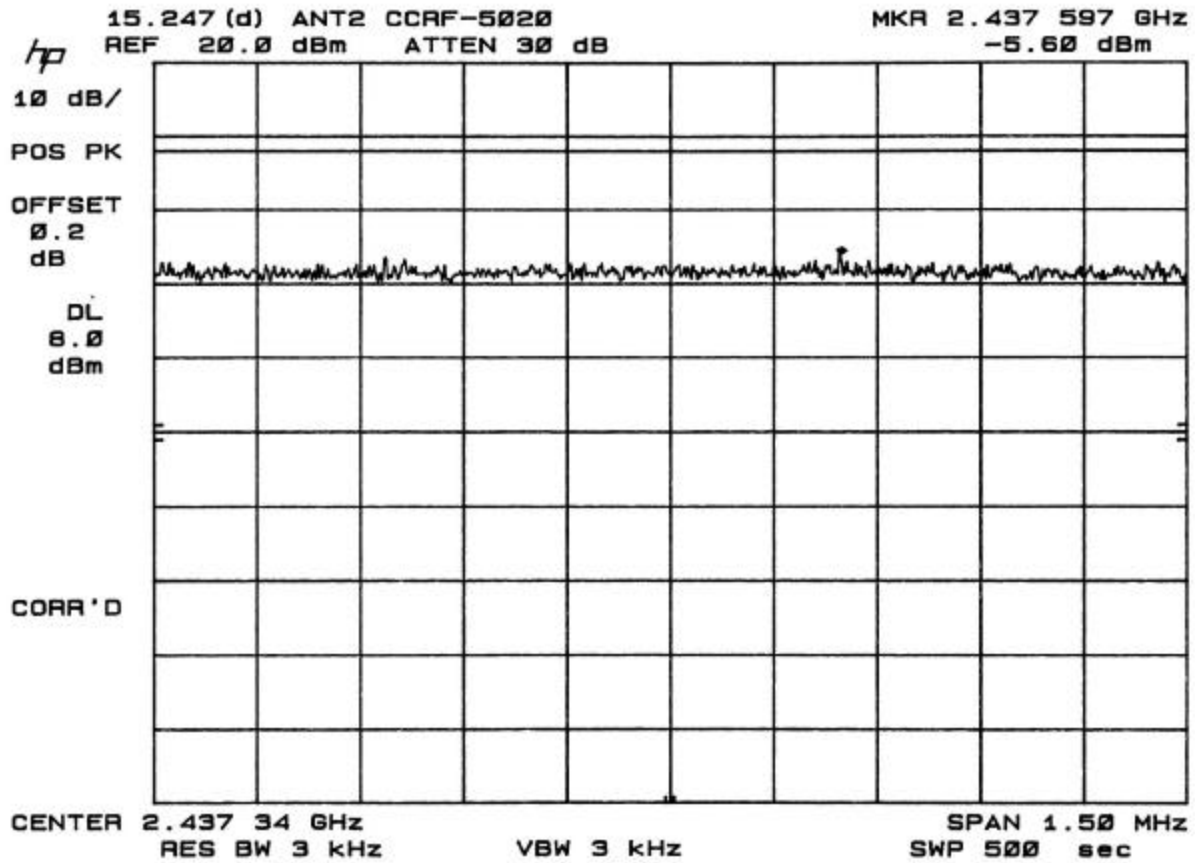

ANTENNA 2 HIGH CHANNEL

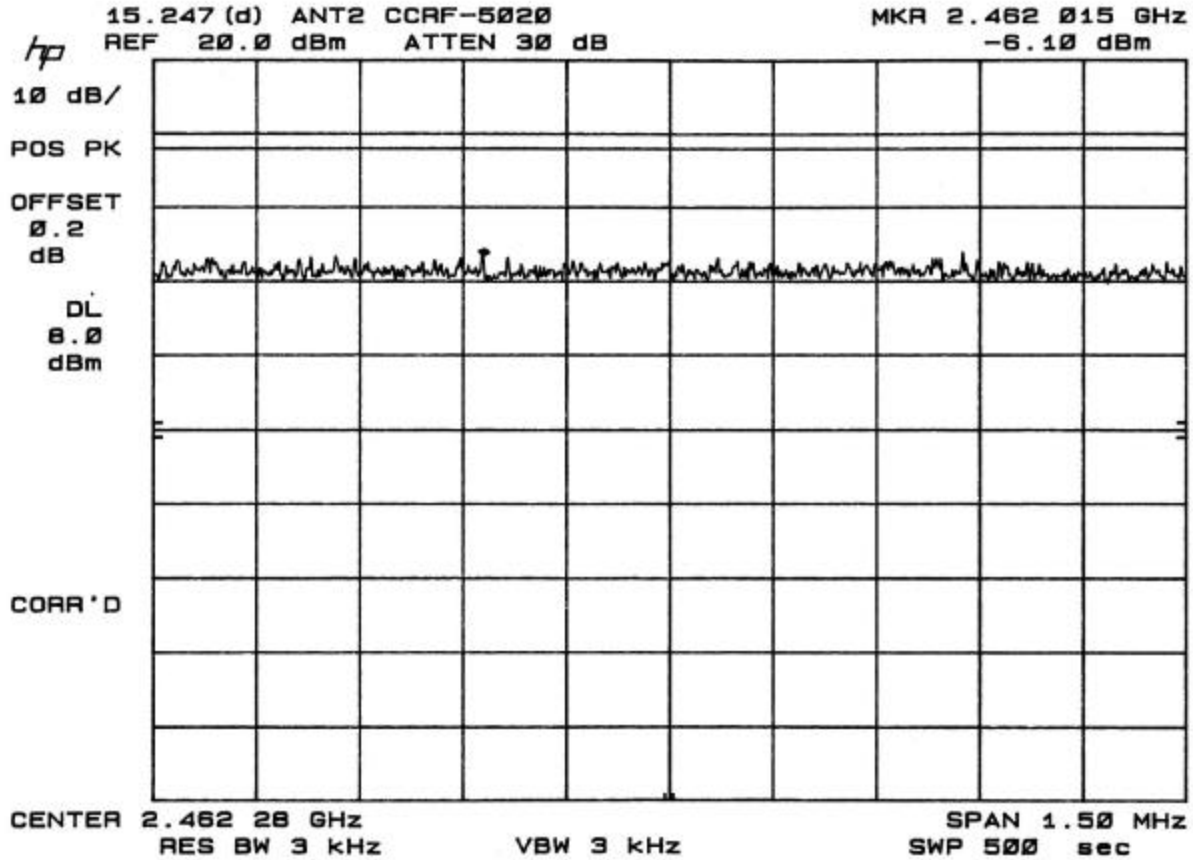

9.5. RESTRICTED BAND EDGE MEASUREMENT

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak <input type="checkbox"/> Average	<input checked="" type="checkbox"/> 100 KHz <input type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 100 KHz <input type="checkbox"/> 10 Hz



TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator; the lower and upper band edge of the EUT is investigated.

The resolutions and video bandwidth were set to 100kHz.


RESULT

No non-compliance noted. See below plots for ANTENNA 1 and 2; LOW and HIGH channels


BANDEDGE @ ANTENNA 1 LOW CHANNEL

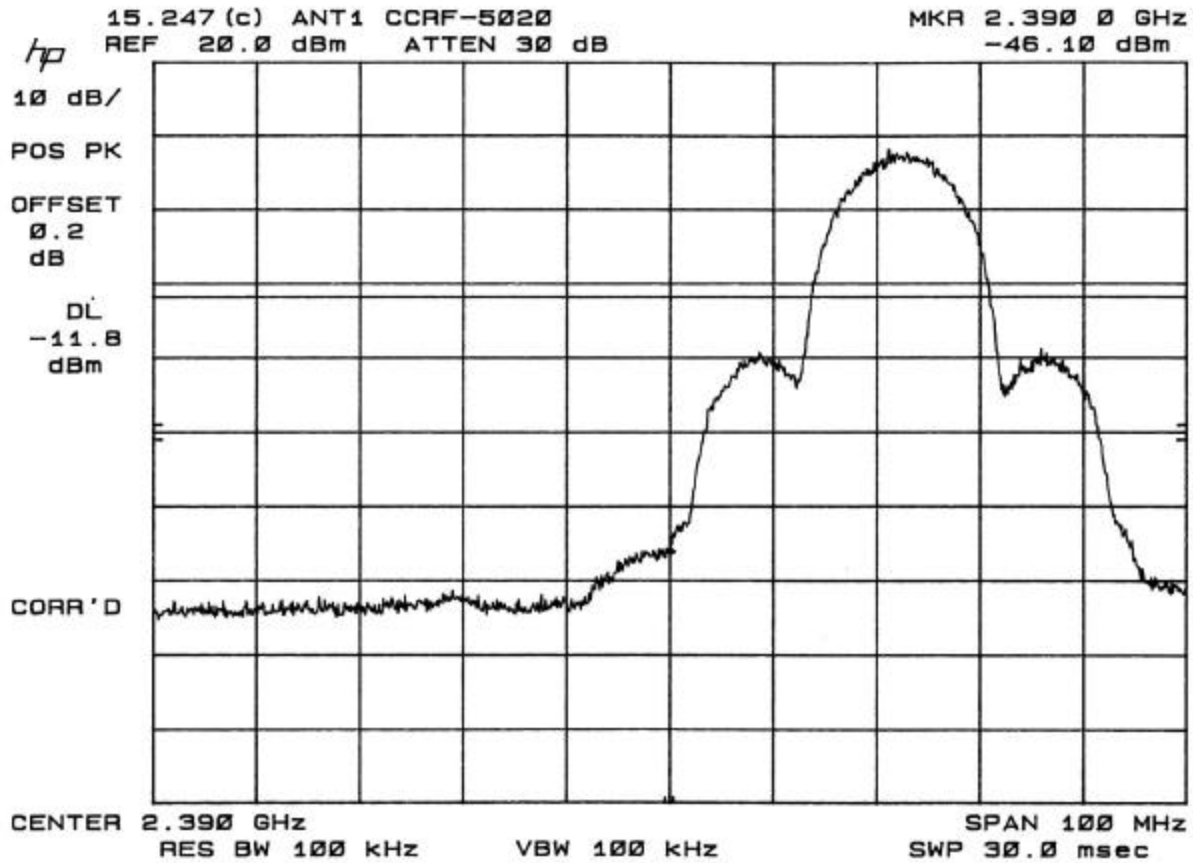


BANDEDGE @ ANTENNA 1 HIGH CHANNEL

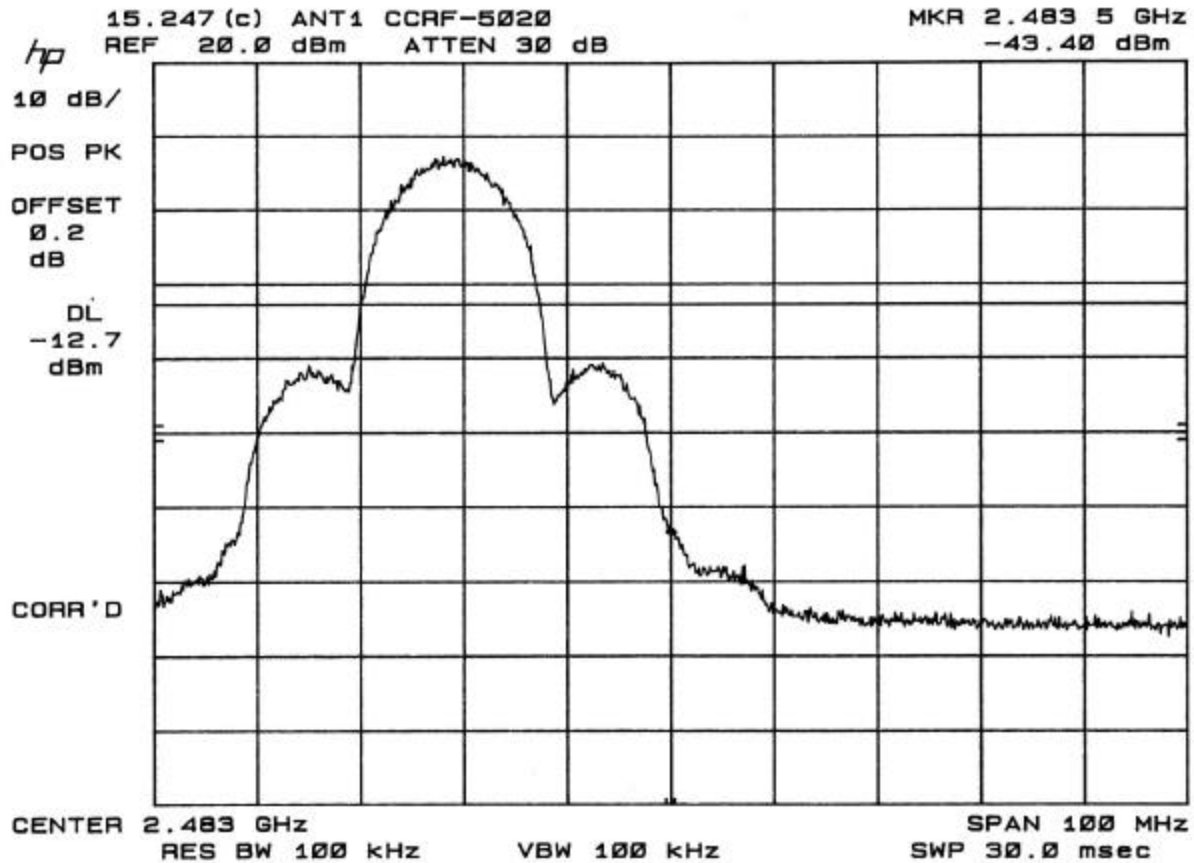

BANDEDGE @ ANTENNA 2 LOW CHANNEL

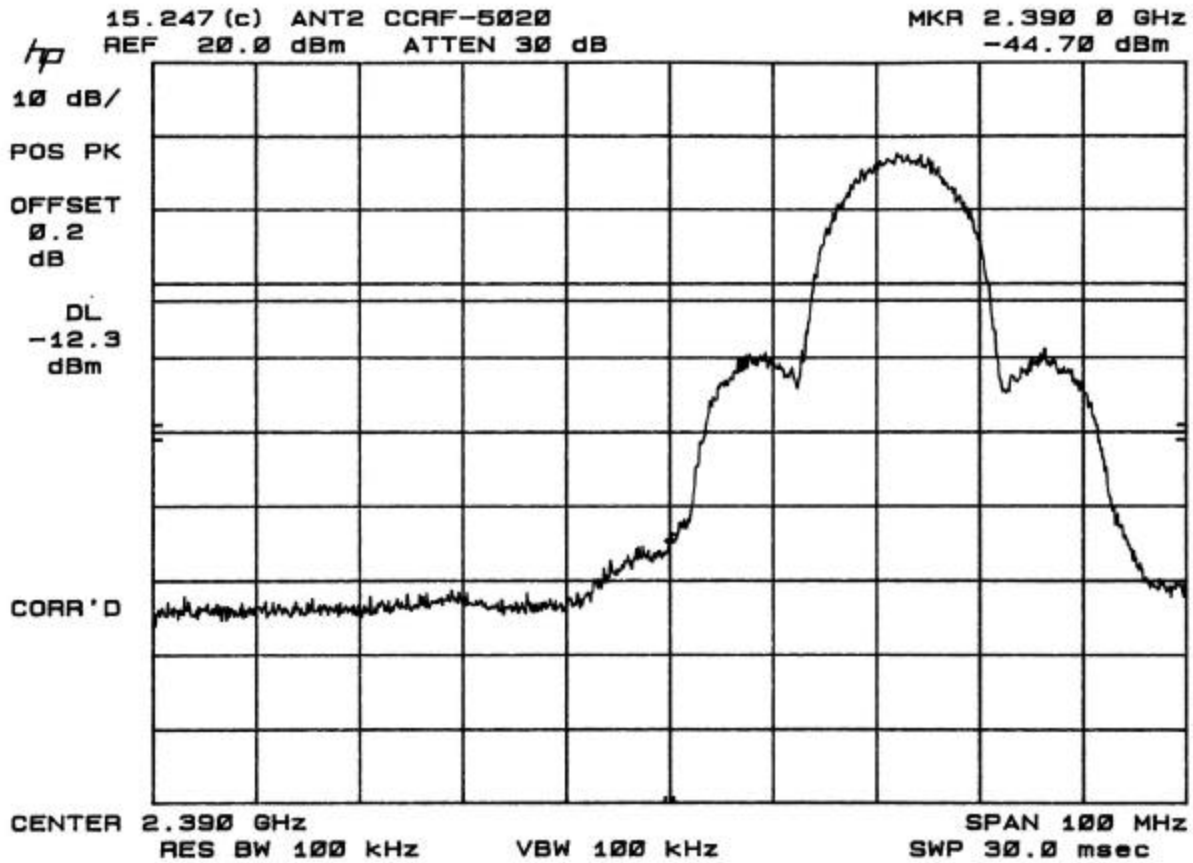

BANDEDGE @ ANTENNA 2 HIGH CHANNEL

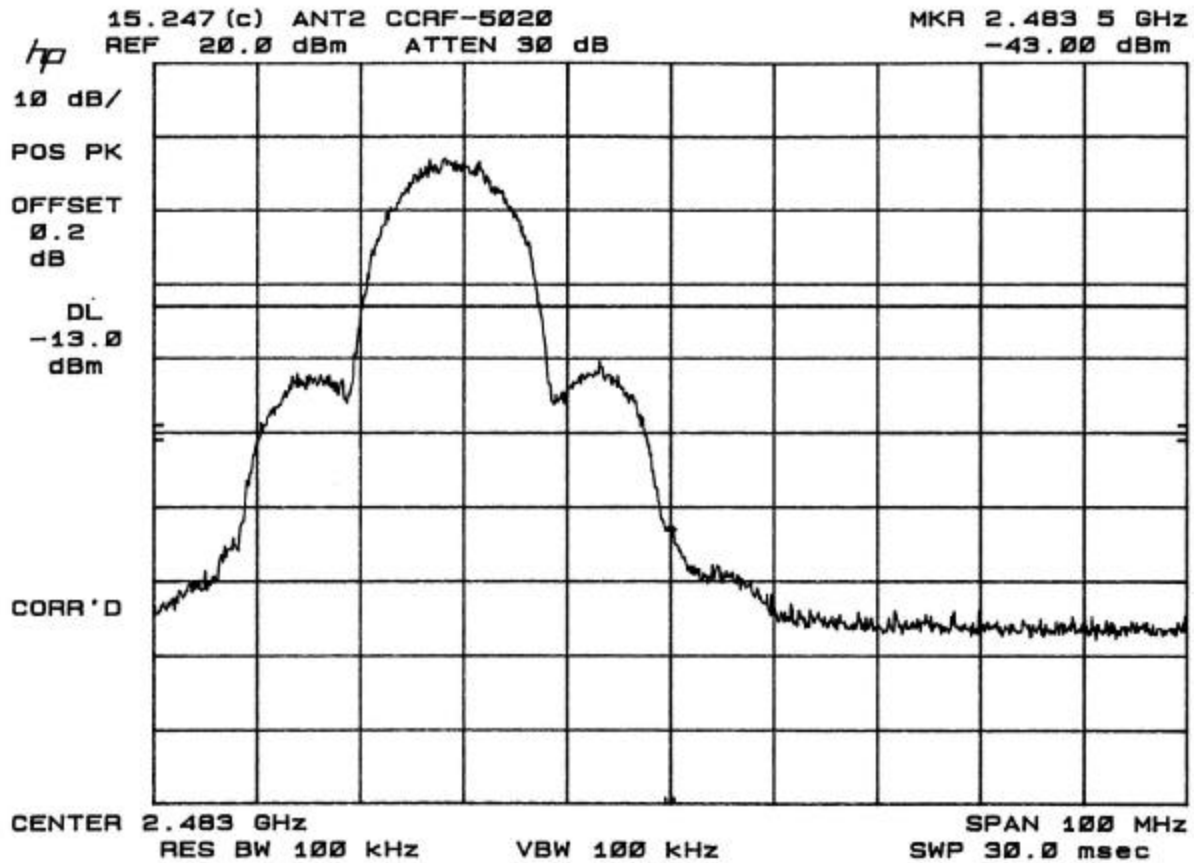

9.6. RADIATED EMISSION

9.6.1. RADIATED EMISSION AND RESTRICTED BANDS

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 KHz	<input checked="" type="checkbox"/> 100 KHz
	<input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz
	<input checked="" type="checkbox"/> Average	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 10 Hz

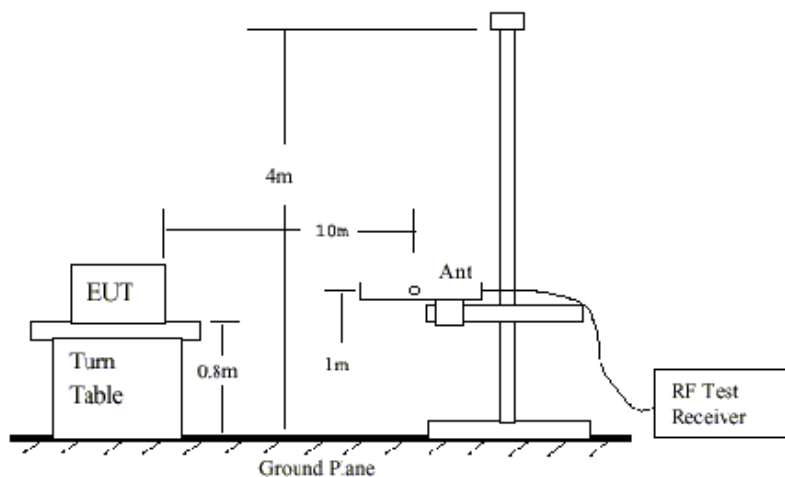


Fig 1: Radiated Emission Measurement 30 to 1000 MHz

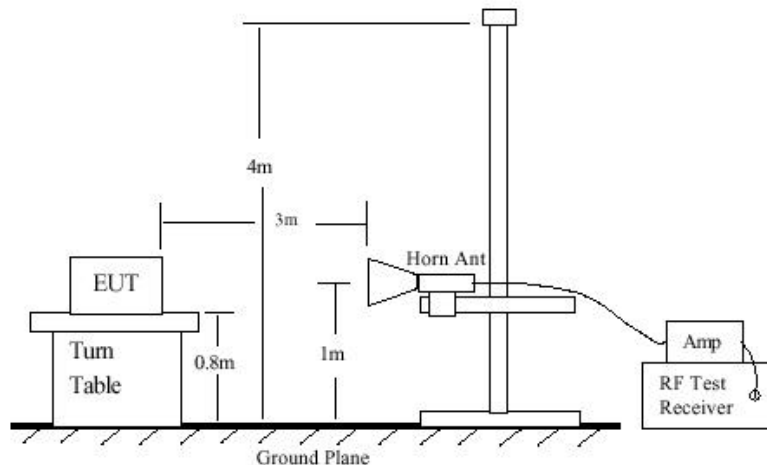


Fig 2: Radiated Emission Above 1000 MHz

TEST PROCEDURE

1. The EUT was placed on the turntable 0.8 meter above ground in 3 meter open area test site.
2. Set the resolution bandwidth to 100KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downwards between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turntable and stop at the angle where the measurement device has maximum reading.
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak.
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak

function, set the resolution bandwidth to 100kHz and repeat the procedures (3)~(6). If the reading is lower than limit, this reading should be recorded, otherwise, the test is fail.


8. Set the resolution and video bandwidth of the spectrum analyzer to 1MHz and repeat procedures (3)~(6) for frequency band from 1 GHz to 10 times carrier frequency.

9. If the reading for the local peak is lower than the Average limit, no further testing is needed in this local peak and this reading should be recorded. If it is higher than Average limit but lower than Peak limit, then set the resolution bandwidth to 1MHz and video bandwidth to 10Hz. Repeat procedures (3)~(6). If the maximum reading is lower than Average limit, then this reading should be recorded. If it is higher, then the test is fail.


RESULT

No non-compliance noted. See data below.

EUT with power supply model 4001, S/N: A02126015000069

 <p>FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP</p> <p>561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888</p>						<p>Project #: 02U1260-1</p> <p>Report #: 020430B1</p> <p>Date& Time: 04/30/02 3:53 PM</p> <p>Test Engr: KERWIN CORPUZ</p>					
<p>Company: SYMBOL TECHNOLOGIES, INC.</p> <p>EUT Description: 802.11b WLAN RF Port "Butterfly" (M/N: CCRF-5020)</p> <p>Test Configuration: EUT/PowerDsine 4001 S/N: A02126012000069</p> <p>Type of Test: FCC 15.209</p> <p>Mode of Operation: Rx</p>											
<< Main Sheet											
Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
500.00	52.30	17.32	5.24	29.76	45.10	46.00	-0.90	3mV	180.00	1.00	QP
500.00	48.00	17.32	5.24	29.76	40.80	46.00	-5.20	3mH	90.00	1.70	P
450.00	47.10	16.59	4.90	29.55	39.04	46.00	-6.96	3mH	90.00	1.70	P
220.00	54.50	10.11	3.13	29.05	38.70	46.00	-7.30	3mV	80.00	1.00	P
220.00	53.30	10.11	3.13	29.05	37.50	46.00	-8.50	3mH	270.00	1.70	P
400.00	45.90	15.85	4.56	29.34	36.97	46.00	-9.03	3mH	90.00	1.70	P
6 Worst Data											

EUT with power supply model 6012, S/N: S02116416504675

		Project #: 02U1260-1 Report #: 020430B1 Date & Time: 04/30/02 3:53 PM Test Engr: KERWIN CORPUZ	
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888			
Company: SYMBOL TECHNOLOGIES, INC. EUT Description: 802.11b WLAN RF Port "Butterfly" (M/N: CCRF-5020) Test Configuration : EUT/PowerDsine 6012 S/N: S02116416504675 Type of Test: FCC 15.209 Mode of Operation: Rx		<< Main Sheet	

Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
500.00	52.30	17.32	5.24	29.76	45.10	46.00	-0.90	3mV	180.00	1.00	QP
500.00	48.00	17.32	5.24	29.76	40.80	46.00	-5.20	3mH	90.00	1.70	P
115.95	52.50	11.53	2.33	29.51	36.85	43.50	-6.65	3mV	0.00	1.00	P
110.98	52.80	11.10	2.29	29.52	36.67	43.50	-6.83	3mV	0.00	1.00	P
113.93	52.40	11.35	2.31	29.52	36.55	43.50	-6.95	3mV	0.00	1.00	P
450.00	47.10	16.59	4.90	29.55	39.04	46.00	-6.96	3mH	90.00	1.70	P
6 Worst Data											

COMPLIANCE CERTIFICATION SERVICES, INC.

Radiated Emissions
FCC 15.205

04/18/02
Kerwin Corpuz
A-site (1.0 Meter)

SYMBOL TECHNOLOGIES, INC.
802.11b WLAN RF Port "Butterfly" (M/N: CCRF-5020)

fo = 2412 MHz (low channel)

TX mode with ANTENNA 1

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4824V	56.4	44	33.4	4	36.1	9.54	1	49.16	36.76	74	54	-24.8	-17.2
4824H	60.6	48.3	33.4	4	36.1	9.54	1	53.36	41.06	74	54	-20.6	-12.9
7236*	48.1	36.6	37	5	36.4	9.54	1	45.16	33.66	74	54	-28.8	-20.3
9648*	47.6	36.4	38.4	5.9	35.5	9.54	1	47.86	36.66	74	54	-26.1	-17.3
12060*	47.6	36	39.3	6.5	36.3	9.54	1	48.56	36.96	74	54	-25.4	-17
14472*	49.9	38.9	41.2	7.5	38	9.54	1	52.06	41.06	74	54	-21.9	-12.9
16884*	50	39	41.5	8.5	38.9	9.54	1	52.56	41.56	74	54	-21.4	-12.4
19296*	52.8	42.8	31.9	9.4	39.3	9.54	1	46.26	36.26	74	54	-27.7	-17.7
21708*	53.1	42.8	32.5	10.2	38.1	9.54	1	49.16	38.86	74	54	-24.8	-15.1
24120*	40.9	31.3	32.5	2.52	0	20	1	56.92	47.32	74	54	-17.1	-6.68

fo = 2437 MHz (mid channel)

TX mode with ANTENNA 1

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4874V	57.6	45	33.4	4	36.1	9.54	1	50.36	37.76	74	54	-23.6	-16.2
4874H	60.9	48.5	33.4	4	36.1	9.54	1	53.66	41.26	74	54	-20.3	-12.7
7311*	48.1	36.6	37	5	36.4	9.54	1	45.16	33.66	74	54	-28.8	-20.3
9748*	47.6	36.4	38.4	5.9	35.5	9.54	1	47.86	36.66	74	54	-26.1	-17.3
12185*	47.6	36	39.3	6.5	36.3	9.54	1	48.56	36.96	74	54	-25.4	-17
14622*	49.9	38.9	41.2	7.5	38	9.54	1	52.06	41.06	74	54	-21.9	-12.9
17059*	50	39	41.5	8.5	38.9	9.54	1	52.56	41.56	74	54	-21.4	-12.4
19496*	52.8	42.8	31.9	9.4	39.3	9.54	1	46.26	36.26	74	54	-27.7	-17.7
21933*	53.1	42.8	32.5	10.2	38.1	9.54	1	49.16	38.86	74	54	-24.8	-15.1
24370*	40.9	31.3	32.5	2.52	0	20	1	56.92	47.32	74	54	-17.1	-6.68

fo = 2462 MHz (high channel)

TX mode with ANTENNA 1

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4924V	58	45.2	33.4	4	36.1	9.54	1	50.76	37.96	74	54	-23.2	-16
4924H	62.9	50.5	33.4	4	36.1	9.54	1	55.66	43.26	74	54	-18.3	-10.7
7386*	48.1	36.6	37	5	36.4	9.54	1	45.16	33.66	74	54	-28.8	-20.3
9848*	47.6	36.4	38.4	5.9	35.5	9.54	1	47.86	36.66	74	54	-26.1	-17.3
12310*	47.6	36	39.3	6.5	36.3	9.54	1	48.56	36.96	74	54	-25.4	-17
14772*	49.9	38.9	41.2	7.5	38	9.54	1	52.06	41.06	74	54	-21.9	-12.9
17234*	50	39	41.5	8.5	38.9	9.54	1	52.56	41.56	74	54	-21.4	-12.4
19696*	52.8	42.8	31.9	9.4	39.3	9.54	1	46.26	36.26	74	54	-27.7	-17.7
22158*	53.1	42.8	32.5	10.2	38.1	9.54	1	49.16	38.86	74	54	-24.8	-15.1
24620*	40.9	31.3	32.5	2.52	0	20	1	56.92	47.32	74	54	-17.1	-6.68

fo = 2412 MHz (low channel)

TX mode with ANTENNA 2

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4824V	56.1	44	33.4	4	36.1	9.54	1	48.86	36.76	74	54	-25.1	-17.2
4824H	65.1	52.1	33.4	4	36.1	9.54	1	57.86	44.86	74	54	-16.1	-9.14
7236*	48.1	36.6	37	5	36.4	9.54	1	45.16	33.66	74	54	-28.8	-20.3
9648*	47.6	36.4	38.4	5.9	35.5	9.54	1	47.86	36.66	74	54	-26.1	-17.3
12060*	47.6	36	39.3	6.5	36.3	9.54	1	48.56	36.96	74	54	-25.4	-17
14472*	49.9	38.9	41.2	7.5	38	9.54	1	52.06	41.06	74	54	-21.9	-12.9
16884*	50	39	41.5	8.5	38.9	9.54	1	52.56	41.56	74	54	-21.4	-12.4
19296*	52.8	42.8	31.9	9.4	39.3	9.54	1	46.26	36.26	74	54	-27.7	-17.7
21708*	53.1	42.8	32.5	10.2	38.1	9.54	1	49.16	38.86	74	54	-24.8	-15.1
24120*	40.9	31.3	32.5	2.52	0	20	1	56.92	47.32	74	54	-17.1	-6.68

fo = 2437 MHz (mid channel)

TX mode with ANTENNA 2

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4874V	55.8	43.2	33.4	4	36.1	9.54	1	48.56	35.96	74	54	-25.4	-18
4874H	62.9	49.9	33.4	4	36.1	9.54	1	55.66	42.66	74	54	-18.3	-11.3
7311*	48.1	36.6	37	5	36.4	9.54	1	45.16	33.66	74	54	-28.8	-20.3
9748*	47.6	36.4	38.4	5.9	35.5	9.54	1	47.86	36.66	74	54	-26.1	-17.3
12185*	47.6	36	39.3	6.5	36.3	9.54	1	48.56	36.96	74	54	-25.4	-17
14622*	49.9	38.9	41.2	7.5	38	9.54	1	52.06	41.06	74	54	-21.9	-12.9
17059*	50	39	41.5	8.5	38.9	9.54	1	52.56	41.56	74	54	-21.4	-12.4
19496*	52.8	42.8	31.9	9.4	39.3	9.54	1	46.26	36.26	74	54	-27.7	-17.7
21933*	53.1	42.8	32.5	10.2	38.1	9.54	1	49.16	38.86	74	54	-24.8	-15.1
24370*	40.9	31.3	32.5	2.52	0	20	1	56.92	47.32	74	54	-17.1	-6.68

fo = 2462 MHz (high channel)

TX mode with ANTENNA 2

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4924V	54.6	41.5	33.4	4	36.1	9.54	1	47.36	34.26	74	54	-26.6	-19.7
4924H	61.9	49.8	33.4	4	36.1	9.54	1	54.66	42.56	74	54	-19.3	-11.4
7386*	48.1	36.6	37	5	36.4	9.54	1	45.16	33.66	74	54	-28.8	-20.3
9848*	47.6	36.4	38.4	5.9	35.5	9.54	1	47.86	36.66	74	54	-26.1	-17.3
12310*	47.6	36	39.3	6.5	36.3	9.54	1	48.56	36.96	74	54	-25.4	-17
14772*	49.9	38.9	41.2	7.5	38	9.54	1	52.06	41.06	74	54	-21.9	-12.9
17234*	50	39	41.5	8.5	38.9	9.54	1	52.56	41.56	74	54	-21.4	-12.4
19696*	52.8	42.8	31.9	9.4	39.3	9.54	1	46.26	36.26	74	54	-27.7	-17.7
22158*	53.1	42.8	32.5	10.2	38.1	9.54	1	49.16	38.86	74	54	-24.8	-15.1
24620*	40.9	31.3	32.5	2.52	0	20	1	56.92	47.32	74	54	-17.1	-6.68

NOTE: * Measured noise floor (worse case vertical), horizontal (H) and vertical (V)

DIST: extrapolate reading from 3m specification distance to 1m measurement distance = **-9.54dB**

extrapolate reading from 3m specification distance to 0.3m measurement distance = **-20dB**

AF: Antenna Factor

AMP: Pre-amp gain

CL: SMA cable loss (13ft up to 24 GHz and 3ft above 24 GHz)

HPF: FSF High pass filter insertion loss (4.57GHz; S/N:003)


ANALYZER SETTINGS


RES BW AVG BW

Peak(Pk): 1MHz 1MHz
Average(Avg): 1MHz 10Hz


RESTRICTED BANDEDGE: 2310 – 2390 MHz and 2483.5 – 2500 MHz

BOTTOM BANDEDGE @ ANTENNA 1 LOW CHANNEL

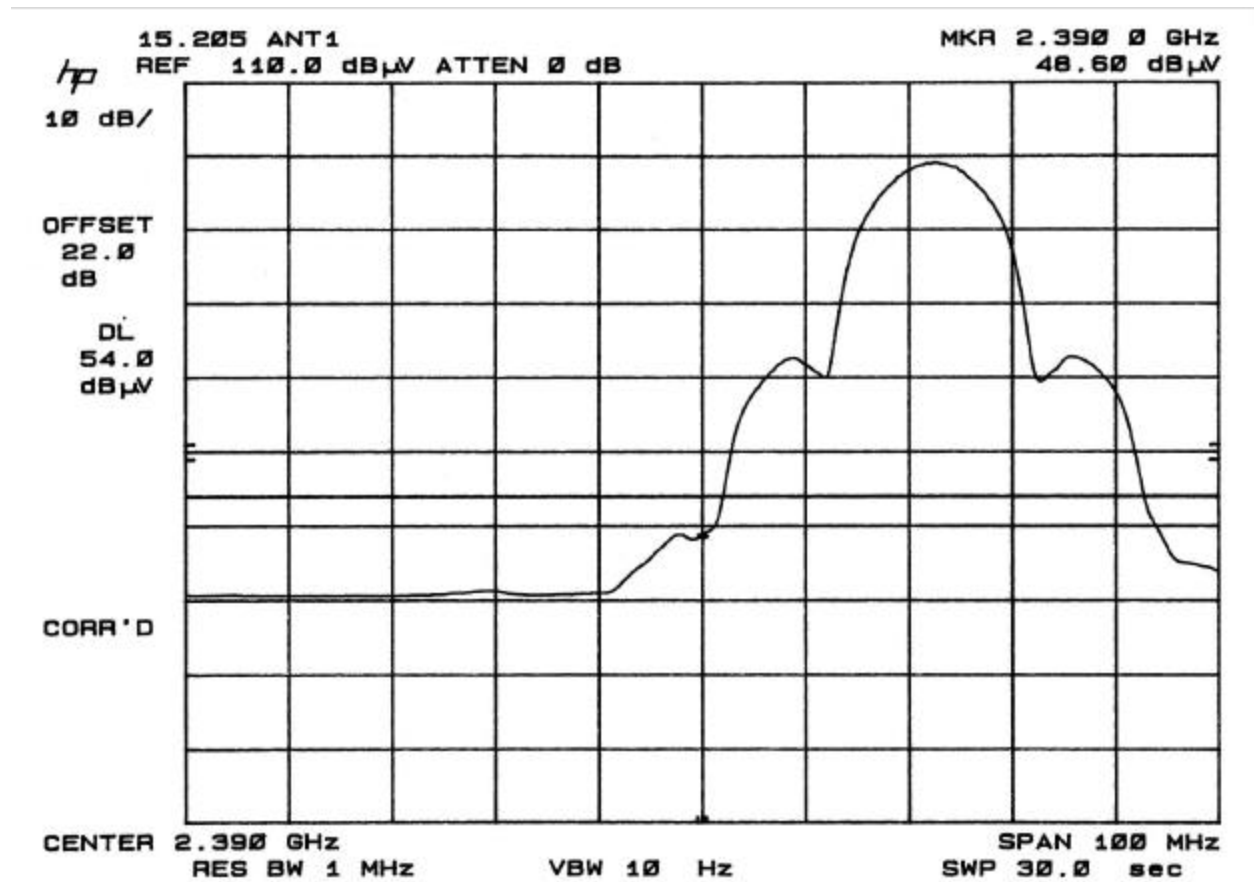


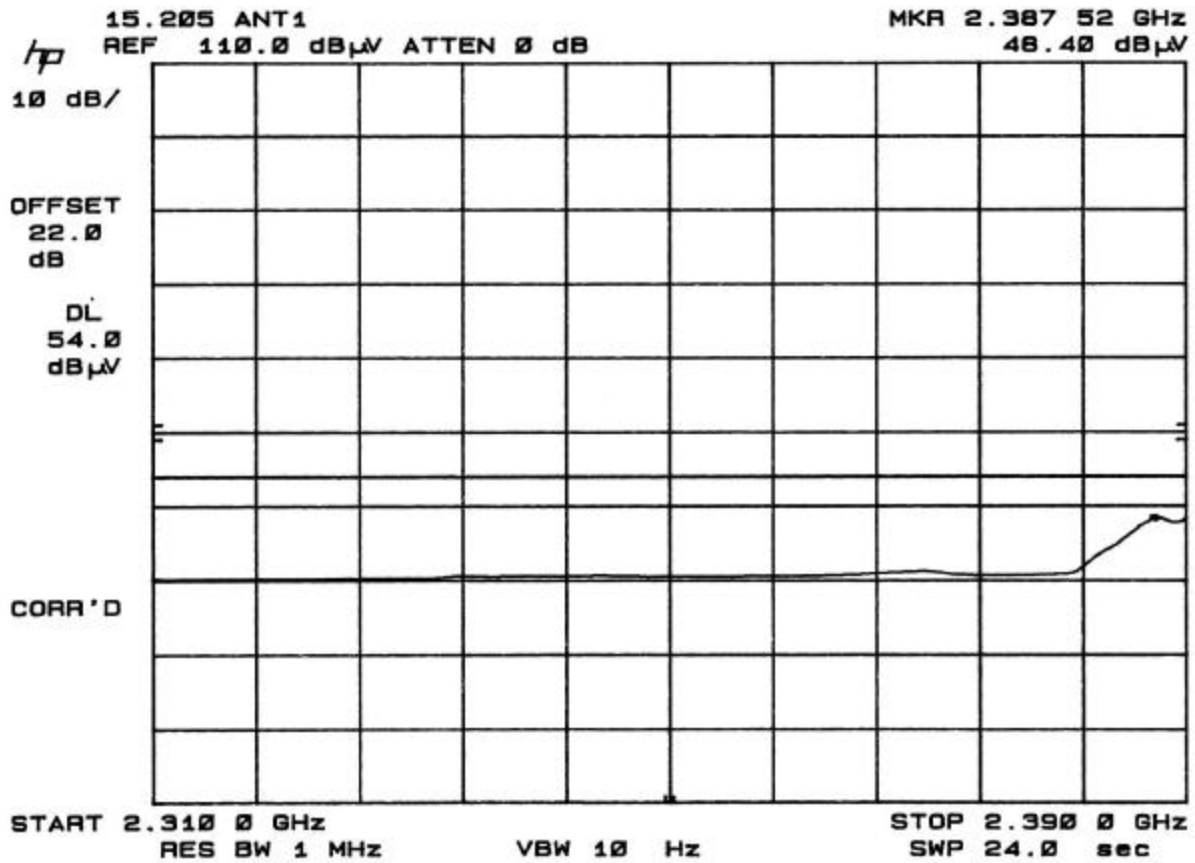


TOP BANDEDGE @ ANTENNA 1 HIGH CHANNEL

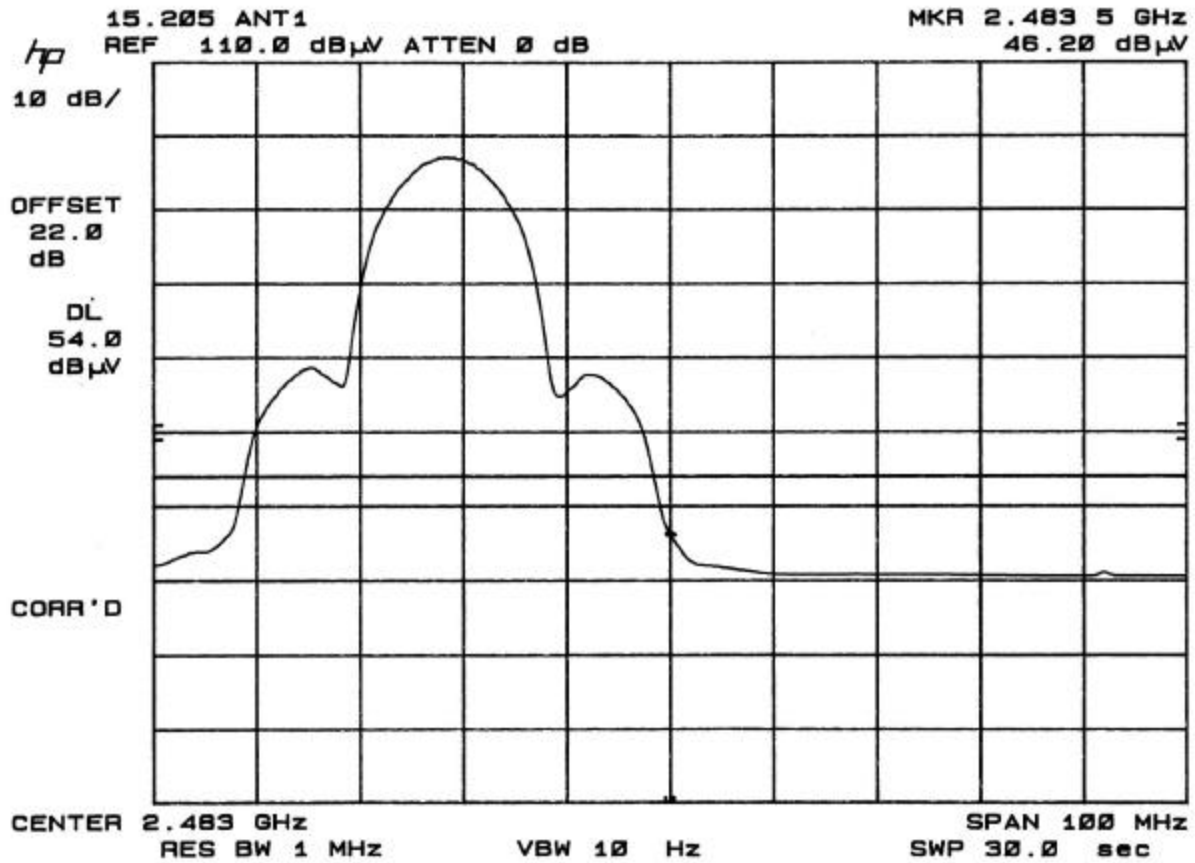


BOTTOM BANDEDGE @ ANTENNA 2 LOW CHANNEL

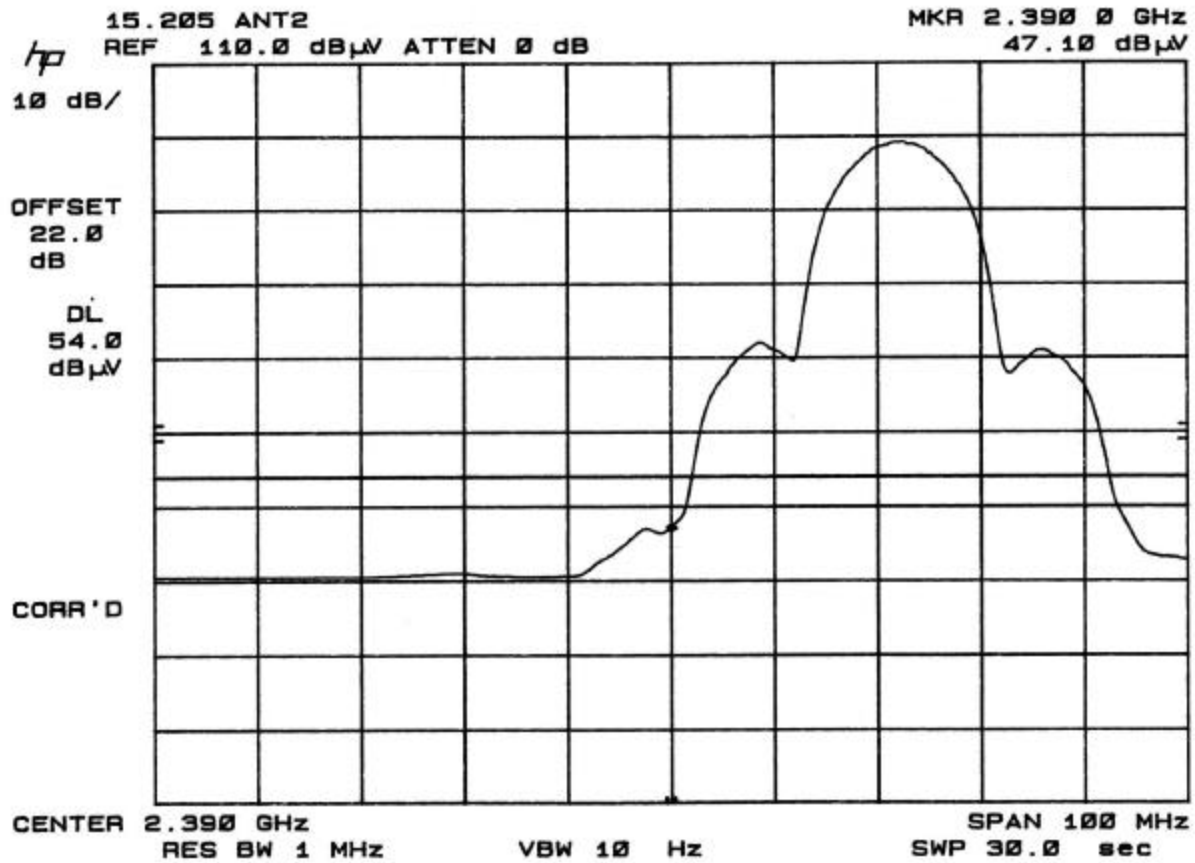

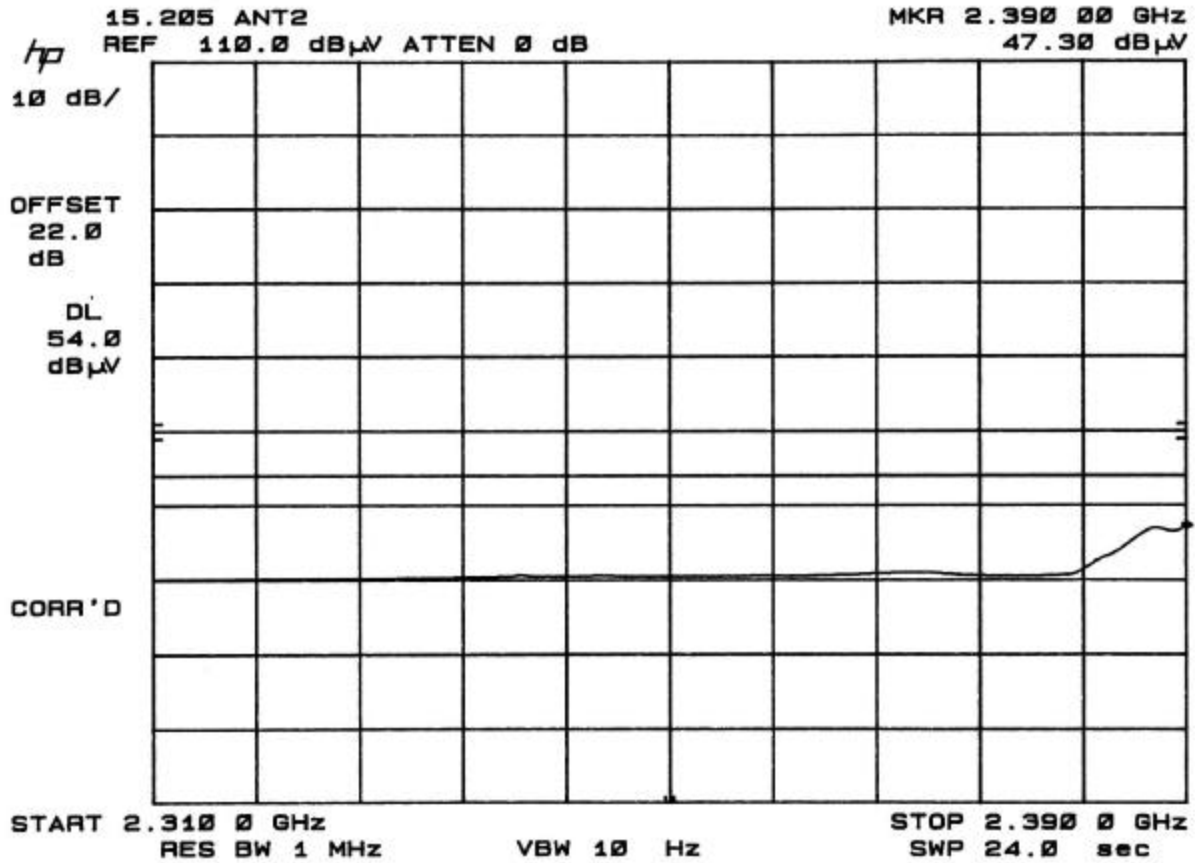

TOP BANDEDGE @ ANTENNA 2 HIGH CHANNEL

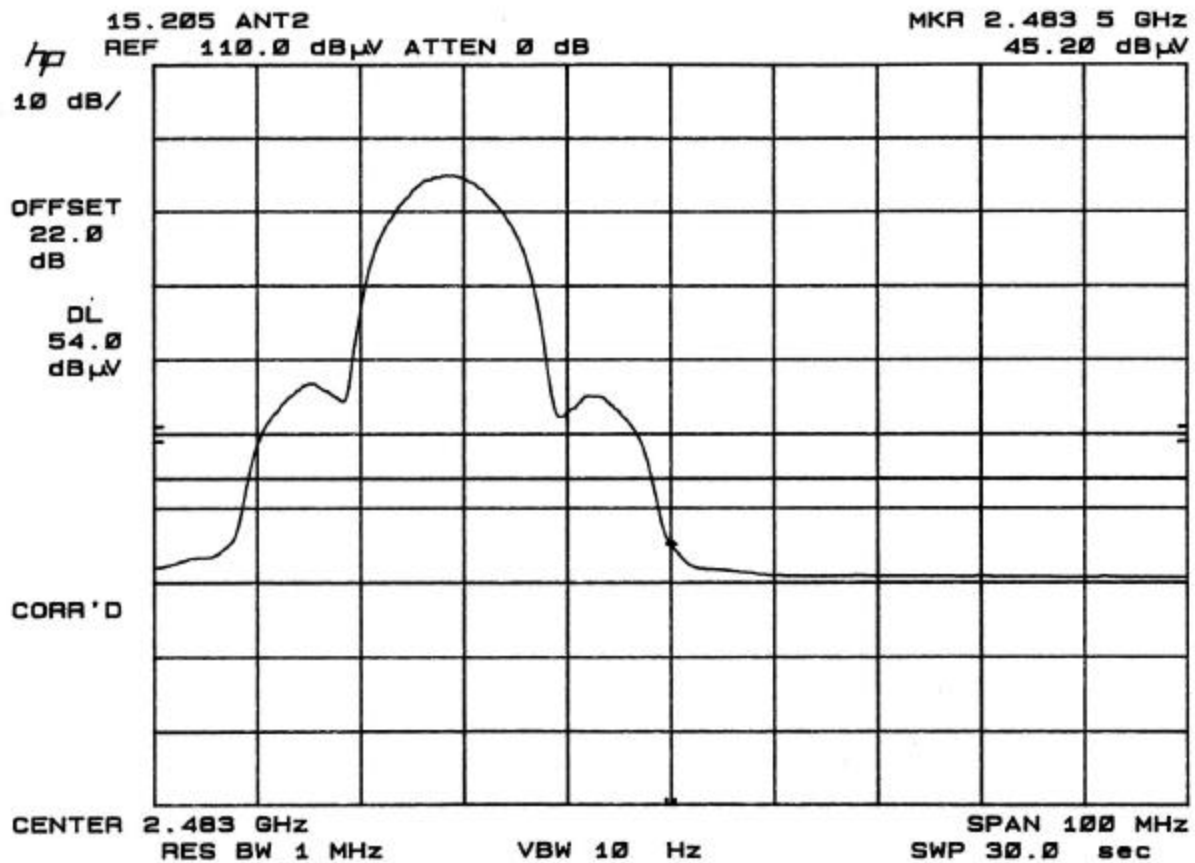


9.7. POWER LINE CONDUCTED EMISSION

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
450 KHz to 30 MHz	<input type="checkbox"/> Peak <input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 9 KHz	<input checked="" type="checkbox"/> 9 KHz

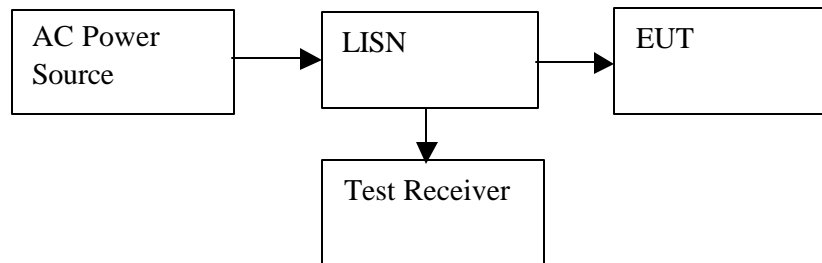

TEST PROCEDURE

1. The EUT was placed on a wooden table 80 cm above the horizontal ground plane and 40 cm away from the vertical ground plane. The EUT was set to transmit / receive in a continuous mode.
2. Conducted disturbance was measured between the phase lead and the ground, and between the neutral lead and the ground. The frequency 0.450 - 30 MHz was investigated.


RESULT

No non-compliance noted. See Line Conduction plot

CONDUCTED EMISSIONS DATA (115VAC 60Hz) for model: 4001									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.51	--	42.27	--	0.00	48.00	--	-5.73	--	L1
7.38	--	38.62	--	0.00	48.00	--	-9.38	--	L1
28.65	--	42.45	--	0.00	48.00	--	-5.55	--	L1
0.52	--	39.55	--	0.00	48.00	--	-8.45	--	L2
7.16	--	36.20	--	0.00	48.00	--	-11.80	--	L2
28.65	--	42.31	--	0.00	48.00	--	-5.69	--	L2
6 Worst Data									




561F Monterey Road,
San Jose, CA 95037 USA
Tel: (408) 463-0885
Fax: (408) 463-0888

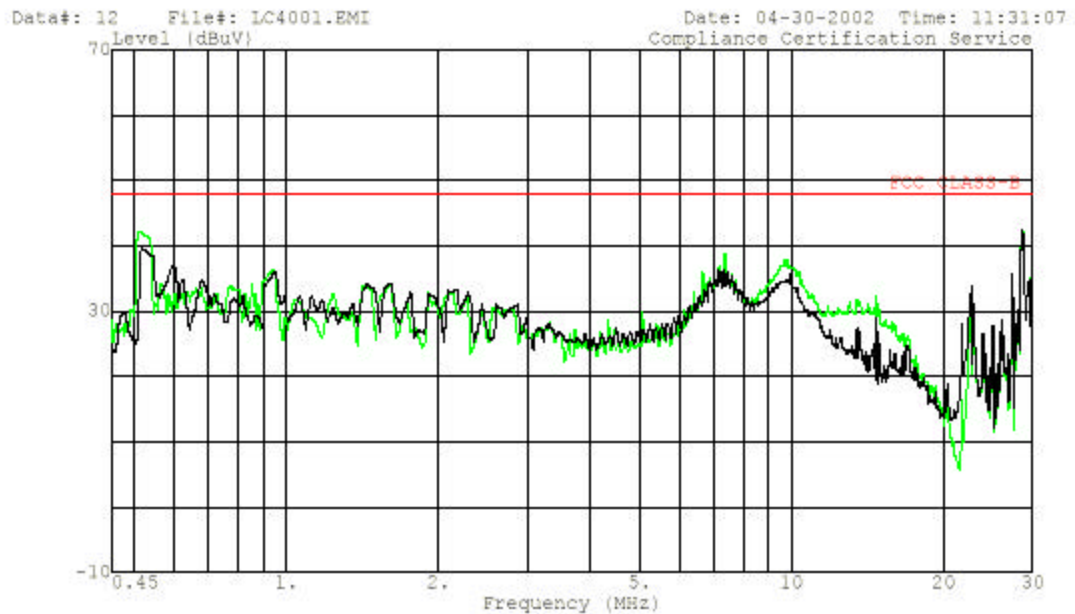

CONDUCTED EMISSIONS DATA (115VAC 60Hz) for model: 6012									
Freq. (MHz)	Reading			Class (dB)	Limit QP	FCC B AV	Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.51	--	46.99	--	0.00	48.00	--	-1.01	--	L1
0.60	--	45.03	--	0.00	48.00	--	-2.97	--	L1
0.87	--	44.00	--	0.00	48.00	--	-4.00	--	L1
0.52	--	47.25	--	0.00	48.00	--	-0.75	--	L2
0.58	--	45.05	--	0.00	48.00	--	-2.95	--	L2
0.80	--	44.51	--	0.00	48.00	--	-3.49	--	L2
6 Worst Data									




561F Monterey Road,
San Jose, CA 95037 USA
Tel: (408) 463-0885
Fax: (408) 463-0888

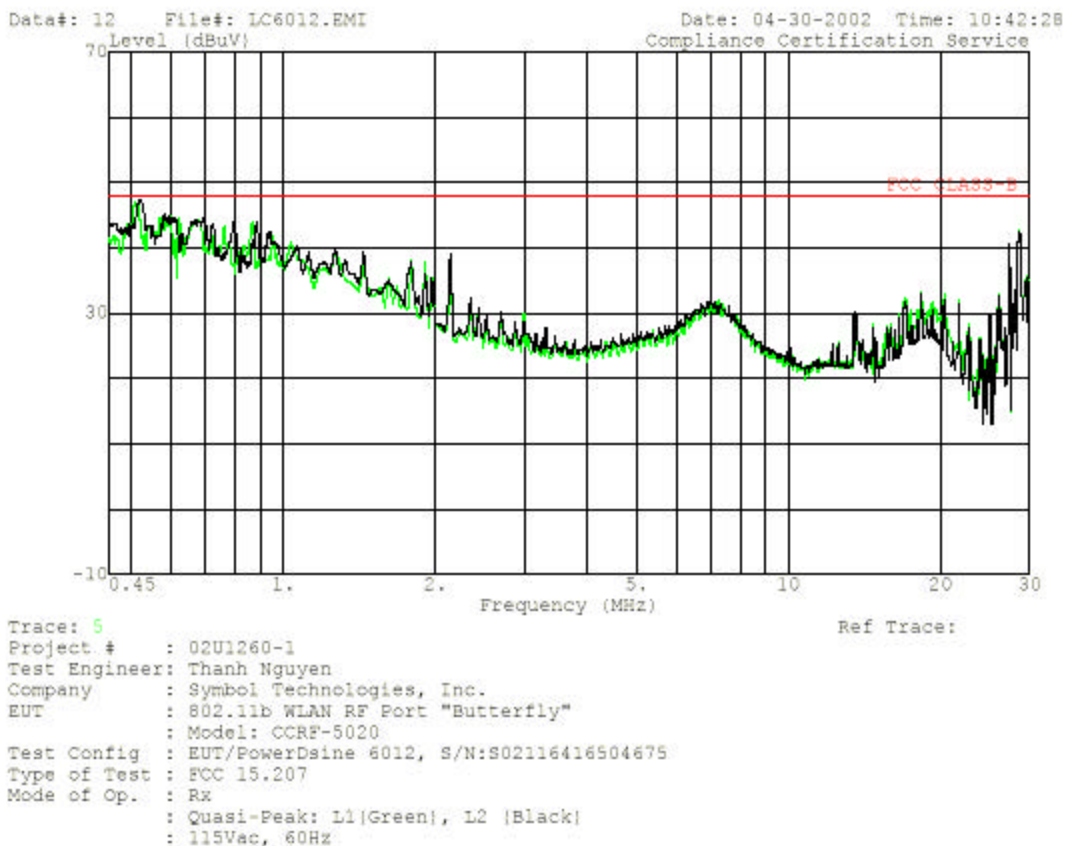


9.8. SETUP PHOTOS


Radiated Emission below 1 GHz Measurement with Power Supply Model 4001

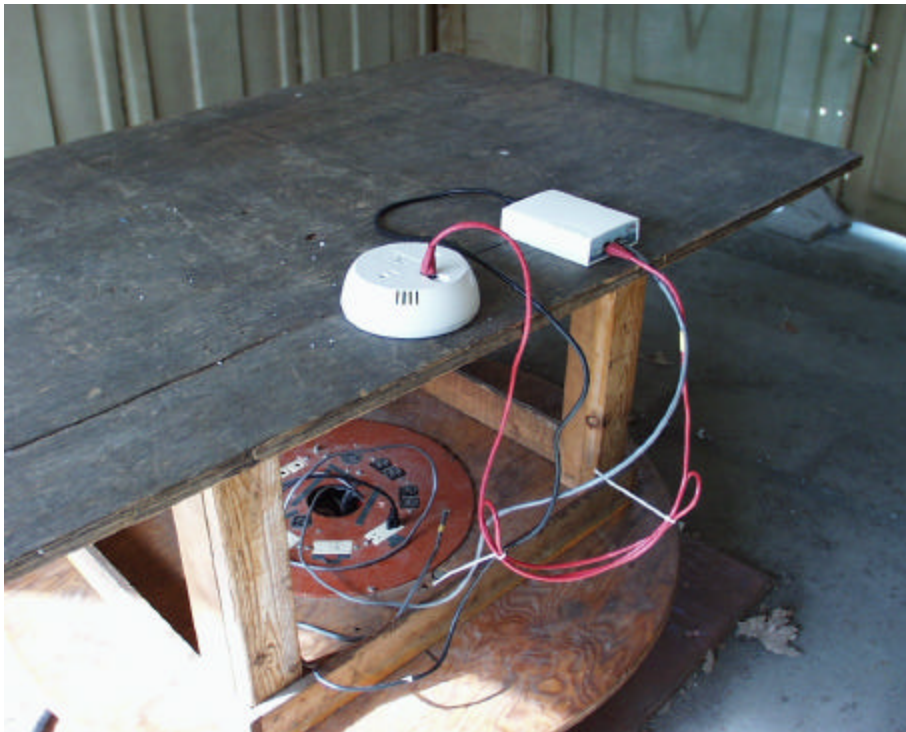




Radiated Emission below 1 GHz Measurement with Power Supply Model 6012


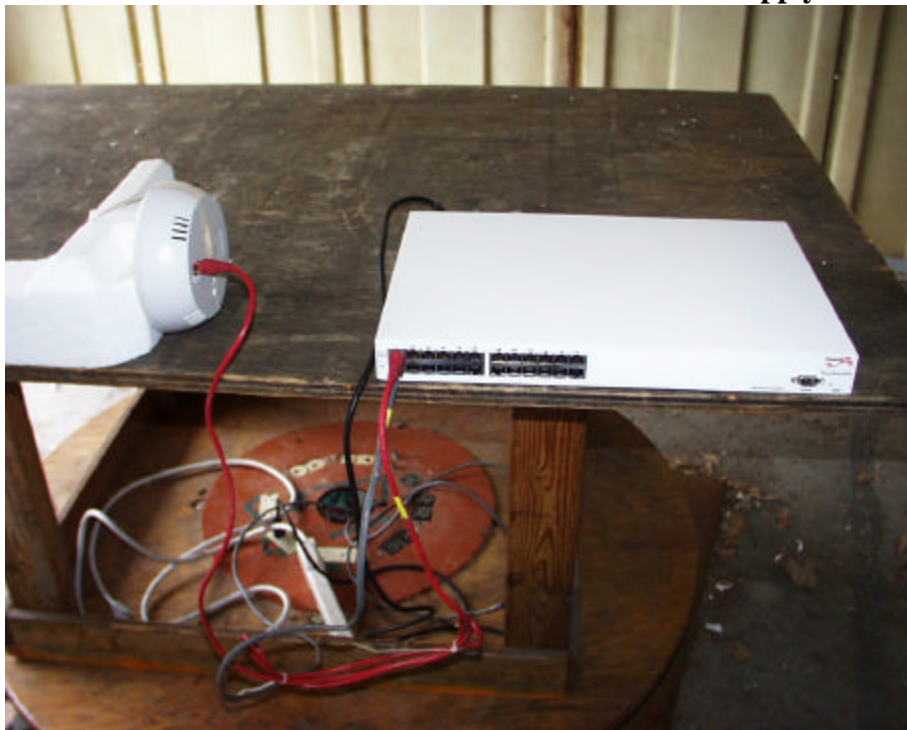


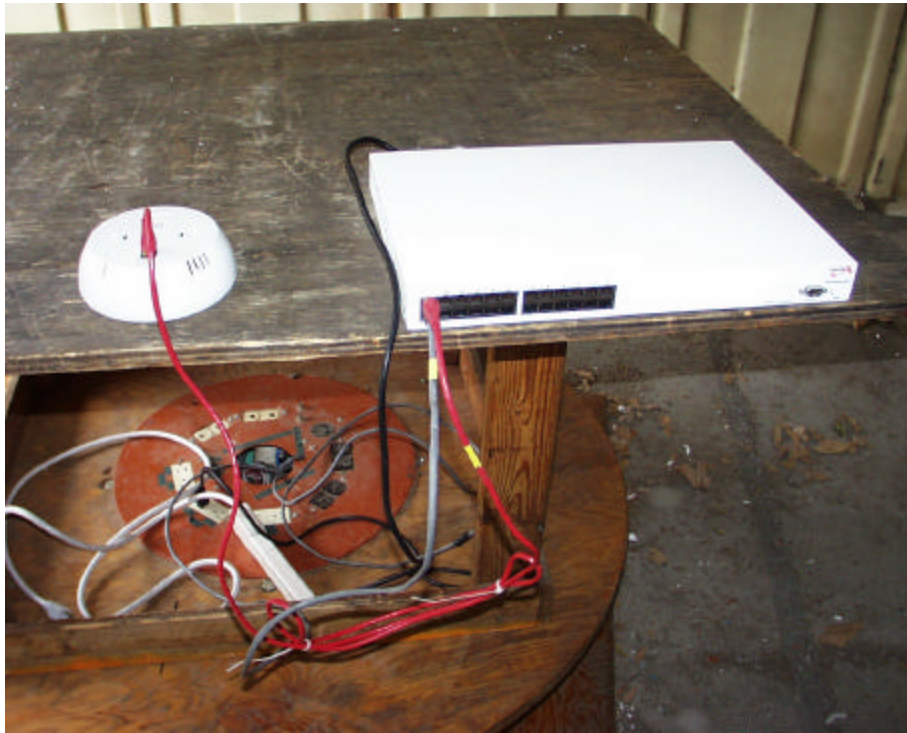

Conducted Emission Measurement with Power Supply Model 4001

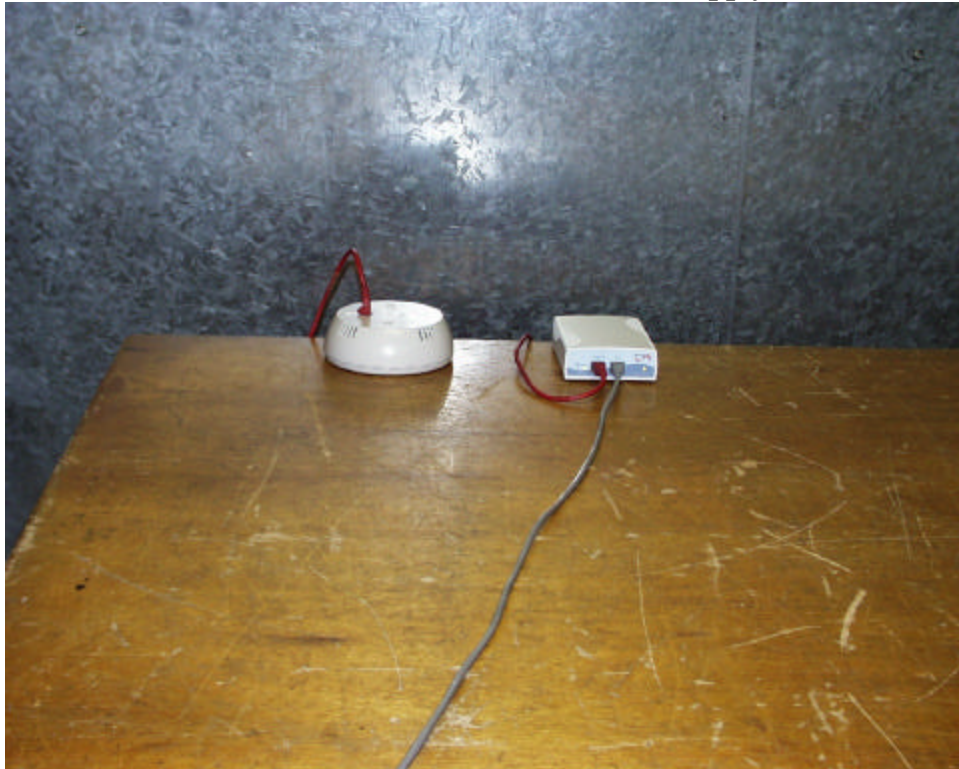

Conducted Emission Measurement with Power Supply Model 6012

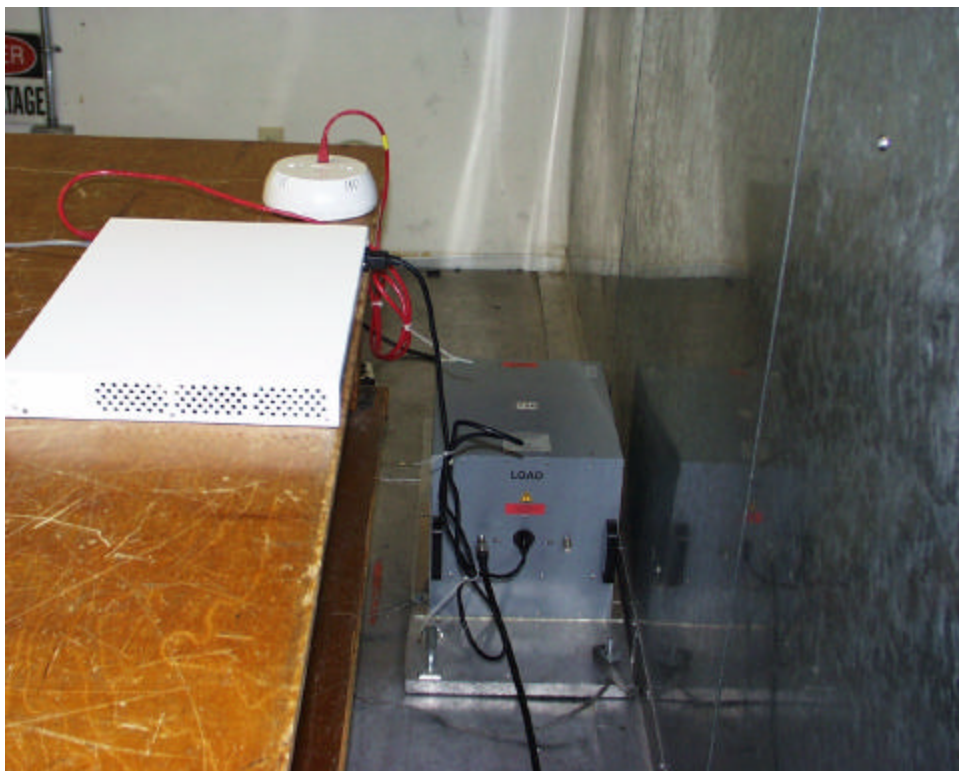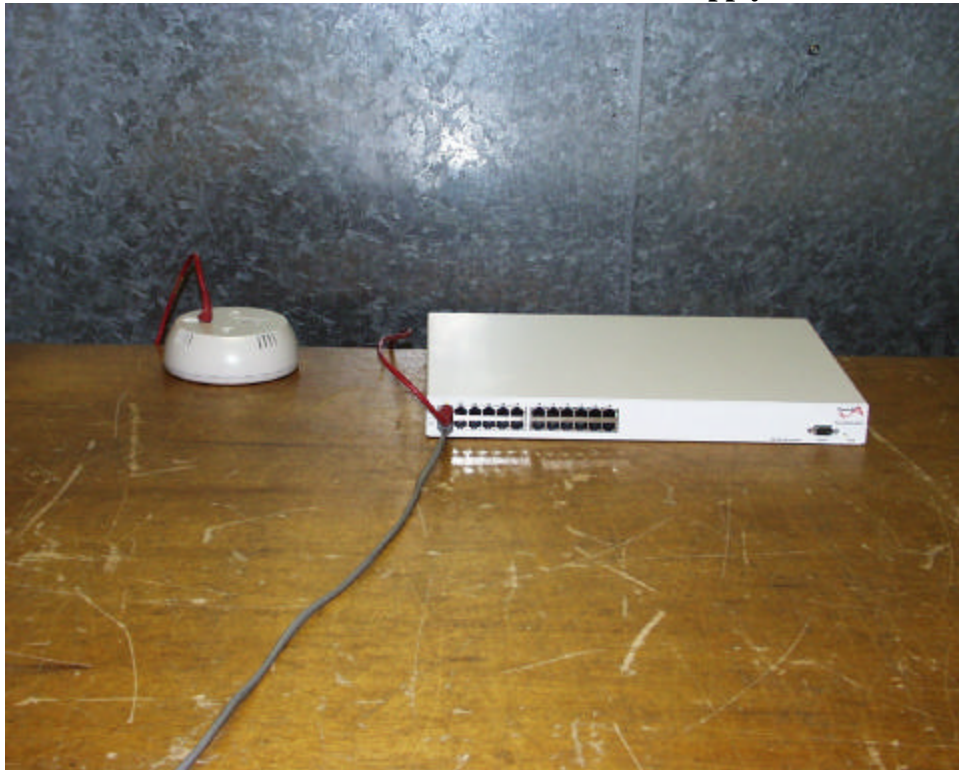


Radiated Emission above 1 GHz Measurement






Antenna Port Terminal Measurement

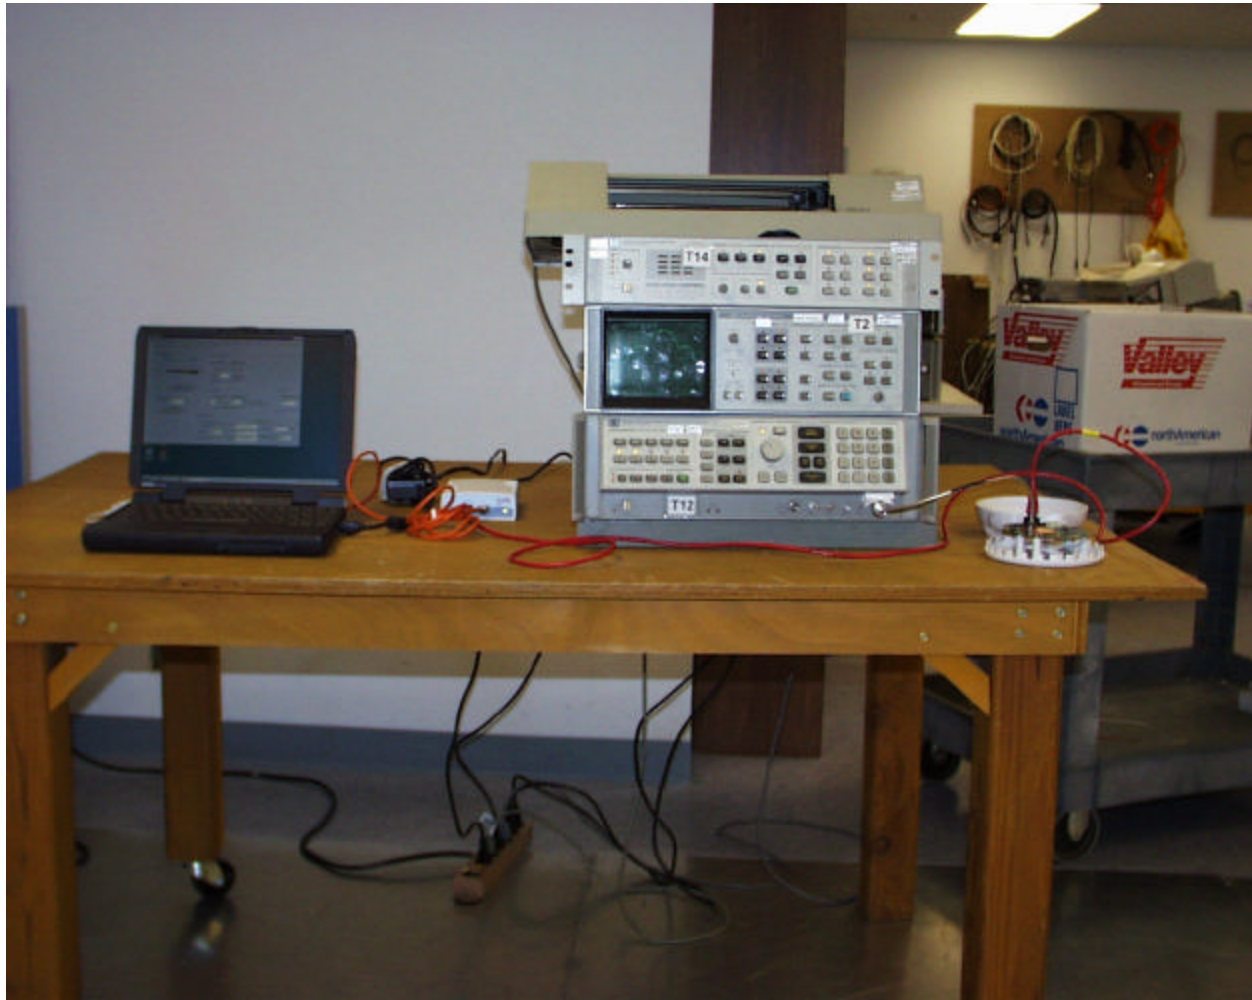

Peak Power Measurement at Antenna Port Terminal

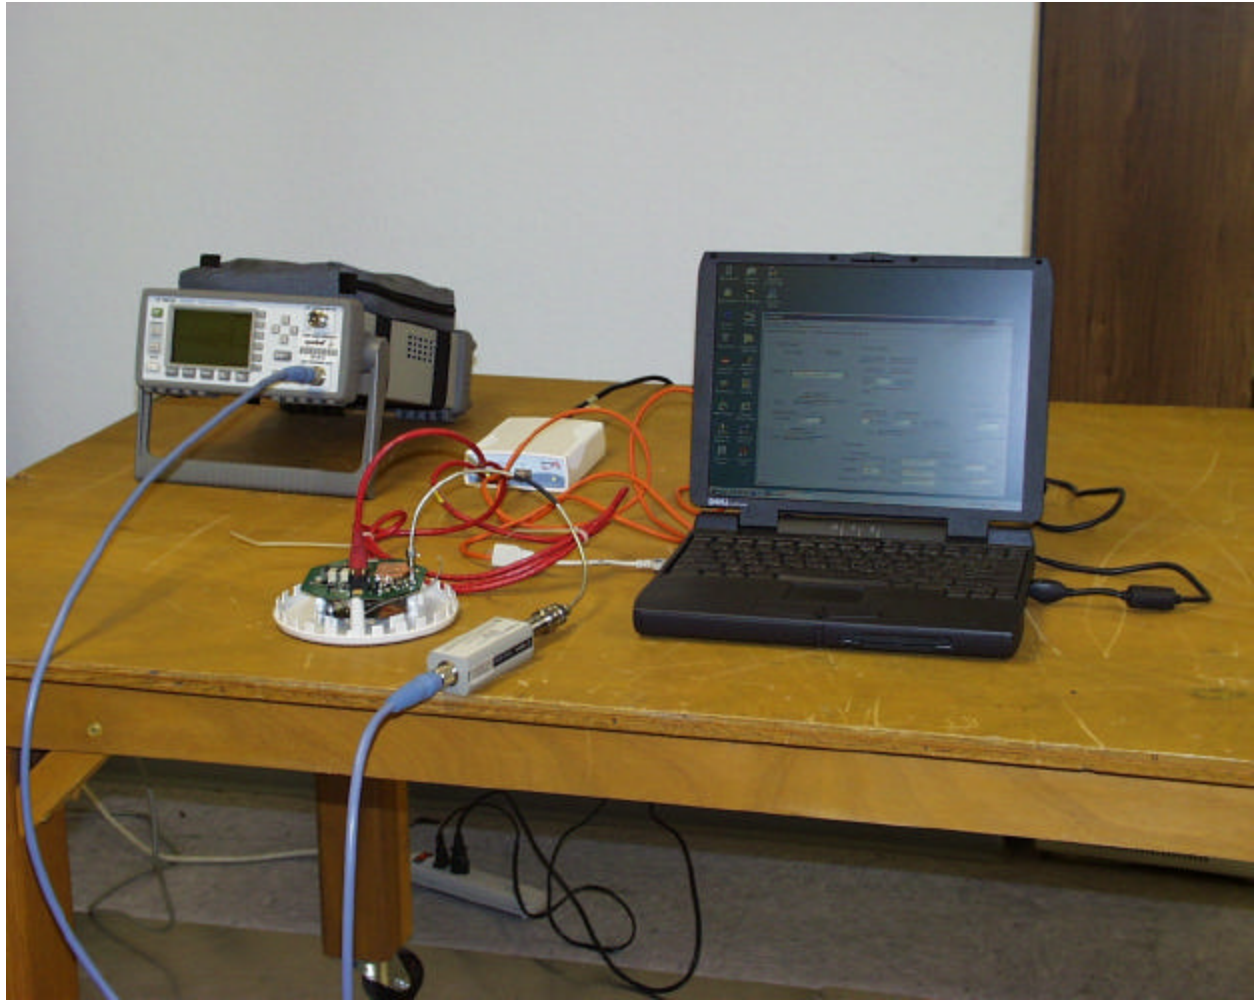

END OF REPORT