



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

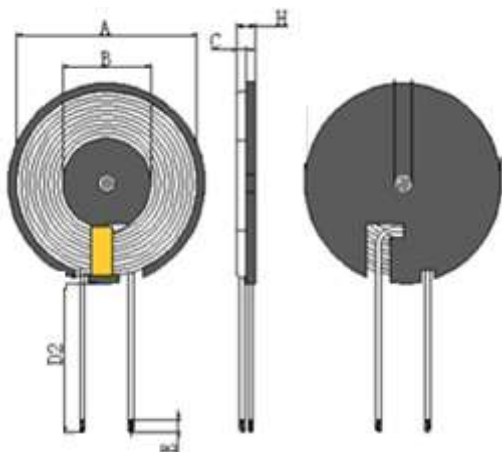

2. SCHEMATICS:



1. Coil attached magnetic disc,
magnetic disc size
 $43.8 \pm 1\text{mm}$, the thickness is $0.8 \pm 0.05\text{mm}$
Open L-cable slots.
2. Coil outlet position
Adhesive paper 1-2Ts;
3. Stick back glue on thread
surface

A	B	C	D2	E	H				I
43.8 ± 1.0	20.5 ± 0.5	0.8 ± 0.05	47 ± 3	3.5 ± 2	1.8MAX				

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	丝包线 $\phi 0.08 \times 24 \times 2\text{P}$ 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	Q值		
TEST	Coil and diskette	S-F	S-F		
CON	100KHz, 0.25V	AT 25°C	100KHz, 0.25V		
SPEC	$6.4\mu\text{H} \pm 10\%$	$80\text{m}\Omega$ Max	75		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Silk covered thread $0.08 \times 24 \times 2$	Acetone silk-covered wire $0.08 \times 24 \times 2$ strands	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	Magnetic sheet	$\phi 43.8 \times 0.8$ manganese zinc hard disk with L slot	TAIYI CO.,LTD	
4	glue	Yellow gum 9999	LIANCHENG CO.,LTD	
5	High-temperature adhesive paper	8mm wide high temperature adhesive paper	CUDAK CO.,LTD	
6	Rubber backing	Wire and surface adhesive $\phi 38\text{mm}$	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	Slot + coil surface backin
DRAWN BY	CHECKED BY		APPROVED BY

何伟华	韦立红	韦立红
-----	-----	-----