

TEST REPORT

Product Name : Bluetooth Gaming Sound Bar With Lights
Model Number : See Page 5 for details
FCC ID : 2AB4KMTYH172

Prepared for : MET INDUSTRIAL LTD
Address : Room 605, 6/F., No. 9 Wing Hong Street, Lai Chi Kok,
Kowloon, Hong Kong

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2303220043W00201R
Date(s) of Tests : March 24, 2023 to April 14, 2023
Date of issue : April 15, 2023

Table of Contents

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	6
3	SUMMARY OF TEST RESULT	7
4	TEST METHODOLOGY	8
4.1	General Description Of Applied Standards	8
4.2	Measurement Equipment Used	8
4.3	Description Of Test Modes	9
5	FACILITIES AND ACCREDITATIONS	10
5.1	Facilities	10
5.2	Equipment	10
5.3	Laboratory Accreditations And Listings	10
6	TEST SYSTEM UNCERTAINTY	11
7	SETUP OF EQUIPMENT UNDER TEST	12
7.1	Radio Frequency Test Setup 1	12
7.2	Radio Frequency Test Setup 2	12
7.3	Conducted Emission Test Setup	14
7.4	Block Diagram Configuration Of Test System	15
7.5	Support Equipment	15
8	FREQUENCY HOPPING SYSTEM REQUIREMENTS	16
8.1	Standard Applicable	16
8.2	Eut Pseudorandom Frequency Hopping Sequence	16
8.3	Equal Hopping Frequency Use	17
8.4	Frequency Hopping System	17
9	TEST REQUIREMENTS	18
9.1	20db&99%Bandwidth	18
9.2	Carrier Frequency Separation	27
9.3	Number Of Hopping Frequencies	31
9.4	Average Time Of Occupancy (Dwell Time)	33
9.5	Maximum Peak Conducted Output Power	35
9.6	Conducted Suprious Emission	39
9.7	Radiated Spurious Emission	56
9.8	Conducted Emission Test	69
9.9	Antenna Application	72

1 TEST RESULT CERTIFICATION

Applicant : MET INDUSTRIAL LTD
Address : Room 605, 6/F., No. 9 Wing Hong Street, Lai Chi Kok, Kowloon, Hong Kong
Manufacturer : Dongguan City Wangniudun Yinghui Electronics Factory
Address : Chijiaoluduan Zhengzhong Road Wangniudun Town Dongguan City, China
EUT : Bluetooth Gaming Sound Bar With Lights
Model Name : See Page 5 for details
Trademark : MET, GPX, ILIVE, SYLVANIA, PROSCAN, PROSCAN EL

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS
IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 2(02-2017)	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247, IC RSS-247 Issue 2 and IC RSS-GEN, Issue 5.

The test results of this report relate only to the tested sample identified in this report

Date of Test : March 24, 2023 to April 14, 2023

Prepared by : 
Una Yu /Editor

Reviewer : 
Joe Xia /Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager



Modified History

Version	Report No.	Revision Date	Summary
V1.0	ENS2303220043W00201R	/	Original Report



Declaration on model

Production name	Trade mark	Model no.
Bluetooth Gaming Sound Bar With Lights	MET, GPX, ILIVE, SYLVANIA, PROSCAN, PROSCAN EL	MET172, ISB172, ISB172B, THE2223BDL, ISB172XXXXX, PSP1740, PSP1740XXXXX (where XXXXX denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers)
Note: n/a.		



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product:	Bluetooth Gaming Sound Bar With Lights
Model Number:	See Page 5 for details
Sample:	2#
Device Type:	Bluetooth V5.3
Data Rate:	1Mbps for GFSK modulation 2Mbps for $\pi/4$ -DQPSK modulation 3Mbps for 8DPSK modulation
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Operating Frequency Range(s) :	2402-2480MHz
Number of Channels:	79 channels
Transmit Power Max:	1.49 dBm
Antenna Type:	PCB Antenna
Antenna Gain:	-0.58 dBi
Power supply:	☐ AC120V/60Hz ☒ DC 5V from Adapter ☒ DC 3.7V from internal battery
Date of Received:	March 23, 2023
Temperature Range:	0°C ~ +40°C

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	IC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	RSS-247.5.1 RSS-Gen.6.7	Emission Bandwidth	PASS	
15.247(a)(1)	RSS-247.5.1	Carrier Frequency Separation	PASS	
15.247(a)(1)	RSS-247.5.1	Number of Hopping Frequencies	PASS	
15.247(a)(1)	RSS-247.5.1	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	RSS-247.5.4 RSS-Gen 6.12	Maximum Peak Conducted Output Power	PASS	
15.247(d)	RSS-247 5.5	Conducted Spurious Emissions	PASS	
15.247(d) 15.209 15.205	RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13 RSS-247 3.3 RSS-247 5.5	Radiated Spurious Emissions	PASS	
15.207	RSS-Gen 8.8	Conducted Emission	PASS	
15.203 15.247(b)	RSS-Gen 6.8 RSS-247 5.4	Antenna Application	PASS	
15.247 (a) (1)/g/h	-	Frequency Hopping System	PASS	
NOTE1: N/A (Not Applicable)				
NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.				

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID:2AB4KMTYH172** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart C
 IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021)
 IC RSS-247 Issue 2(02-2017)
 FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2022/5/14	1Year
AMN	Rohde & Schwarz	ENV216	101161	2022/5/14	1Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	2022/5/14	1Year
Pre-Amplifier	Lunar EM	LNA30M3G-25	J10100000070	2022/5/14	1Year
Bilog Antenna	Schwarzbeck	VULB9163	659	2021/8/22	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	2021/6/12	2 Year
Pre-Amplifier	SKET	LNPA_0118G-45	SK2019051801	2022/5/14	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2021/6/12	2 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2022/5/14	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2021/6/12	2 Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400-2485MHz)	2	2022/5/14	1 Year

For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wideband Radio Communication Tester	R&S	CMW500	171168	Nov. 2, 2022	1Year
Frequency Extender	R&S	CMW-Z800A	100430	Nov. 2, 2022	1Year
Spectrum Analyzer	R&S	FSV3044	MY60242456	Nov. 2, 2022	1Year
Analog Signal Generator	R&S	SMB100A	MY61252625	Nov. 2, 2022	1Year
Vector Signal Generator	R&S	SMM100A	MY61252674	Nov. 2, 2022	1Year
RF Control Unit	Tonscend	JS0806-2	22C8060567	Nov. 2, 2022	N/A
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	Jul. 02, 2022	1 Year

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation(DH5); 2Mbps for $\pi/4$ -DQPSK modulation(2DH5); 3Mbps for 8DPSK modulation(3DH5);)were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	...	...
1	2403	40	2442	76	2478
2	2404	41	2443	77	2479
...	...	...	...	78	2480
Note: $f_c = 2402\text{MHz} + (k-1) \times 1\text{MHz}$ $k=1$ to 79					

Test Frequency and channel for Bluetooth

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (Shenzhen) Co., Ltd.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.	: Accredited by CNAS The Certificate Registration Number is L2291. The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)
	Accredited by FCC Designation Number: CN1204 Test Firm Registration Number: 882943
	Accredited by A2LA The Certificate Number is 4321.01.
	Accredited by Industry Canada The Conformity Assessment Body Identifier is CN0008
Name of Firm	: EMTEK (SHENZHEN) CO., LTD.
Site Location	: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Test Parameter	Measurement Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

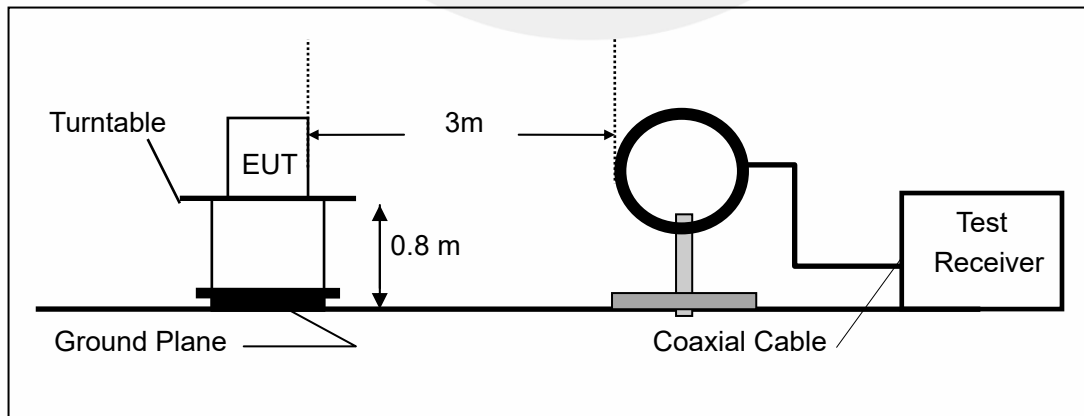

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

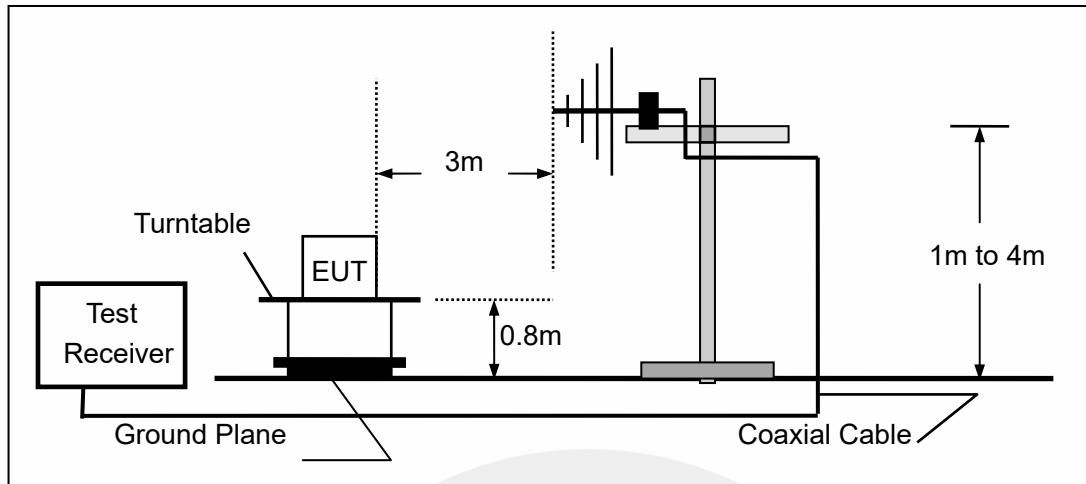

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

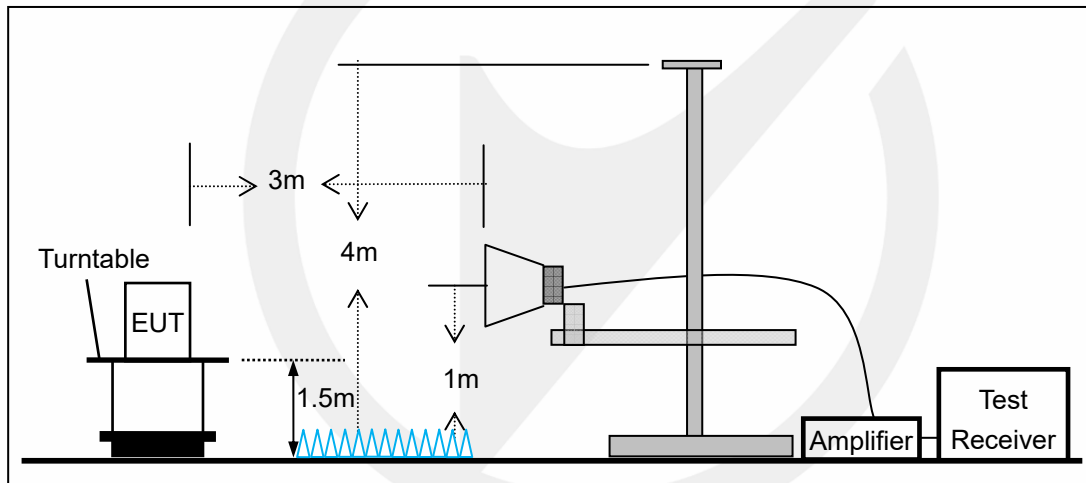


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

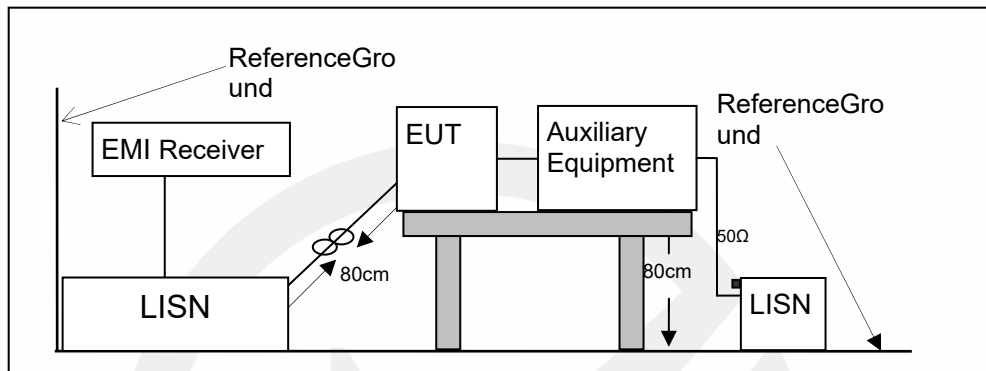

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

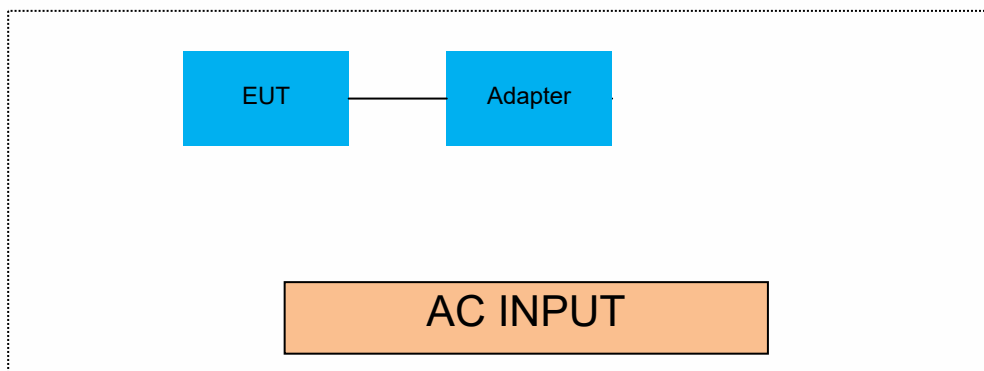

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	Aohai	A8A-050200U-CN1	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


8.2 EUT Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

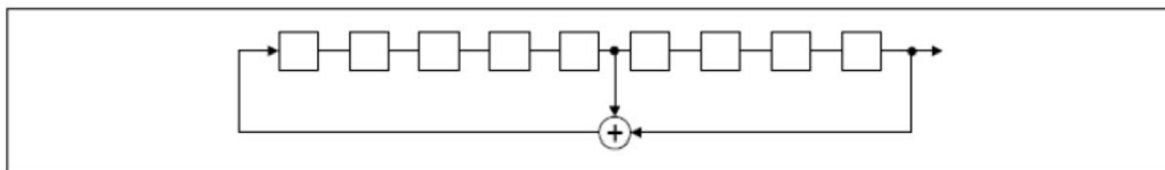

Linear Feedback Shift Register for Generation of the PRBS sequence

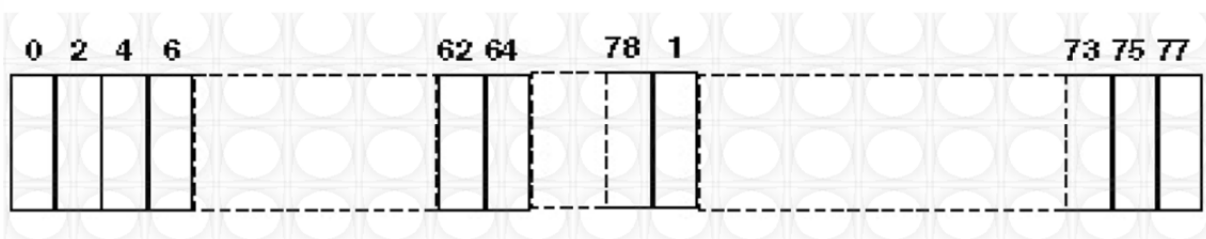

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53

Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

9 TEST REQUIREMENTS

9.1 20DB&99%BANDWIDTH

9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-247.5.1 and RSS-Gen.6.7

9.1.2 Conformance Limit

No limit requirement.

9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.1.4 Test Procedure

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) = 100 kHz.

Set Span = approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar


Note: N/A

20dB Emission Bandwidth

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.04	2401.46	2402.50	---	---
		2441	1.04	2440.46	2441.50	---	---
		2480	1.05	2479.45	2480.50	---	---
2DH5	Ant1	2402	1.34	2401.32	2402.65	---	---
		2441	1.34	2440.31	2441.65	---	---
		2480	1.35	2479.31	2480.66	---	---
3DH5	Ant1	2402	1.29	2401.33	2402.63	---	---
		2441	1.29	2440.34	2441.62	---	---
		2480	1.29	2479.33	2480.62	---	---



DH5_Ant1_2402

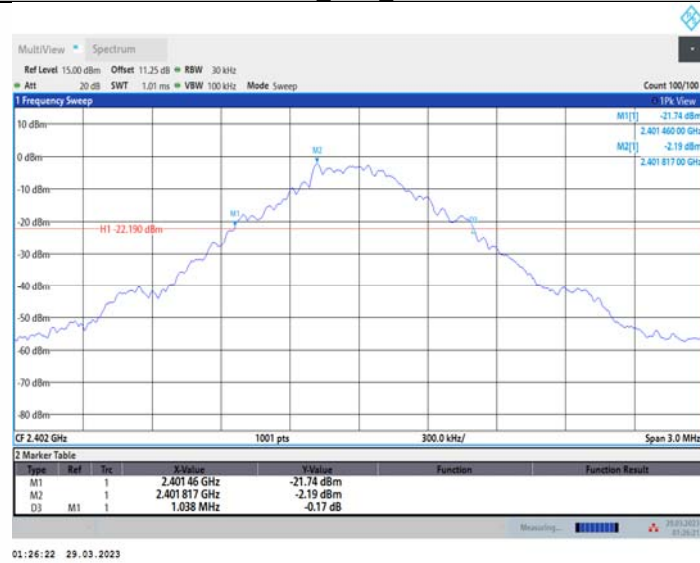


DH5_Ant1_2441




DH5_Ant1_2480



2DH5_Ant1_2402

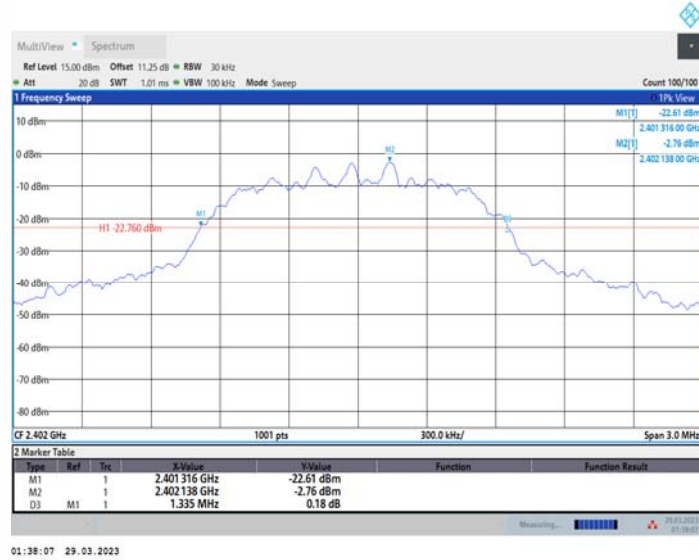

2DH5_Ant1_2441

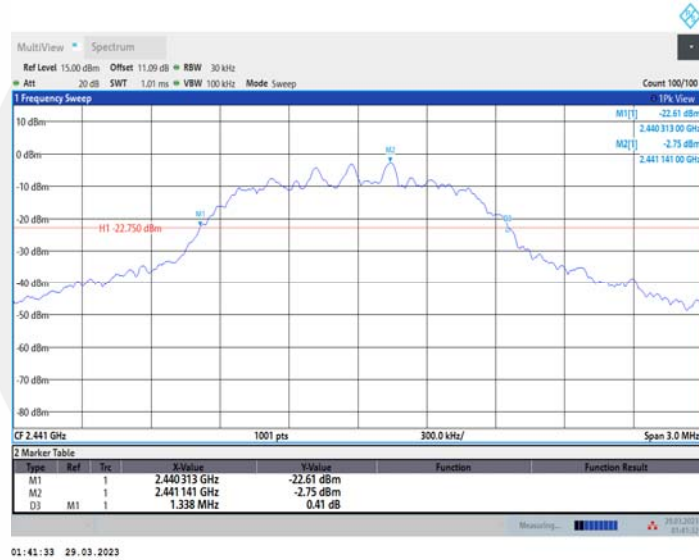

2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



Occupied Channel Bandwidth

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.954	2401.4960	2402.4496	---	---
		2441	0.964	2440.4911	2441.4555	---	---
		2480	0.969	2479.4897	2480.4583	---	---
2DH5	Ant1	2402	1.223	2401.3768	2402.5999	---	---
		2441	1.237	2440.3710	2441.6076	---	---
		2480	1.238	2479.3679	2480.6060	---	---
3DH5	Ant1	2402	1.215	2401.3698	2402.5847	---	---
		2441	1.215	2440.3711	2441.5859	---	---
		2480	1.207	2479.3758	2480.5829	---	---



DH5_Ant1_2402




DH5_Ant1_2441




DH5_Ant1_2480



2DH5_Ant1_2402

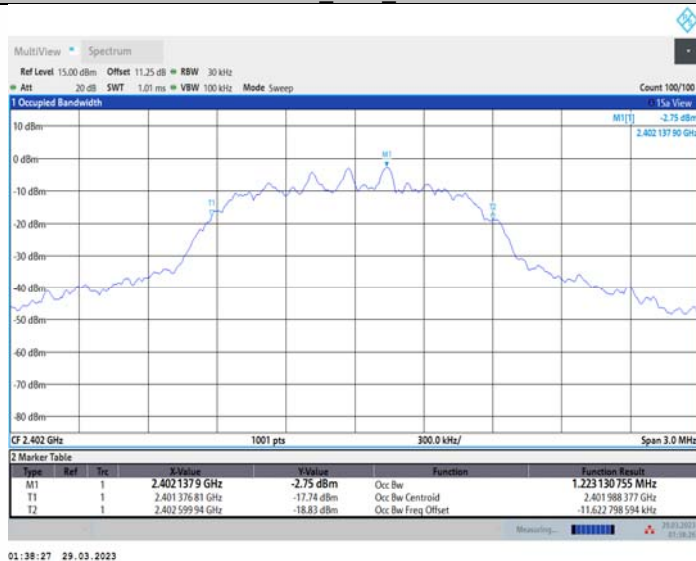

2DH5_Ant1_2441

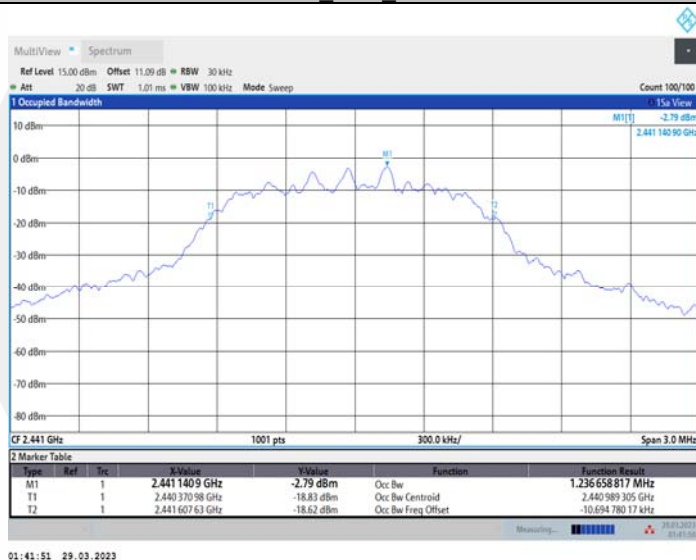

2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



9.2 CARRIER FREQUENCY SEPARATION

9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-247.5.1

9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.2.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW = 300kHz. Set VBW = 300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar


Note: For GFSK, pi/4-DQPSK, 8DPSK Limit = 20dB bandwidth * 2/3

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop_2402	1.088	≥0.69	PASS
		Hop_2441	1.006	≥0.69	PASS
		Hop_2480	1.088	≥0.70	PASS
2DH5	Ant1	Hop_2402	1.186	≥0.89	PASS
		Hop_2441	1.044	≥0.89	PASS
		Hop_2480	1.028	≥0.90	PASS
3DH5	Ant1	Hop_2402	1.088	≥0.86	PASS
		Hop_2441	1.042	≥0.86	PASS
		Hop_2480	1.024	≥0.86	PASS


DH5_Ant1_Hop_2402

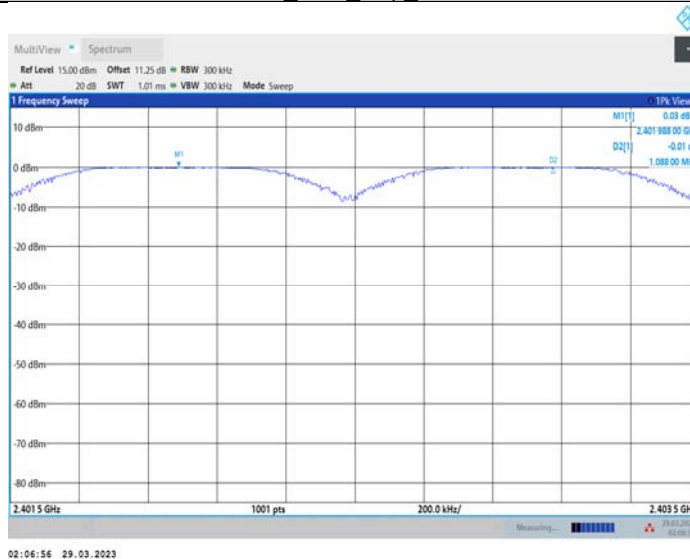


DH5_Ant1_Hop_2441

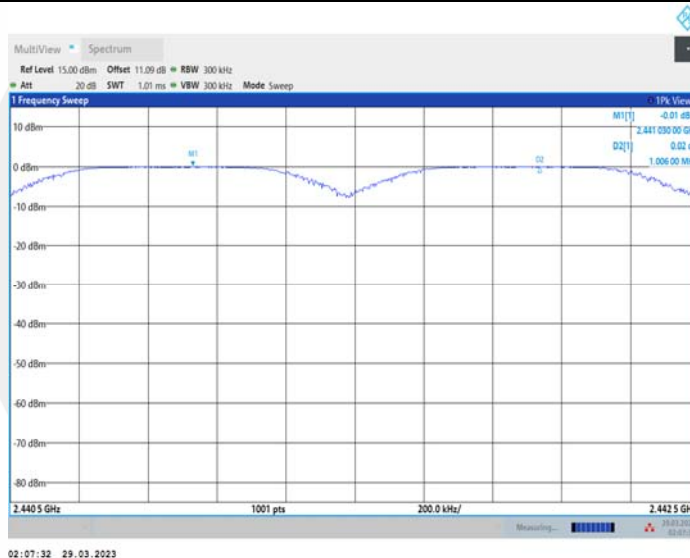


DH5_Ant1_Hop_2480

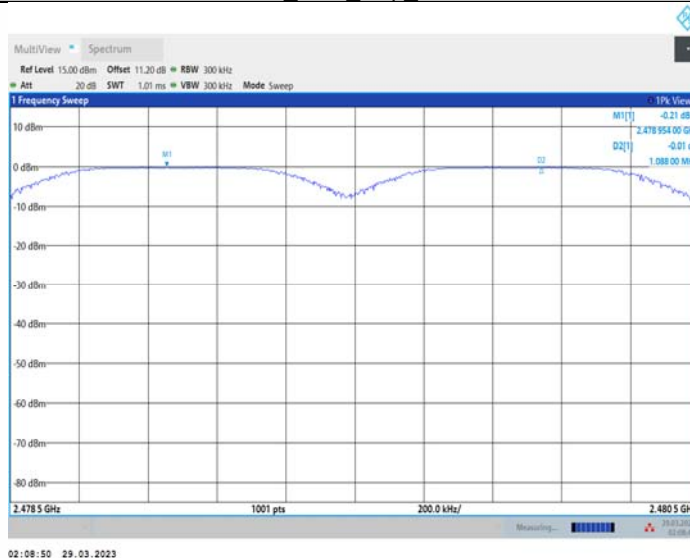


2DH5_Ant1_Hop_2402

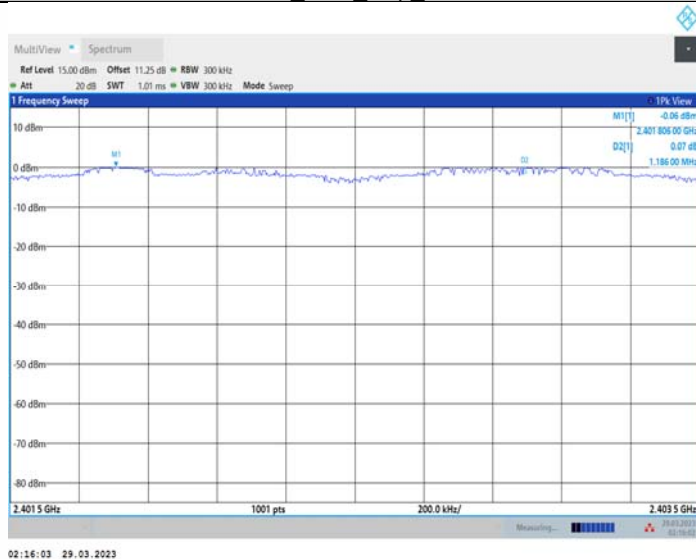


2DH5_Ant1_Hop_2441

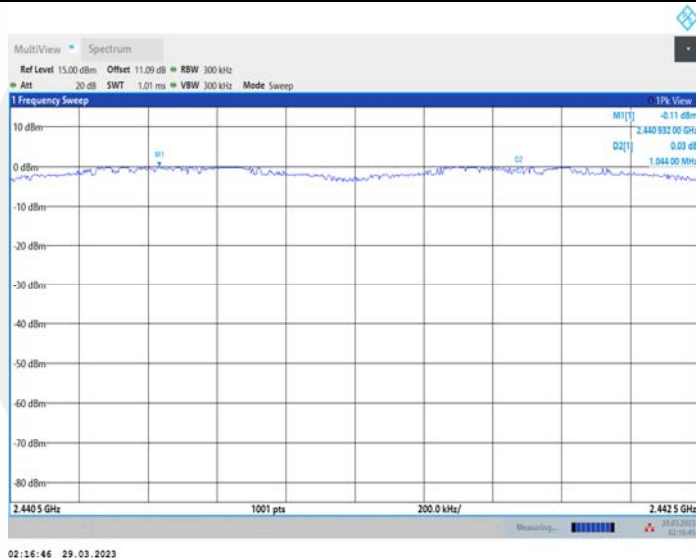


2DH5_Ant1_Hop_2480

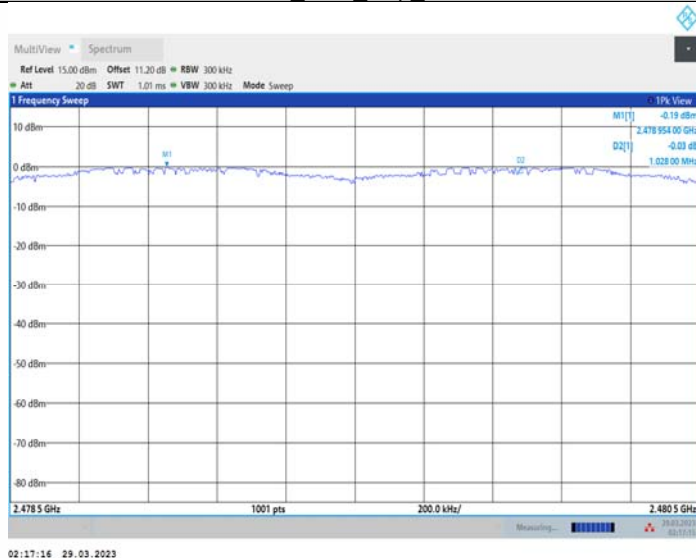


3DH5_Ant1_Hop_2402

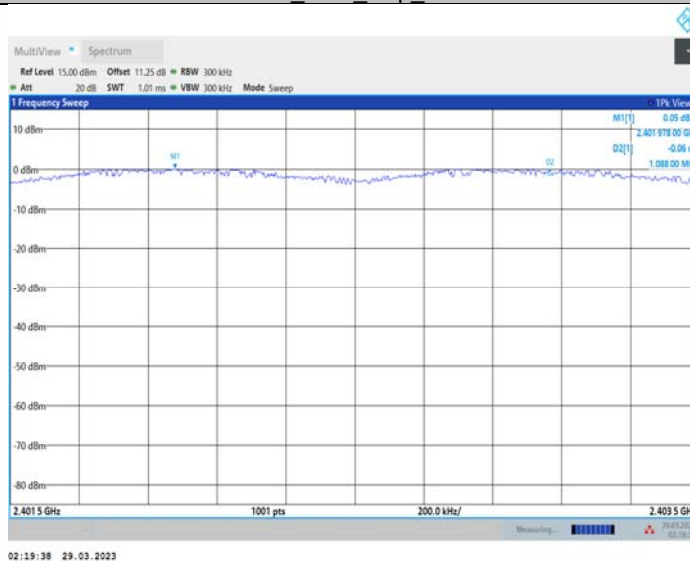

3DH5_Ant1_Hop_2441

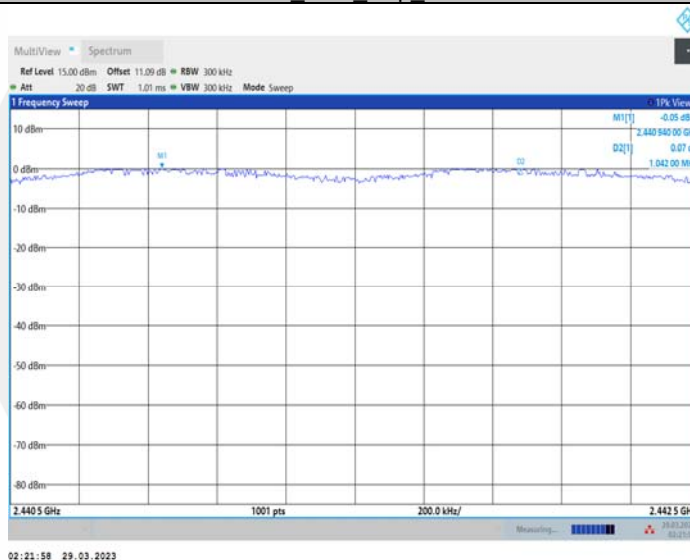

3DH5_Ant1_Hop_2480

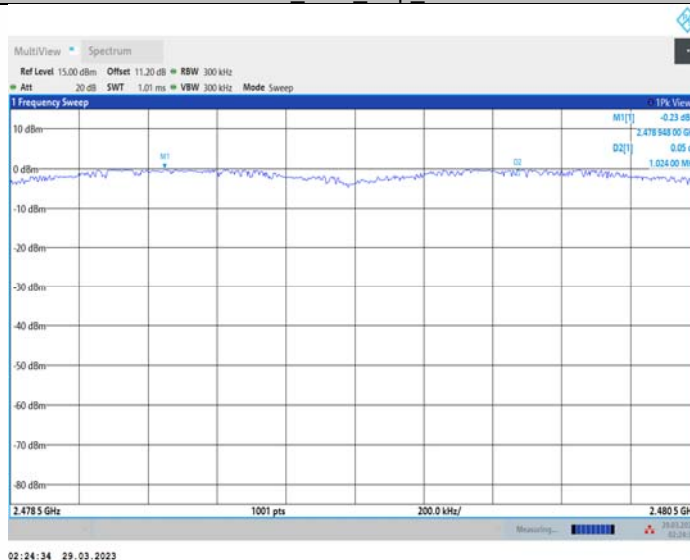

9.3 NUMBER OF HOPPING FREQUENCIES

9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-247.5.1

9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.3.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation (2400-2483.5MHz)

RBW = 300KHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.


Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar


Note: N/A

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS


DH5_Ant1_Hop

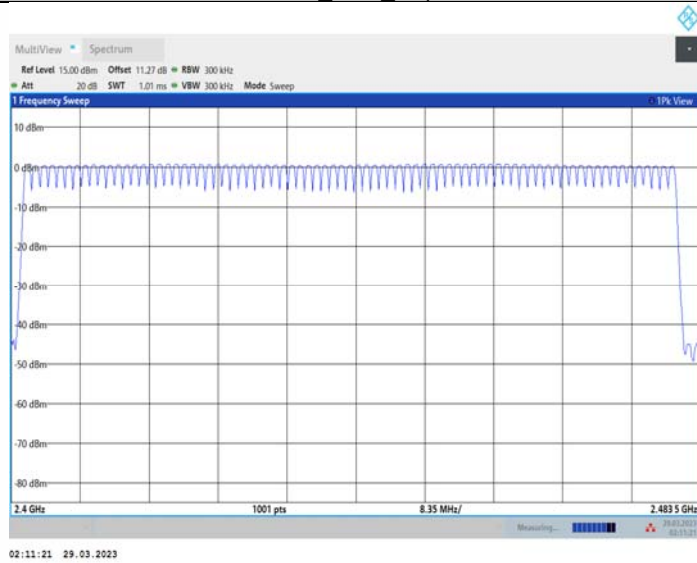

2DH5_Ant1_Hop

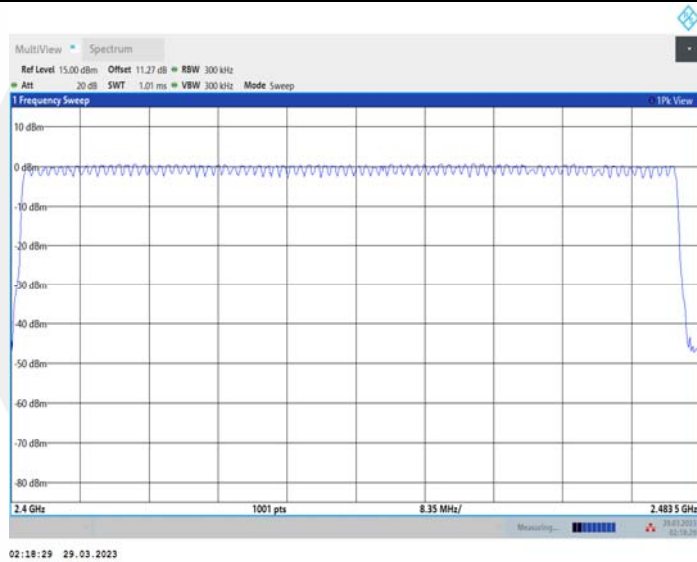

3DH5_Ant1_Hop

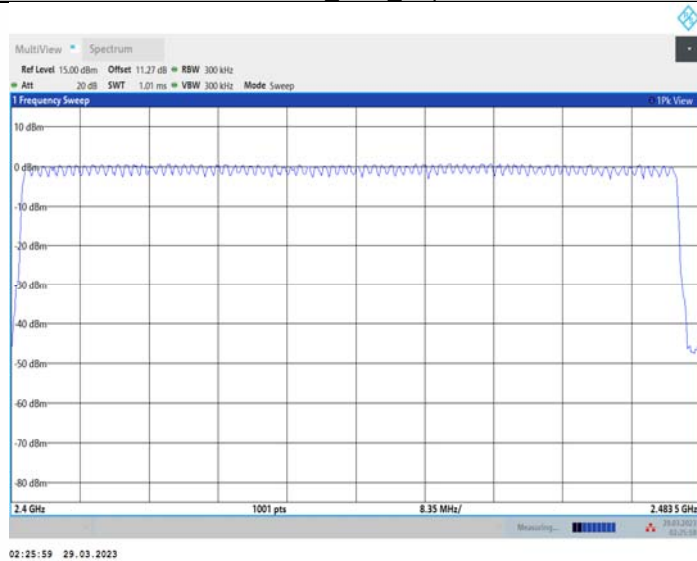

9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-247.5.1

9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the averagetime of occupancy on any channel shall not be greater than 0.4s within a period of 0.4smultiplied by the number of hopping channels employed.

9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.4.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzersettings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW $\geq$ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphsof this Section.

9.4.5 Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: TotalHops(DH1)=(1600/2/79)*31.6

TotalHops(DH3)=(1600/4/79)*31.6


TotalHops(DH5)=(1600/6/79)*31.6

DwellTime=BurstWidth*TotalHops


All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1,GFSK) resultrecorded was report as below:

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.350	320	0.112	≤ 0.4	PASS
DH3	Ant1	Hop	1.610	160	0.258	≤ 0.4	PASS
DH5	Ant1	Hop	2.860	106.67	0.305	≤ 0.4	PASS


DH1_Ant1_Hop

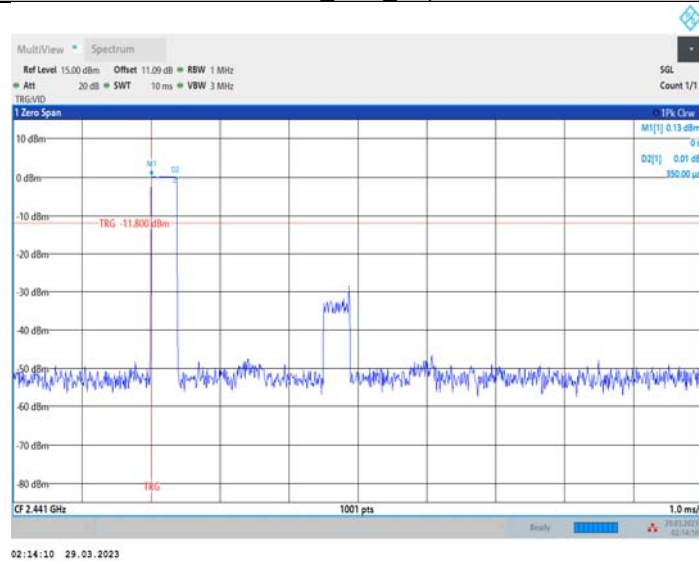

DH3_Ant1_Hop

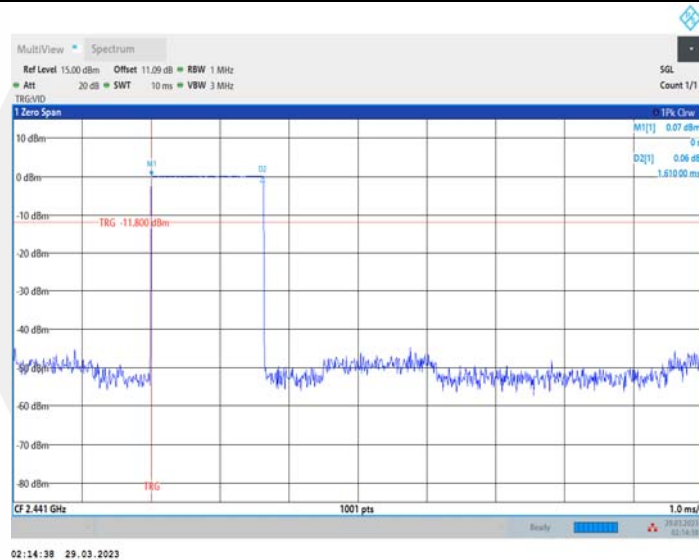

DH5_Ant1_Hop

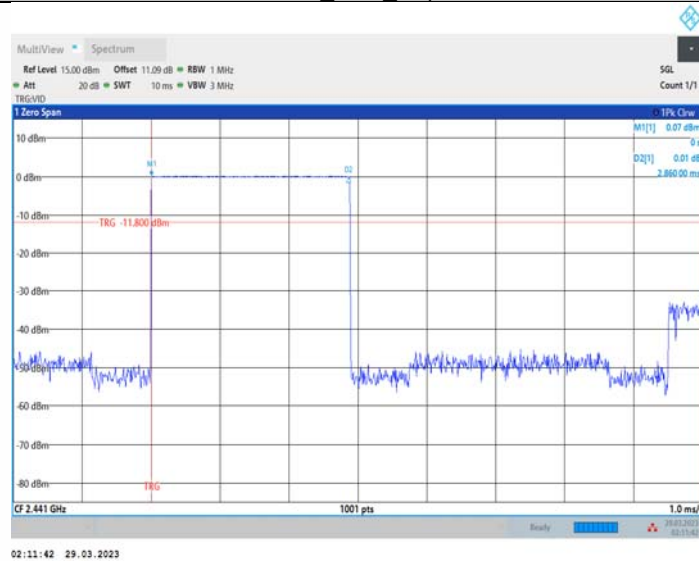

9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-247.5.4 and RSS-Gen 6.12

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel(about 8MHz)

Set RBW > the 20 dB bandwidth of the emission being measured(about 3MHz)

Set VBW $\geq$ RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.


Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar


Note: N/A

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	0.14	≤ 20.97	PASS
		2441	0.25	≤ 20.97	PASS
		2480	-0.01	≤ 20.97	PASS
2DH5	Ant1	2402	1.1	≤ 20.97	PASS
		2441	1.09	≤ 20.97	PASS
		2480	0.8	≤ 20.97	PASS
3DH5	Ant1	2402	1.44	≤ 20.97	PASS
		2441	1.49	≤ 20.97	PASS
		2480	1.18	≤ 20.97	PASS


DH5_Ant1_2402

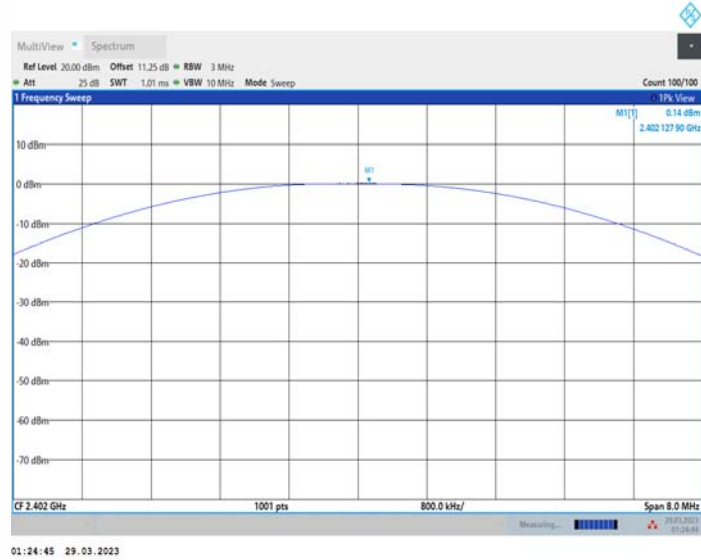


DH5_Ant1_2441

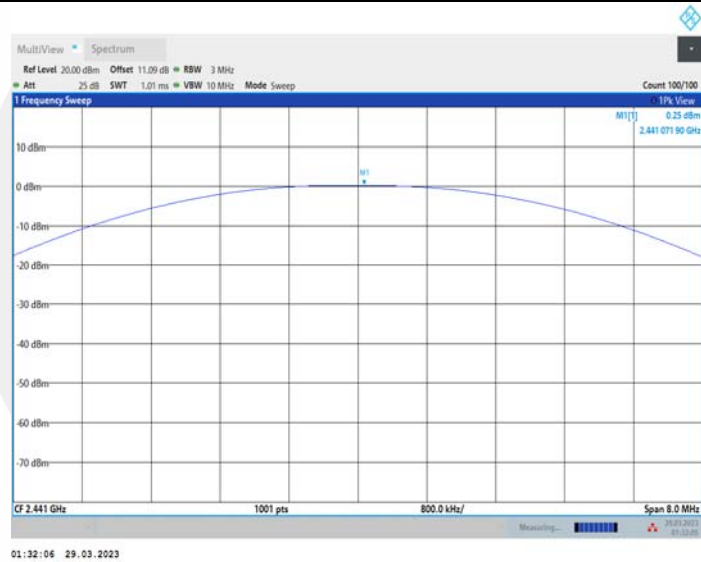


DH5_Ant1_2480

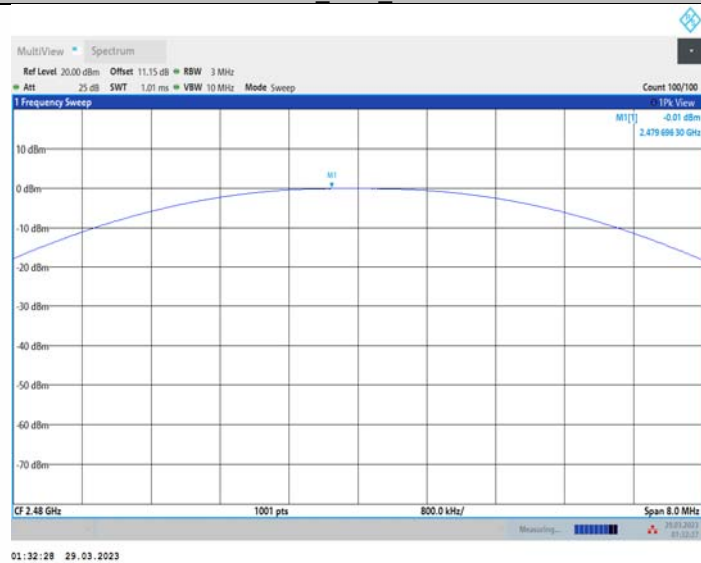


2DH5_Ant1_2402

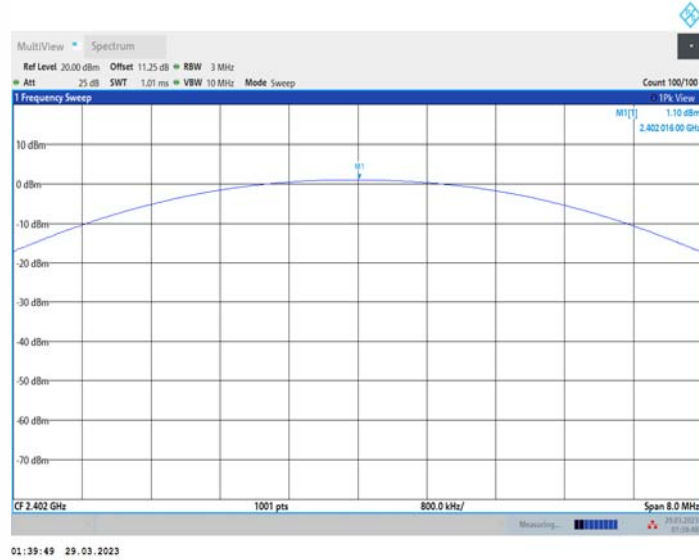


2DH5_Ant1_2441

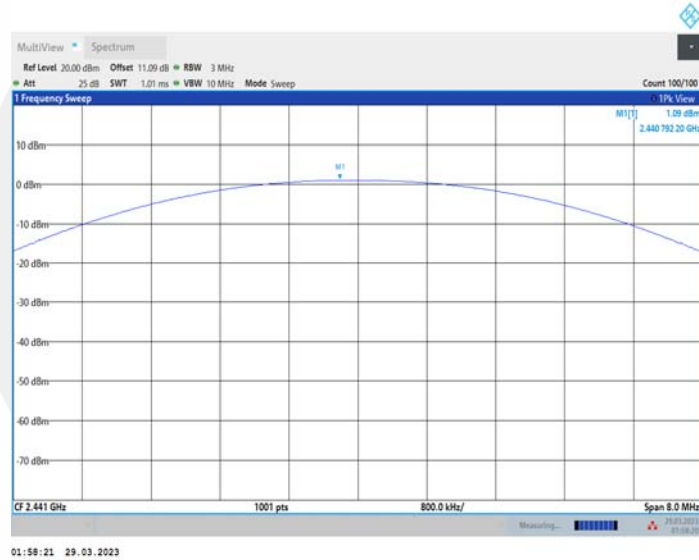


2DH5_Ant1_2480

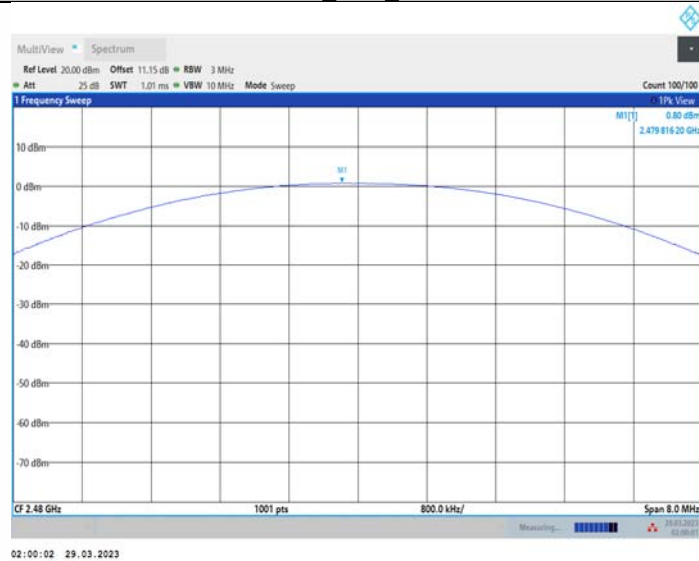


3DH5_Ant1_2402

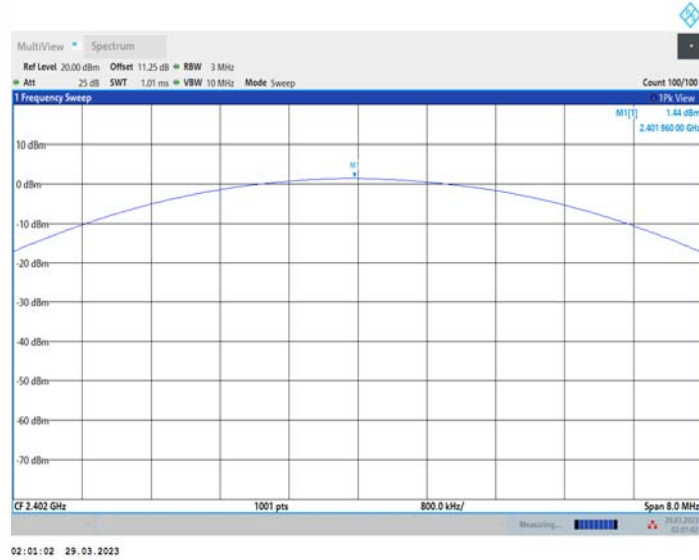

3DH5_Ant1_2441

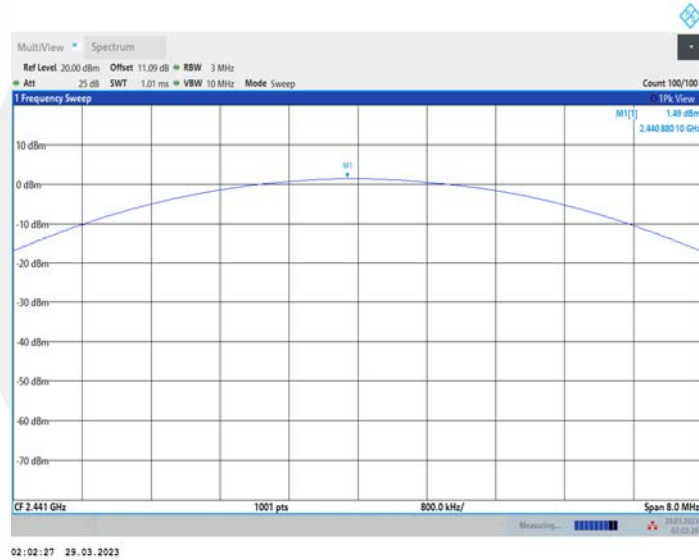

3DH5_Ant1_2480

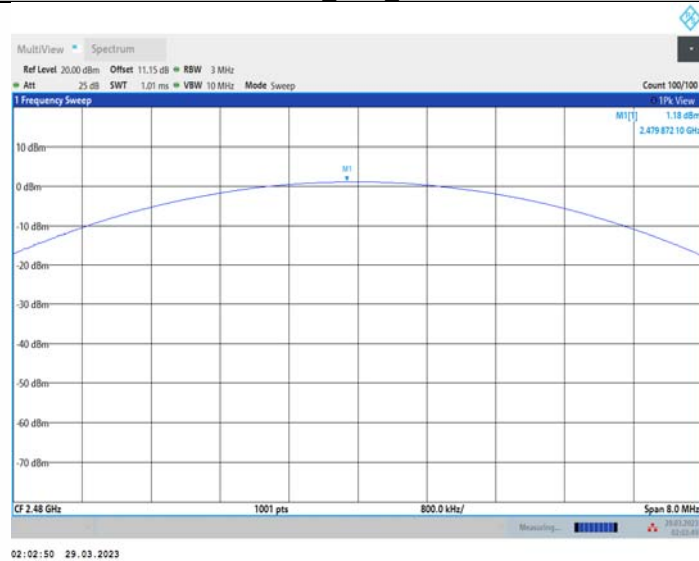

9.6 CONDUCTED SUPRIIOUS EMISSION

9.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-247 5.5

9.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximumconducetedlevel.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

■ Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHzSet VBW $\geq 3 \times$ RBW

Set Sweep = autoSet Detector function = peakSet Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

■ Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz).Set RBW = 100 kHzSet VBW $\geq$ RBW

Set Sweep = autoSet Detector function = peakSet Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

9.6.5 Test Results

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar


Note: N/A

Reference level measurement


All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst result recorded was report as below:

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
DH5	Ant1	2402	2401.82	-0.12
		2441	2440.82	-0.13
		2480	2479.82	-0.38
2DH5	Ant1	2402	2402.14	-0.12
		2441	2441.14	-0.16
		2480	2480.14	-0.43
3DH5	Ant1	2402	2401.82	-0.10
		2441	2440.82	-0.13
		2480	2479.82	-0.41


DH5_Ant1_2402

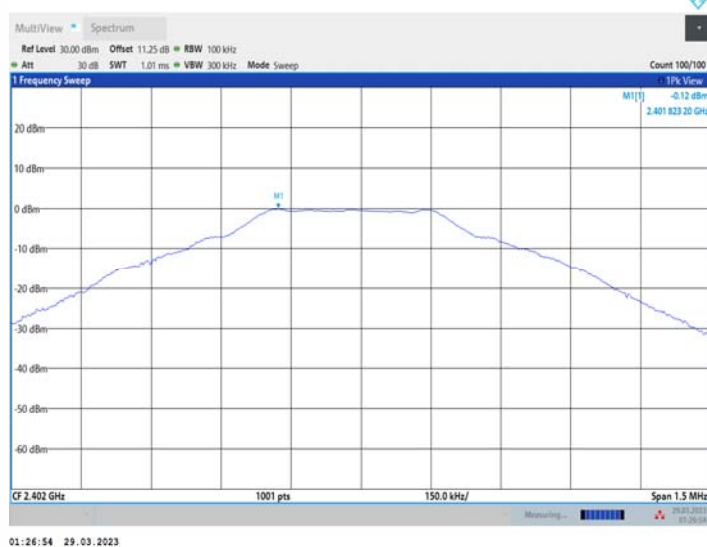


DH5_Ant1_2441

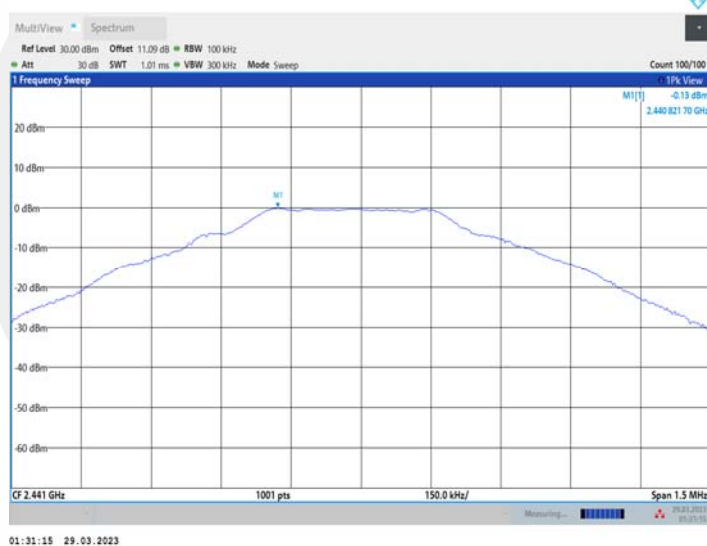


DH5_Ant1_2480

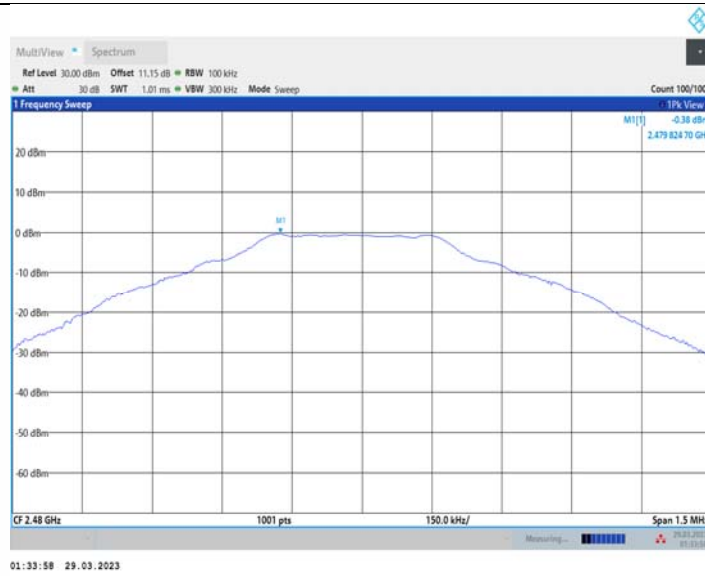


2DH5_Ant1_2402

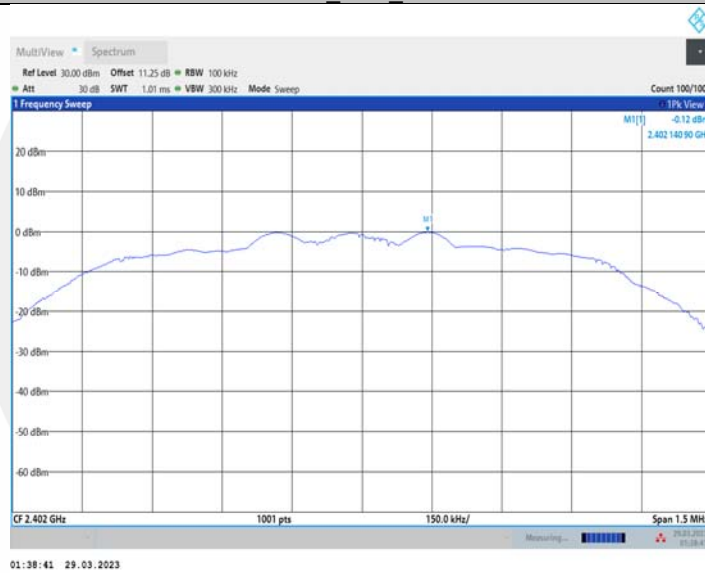


2DH5_Ant1_2441

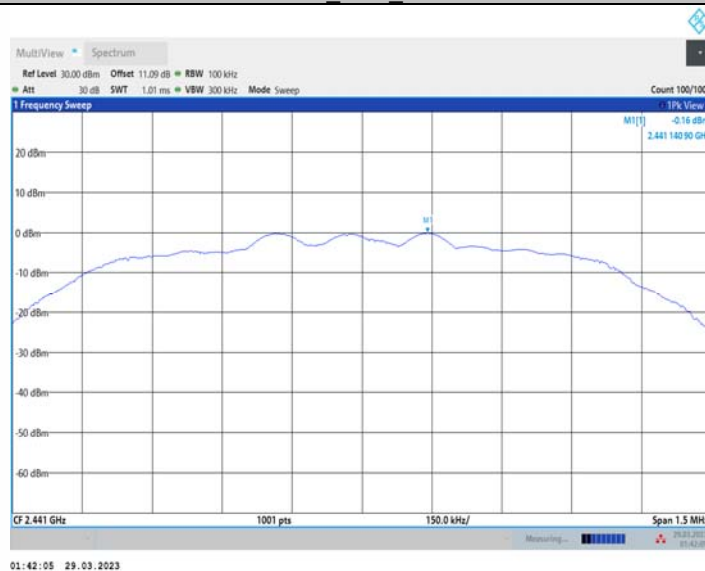


2DH5_Ant1_2480

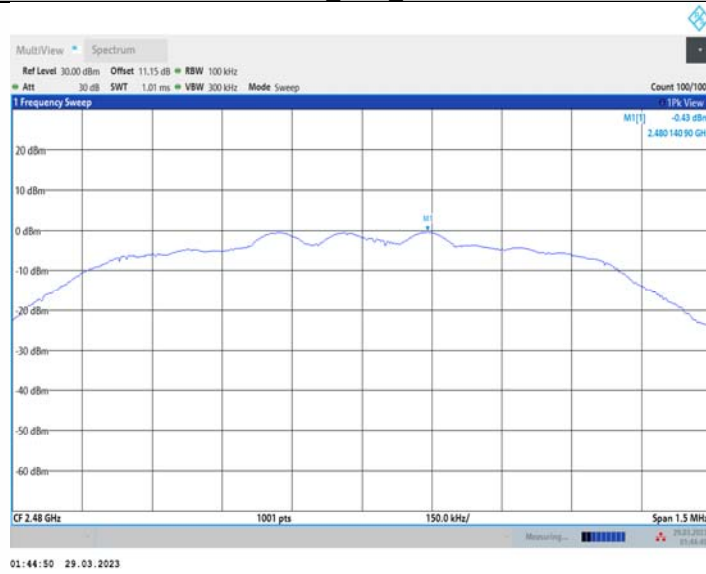


3DH5_Ant1_2402

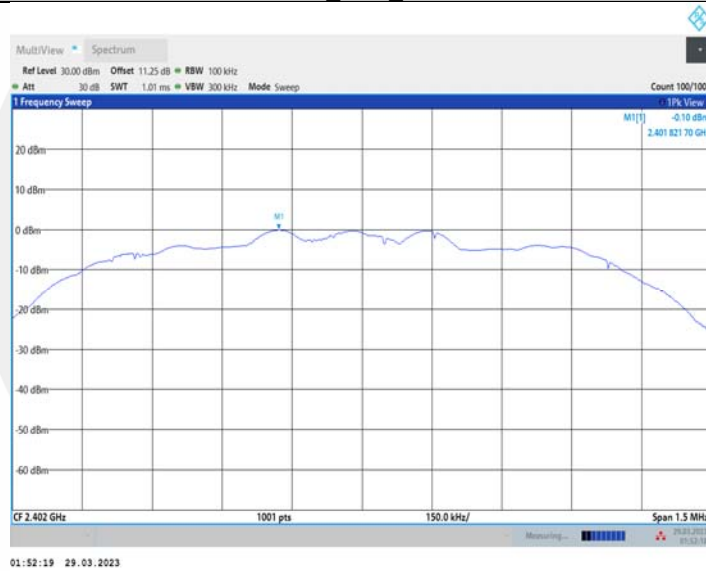

3DH5_Ant1_2441

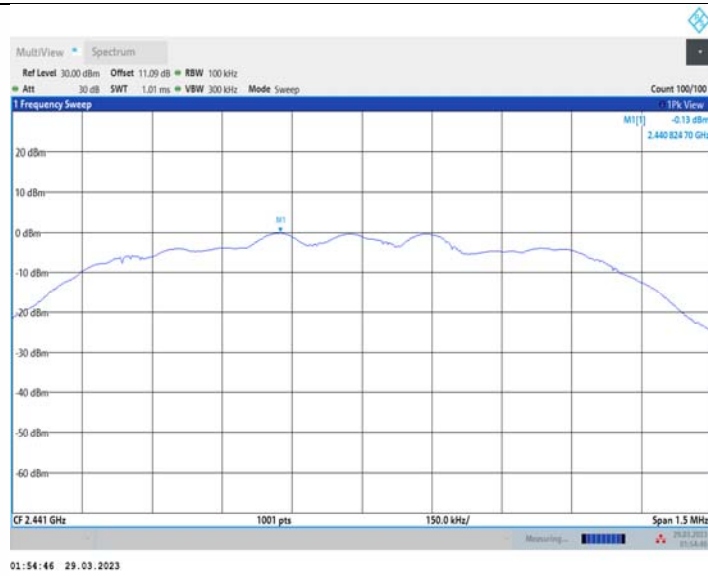

3DH5_Ant1_2480

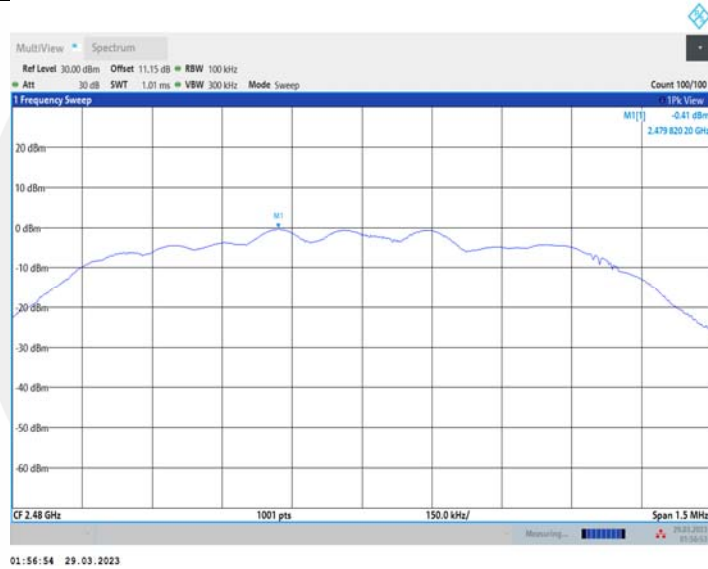


Band edge measurements

All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1,GFSK) result recorded was report as below:


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-0.12	-46.02	≤ -20.12	PASS
		High	2480	-0.38	-46.54	≤ -20.38	PASS
		Low	Hop_2402	-0.43	-45.35	≤ -20.43	PASS
		High	Hop_2480	-0.41	-48.1	≤ -20.41	PASS
2DH5	Ant1	Low	2402	-0.12	-47.08	≤ -20.12	PASS
		High	2480	-0.43	-47.77	≤ -20.43	PASS
3DH5	Ant1	Low	2402	-0.10	-45.56	≤ -20.1	PASS
		High	2480	-0.41	-47.1	≤ -20.41	PASS




DH5_Ant1_Low_2402

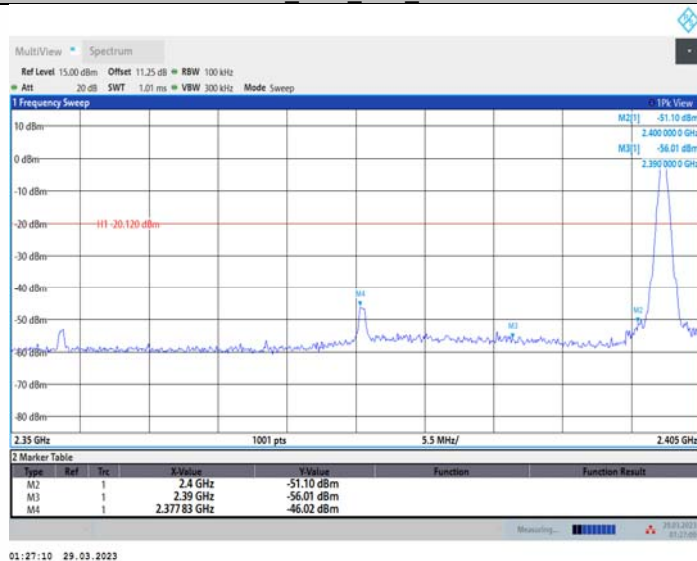


DH5_Ant1_High_2480

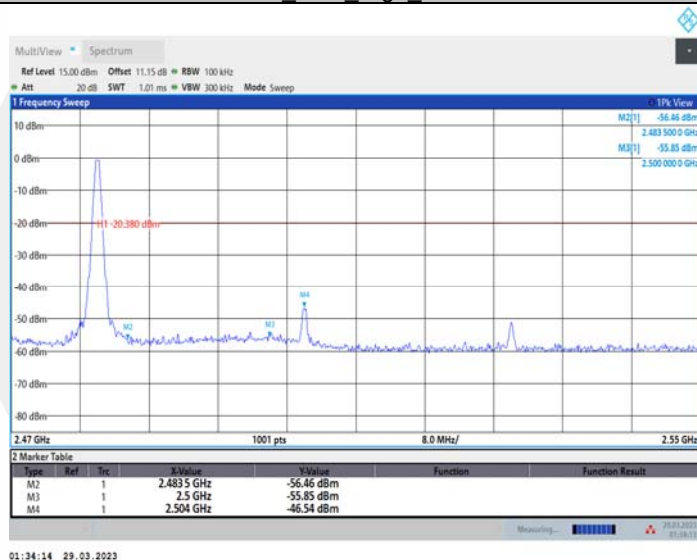


DH5_Ant1_Low_Hop_2402

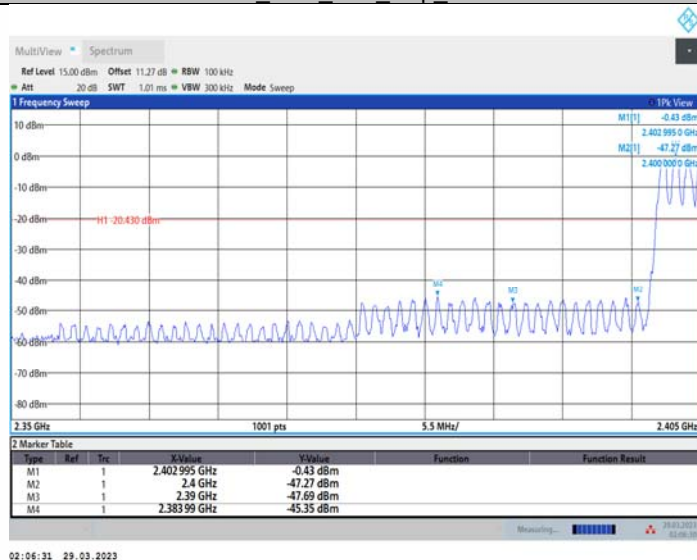


DH5_Ant1_High_Hop_2480

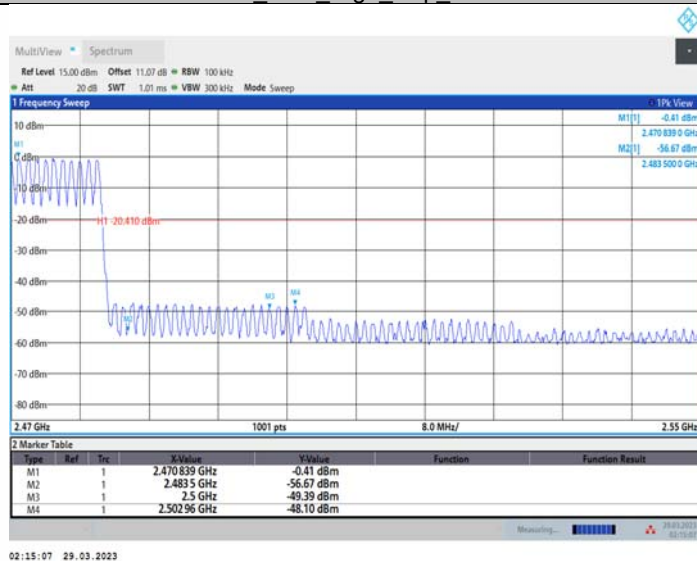


2DH5_Ant1_Low_2402

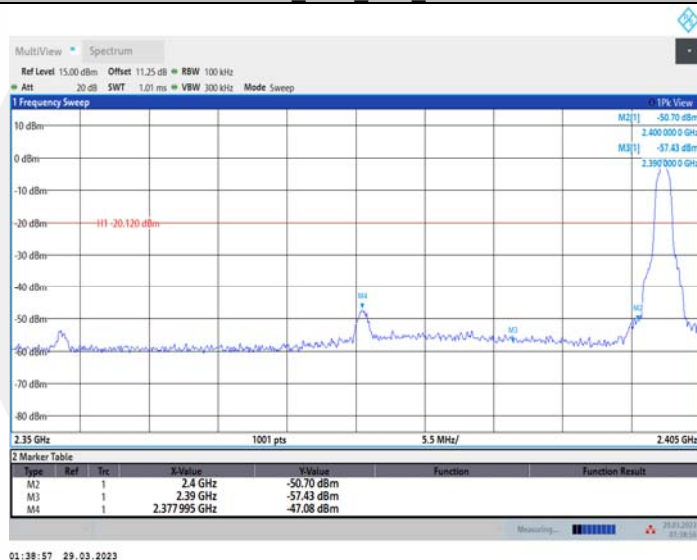


2DH5_Ant1_High_2480

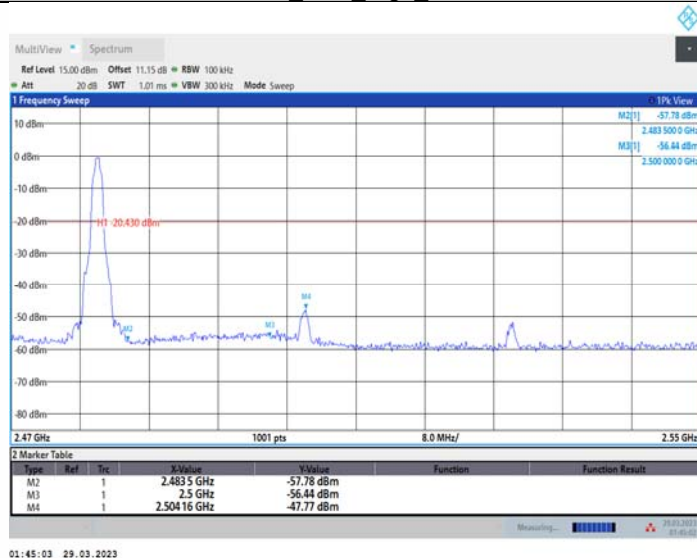

3DH5_Ant1_Low_2402

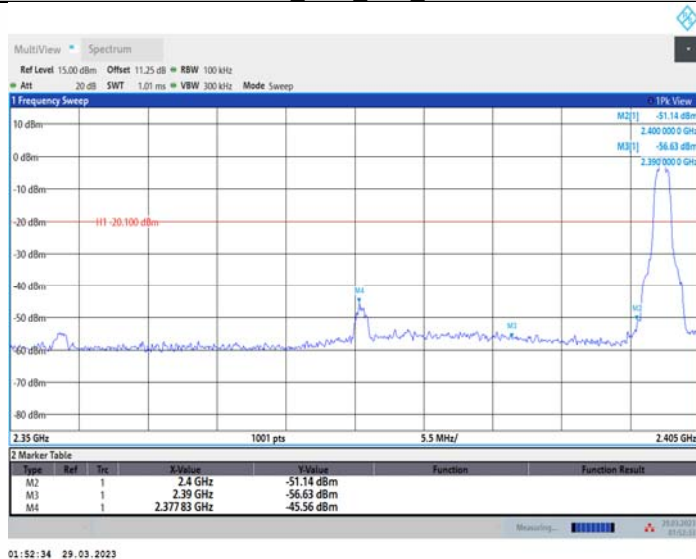

3DH5_Ant1_High_2480

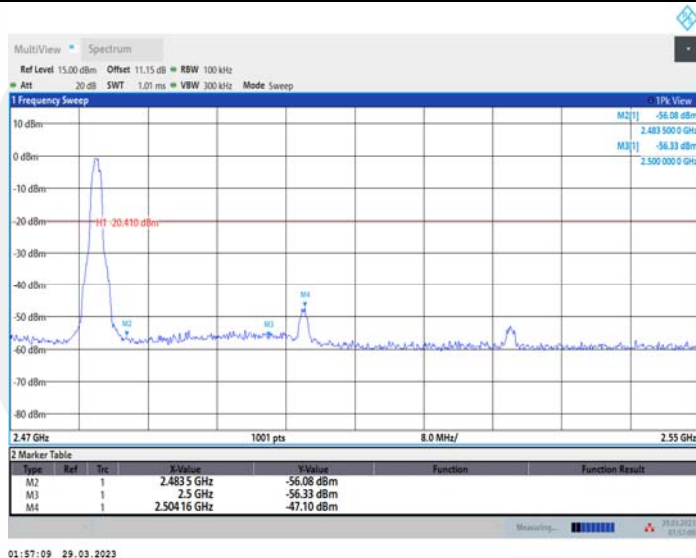


Conducted Spurious Emission


All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1,GFSK) result recorded was report as below:

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~1000	-0.12	-53.61	≤ -20.12	PASS
			1000~26500	-0.12	-41.92	≤ -20.12	PASS
		2441	30~1000	-0.13	-54.49	≤ -20.13	PASS
			1000~26500	-0.13	-42.79	≤ -20.13	PASS
		2480	30~1000	-0.38	-54.25	≤ -20.38	PASS
			1000~26500	-0.38	-41.77	≤ -20.38	PASS
2DH5	Ant1	2402	30~1000	-0.12	-53.27	≤ -20.12	PASS
			1000~26500	-0.12	-42.83	≤ -20.12	PASS
		2441	30~1000	-0.16	-54.74	≤ -20.16	PASS
			1000~26500	-0.16	-44.04	≤ -20.16	PASS
		2480	30~1000	-0.43	-53.68	≤ -20.43	PASS
			1000~26500	-0.43	-45.59	≤ -20.43	PASS
3DH5	Ant1	2402	30~1000	-0.10	-53.26	≤ -20.1	PASS
			1000~26500	-0.10	-43.58	≤ -20.1	PASS
		2441	30~1000	-0.13	-54.29	≤ -20.13	PASS
			1000~26500	-0.13	-41.55	≤ -20.13	PASS
		2480	30~1000	-0.41	-54.13	≤ -20.41	PASS
			1000~26500	-0.41	-42.78	≤ -20.41	PASS


DH5_Ant1_2402_30~1000

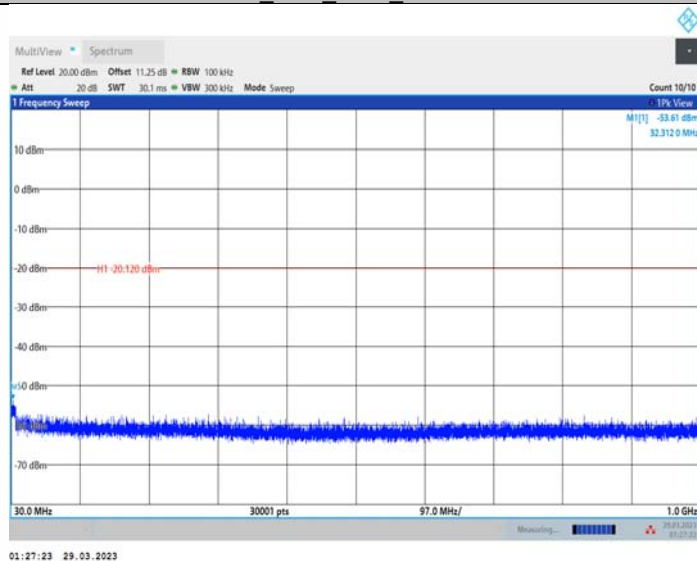


DH5_Ant1_2402_1000~26500

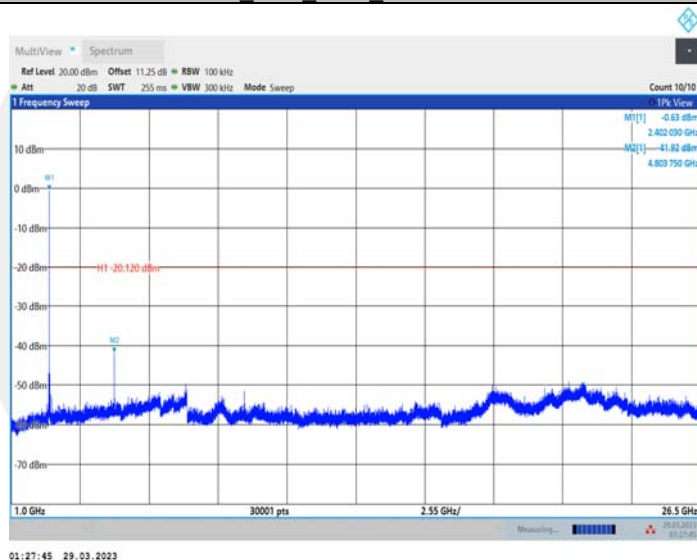


DH5_Ant1_2441_30~1000

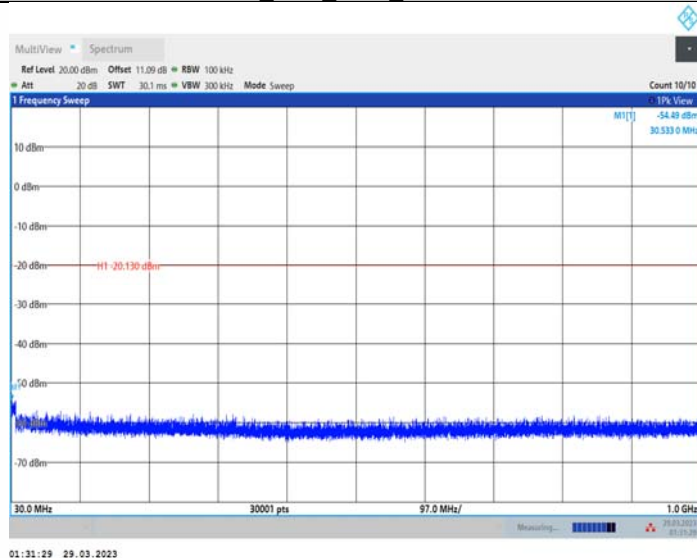


DH5_Ant1_2441_1000~26500

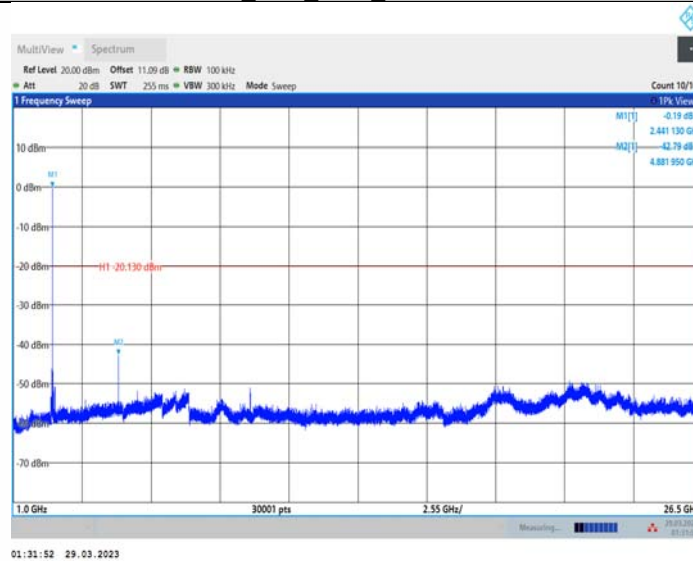


DH5_Ant1_2480_30~1000

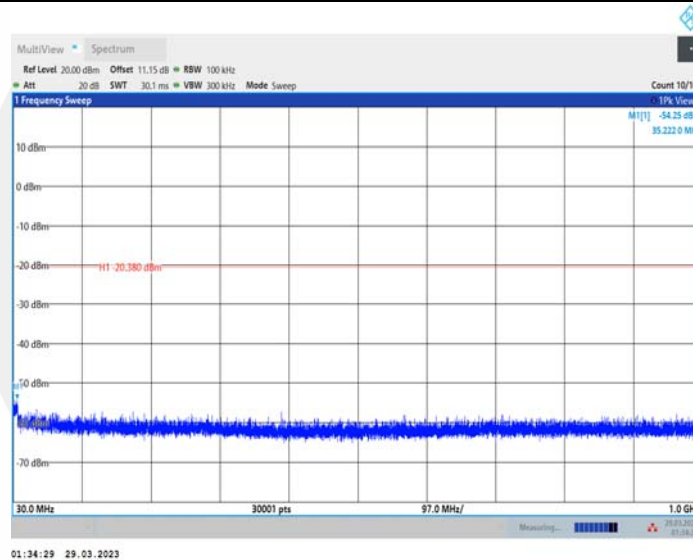


DH5_Ant1_2480_1000~26500

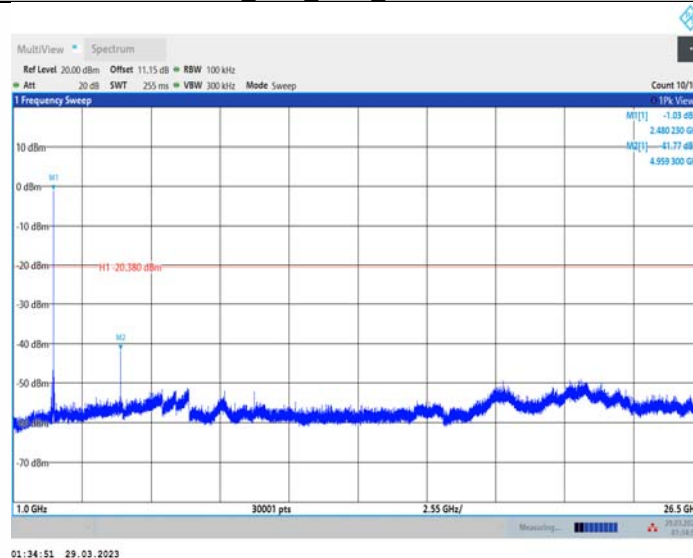


2DH5_Ant1_2402_30~1000

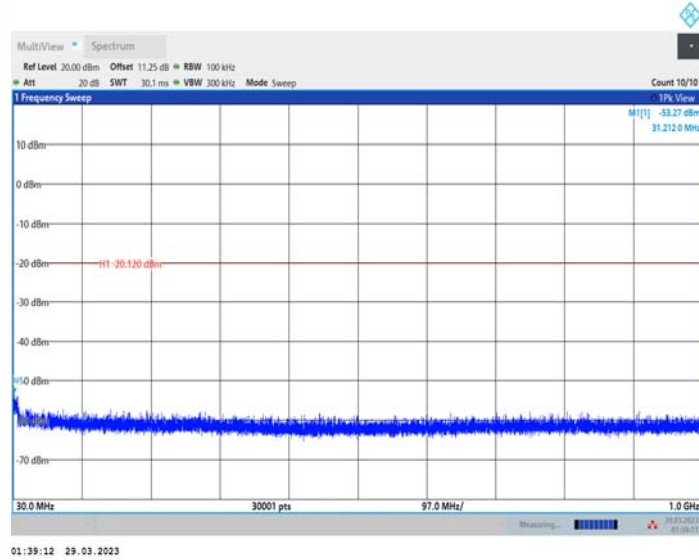


2DH5_Ant1_2402_1000~26500

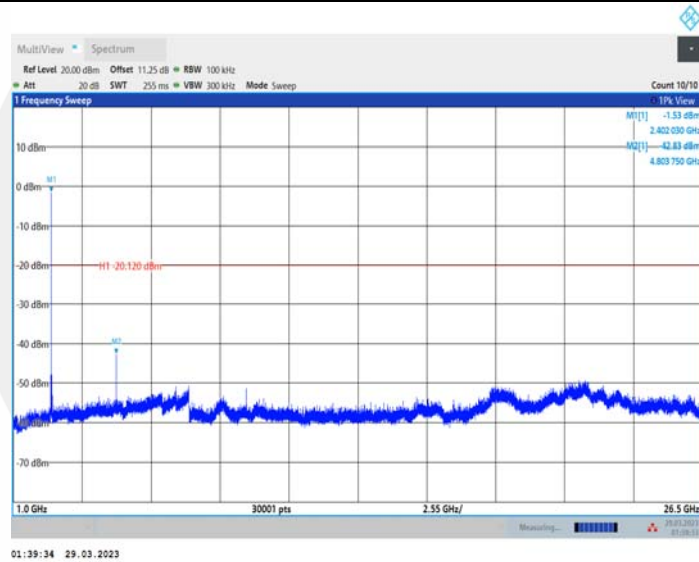


2DH5_Ant1_2441_30~1000

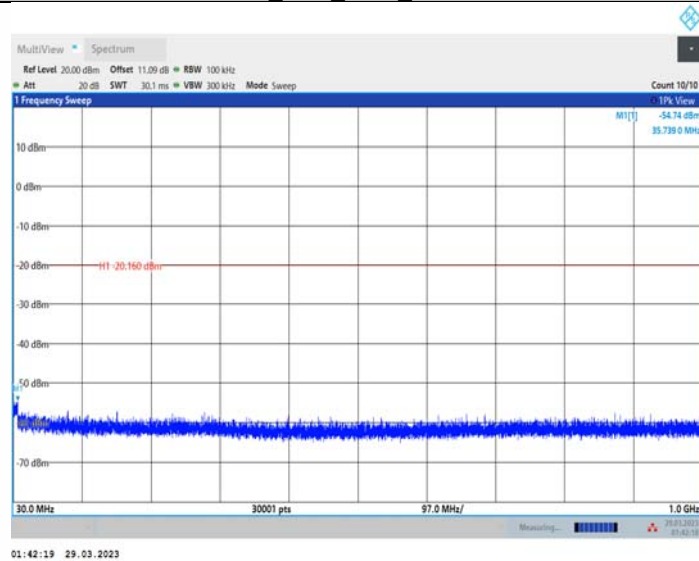


2DH5_Ant1_2441_1000~26500

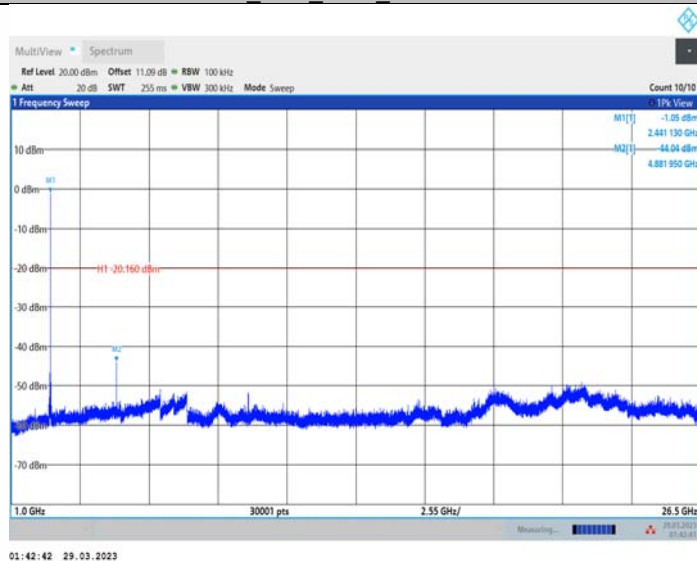


2DH5_Ant1_2480_30~1000

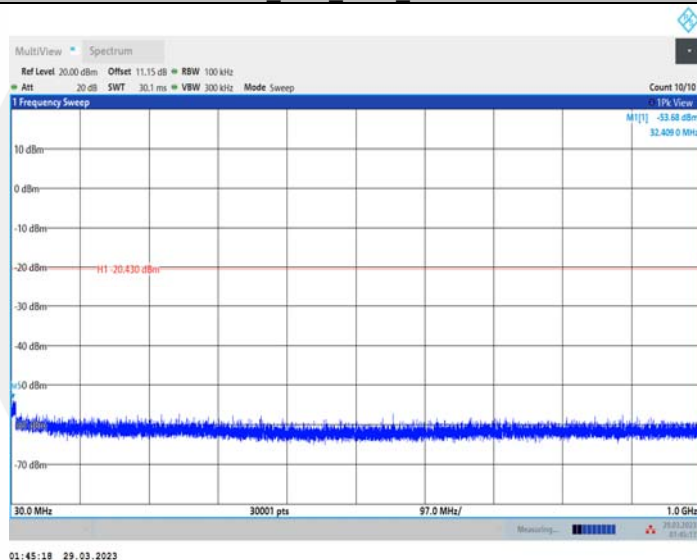


2DH5_Ant1_2480_1000~26500

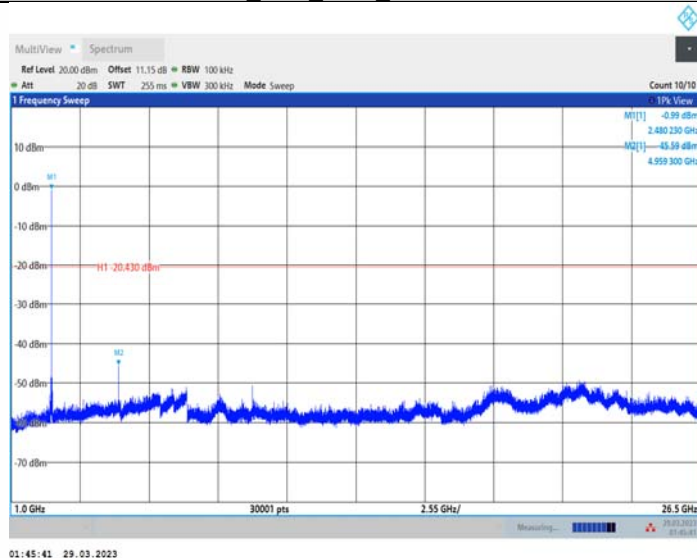


3DH5_Ant1_2402_30~1000

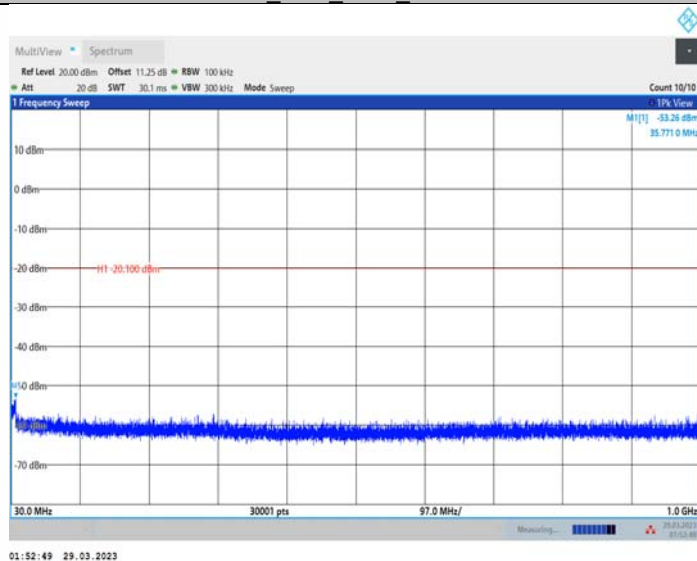

3DH5_Ant1_2402_1000~26500

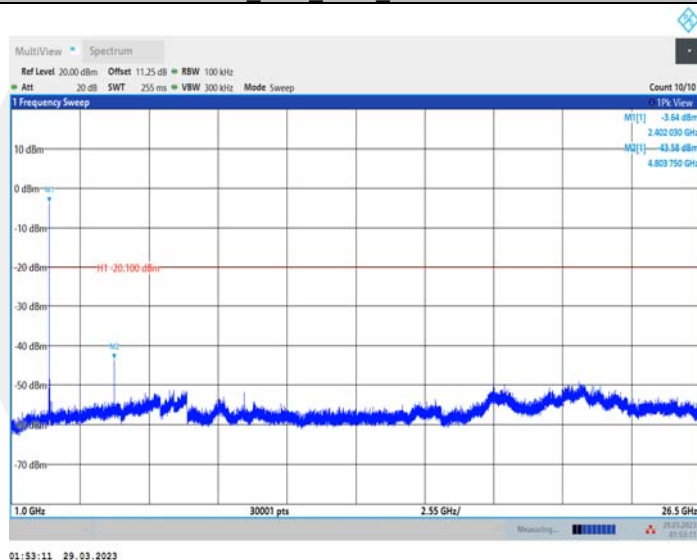

3DH5_Ant1_2441_30~1000

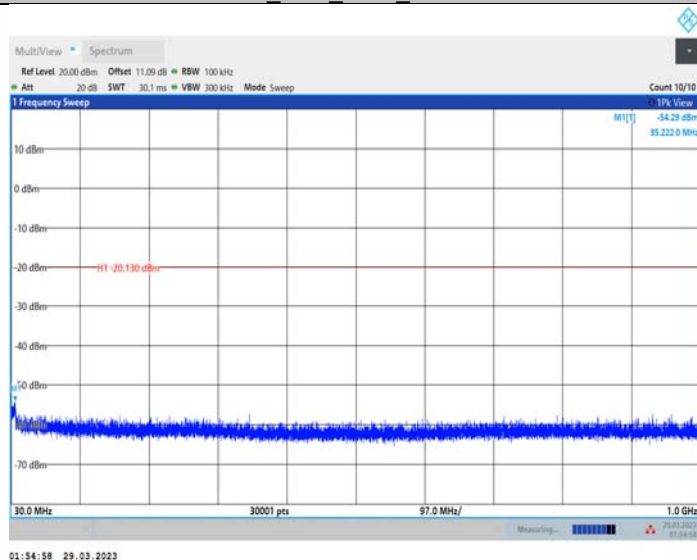

MultiView Spectrum

Ref Level 20.00 dBm Offset 11.09 dB RBW 100 kHz
Att 20 dB SWT 255 ms VBW 300 kHz Mode Sweep

Count 10/1 View 1 1% View

1 Frequency Sweep

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

M1 [1] -0.24 dB
2.441 130 GHz
M2 [1] -41.55 dB
4.881 950 GHz

M1
M2

-20.130 dBm

1.0 GHz 30001 pts 2.55 GHz/ 26.5 GHz

Measuring...

01:55:20 29.03.2023

MultiView Spectrum

Ref Level 20.00 dBm Offset 11.15 dB RBW 100 kHz
 Att 20 dB SWT 30.1 ms VBW 300 kHz Mode Sweep

Count 10/1
 1% View
 M[1] -54.13 dB
 34.672 0 M

1 Frequency Sweep

10 dBm
 0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm

-20.410 dBm

30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz

Measuring...

01:57:22 29.03.2023

MultiView Spectrum

Ref Level 20.00 dBm Offset 11.15 dB RBW 100 kHz
 Att 20 dB SWT 255 ms VBW 300 kHz Mode Sweep

Count 10/1 View 11% View

1 Frequency Sweep

10 dBm
 0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm

20.410 GHz

11 20.410 dBm

12 20.410 GHz

13 20.410 GHz

14 20.410 GHz

15 20.410 GHz

16 20.410 GHz

17 20.410 GHz

18 20.410 GHz

19 20.410 GHz

20 20.410 GHz

21 20.410 GHz

22 20.410 GHz

23 20.410 GHz

24 20.410 GHz

25 20.410 GHz

26 20.410 GHz

27 20.410 GHz

28 20.410 GHz

29 20.410 GHz

30 20.410 GHz

31 20.410 GHz

32 20.410 GHz

33 20.410 GHz

34 20.410 GHz

35 20.410 GHz

36 20.410 GHz

37 20.410 GHz

38 20.410 GHz

39 20.410 GHz

40 20.410 GHz

41 20.410 GHz

42 20.410 GHz

43 20.410 GHz

44 20.410 GHz

45 20.410 GHz

46 20.410 GHz

47 20.410 GHz

48 20.410 GHz

49 20.410 GHz

50 20.410 GHz

51 20.410 GHz

52 20.410 GHz

53 20.410 GHz

54 20.410 GHz

55 20.410 GHz

56 20.410 GHz

57 20.410 GHz

58 20.410 GHz

59 20.410 GHz

60 20.410 GHz

61 20.410 GHz

62 20.410 GHz

63 20.410 GHz

64 20.410 GHz

65 20.410 GHz

66 20.410 GHz

67 20.410 GHz

68 20.410 GHz

69 20.410 GHz

70 20.410 GHz

71 20.410 GHz

72 20.410 GHz

73 20.410 GHz

74 20.410 GHz

75 20.410 GHz

76 20.410 GHz

77 20.410 GHz

78 20.410 GHz

79 20.410 GHz

80 20.410 GHz

81 20.410 GHz

82 20.410 GHz

83 20.410 GHz

84 20.410 GHz

85 20.410 GHz

86 20.410 GHz

87 20.410 GHz

88 20.410 GHz

89 20.410 GHz

90 20.410 GHz

91 20.410 GHz

92 20.410 GHz

93 20.410 GHz

94 20.410 GHz

95 20.410 GHz

96 20.410 GHz

97 20.410 GHz

98 20.410 GHz

99 20.410 GHz

100 20.410 GHz

101 20.410 GHz

102 20.410 GHz

103 20.410 GHz

104 20.410 GHz

105 20.410 GHz

106 20.410 GHz

107 20.410 GHz

108 20.410 GHz

109 20.410 GHz

110 20.410 GHz

111 20.410 GHz

112 20.410 GHz

113 20.410 GHz

114 20.410 GHz

115 20.410 GHz

116 20.410 GHz

117 20.410 GHz

118 20.410 GHz

119 20.410 GHz

120 20.410 GHz

121 20.410 GHz

122 20.410 GHz

123 20.410 GHz

124 20.410 GHz

125 20.410 GHz

126 20.410 GHz

127 20.410 GHz

128 20.410 GHz

129 20.410 GHz

130 20.410 GHz

131 20.410 GHz

132 20.410 GHz

133 20.410 GHz

134 20.410 GHz

135 20.410 GHz

136 20.410 GHz

137 20.410 GHz

138 20.410 GHz

139 20.410 GHz

140 20.410 GHz

141 20.410 GHz

142 20.410 GHz

143 20.410 GHz

144 20.410 GHz

145 20.410 GHz

146 20.410 GHz

147 20.410 GHz

148 20.410 GHz

149 20.410 GHz

150 20.410 GHz

151 20.410 GHz

152 20.410 GHz

153 20.410 GHz

154 20.410 GHz

155 20.410 GHz

156 20.410 GHz

157 20.410 GHz

158 20.410 GHz

159 20.410 GHz

160 20.410 GHz

161 20.410 GHz

162 20.410 GHz

163 20.410 GHz

164 20.410 GHz

165 20.410 GHz

166 20.410 GHz

167 20.410 GHz

168 20.410 GHz

169 20.410 GHz

170 20.410 GHz

171 20.410 GHz

172 20.410 GHz

173 20.410 GHz

174 20.410 GHz

175 20.410 GHz

176 20.410 GHz

177 20.410 GHz

178 20.410 GHz

179 20.410 GHz

180 20.410 GHz

181 20.410 GHz

182 20.410 GHz

183 20.410 GHz

184 20.410 GHz

185 20.410 GHz

186 20.410 GHz

187 20.410 GHz

188 20.410 GHz

189 20.410 GHz

190 20.410 GHz

191 20.410 GHz

192 20.410 GHz

193 20.410 GHz

194 20.410 GHz

195 20.410 GHz

196 20.410 GHz

197 20.410 GHz

198 20.410 GHz

199 20.410 GHz

200 20.410 GHz

201 20.410 GHz

202 20.410 GHz

203 20.410 GHz

204 20.410 GHz

205 20.410 GHz

206 20.410 GHz

207 20.410 GHz

208 20.410 GHz

209 20.410 GHz

210 20.410 GHz

211 20.410 GHz

212 20.410 GHz

213 20.410 GHz

214 20.410 GHz

215 20.410 GHz

216 20.410 GHz

217 20.410 GHz

218 20.410 GHz

219 20.410 GHz

220 20.410 GHz

221 20.410 GHz

222 20.410 GHz

223 20.410 GHz

224 20.410 GHz

225 20.410 GHz

226 20.410 GHz

227 20.410 GHz

228 20.410 GHz

229 20.410 GHz

230 20.410 GHz

231 20.410 GHz

232 20.410 GHz

233 20.410 GHz

234 20.410 GHz

235 20.410 GHz

236 20.410 GHz

237 20.410 GHz

238 20.410 GHz

239 20.410 GHz

240 20.410 GHz

241 20.410 GHz

242

9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-Gen and RSS-247

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490-1.705	24000/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	22° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1,GFSK) result recorded was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11490	V	60.20	49.65	74.00	54.00	13.80	4.35
14703.7	V	64.38	49.28	74.00	54.00	9.62	4.72
17626.8	V	68.47	49.52	74.00	54.00	5.53	4.48
11512.5	H	60.74	49.42	74.00	54.00	13.26	4.58
14656.8	H	64.43	50.21	74.00	54.00	9.57	3.79
17611.8	H	68.70	49.98	74.00	54.00	5.30	4.02

Test mode: GFSK Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11390.6	V	59.97	48.46	74.00	54.00	14.03	5.54
14598.7	V	63.50	50.41	74.00	54.00	10.50	3.59
17636.2	V	69.23	49.86	74.00	54.00	4.77	4.14
11520	H	60.21	13.79	74.00	54.00	49.44	4.56
14623.1	H	64.30	9.70	74.00	54.00	50.84	3.16
17606.2	H	69.55	4.45	74.00	54.00	50.20	3.80

Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11450.6	V	60.21	49.13	74.00	54.00	13.79	4.87
14634.3	V	63.69	50.50	74.00	54.00	10.31	3.50
17630.6	V	69.75	49.81	74.00	54.00	4.25	4.19
11497.5	H	60.11	49.81	74.00	54.00	13.89	4.19
14799.3	H	63.58	48.53	74.00	54.00	10.42	5.47
17638.1	H	68.93	49.47	74.00	54.00	5.07	4.53

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK, Hopping) mode have been tested, and the worst(Antenna 1,GFSK, Hopping) result recorded was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2378.09	H	50.58	74.00	41.21	54.00
2378.22	V	48.01	74.00	41.33	54.00

Test mode: GFSK Frequency: Channel 78: 2480MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2497.85	H	46.95	74.00	41.30	54.00
2498.34	V	47.03	74.00	41.43	54.00

Test mode: GFSK Frequency: Hopping


Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2399.24	H	46.53	74.00	43.54	54.00
2483.93	H	47.02	74.00	44.19	54.00
2399.62	V	47.27	74.00	43.11	54.00
2482.98	V	45.62	74.00	44.63	54.00

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test Model

Spurious Emission in Restricted Band 2310-2390MHz
Channel 0: 2402MHz
GFSK


V

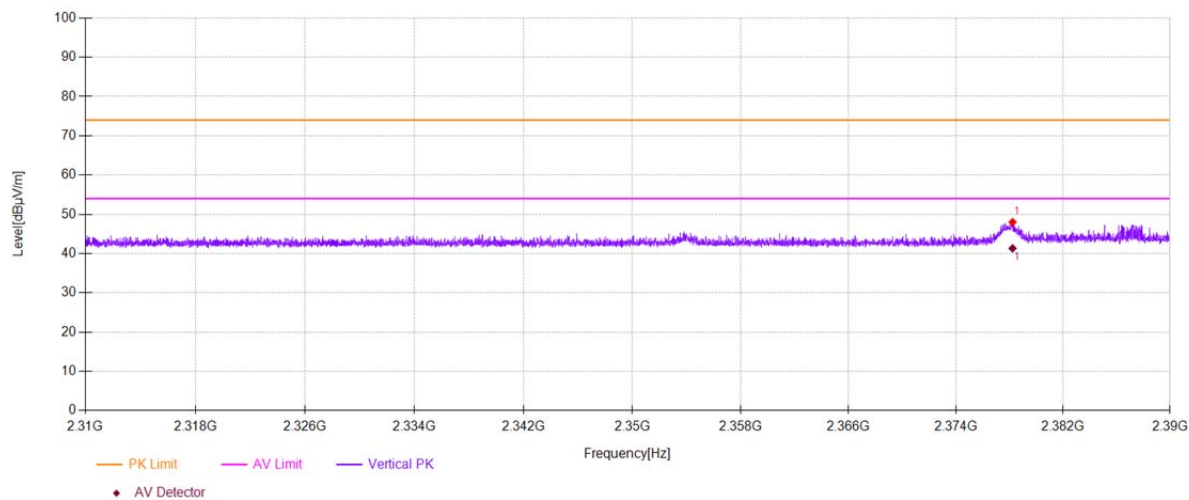

Test Model

Spurious Emission in Restricted Band 2310-2390MHz
Channel 0: 2402MHz
GFSK

H

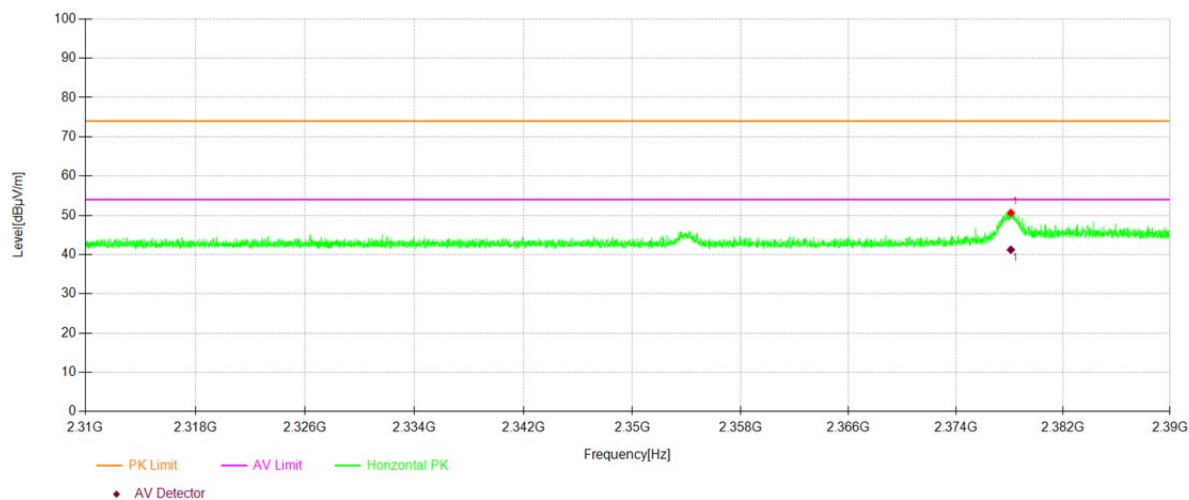


Test Model

Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 78: 2480MHz

GFSK

V

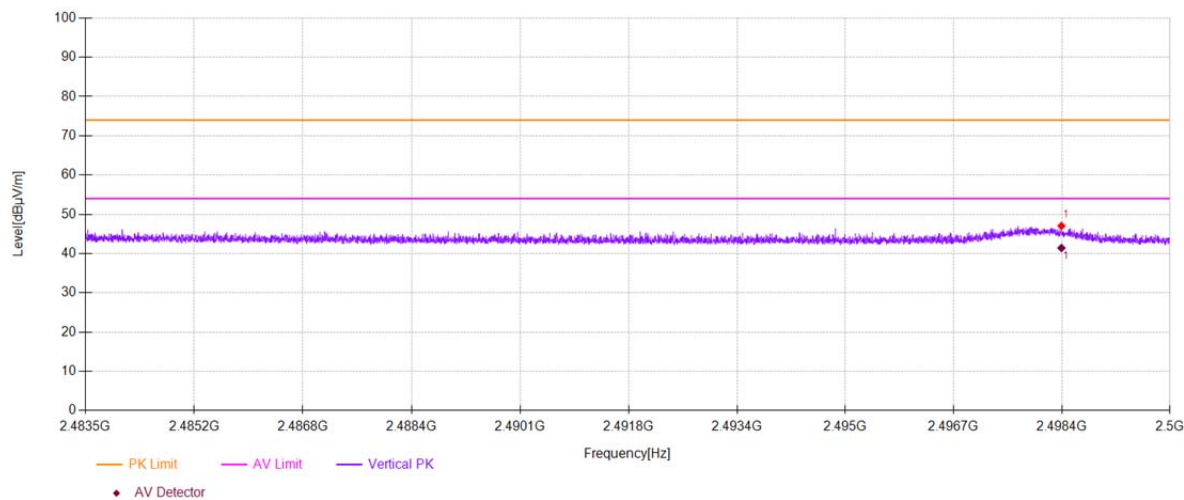


Test Model

Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 78: 2480MHz


GFSK

H

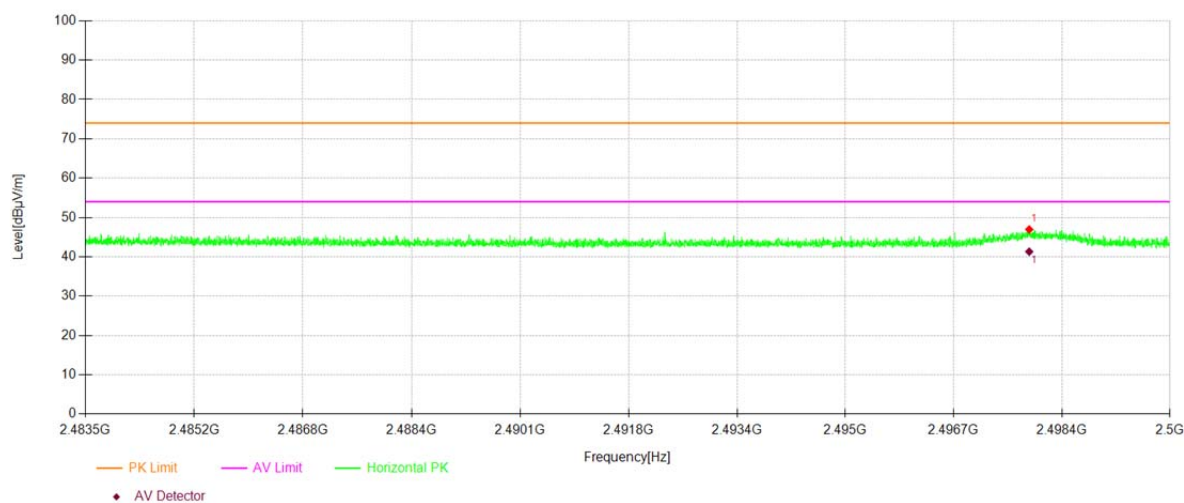


Test Model

Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz
Hopping GFSK V

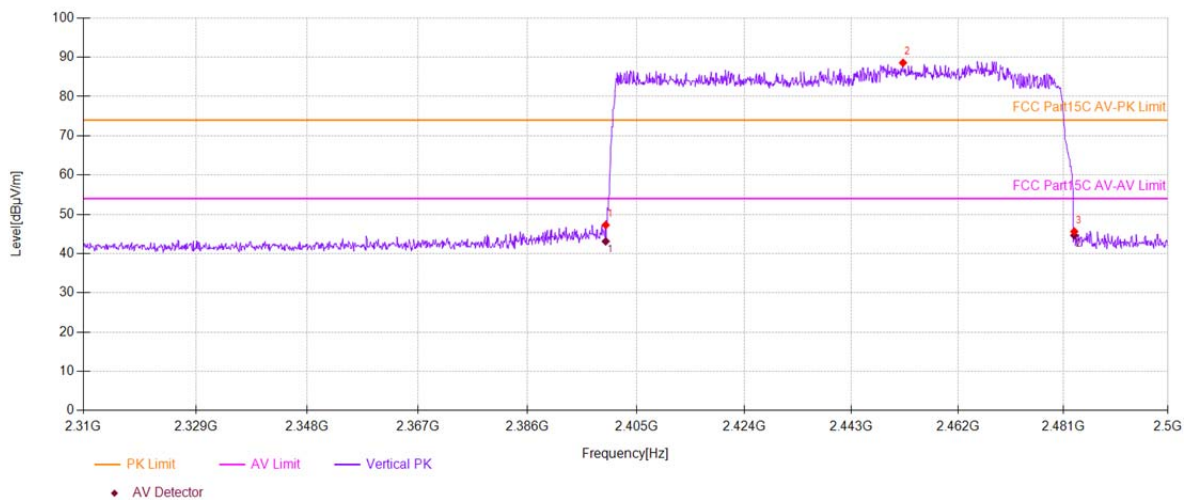


Test Model

Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz
Hopping GFSK H

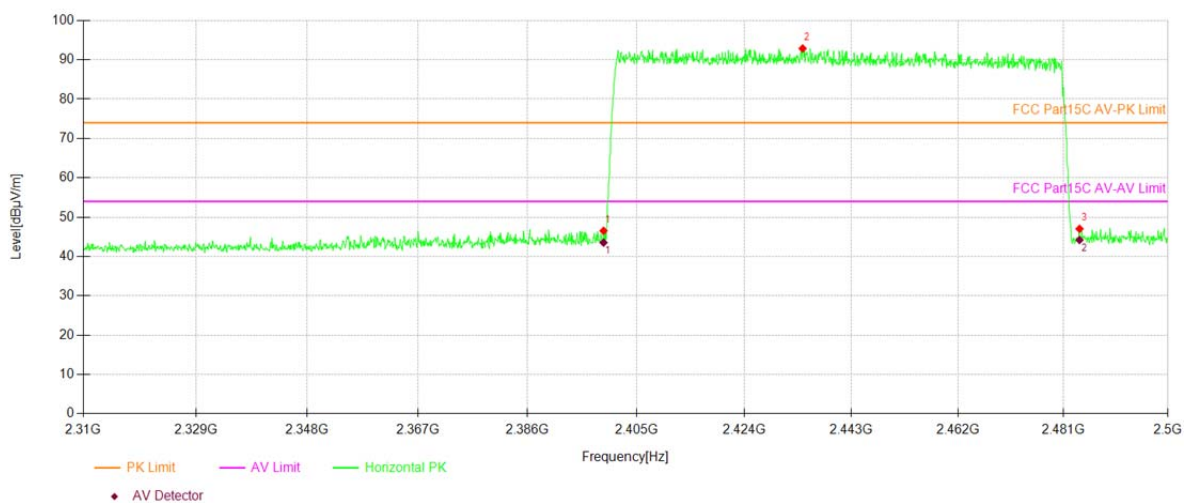


- Spurious Emission below 1GHz(30MHz to 1GHz)
All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1,GFSK) result recorded was report as below:

BT 2402

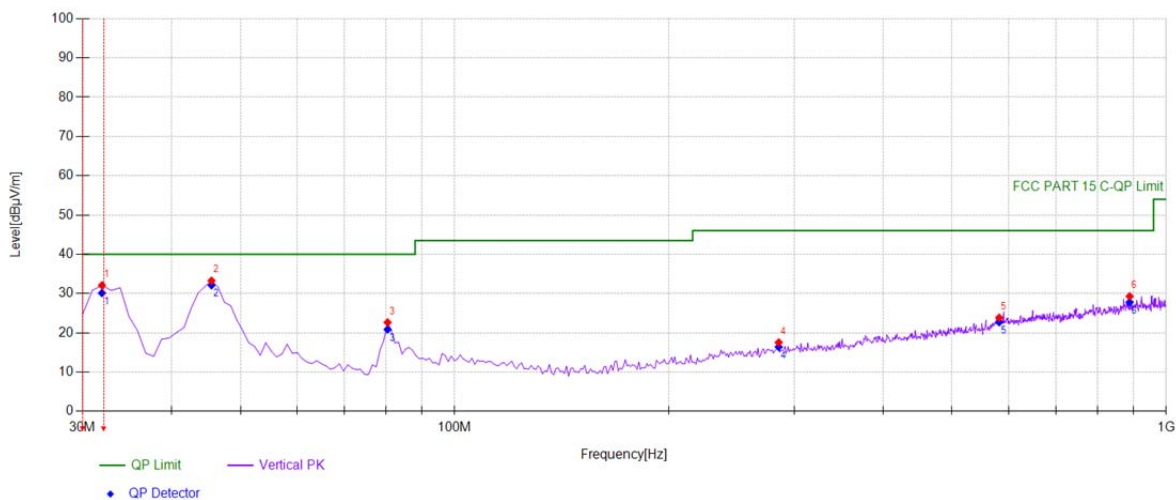


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	31.9419	50.50	-18.41	32.09	PK	40.00	7.91	Vertical
2	45.5355	50.80	-17.53	33.27	PK	40.00	6.73	Vertical
3	80.4905	44.02	-21.37	22.65	PK	40.00	17.35	Vertical
4	285.365	31.73	-14.17	17.56	PK	46.00	28.44	Vertical
5	582.482	31.00	-7.14	23.86	PK	46.00	22.14	Vertical
6	888.338	32.20	-2.90	29.30	PK	46.00	16.70	Vertical

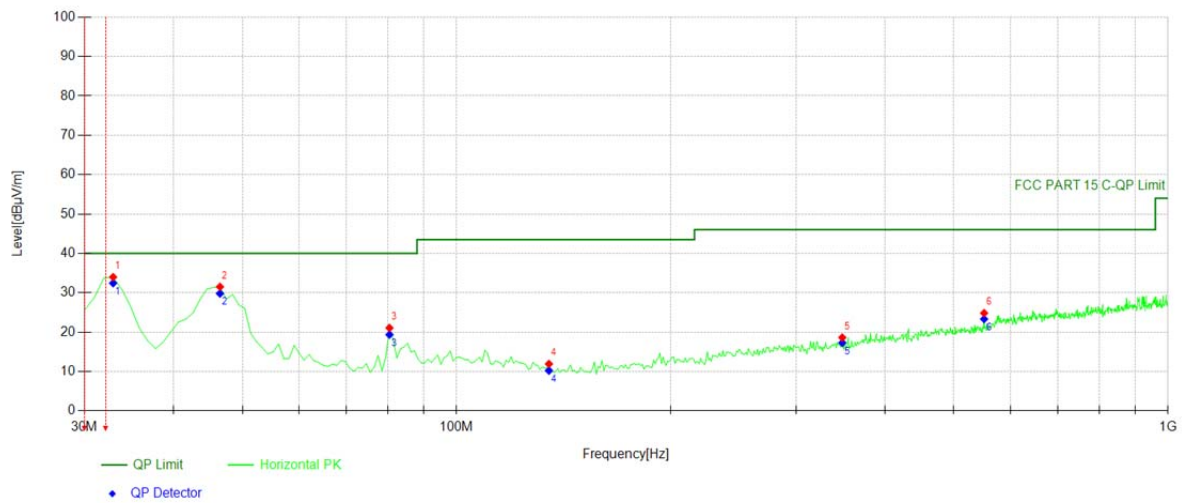

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	32.9129	52.33	-18.35	33.98	PK	40.00	6.02	Horizontal
2	46.5065	48.96	-17.45	31.51	PK	40.00	8.49	Horizontal
3	80.4905	42.44	-21.37	21.07	PK	40.00	18.93	Horizontal
4	134.864	31.42	-19.49	11.93	PK	43.50	31.57	Horizontal
5	348.478	32.10	-13.47	18.63	PK	46.00	27.37	Horizontal
6	551.411	34.02	-9.18	24.84	PK	46.00	21.16	Horizontal

BT 2441

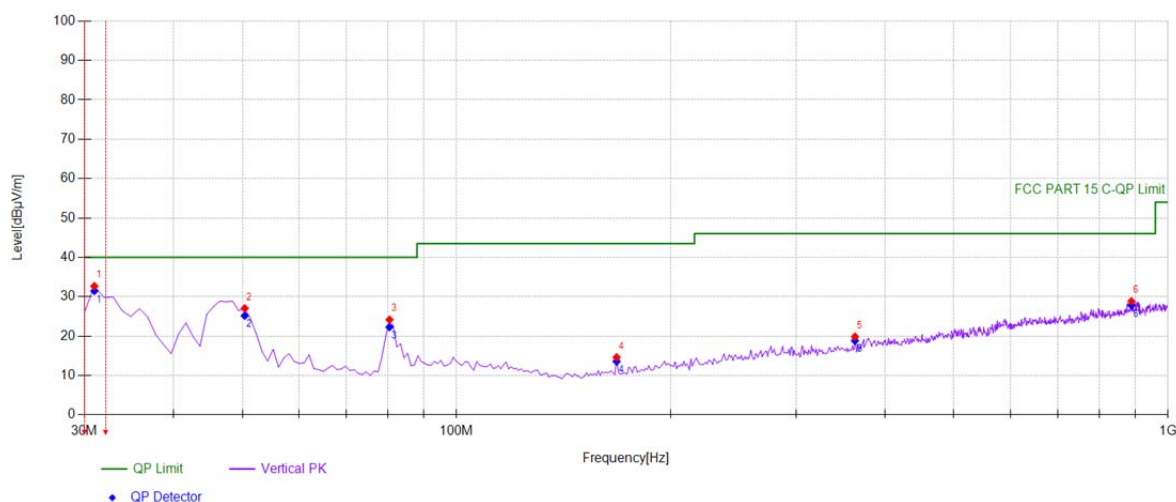

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	30.971	51.16	-18.47	32.69	PK	40.00	7.31	Vertical
2	50.3904	44.32	-17.26	27.06	PK	40.00	12.94	Vertical
3	80.4905	45.54	-21.37	24.17	PK	40.00	15.83	Vertical
4	167.877	33.71	-19.10	14.61	PK	43.50	28.89	Vertical
5	363.043	33.05	-13.19	19.86	PK	46.00	26.14	Vertical
6	888.338	31.74	-2.90	28.84	PK	46.00	17.16	Vertical

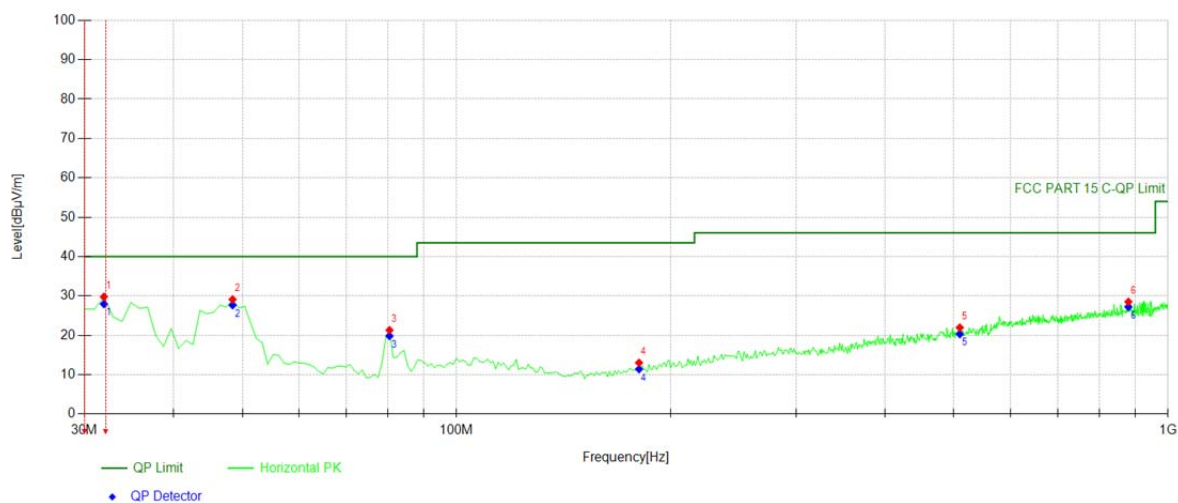

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	31.9419	48.20	-18.41	29.79	PK	40.00	10.21	Horizontal
2	48.4484	46.45	-17.32	29.13	PK	40.00	10.87	Horizontal
3	80.4905	42.69	-21.37	21.32	PK	40.00	18.68	Horizontal
4	180.500	31.40	-18.36	13.04	PK	43.50	30.46	Horizontal
5	509.659	31.74	-9.78	21.96	PK	46.00	24.04	Horizontal
6	879.599	31.51	-3.00	28.51	PK	46.00	17.49	Horizontal

BT 2480

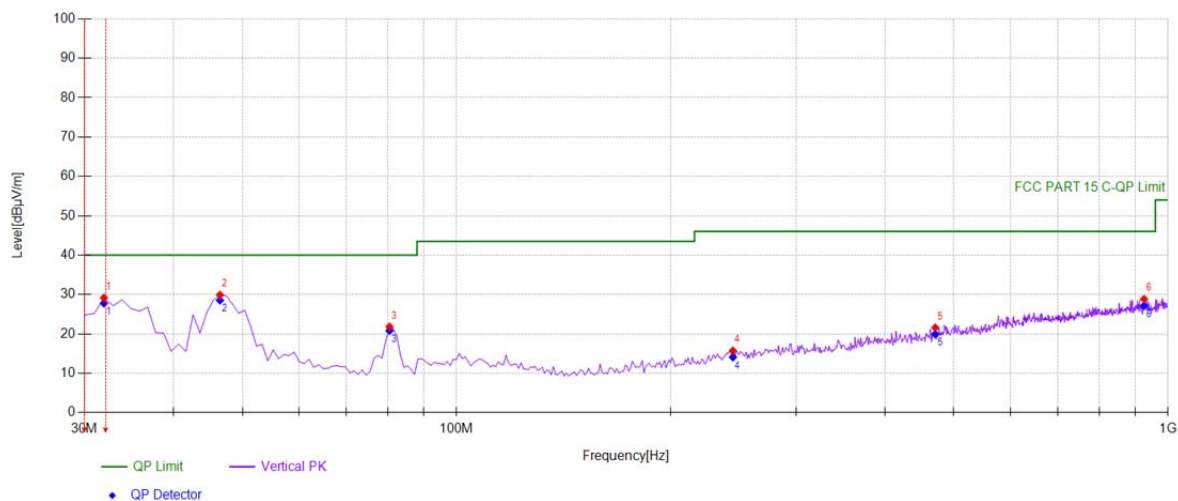

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	31.9419	47.56	-18.41	29.15	PK	40.00	10.85	Vertical
2	46.5065	47.35	-17.45	29.90	PK	40.00	10.10	Vertical
3	80.4905	43.19	-21.37	21.82	PK	40.00	18.18	Vertical
4	244.584	30.92	-15.18	15.74	PK	46.00	30.26	Vertical
5	470.820	31.96	-10.37	21.59	PK	46.00	24.41	Vertical
6	925.235	31.57	-2.73	28.84	PK	46.00	17.16	Vertical

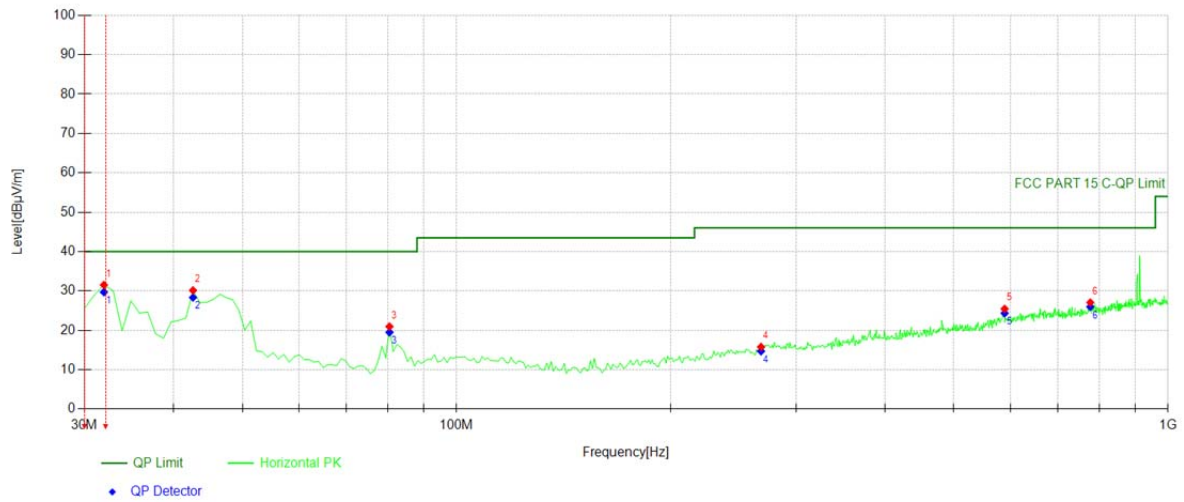

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	31.9419	49.93	-18.41	31.52	PK	40.00	8.48	Horizontal
2	42.6226	47.88	-17.73	30.15	PK	40.00	9.85	Horizontal
3	80.4905	42.33	-21.37	20.96	PK	40.00	19.04	Horizontal
4	267.887	30.63	-14.84	15.79	PK	46.00	30.21	Horizontal
5	589.279	32.58	-7.14	25.44	PK	46.00	20.56	Horizontal
6	777.647	31.78	-4.71	27.07	PK	46.00	18.93	Horizontal

9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207
According to IC RSS-Gen 8.8

9.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.		

9.8.3 Test Configuration


Test according to clause 7.3 conducted emission test setup

9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results

Pass

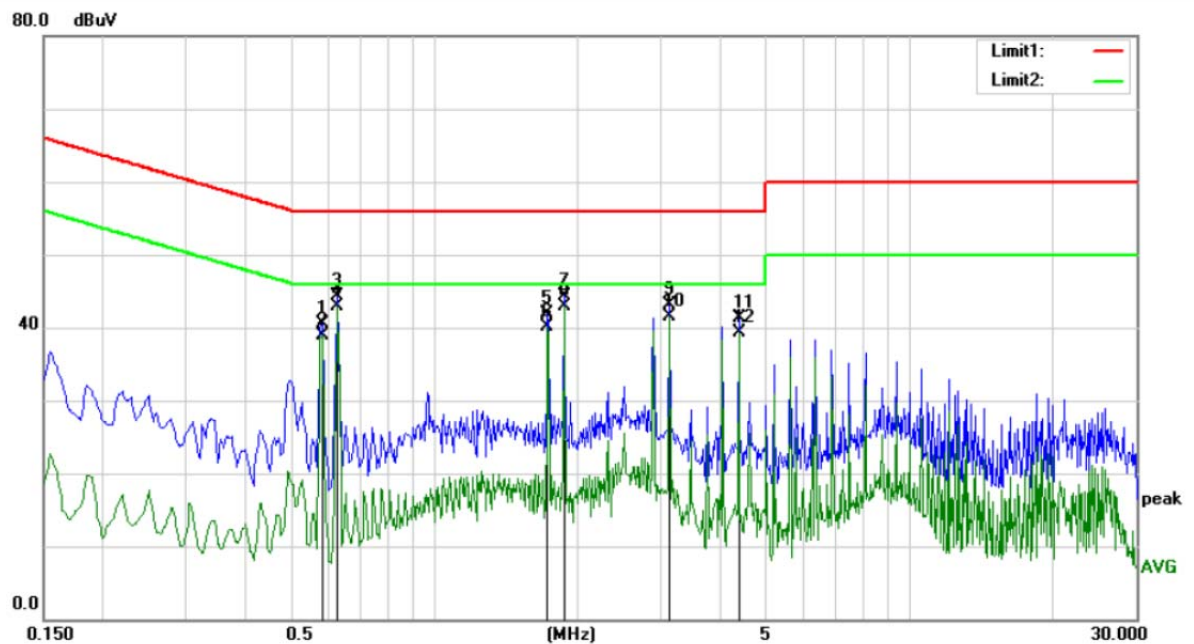

Site Conduction #1

Phase: **N**

Temperature: 21.9

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 58 %

Mode: BT mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.5800	31.07	9.53	40.60	56.00	-15.40	QP	
2		0.5800	29.35	9.53	38.88	46.00	-7.12	AVG	
3		0.6250	34.69	9.54	44.23	56.00	-11.77	QP	
4	*	0.6250	33.41	9.54	42.95	46.00	-3.05	AVG	
5		1.7300	32.34	9.55	41.89	56.00	-14.11	QP	
6		1.7300	30.56	9.55	40.11	46.00	-5.89	AVG	
7		1.8750	34.85	9.55	44.40	56.00	-11.60	QP	
8		1.8750	33.40	9.55	42.95	46.00	-3.05	AVG	
9		3.1250	33.49	9.56	43.05	56.00	-12.95	QP	
10		3.1250	31.89	9.56	41.45	46.00	-4.55	AVG	
11		4.3750	31.81	9.57	41.38	56.00	-14.62	QP	
12		4.3750	29.73	9.57	39.30	46.00	-6.70	AVG	

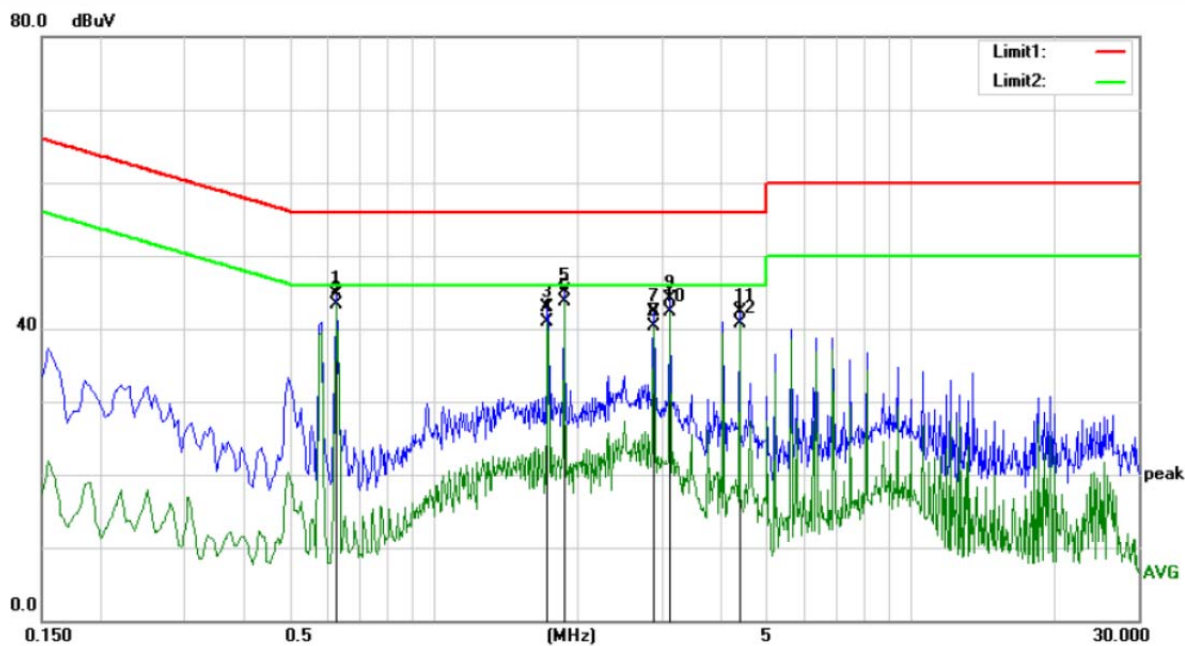

Site Conduction #1

Phase: **L1**

Temperature: 21.9

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 58 %

Mode: BT mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.6250	35.12	9.54	44.66	56.00	-11.34	QP	
2		0.6250	33.85	9.54	43.39	46.00	-2.61	AVG	
3		1.7300	33.30	9.55	42.85	56.00	-13.15	QP	
4		1.7300	31.29	9.55	40.84	46.00	-5.16	AVG	
5		1.8750	35.60	9.55	45.15	56.00	-10.85	QP	
6	*	1.8750	34.11	9.55	43.66	46.00	-2.34	AVG	
7		2.8850	32.83	9.56	42.39	56.00	-13.61	QP	
8		2.8850	30.79	9.56	40.35	46.00	-5.65	AVG	
9		3.1250	34.45	9.56	44.01	56.00	-11.99	QP	
10		3.1250	32.69	9.56	42.25	46.00	-3.75	AVG	
11		4.3750	32.69	9.57	42.26	56.00	-13.74	QP	
12		4.3750	31.22	9.57	40.79	46.00	-5.21	AVG	

9.9 ANTENNA APPLICATION

9.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

9.9.2 Result

PASS.

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

*** End of Report ***