



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	121 Theory Drive, Irvine, CA 92617, USA
FCC ID	Q87-WUSB6300

Product Name	Linksys Dual Band Wireless-AC USB Adapter
Brand Name	LINKSYS
Model No.	WUSB6300
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz / 5725 ~ 5850 MHz
Received Date	Nov. 01, 2012
Final Test Date	Apr. 12, 2016
Submission Type	Class II Change

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r02, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Class II Change	8
3.8. Table for Supporting Units	8
3.9. Table for Parameters of Test Software Setting	9
3.10. EUT Operation during Test	9
3.11. Duty Cycle	9
3.12. Test Configurations	10
4. TEST RESULT	11
4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	11
4.2. 6dB Spectrum Bandwidth Measurement	18
4.3. Maximum Conducted Output Power Measurement.....	22
4.4. Power Spectral Density Measurement	24
4.5. Radiated Emissions Measurement	30
4.6. Band Edge Emissions Measurement	42
4.7. Frequency Stability Measurement	47
4.8. Antenna Requirements	51
5. LIST OF MEASURING EQUIPMENTS	52
6. MEASUREMENT UNCERTAINTY.....	53
APPENDIX A. TEST PHOTOS	A1 ~ A2


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N1172-32	Rev. 01	Initial issue of report	May 13, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : Linksys Dual Band Wireless-AC USB Adapter
Brand Name : LINKSYS
Model No. : WUSB6300
Applicant : Linksys LLC
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 01, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

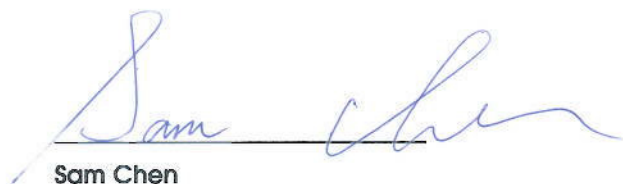

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.2	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	8.13 dB
4.4	15.407(a)	Power Spectral Density	Complies	24.56 dB
4.5	15.407(b)	Radiated Emissions	Complies	6.44 dB
4.6	15.407(b)	Band Edge Emissions	Complies	1.02 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	IEEE 802.11a: WLAN (1TX, 1RX) IEEE 802.11n/ac: WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz / 5725 ~ 5850 MHz
Channel Number	21 for 20MHz bandwidth ; 9 for 40MHz bandwidth 4 for 80MHz bandwidth
Channel Band Width (99%)	IEEE 802.11a: 16.85 MHz IEEE 802.11ac MCS0/Nss2 (VHT20): 28.83 MHz IEEE 802.11ac MCS0/Nss2 (VHT40): 47.47 MHz IEEE 802.11ac MCS0/Nss2 (VHT80): 76.12 MHz
Maximum Conducted Output Power	IEEE 802.11a: 15.79 dBm IEEE 802.11ac MCS0/Nss2 (VHT20): 21.87 dBm IEEE 802.11ac MCS0/Nss2 (VHT40): 21.12 dBm IEEE 802.11ac MCS0/Nss2 (VHT80): 17.47 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based) <input type="checkbox"/> Frame Based
TPC Function	<input type="checkbox"/> With TPC <input checked="" type="checkbox"/> Without TPC
Weather Band (5600~5650MHz)	<input type="checkbox"/> With 5600~5650MHz <input checked="" type="checkbox"/> Without 5600~5650MHz
Beamforming Function	<input type="checkbox"/> With beamforming <input checked="" type="checkbox"/> Without beamforming
Operate Condition	<input checked="" type="checkbox"/> Indoor <input type="checkbox"/> Outdoor

Antenna & Band width

Antenna	Single (TX)			Two (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X	X	X	X
IEEE 802.11n	X	X	X	V	V	X
IEEE 802.11ac	X	X	X	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		
					2.4GHz	5GHz	
1	SERCOMM	AC-950	Printed Antenna	N/A	2.31	Band 1	3.84
						Band 2	3.99
						Band 3	4.39
						Band 4	4.15
2	SERCOMM	AC-950	Printed Antenna	N/A	1.72	Band 1	4.29
						Band 2	3.07
						Band 3	2.94
						Band 4	3.07

Note: The EUT has two antennas

For IEEE 802.11a mode (1TX/1RX):

It fixed Chain 2 as transmitting and receiving antenna.

For IEEE 802.11n/ac mode (2TX/2RX):

Chain 1 and Chain 2 could transmit / receive simultaneously.

Chain 1 (Connect to Ant. 1)



Chain 2 (Connect to Ant. 2)



3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 134, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 58, 106, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	112	5560 MHz
	102	5510 MHz	116	5580 MHz
	104	5520 MHz	132	5660 MHz
	106	5530 MHz	134	5670 MHz
	108	5540 MHz	136	5680 MHz
	110	5550 MHz	140	5700 MHz
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
Max. Conducted Output Power	11a/BPSK	Band 4	6Mbps	149/157/165	2
	11ac VHT20	Band 4	MCS0/Nss2	149/157/165	1 + 2
	11ac VHT40	Band 4	MCS0/Nss2	151/159	1 + 2
	11ac VHT80	Band 4	MCS0/Nss2	155	1 + 2
Power Spectral Density	11a/BPSK	Band 4	6Mbps	149/157/165	2
	11ac VHT20	Band 4	MCS0/Nss2	149/157/165	1 + 2
	11ac VHT40	Band 4	MCS0/Nss2	151/159	1 + 2
	11ac VHT80	Band 4	MCS0/Nss2	155	1 + 2
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	2
	11ac VHT20	Band 4	MCS0/Nss2	149/157/165	1 + 2
	11ac VHT40	Band 4	MCS0/Nss2	151/159	1 + 2
	11ac VHT80	Band 4	MCS0/Nss2	155	1 + 2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	2
	11ac VHT20	Band 4	MCS0/Nss2	149/157/165	1 + 2
	11ac VHT40	Band 4	MCS0/Nss2	151/159	1 + 2
	11ac VHT80	Band 4	MCS0/Nss2	155	1 + 2
Radiated Emission Above 1GHz	11a/BPSK	Band 4	6Mbps	149/157/165	2
	11ac VHT20	Band 4	MCS0/Nss2	149/157/165	1 + 2
	11ac VHT40	Band 4	MCS0/Nss2	151/159	1 + 2
	11ac VHT80	Band 4	MCS0/Nss2	155	1 + 2
Band Edge Emission	11a/BPSK	Band 4	6Mbps	149/157/165	2
	11ac VHT20	Band 4	MCS0/Nss2	149/157/165	1 + 2
	11ac VHT40	Band 4	MCS0/Nss2	151/159	1 + 2
	11ac VHT80	Band 4	MCS0/Nss2	155	1 + 2
Frequency Stability	20 MHz	Band 4	-	157	1
	40 MHz	Band 4	-	151	1
	80 MHz	Band 4	-	155	1

The following test modes were performed for all tests:

The EUT was performed at X axis, Y axis and Z axis position for test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.

For Radiated Emission test:

Mode 1: CTX - Place EUT in Z axis

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR2N0801-01AA, FR2N0801-01AB and FR2N0801-03.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Updating the Applicant's Address. 2. Updating the Manufacturer's Address. 3. Updating the Brand Name from "Linksys" to "LINKSYS".	Do not effect the test results.
4. Updating 5GHz Band 1 ~Band 3 to "New Rules" from "Old Rules".	The output power remains the same, so it's no need to re-test.
5. Updating 5GHz Band 4 to "New Rules" from "Old Rules".	1. 26dB Bandwidth and 99% Occupied Bandwidth 2. 6dB Spectrum Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Radiated Emissions above 1GHz 6. Band Edge Emissions 7. Frequency Stability

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Realtek 11ac 8812AU USB WLAN NIC Masproduction Kit		
Mode	NCB: 20MHz		
Frequency	5745 MHz	5785 MHz	5825 MHz
802.11a	37	37	36
802.11ac MCS0/Nss2 VHT20	49/50	53/54	53/54
Mode	NCB: 40MHz		
Frequency	5755 MHz		5795 MHz
802.11ac MCS0/Nss2 VHT40	36/37		53/54
Mode	NCB: 80MHz		
Frequency	5775 MHz		
802.11ac MCS0/Nss2 VHT80	41/42		

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.000	1.000	100.00	0.00	0.01
802.11ac MCS0/Nss2 VHT20	1.000	1.000	100.00	0.00	0.01
802.11ac MCS0/Nss2 VHT40	1.000	1.000	100.00	0.00	0.01
802.11ac MCS0/Nss2 VHT80	1.000	1.000	100.00	0.00	0.01

3.12. Test Configurations

3.12.1. Radiation Emissions Test Configuration

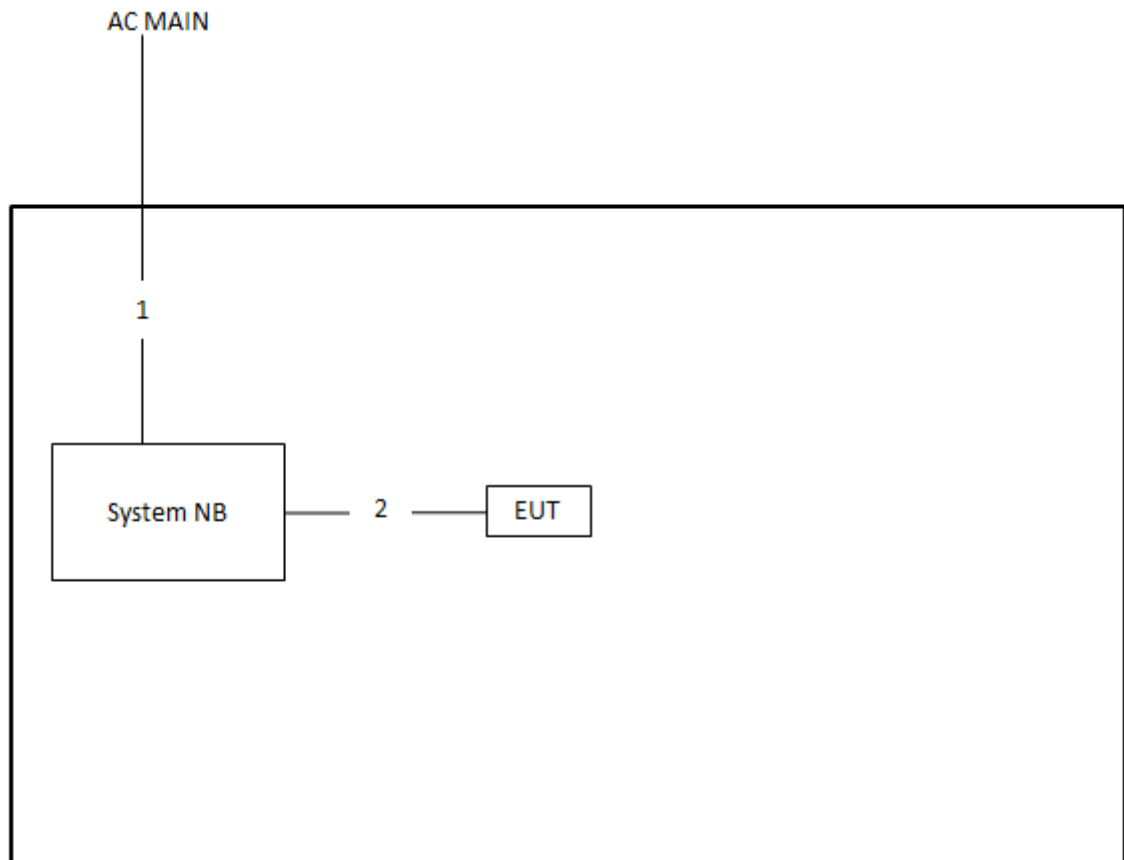

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	USB cable	No	3m

4. TEST RESULT

4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.1.1. Limit

No restriction limits.

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.1.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.1.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.1.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745 MHz	21.13	16.85
	5785 MHz	21.91	16.85
	5825 MHz	22.43	16.85
802.11ac MCS0/Nss2 VHT20	5745 MHz	36.87	19.36
	5785 MHz	41.74	27.26
	5825 MHz	42.96	28.83
802.11ac MCS0/Nss2 VHT40	5755 MHz	43.62	37.05
	5795 MHz	90.00	47.47
802.11ac MCS0/Nss2 VHT80	5775 MHz	83.48	76.12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5745 MHz

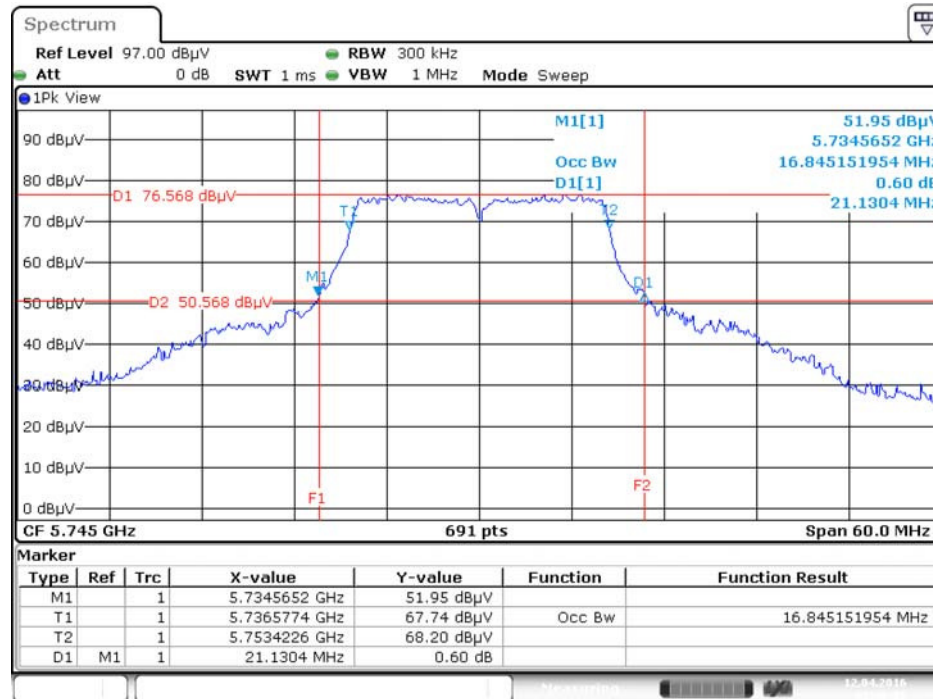


Date: 12.APR.2016 01:46:16

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5785 MHz

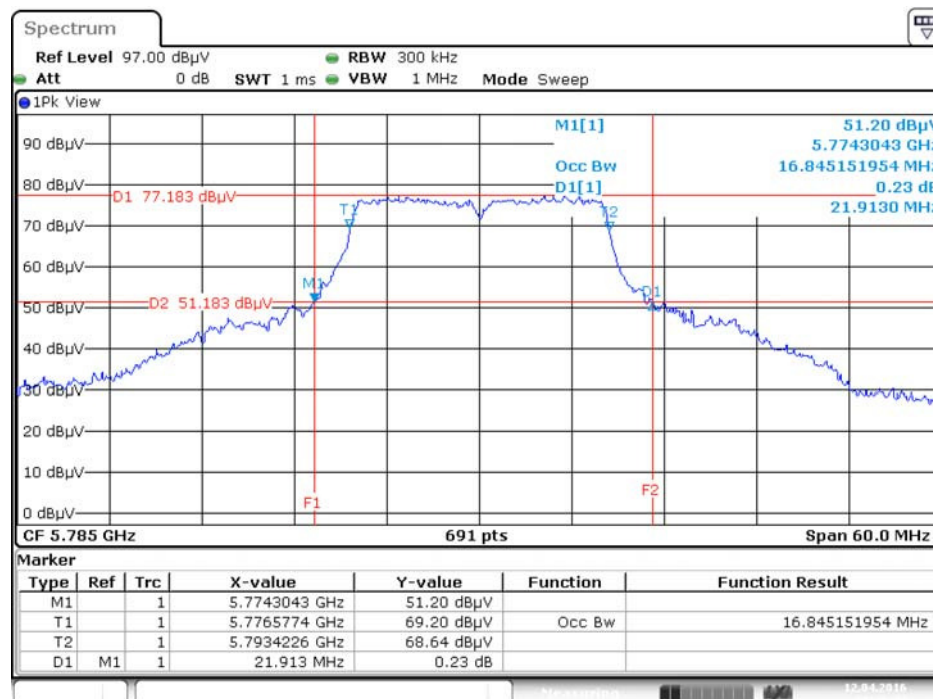


Date: 12.APR.2016 01:46:49

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5825 MHz

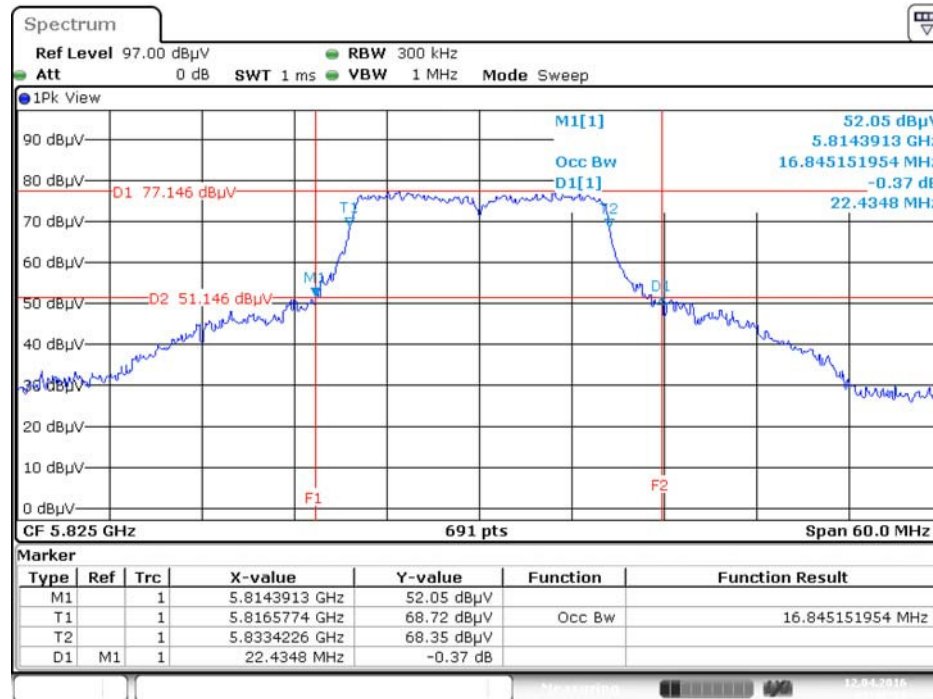


Date: 12.APR.2016 01:47:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / Chain 1 + Chain 2 / 5745 MHz

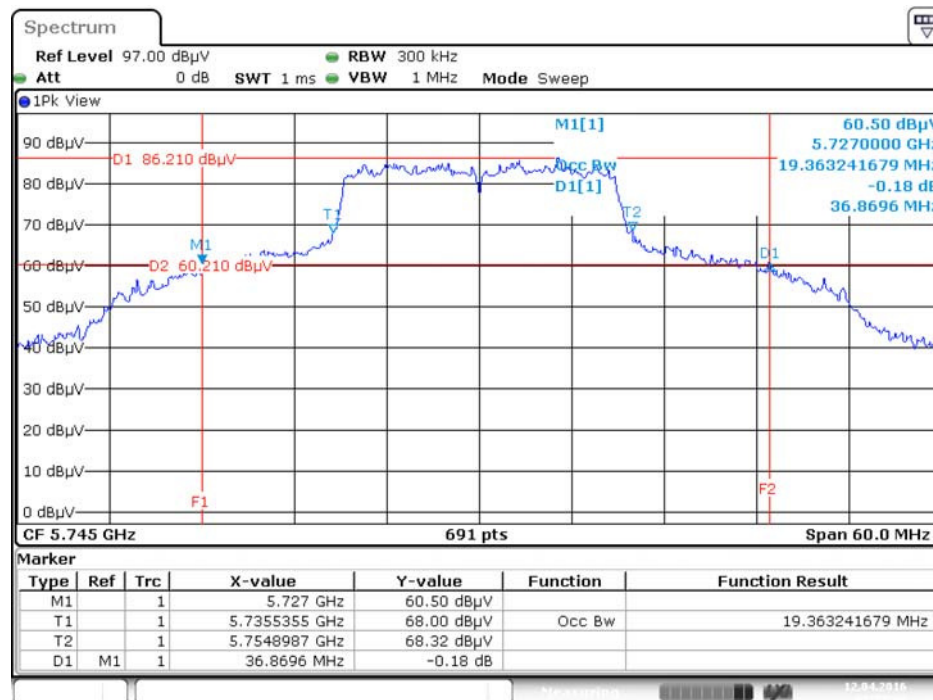


Date: 12.APR.2016 01:53:47


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / Chain 1 + Chain 2 / 5785 MHz

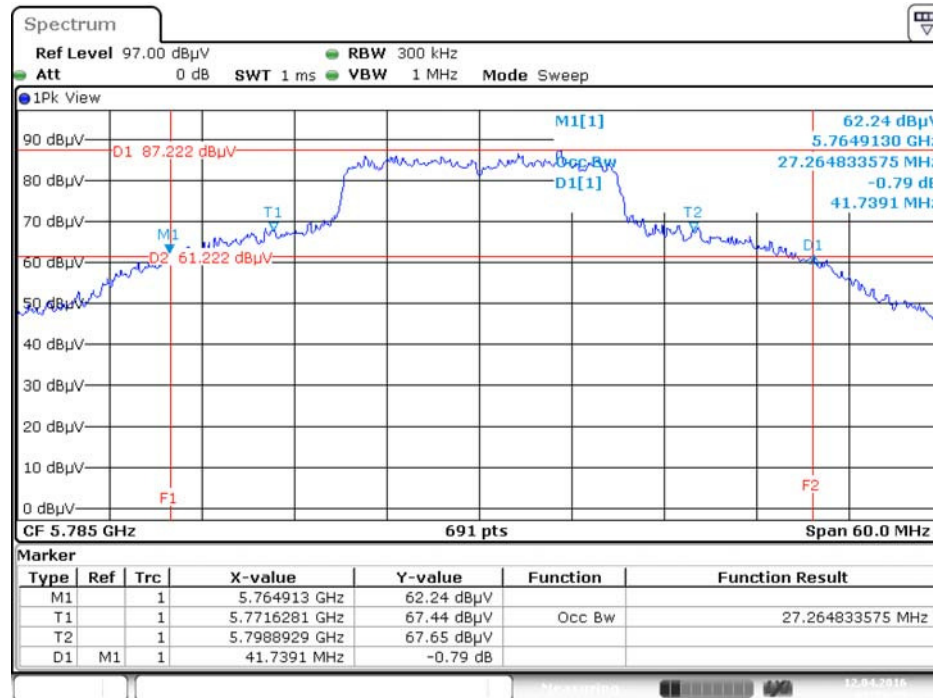

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / Chain 1 + Chain 2 / 5825 MHz

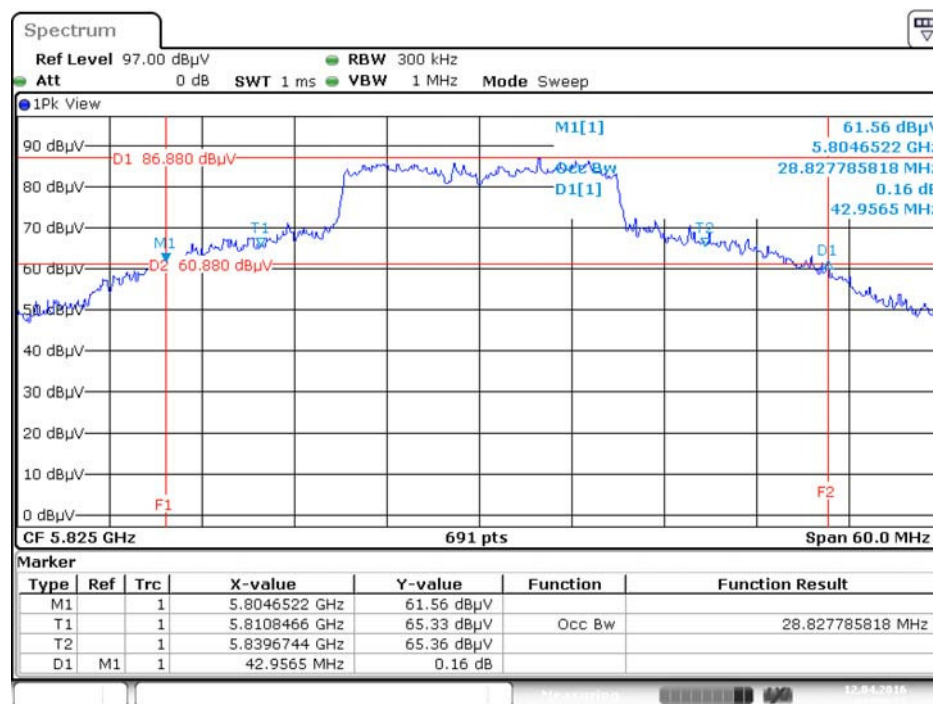


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / Chain 1 + Chain 2 / 5755 MHz

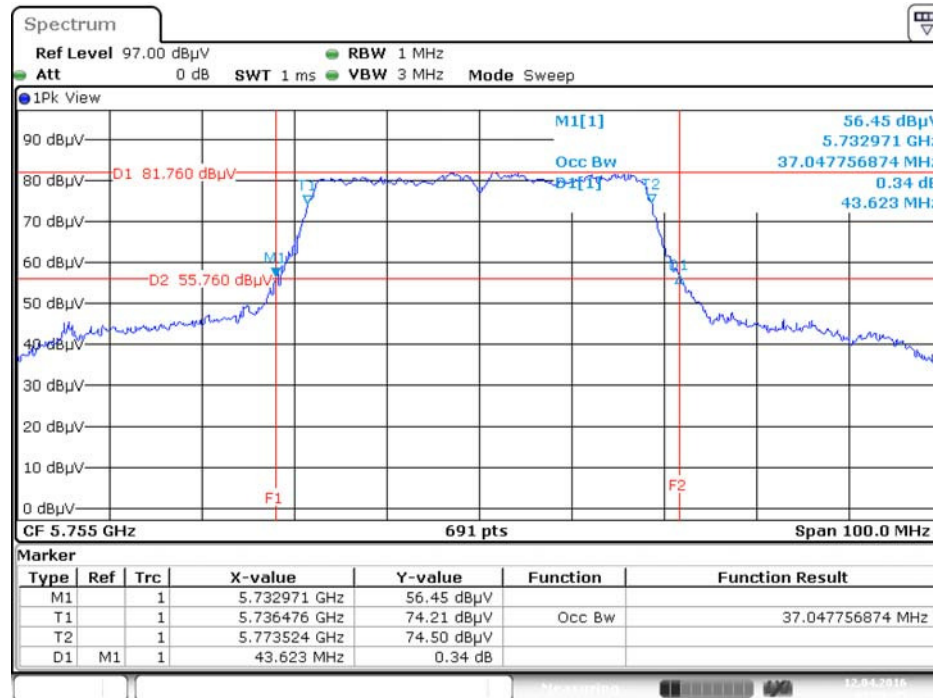


Date: 12.APR.2016 01:56:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / Chain 1 + Chain 2 / 5795 MHz

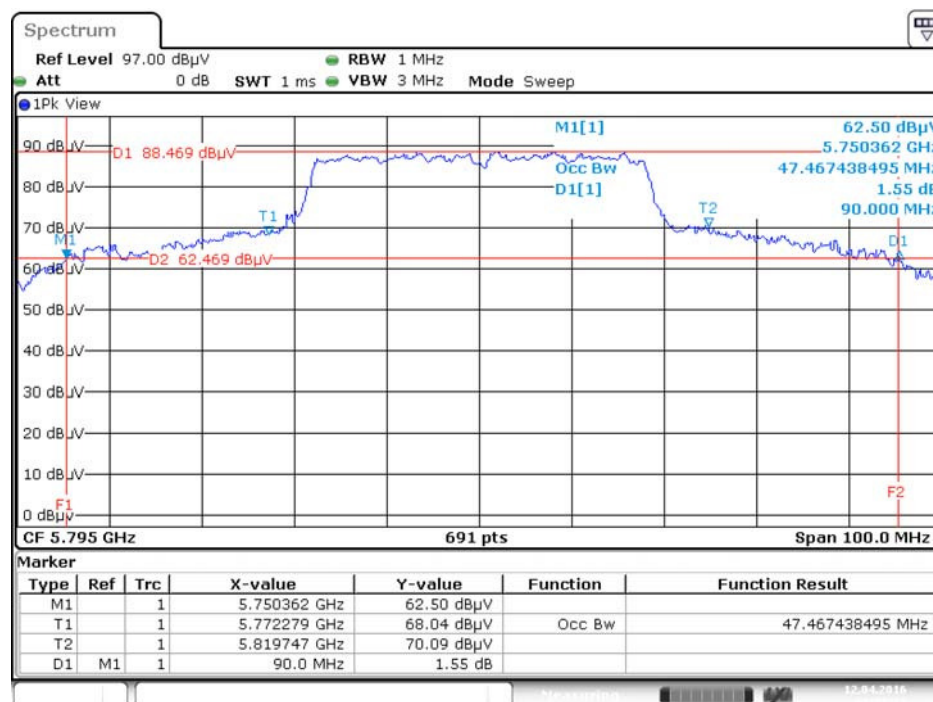

Date: 12.APR.2016 01:57:12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / Chain 1 + Chain 2 / 5775 MHz

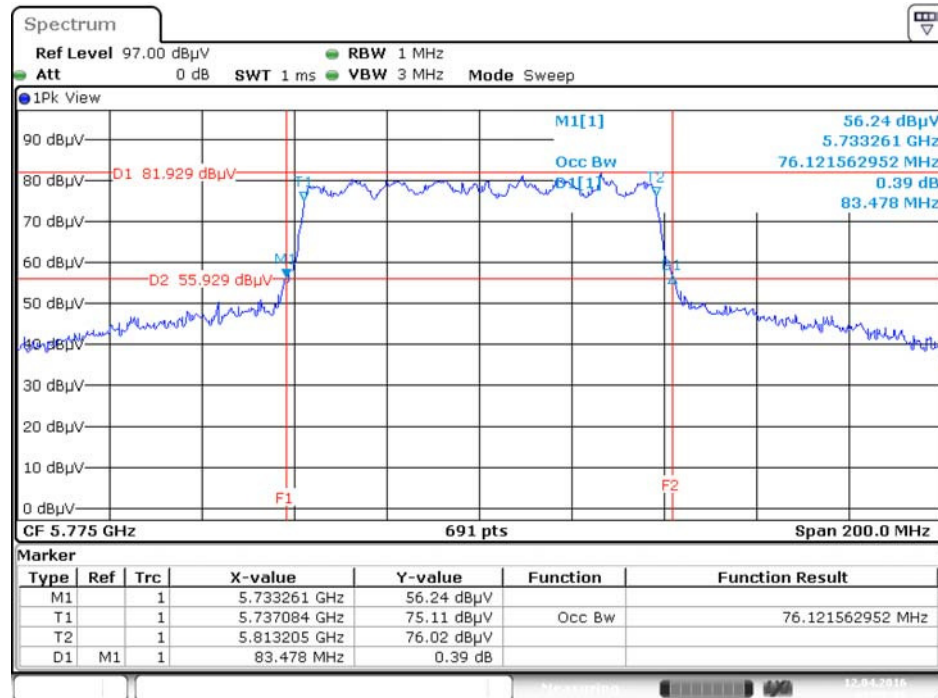

Date: 12.APR.2016 01:58:16

4.2. 6dB Spectrum Bandwidth Measurement

4.2.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.2.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 6dB Spectrum Bandwidth


Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	16.58	500	Complies
	5785 MHz	16.52	500	Complies
	5825 MHz	16.46	500	Complies
802.11ac MCS0/Nss2 VHT20	5745 MHz	17.74	500	Complies
	5785 MHz	17.74	500	Complies
	5825 MHz	17.62	500	Complies
802.11ac MCS0/Nss2 VHT40	5755 MHz	36.29	500	Complies
	5795 MHz	36.41	500	Complies
802.11ac MCS0/Nss2 VHT80	5775 MHz	75.94	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5825 MHz

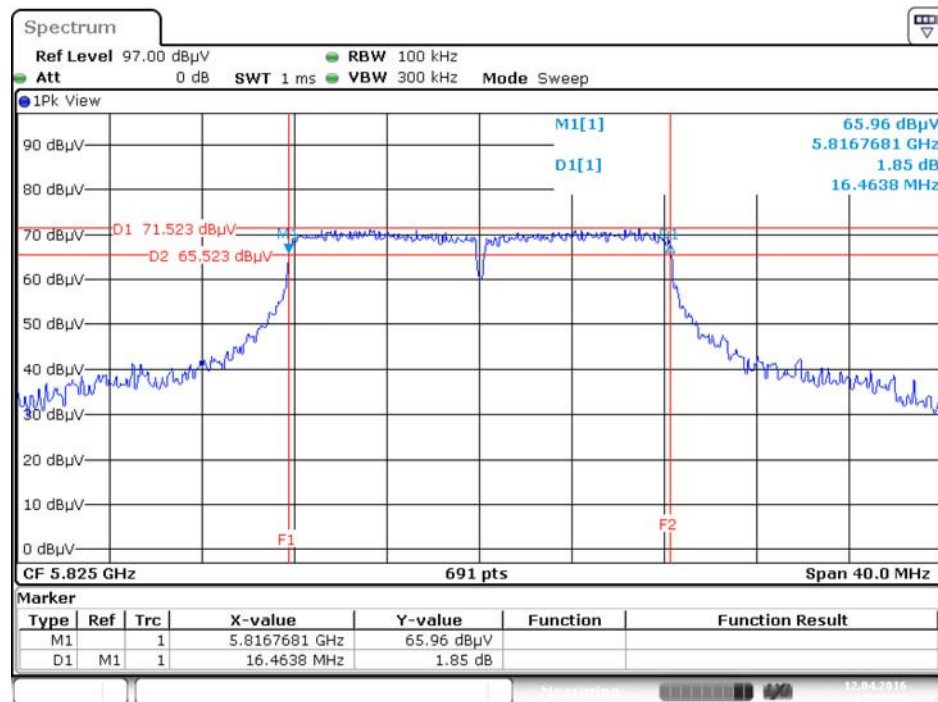


Date: 12.APR.2016 02:03:35

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / Chain 1 + Chain 2 / 5825 MHz

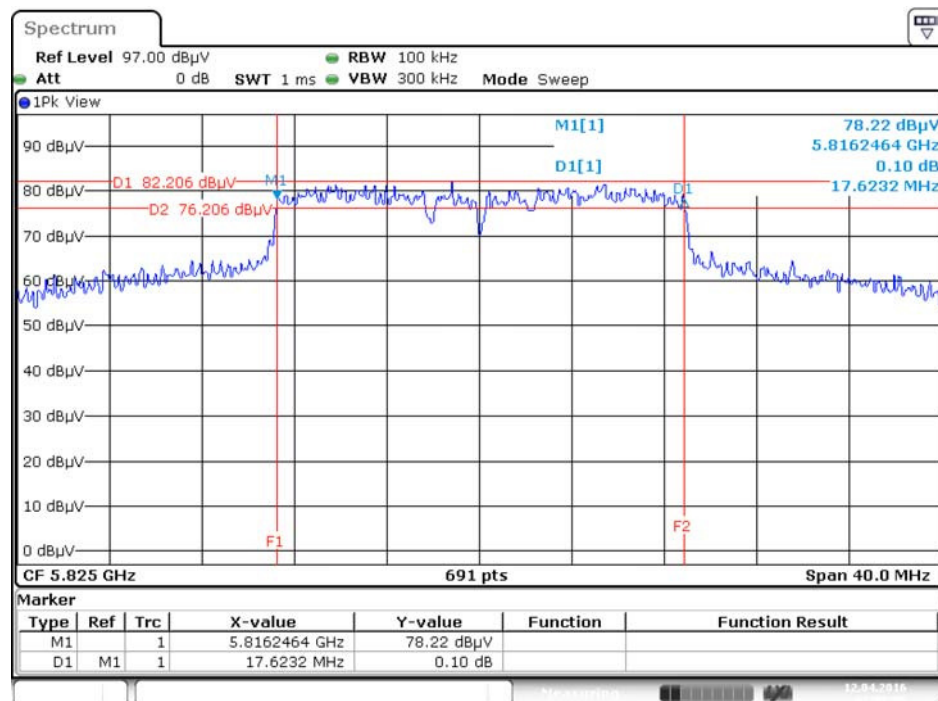


Date: 12.APR.2016 02:02:37

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / Chain 1 + Chain 2 / 5755MHz

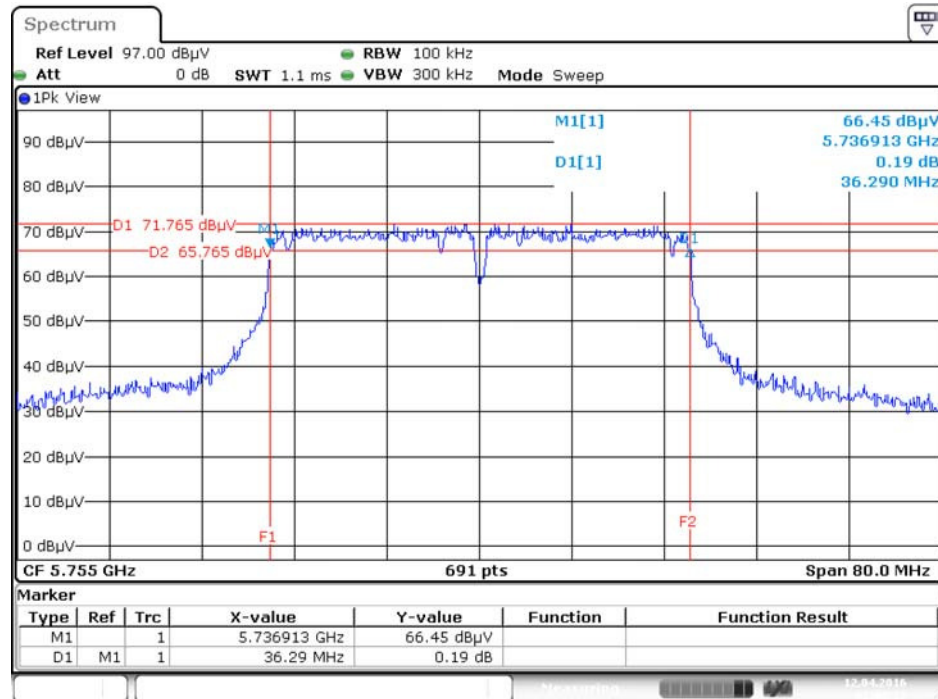

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / Chain 1 + Chain 2 / 5775 MHz

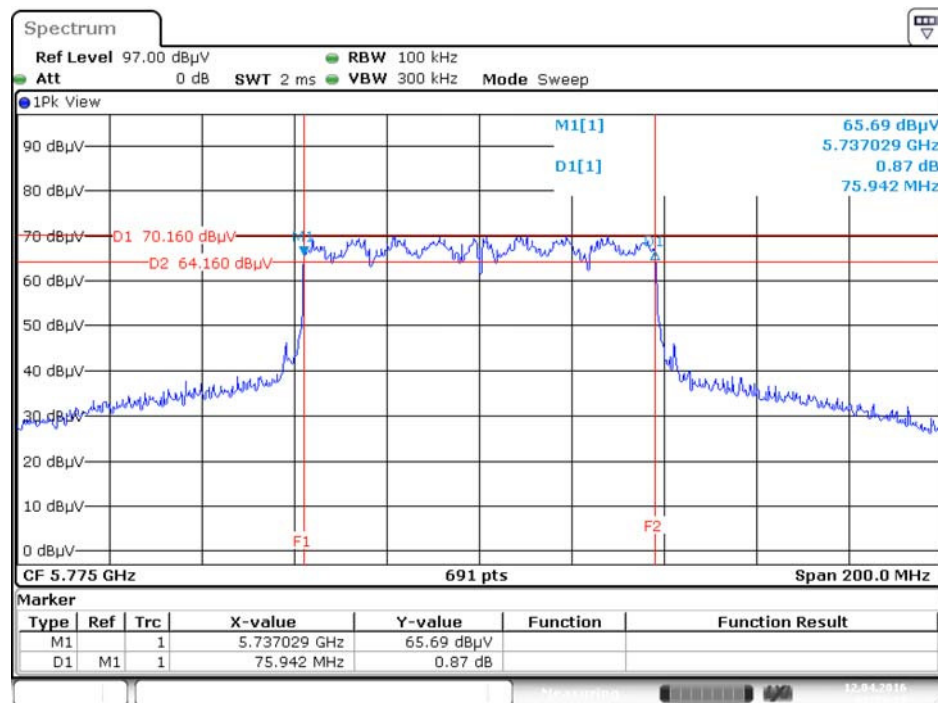

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu	Test Date	Mar. 30, 2016~Apr. 12, 2016

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
802.11a	5745 MHz	-	15.56	15.56	30.00	Complies
	5785 MHz	-	15.79	15.79	30.00	Complies
	5825 MHz	-	15.65	15.65	30.00	Complies
802.11ac MCS0/Nss2 VHT20	5745 MHz	19.32	18.20	21.81	30.00	Complies
	5785 MHz	19.28	18.14	21.76	30.00	Complies
	5825 MHz	19.35	18.30	21.87	30.00	Complies
802.11ac MCS0/Nss2 VHT40	5755 MHz	13.04	13.51	16.29	30.00	Complies
	5795 MHz	18.55	17.61	21.12	30.00	Complies
802.11ac MCS0/Nss2 VHT80	5775 MHz	14.40	14.52	17.47	30.00	Complies

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should ≤ 30 dBm.

4.4.4. Test Setup Layout

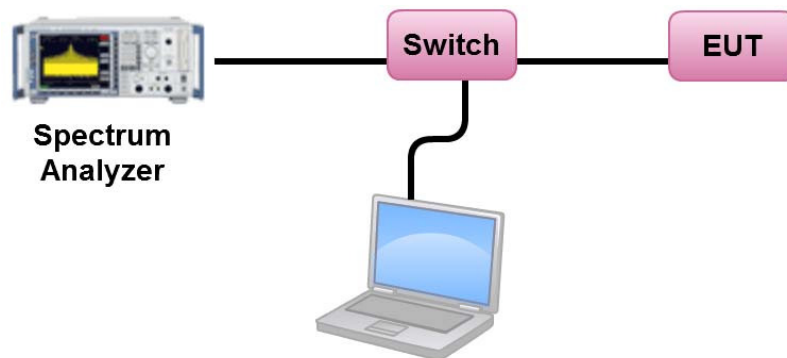

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu		

Configuration IEEE 802.11a / Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	2.48	-3.01	-0.53	30.00	Complies
157	5785 MHz	2.63	-3.01	-0.38	30.00	Complies
165	5825 MHz	2.47	-3.01	-0.54	30.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 4.15\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	8.15	-3.01	5.14	30.00	Complies
157	5785 MHz	8.24	-3.01	5.23	30.00	Complies
165	5825 MHz	8.45	-3.01	5.44	30.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 3.64\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	0.01	-3.01	-3.00	30.00	Complies
159	5795 MHz	4.96	-3.01	1.95	30.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 3.64\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / Chain 1 + Chain 2


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-2.95	-3.01	-5.96	30.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 3.64\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Chain 2 / 5785 MHz

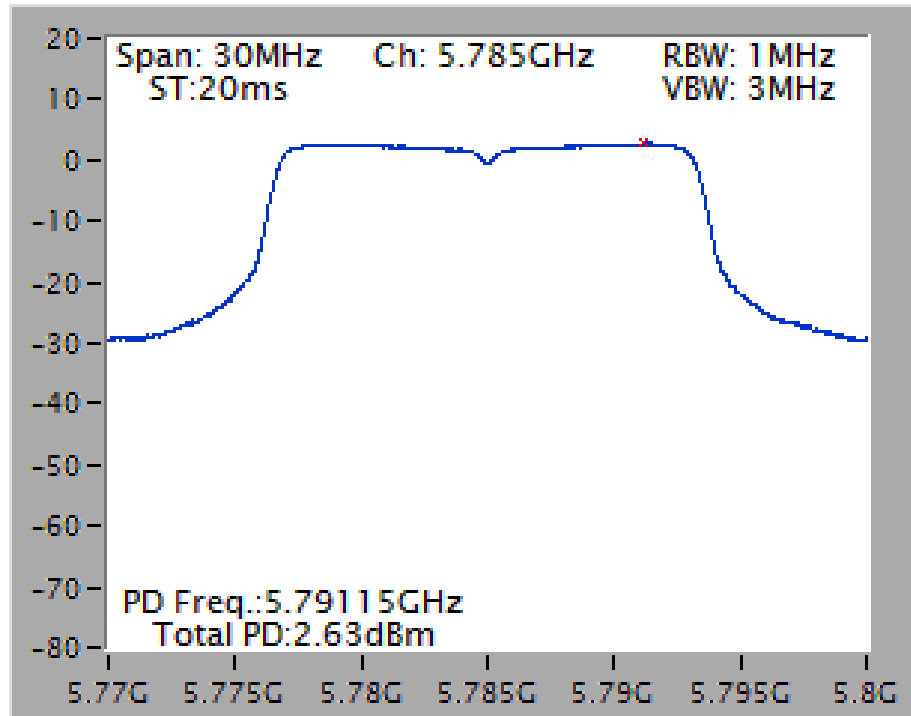


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / Chain 1 + Chain 2 / 5825 MHz

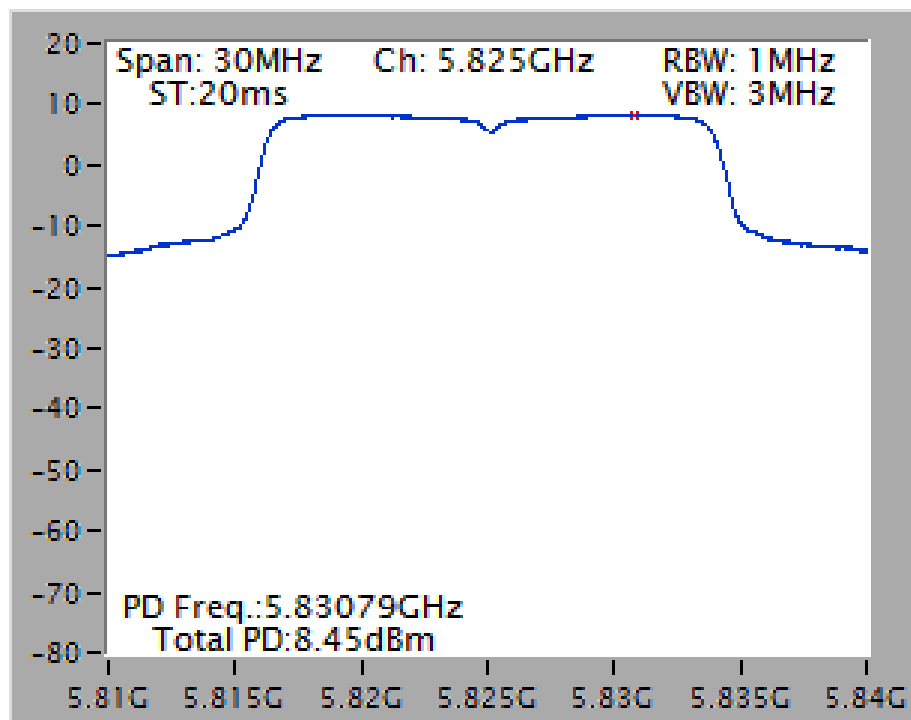

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / Chain 1 + Chain 2 / 5795 MHz

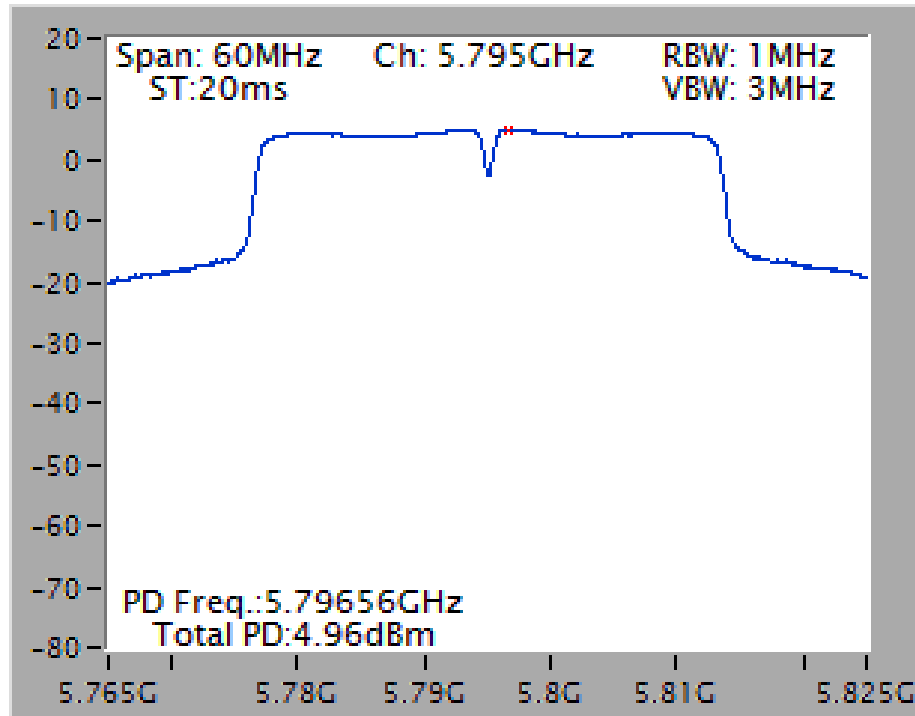

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / Chain 1 + Chain 2 / 5775 MHz

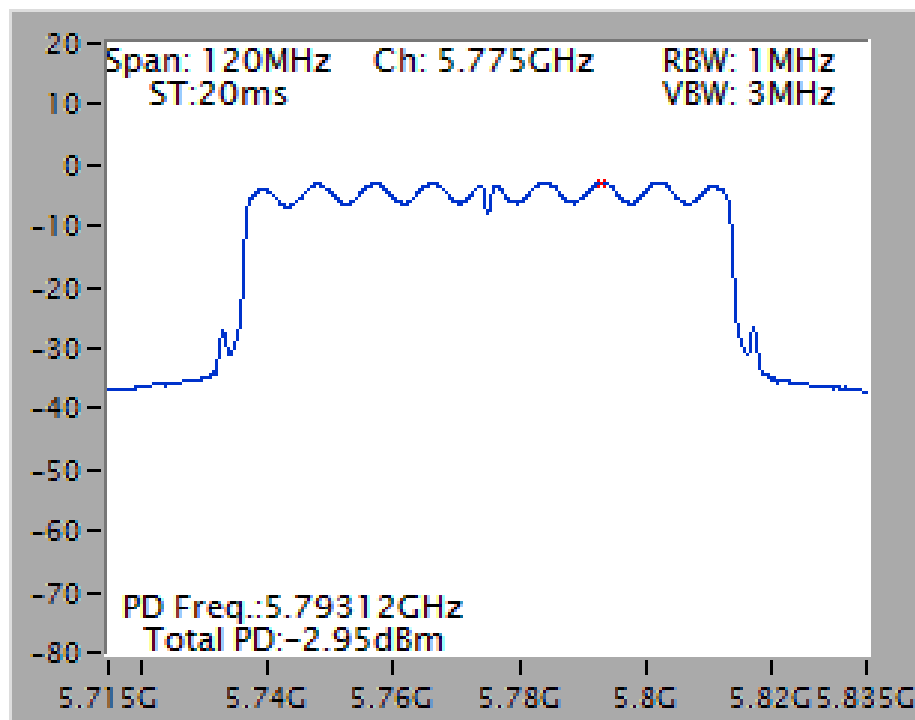

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

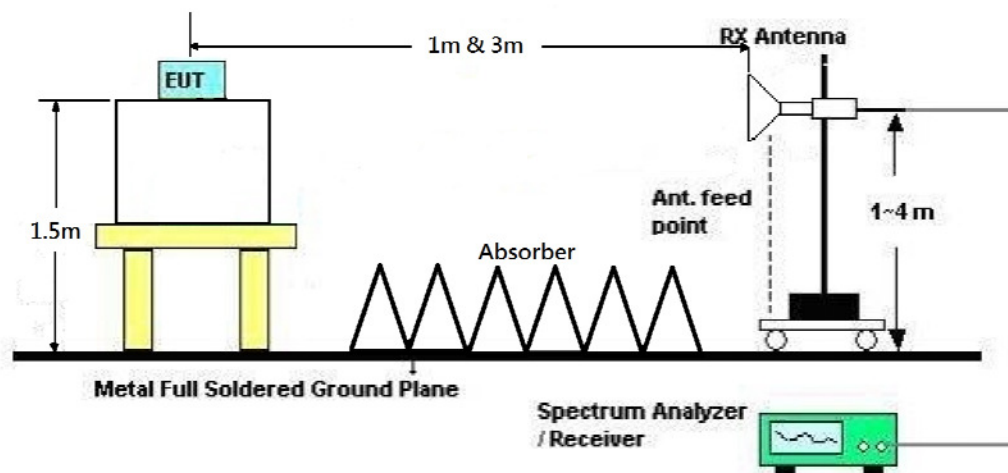

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results for Radiated Emissions (1GHz~40GHz)

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 149 / Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11490.07	44.03	54.00	-9.97	30.53	9.62	38.50	34.62	128	100	Average	HORIZONTAL
2	11490.33	56.40	74.00	-17.60	42.90	9.62	38.50	34.62	128	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11489.71	57.04	74.00	-16.96	43.54	9.62	38.50	34.62	223	107	Peak	VERTICAL
2	11489.99	46.44	54.00	-7.56	32.94	9.62	38.50	34.62	223	107	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 157 / Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11569.88	57.07	74.00	-16.93	43.58	9.61	38.53	34.65	127	100	Peak	HORIZONTAL
2	11570.02	45.45	54.00	-8.55	31.96	9.61	38.53	34.65	127	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11570.08	47.44	54.00	-6.56	33.95	9.61	38.53	34.65	222	114	Average	VERTICAL
2	11570.23	57.78	74.00	-16.22	44.29	9.61	38.53	34.65	222	114	Peak	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 165 / Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.85	57.63	74.00	-16.37	44.16	9.60	38.55	34.68	141	100	Peak	HORIZONTAL
2	11649.98	45.35	54.00	-8.65	31.88	9.60	38.55	34.68	141	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11650.04	58.44	74.00	-15.56	44.97	9.60	38.55	34.68	224	115	Peak	VERTICAL
2	11650.12	46.89	54.00	-7.11	33.42	9.60	38.55	34.68	224	115	Average	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT20 CH 149 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11490.23	44.89	54.00	-9.11	31.39	9.62	38.50	34.62	86	110 Average	HORIZONTAL
2	11490.48	56.32	74.00	-17.68	42.82	9.62	38.50	34.62	86	110 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11490.38	46.70	54.00	-7.30	33.20	9.62	38.50	34.62	224	112 Average	VERTICAL
2	11490.42	57.28	74.00	-16.72	43.78	9.62	38.50	34.62	224	112 Peak	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT20 CH 157 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11570.62	47.56	54.00	-6.44	34.07	9.61	38.53	34.65	89	117 Average	HORIZONTAL
2	11571.12	57.81	74.00	-16.19	44.32	9.61	38.53	34.65	89	117 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11570.42	47.36	54.00	-6.64	33.87	9.61	38.53	34.65	223	107 Average	VERTICAL
2	11570.46	59.14	74.00	-14.86	45.65	9.61	38.53	34.65	223	107 Peak	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT20 CH 165 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11650.60	46.50	54.00	-7.50	33.03	9.60	38.55	34.68	105	100	Average	HORIZONTAL
2	11650.70	58.39	74.00	-15.61	44.92	9.60	38.55	34.68	105	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11650.57	45.24	54.00	-8.76	31.77	9.60	38.55	34.68	339	100	Average	VERTICAL
2	11650.65	57.36	74.00	-16.64	43.89	9.60	38.55	34.68	339	100	Peak	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT40 CH 151 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11506.06	45.27	54.00	-8.73	24.62	14.82	39.20	33.37	194	78	Average	HORIZONTAL
2	11511.28	58.09	74.00	-15.91	37.45	14.82	39.20	33.38	194	78	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11506.28	44.96	54.00	-9.04	24.31	14.82	39.20	33.37	221	157	Average	VERTICAL
2	11510.64	58.32	74.00	-15.68	37.68	14.82	39.20	33.38	221	157	Peak	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT40 CH 159 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11590.12	56.02	74.00	-17.98	42.54	9.60	38.54	34.66	290	100	Peak	HORIZONTAL
2	11590.55	43.11	54.00	-10.89	29.63	9.60	38.54	34.66	290	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11587.89	43.43	54.00	-10.57	29.95	9.60	38.54	34.66	329	100	Average	VERTICAL
2	11590.38	56.51	74.00	-17.49	43.03	9.60	38.54	34.66	329	100	Peak	VERTICAL

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT80 CH 155 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11548.76	56.11	74.00	-17.89	42.64	9.61	38.51	34.65	225	100	Peak	HORIZONTAL
2	11551.86	43.08	54.00	-10.92	29.59	9.61	38.53	34.65	225	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11548.59	56.86	74.00	-17.14	43.39	9.61	38.51	34.65	253	100	Peak	VERTICAL
2	11550.51	42.86	54.00	-11.14	29.37	9.61	38.53	34.65	253	100	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

The test procedure is the same as section 4.5.3.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 149, 157, 165 / Chain 2
Test Date	Mar. 28, 2016		

Channel 149

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5712.40	67.07	68.20	-1.13	59.25	7.88	34.45	34.51	45	103	Peak	HORIZONTAL
2	5725.00	76.43	78.20	-1.77	68.57	7.87	34.50	34.51	45	103	Peak	HORIZONTAL
3	5738.60	110.14			102.29	7.87	34.50	34.52	45	103	Peak	HORIZONTAL
4	5751.40	100.77			92.88	7.86	34.55	34.52	45	103	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5714.20	64.25	68.20	-3.95	56.43	7.88	34.45	34.51	44	102	Peak	HORIZONTAL
2	5715.80	65.04	78.20	-13.16	57.22	7.88	34.45	34.51	44	102	Peak	HORIZONTAL
3	5777.80	114.87			106.91	7.84	34.65	34.53	44	102	Peak	HORIZONTAL
4	5779.80	104.63			96.67	7.84	34.65	34.53	44	102	Average	HORIZONTAL
5	5850.00	61.67	78.20	-16.53	53.56	7.80	34.85	34.54	44	102	Peak	HORIZONTAL
6	5868.20	62.19	68.20	-6.01	54.04	7.79	34.90	34.54	44	102	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5818.60	112.43			104.39	7.82	34.75	34.53	45	100	Peak	HORIZONTAL
2	5819.80	102.35			94.31	7.82	34.75	34.53	45	100	Average	HORIZONTAL
3	5850.80	75.58	78.20	-2.62	67.47	7.80	34.85	34.54	45	100	Peak	HORIZONTAL
4	5860.20	67.11	68.20	-1.09	58.96	7.79	34.90	34.54	45	100	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT20 CH 149, 157, 165 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5712.60	66.97	68.20	-1.23	59.15	7.88	34.45	34.51	42	102 Peak	HORIZONTAL
2	5725.00	77.05	78.20	-1.15	69.19	7.87	34.50	34.51	42	102 Peak	HORIZONTAL
3	5738.40	112.14			104.29	7.87	34.50	34.52	42	102 Peak	HORIZONTAL
4	5738.60	101.31			93.46	7.87	34.50	34.52	42	102 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5706.20	62.27	68.20	-5.93	54.45	7.88	34.45	34.51	42	100 Peak	HORIZONTAL
2	5725.00	62.90	78.20	-15.30	55.04	7.87	34.50	34.51	42	100 Peak	HORIZONTAL
3	5779.40	115.40			107.44	7.84	34.65	34.53	42	100 Peak	HORIZONTAL
4	5787.40	103.55			95.59	7.84	34.65	34.53	42	100 Average	HORIZONTAL
5	5859.00	62.59	78.20	-15.61	54.44	7.79	34.90	34.54	42	100 Peak	HORIZONTAL
6	5861.40	62.44	68.20	-5.76	54.29	7.79	34.90	34.54	42	100 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5820.80	111.60			103.56	7.82	34.75	34.53	47	100 Peak	HORIZONTAL
2	5827.40	101.07			93.00	7.81	34.80	34.54	47	100 Average	HORIZONTAL
3	5850.00	77.15	78.20	-1.05	69.04	7.80	34.85	34.54	47	100 Peak	HORIZONTAL
4	5860.00	65.20	68.20	-3.00	57.05	7.79	34.90	34.54	47	100 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT40 CH 151, 159 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Channel 151

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5714.20	67.18	68.20	-1.02	55.10	10.78	34.43	33.13	118	273	Peak	HORIZONTAL
2	5725.00	66.88	78.20	-11.32	54.80	10.77	34.44	33.13	118	273	Peak	HORIZONTAL
3	5740.60	92.06			79.99	10.76	34.45	33.14	118	273	Average	HORIZONTAL
4	5741.40	103.83			91.76	10.76	34.45	33.14	118	273	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5713.40	63.16	74.00	-10.84	55.34	7.88	34.45	34.51	48	102	Peak	HORIZONTAL
2	5715.00	51.64	54.00	-2.36	43.82	7.88	34.45	34.51	48	102	Average	HORIZONTAL
3	5721.20	66.36	78.20	-11.84	58.54	7.88	34.45	34.51	48	102	Peak	HORIZONTAL
4	5790.80	109.72			101.72	7.83	34.70	34.53	48	102	Peak	HORIZONTAL
5	5792.00	100.17			92.17	7.83	34.70	34.53	48	102	Average	HORIZONTAL
6	5853.80	67.01	78.20	-11.19	58.90	7.80	34.85	34.54	48	102	Peak	HORIZONTAL
7	5860.00	52.46	54.00	-1.54	44.31	7.79	34.90	34.54	48	102	Average	HORIZONTAL
8	5860.40	64.99	74.00	-9.01	56.84	7.79	34.90	34.54	48	102	Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5795 MHz.

Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss2 VHT80 CH 155 / Chain 1 + Chain 2
Test Date	Mar. 28, 2016		

Channel 155

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5714.00	67.05	68.20	-1.15	59.23	7.88	34.45	34.51	46	102	Peak	HORIZONTAL
2	5724.00	68.17	78.20	-10.03	60.31	7.87	34.50	34.51	46	102	Peak	HORIZONTAL
3	5748.00	90.08			82.19	7.86	34.55	34.52	46	102	Average	HORIZONTAL
4	5785.00	100.32			92.36	7.84	34.65	34.53	46	102	Peak	HORIZONTAL
5	5852.00	63.07	78.20	-15.13	54.96	7.80	34.85	34.54	46	102	Peak	HORIZONTAL
6	5864.00	62.02	68.20	-6.18	53.87	7.79	34.90	34.54	46	102	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $0^\circ\text{C} \sim 55^\circ\text{C}$.

4.7.4. Test Setup Layout

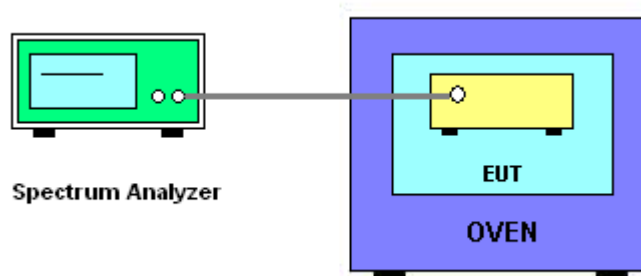

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu	Test Date	Mar. 30, 2016

Mode: 20 MHz / Chain 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9924	5784.9921	5784.9917	5784.9910
110.00	5784.9922	5784.9921	5784.9913	5784.9909
93.50	5784.9917	5784.9907	5784.9902	5784.9893
Max. Deviation (MHz)	0.0083	0.0093	0.0098	0.0107
Max. Deviation (ppm)	1.43	1.61	1.69	1.85
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5785.0022	5785.0010	5784.9994	5784.9975
10	5785.0008	5784.9996	5784.9977	5784.9955
20	5784.9995	5784.9982	5784.9967	5784.9949
30	5784.9983	5784.9970	5784.9954	5784.9935
40	5784.9969	5784.9958	5784.9944	5784.9928
50	5784.9953	5784.9938	5784.9922	5784.9902
55	5784.9936	5784.9924	5784.9909	5784.9882
Max. Deviation (MHz)	0.0064	0.0076	0.0091	0.0118
Max. Deviation (ppm)	1.11	1.31	1.57	2.04
Result	Complies			

Mode: 40 MHz / Chain 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9932	5754.9923	5754.9913	5754.9904
110.00	5754.9929	5754.9924	5754.9922	5754.9920
93.50	5754.9922	5754.9916	5754.9914	5754.9909
Max. Deviation (MHz)	0.0078	0.0084	0.0087	0.0096
Max. Deviation (ppm)	1.36	1.46	1.51	1.67
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5755.0036	5755.0024	5755.0008	5754.9989
10	5755.0022	5755.0010	5754.9991	5754.9969
20	5755.0009	5754.9996	5754.9981	5754.9963
30	5754.9997	5754.9984	5754.9968	5754.9949
40	5754.9983	5754.9972	5754.9958	5754.9942
50	5754.9967	5754.9952	5754.9936	5754.9916
55	5754.9950	5754.9938	5754.9923	5754.9896
Max. Deviation (MHz)	0.0067	0.0062	0.0077	0.0104
Max. Deviation (ppm)	1.16	1.08	1.34	1.81
Result	Complies			

Mode: 80 MHz / Chain 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5774.9941	5774.9931	5774.9927	5774.9923
110.00	5774.9936	5774.9928	5774.9926	5774.9916
93.50	5774.9933	5774.9929	5774.9924	5774.9916
Max. Deviation (MHz)	0.0067	0.0072	0.0076	0.0084
Max. Deviation (ppm)	1.16	1.25	1.32	1.45
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5775.0004	5774.9992	5774.9976	5774.9957
10	5774.9990	5774.9978	5774.9959	5774.9937
20	5774.9977	5774.9964	5774.9949	5774.9931
30	5774.9965	5774.9952	5774.9936	5774.9917
40	5774.9951	5774.9940	5774.9926	5774.9910
50	5774.9935	5774.9920	5774.9904	5774.9884
55	5774.9918	5774.9906	5774.9891	5774.9864
Max. Deviation (MHz)	0.0082	0.0094	0.0109	0.0136
Max. Deviation (ppm)	1.42	1.63	1.89	2.35
Result	Complies			

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%