

FCC TEST REPORT

Client Name : Seeed Technology Co., Ltd.
Address : 9F, G3 Building, TCL International E City,
Zhongshanyuan Road, Nanshan District, Shenzhen,
China 518055
Product Name : WM1302 LoRaWAN Gateway Module(SPI) - US915
Date : Jan. 13, 2022

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Antenna Requirement.....	28
5.1. Test Standard and Requirement.....	28
5.2. Antenna Connected Construction.....	28
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	29
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	29
APPENDIX III -- INTERNAL PHOTOGRAPH.....	29



TEST REPORT

Applicant : Seeed Technology Co., Ltd.
Manufacturer : Seeed Technology Co., Ltd.
Product Name : WM1302 LoRaWAN Gateway Module(SPI) - US915
Model No. : WM1302-SPI-US915-M
Trade Mark : Seeed Studio
Rating(s) : Input: DC 3.3V/420mA

Test Standard(s) : FCC Part15 Subpart C, Section 15.247

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.


Date of receipt

Dec. 24, 2021

Date of Test

Dec. 24, 2021~Jan. 10, 2022

Prepared by



(TuTu Hong)

Approved & Authorized Signer



(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Seeed Technology Co., Ltd.
Address	:	9F, G3 Building, TCL International E City, Zhongshanyuan Road, Nanshan District, Shenzhen, China 518055
Manufacturer	:	Seeed Technology Co., Ltd.
Address	:	9F, G3 Building, TCL International E City, Zhongshanyuan Road, Nanshan District, Shenzhen, China 518055
Factory	:	Shenzhen Xinxian Technology Co., Ltd
Address	:	F5, Building B17, Hengfeng Industrial City, No. 739 Zhoushi Rd, Baoan District, Shenzhen, Guangdong, P.R.C.

1.2. Description of Device (EUT)

Product Name	:	WM1302 LoRaWAN Gateway Module(SPI) - US915	
Model No.	:	WM1302-SPI-US915-M	
Trade Mark	:	Seeed Studio	
Test Power Supply	:	DC 3.3V by Debug board	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	902~928MHz
		Number of Channel:	DTS: 16 Channels FHSS: 64 Channels
		Modulation Type:	LoRa Chirp Spread Spectrum
		Antenna Type:	Cylindrical antenna
		Antenna Gain(Peak):	ANT1: 2.6dBi(Provide by customer) ANT2: 3 dBi(Provide by customer)
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report for FHSS only.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: SAW12-050-2100UB Input: 100-240V~ 50/60Hz, 0.3A Output: DC 5V, 2100mA
---------	---	--

1.4. Description of Test Modes



The system was configured for testing in testing mode, which was provided by manufacturer.

For LoRa mode, Detailed Frequency as below:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.3	23	906.7	45	911.1
2	902.5	24	906.9	46	911.3
3	902.7	25	907.1	47	911.5
4	902.9	26	907.3	48	911.7
5	903.1	27	907.5	49	911.9
6	903.3	28	907.7	50	912.1
7	903.5	29	907.9	51	912.3
8	903.7	30	908.1	52	912.5
9	903.9	31	908.3	53	912.7
10	904.1	32	908.5	54	912.9
11	904.3	33	908.7	55	913.1
12	904.5	34	908.9	56	913.3
13	904.7	35	909.1	57	913.5
14	904.9	36	909.3	58	913.7
15	905.1	37	909.5	59	913.9
16	905.3	38	909.7	60	914.1
17	905.5	39	909.9	61	914.3
18	905.7	40	910.1	62	914.5
19	905.9	41	910.3	63	914.7
20	906.1	42	910.5	64	914.9
21	906.3	43	910.7	-	-
22	906.5	44	910.9	-	-

Note: 1. Note: EUT was tested with Channel 1, 32 and 64.

1.6. Description Of Test Setup

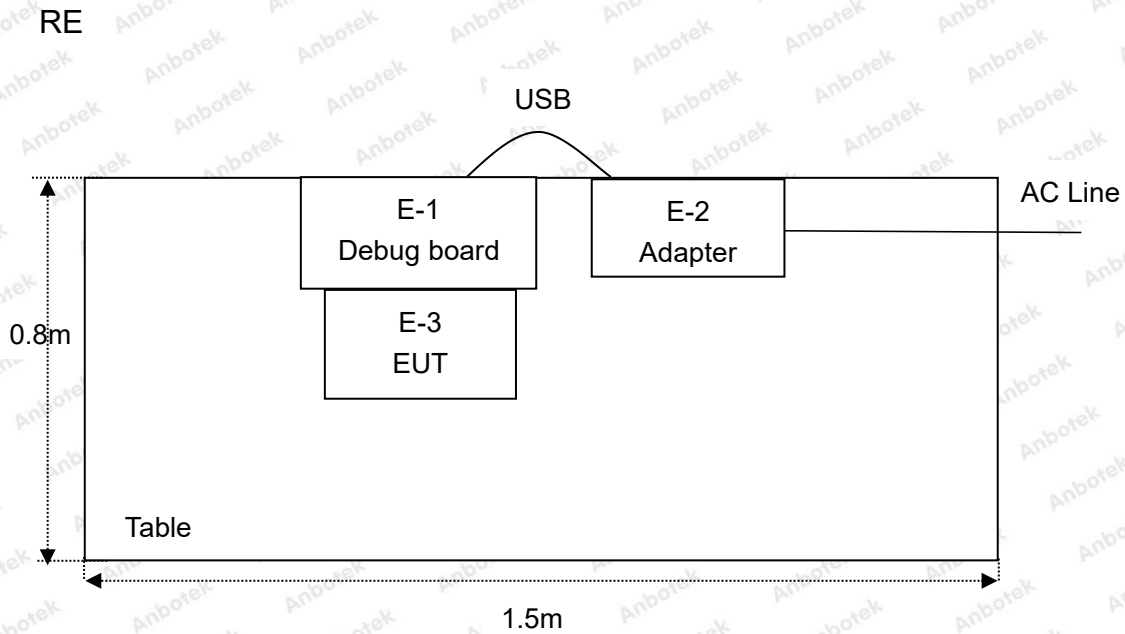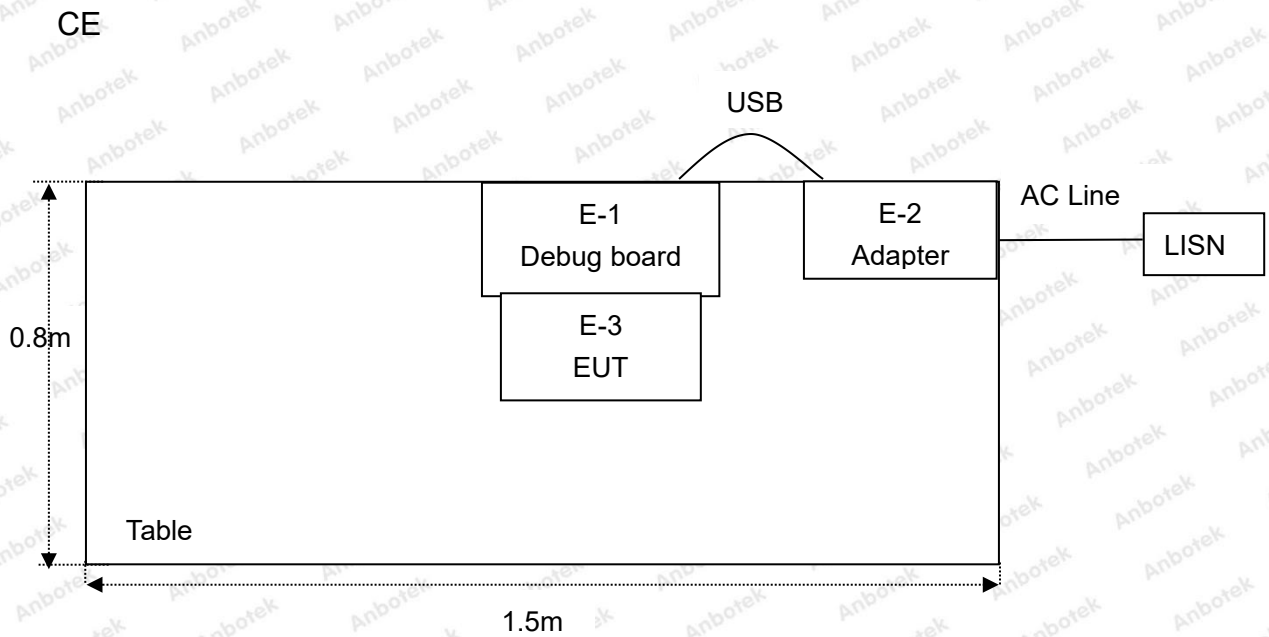

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

Remark: This is a Class II application of the device, the difference between the original device and current one described as following:

- (1) Deleting components related to SX1262 on main board which have not activated on function.
- (2) Added a Cylindrical antenna(2.6dBi).
- (3) Changed the model from "WM1302-SPI-US915" to "WM1302-SPI-US915-M"

Based on the change made to the device, the Spurious Emissions test items were performed.




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

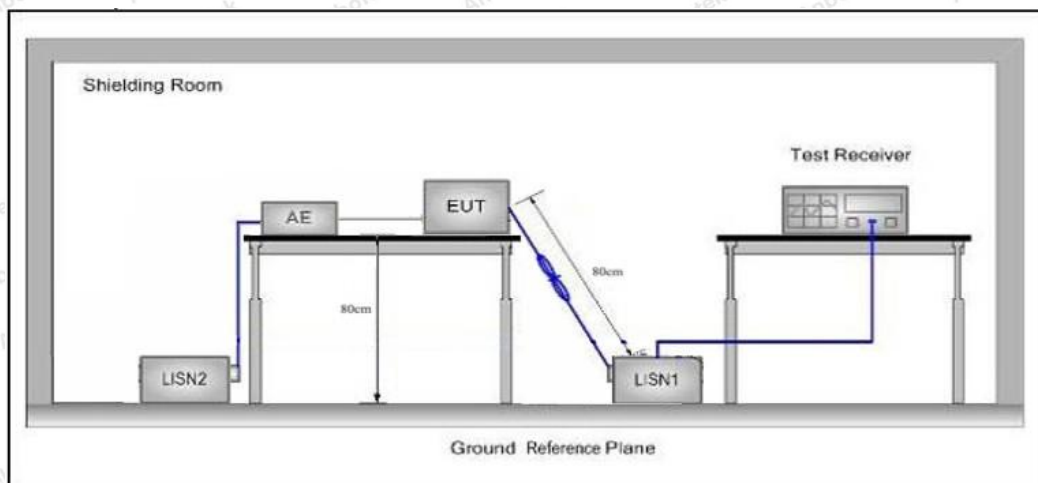

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data


During the test, pre-scan all the modes, and found CH01 (TX) which is the worst case, only the worst case is recorded in the report.

Please to see the following pages.

ANT 1:


Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: CH01
Test Specification: AC 120V, 60Hz
Comment: Live Line
Tem.: 22.4°C Hum.: 53%

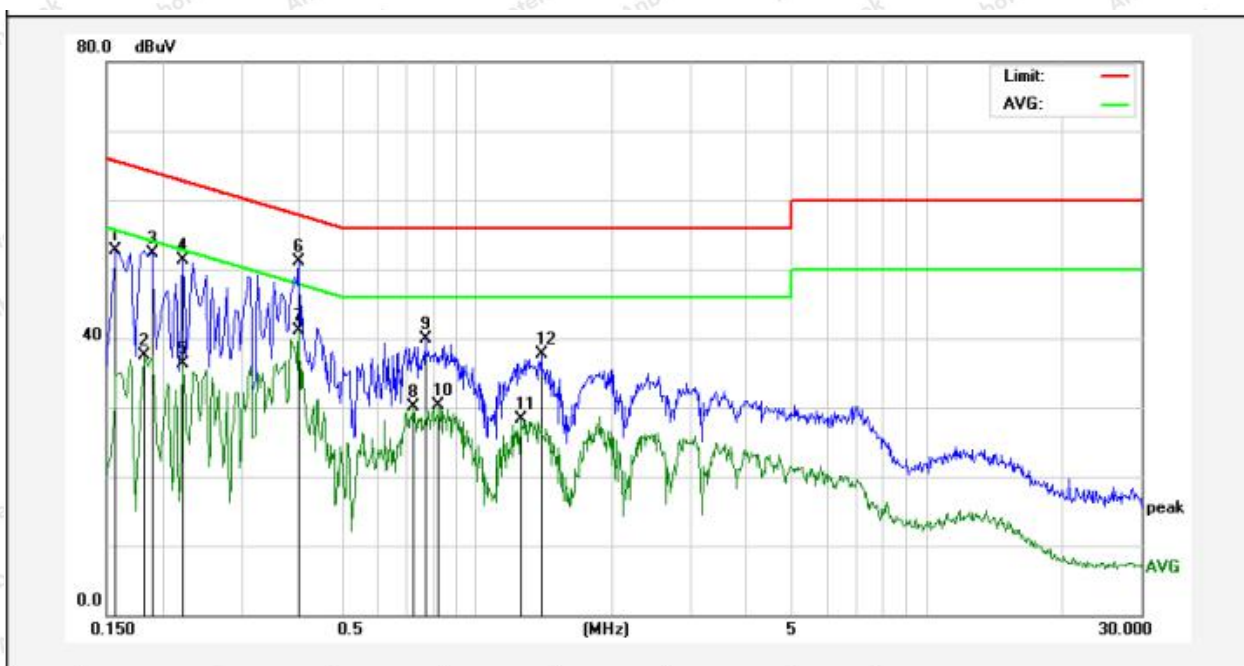

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	52.53	0.12	52.65	65.56	-12.91	QP	
2	0.1819	37.38	0.12	37.50	54.39	-16.89	AVG	
3	0.1900	52.27	0.12	52.39	64.03	-11.64	QP	
4	0.2220	51.16	0.12	51.28	62.74	-11.46	QP	
5	0.2220	36.17	0.12	36.29	52.74	-16.45	AVG	
6	0.4020	51.07	0.11	51.18	57.81	-6.63	QP	
7	0.4020	41.01	0.11	41.12	47.81	-6.69	AVG	
8	0.7220	29.92	0.15	30.07	46.00	-15.93	AVG	
9	0.7700	39.75	0.15	39.90	56.00	-16.10	QP	
10	0.8220	30.14	0.15	30.29	46.00	-15.71	AVG	
11	1.2500	28.12	0.14	28.26	46.00	-17.74	AVG	
12	1.3940	37.59	0.14	37.73	56.00	-18.27	QP	

Test Site: 1# Shielded Room
Operating Condition: CH01
Test Specification: AC 120V, 60Hz
Comment: Neutral Line
Tem.: 22.4°C Hum.: 53%

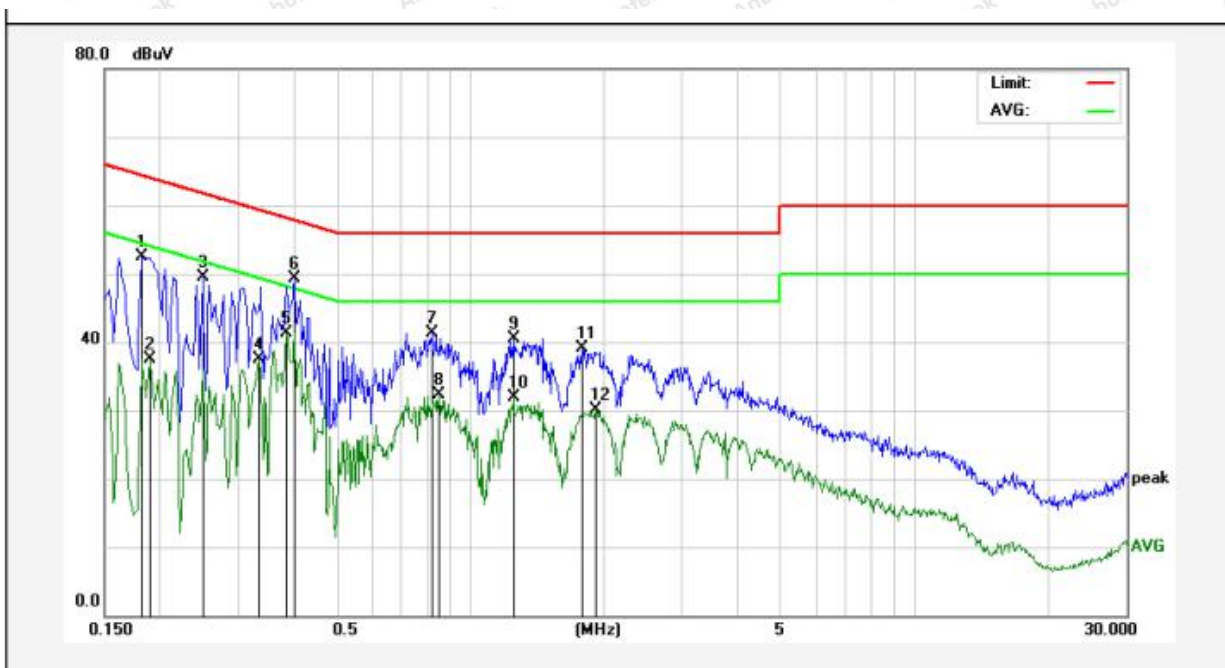


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1819	52.32	0.12	52.44	64.39	-11.95	QP	
2	0.1900	37.45	0.12	37.57	54.03	-16.46	AVG	
3	0.2500	49.32	0.12	49.44	61.75	-12.31	QP	
4	0.3339	37.35	0.12	37.47	49.35	-11.88	AVG	
5	0.3860	41.12	0.11	41.23	48.15	-6.92	AVG	
6	0.4020	49.26	0.11	49.37	57.81	-8.44	QP	
7	0.8180	41.08	0.15	41.23	56.00	-14.77	QP	
8	0.8500	32.18	0.15	32.33	46.00	-13.67	AVG	
9	1.2500	40.42	0.14	40.56	56.00	-15.44	QP	
10	1.2500	31.78	0.14	31.92	46.00	-14.08	AVG	
11	1.7820	39.04	0.13	39.17	56.00	-16.83	QP	
12	1.9100	30.05	0.12	30.17	46.00	-15.83	AVG	

Note: The EUT received input Voltage DC 3.3V from Debug board, and the Debug board received AC 120V/60Hz from Adapter.


ANT 2:**Conducted Emission Test Data**

Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 120V, 60Hz
 Comment: Live Line
 Tem.: 22.4°C Hum.: 53%

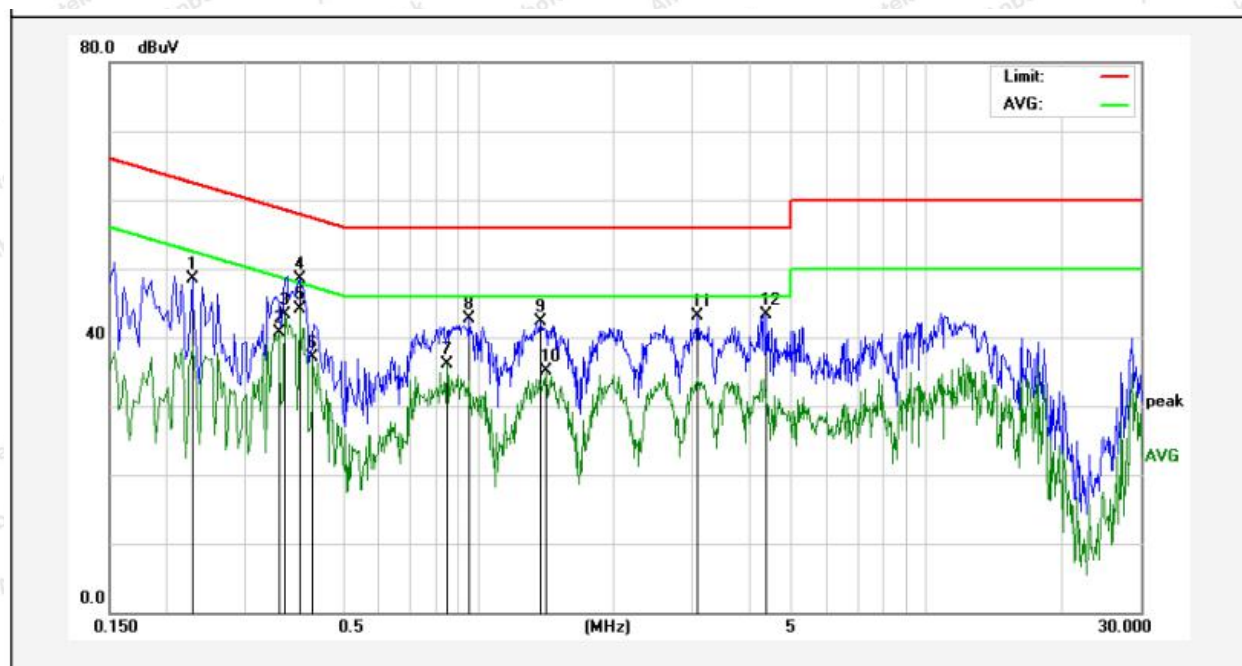

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2300	48.30	0.12	48.42	62.45	-14.03	QP	
2	0.3580	40.57	0.12	40.69	48.77	-8.08	AVG	
3	0.3700	43.19	0.12	43.31	48.50	-5.19	AVG	
4	0.3980	48.48	0.11	48.59	57.89	-9.30	QP	
5	0.3980	44.04	0.11	44.15	47.89	-3.74	AVG	
6	0.4260	36.94	0.12	37.06	47.33	-10.27	AVG	
7	0.8500	35.96	0.15	36.11	46.00	-9.89	AVG	
8	0.9580	42.55	0.15	42.70	56.00	-13.30	QP	
9	1.3740	42.10	0.14	42.24	56.00	-13.76	QP	
10	1.4180	34.97	0.14	35.11	46.00	-10.89	AVG	
11	3.0820	42.94	0.12	43.06	56.00	-12.94	QP	
12	4.3859	43.22	0.11	43.33	56.00	-12.67	QP	

Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 120V, 60Hz
 Comment: Neutral Line
 Tem.: 22.4℃ Hum.: 53%

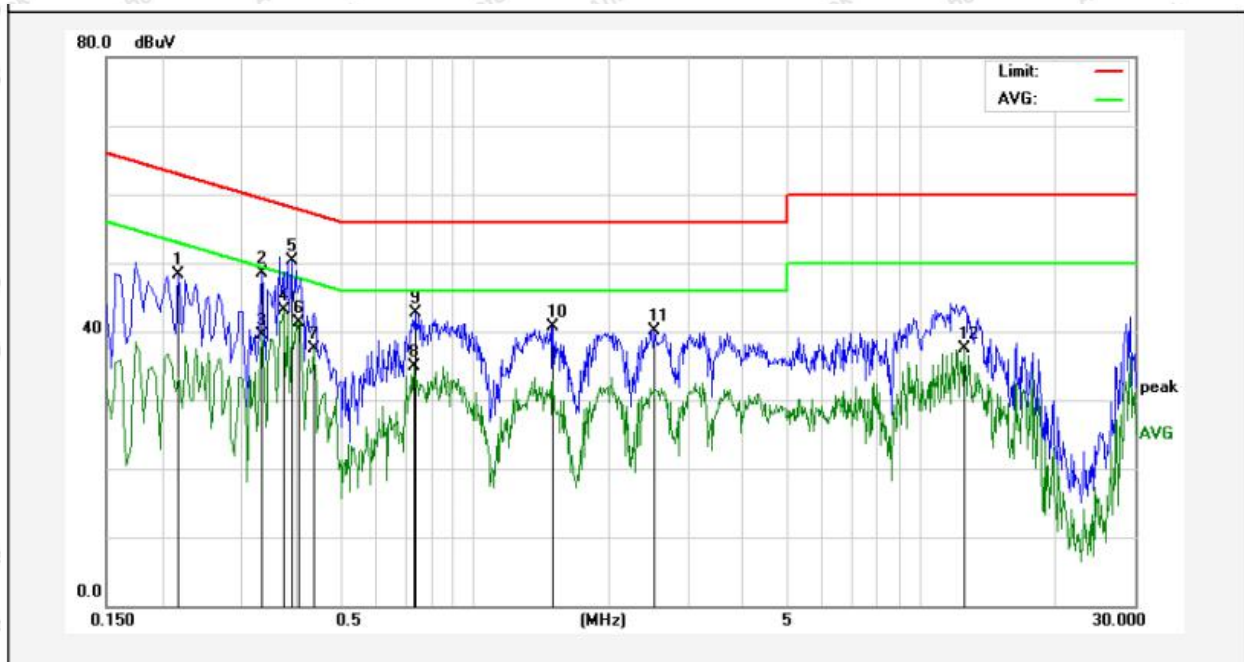

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2180	48.16	0.12	48.28	62.89	-14.61	QP	
2	0.3339	48.36	0.12	48.48	59.35	-10.87	QP	
3	0.3339	39.30	0.12	39.42	49.35	-9.93	AVG	
4	0.3740	43.01	0.12	43.13	48.41	-5.28	AVG	
5	0.3899	50.25	0.11	50.36	58.06	-7.70	QP	
6	0.4060	41.24	0.11	41.35	47.73	-6.38	AVG	
7	0.4380	37.41	0.13	37.54	47.10	-9.56	AVG	
8	0.7340	34.76	0.15	34.91	46.00	-11.09	AVG	
9	0.7380	42.52	0.15	42.67	56.00	-13.33	QP	
10	1.5020	40.52	0.13	40.65	56.00	-15.35	QP	
11	2.5340	39.97	0.12	40.09	56.00	-15.91	QP	
12	12.5100	37.34	0.15	37.49	50.00	-12.51	AVG	

Note: The EUT received input Voltage DC 3.3V from Debug board, and the Debug board received AC 120V/60Hz from Adapter.

4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

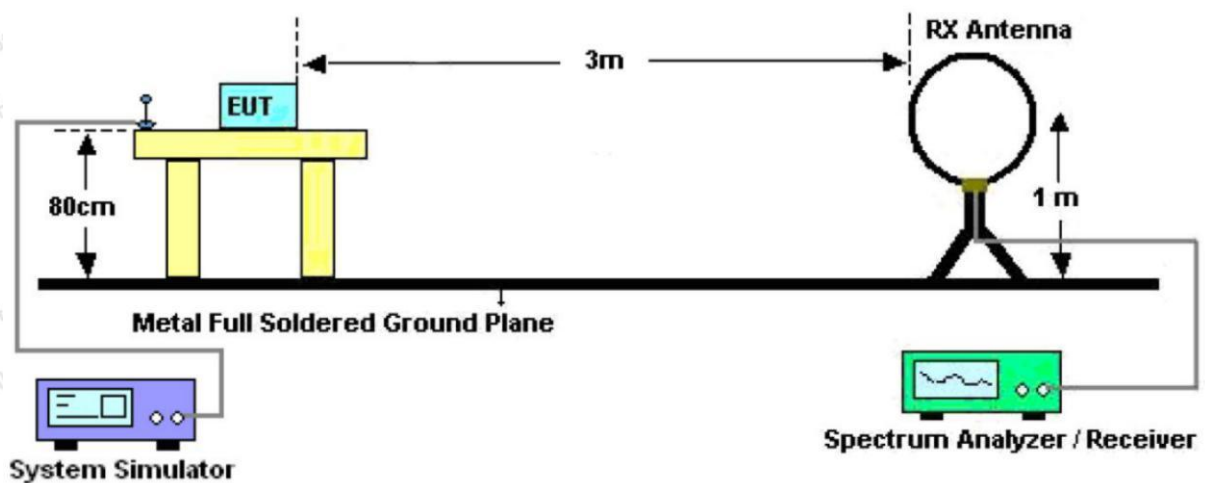


Figure 1. Below 30MHz

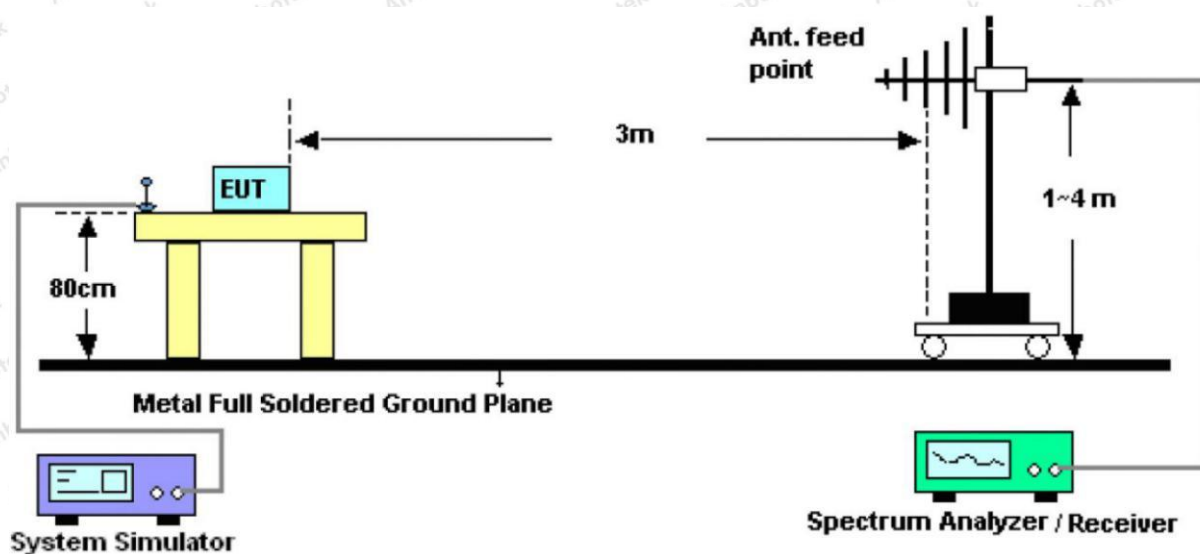


Figure 2. 30MHz to 1GHz

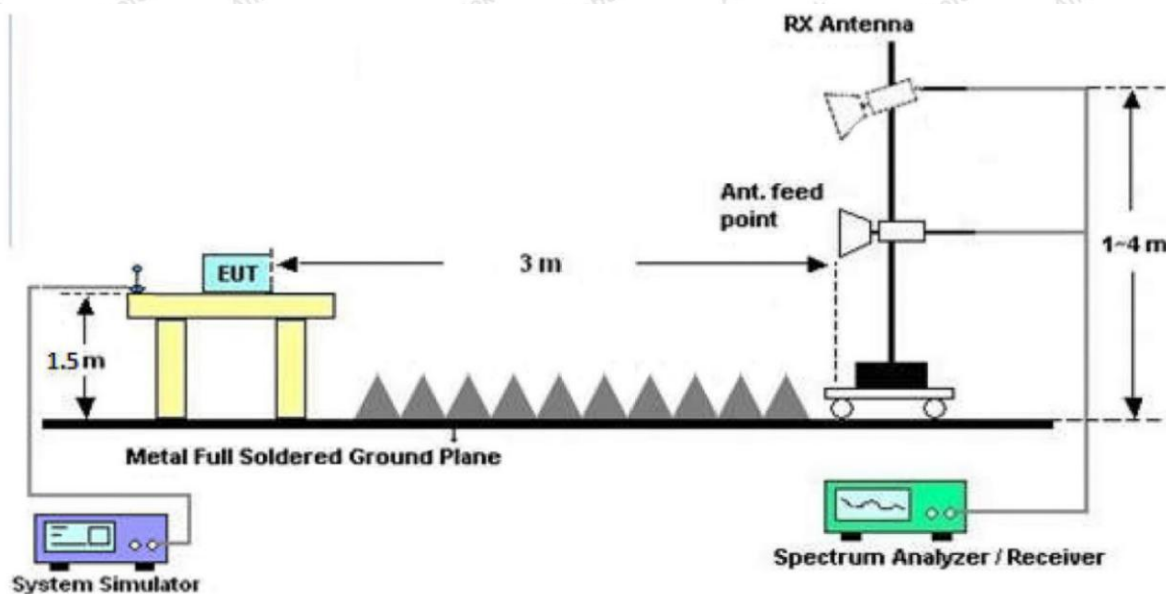


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

During the test, pre-scan all the modes, and found the CH01 (TX) which is the worst case, only the worst case is recorded in the report.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.



ANT 1:

Test Results (30~1000MHz)


Test Mode: CH01
Power Source: AC 120V, 60Hz
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 22°C/50%RH

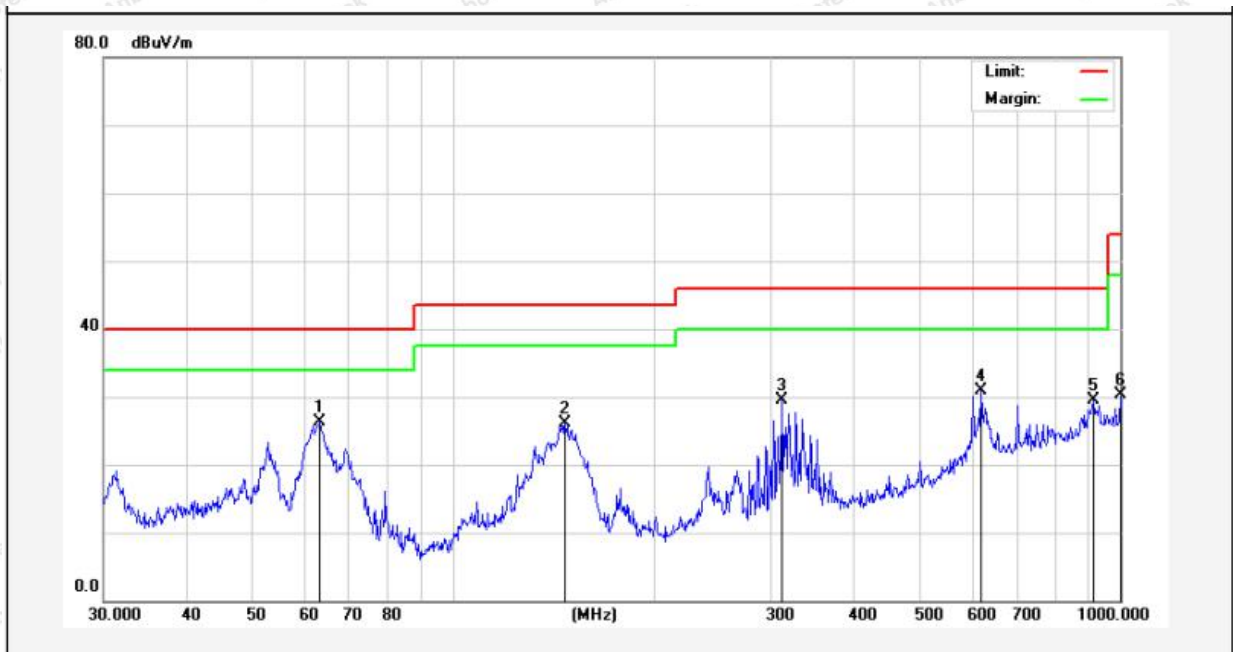

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	63.3132	45.01	-18.71	26.30	40.00	-13.70	QP			
2	147.4036	48.29	-22.11	26.18	43.50	-17.32	QP			
3	311.0867	45.45	-15.98	29.47	46.00	-16.53	QP			
4	618.5368	41.49	-10.57	30.92	46.00	-15.08	QP			
5	912.8619	35.60	-6.08	29.52	46.00	-16.48	QP			
6	1000.0000	35.03	-4.77	30.26	54.00	-23.74	QP			



Test Mode: CH01
Power Source: AC 120V, 60Hz
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 22°C/50%RH

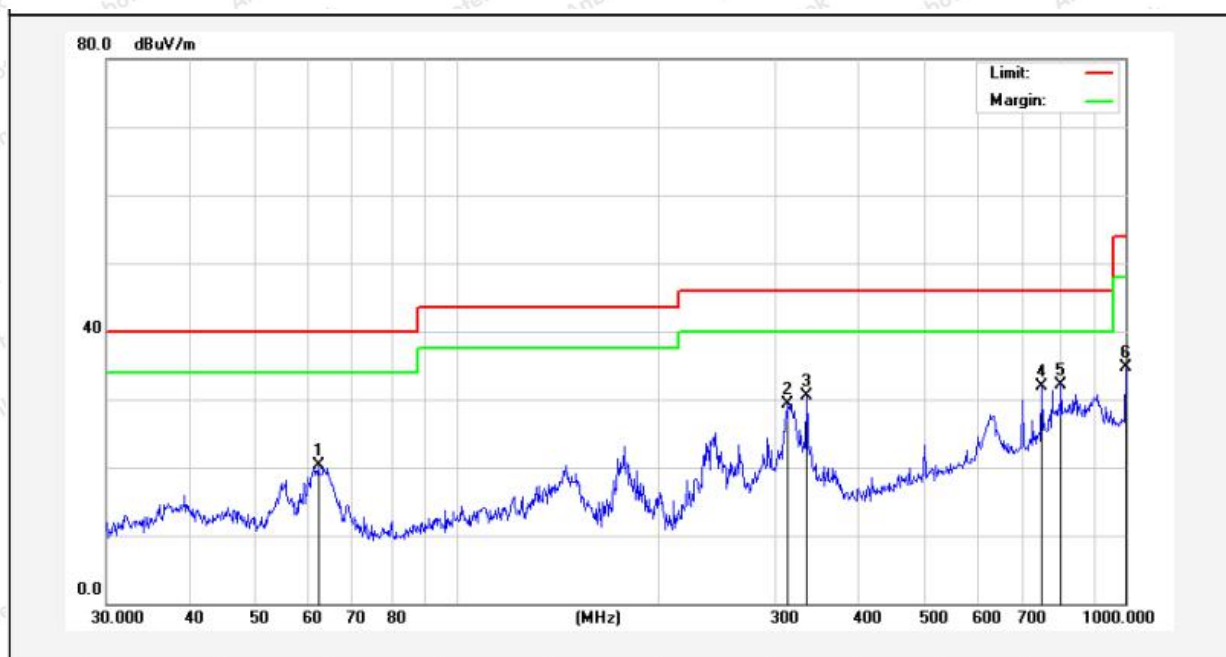


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	62.2128	38.56	-18.30	20.26	40.00	-19.74	QP			
2	313.2760	46.19	-16.85	29.34	46.00	-16.66	QP			
3	333.6867	46.97	-16.38	30.59	46.00	-15.41	QP			
4	750.1083	41.15	-9.23	31.92	46.00	-14.08	QP			
5	801.7863	40.44	-8.24	32.20	46.00	-13.80	QP			
6	1000.0000	39.55	-4.77	34.78	54.00	-19.22	QP			

Note: The EUT received input Voltage DC 3.3V from Debug board, and the Debug board received AC 120V/60Hz from Adapter.

ANT 2:


Test Results (30~1000MHz)

Test Mode: CH01
Power Source: AC 120V, 60Hz
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 22°C/50%RH

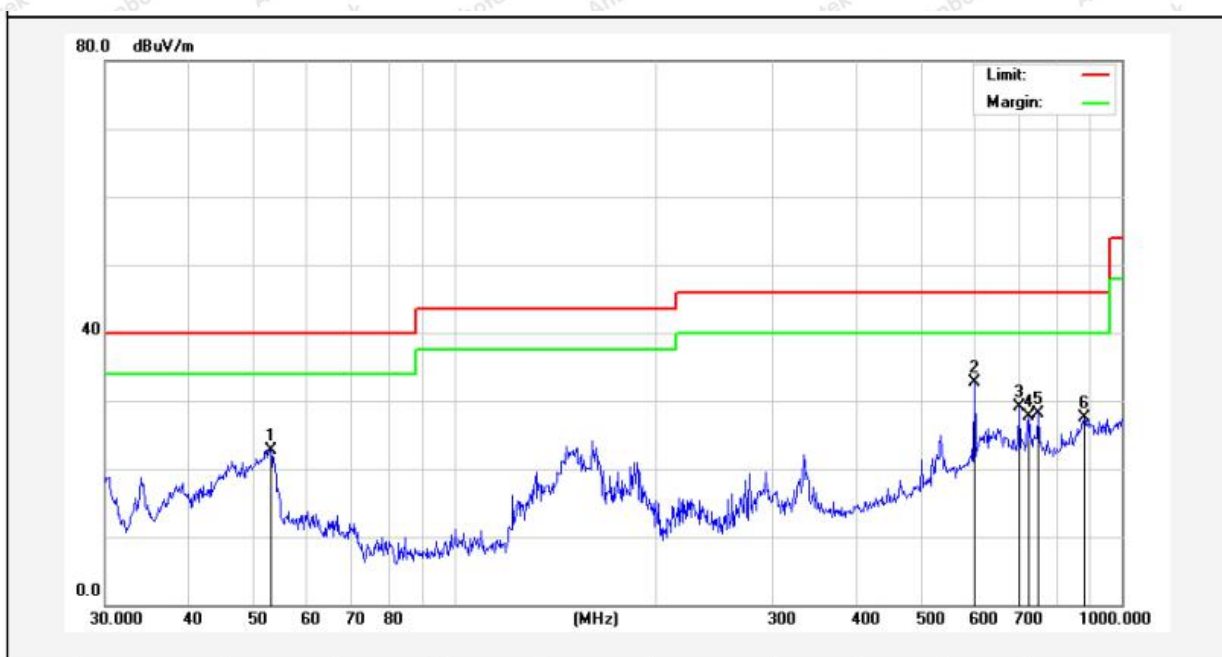

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	53.1313	39.70	-16.93	22.77	40.00	-17.23	QP			
2	601.4265	43.20	-10.53	32.67	46.00	-13.33	QP			
3	701.7610	38.98	-9.89	29.09	46.00	-16.91	QP			
4	726.8052	37.36	-9.56	27.80	46.00	-18.20	QP			
5	750.1083	37.41	-9.23	28.18	46.00	-17.82	QP			
6	878.3214	34.35	-6.77	27.58	46.00	-18.42	QP			

Test Mode: CH01
Power Source: AC 120V, 60Hz
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 22°C/50%RH

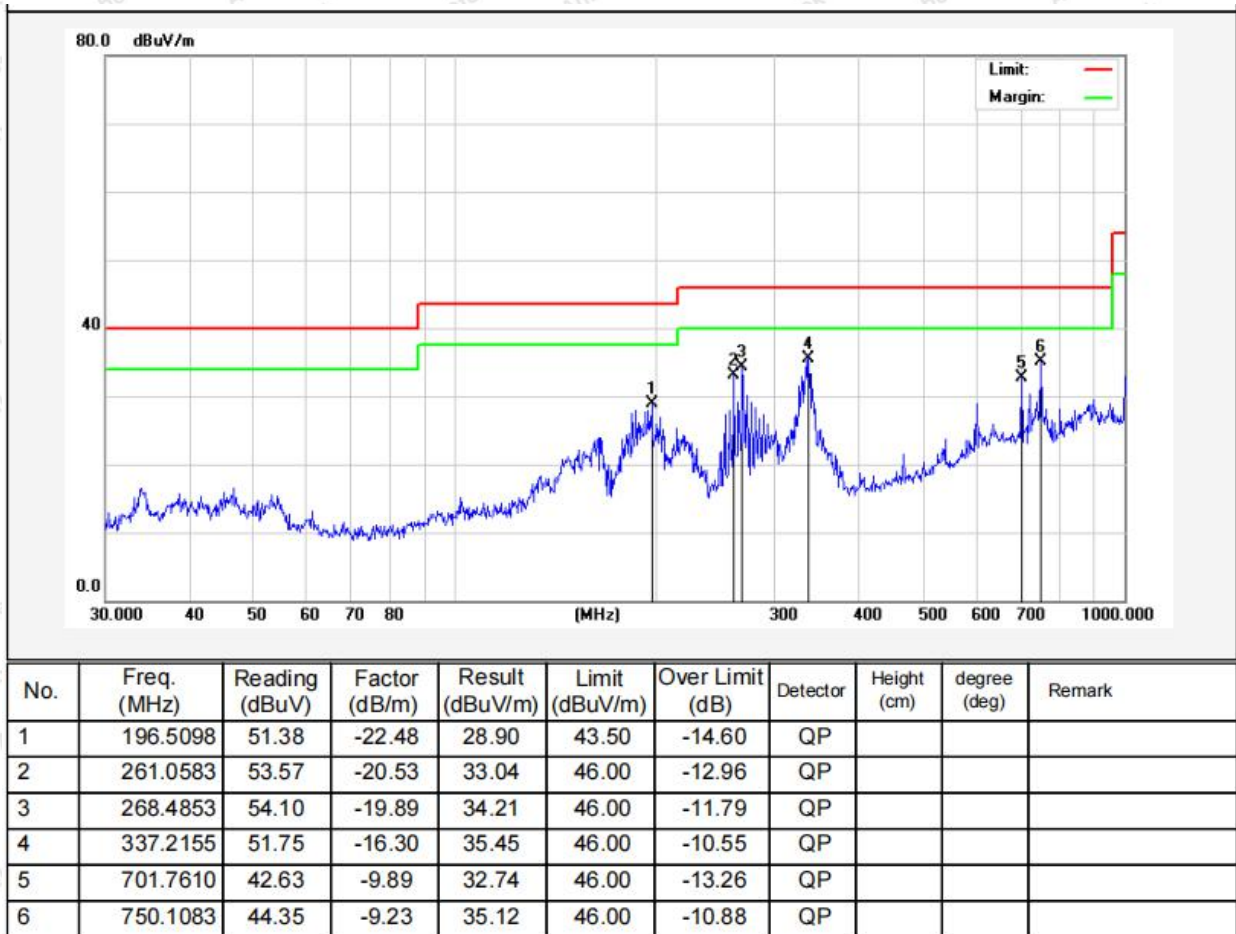

Note: The EUT received input Voltage DC 3.3V from Debug board, and the Debug board received AC 120V/60Hz from Adapter.

ANT 1

Test Results (1GHz-25GHz)

Test Mode: CH01					Test channel: Lowest				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1804.6000	H	43.15	7.39	28.73	26.31	52.96	74	-21.04	PK
1804.6000	H	34.36	7.39	28.73	26.31	44.17	54	-9.83	AV
2706.9000	H	41.33	8.10	29.71	27.01	52.13	74	-21.87	PK
2706.9000	H	33.69	8.10	29.71	27.01	44.49	54	-9.51	AV
3609.2000	H	--	--	--	--	--	--	--	PK
3609.2000	H	--	--	--	--	--	--	--	AV
1804.6000	V	42.43	7.39	28.73	26.31	52.24	74	-21.76	PK
1804.6000	V	34.41	7.39	28.73	26.31	44.22	54	-9.78	AV
2706.9000	V	41.21	8.10	29.71	27.01	52.01	74	-21.99	PK
2706.9000	V	34.69	8.10	29.71	27.01	45.49	54	-8.51	AV
3609.2000	V	--	--	--	--	--	--	--	PK
3609.2000	V	--	--	--	--	--	--	--	AV



Test Mode: CH32					Test channel: Middle				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1817.0000	H	46.42	7.41	28.72	26.31	56.24	74	-17.76	PK
1817.0000	H	37.01	7.41	28.72	26.31	46.83	54	-7.17	AV
2725.5000	H	47.09	8.11	29.71	27.01	57.90	74	-16.10	PK
2725.5000	H	35.20	8.11	29.71	27.01	46.01	54	-7.99	AV
3634.0000	H	--	--	--	--	--	--	--	PK
3634.0000	H	--	--	--	--	--	--	--	AV
1817.0000	V	46.78	7.41	28.72	26.31	56.60	74	-17.40	PK
1817.0000	V	36.57	7.41	28.72	26.31	46.39	54	-7.61	AV
2725.5000	V	47.14	8.11	29.71	27.01	57.95	74	-16.05	PK
2725.5000	V	35.12	8.11	29.71	27.01	45.93	54	-8.07	AV
3634.0000	V	--	--	--	--	--	--	--	PK
3634.0000	V	--	--	--	--	--	--	--	AV



Test Mode: CH64					Test channel: High				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1829.8000	H	46.80	7.43	28.69	26.31	56.61	74	-17.39	PK
1829.8000	H	37.04	7.43	28.69	26.31	46.85	54	-7.15	AV
2744.7000	H	45.95	8.15	29.84	27.01	56.93	74	-17.07	PK
2744.7000	H	36.01	8.15	29.84	27.01	46.99	54	-7.01	AV
3659.6000	H	--	--	--	--	--	--	--	PK
3659.6000	H	--	--	--	--	--	--	--	AV
1829.8000	V	47.84	7.43	28.69	26.31	57.65	74	-16.35	PK
1829.8000	V	36.35	7.43	28.69	26.31	46.16	54	-7.84	AV
2744.7000	V	46.68	8.15	29.84	27.01	57.66	74	-16.34	PK
2744.7000	V	34.40	8.15	29.84	27.01	45.38	54	-8.62	AV
3659.6000	V	--	--	--	--	--	--	--	PK
3659.6000	V	--	--	--	--	--	--	--	AV

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “--” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



ANT 2

Test Results (1GHz-25GHz)

Test Mode: CH01					Test channel: Lowest				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1804.6000	H	43.38	7.39	28.73	26.31	53.19	74	-20.81	PK
1804.6000	H	35.07	7.39	28.73	26.31	44.88	54	-9.12	AV
2706.9000	H	41.72	8.10	29.71	27.01	52.52	74	-21.48	PK
2706.9000	H	33.53	8.10	29.71	27.01	44.33	54	-9.67	AV
3609.2000	H	--	--	--	--	--	--	--	PK
3609.2000	H	--	--	--	--	--	--	--	AV
1804.6000	V	43.77	7.39	28.73	26.31	53.58	74	-20.42	PK
1804.6000	V	35.47	7.39	28.73	26.31	45.28	54	-8.72	AV
2706.9000	V	42.27	8.10	29.71	27.01	53.07	74	-20.93	PK
2706.9000	V	34.04	8.10	29.71	27.01	44.84	54	-9.16	AV
3609.2000	V	--	--	--	--	--	--	--	PK
3609.2000	V	--	--	--	--	--	--	--	AV



Test Mode: CH32					Test channel: Middle				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1817.0000	H	47.40	7.41	28.72	26.31	57.22	74	-16.78	PK
1817.0000	H	36.45	7.41	28.72	26.31	46.27	54	-7.73	AV
2725.5000	H	47.08	8.11	29.71	27.01	57.89	74	-16.11	PK
2725.5000	H	34.81	8.11	29.71	27.01	45.62	54	-8.38	AV
3634.0000	H	--	--	--	--	--	--	--	PK
3634.0000	H	--	--	--	--	--	--	--	AV
1817.0000	V	46.38	7.41	28.72	26.31	56.20	74	-17.80	PK
1817.0000	V	36.15	7.41	28.72	26.31	45.97	54	-8.03	AV
2725.5000	V	45.39	8.11	29.71	27.01	56.20	74	-17.80	PK
2725.5000	V	34.66	8.11	29.71	27.01	45.47	54	-8.53	AV
3634.0000	V	--	--	--	--	--	--	--	PK
3634.0000	V	--	--	--	--	--	--	--	AV



Test Mode: CH64					Test channel: High				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1829.8000	H	47.08	7.43	28.69	26.31	56.89	74	-17.11	PK
1829.8000	H	35.55	7.43	28.69	26.31	45.36	54	-8.64	AV
2744.7000	H	46.32	8.15	29.84	27.01	57.30	74	-16.70	PK
2744.7000	H	35.93	8.15	29.84	27.01	46.91	54	-7.09	AV
3659.6000	H	--	--	--	--	--	--	--	PK
3659.6000	H	--	--	--	--	--	--	--	AV
1829.8000	V	48.15	7.43	28.69	26.31	57.96	74	-16.04	PK
1829.8000	V	36.12	7.43	28.69	26.31	45.93	54	-8.07	AV
2744.7000	V	45.61	8.15	29.84	27.01	56.59	74	-17.41	PK
2744.7000	V	35.60	8.15	29.84	27.01	46.58	54	-7.42	AV
3659.6000	V	--	--	--	--	--	--	--	PK
3659.6000	V	--	--	--	--	--	--	--	AV

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “--” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.2. Antenna Connected Construction

The antenna is Cylindrical antenna which permanently attached, and the best case gain of the antenna is 3dBi, 2.6dBi. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files for Test Setup Photos of the EUT.

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files for external Photos of the EUT.

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files for internal Photos of the EUT.

----- End of Report -----

